


REVISION RECORD		
Change Description	Approved	Date
NEW RELEASE		

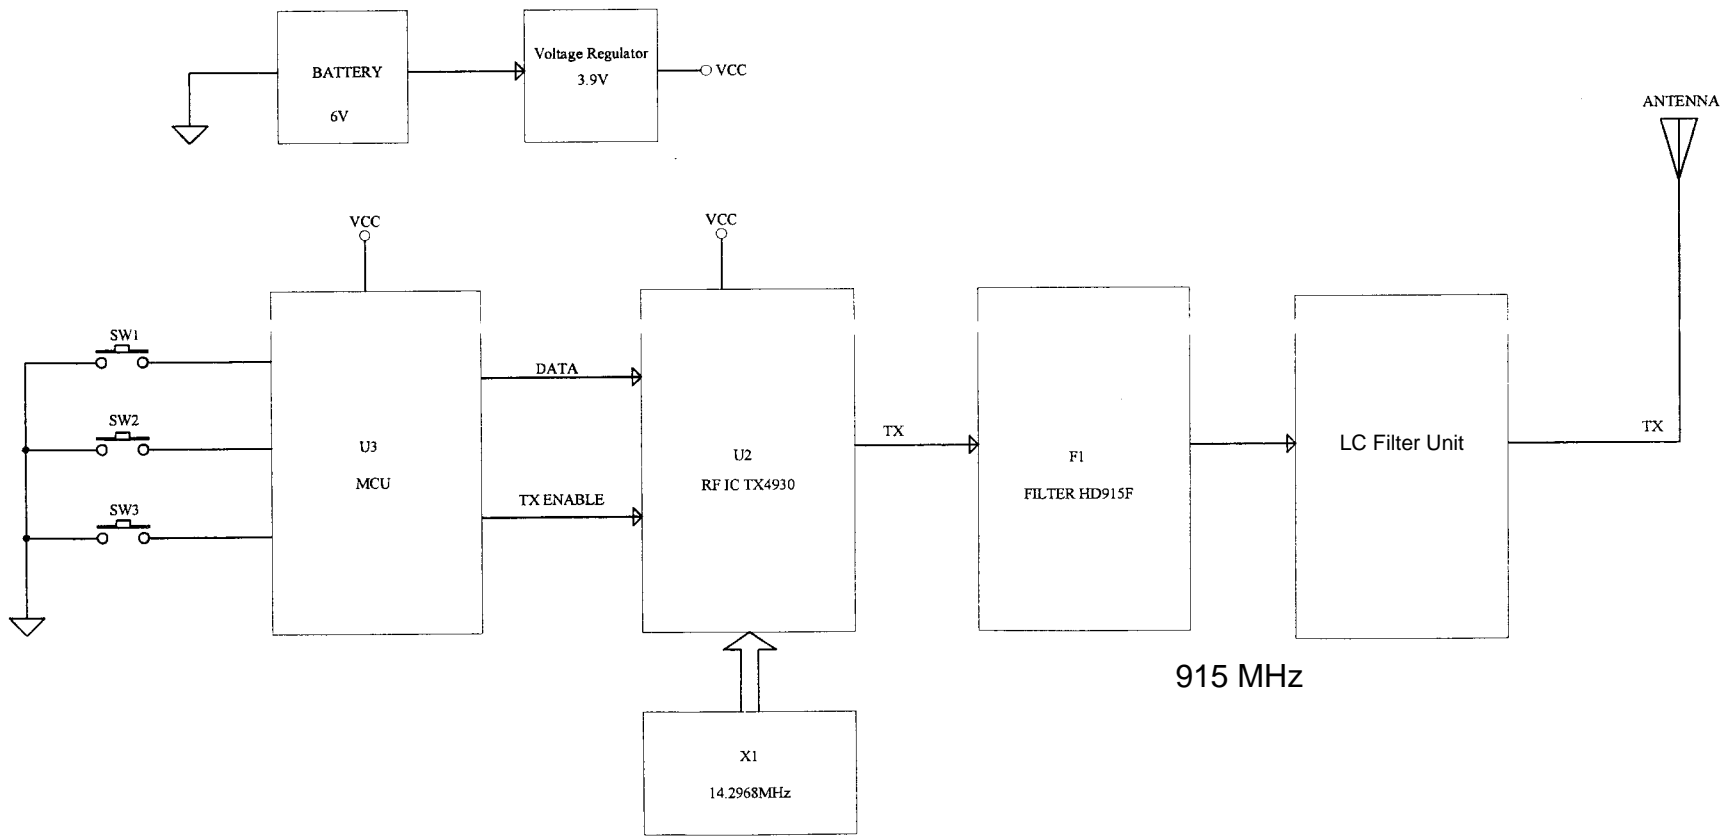

915 MHz

Company: JDI Company Limited			
Drawn:	TAW	Title: 915MHz SPRAY TRAINER TX	
Date:	DEC.06.2004	Document No:	Rev: A
Checked:		Approved:	
Date:		File:	#336/915TX.SCH Sheet 1 of 1

11/2004
J.E.C.S.S.



TX4930 Low Power ISM-band FM/FSK Transmitter IC

HiMARK Technology, Inc. reserves the right to change the product described in this datasheet. All information contained in this datasheet is subject to change without prior notice. HiMARK Technology, Inc. assumes no responsibility for the use of any circuits shown in this datasheet.

Description

The TX4930 is a low-power 433/868/915 MHz FM/FSK transmitter IC suitable for use in the North American 915 MHz and European 433 and 868 MHz ISM bands. The TX4930 is intended as a phase-locked frequency source in local oscillator or transmitter applications.

Features

- ◆ Integrated VCO with multi-modulus $\div 64/65/128/129$ prescaler, phase/frequency detector, and reference oscillator forming complete phase-locked loop
- ◆ Transmitter enable pin for power saving
- ◆ 2.4V to 5V supply voltage
- ◆ On-chip varactor diode for narrowband modulation
- ◆ SSOP-16 package (0.64mm pitch)

Applications

- ◆ Wireless mouse
- ◆ Wireless amplifier/ speaker/ headphone/ microphone
- ◆ Wireless car alarm system

Block Diagram

