




## Appendix B

Output Power

**Field Strength of Fundamental**

**FCC RULES PART 15, SUBPART C**


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL223  
Freq: 433.928MHz, Emax: 80.47dBµV/m, RBW: 100kHz

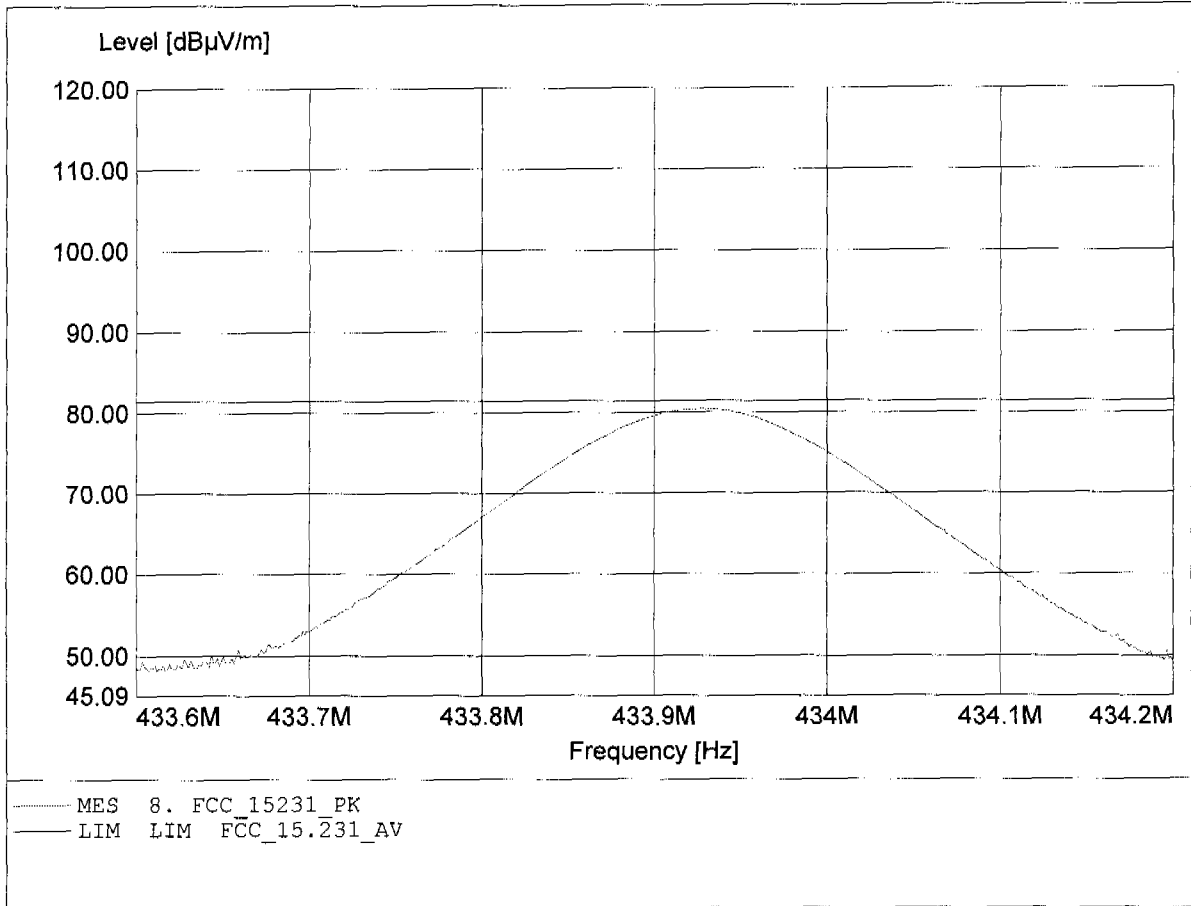

**Field Strength of Fundamental**

**FCC RULES PART 15, SUBPART C**

EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL223  
Freq: 433.926MHz, Emax: 75.78dB $\mu$ V/m, RBW: 100kHz

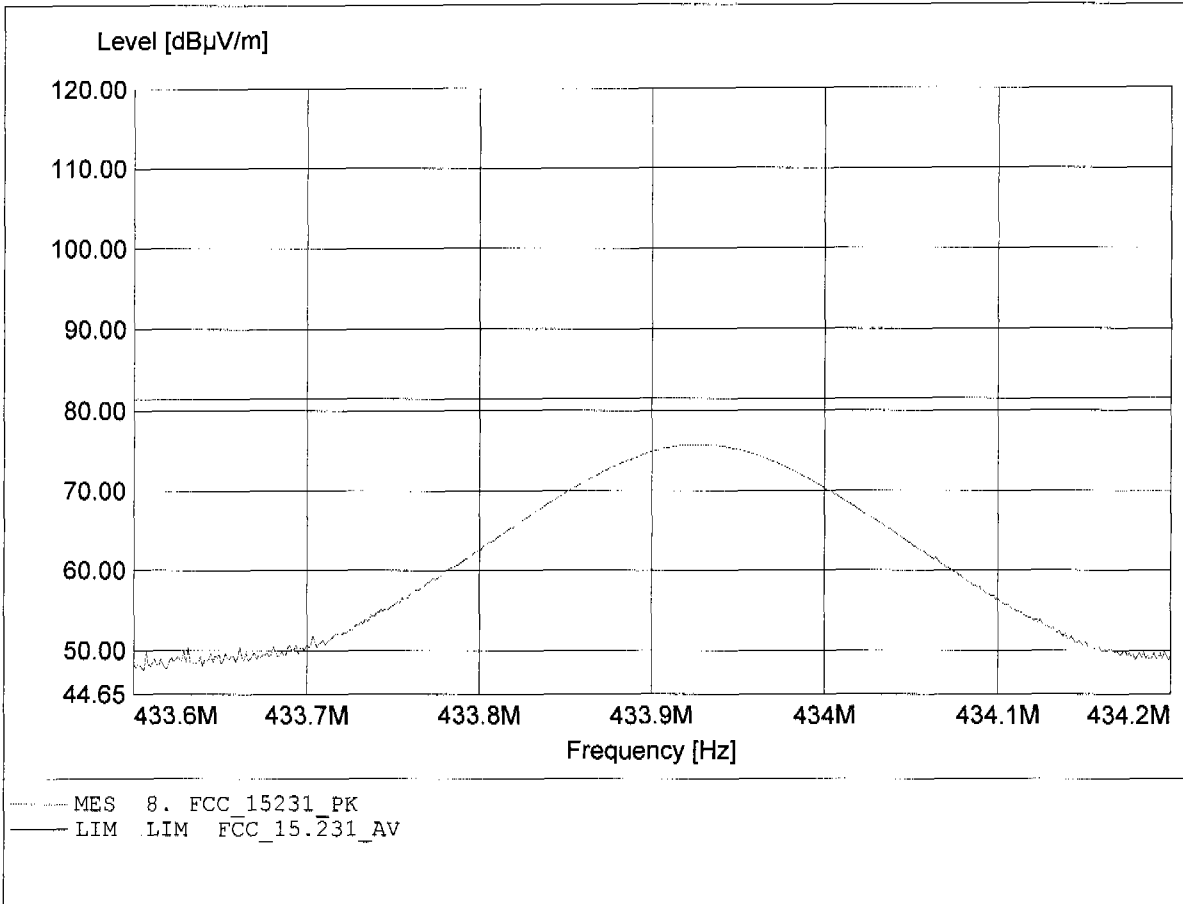




## Appendix C

Spurious Emissions radiated, Transmitter

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 193.868MHz, Emax: 25.27dBµV/m, RBW: 100kHz

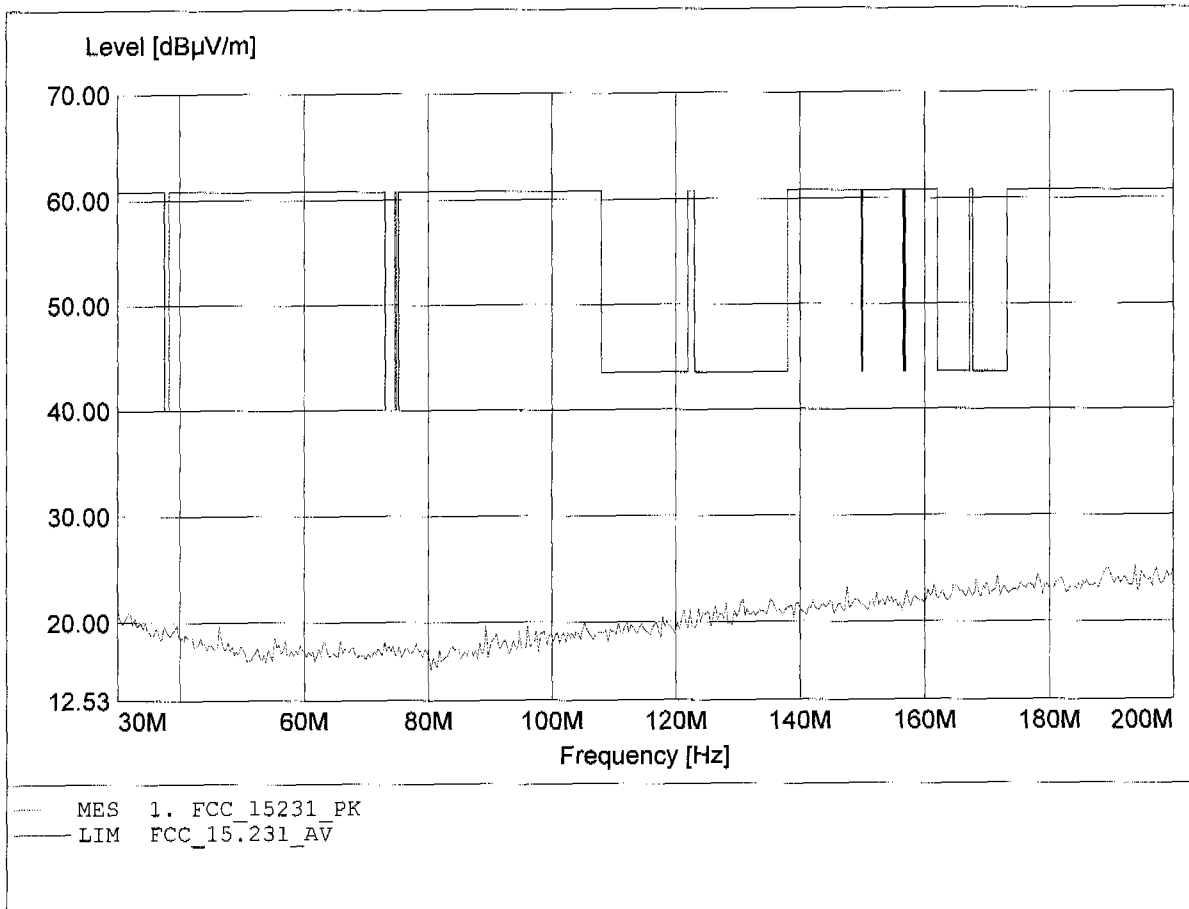

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 199.319MHz, Emax: 25.91dBµV/m, RBW: 100kHz

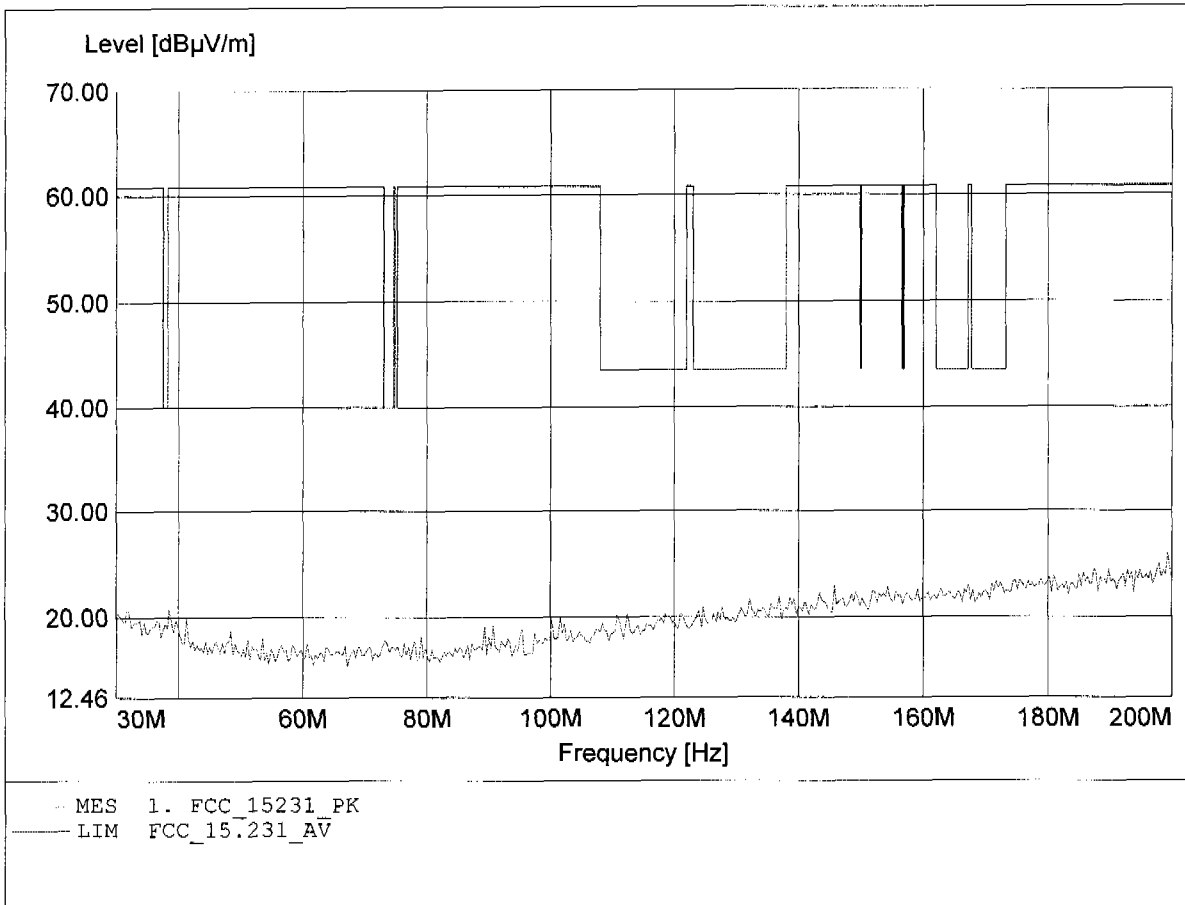

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 434.068MHz, Emax: 76.58dB $\mu$ V/m, RBW: 100kHz

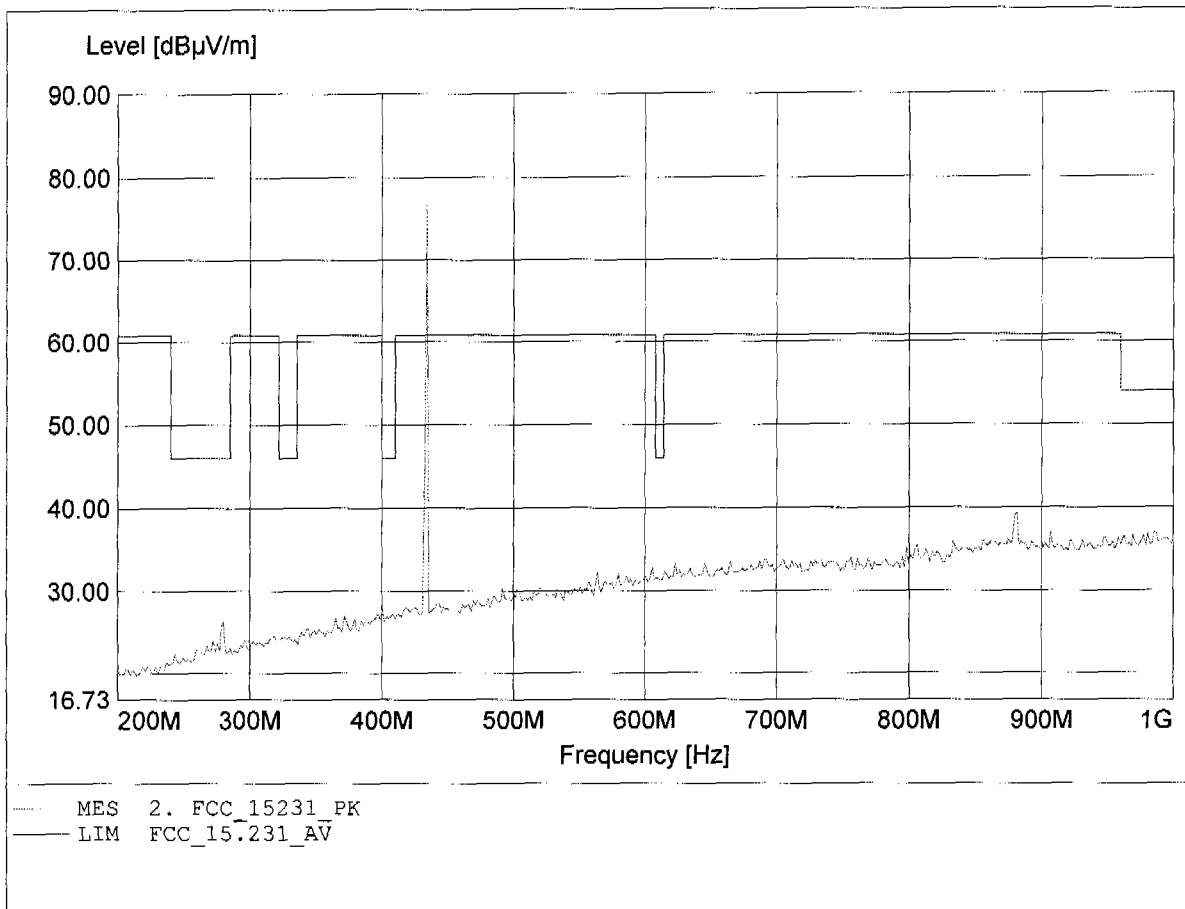

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 434.068MHz, Emax: 78.97dB $\mu$ V/m, RBW: 100kHz

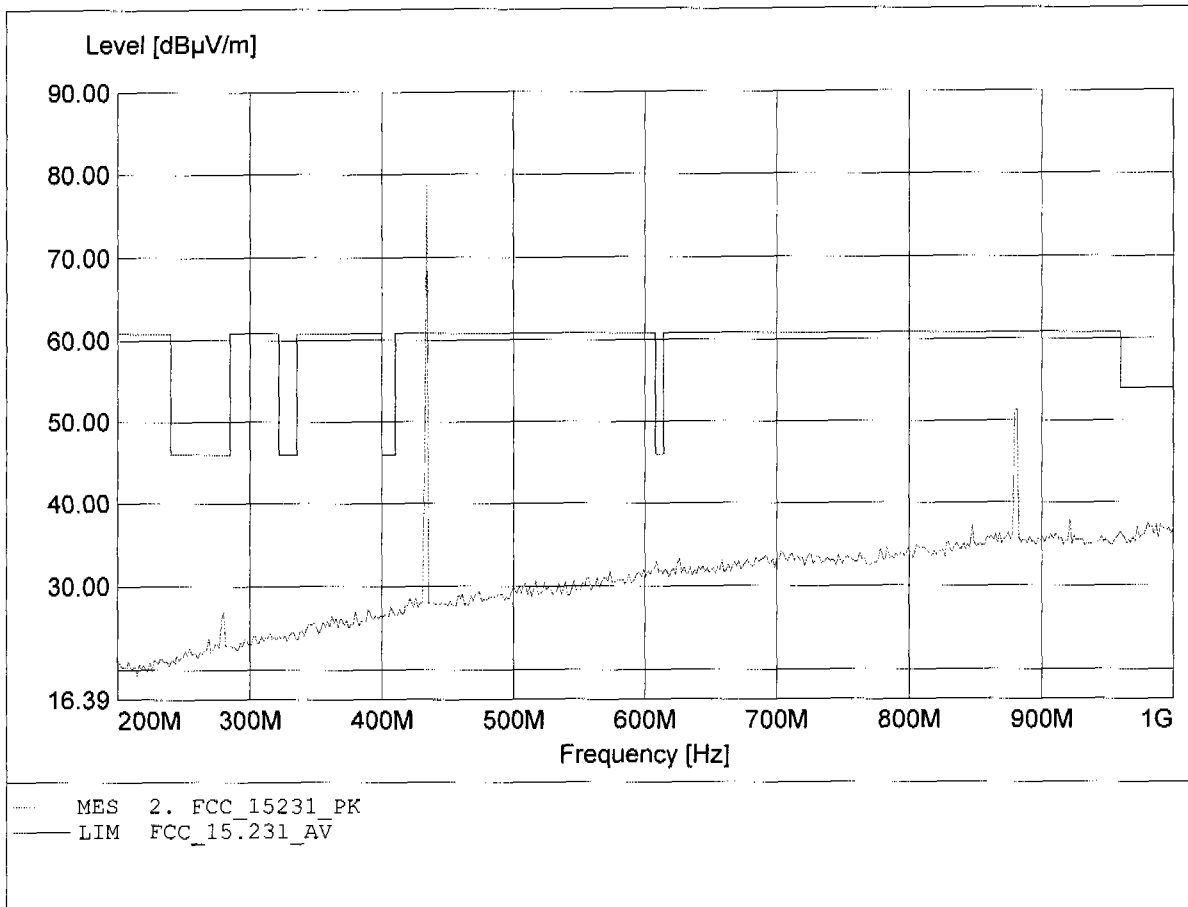




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.605GHz, Emax: 48.22dB $\mu$ V/m, RBW: 1MHz

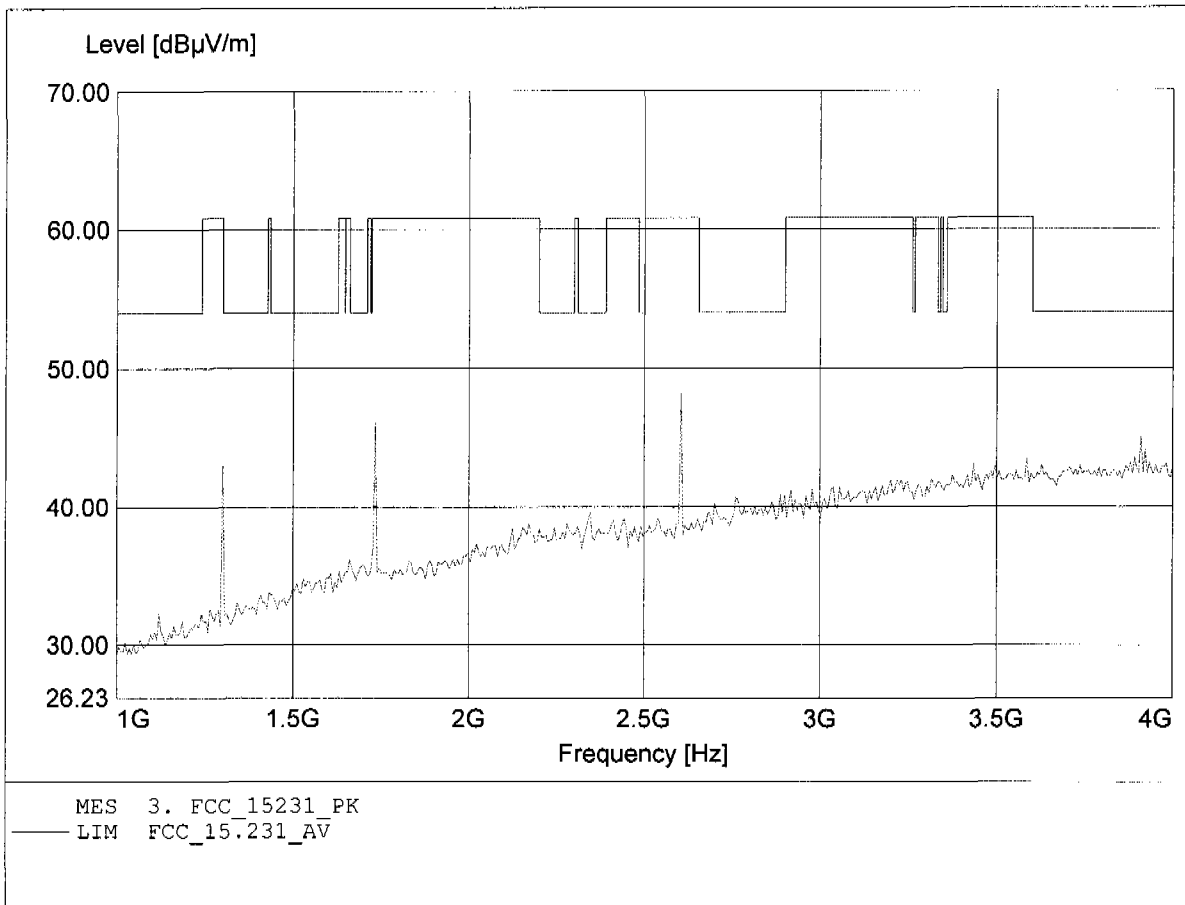

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 1.733GHz, Emax: 58.15dB $\mu$ V/m, RBW: 1MHz

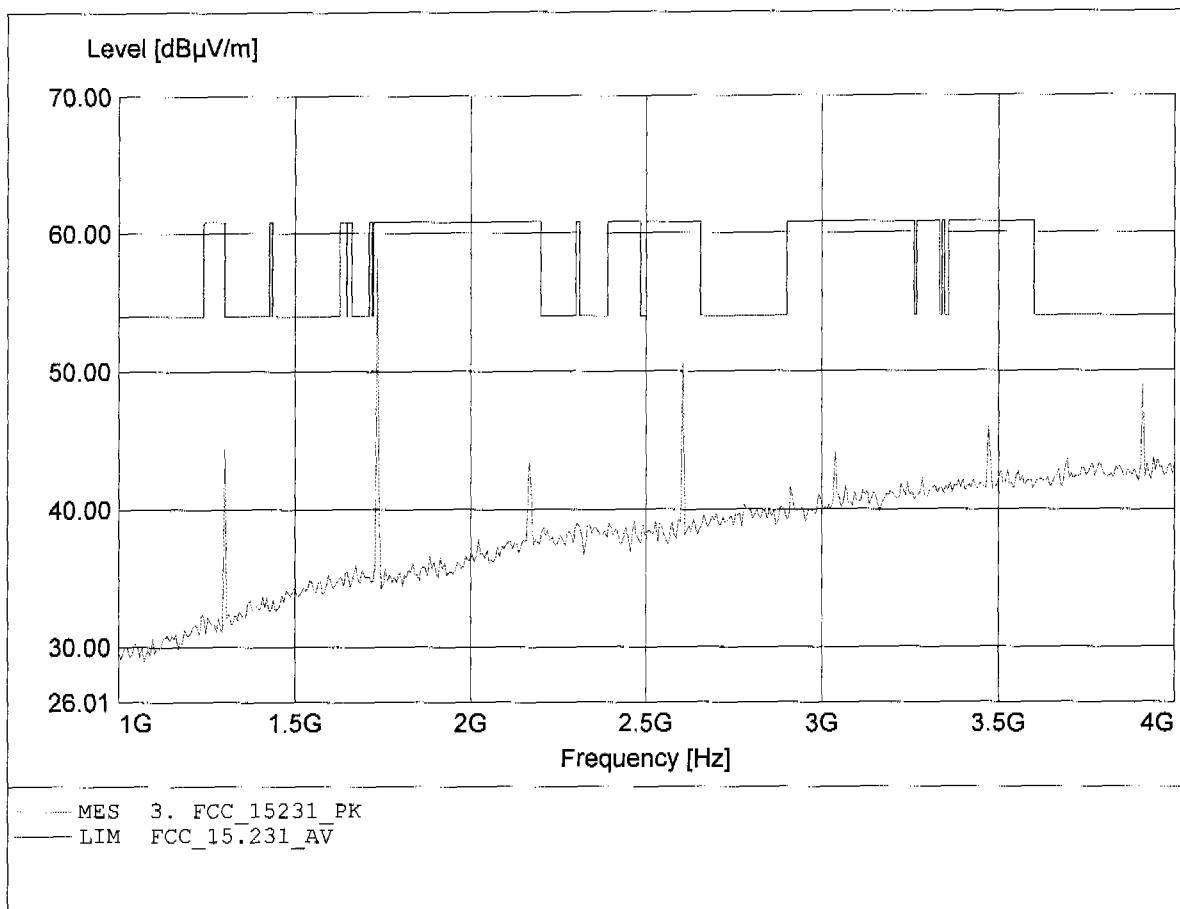

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.263GHz, Emax: 42.56dB $\mu$ V/m, RBW: 1MHz

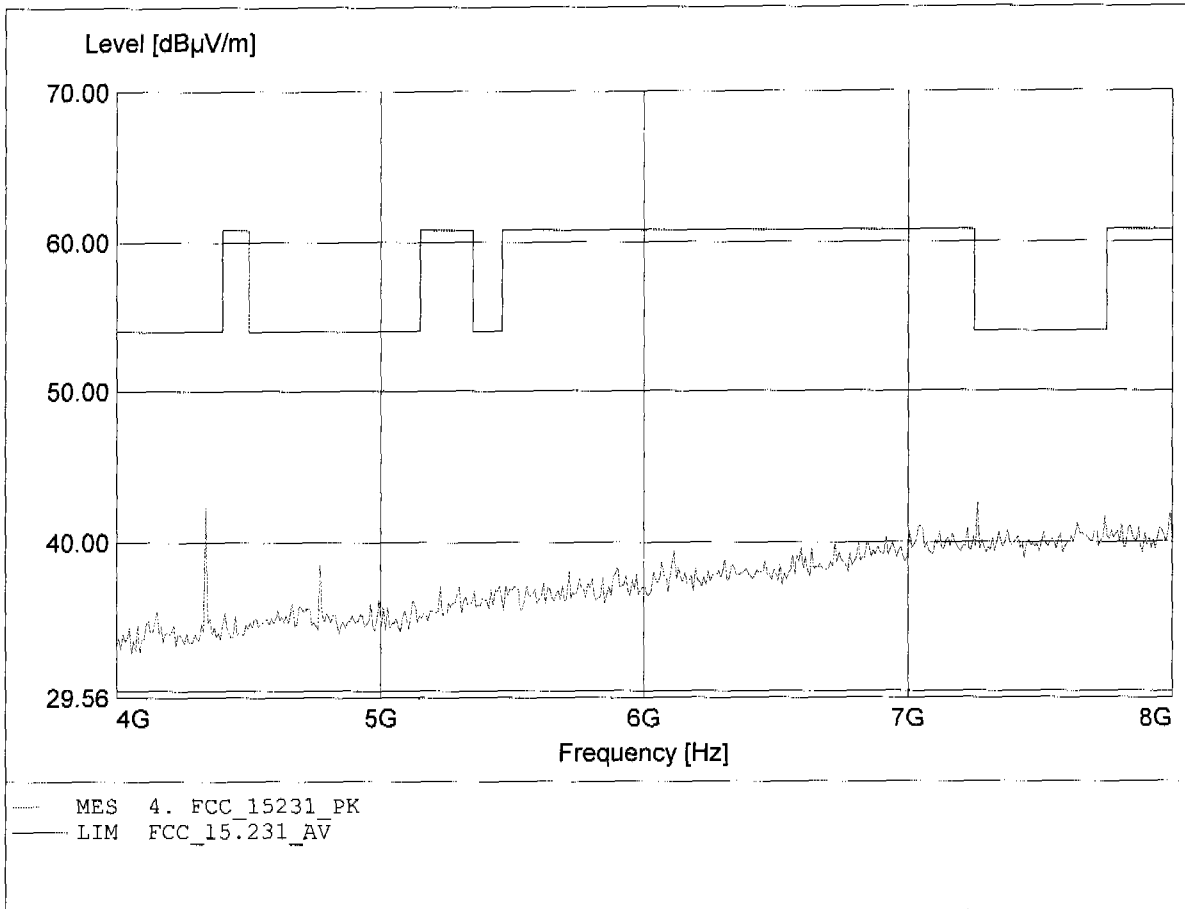

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**

EUT: REMOTE CONTROL  
MODEL NO.: DSP17010  
Approval Holder: Multivet International INC.  
Test Site / Operator: ETS / PIERCE PENG  
Temperature/Voltage: Temp.: 23°C/ Unom.: 12 VDC (battery)  
Test Specification: according to Section 15.231, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 4.337GHz, Emax: 47.95dB $\mu$ V/m, RBW: 1MHz

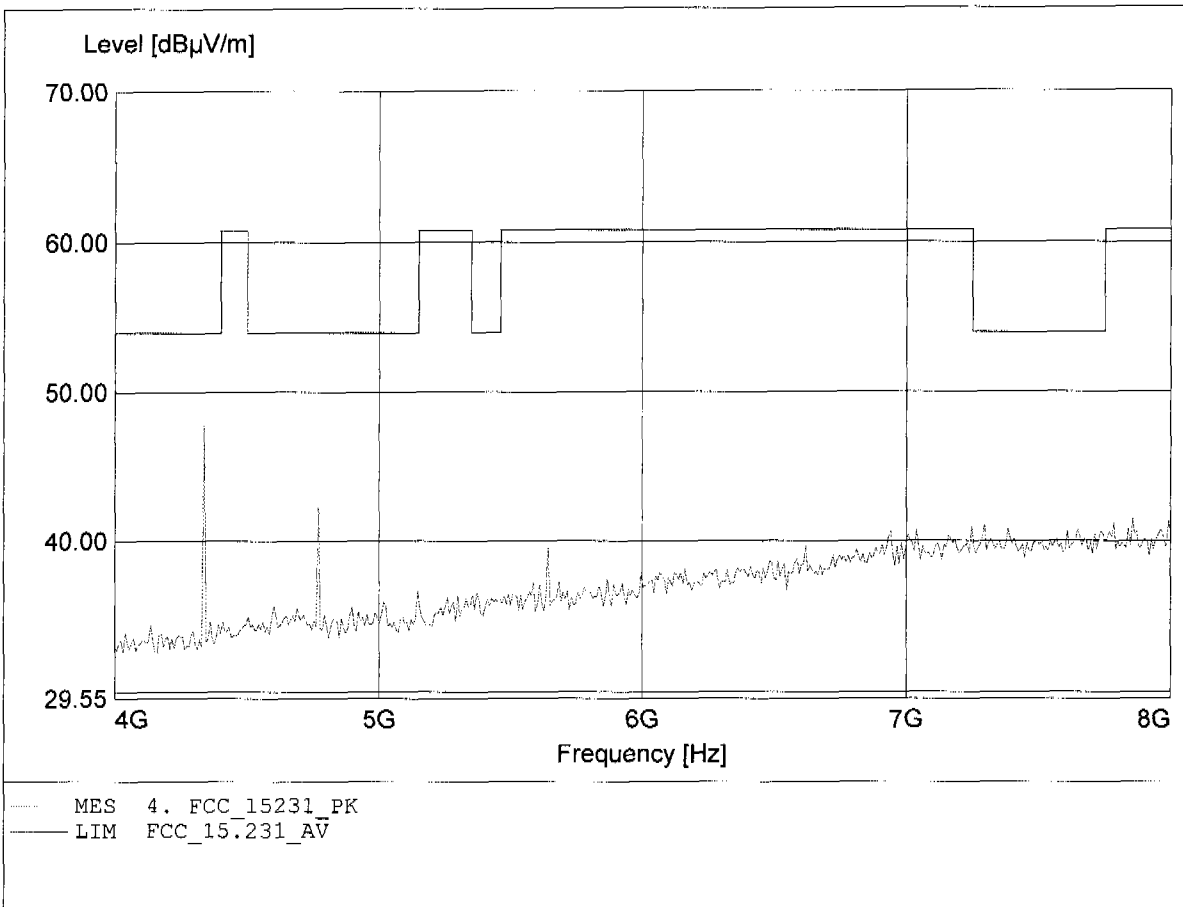




## Appendix D

Bandwidth



Marker 1 [T1 ndB] RBW 100 kHz RF Att 40 dB  
Ref Lvl ndB 20.00 dB VBW 100 kHz  
117 dBV BW 447.42610220 kHz SWT 20 ms Unit dBV

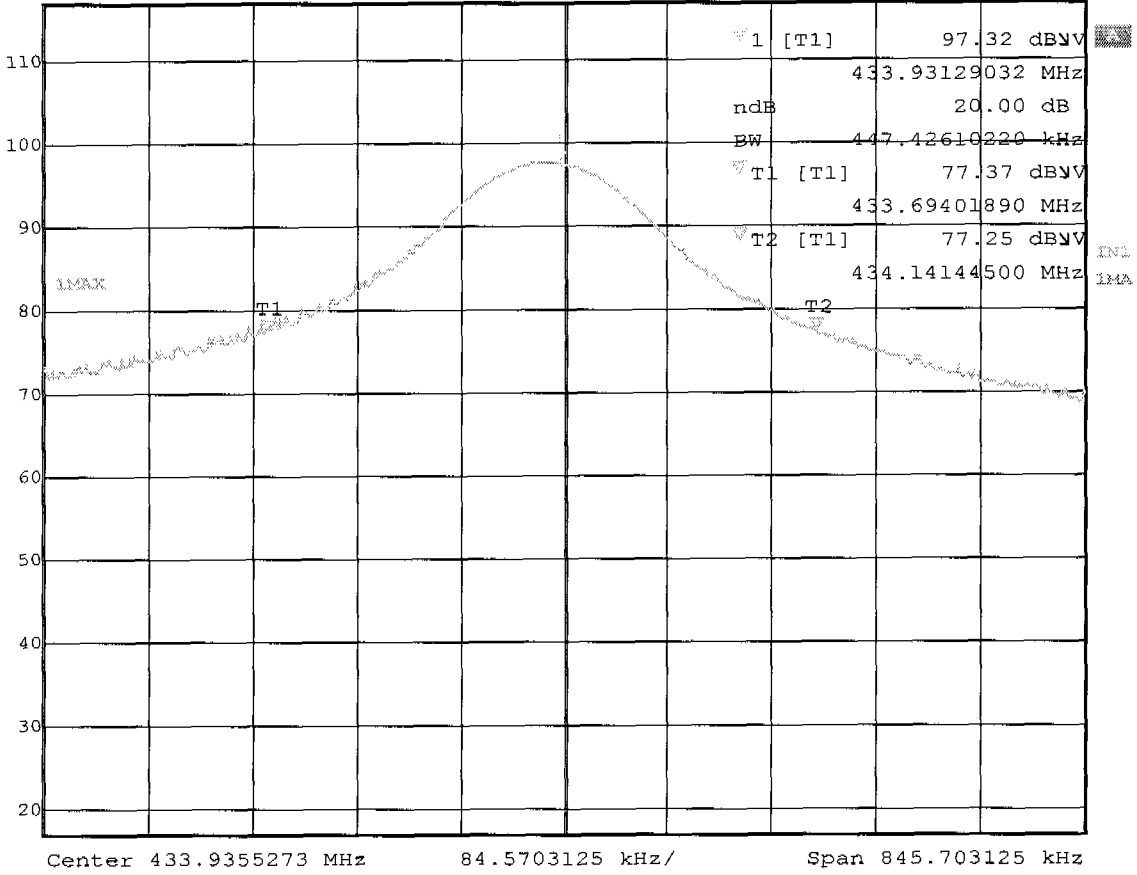

Title: bandwidth  
Date: 12.JAN.2004 18:38:31



## Appendix E

Spurious Emissions radiated, Receiving



## Appendix F

Conducted Measurement at (AC) Power Line