

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Measy Electronics Co., Ltd.

Rm1506, Block B, Hai Song Building, Tai Ran 9th Road, Che Gong Miao,
Shenzhen, China

E.U.T.: Android TV Dongle

Model Name: U1A

Trade name: Measy

FCC ID: RB8U1A

Report Number: NTC12111015F

Test Date(s): November 06, 2012 to November 24, 2012

Report Date(s): November 26, 2012

Prepared by

Dongguan NTC Co., Ltd.

Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District,
Dongguan City, Guangdong Province, China

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Rose Hu / Engineer



Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan NTC Co., Ltd.
The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 EQUIPMENT MODIFICATIONS	6
1.5 SUPPORT DEVICE	6
1.6 TEST FACILITY AND LOCATION	7
1.7 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION	8
2.2 SPECIAL ACCESSORIES	8
2.3 DESCRIPTION OF TEST MODES	8
2.4 EUT EXERCISE	8
3. CONDUCTED EMISSIONS TEST	9
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
3.2 TEST CONDITION	9
3.3 MEASUREMENT RESULTS	9
4. MAX. CONDUCTED OUTPUT POWER	12
4.1 MEASUREMENT PROCEDURE	12
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
4.3 MEASUREMENT RESULTS	12
5. 6DB BANDWIDTH	28
5.1 MEASUREMENT PROCEDURE	28
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
5.3 MEASUREMENT RESULTS	28
6. POWER SPECTRAL DENSITY	36
6.1 MEASUREMENT PROCEDURE	36
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
6.3 MEASUREMENT RESULTS	36
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	44
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	44
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	44
7.3 MEASUREMENT RESULTS	44



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS 55

8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 55

8.2 MEASUREMENT PROCEDURE 56

8.3 LIMIT..... 57

8.4 MEASUREMENT RESULTS 58

9. ANTENNA APPLICATION 75

9.1 ANTENNA REQUIREMENT 75

9.2 MEASUREMENT RESULTS..... 75

10. TEST EQUIPMENT LIST..... 76

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

The EUT is a Android TV Dongle with internal WiFi function operating at 2412-2462MHz for IEEE 802.11 b/g/n(HT20) and 2422-2452 for IEEE 802.11n(HT40). It's powered by external DC 5V through USB port. For more details features, please refer to User's Manual.

Manufacturer	: Measy Electronics Co., Ltd.
Address	: Rm1506, Block B, Hai Song Building, Tai Ran 9th Road, Che Gong Miao, Shenzhen, China
RF Operation Frequency:	: 2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
Modulation	: CCK, DQPSK, DBPSK for 802.11b OFDM for 802.11g/n
Number of Channel	: 11 for 802.11b/g/n(HT20) 7 for 802.11n(HT40)
Channel space	: 5MHz
Date Rate	: 802.11b:1~11Mbps, 802.11g:6~54Mbps 802.11n: 6.5~135Mbps
Antenna Type	: Integral
Antenna Gain	: -2.5 dBi (declared by manufacturer)
Power Supply	: DC 5V come from external USB Port
Model name	: U1A
Note:	: N.A.

Channel List

802.11 b/g/n(HT20)		802.11 n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	---	---
2	2417	---	---
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	---	---
11	2462	---	---

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)		802.11 n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	3	2422
6	2437	6	2437
11	2462	9	2452

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: RB8U1A filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rule.

1.3 Test Methodology

AC mains line-conducted, antenna port conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003) and KDB558074(v02). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Laptop	: Manufacturer: IBM Corporation M/N: R50e S/N: L3-HZNGO Product ID: 1834KDC
AC Adapter	: Manufacturer: IBM Corporation M/N: 08K8210 Input: AC 100-240V 50/60Hz 0.5-1.0A Output: DC 16V 4.5A
Switching Adapter (Provid by manufacturer)	: M/N: FJ-SW0552000U Input: AC 100-240V 50/60Hz 0.35A Output: 5.5V 2000mA

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.

Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.

Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District, Dongguan City,
Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207 (a)	AC Power Conducted Emission	Compliance
§15.247(b)(3)	Max. Conducted Output Power	Compliance
§15.247(a)(2)	6dB Bandwidth	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	Compliance
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	Compliance
§15.203	Antenna Requirement	Compliance

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested, but only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

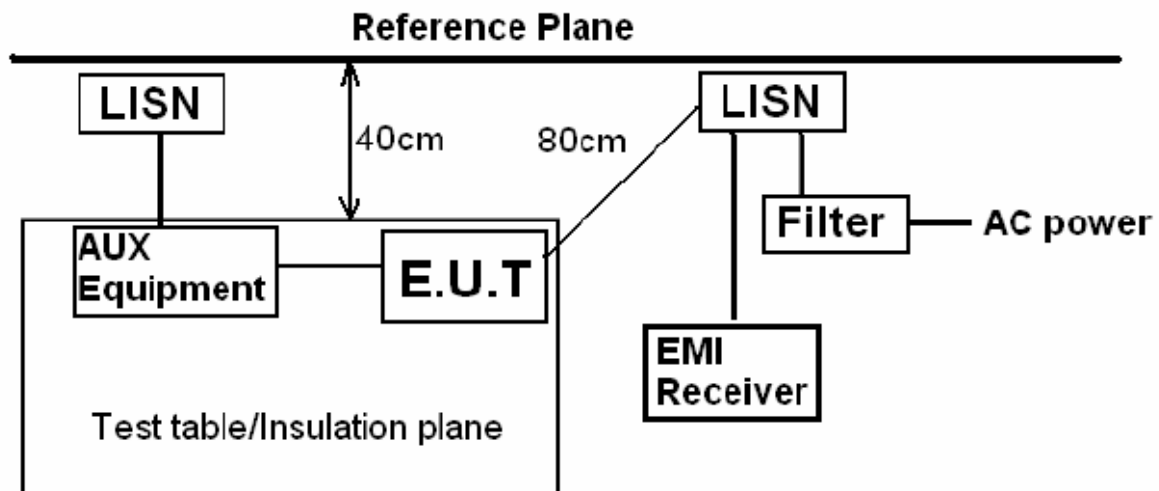

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX

3.3 Measurement Results


Please refer to following the worst case (802.11b) plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2012-11-20 11:01:24

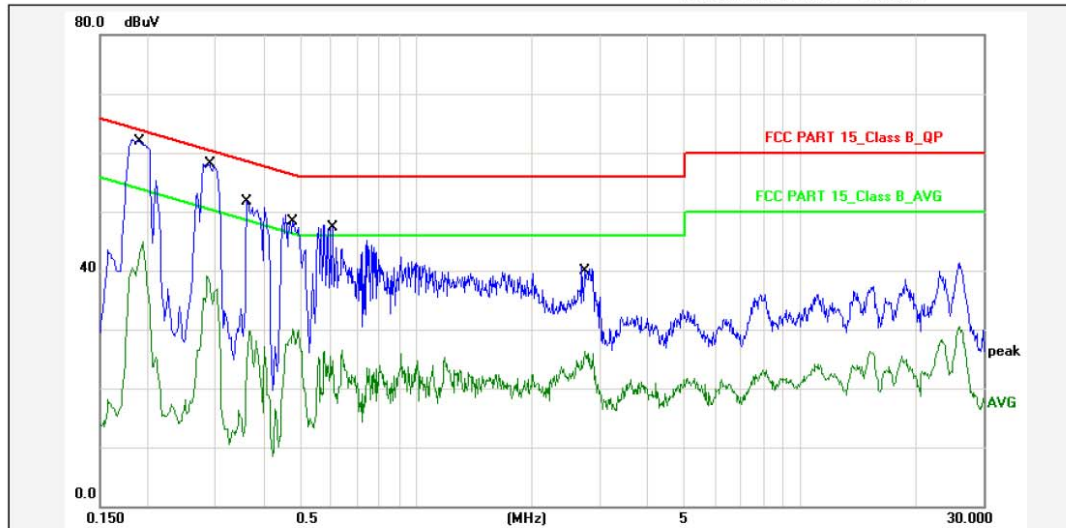

Report No.: U1A

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Measy

Temp.()/Hum.(%): 24(C) / 52 %

Product: Android TV Dongle

Power Rating: AC 120V/60Hz

Model No.: U1A

Test Engineer: Infen

Test Mode: TX

Remark: 802.11.b

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1912	10.80	47.32	58.12	63.98	-5.86	QP	P	
2	0.1912	10.80	34.06	44.86	53.98	-9.12	AVG	P	
3	0.2900	10.80	44.22	55.02	60.52	-5.50	QP	P	
4	0.2900	10.80	28.26	39.06	50.52	-11.46	AVG	P	
5	0.3620	10.80	37.97	48.77	58.68	-9.91	QP	P	
6	0.3620	10.80	18.87	29.67	48.68	-19.01	AVG	P	
7	0.4780	10.80	35.66	46.46	56.37	-9.91	QP	P	
8	0.4780	10.80	19.22	30.02	46.37	-16.35	AVG	P	
9	0.5979	10.80	33.93	44.73	56.00	-11.27	QP	P	
10	0.5979	10.80	14.71	25.51	46.00	-20.49	AVG	P	
11	2.7540	10.80	26.91	37.71	56.00	-18.29	QP	P	
12	2.7540	10.80	15.51	26.31	46.00	-19.69	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:U1A\#13


Page: 1



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2012-11-20 11:03:22

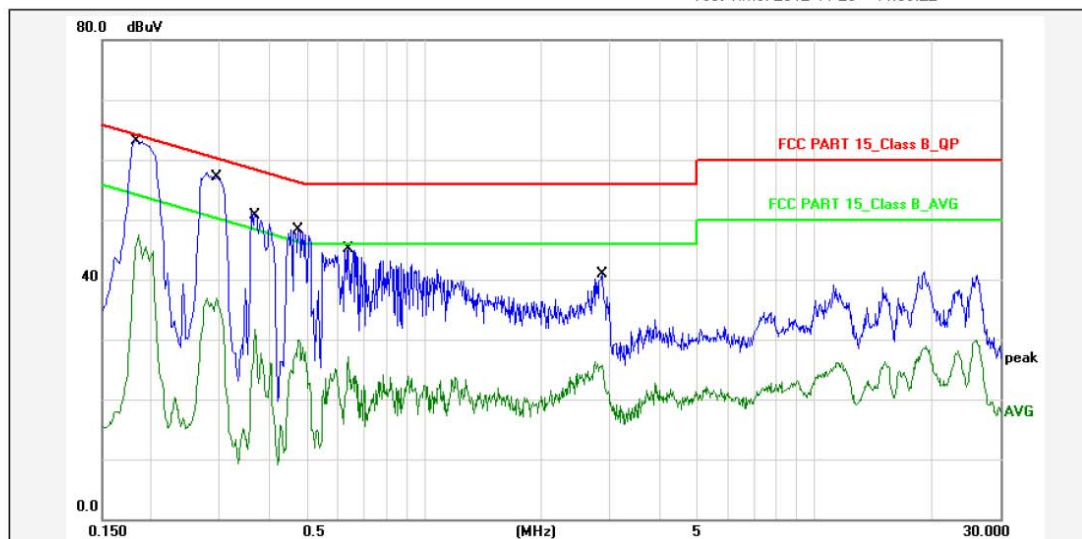

Report No.: U1A

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Applicant: Measy

Product: Android TV Dongle

Model No.: U1A

Phase: N

Temp.()/Hum.(%): 24(C) / 52 %

Power Rating: AC 120V/60Hz

Test Engineer: Infen

Test Mode: TX

Remark: 802.11.b

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1859	10.80	49.44	60.24	64.21	-3.97	QP	P	
2	0.1859	10.80	36.64	47.44	54.21	-6.77	AVG	P	
3	0.2940	10.80	43.30	54.10	60.41	-6.31	QP	P	
4	0.2940	10.80	26.03	36.83	50.41	-13.58	AVG	P	
5	0.3699	10.80	36.80	47.60	58.50	-10.90	QP	P	
6	0.3699	10.80	20.98	31.78	48.50	-16.72	AVG	P	
7	0.4780	10.80	34.41	45.21	56.37	-11.16	QP	P	
8	0.4780	10.80	19.14	29.94	46.37	-16.43	AVG	P	
9	0.6419	10.80	31.21	42.01	56.00	-13.99	QP	P	
10	0.6419	10.80	16.23	27.03	46.00	-18.97	AVG	P	
11	2.8780	10.80	26.95	37.75	56.00	-18.25	QP	P	
12	2.8780	10.80	14.87	25.67	46.00	-20.33	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:U1A\#14

Page: 1


4. Max. Conducted Output Power

4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set according to the FCC KDB 558074(v02) spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges and power was read directly in dBm. External attenuation and cable loss were compensated from the measured value.

4.2 Test SET-UP (Block Diagram of Configuration)




4.3 Measurement Results

Please refer to following table and plots.


Temperature :	24 °C	Humidity :	50 %	
Test By:	Think	Test Date :	November 19, 2012	
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	PK Output Power dBm	AVG Output Power dBm	Limit dBm
IEEE 802.11b Mode (CCK, Antenna Gain=-2.5dBi)				
Low Channel: 2412	1	14.67	11.45	30
Middle Channel: 2437	1	15.53	12.36	30
High Channel: 2462	1	16.16	13.10	30
IEEE 802.11g Mode (OFDM, Antenna Gain=-2.5dBi)				
Low Channel: 2412	6	15.13	8.18	30
Middle Channel: 2437	6	16.03	9.04	30
High Channel: 2462	6	16.70	9.64	30
IEEE 802.11n(HT20) Mode (OFDM, Antenn Gain=-2.5dBi)				
Low Channel: 2412	6.5	16.68	9.20	30
Middle Channel: 2437	6.5	17.38	10.11	30
High Channel: 2462	6.5	17.95	10.60	30
IEEE 802.11n(HT40) Mode (OFDM, Antenna Gain=-2.5dBi)				
Low Channel: 2422	13	16.95	9.95	30
Middle Channel: 2437	13	17.41	10.38	30
High Channel: 2452	13	17.78	11.01	30

Maximum Peak Conducted Output Power


802.11b Low Channel

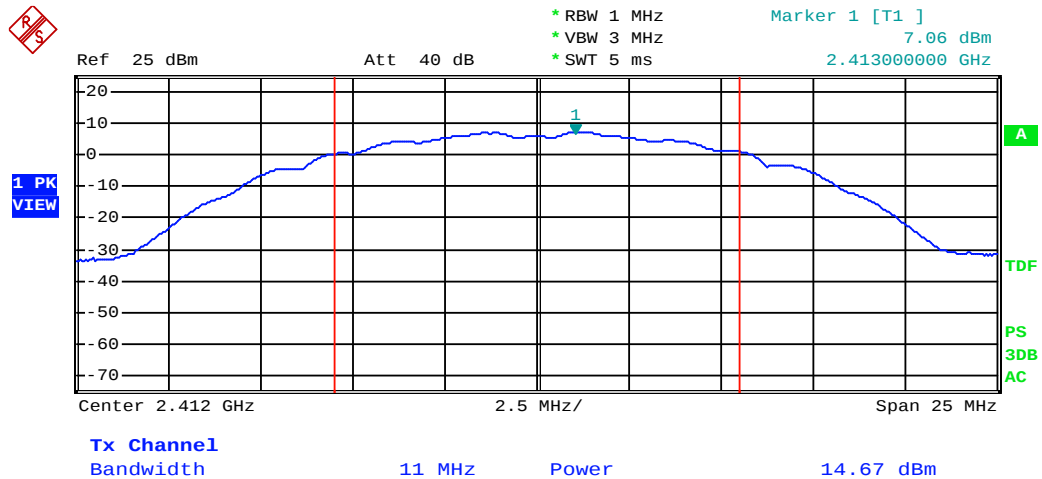


802.11b Middle Channel

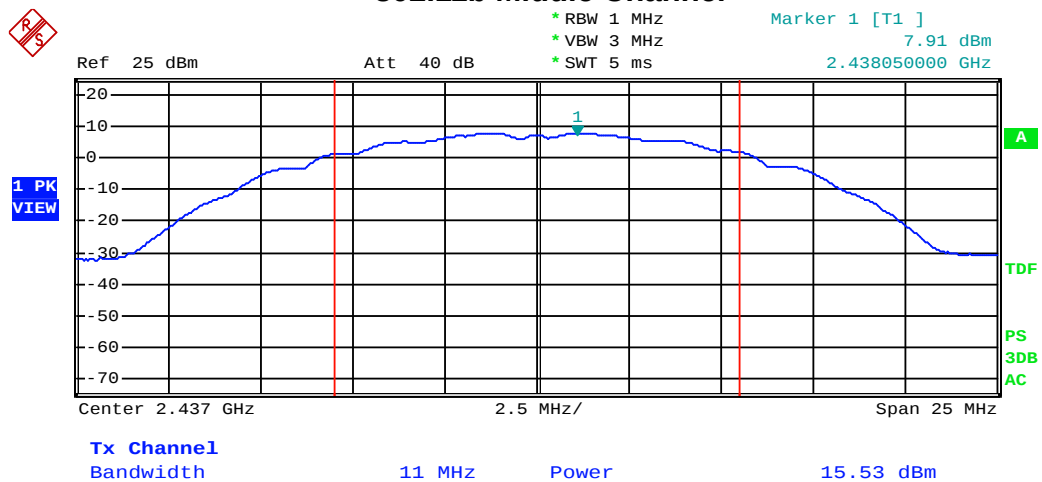


802.11b High Channel

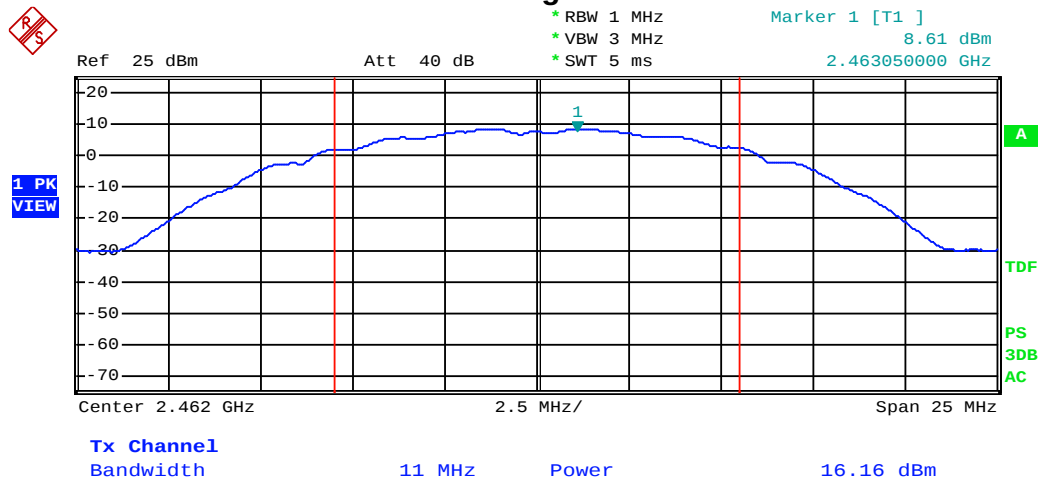


802.11g Low Channel

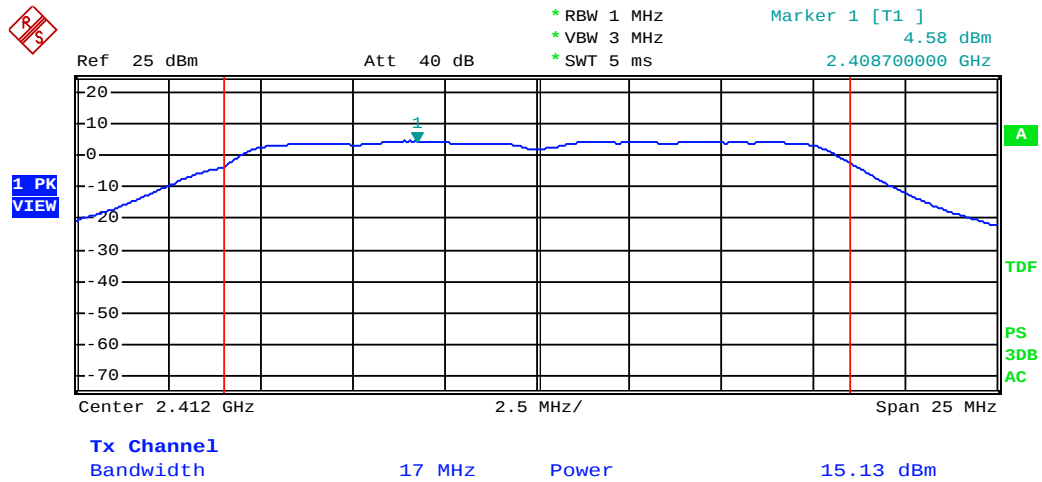


802.11g Middle Channel

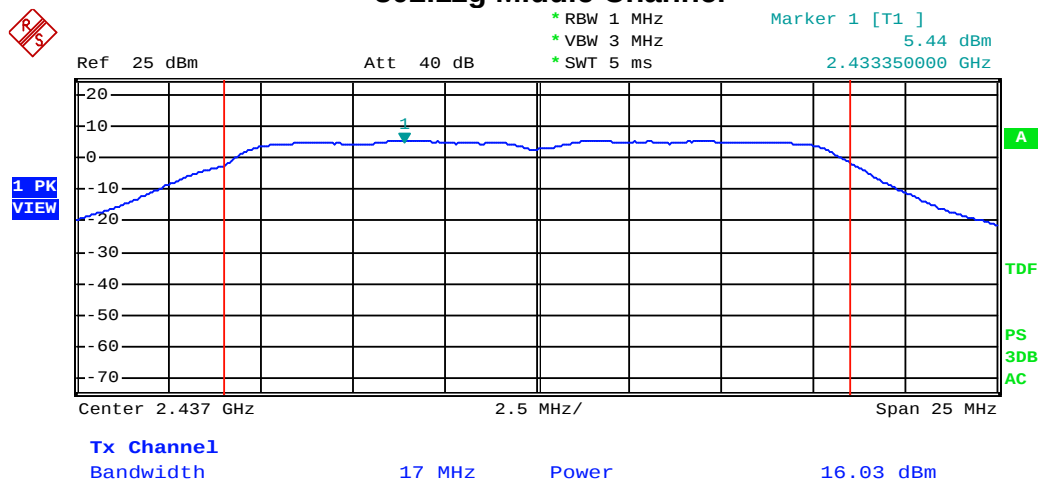


802.11g High Channel

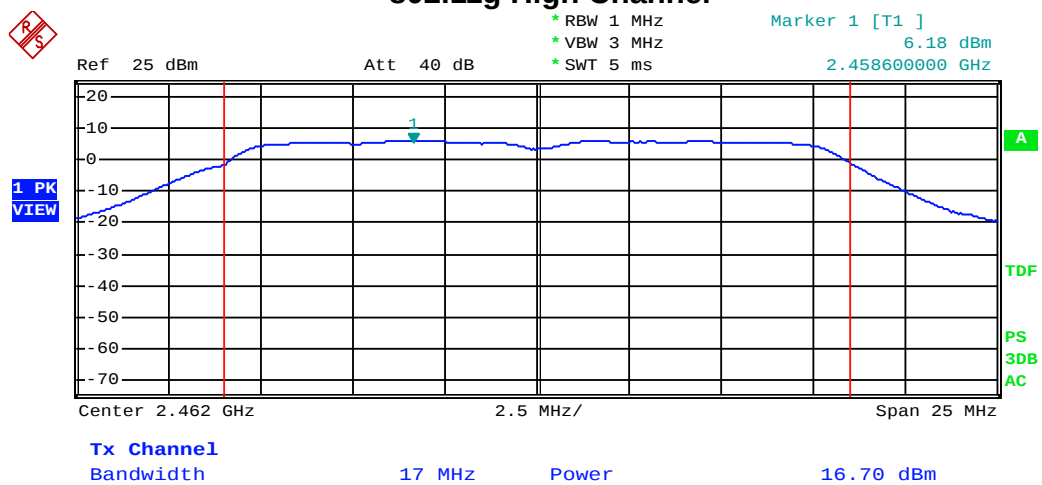


802.11n(HT20) Low Channel

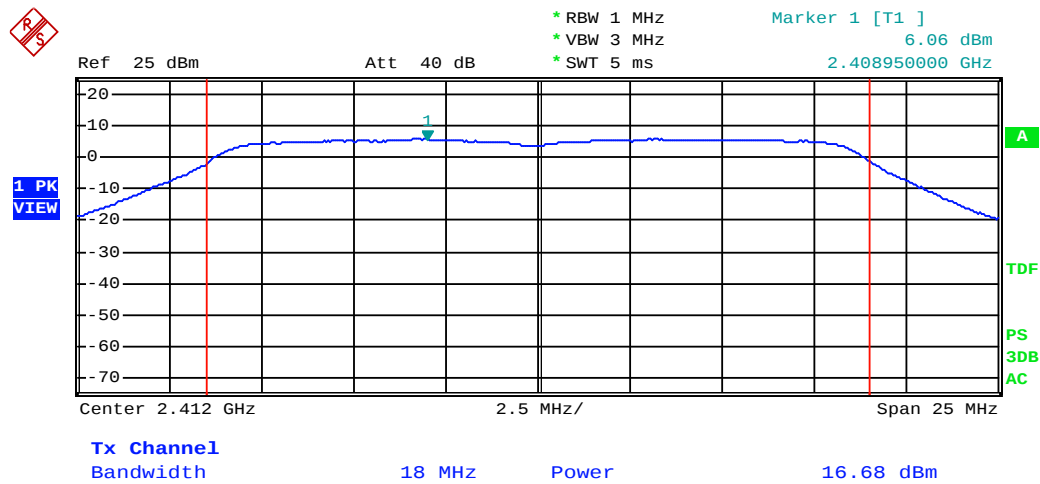


802.11n(HT20) Middle Channel

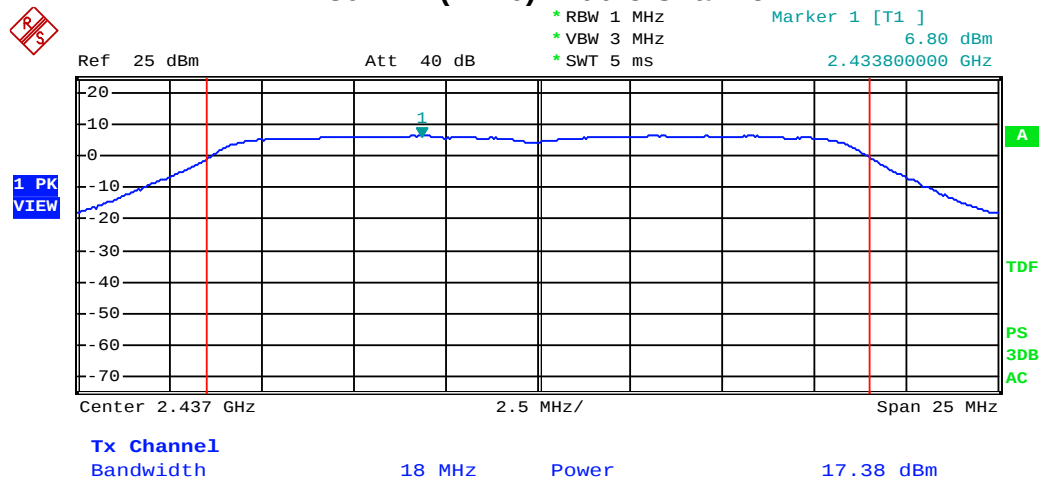


802.11n(HT20) High Channel

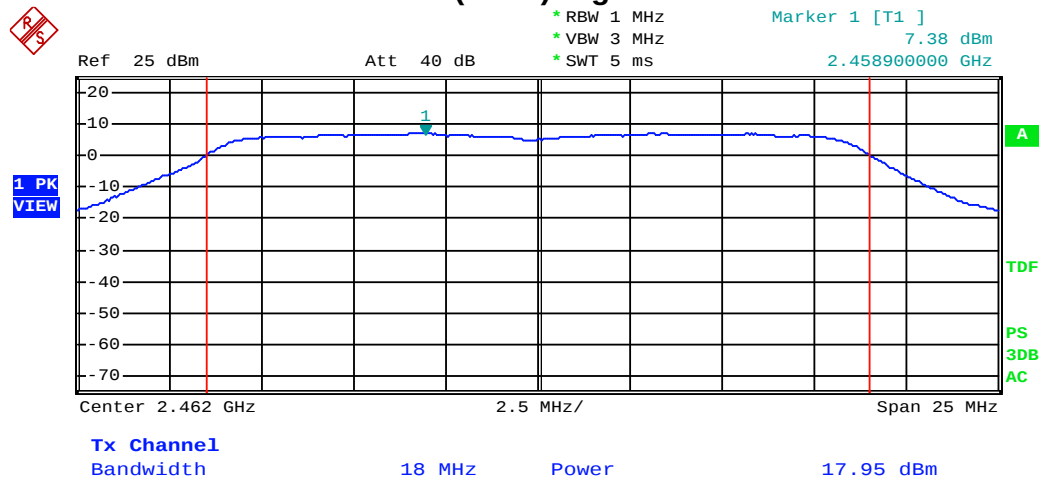


802.11n(HT40) Low Channel

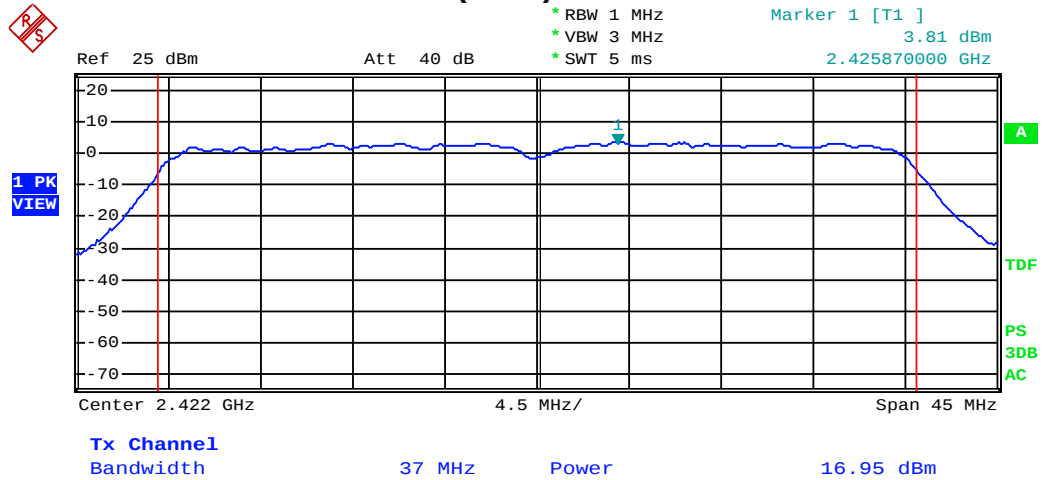

802.11n(HT40) Middle Channel

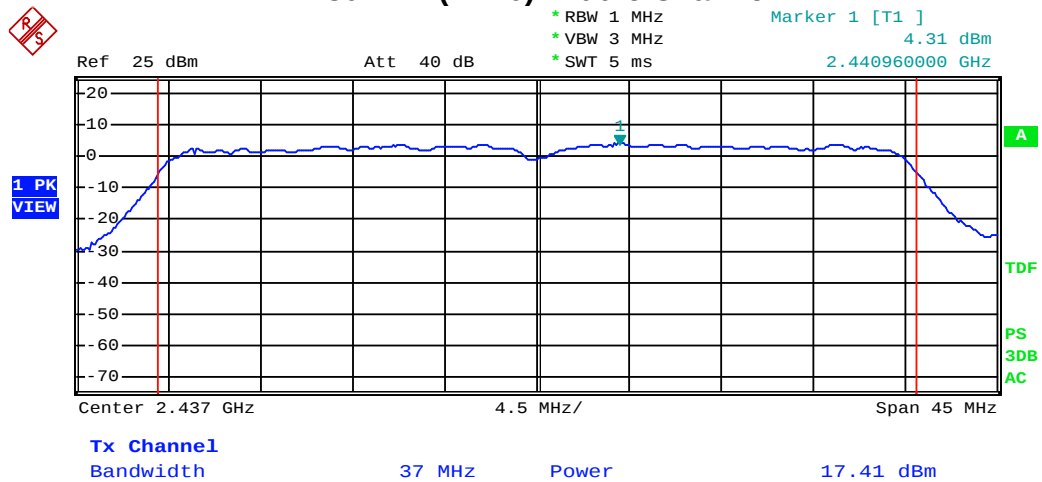


802.11n(HT40) High Channel

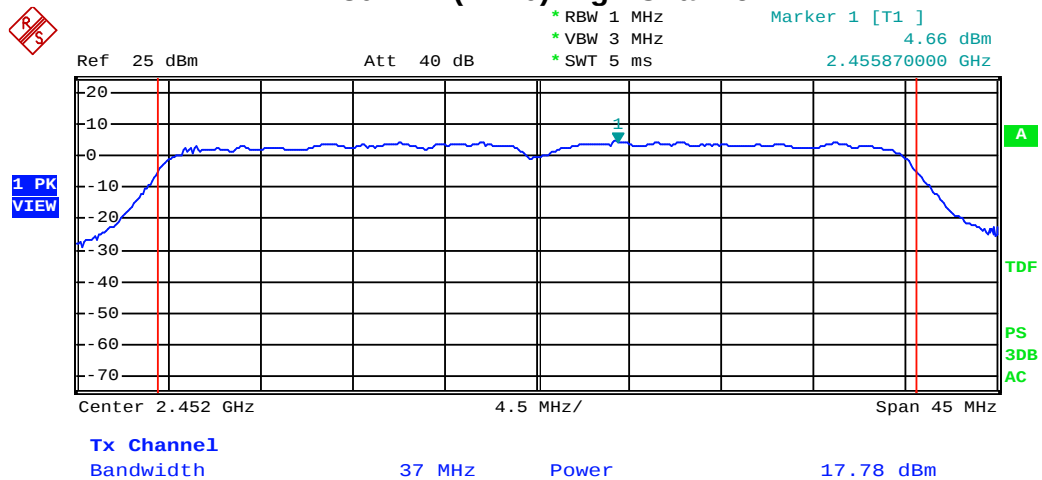


26dB Bandwidth


802.11b Low Channel

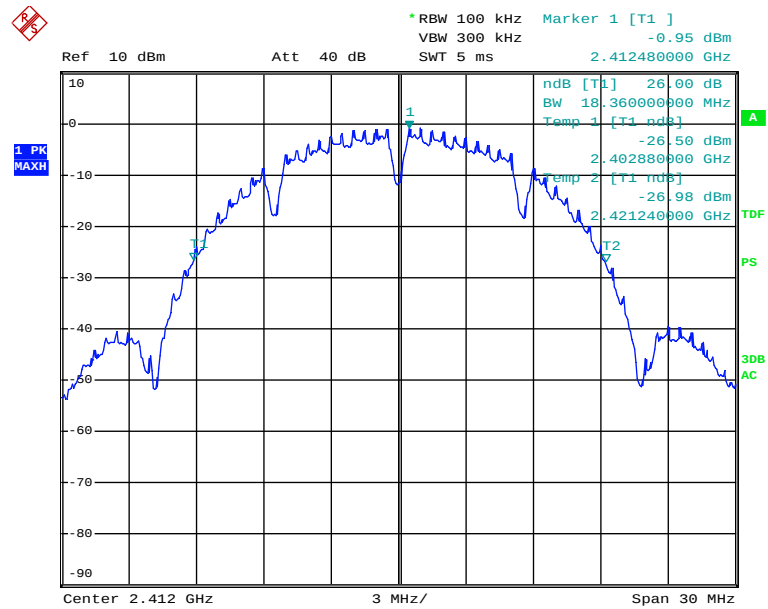


802.11b Middle Channel

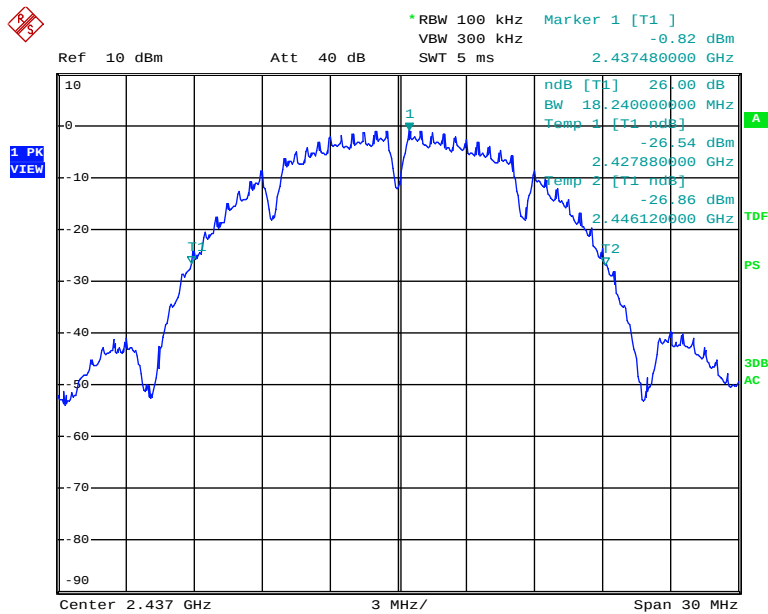


802.11b High Channel

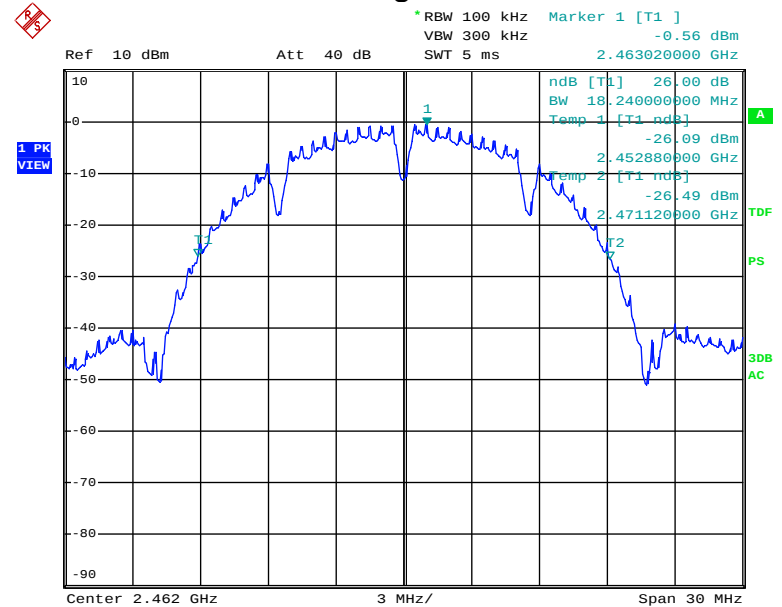


802.11g Low Channel

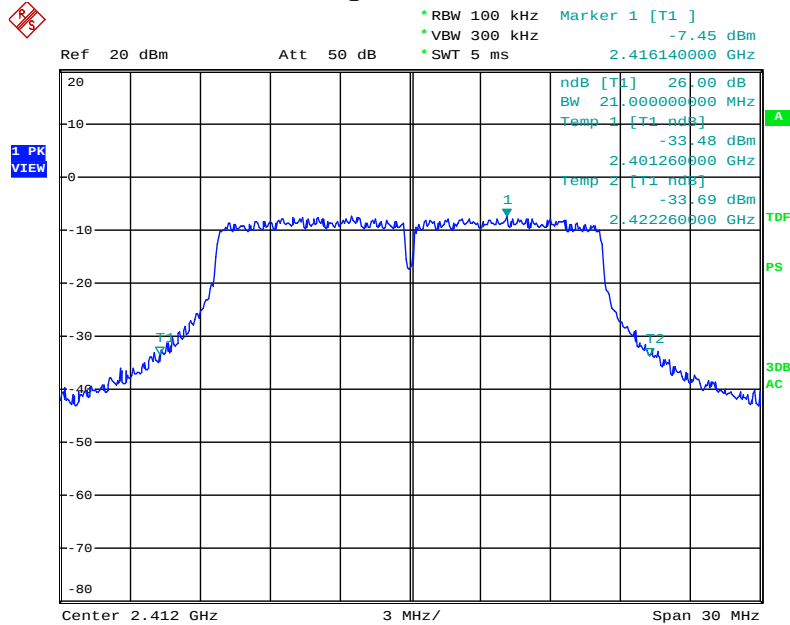


802.11g Middle Channel

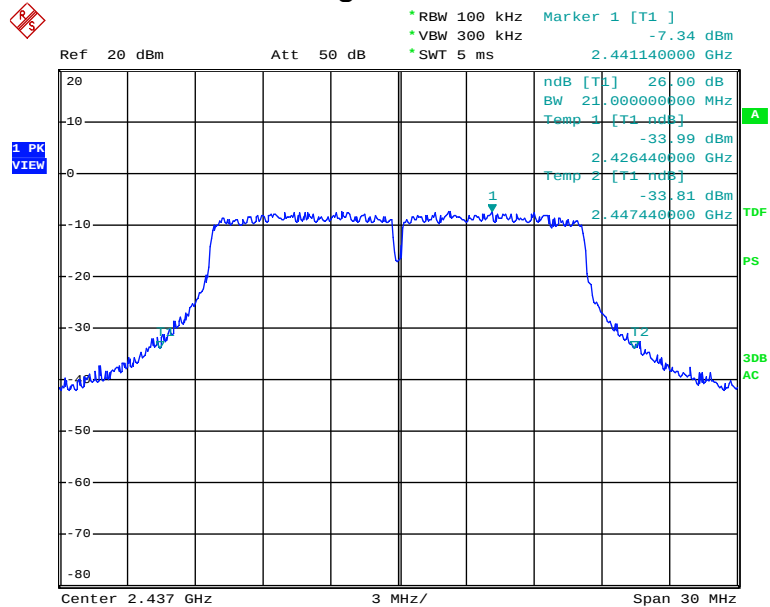


802.11g High Channel

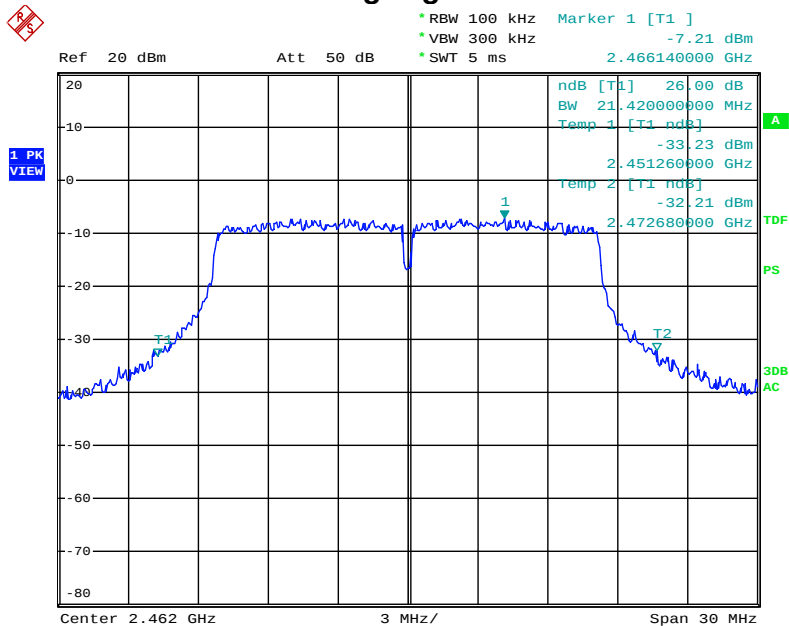


802.11n(HT20) Low Channel

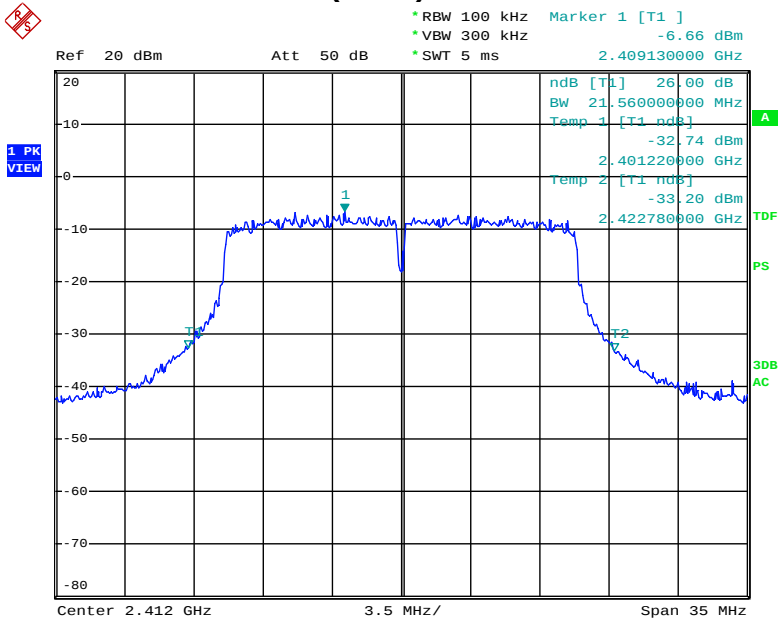


802.11n(HT20) Middle Channel

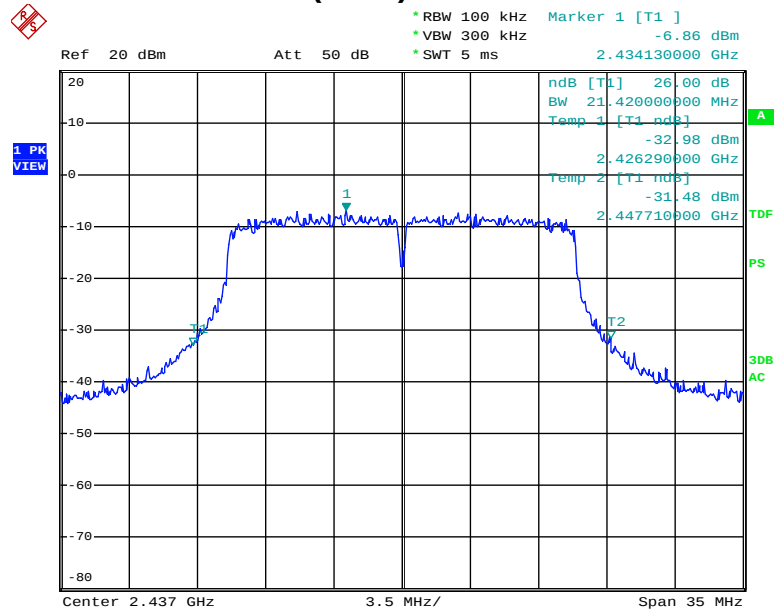


802.11n(HT20) High Channel

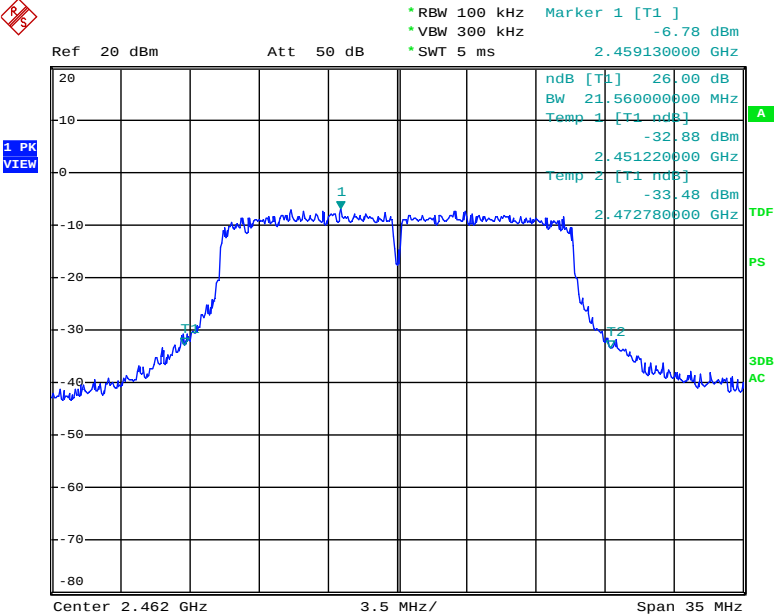


802.11n(HT40) Low Channel

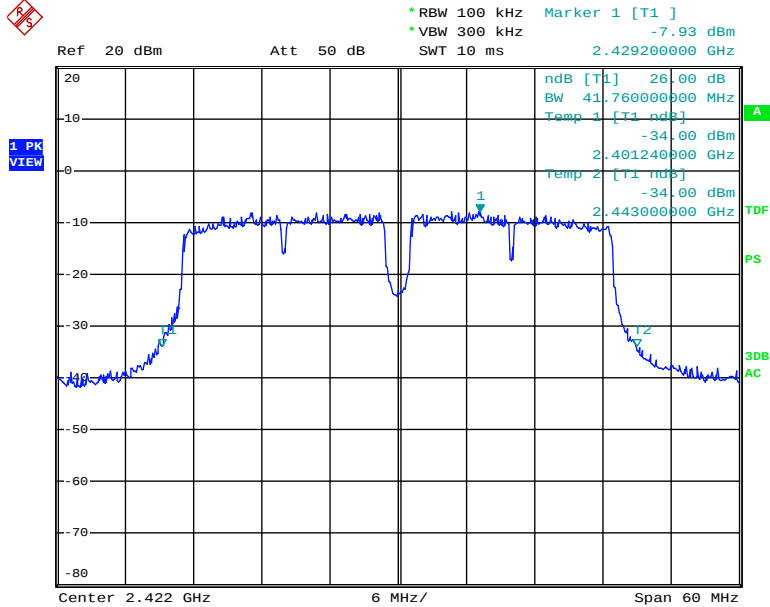


802.11n(HT40) Middle Channel

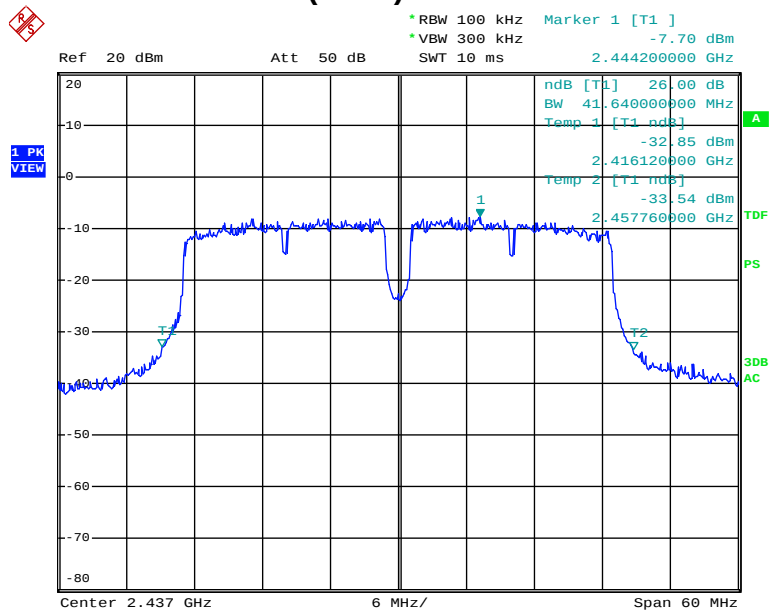


802.11n(HT40) High Channel

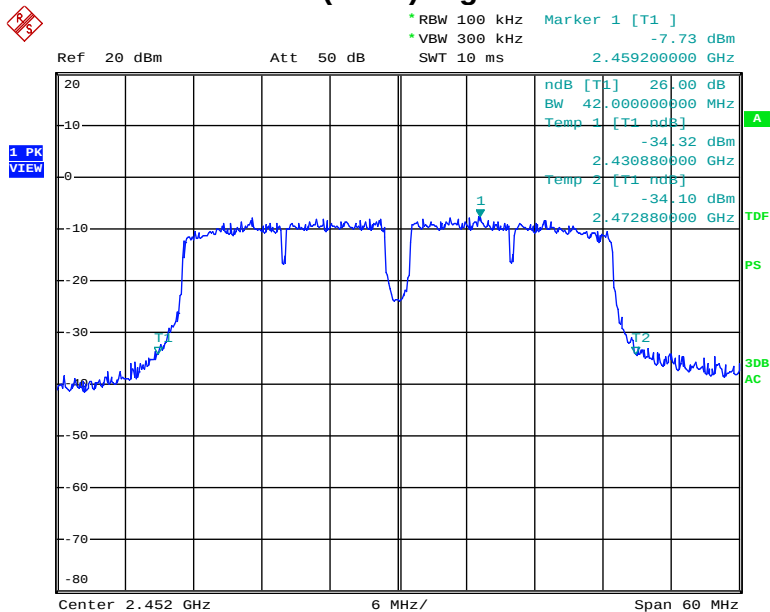


Maximum AVG Conducted Output Power

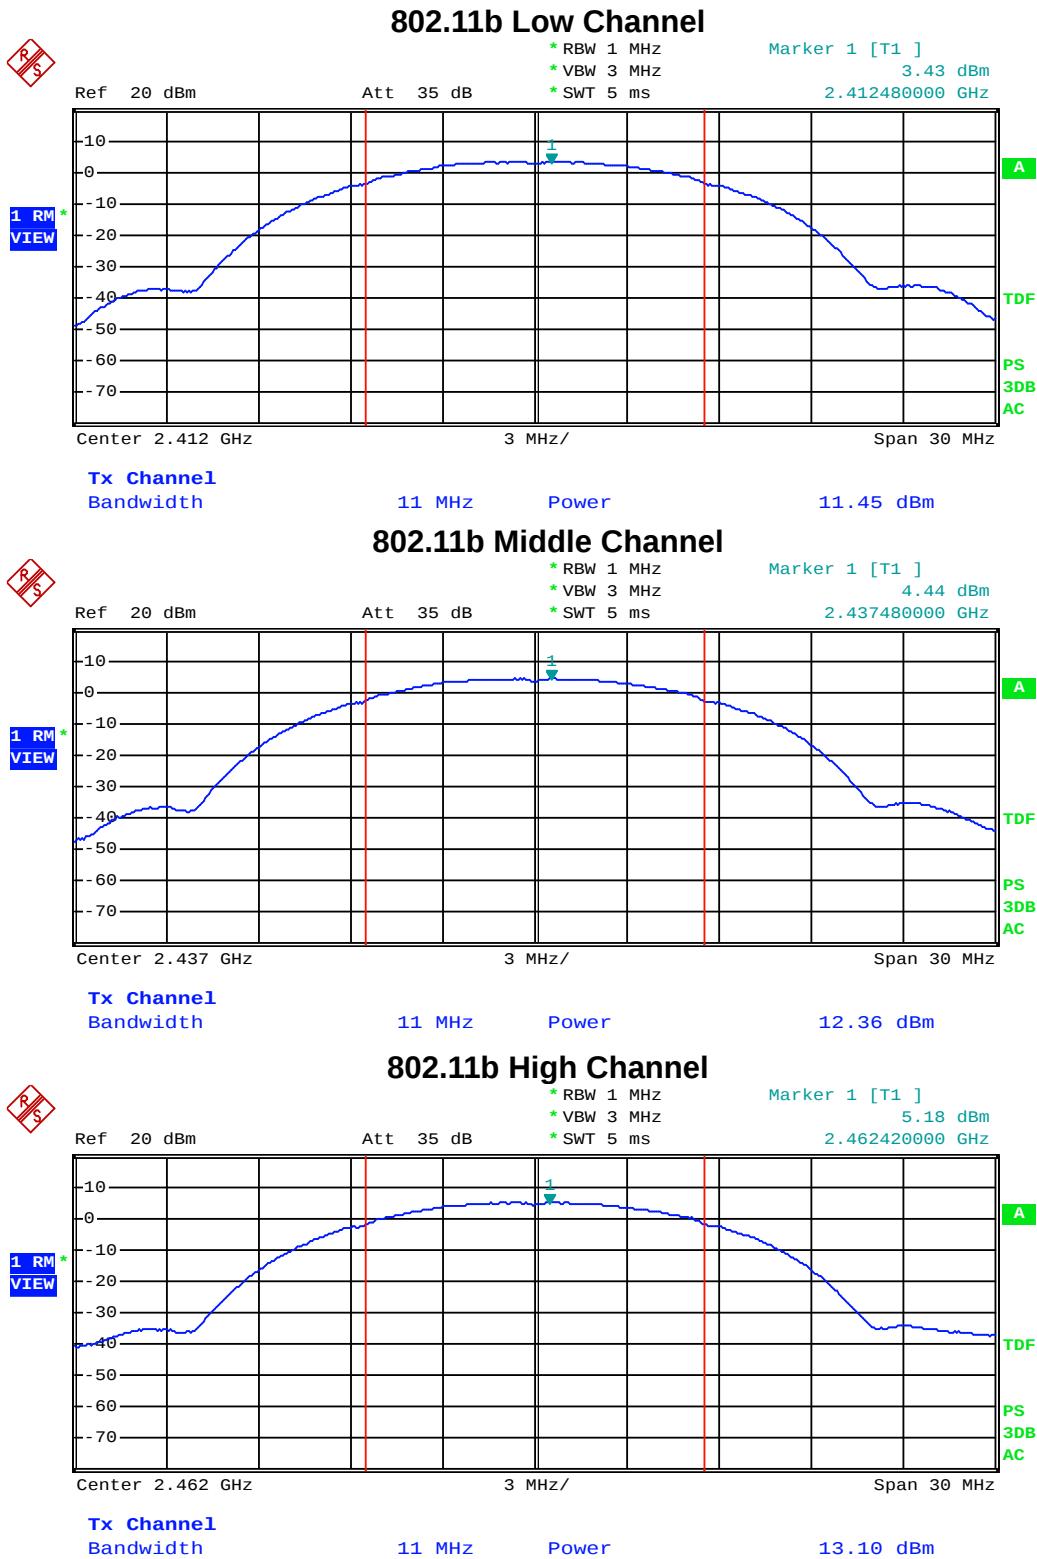


802.11g Low Channel

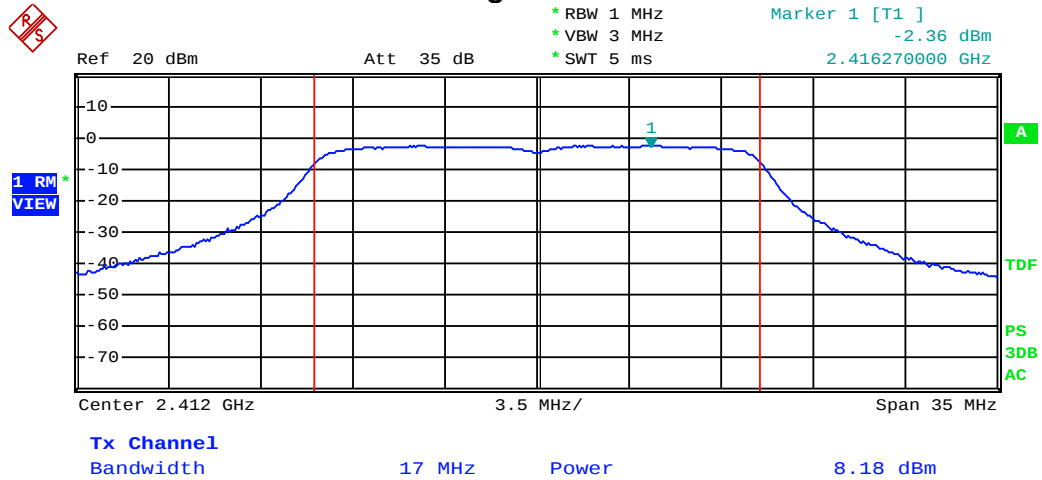


802.11g Middle Channel

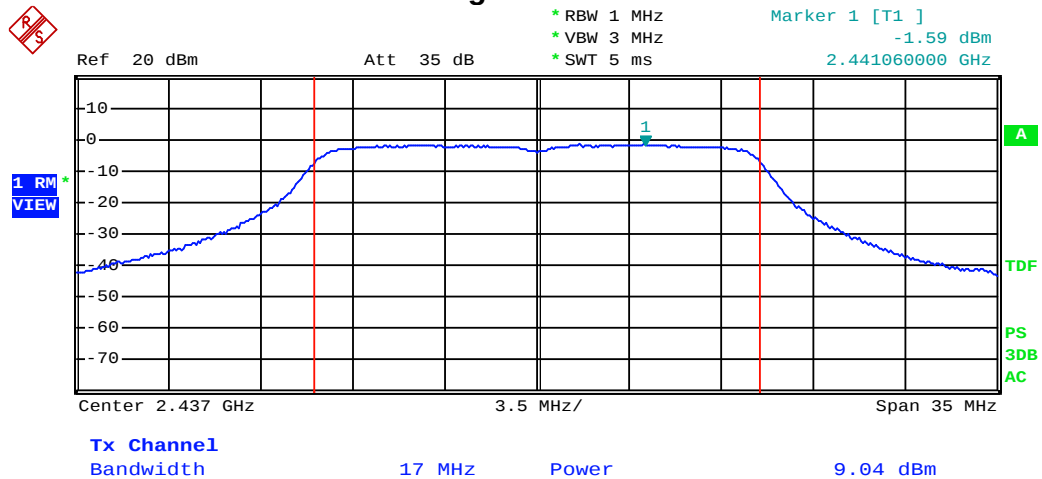


802.11g High Channel

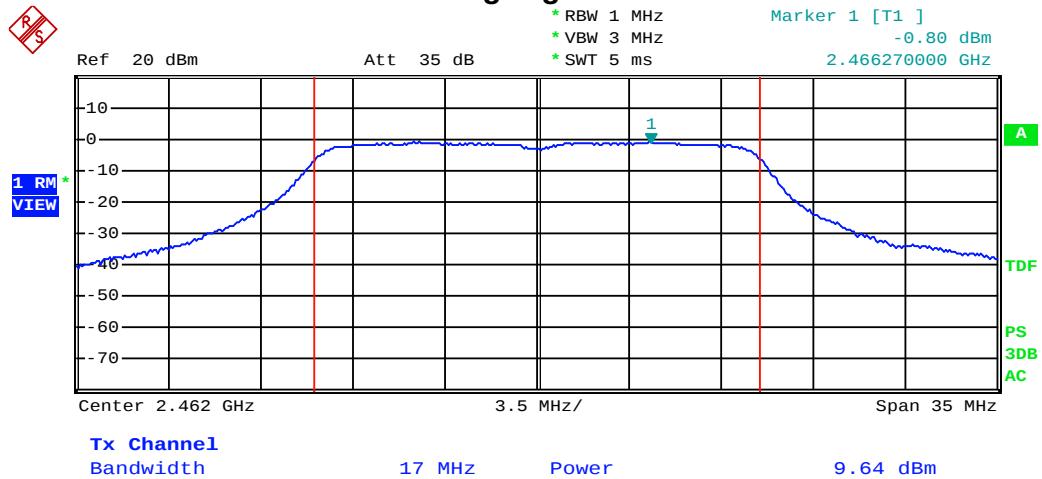


802.11n(HT20) Low Channel

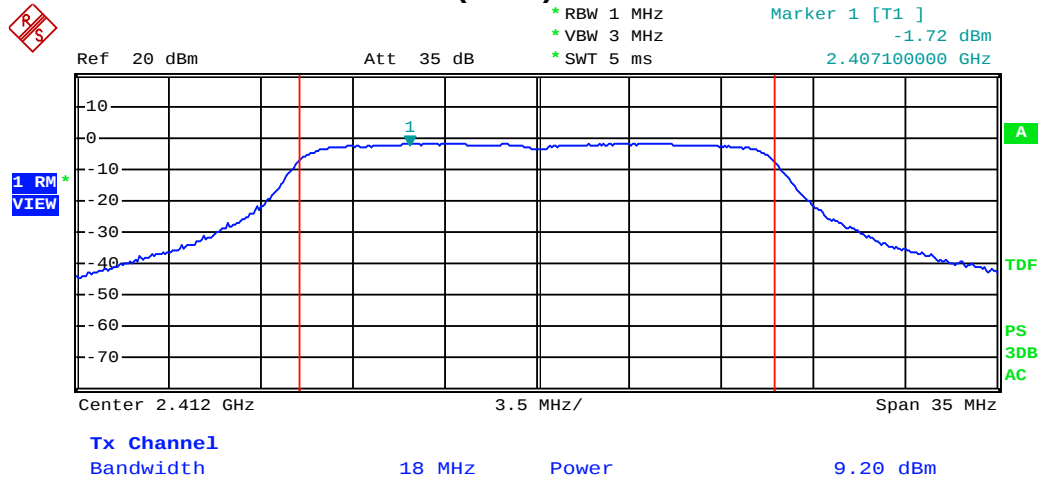


802.11n(HT20) Middle Channel

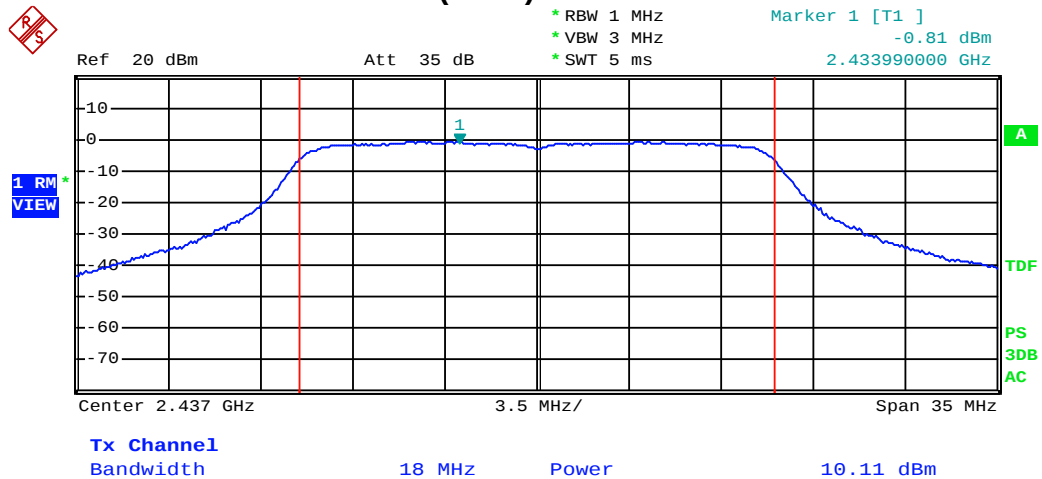


802.11n(HT20) High Channel

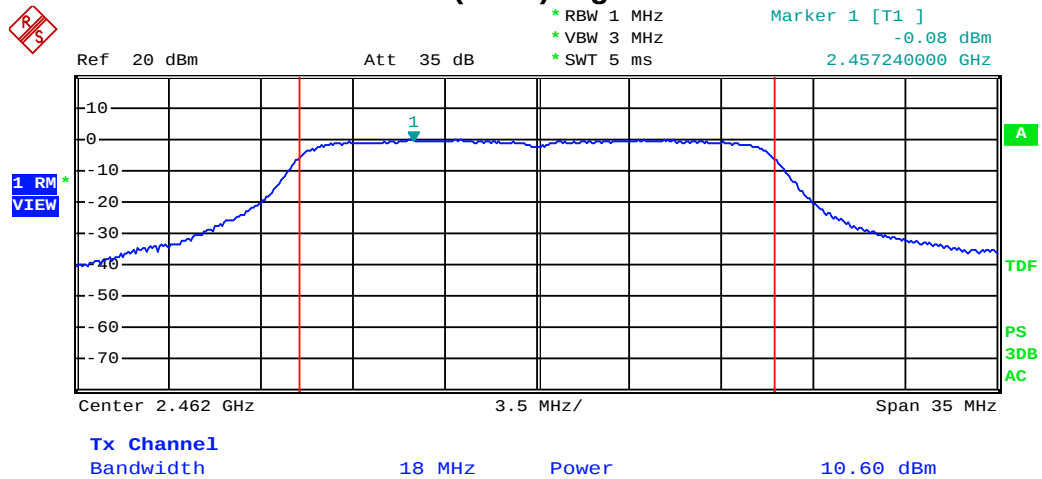


802.11n(HT40) Low Channel

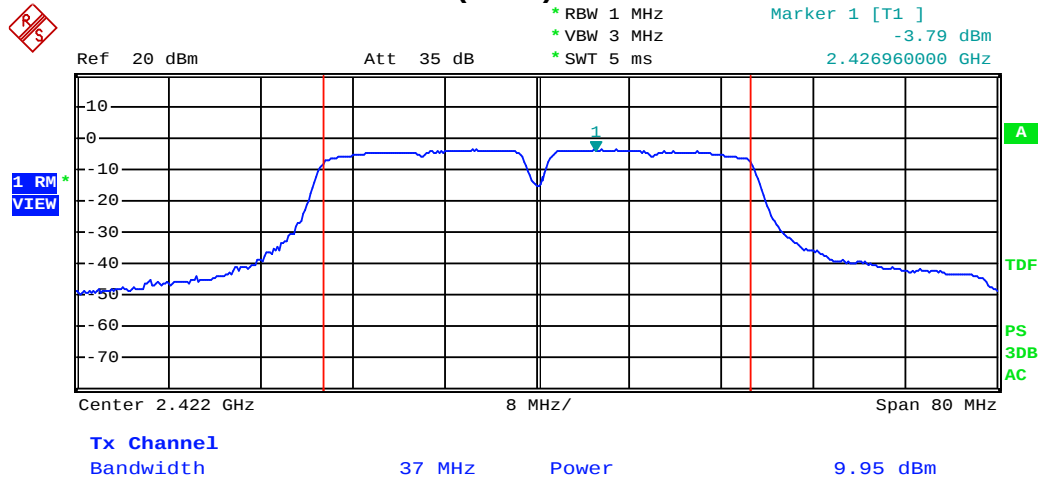

802.11n(HT40) Middle Channel

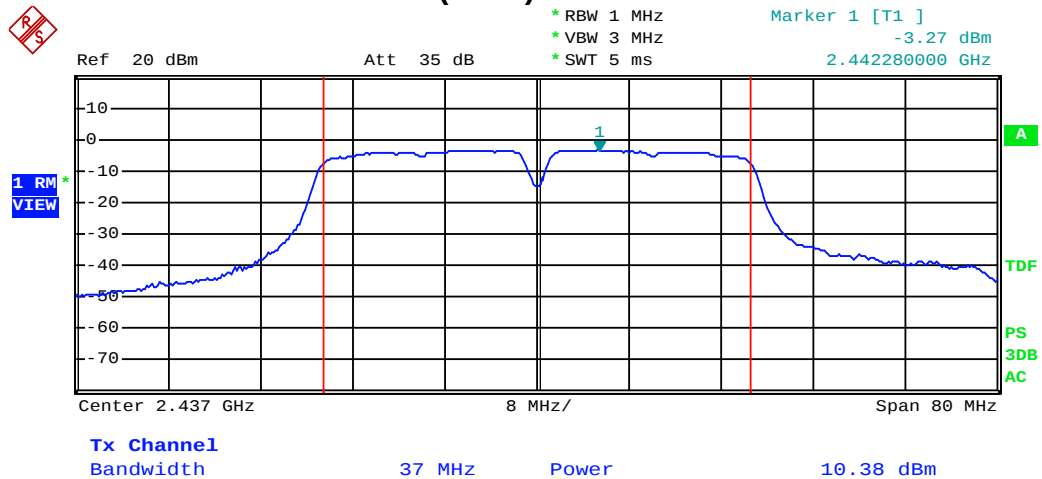

802.11n(HT40) High Channel

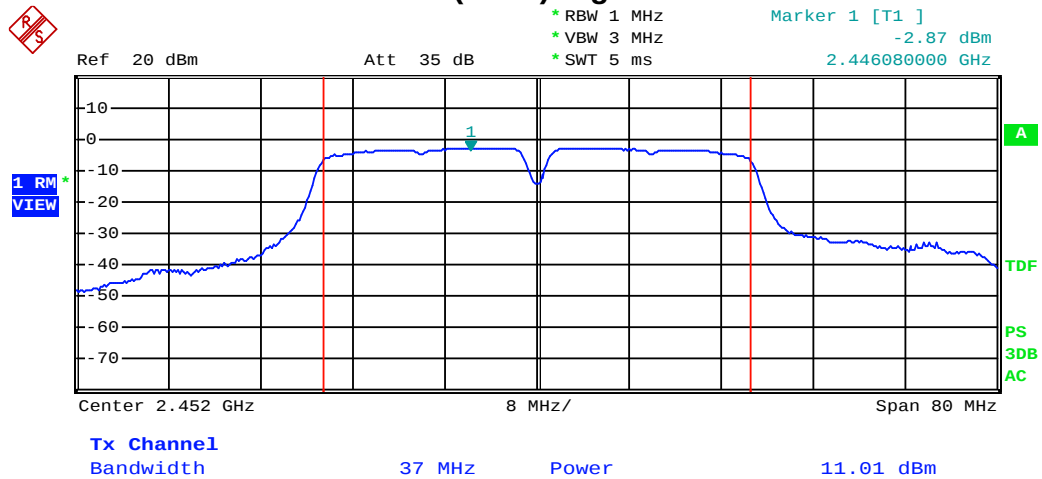


5. 6dB Bandwidth

5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 1-5 % of the emission bandwidth(not to exceed 100KHz) according to FCC KDB 558074(v02). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results


Please refer to following table and plots.

Temperature :	24 °C	Humidity :	50 %
Test By:	Think	Test Date :	November 19, 2012
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	10.20	>500KHz
Middle Channel: 2437	1	10.20	>500KHz
High Channel: 2462	1	10.20	>500KHz
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	16.68	>500KHz
Middle Channel: 2437	6	16.68	>500KHz
High Channel: 2462	6	16.68	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	17.88	>500KHz
Middle Channel: 2437	6.5	17.88	>500KHz
High Channel: 2462	6.5	17.88	>500KHz
IEEE 802.11n(HT40) Mode (OFDM)			
Low Channel: 2422	13	36.60	>500KHz
Middle Channel: 2437	13	36.60	>500KHz
High Channel: 2452	13	36.60	>500KHz


802.11b Low Channel

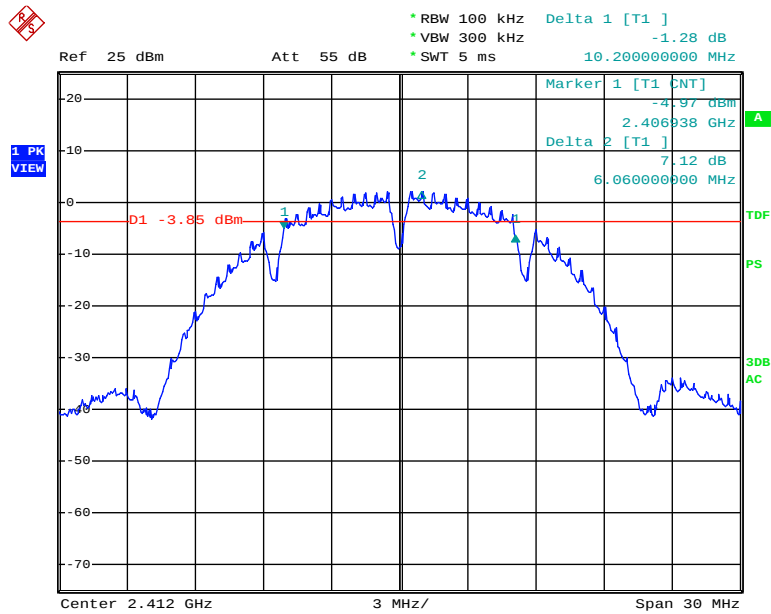


802.11b Middle Channel

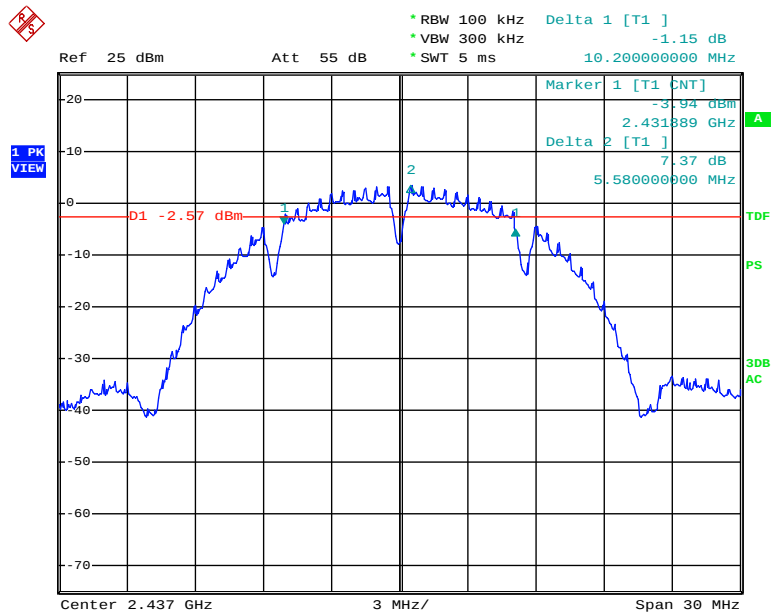


802.11b High Channel

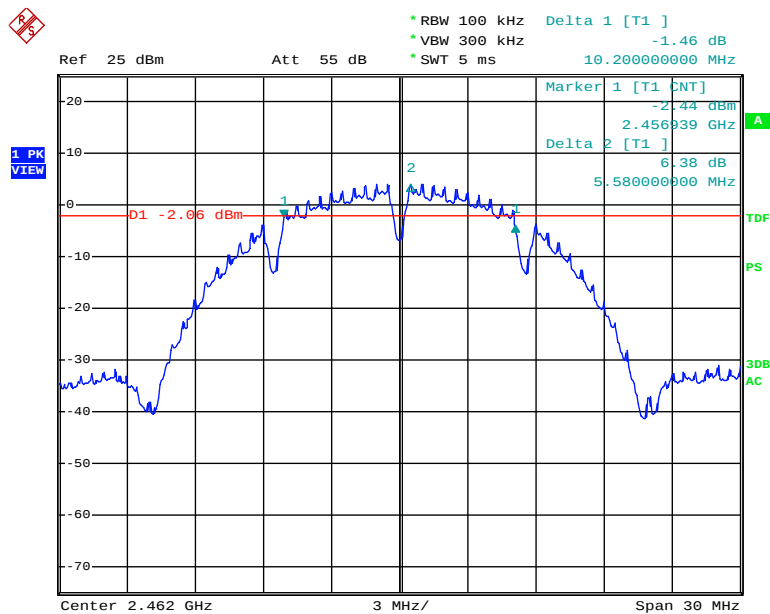


802.11g Low Channel

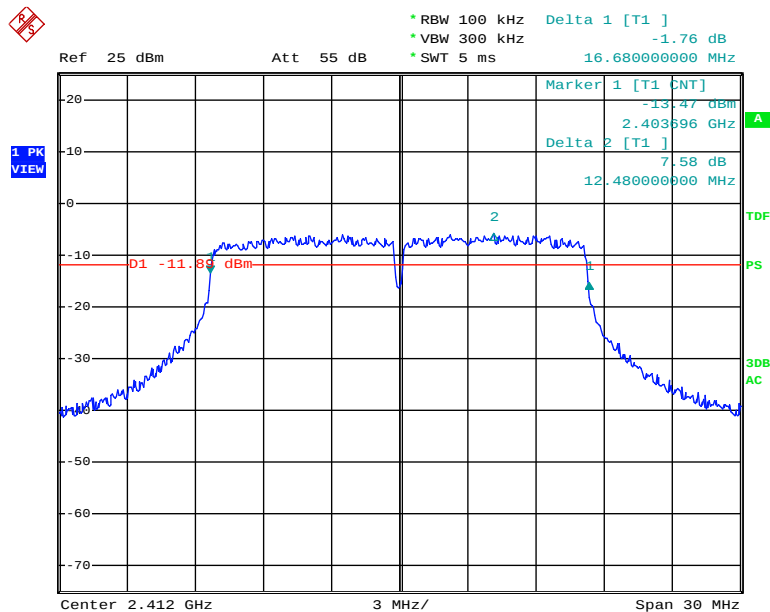


802.11g Middle Channel

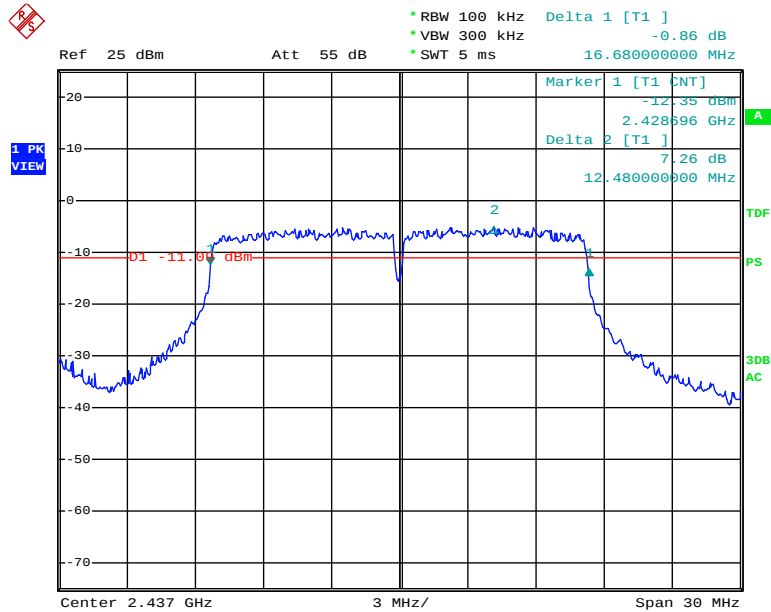


802.11g High Channel

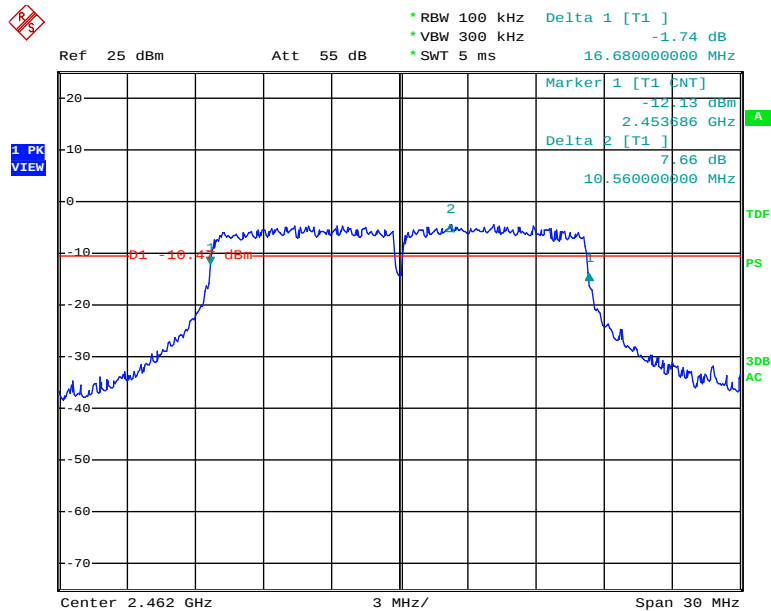


802.11n(HT20) Low Channel

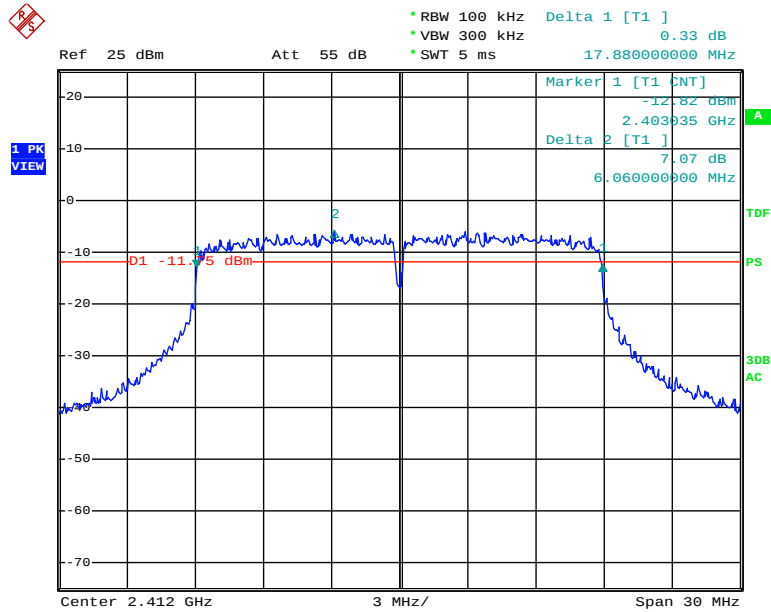


802.11n(HT20) Middle Channel

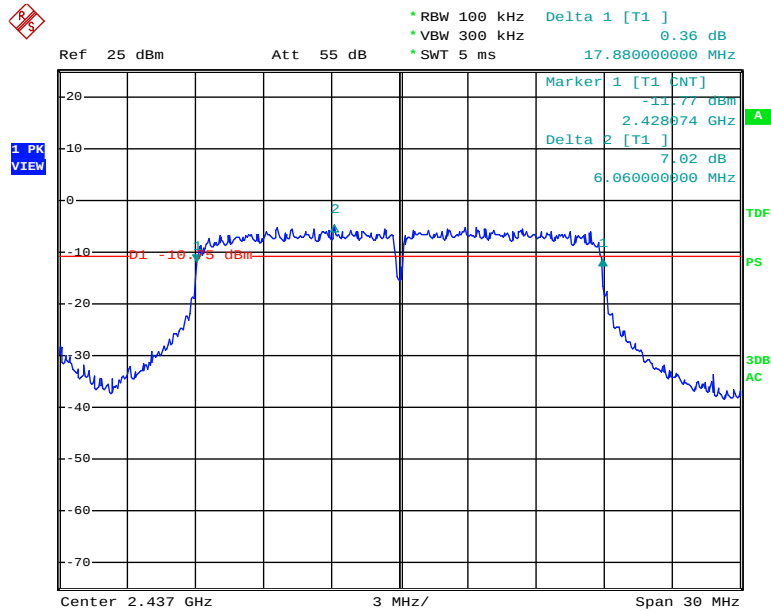


802.11n(HT20) High Channel

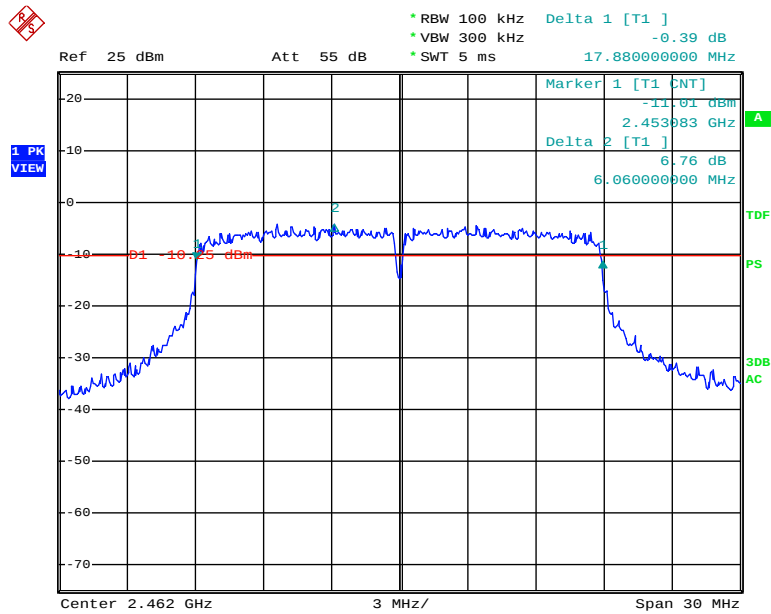


802.11n(HT40) Low Channel

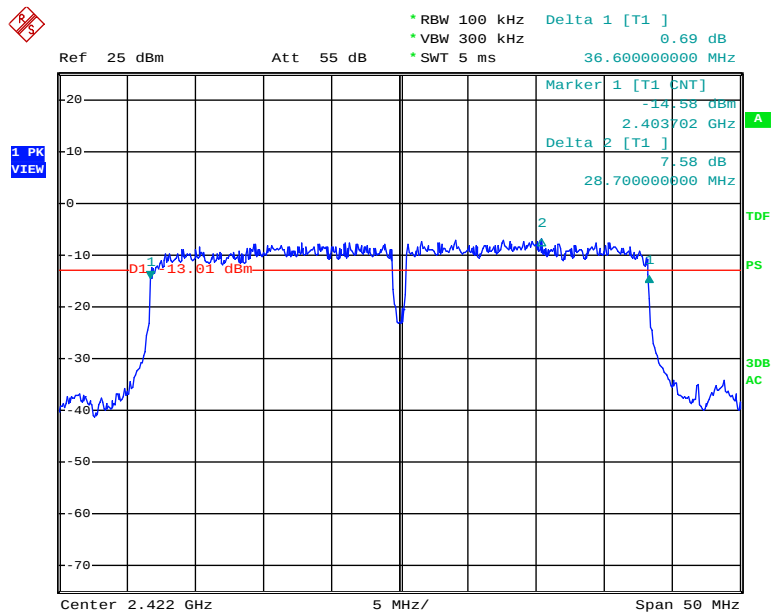

802.11n(HT40) Middle Channel

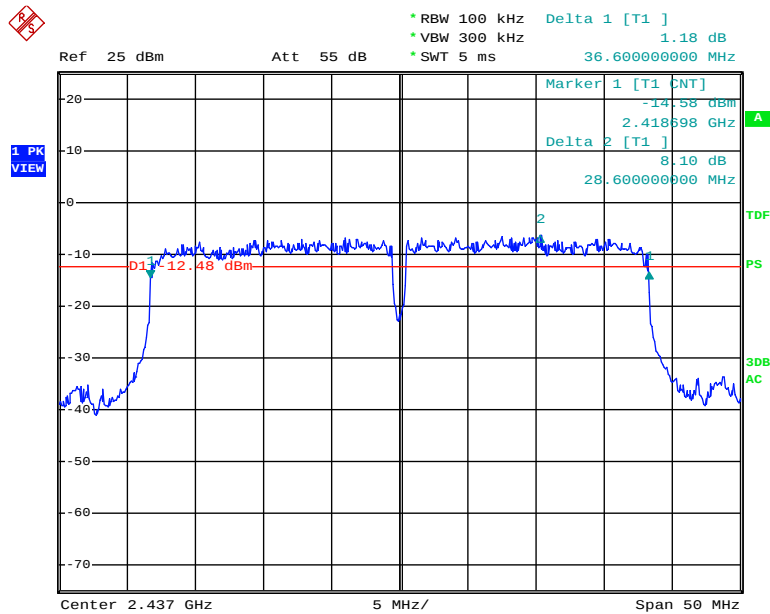

802.11n(HT40) High Channel

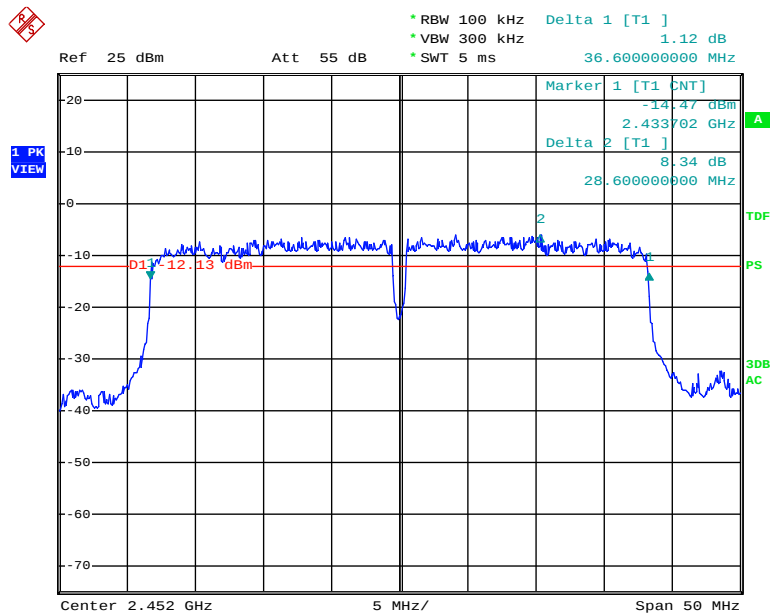

6. Power Spectral Density


6.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v02):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results


Please refer to following table and plots.

Temperature :	24 °C	Humidity :	50 %
Test By:	Think	Test Date :	November 19, 2012
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm	Limit dBm
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-16.49	8
Middle Channel: 2437	1	-16.76	8
High Channel: 2462	1	-16.07	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-20.32	8
Middle Channel: 2437	6	-19.60	8
High Channel: 2462	6	-18.80	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-20.20	8
Middle Channel: 2437	6.5	-19.21	8
High Channel: 2462	6.5	-18.55	8
IEEE 802.11n(HT40) Mode (OFDM)			
Low Channel: 2422	13	-18.91	8
Middle Channel: 2437	13	-20.31	8
High Channel: 2452	13	-18.84	8


802.11b Low Channel

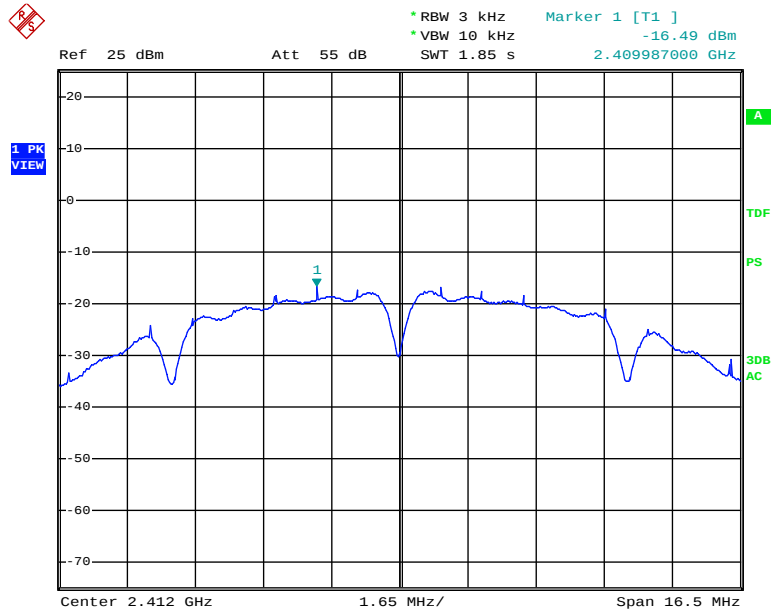


802.11b Middle Channel

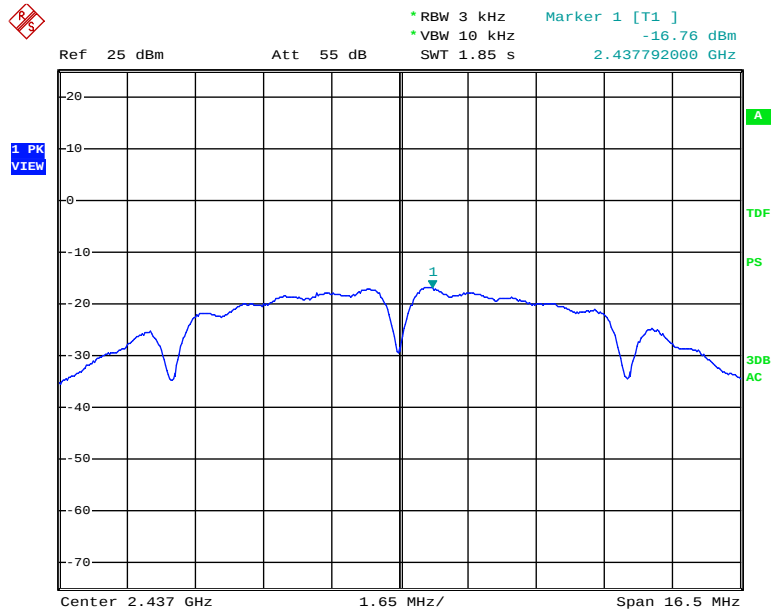


802.11b High Channel

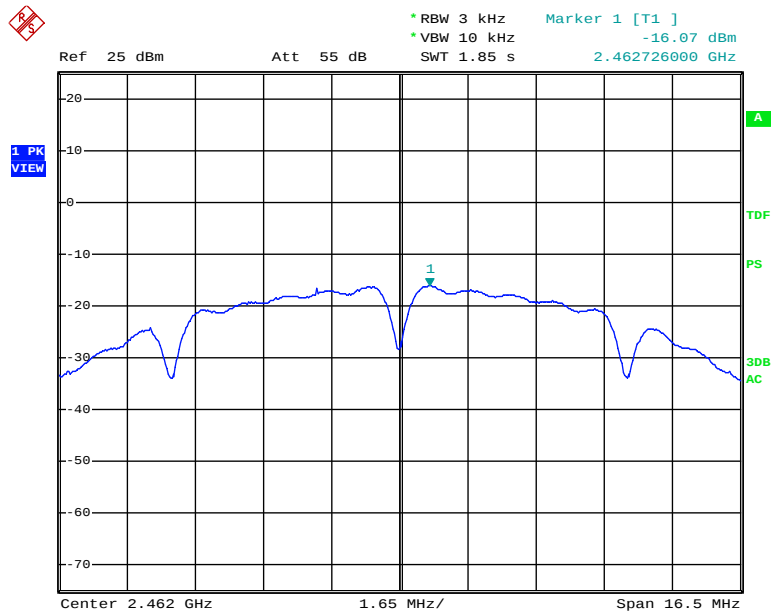


802.11g Low Channel

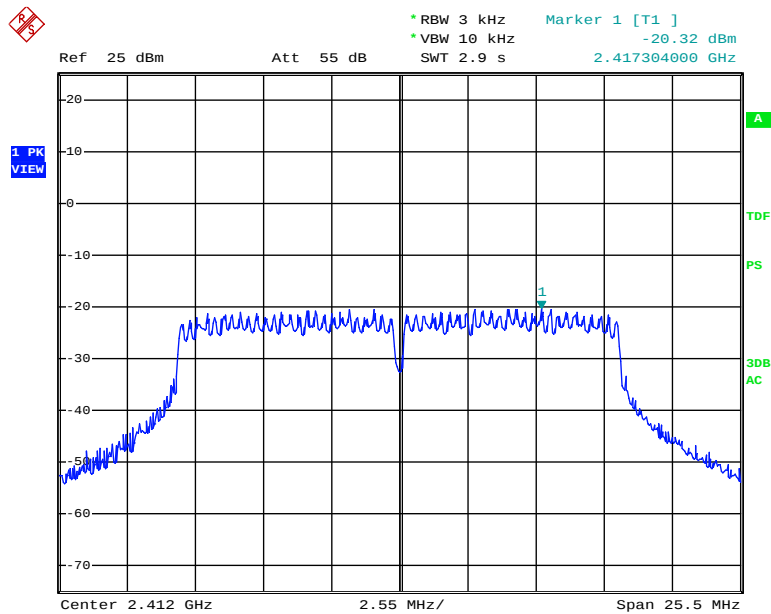


802.11g Middle Channel

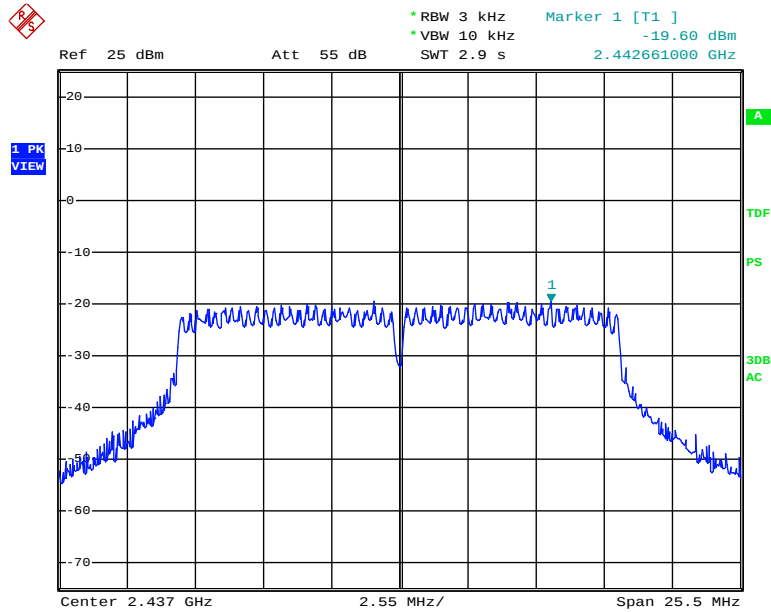


802.11g High Channel

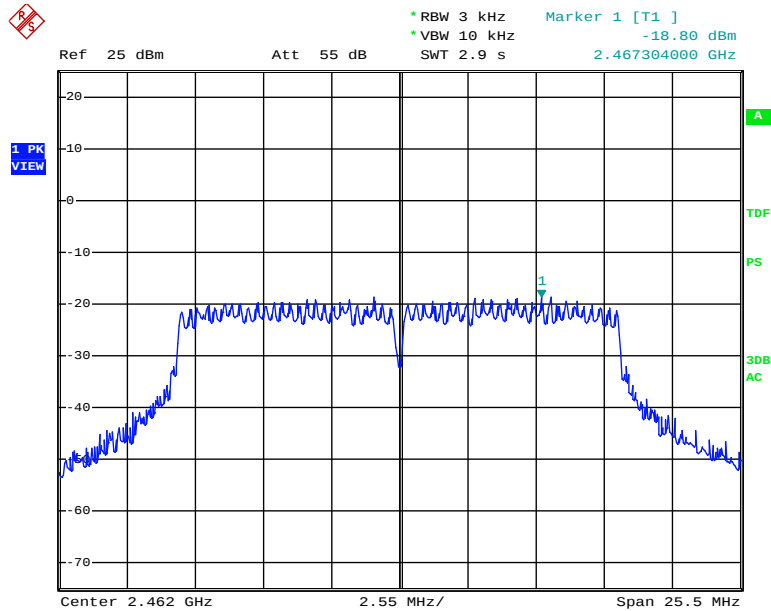


802.11n(HT20) Low Channel

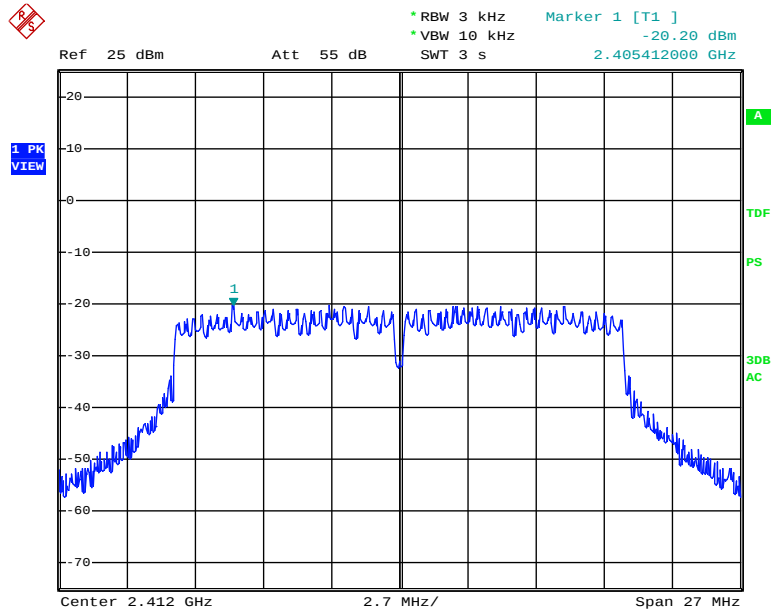


802.11n(HT20) Middle Channel

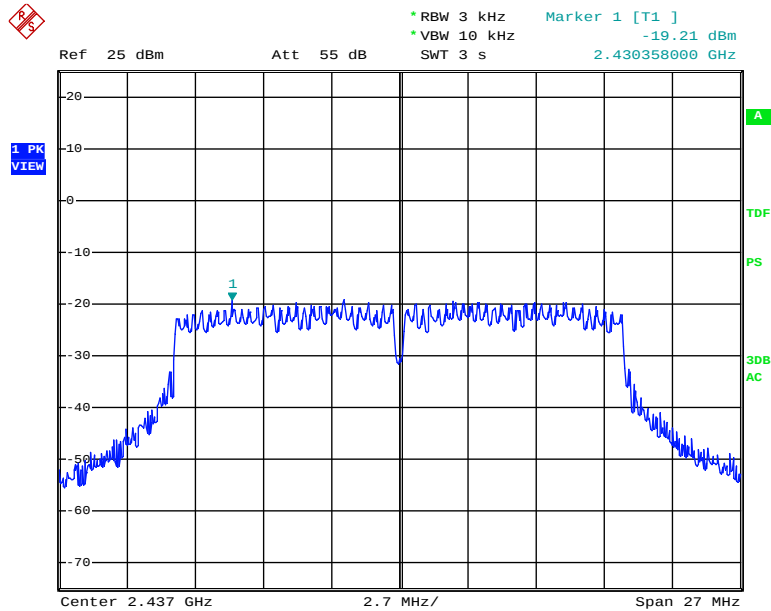


802.11n(HT20) High Channel

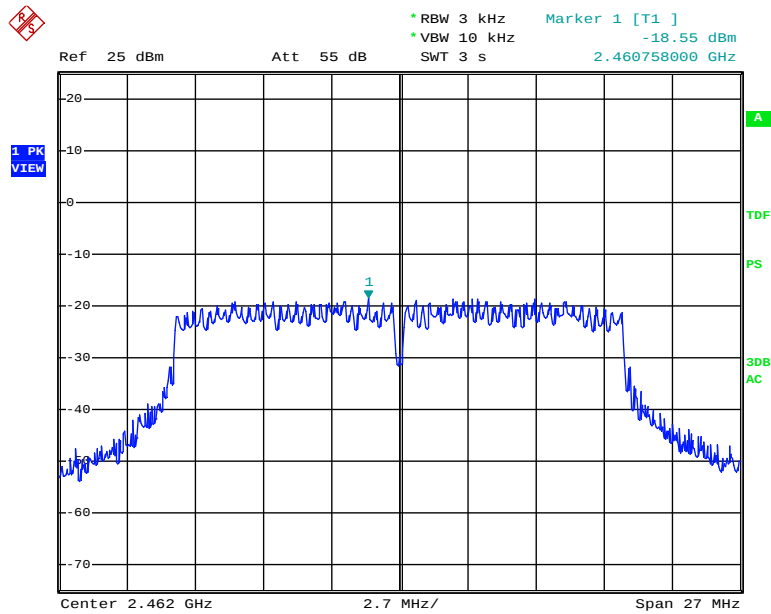


802.11n(HT40) Low Channel

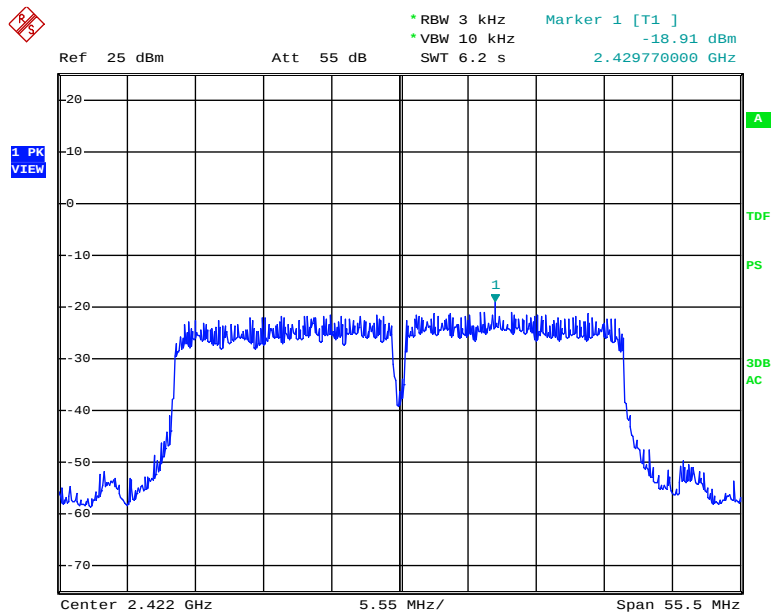

802.11n(HT40) Middle Channel

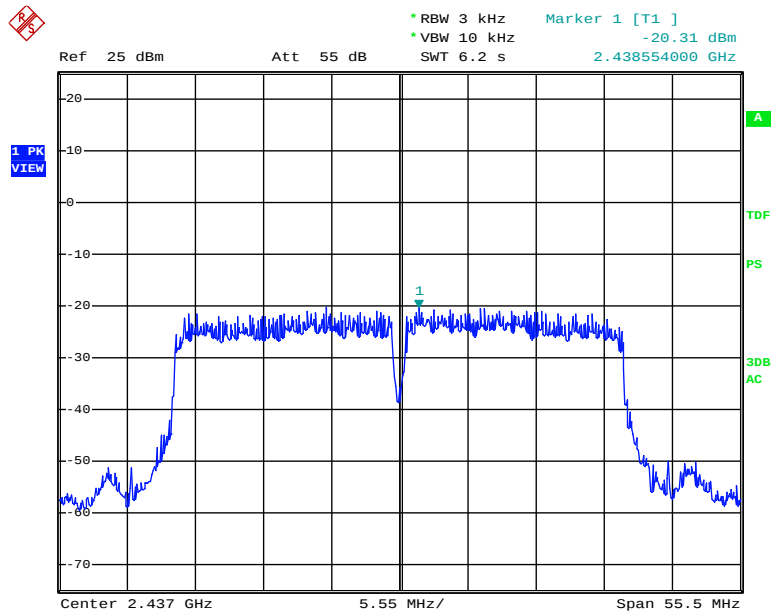

802.11n(HT40) High Channel

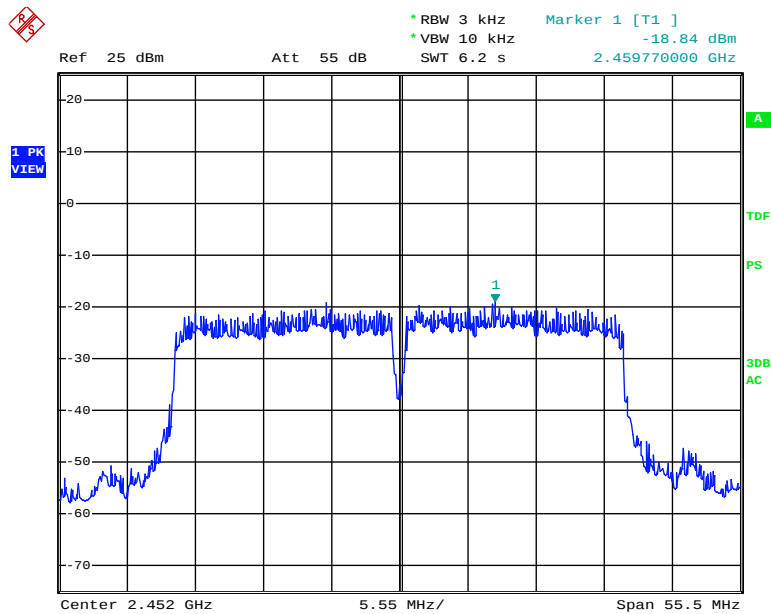

7. Band Edge and Conducted Spurious Emissions


7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v02):

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW $\geq$ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results


The test plots showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.

Band Edge


802.11b Low Channel

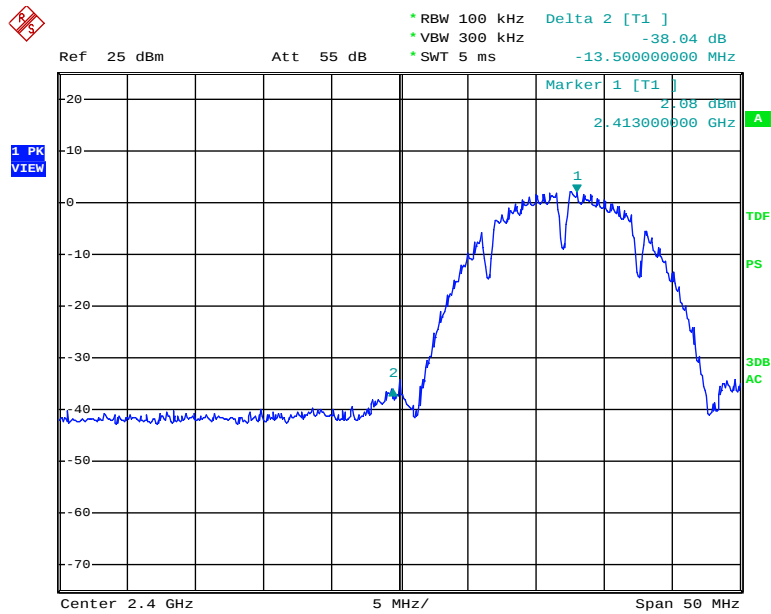


802.11b High Channel

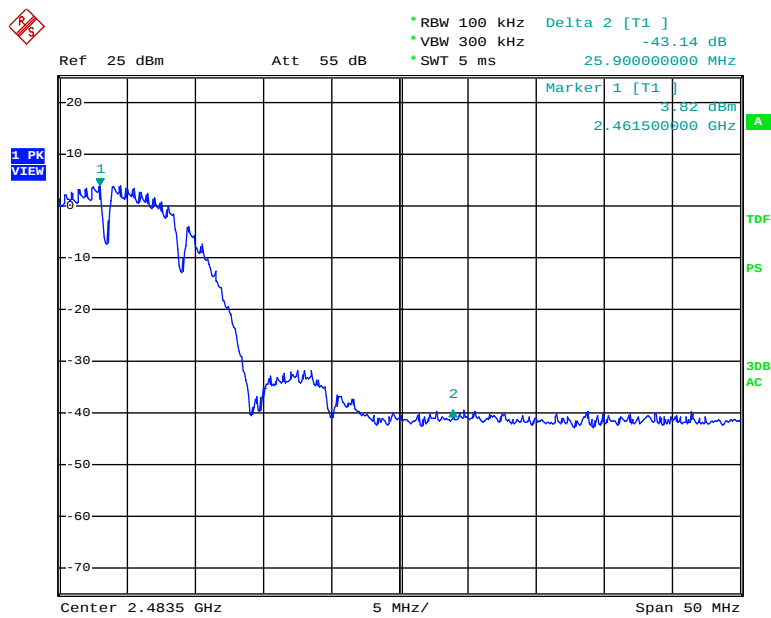


802.11g Low Channel

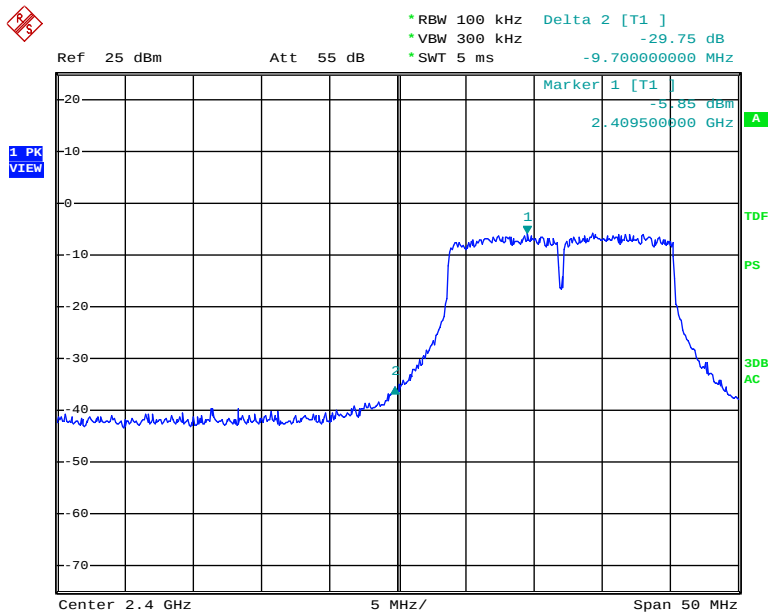


802.11g High Channel

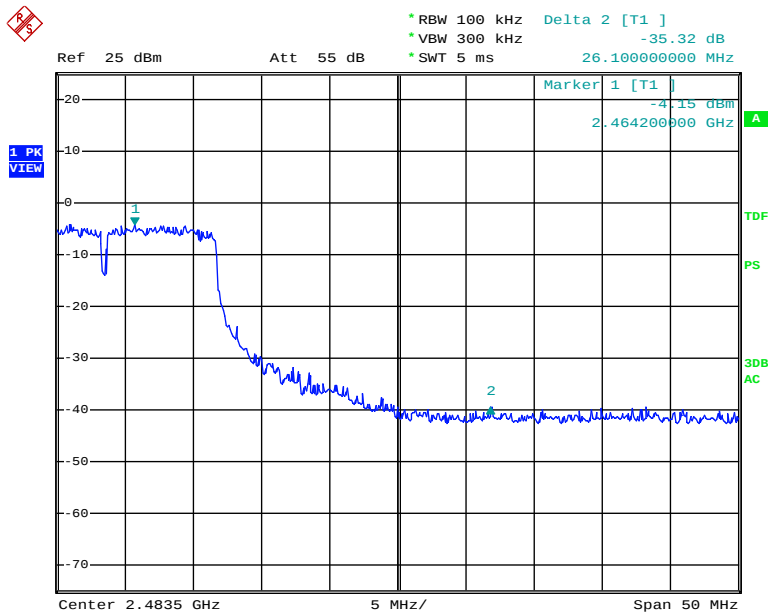


802.11n(HT20) Low Channel

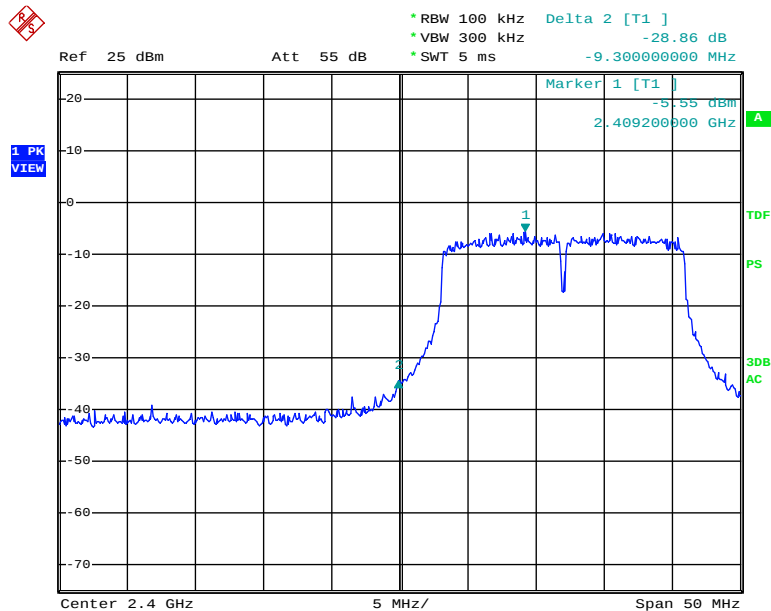


802.11n(HT20) High Channel

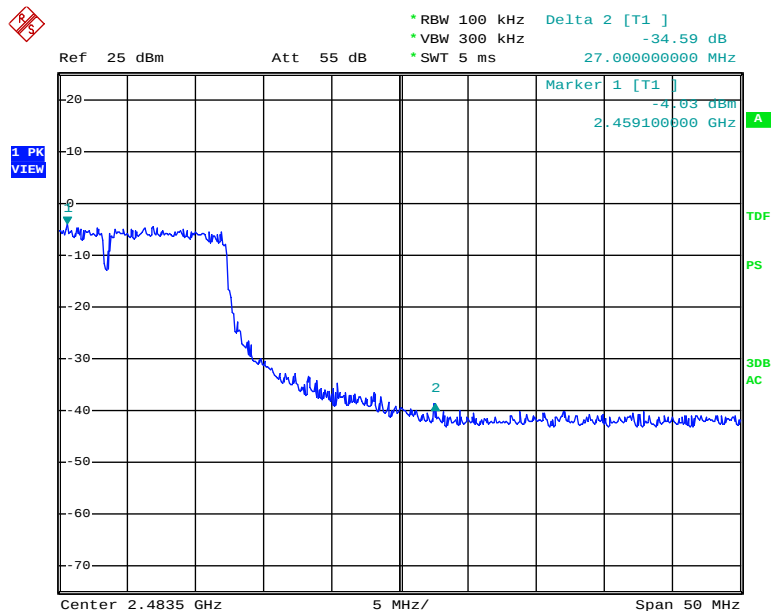

802.11n(HT40) Low Channel

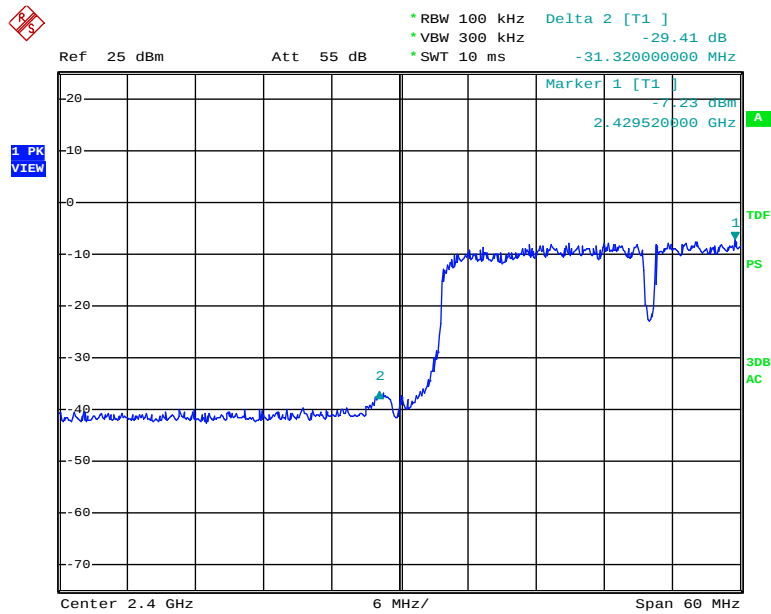


802.11n(HT40) High Channel

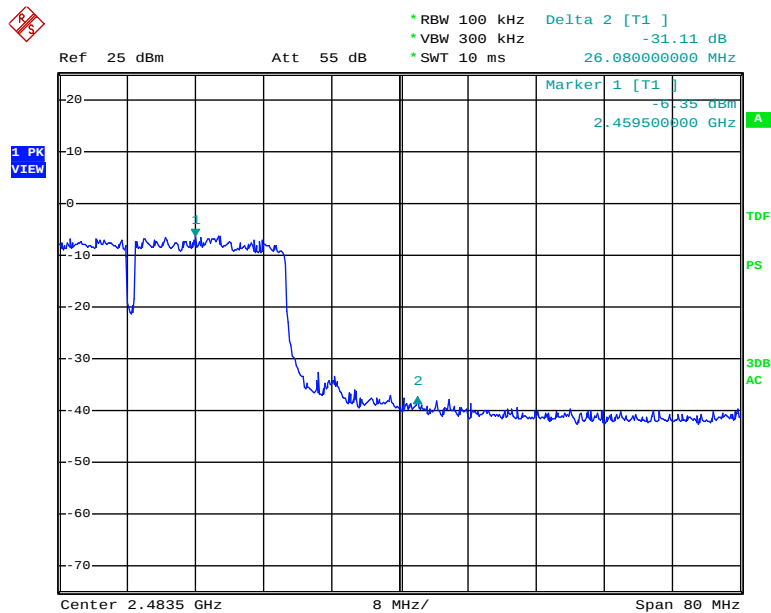


Conducted Spurious Emissions


802.11b Low Channel

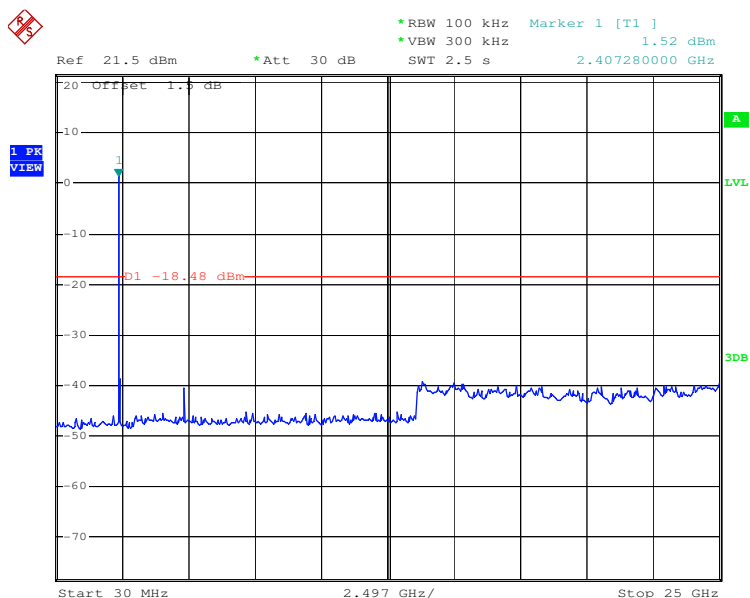


802.11b Middle Channel

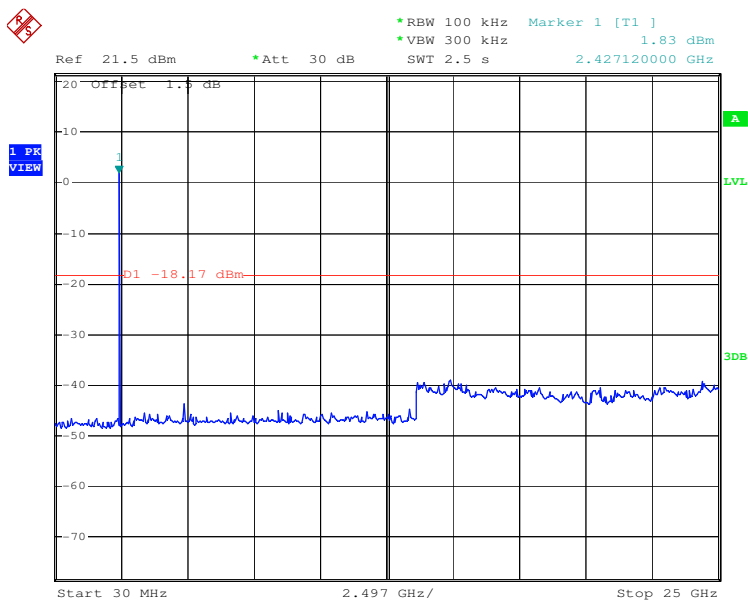


802.11b High Channel

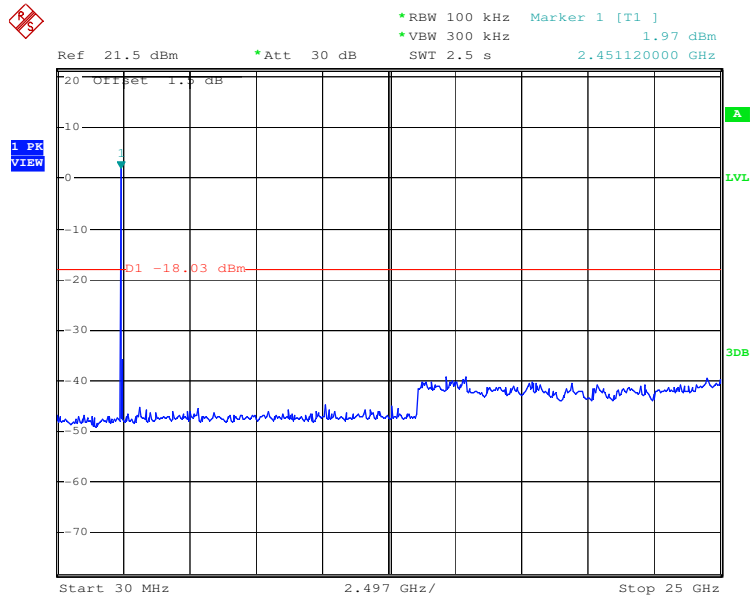


802.11g Low Channel

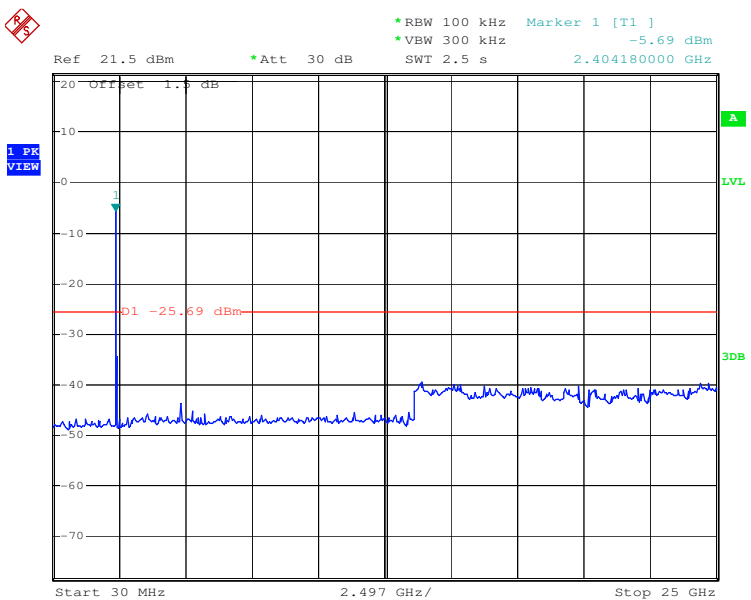


802.11g Middle Channel

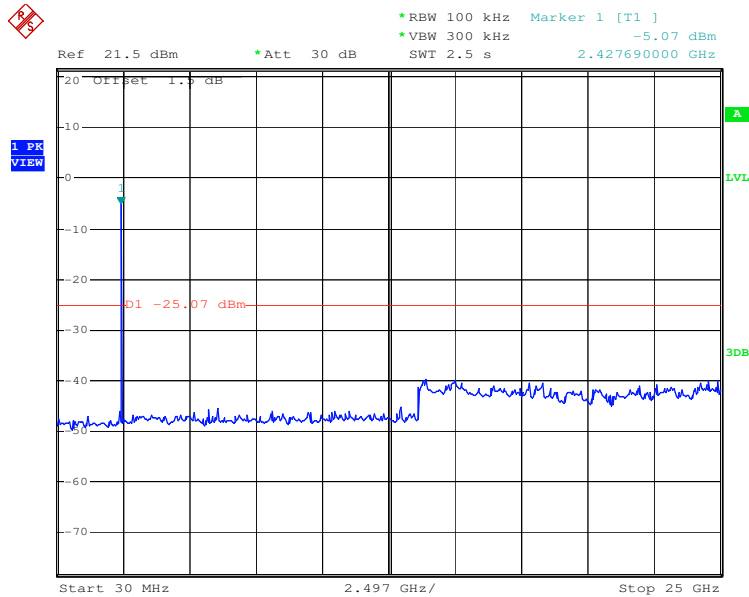


802.11g High Channel

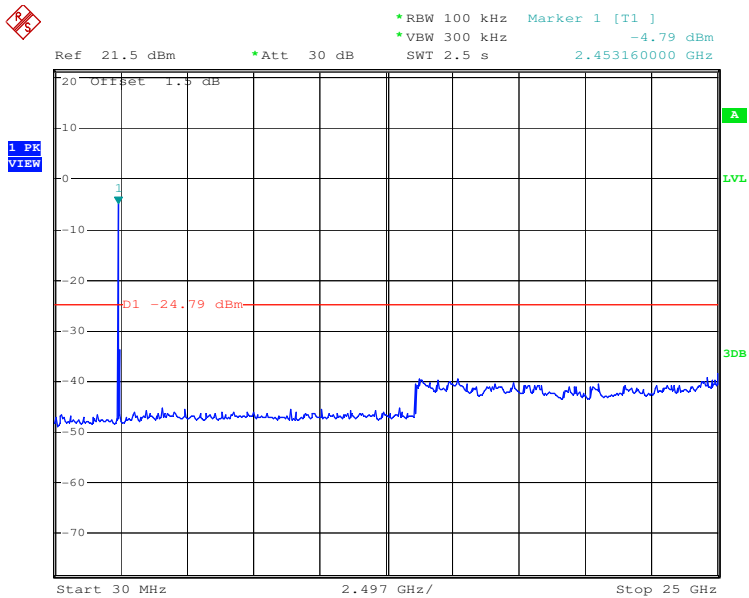


802.11n(HT20) Low Channel

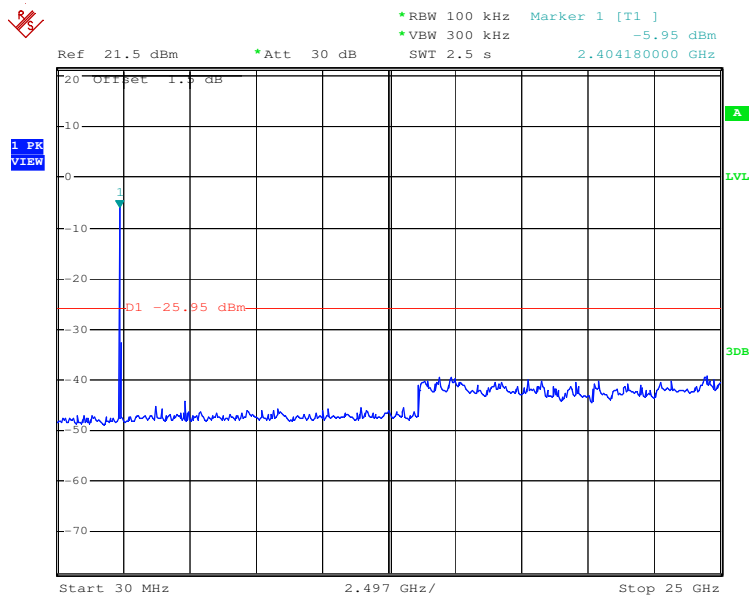


802.11n(HT20) Middle Channel

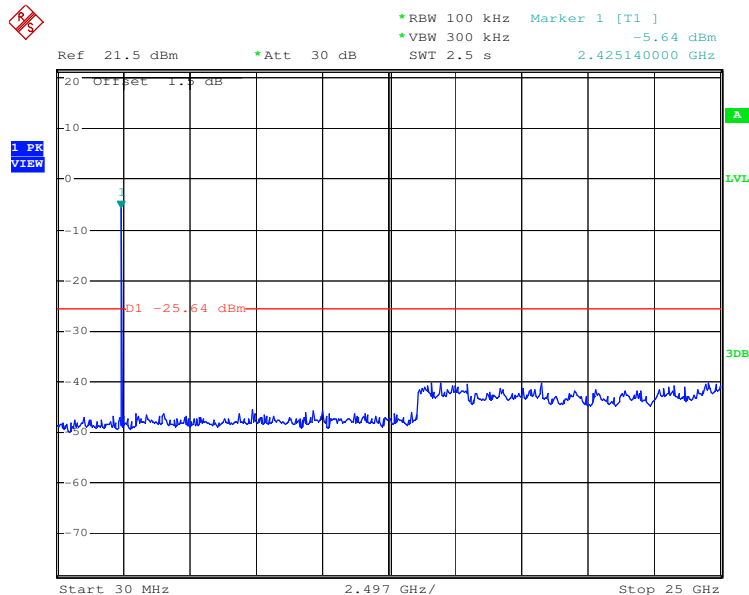


802.11n(HT20) High Channel

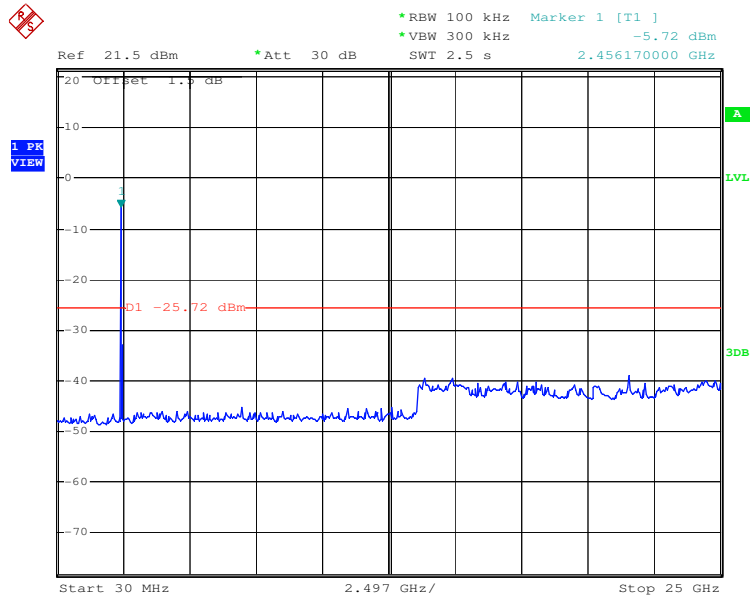


802.11n(HT40) Low Channel

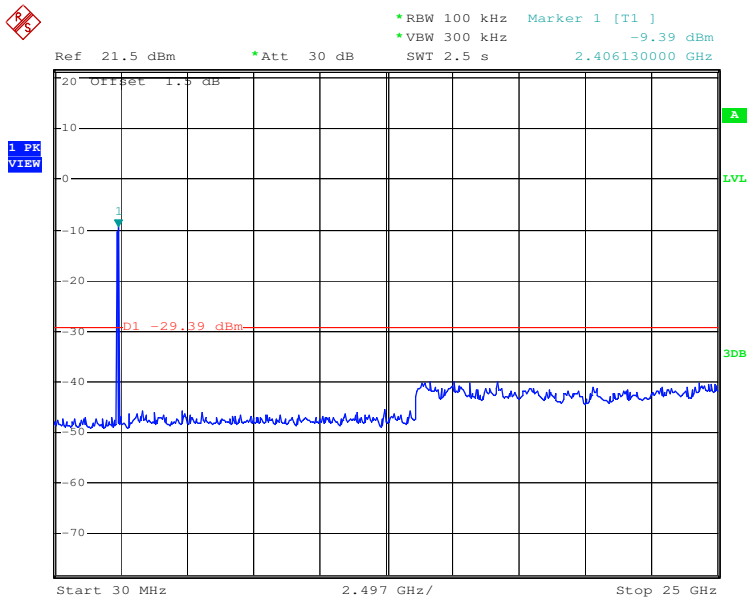

802.11n(HT40) Middle Channel

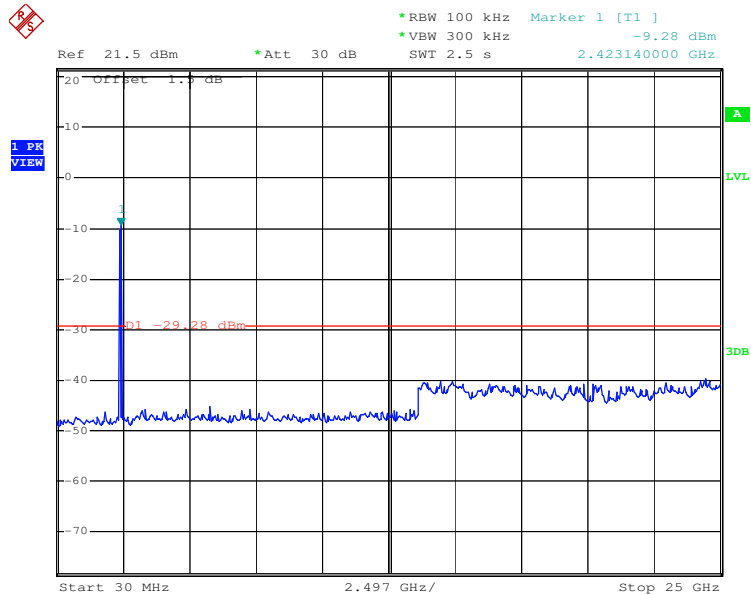


802.11n(HT40) High Channel

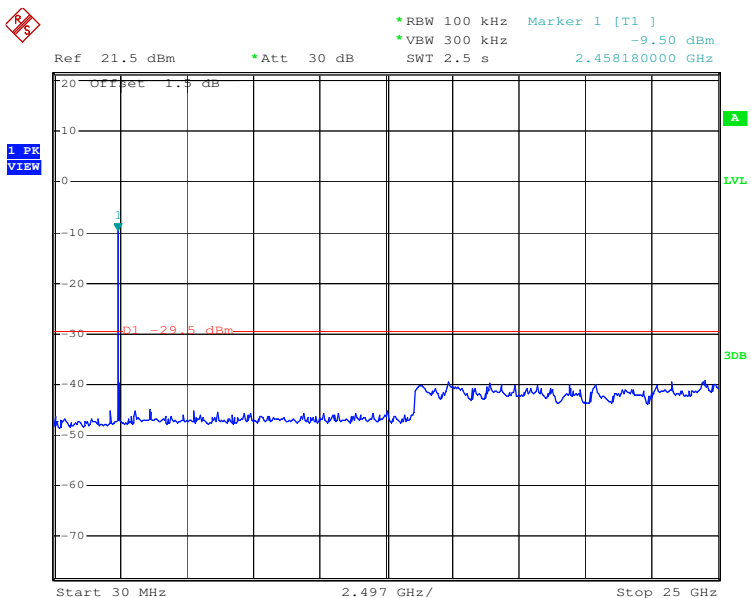


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

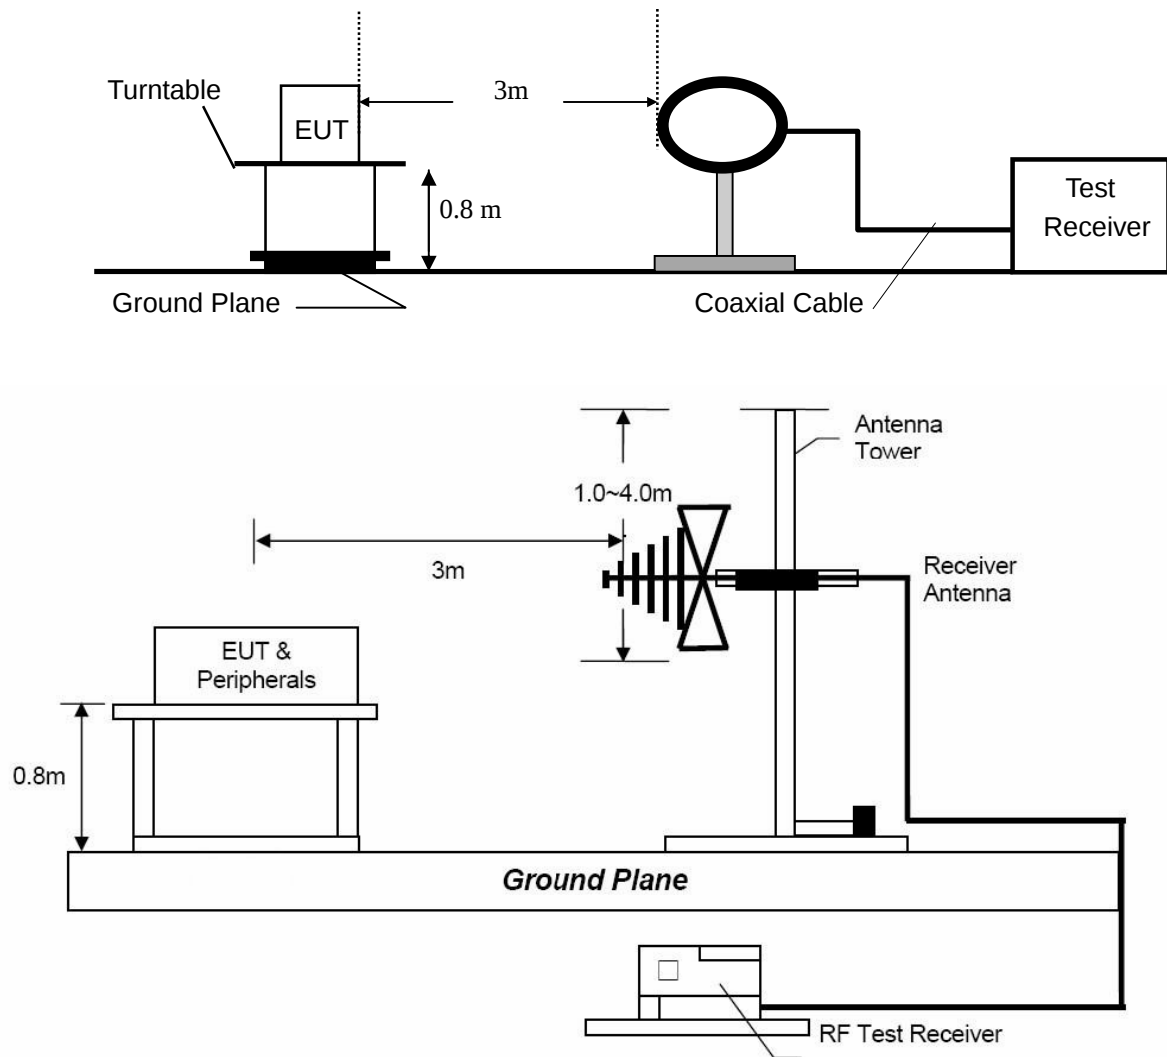

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

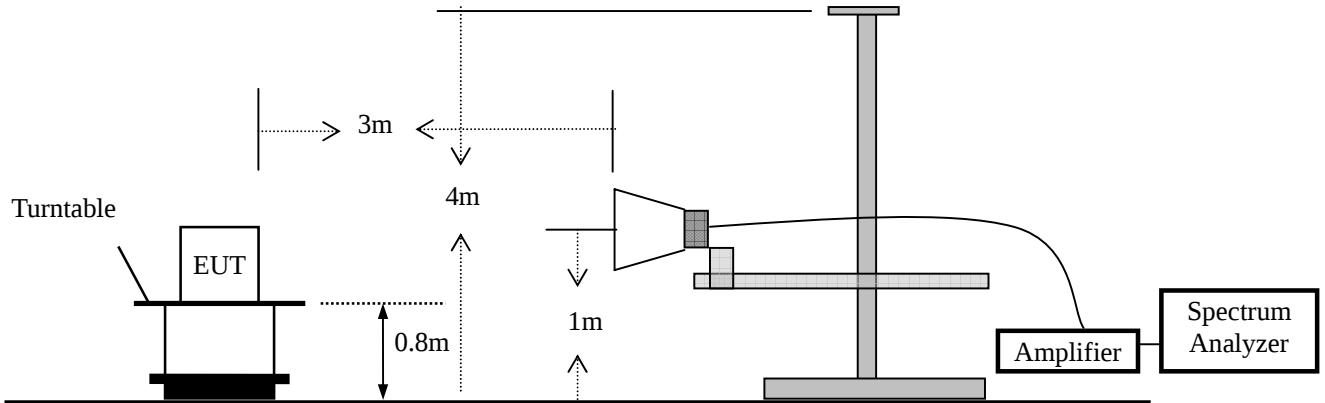

8.2 Measurement Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
(5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4 Measurement Results

Test Mode: 802.11b(the worst case)
Frequency Range: Below 1GHz Temperature : 24 °C
Test Result: PASS Humidity : 52 %
Measured Distance: 3m Test By: Think
Test Date : November 21, 2012

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
50.4500	V	35.00	43.50	-8.50	QP
127.9700	V	33.57	43.50	-9.93	QP
303.5400	V	35.00	46.00	-11.00	QP
600.3600	V	38.53	46.00	-7.47	QP
683.7798	V	39.91	46.00	-6.09	QP
759.4400	V	40.12	46.00	-5.88	QP
125.0600	H	30.20	43.50	-13.30	QP
297.0100	H	43.50	46.00	-2.50	QP
371.4400	H	39.46	46.00	-6.54	QP
519.8500	H	37.50	46.00	-8.50	QP
710.9400	H	37.00	46.00	-9.00	QP
742.9500	H	40.75	46.00	-5.25	QP

Other emissions are lower than 10dB below the allowable limit.

Note: (1) Quasi-Peak detector is used except for others stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB.

Test Mode:	802.11b	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Low)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	61.47	46.74	74.00	54.00	-12.53	-7.26
7236	V	55.34	41.68	74.00	54.00	-18.66	-12.32
9648	V	57.36	43.05	74.00	54.00	-16.64	-10.95
4824	H	63.54	48.87	74.00	54.00	-10.46	-5.13
7236	H	56.11	42.09	74.00	54.00	-17.89	-11.91
9648	H	57.28	43.21	74.00	54.00	-16.72	-10.79

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : $\pm 3.7\text{dB}$

Test Mode:	802.11b	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Mid)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	63.42	48.85	74.00	54.00	-10.58	-5.15
7311	V	56.74	42.18	74.00	54.00	-17.26	-11.82
9748	V	57.51	43.20	74.00	54.00	-16.49	-10.80
4874	H	64.95	49.75	74.00	54.00	-9.05	-4.25
7311	H	55.64	41.74	74.00	54.00	-18.36	-12.26
9748	H	56.91	42.56	74.00	54.00	-17.09	-11.44

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ±3.7dB

Test Mode: 802.11b
Operation Mode: TX Mode (High) Test Date : November 21, 2012
Frequency Range: Above 1GHz Temperature : 24 °C
Test Result: PASS Humidity : 52 %
Measured Distance: 3m Test By: Think

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	64.76	49.67	74.00	54.00	-9.24	-4.33
7386	V	55.61	41.94	74.00	54.00	-18.39	-12.06
9848	V	56.37	42.50	74.00	54.00	-17.63	-11.50
4924	H	65.22	50.45	74.00	54.00	-8.78	-3.55
7386	H	56.75	42.08	74.00	54.00	-17.25	-11.92
9848	H	56.84	42.69	74.00	54.00	-17.16	-11.31

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Spurious Emission in restricted band:

Test Mode:	802.11b	Test Date :	November 21, 2012
Operation Mode:	TX	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2390	V	48.97	35.43	74.00	54.00	-25.03	-18.57
2483.5	V	49.58	36.02	74.00	54.00	-24.42	-17.98
2390	H	51.14	37.51	74.00	54.00	-22.86	-16.49
2483.5	H	52.93	38.97	74.00	54.00	-21.07	-15.03

Other harmonics emissions are lower than 10dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Emission Level= Reading Level+Probe Factor +Cable Loss
- (3) Measurement uncertainty : $\pm 3.7\text{dB}$

Test Mode:	802.11g	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Low)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	59.64	45.97	74.00	54.00	-14.36	-8.03
7236	V	55.96	41.31	74.00	54.00	-18.04	-12.69
9648	V	56.24	42.18	74.00	54.00	-17.76	-11.82
4824	H	61.34	46.70	74.00	54.00	-12.66	-7.30
7236	H	56.07	41.92	74.00	54.00	-17.93	-12.08
9648	H	56.83	42.65	74.00	54.00	-17.17	-11.35

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : ±3.7dB

Test Mode:	802.11g	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Mid)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	60.01	46.12	74.00	54.00	-13.99	-7.88
7311	V	55.73	41.85	74.00	54.00	-18.27	-12.15
9748	V	56.84	42.42	74.00	54.00	-17.16	-11.58
4874	H	61.55	47.31	74.00	54.00	-12.45	-6.69
7311	H	56.36	42.04	74.00	54.00	-17.64	-11.96
9748	H	57.17	43.10	74.00	54.00	-16.83	-10.90

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Test Mode:	802.11g	Test Date :	November 21, 2012
Operation Mode:	TX Mode (High)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	60.75	46.79	74.00	54.00	-13.25	-7.21
7386	V	56.19	42.03	74.00	54.00	-17.81	-11.97
9848	V	57.48	43.13	74.00	54.00	-16.52	-10.87
4924	H	62.74	48.22	74.00	54.00	-11.26	-5.78
7386	H	56.81	42.15	74.00	54.00	-17.19	-11.85
9848	H	57.90	43.28	74.00	54.00	-16.10	-10.72

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Spurious Emission in restricted band:

Test Mode:	802.11g	Test Date :	November 21, 2012
Operation Mode:	TX	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2390	V	48.43	34.82	74.00	54.00	-25.57	-19.18
2483.5	V	49.66	35.98	74.00	54.00	-24.34	-18.02
2390	H	51.19	37.65	74.00	54.00	-22.81	-16.35
2483.5	H	52.24	38.53	74.00	54.00	-21.76	-15.47

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Test Mode:	802.11n(HT20)	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Low)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	59.23	45.25	74.00	54.00	-14.77	-8.75
7236	V	56.26	42.04	74.00	54.00	-17.74	-11.96
9648	V	57.11	42.92	74.00	54.00	-16.89	-11.08
4824	H	62.05	47.48	74.00	54.00	-11.95	-6.52
7236	H	56.43	42.07	74.00	54.00	-17.57	-11.93
9648	H	57.68	43.39	74.00	54.00	-16.32	-10.61

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Test Mode:	802.11n(HT20)	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Mid)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	60.14	46.30	74.00	54.00	-13.86	-7.70
7311	V	55.98	41.76	74.00	54.00	-18.02	-12.24
9748	V	57.71	43.58	74.00	54.00	-16.29	-10.42
4874	H	62.75	47.96	74.00	54.00	-11.25	-6.04
7311	H	56.12	42.10	74.00	54.00	-17.88	-11.90
9748	H	57.73	43.64	74.00	54.00	-16.27	-10.36

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ±3.7dB

Test Mode: 802.11n(HT20)
Operation Mode: TX Mode (High) Test Date : November 21, 2012
Frequency Range: Above 1GHz Temperature : 24 °C
Test Result: PASS Humidity : 52 %
Measured Distance: 3m Test By: Think

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	61.02	47.43	74.00	54.00	-12.98	-6.57
7386	V	56.71	42.68	74.00	54.00	-17.29	-11.32
9848	V	57.82	43.50	74.00	54.00	-16.18	-10.50
4924	H	63.22	48.09	74.00	54.00	-10.78	-5.91
7386	H	57.78	43.16	74.00	54.00	-16.22	-10.84
9848	H	58.34	44.81	74.00	54.00	-15.66	-9.19

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Spurious Emission in restricted band:

Test Mode:	802.11n(HT20)	Test Date :	November 21, 2012
Operation Mode:	TX	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2390	V	48.75	34.69	74.00	54.00	-25.25	-19.31
2483.5	V	49.23	35.74	74.00	54.00	-24.77	-18.26
2390	H	50.92	36.13	74.00	54.00	-23.08	-17.87
2483.5	H	52.61	38.97	74.00	54.00	-21.39	-15.03

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Test Mode:	802.11n(HT40)	Test Date :	November 21, 2012
Operation Mode:	TX Mode (Low)	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4844	V	58.94	44.62	74.00	54.00	-15.06	-9.38
7266	V	56.34	42.09	74.00	54.00	-17.66	-11.91
9688	V	57.06	43.15	74.00	54.00	-16.94	-10.85
4844	H	61.02	47.44	74.00	54.00	-12.98	-6.56
7266	H	57.05	42.98	74.00	54.00	-16.95	-11.02
9688	H	57.94	43.76	74.00	54.00	-16.06	-10.24

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Test Mode: 802.11n(HT40)
Operation Mode: TX Mode (Mid) Test Date : November 21, 2012
Frequency Range: Above 1GHz Temperature : 24 °C
Test Result: PASS Humidity : 52 %
Measured Distance: 3m Test By: Think

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	59.47	44.56	74.00	54.00	-14.53	-9.44
7311	V	56.83	42.64	74.00	54.00	-17.17	-11.36
9748	V	57.51	43.68	74.00	54.00	-16.49	-10.32
4874	H	61.78	48.06	74.00	54.00	-12.22	-5.94
7311	H	56.23	42.87	74.00	54.00	-17.77	-11.13
9748	H	57.74	43.29	74.00	54.00	-16.26	-10.71

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Test Mode: 802.11n(HT40)
Operation Mode: TX Mode (High) Test Date : November 21, 2012
Frequency Range: Above 1GHz Temperature : 24 °C
Test Result: PASS Humidity : 52 %
Measured Distance: 3m Test By: Think

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4904	V	59.16	44.60	74.00	54.00	-14.84	-9.40
7356	V	56.47	42.14	74.00	54.00	-17.53	-11.86
9808	V	57.39	43.07	74.00	54.00	-16.61	-10.93
4904	H	62.66	48.95	74.00	54.00	-11.34	-5.05
7356	H	56.79	42.84	74.00	54.00	-17.21	-11.16
9808	H	58.03	43.79	74.00	54.00	-15.97	-10.21

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Spurious Emission in restricted band:

Test Mode:	802.11n(HT40)	Test Date :	November 21, 2012
Operation Mode:	TX	Temperature :	24 °C
Frequency Range:	Above 1GHz	Humidity :	52 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2390	V	48.53	34.73	74.00	54.00	-25.47	-19.27
2483.5	V	49.90	35.12	74.00	54.00	-24.10	-18.88
2390	H	51.03	37.15	74.00	54.00	-22.97	-16.85
2483.5	H	52.76	38.78	74.00	54.00	-21.24	-15.22

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : $\pm 3.7\text{dB}$

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is -2 dBi. So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manfucaturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	Nov. 05, 2012	Nov. 04, 2013
Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2011	Nov. 27, 2012
Positioning Controller	UC	UC 3000	N/A	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22320001	Nov. 05, 2012	Nov. 04, 2013
Cable	Huber+Suhner	CIL02	N/A	Nov. 05, 2012	Nov. 04, 2013
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 05, 2012	Nov. 04, 2013
L.I.S.N	Rohde & Schwarz	ENV 216	101317	Nov. 05, 2012	Nov. 04, 2013
Horn Antenna	EMCO	3117	00062558	Oct. 19, 2012	Oct. 18, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct. 24, 2012	Oct. 23, 2013
Loop antenna	Daze	ZA30900A	0708	Oct.16, 2012	Oct.15, 2013
Spectrum Analyzer	Rohde&Schwarz	ESU	100005	May 25, 2012	May 24, 2013
Cable	Schwarzbeck	CIL02	N/A	Nov. 05, 2012	Nov. 04, 2013
Pre-Amplifier	Agilent	8449B	3008A02964	Dec. 19, 2011	Dec. 18, 2012