



Report No.: FCC 1909104-02 File Reference No.: 2019-09-21

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Wireless Bluetooth Headset

Model No.: BKH600

Trademark: Brookstone

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: September 21, 2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2019-09-21



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 79

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	23
8.0	Maximum Output Power.	35
9.0	Carrier Frequency Separation.	38
10.0	Number of Hopping Channel	42
11.0	Time of Occupancy (Dwell Time)	46
12.0	Out of Band Measurement.	53
13.0	Antenna Requirement.	70
14.0	FCC ID Label	71
15.0	Photo of Test Setup and FUT View	72

Date: 2019-09-21



Page 4 of 79

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

Telephone: 0755-84688843 Fax: 0755-83976520

1.3 Description of EUT

Product: Wireless Bluetooth Headset

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Brand Name: Brookstone
Model Number: BKH600
Additional Model Number: N/A

Type of Modulation GFSK, Л/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral antenna used. The gain of the antennas is -1.65dBi

Rating: Internal Li-ion battery: DC3.7V, 50mAh

Software Version: v2.19

Hardware Version: jh01–20180807-R (for right headset); jh01–20180807-L (for left headset)

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1909104-02 Page 5 of 79

Date: 2019-09-21



1.5 Test Duration 2019-09-16 to 2019-09-20

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty = 6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2019-06-21	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Page 7 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 79


Report No.: FCC1909104-02

Date: 2019-09-21



5. Power Line Conducted Emission Test

5.1 Schematics of the test

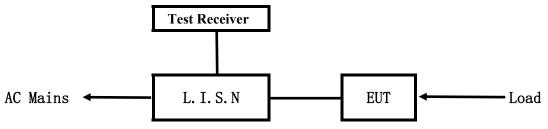


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

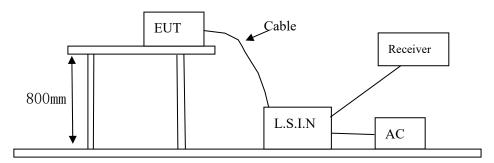

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1909104-02 Page 9 of 79

Date: 2019-09-21



A. EUT

Device	Manufacturer	Model	FCC ID
Wireless Bluetooth	Shenzhen Jingwah Information	BKH600	RBD-BKH600
Headset	Technology Co., Ltd.	ВК П000	KDD-DKH000

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	h.TV	S012BES0500200	Input: 100-240V~, 50/60Hz, 0.5A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107,15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1909104-02 Page 10 of 79

Date: 2019-09-21



Conducted Emission on Live Terminal (150kHz to 30MHz) A:

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

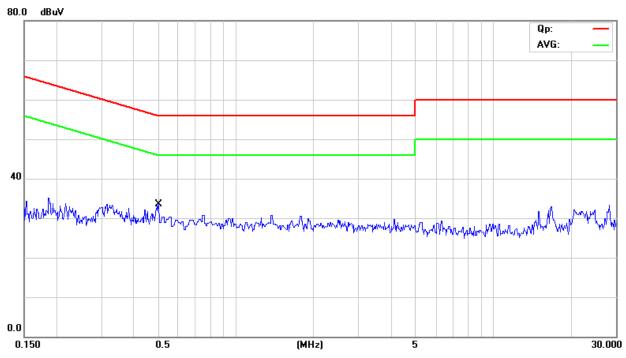

No. Mk.	Freq.			Measure- ment	Limit	Over		
	MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1 *	0.4926	13.10	9.77	22.87	56.12	-33.25	QP	
2	0.4926	-10.00	9.77	-0.23	46.12	-46.35	AVG	

Report No.: FCC1909104-02 Page 11 of 79

Date: 2019-09-21



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

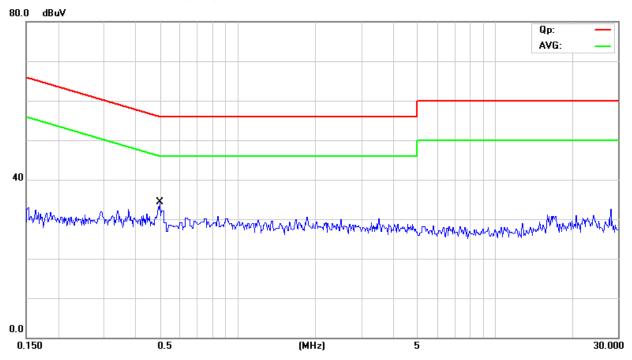

No.	Mk.	Freq.			Measure- ment	sure- _{ent} Limit Over			
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1	*	0.4961	13.40	9.77	23.17	56.07	-32.90	QP	
2		0.4961	-7.30	9.77	2.47	46.07	-43.60	AVG	

Report No.: FCC1909104-02 Page 12 of 79


Date: 2019-09-21



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

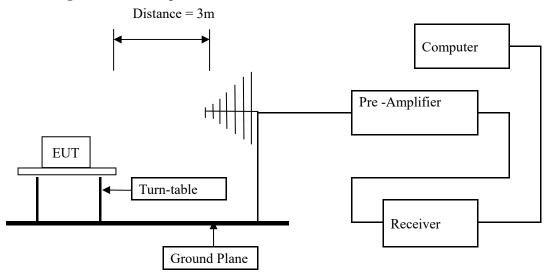

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1909104-02 Page 13 of 79

Date: 2019-09-21



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. 8DPSK was the worse case because it has highest output power

Date: 2019-09-21



Page 14 of 79

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Page 15 of 79 Report No.: FCC1909104-02


Date: 2019-09-21



Test Figure:

H

FCC_FCC Part 15B Class B 30MHz-1GHz

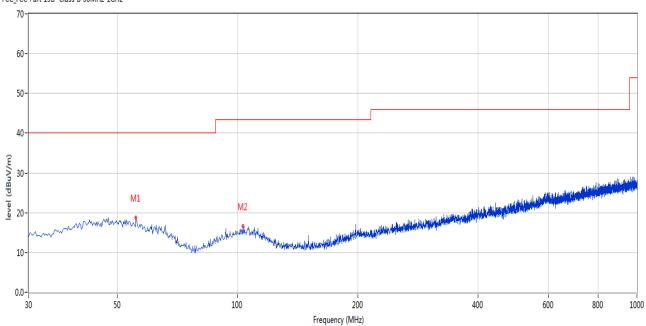


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	55.699	18.72	-11.94	40.0	-21.28	Peak	43.00	100	Н	Pass
2	103.217	16.56	-13.37	43.5	-26.94	Peak	8.00	100	Н	Pass

Page 16 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



Test Figure:

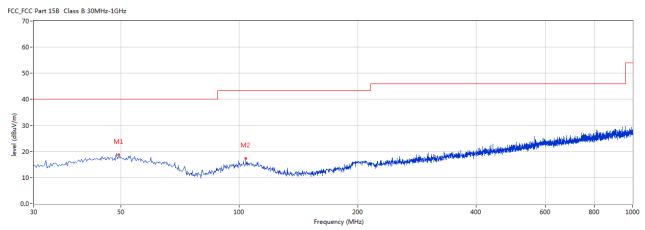

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	49.395	18.79	-11.28	40.0	-21.21	Peak	42.00	100	V	Pass
2	103.944	17.47	-13.33	43.5	-26.03	Peak	211.00	100	V	Pass

Date: 2019-09-21




Page 17 of 79

Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

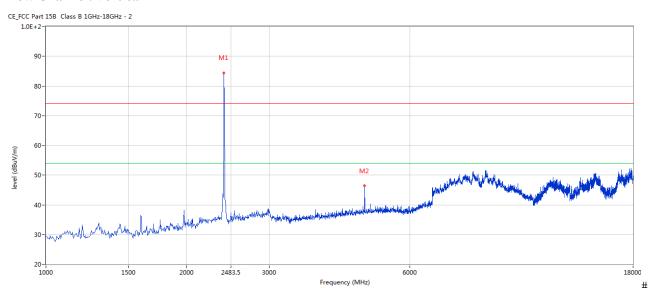

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4802.799	47.40	3.12	54.0	-6.60	Peak	205.00	100	٧	Pass


Page 18 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



Low Channel: Horizontal

CE_FCC Part 15B Class B 1GHz-18GHz - 2

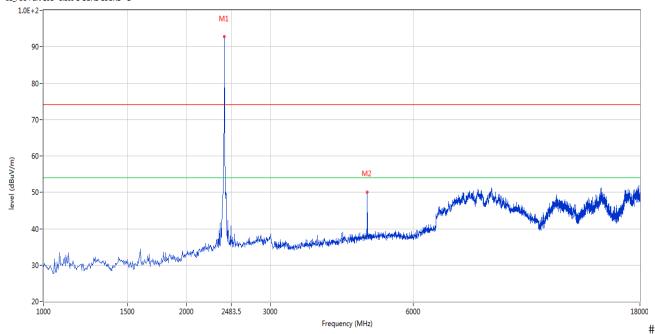


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
2	4802.799	50.15	3.12	54.0	-3.85	Peak	151.00	100	Н	Pass

Report No.: FCC1909104-02 Page 19 of 79

Date: 2019-09-21



Middle Channel: Horizontal

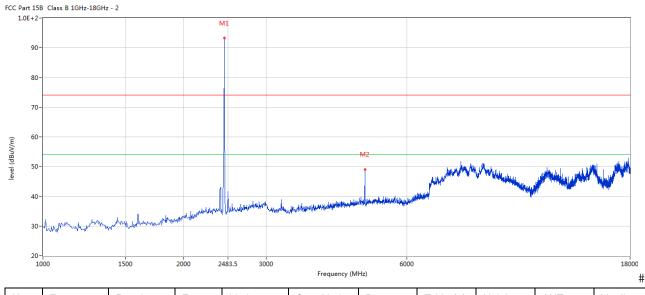


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4879.280	49.09	3.20	54.0	-4.91	Peak	27.00	100	Н	Pass

Page 20 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



Middle Channel: Vertical

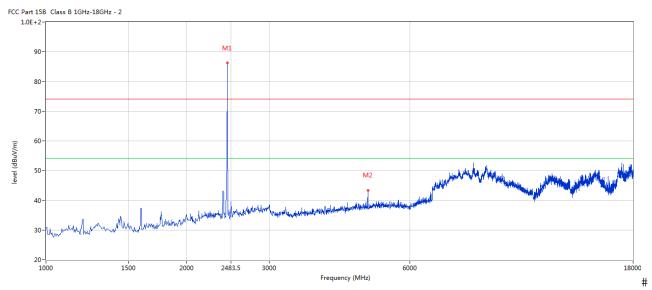

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4879.280	43.42	3.20	54.0	-10.58	Peak	359.00	100	V	Pass


Page 21 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



High Channel: Horizontal

CE_FCC Part 15B Class B 1GHz-18GHz - 2

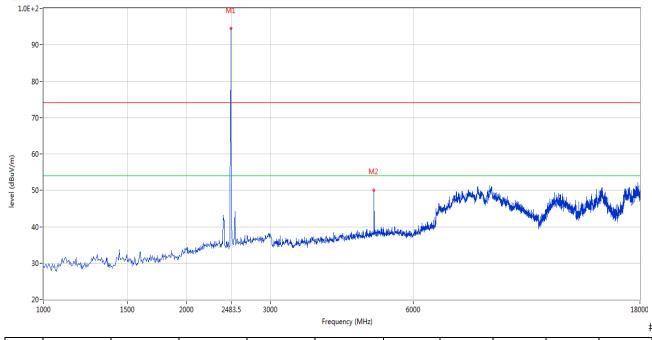


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
2	4960.010	50.04	3.36	54.0	-3.96	Peak	356.00	100	Н	Pass

Report No.: FCC1909104-02 Page 22 of 79

Date: 2019-09-21



High Channel: Vertical

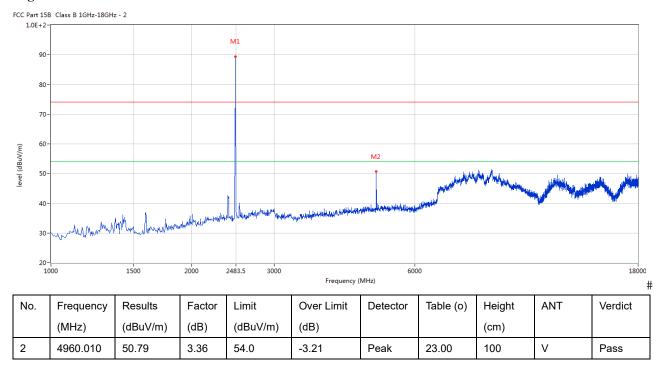

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2019-09-21



Page 23 of 79

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Modulation, Of Six										
EUT	Wireles	s Bluetooth Headset	Model	BKH600						
Mode	Ke	ep Transmitting	Input Voltage	DC3.7V						
Temperat	ure	24 deg. C,	Humidity	56% RH						
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail						
Low	2402	992		Pass						
Middle	2441 986			Pass						
High	2480	980		Pass						


Report No.: FCC1909104-02 Page 24 of 79

Date: 2019-09-21



Test Figure:

1. Condition: Low Channel

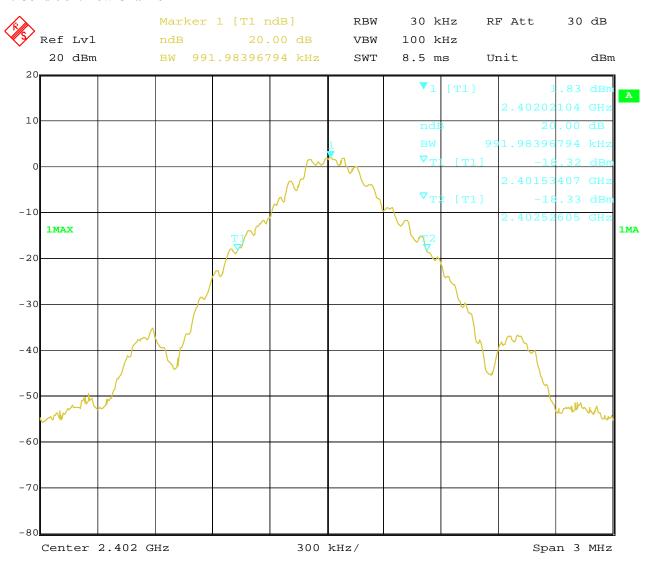


Date: 18.SEP.2019 14:16:55 Report No.: FCC1909104-02 Page 25 of 79

Date: 2019-09-21



2. Condition: Middle Channel

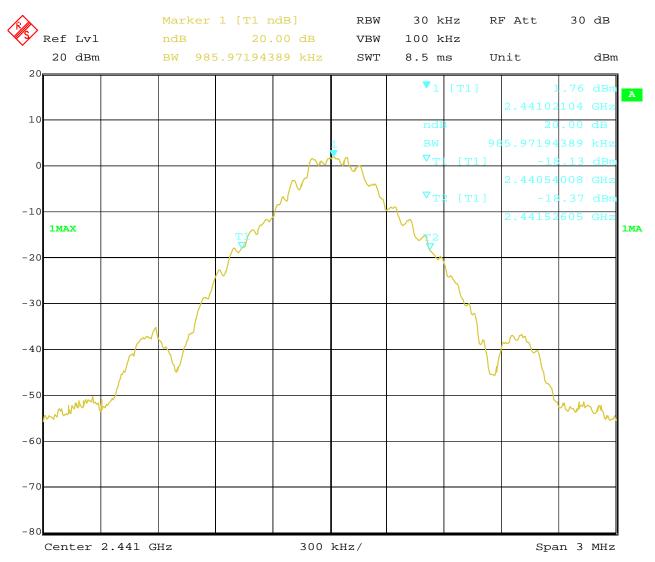


Date: 18.SEP.2019 14:12:57 Report No.: FCC1909104-02 Page 26 of 79

Date: 2019-09-21



3. High Channel

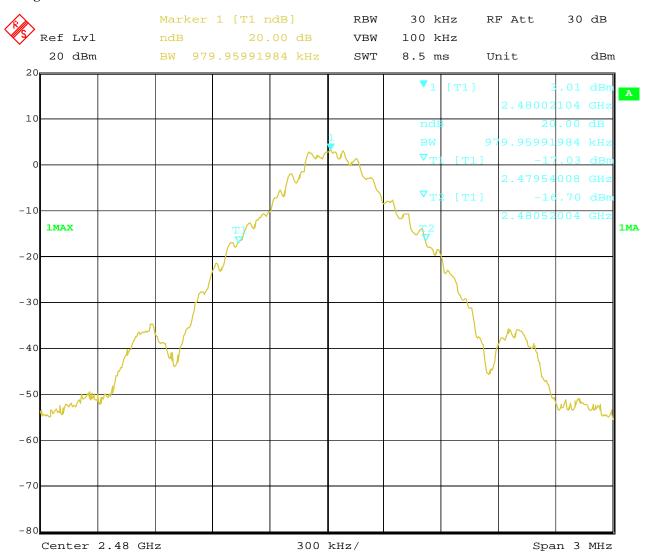

18.SEP.2019 14:11:06 Date:

Date: 2019-09-21



Page 27 of 79

Test Result

Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT	Wirele	ss Bluetooth Headset	Model	BKH600
Mode	Ko	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1383		Pass
Middle	2441 1377			Pass
High	2480	1377		Pass


Report No.: FCC1909104-02 Page 28 of 79

Date: 2019-09-21



Test Figure:

1. Condition: Low Channel

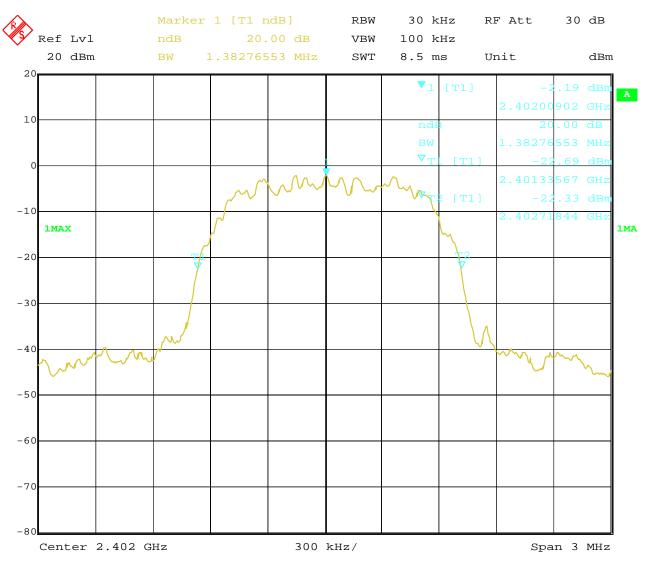


Date: 18.SEP.2019 14:05:05 Report No.: FCC1909104-02 Page 29 of 79

Date: 2019-09-21



2. Condition: Middle Channel

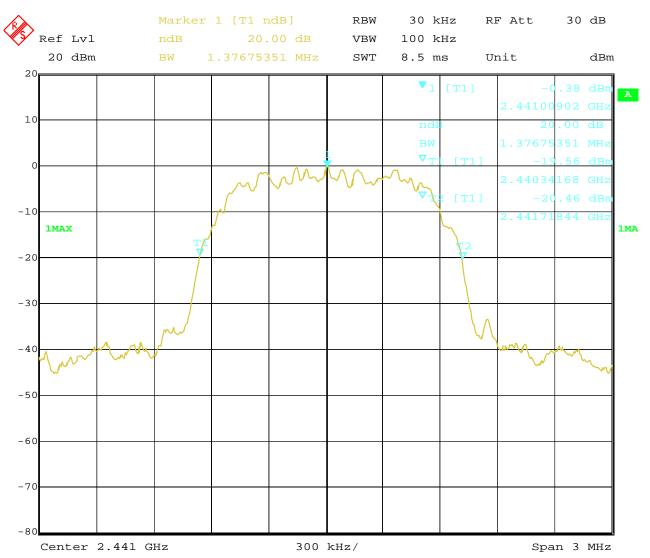


14:07:02 Date: 18.SEP.2019

Page 30 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



3. High Channel

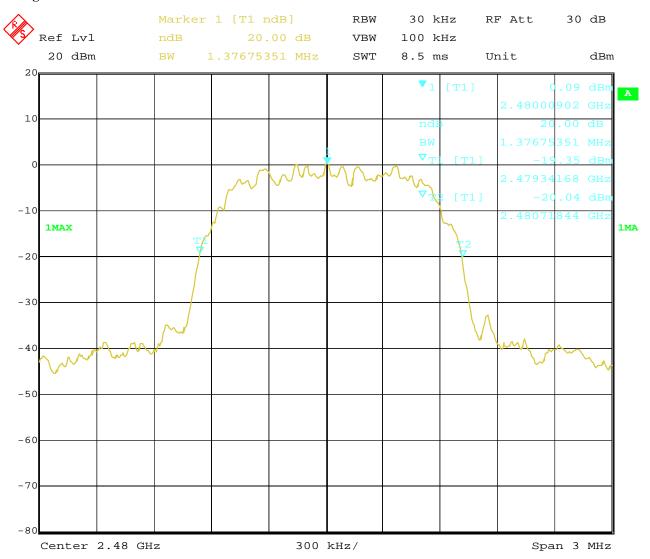

18.SEP.2019 14:09:24 Date:

Date: 2019-09-21



Page 31 of 79

Test Result

Type of Modulation: 8DPSK

EUT	Wirele	ss Bluetooth Headset	Model	BKH600
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1359		Pass
Middle	2441	1365		Pass
High	2480	1353		Pass


Report No.: FCC1909104-02 Page 32 of 79

Date: 2019-09-21



Test Figure:

1. Condition: Low Channel

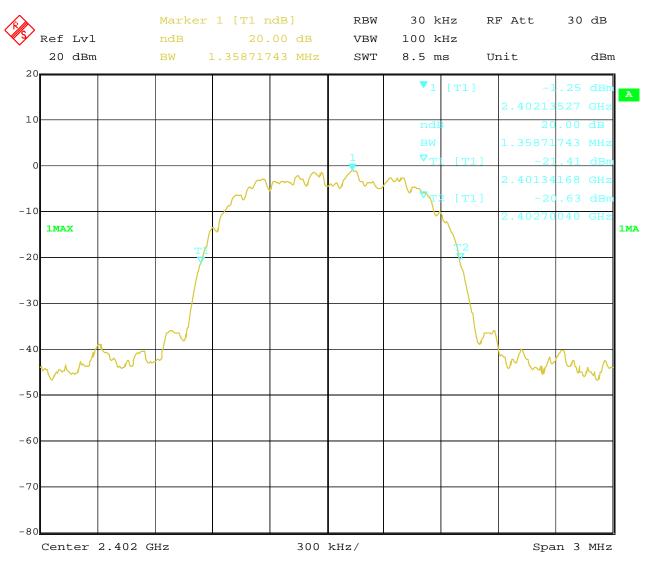


Date: 18.SEP.2019 14:03:32 Report No.: FCC1909104-02 Page 33 of 79

Date: 2019-09-21



2. Condition: Middle Channel

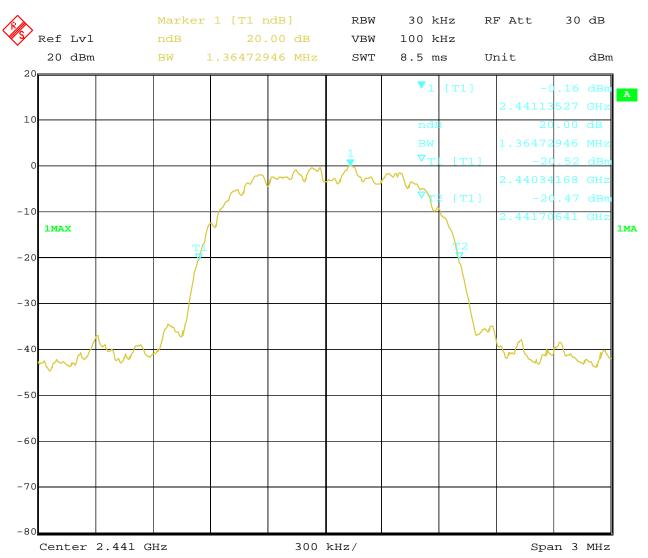


18.SEP.2019 14:01:20 Date:

Report No.: FCC1909104-02 Page 34 of 79

Date: 2019-09-21



3. High Channel

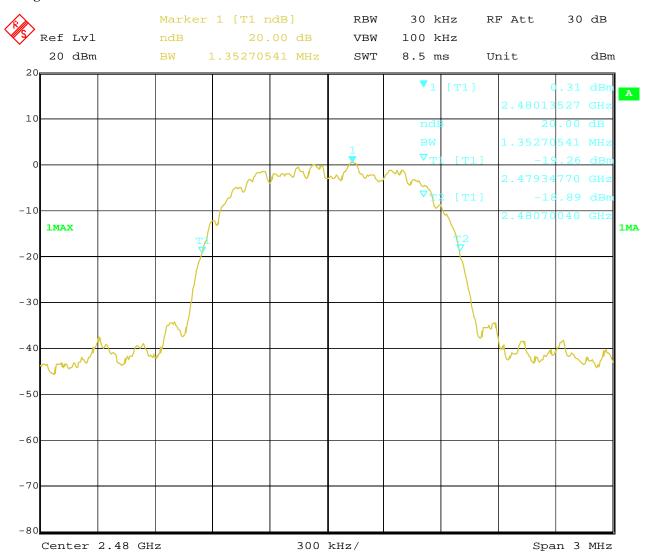

18.SEP.2019 13:58:26 Date:

Date: 2019-09-21



Page 35 of 79

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = RMS; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1909104-02 Page 36 of 79

Date: 2019-09-21



8.4Test Results

Type of Modulation: GFSK

EUT	Wirele	ss Bluetooth Headset	Model		BKH600
Mode	K	Keep Transmitting			DC3.7V
Temperature	е	24 deg. C,			56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
Low	2402	Peak 5.49		(dBm) 30	Pass
Middle	2441	6.20		30	Pass
High	2480	6.71	6.71		Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

EUT		Solar Blue	etooth Light & Speaker	N	Model	DY20190708-07A
Mode		Keep Transmitting			Voltage	DC3.7V
Temperature	e	24 deg. C,			idity	56% RH
Channel	Channel Frequency		Max. Power Output (dBm)		Peak Power	Pass/ Fail
	((MHz)	Peak		Limit (dBm)	
Low	Low 2402 Middle 2441		7.12		30	Pass
Middle			7.38		30	Pass
High		2480 7.90			30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-09-21



Page 37 of 79

Type of Modulation: 8DPSK

EUT	Wireles	Wireless Bluetooth Headset		Model	BKH600
Mode	Ke	ep Transmitting	Input Voltage		DC3.7V
Temperature		24 deg. C, H		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	7.76		30	Pass
Middle	2441	7.88		30	Pass
High	2480	8.30		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Date: 2019-09-21



Page 38 of 79

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 39 of 79

Report No.: FCC1909104-02

Date: 2019-09-21




9.4Test Result

Type of Modulation: GFSK

EUT	Wireless Bluetooth	Model		BKH600	
Mode	Hopping On I		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of the 20 dB bandwidth		dwidth	Pass

Test Plots

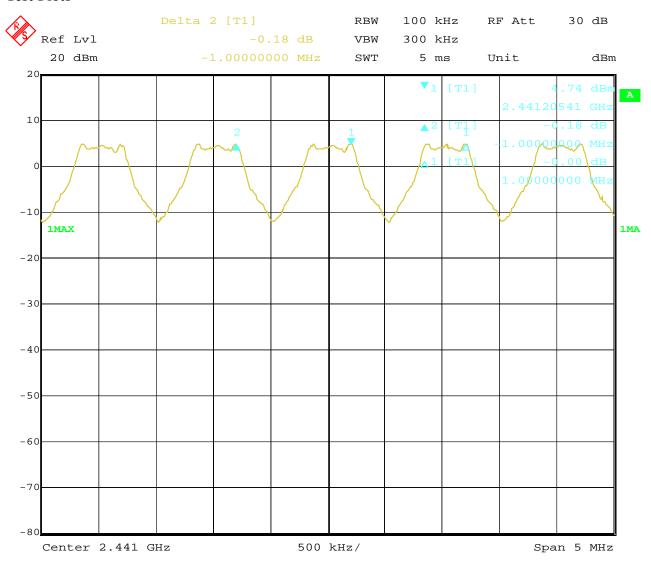

17.SEP.2019 16:02:32 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1909104-02 Page 40 of 79


Date: 2019-09-21



Type of Modulation: Л/4DQPSK

EUT	Wireless Bluetooth	Model		BKH600	
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,	24 deg. C,		56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		width	Pass

Test Plots

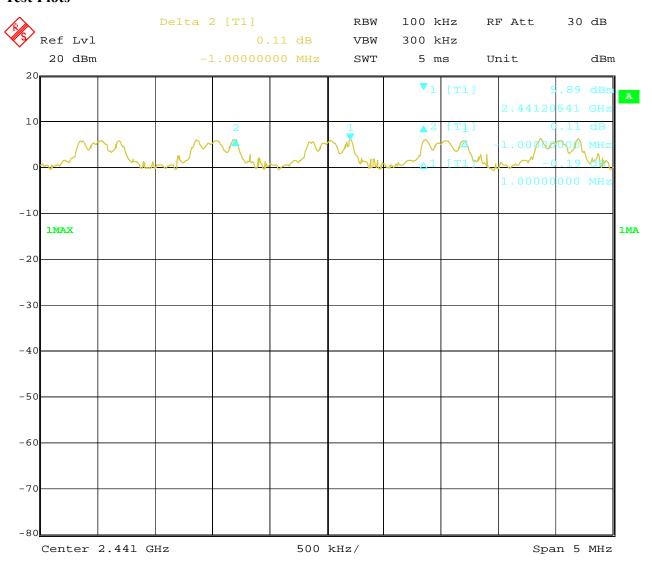

17.SEP.2019 17:58:23

Page 41 of 79 Report No.: FCC1909104-02


Date: 2019-09-21



Type of Modulation: 8DPSK

EUT	Wireless Bluetooth Headset		Model		BKH600
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass

Test Plots

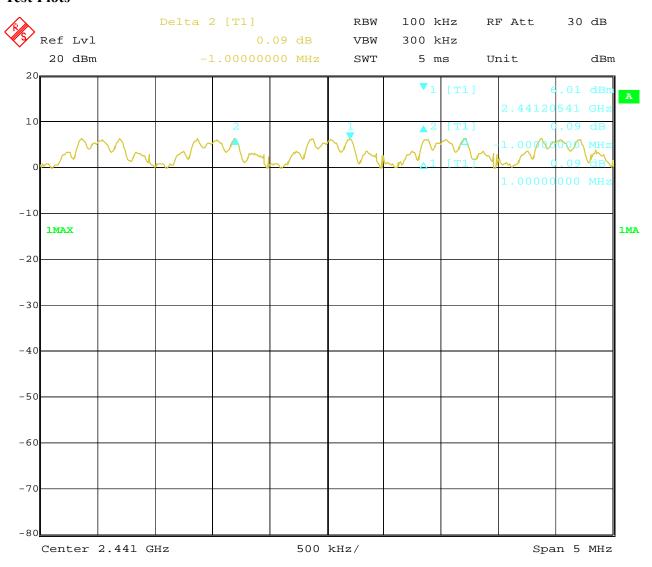

18.SEP.2019 10:37:47 Date:

Date: 2019-09-21



Page 42 of 79

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 43 of 79

Report No.: FCC1909104-02

Date: 2019-09-21




10.4Test Result

Type of Modulation: GFSK

EUT	Wireless Bluetooth Headset		Model	BKH600	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Frequency		Number of hopping channels		Limit	Pass/ Fail
2402-2480MHz		79		≥ 15	Pass

Test Plot

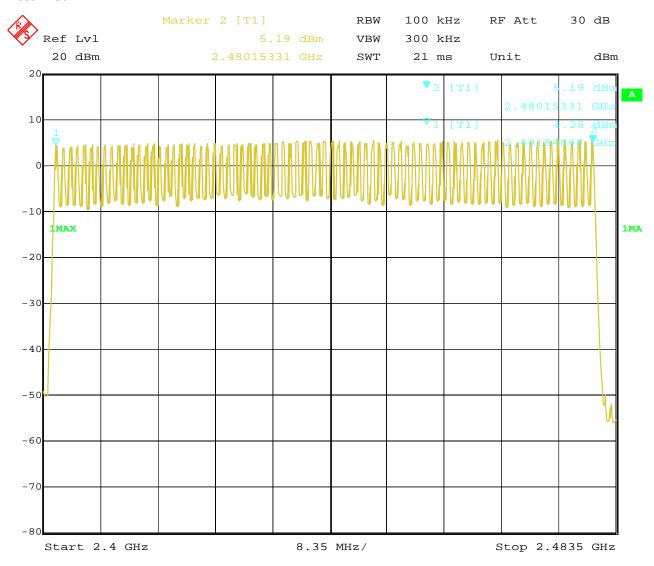

Date: 17.SEP.2019 15:05:35

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 44 of 79

Report No.: FCC1909104-02


Date: 2019-09-21



Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	Wireless Bluetooth Headset		Model	BKH600
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Operating Frequency		Number of hopping channels	Limit	t Pass/ Fail
2402-2480MHz		79	≥ 15	Pass

Test Plot

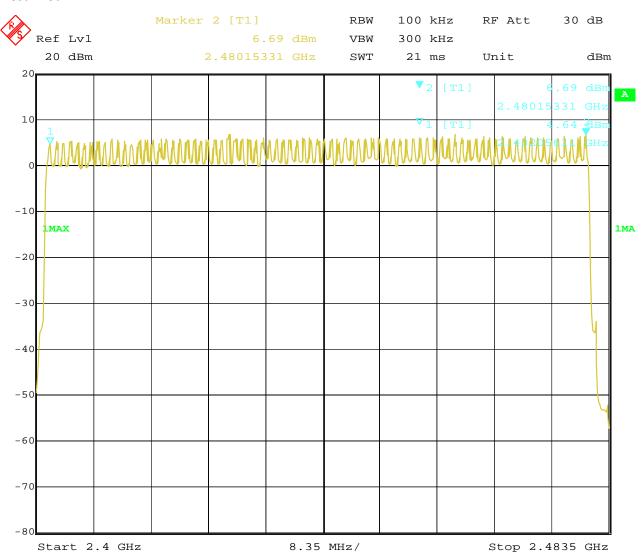

Date: 18.SEP.2019 11:13:27

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 45 of 79

Report No.: FCC1909104-02


Date: 2019-09-21



Type of Modulation: 8DPSK

EUT	Wireless Bluetooth Headset		M	odel		BKH600
Mode	Hopping On		Input	Voltage	DC3.7V	
Temperature	24 deg. C,		Humi	dity	56% RH	
Operating Frequency		Number of hopping channels		Liı	mit	Pass/ Fail
2402-2480MHz		79		≥ 15		Pass

Test Plot

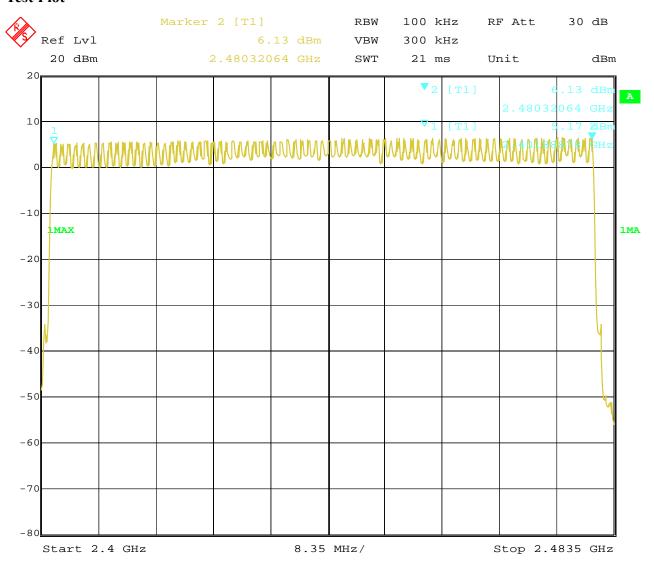

18.SEP.2019 11:07:21 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2019-09-21



Page 46 of 79

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Date: 2019-09-21



Page 47 of 79

11.4 Test Result

Type of Modulation: GFSK

EUT	Wireless Blu	Wireless Bluetooth Headset		BKH600			
Mode	Keep Ti	ansmitting Input Voltage		120V~			
Temperatur	e 24 o	leg. C,	Humidity	56% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	2.926ms	266.667 hop/s		0.312s	0.4s		

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 48 of 79


Report No.: FCC1909104-02

Date: 2019-09-21



Test Plots:

DH5

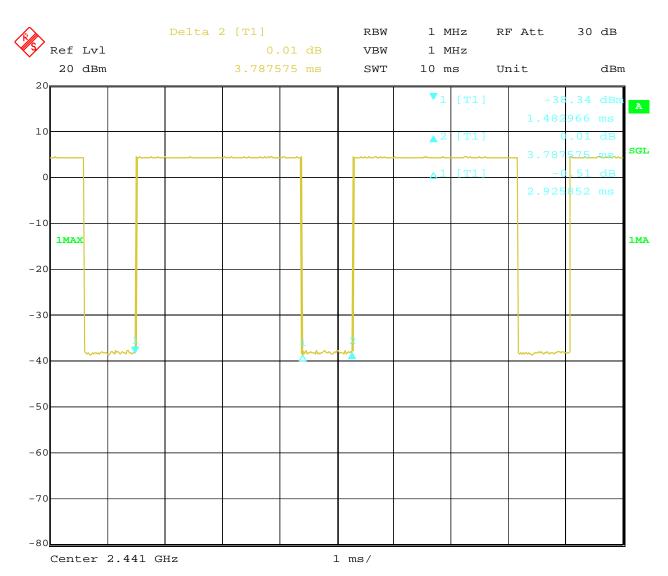

18.SEP.2019 14:33:46 Date:

Date: 2019-09-21



Page 49 of 79

Test Result

Type of Modulation: Л/4DQPSK

EUT	Wireless Blu	Wireless Bluetooth Headset		F	3KH600		
Mode	Keep Tr	Keep Transmitting Input Voltage		120V~			
Temperatur	re 24 c	leg. C,	Humidity		56% RH		
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	2.926ms	266.667 hop/s		0.312s	0.4s		

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 50 of 79


Report No.: FCC1909104-02

Date: 2019-09-21



Test Plots:

2DH5

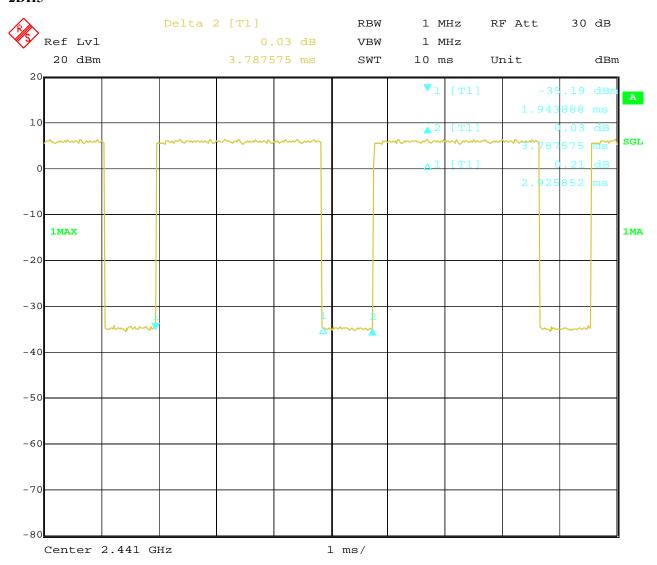

Date: 18.SEP.2019 14:31:29

Date: 2019-09-21



Page 51 of 79

Type of Modulation: 8DPSK

EUT	Wireless Blu	Wireless Bluetooth Headset		BKH600		
Mode	Keep Tr	Keep Transmitting Input Volt		120V~		
Temperature	e 24 d	eg. C,	Humidity		56% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit	
DH5						
Middle	2.946ms	266.667 hop/s		0.314s	0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 52 of 79


Report No.: FCC1909104-02

Date: 2019-09-21



Test Plots:

3DH5

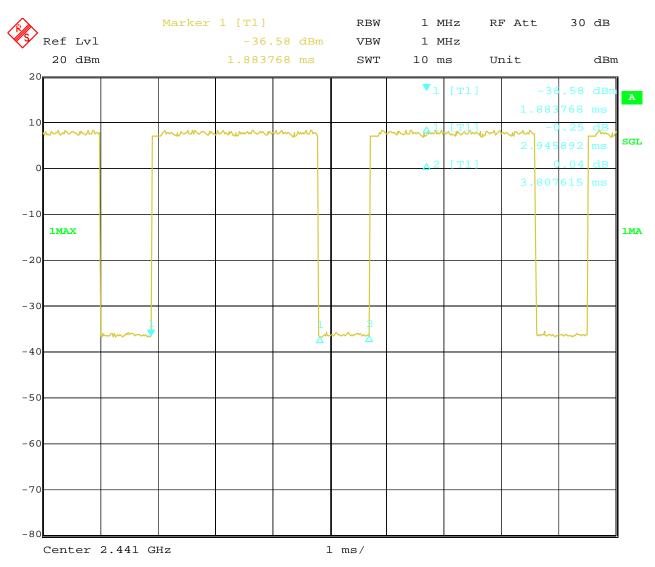

18.SEP.2019 14:30:41 Date:


Date: 2019-09-21



Page 53 of 79

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 54 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Wireless Bluetooth Headset	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage DC3.7V	
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

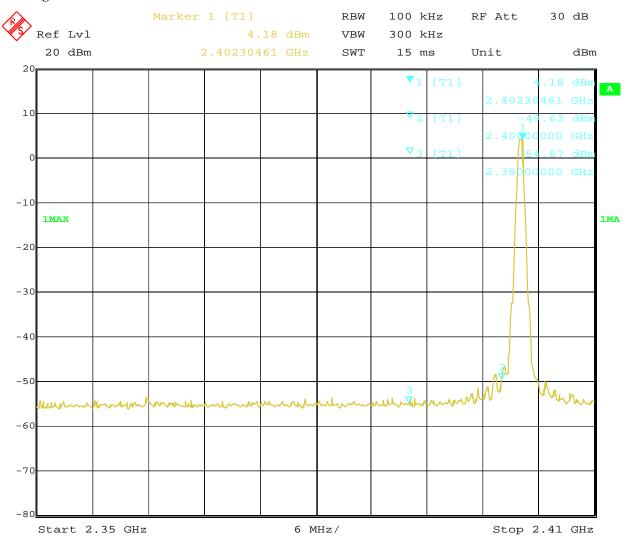

Date: 18.SEP.2019 13:53:20

Page 55 of 79

Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Wireless Bluetooth Headset	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

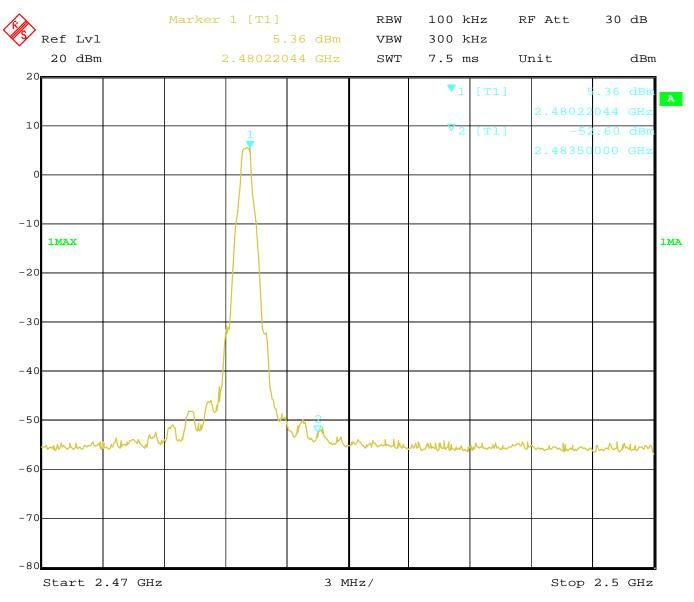

18.SEP.2019 13:55:02 Date:

Page 56 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: GFSK

Band Edge Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Hopping mode
Mode	Mode Hopping On Inp		DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

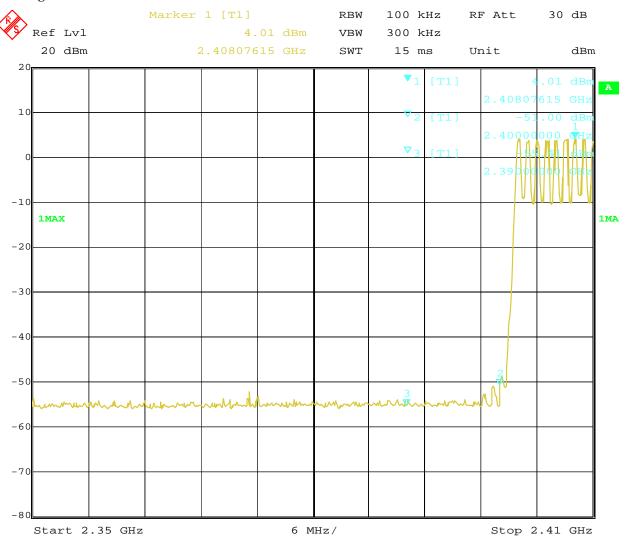

Date: 18.SEP.2019 13:28:14

Page 57 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: GFSK

Band Edge Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Hopping mode
Mode	Hopping On	Hopping On Input Voltage DC3	
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

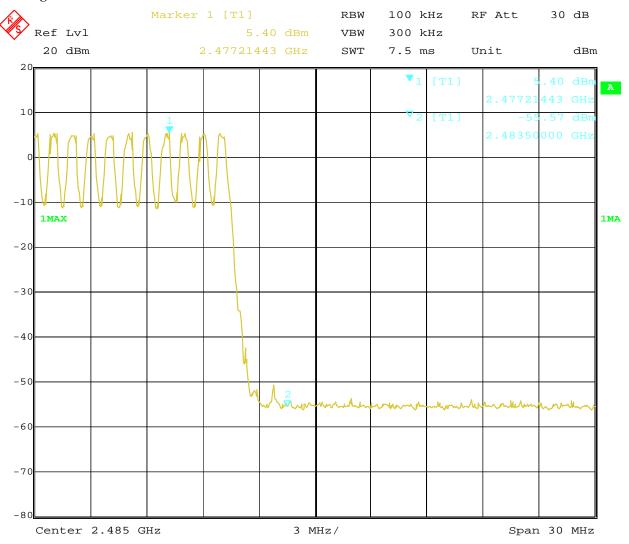

Date: 18.SEP.2019 13:23:18

Page 58 of 79

Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: Л/4DQPSK

12.4 Out of Band Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

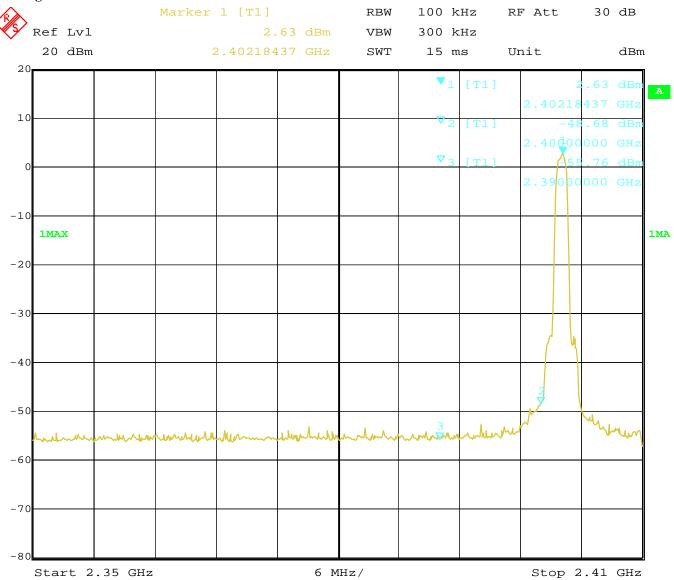

Date: 18.SEP.2019 13:49:33

Page 59 of 79

Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: Л/4DQPSK

Band Edge Test Result 12.4

Product:	Wireless Bluetooth Headset	Test Mode:	High Channel	
Mode	Keeping Transmitting Input Voltage		DC3.7V	
Temperature	24 deg. C,	Humidity	56% RH	
Test Result:	Pass	Detector	PK	

Test Figure:

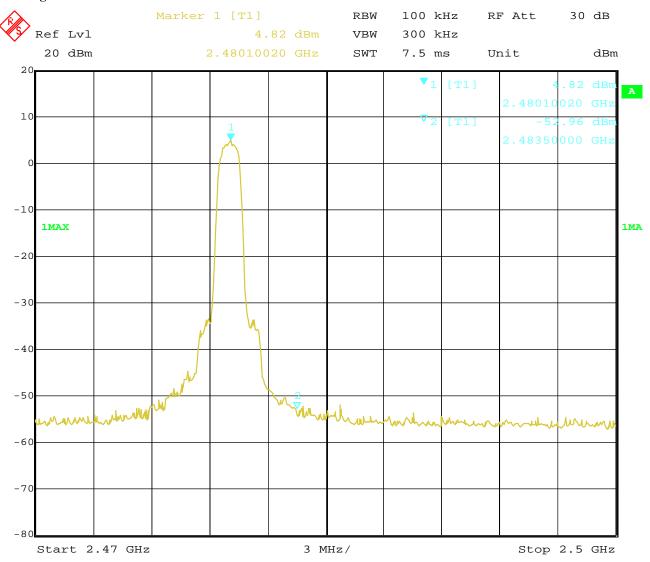

Date: 18.SEP.2019 13:55:48

Page 60 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

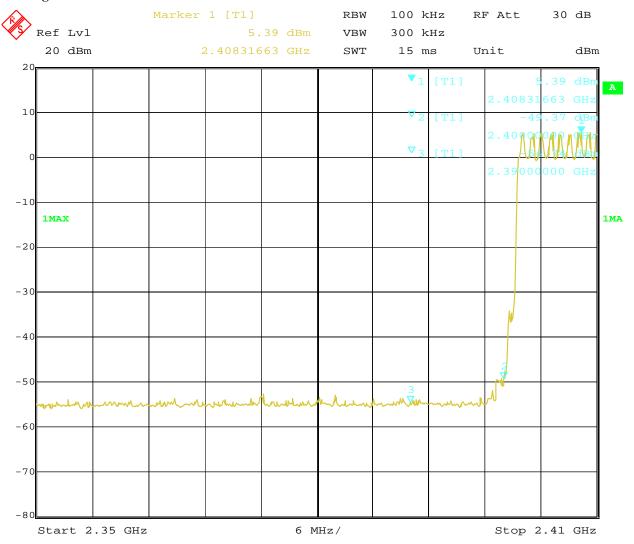

Date: 18.SEP.2019 13:35:53

Page 61 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: $\pi/4DQPSK$

Out of Band Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Hopping mode
Mode	Hopping On	Hopping On Input Voltage DC3.7V	
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

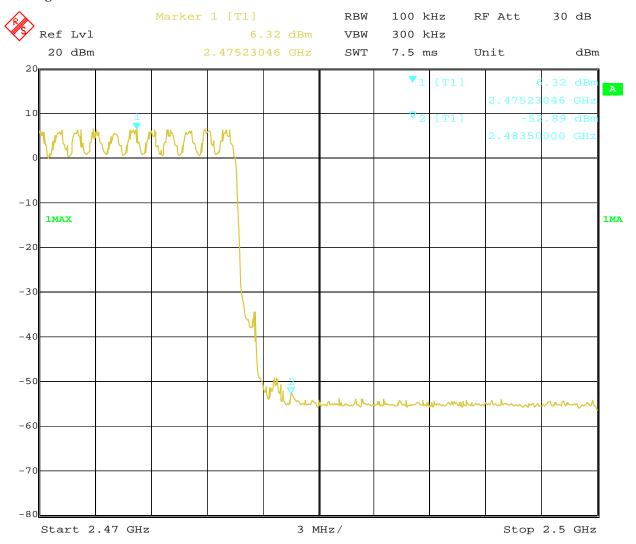

Date: 18.SEP.2019 11:24:27 Report No.: FCC1909104-02 Page 62 of 79

Date: 2019-09-21




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Low Channel	
Mode Keeping Transmitting I		Input Voltage	DC3.7V	
Temperature	24 deg. C	Humidity	56% RH	
Test Result:	Pass	Detector	PK	

Test Figure:

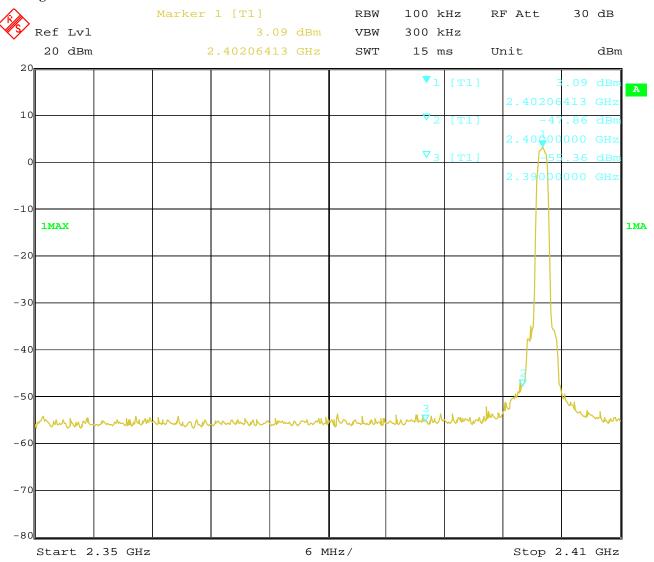

18.SEP.2019 Date: 13:47:37

Page 63 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	Wireless Bluetooth Headset	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

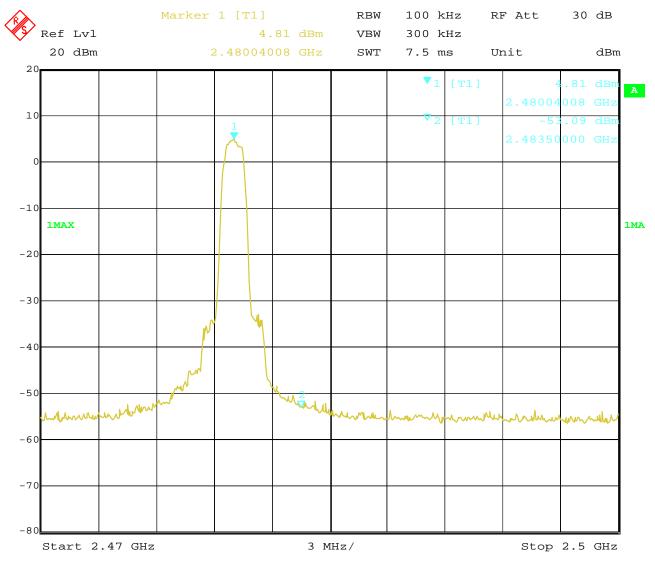

18.SEP.2019 Date: 13:57:24 Report No.: FCC1909104-02 Page 64 of 79

Date: 2019-09-21




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Hopping mode
Mode	Mode Hopping On Input		DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

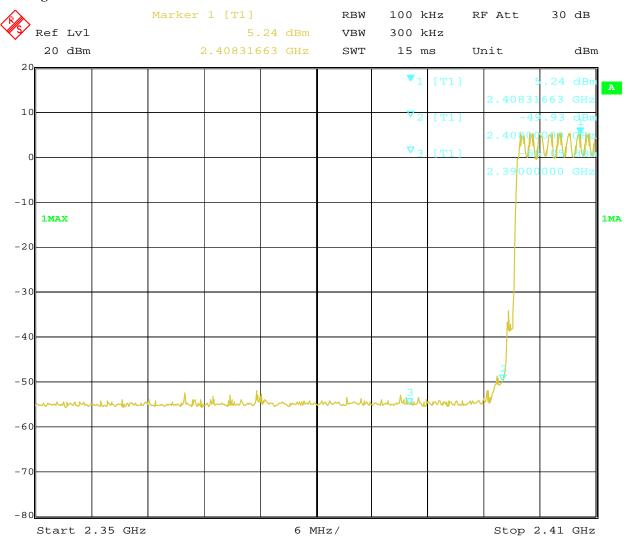

Date: 18.SEP.2019 13:44:46

Page 65 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Wireless Bluetooth Headset	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

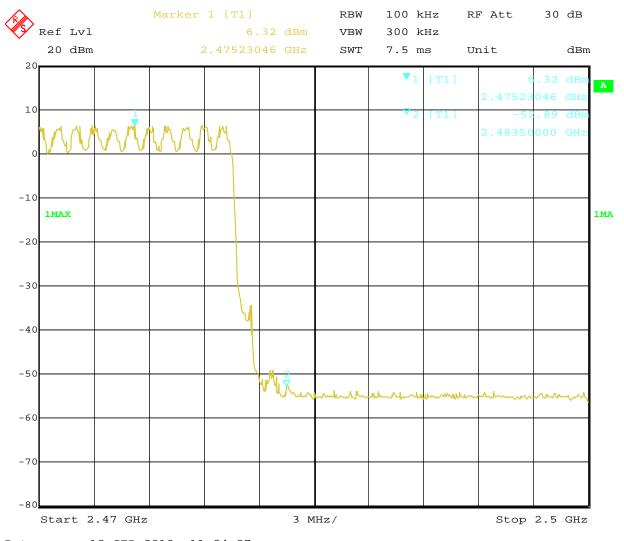

18.SEP.2019 11:24:27 Date:

Page 66 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



12.4 Restrict Band Measurement

EUT Mode		EUT	JT Wireless Bluetooth Headset			N	Model			BKH600		
		Mode Keep Transmitting		Inpu	t Voltage			DC3.7V	,			
7	Temperature Test Result:			24 deg. C,		Нυ	ımidity			56% RH		
,				Pass		Modul	lation Type	;		8DPSK		
		Class B 1GHz-18GHz	- 2									
1.	0E+2-									M1		
	90-									\wedge		
	90-									$/ \setminus$		
	80-											
(m)									M2			
	70-									-		
level (dBuV/m)	60-									$\overline{}$		
eve									$-$ / $^{\prime}$	/	\	
	50-						М	3				
	40-	The state of the s										
	٠,	المراولية المنافعة والمنافعة المالية	a e dia matana dia mpina dia dia kadi kadi kaya.	المساح فنافقة فأشارون أسارحة لللما	والمساولة المتعاربة والمتعاربة المتعاربة	المنازق ليستعر أجا لشاأأك	الأرابليسار فيرار				W	
	30-	(Allegaria para) [16] Saveta	Align Comment of the Angel Comment of the control of	(p. gi Prilitipese et desempele et tille blev pelpede gibben.	entifugate in thing in highly and or here	The State of the S	TOTAL OF SMITHTING .					
	235	50				Frequency (MHz)					2410	
No	,	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict	
. • •	··	(MHz)	(dBuV/m)	, dotor (db)	(dBuV/m)	(dB)	Botootoi	(0)	(cm)	/ (11)	Volunt	
3		2390	43.30	-3.53	54.0	-10.70	Peak	222.00	100	Н	Pass	

Page 67 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



12.4 Restrict Band Measurement

		EUT	Wirele	ess Bluet	ooth Heads	et	Model		·	BKH600	
	N	Mode	K	eep Tran	smitting	In	put Voltage		DC3.7V		
Temperature		perature		24 deg	g. C,]	Humidity			56% RH	
	Test Result:			Pas	SS	Mod	lulation Ty	pe		8DPSK	
		Class B 1GHz-18GH:	z - 2			•					
1.	.0E+2-										
	90-									M1	
										\wedge	
	80-									+	
level (dBuV/m)	70									/ \	
	70-									M2	
	60-										
level (c										\	
	50-							M3	Hale Johnson		
	40-	A STATE OF THE STA									
	40	A Physical Reservoir	والمراجع فيتراف المتأون أنسأ فيما والمتاوية	والمستوال والمستوالية	ki sahi pindi pina sahi lipina sa	الماسانيية الناأنة المستنانيان	أأفران فابتلان فاعدرنان	ľ			Marieda
	30-	The shiftern seems of statements	and the second of the second balanch to a	The state of the s	of the Conditional Inflamination on commen	and only and an included an included	At a total and institute of				
	23	50				Frequency (N	MHz)				2410 ‡
_											
No	o .	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		, ,	(cm)		
3		2390	43.01	-3.53	54.0	-10.99	Peak	176.00	100	V	Pass

Page 68 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



12.4 Restrict Band Measurement

EUT		Wireless Bluetooth Headset			et	Model			BKH600		
Mode		K	Keep Transmitting			Input Volt	tage	DC3.7V			
Temperature			24 deg. C,			Humidity			56% RH		
Te	st Result:		Pass			Modulation Type			8DPSK		
CE_FCC Par 1.0E+2	t 15B Class B 1GHz-18	GHz - 2						•			
90 90 90 90 90 90 90 90 90 90 90 90 90 9					A STATE OF THE PARTY OF THE PAR	And the state of t		م ما دينان			
30)-						القدورة ومراجع والمراجع المراجع المراجع المراجع	if have a the plaint a standard to grade a stay to grade	antenia I	n (progress and an angular for a country to long ()	
20) <u> </u> 2470				2483.5 Frequency (N	ИНz)				 2500 #	
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
INO.	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)			
140.	(1		†			100		+	

Page 69 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



Restrict Band Measurement 12.4

EUT		Wireless Bluetooth Headset			Model			BKH600		
Mode		Keep Transmitting			Input Voltage			DC3.7V		
Temperature		24 deg. C,			Humidity			56% RH		
Tes	st Result:	Pass			Modulation Type			8DPSK		
1.0E+2 90 80 70 (W/Annap) 10 50 40 30		GHz - 2		24	33.5 Frequency (MHz)		in history when the best state of the state		sypone shi fin add in discount	2500
	Frequency	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
No.	(MHz)					1	\-/	\/	1	

Note: 1. For Restricted band test, only the worst case was reported.

2. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2019-09-21



Page 70 of 79

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The gain of the antennas is -1.65dBi.

Page 71 of 79 Report No.: FCC1909104-02

Date: 2019-09-21




14.0 FCC ID Label

FCC ID: RBD-BKH600

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

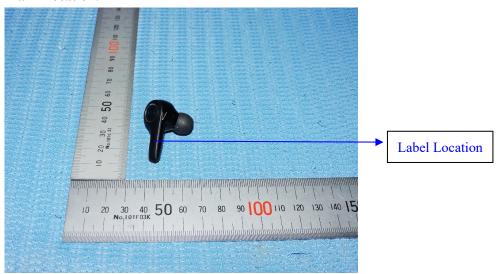


Page 72 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



15.0 **Photo of testing**

Conducted Emission Test Setup:

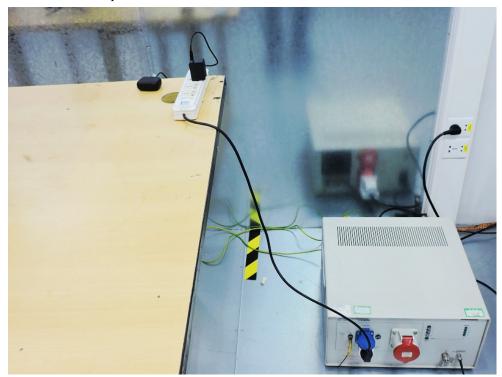


Page 73 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



Radiated Emission Test Setup:

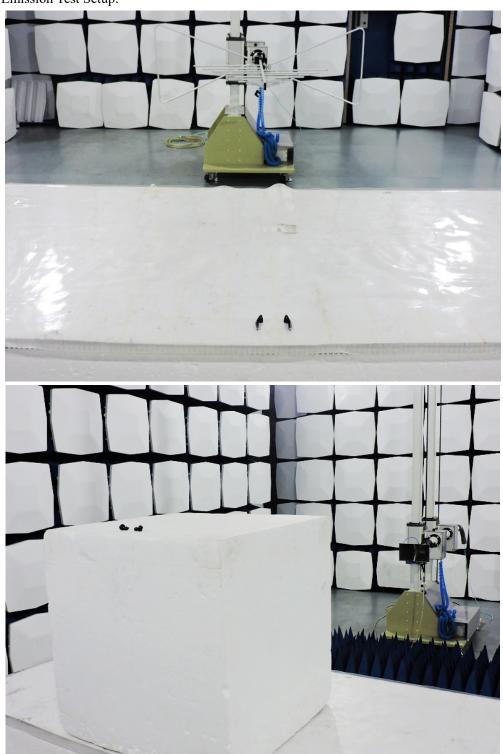

Date: 2019-09-21



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 75 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



Outside view



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 76 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



Outside view



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 77 of 79 Report No.: FCC1909104-02

Date: 2019-09-21



Outside view



Page 78 of 79

Report No.: FCC1909104-02

Date: 2019-09-21



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 79 of 79


Report No.: FCC1909104-02

Date: 2019-09-21



Inside view

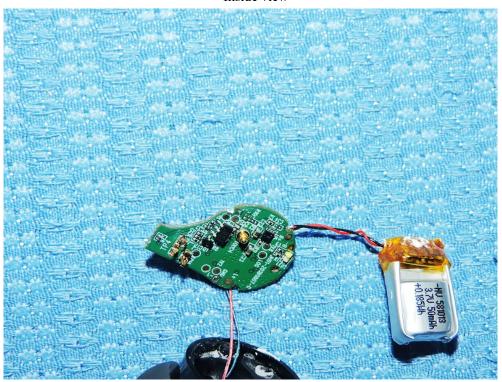

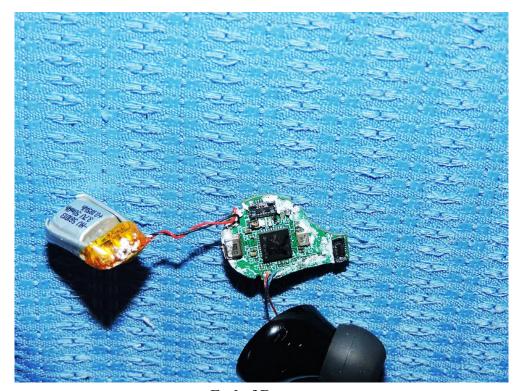

-- End of Report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.