







ISO/IEC17025Accredited Lab.

Report No: FCC 1309014 File reference No: 2013-09-06

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No: M7021, V7, PMID722, EM710, ST7

Trademark: Emerson, Polaroid

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4 and FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Sep 06, 2013

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1309014 Page 2 of 99

Date: 2013-09-06



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 99

Report No: 1309014 Date: 2013-09-06



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	9
3.1	Summary of Test Results	9
3.2	Test Standards.	9
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	10
5.1	Schematics of the Test.	10
5.2	Test Method and Test Procedure.	10
5.3	Configuration of the EUT	10
5.4	EUT Operating Condition.	11
5.5	Conducted Emission Limit.	11
5.6	Test Result.	11
6.0	Radiated Emission test.	14
5.1	Test Method and Test Procedure.	14
5.2	Configuration of the EUT	14
5.3	EUT Operation Condition.	14
5.4	Radiated Emission Limit.	15
7.0	6dB Bandwidth Measurement	38
8.0	Maximum Peak Output Power	57
9.0	Power Spectral Density Measurement.	60
10.0	Out of Band Measurement	78
11.0	Antenna Requirement	89
12.0	FCC ID Label	90
13.0	Photo of Test Setup and EUT View	91

Date: 2013-09-06



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China

Telephone: 0755-83976295 Fax: 0755-83204874

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District,

Shenzhen, China

Brand Name: Emerson, Polaroid

Model Number: M7021

Additional Model Number: V7, PMID722, EM710, ST7

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20/HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz;

IEEE 802.11n HT40: 2422MHz-2452MHz

Channel Spacing IEEE 802.11b/g/n (HT20/40) : 5MHz
Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps IEEE 802.11n HT40: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps

Frequency Selection By software

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1309014 Page 5 of 99
Date: 2013-09-06



Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

IEEE 802.11n HT40: 7 Channels

Antenna: Integral Antenna with maximum gain 1.0 dBi

Power Supply: Model No.: FJ-SW0502000DU

Input: 100-240V~50/60Hz, 0.35A Max; Output: 5V, 2000mA

Rated input Voltage Input: DC5V, with Li-ion Battery 3.7V, 2500mAh

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2013-09-02 to 2013-09-05

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 99

Report No: 1309014 Date: 2013-09-06



2.0	.0 Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22		
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22		
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22		
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24		
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22		
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23		
System Controller	CT	SC100	-				
Printer	EPSON	РНОТО ЕХЗ	CFNH234850				
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-		
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22		
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22		
3m OATS			N/A	2013-08-22	2014-08-21		
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23		
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23		
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23		
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-24	2014-08-23		
LISN	AFJ	LS16C	10010947251	2013-08-24	2014-08-23		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22		
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21		
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22		
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22		

Report No: 1309014 Page 7 of 99



2.1 **Auxiliary Equipment**

Date: 2013-09-06

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
Name	Model No.	Sellai No.	Manufacturei	Cable	FCC ID/DOC
TF Card			Kingston	1	
Earphone					

Report No: 1309014 Page 8 of 99

Date: 2013-09-06



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 65Mbps data rate (worst case) were chosen for full testing

IEEE 802.11n HT40

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Mid	2437
High	2452

IEEE 802.11n HT40 mode: 65Mbps data rate (worst case) was chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Report No: 1309014 Date: 2013-09-06



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 10 of 99

Report No: 1309014 Date: 2013-09-06



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

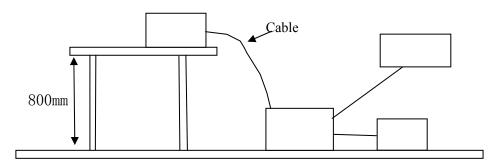

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Tablet PC	Shenzhen Jingwah Information Technology Co., Ltd.	M7021	RBD-M7021

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

Page 11 of 99 Report No: 1309014

Date: 2013-09-06

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.4 -2003.

- Α Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207.

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1309014 Page 12 of 99

Date: 2013-09-06



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

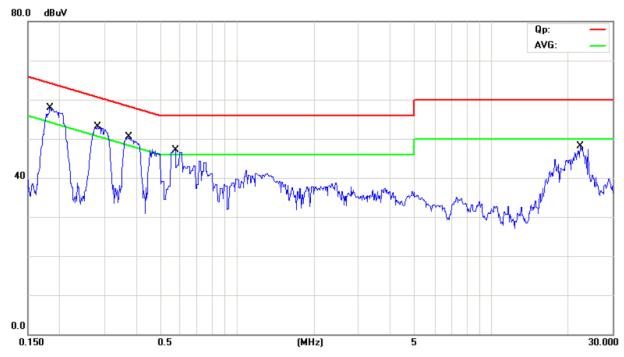

Frequency	Lina	Line Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.181	Live	54.83	33.03	64.42	54.42
0.279	Live	48.14	27.44	60.82	50.82
0.374	Live	44.64	23.24	58.41	48.41
0.577	Live	37.75	19.45	56.00	46.00
22.268	Live	39.64	26.64	60.00	50.00

Report No: 1309014 Page 13 of 99

Date: 2013-09-06



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

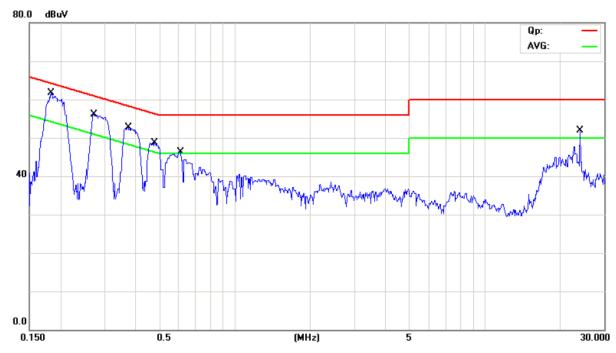

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.182	Neutral	58.13	39.23	64.37	54.37
0.272	Neutral	49.33	30.03	61.06	51.06
0.368	Neutral	46.83	25.43	58.53	48.53
0.471	Neutral	42.44	23.94	56.49	46.49
0.606	Neutral	36.48	19.98	56.00	46.00
24.000	Neutral	50.44	48.74	60.00	50.00

Date: 2013-09-06



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1309014

Date: 2013-09-06



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 15 of 99

Frequencies in restricted band are complied to limit on Paragraph 15.209

	<u> </u>	8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1309014 Page 16 of 99

Date: 2013-09-06



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Charging and Keep transmitting

Results: Pass


Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
142.200	38.67	Н	43.50
198.000	39.21	Н	43.50
220.240	40.78	Н	46.00
384.000	42.07	Н	46.00
165.000	38.95	V	43.50
198.000	38.18	V	43.50
30.000	38.67	V	40.00
480.040	38.48	V	46.00

Page 17 of 99

Report No: 1309014 Date: 2013-09-06



Test Figure:

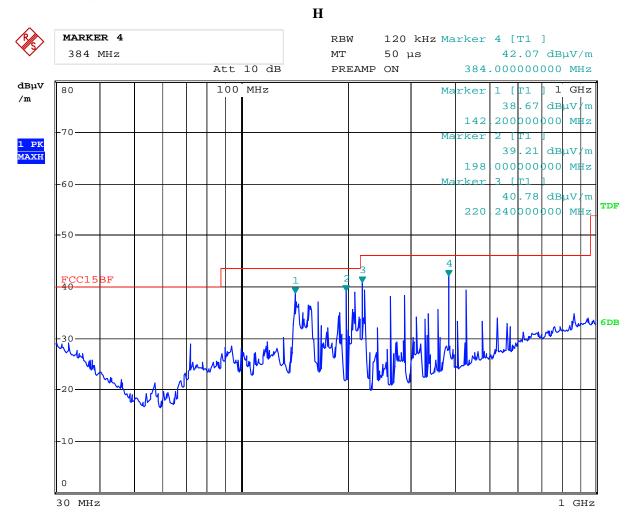


Date: 3.SEP.2013 17:54:40

Page 18 of 99

Report No: 1309014 Date: 2013-09-06



Test Figure:

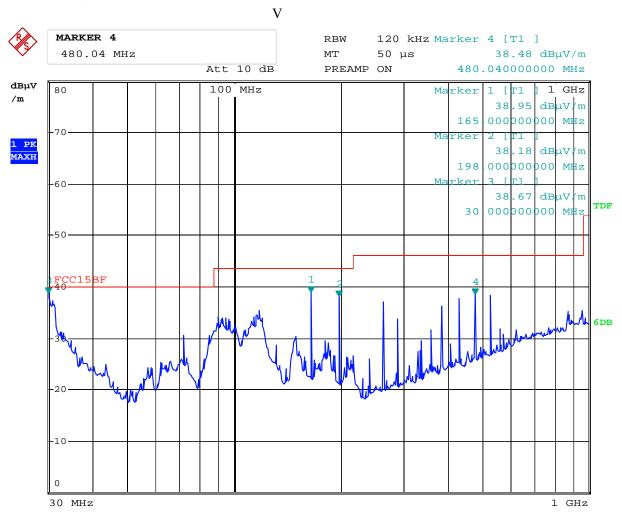

Date: 3.SEP.2013 17:52:37

Report No: 1309014 Page 19 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	92.89 (PK)	Н	Fundamental Frequency
2412.00	92.66 (PK)	V	Fundamental Frequency
4824.00	46.72 (PK)	Н	74(Peak)/ 54(AV)
4824.00	47.11 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Report No: 1309014 Page 20 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	93.10 (PK)	Н	Г 1
2437.00	93.44 (PK)	V	Fundamental Frequency
4874.00	44.92 (PK)	Н	74(Peak)/ 54(AV)
4874.00	47.93 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	1	H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \) V/m)
2462.00	92.43 (PK)	Н	Fundamental Frequency
2462.00	93.17 (PK)	V	Fundamental Frequency
4924	48.70 (PK)	Н	74(Peak)/ 54(AV)
4924	49.63 (PK)	V	74(Peak)/ 54(AV)
7368	1	H/V	74(Peak)/ 54(AV)
9848	1	H/V	74(Peak)/ 54(AV)
12310	-	H/V	74(Peak)/ 54(AV)
14772	1	H/V	74(Peak)/ 54(AV)
17234	1	H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309014 Date: 2013-09-06




Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

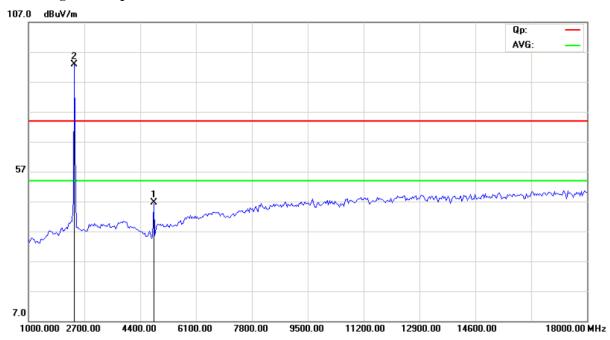

CH01 for 11g at 54Mbps: Vertical

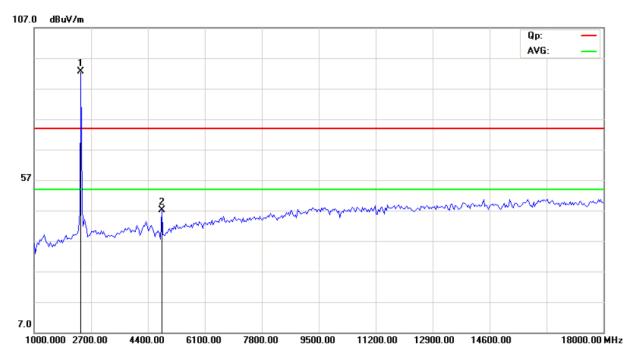


The report refers only to the sample tested and does not apply to the bulk.

Page 22 of 99


Report No: 1309014 Date: 2013-09-06



CH06 for 11g at 54Mbps: Vertical

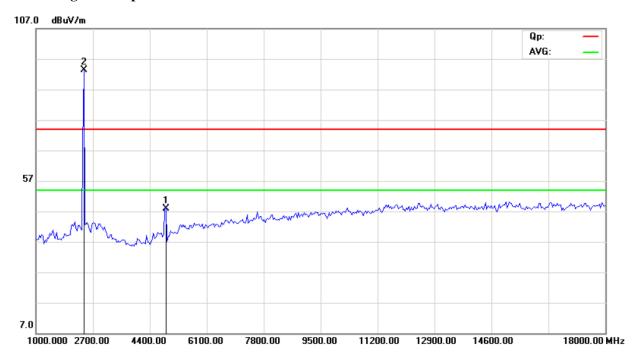

CH06 for 11g at 54Mbps: Horizontal

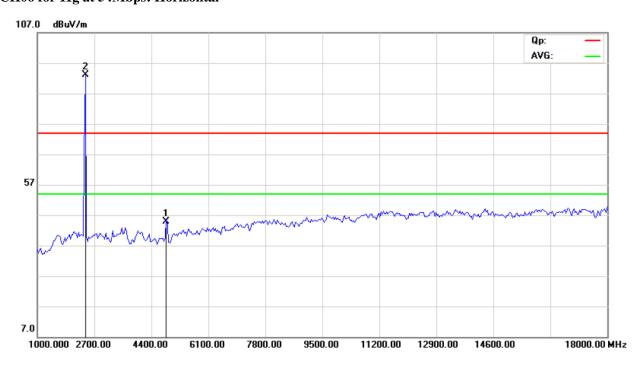


The report refers only to the sample tested and does not apply to the bulk.

Page 23 of 99


Report No: 1309014 Date: 2013-09-06



CH11 for 11g at 54Mbps: Vertical

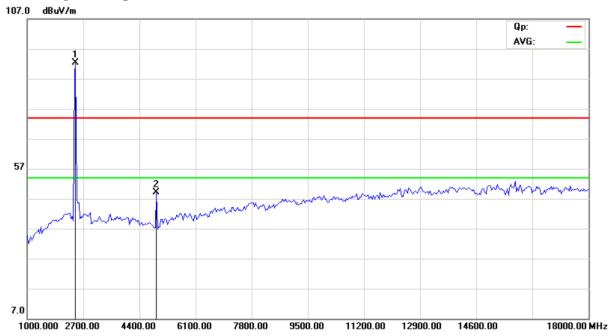

CH11 for 11g at 54Mbps: Horizontal

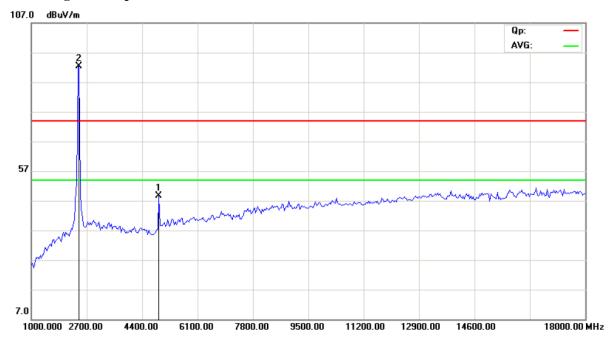

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Report No: 1309014 Page 24 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	92.26 (PK)	V	Fundamental Frequency
2412.00	92.76 (PK)	Н	Fundamental Frequency
4824.00	45.82 (PK)	Н	74(Peak)/ 54(AV)
4824.00	47.59 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2437.00	93.13 (PK)	Н	Fundamental Frequency
2437.00	93.15 (PK)	V	Fundamental Frequency
4874.00	48.55 (PK)	Н	74(Peak)/ 54(AV)
4874.00	49.50 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185	-	H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1309014 Page 25 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH11 for 11b at 11Mbps

	<u> </u>		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2462.00	92.88 (PK)	Н	Even domental Engavenery
2462.00	93.17 (PK)	V	Fundamental Frequency
4924	48.79 (PK)	Н	74(Peak)/ 54(AV)
4924	49.63 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Report No: 1309014 Date: 2013-09-06




Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

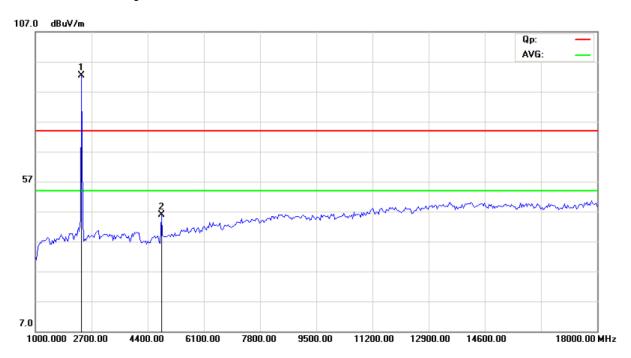

CH01 for 11b at 11Mbps: Vertical

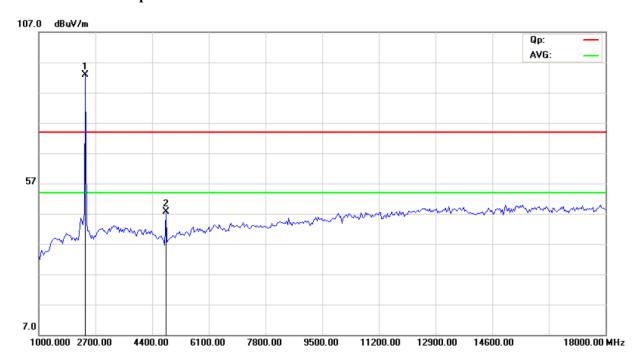


The report refers only to the sample tested and does not apply to the bulk.

Page 27 of 99


Report No: 1309014 Date: 2013-09-06



CH06 for 11b at 11Mbps: Vertical

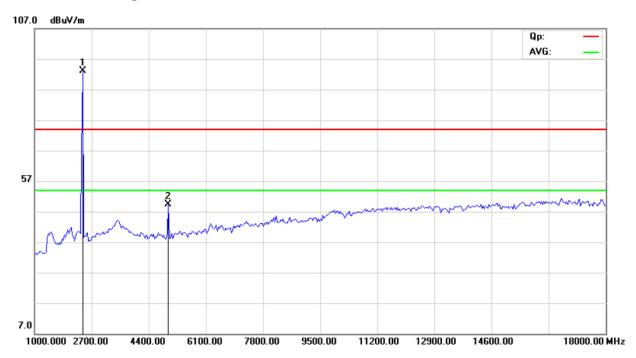

CH06 for 11b at 11Mbps: Horizontal

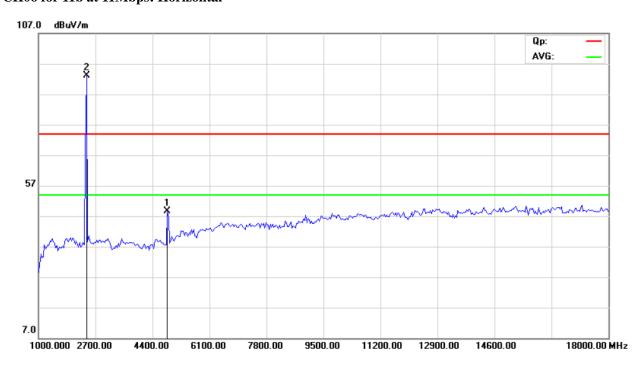


The report refers only to the sample tested and does not apply to the bulk.

Page 28 of 99


Report No: 1309014 Date: 2013-09-06



CH11 for 11b at 11Mbps: Vertical

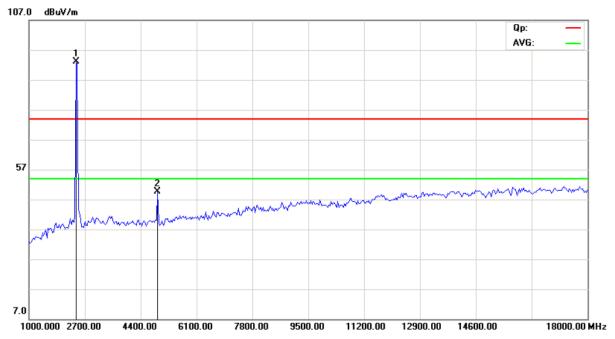

CH11 for 11b at 11Mbps: Horizontal

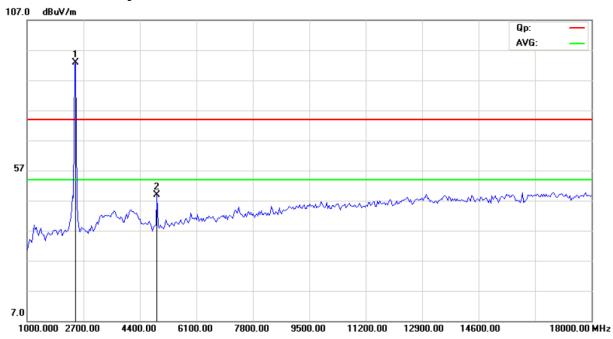

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Report No: 1309014 Page 29 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH01 for 11n HT20 at 65Mbps

			_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2412.00	92.36 (PK)	Н	E1
2412.00	92.42 (PK)	V	Fundamental Frequency
4824.00	47.85 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.59 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting under CH06 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	92.05 (PK)	Н	Fundamental Frequency
2437.00	92.01 (PK)	V	Fundamental Frequency
4874.00	46.14 (PK)	Н	74(Peak)/ 54(AV)
4874.00	46.38 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	1	H/V	74(Peak)/ 54(AV)
19496	-	H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309014 Page 30 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH11 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2462.00	93.13 (PK)	Н	Eundomontal Eroquanay
2462.00	93.31 (PK)	V	Fundamental Frequency
4924	46.69 (PK)	Н	74(Peak)/ 54(AV)
4924	48.14 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Report No: 1309014 Date: 2013-09-06




Please refer to the following test plots for details:

CH01 for 11n HT20 at 65Mbps: Horizontal

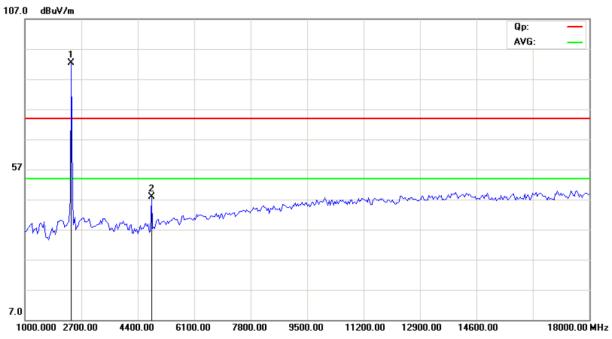

CH01 for 11n HT20 at 65Mbps: Vertical

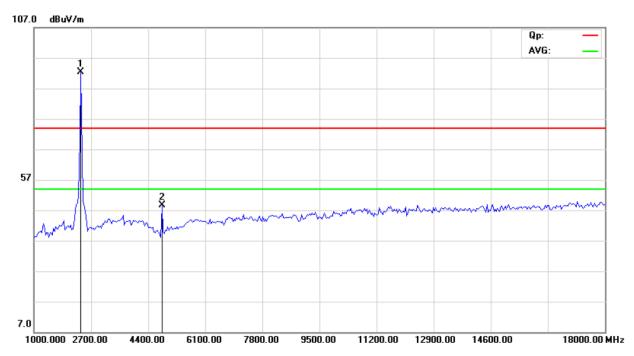


The report refers only to the sample tested and does not apply to the bulk.

Page 32 of 99


Report No: 1309014 Date: 2013-09-06



CH06 for 11n HT20 at 65Mbps: Vertical

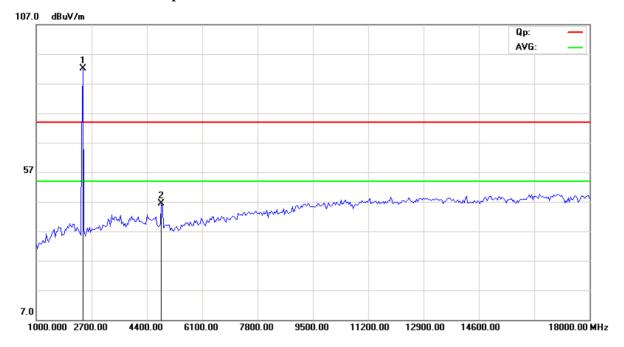


CH06 for 11n HT20 at 65Mbps: Horizontal

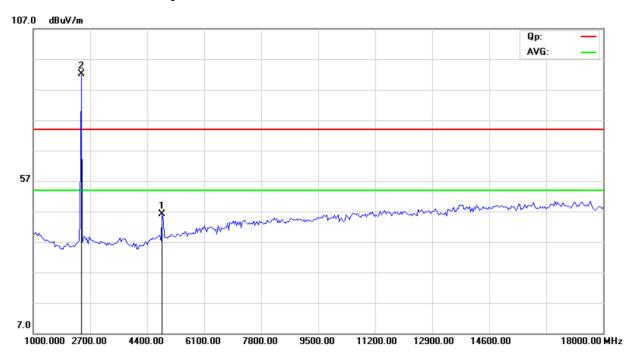


Report No: 1309014 Date: 2013-09-06



CH11 for 11n HT20 at 65Mbps: Vertical

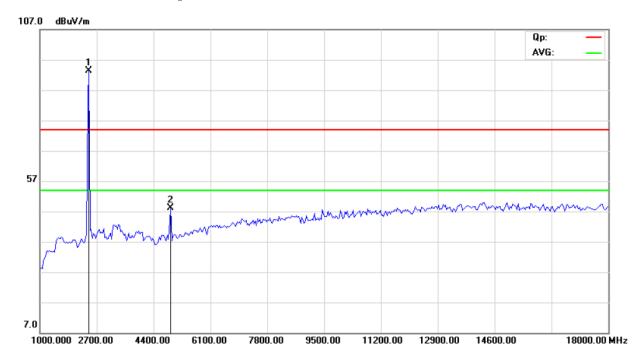

CH11 for 11n HT20 at 65Mbps: Horizontal

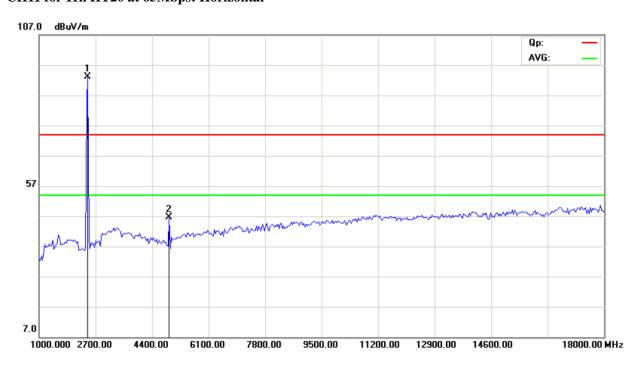

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309014 Page 34 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH01 for 11n HT40 at 65Mbps

			_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2422.00	91.01 (PK)	V	Even domental Engavenery
2422.00	91.44 (PK)	Н	Fundamental Frequency
4844.00	46.05 (PK)	V	74(Peak)/ 54(AV)
4844.00	48.27 (PK)	Н	74(Peak)/ 54(AV)
7266.00		H/V	74(Peak)/ 54(AV)
9688.00		H/V	74(Peak)/ 54(AV)
12110		H/V	74(Peak)/ 54(AV)
14532		H/V	74(Peak)/ 54(AV)
16954		H/V	74(Peak)/ 54(AV)
19376		H/V	74(Peak)/ 54(AV)
21798		H/V	74(Peak)/ 54(AV)
24220		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

Operation Mode: Transmitting under CH04 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \) V/m)
2437.00	92.22 (PK)	Н	Fundamental Frequency
2437.00	92.15 (PK)	V	
4874.00	46.09 (PK)	Н	74(Peak)/ 54(AV)
4874.00	45.53 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1309014 Page 35 of 99

Date: 2013-09-06



Operation Mode: Transmitting under CH7 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2452.00	91.10 (PK)	Н	Fundamental Frequency
2452.00	91.69 (PK)	V	
4904	47.23 (PK)	Н	74(Peak)/ 54(AV)
4904	48.08 (PK)	V	74(Peak)/ 54(AV)
7356		H/V	74(Peak)/ 54(AV)
9808		H/V	74(Peak)/ 54(AV)
12260		H/V	74(Peak)/ 54(AV)
14712		H/V	74(Peak)/ 54(AV)
17164		H/V	74(Peak)/ 54(AV)
19616		H/V	74(Peak)/ 54(AV)
22068		H/V	74(Peak)/ 54(AV)
24520		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

Report No: 1309014 Date: 2013-09-06




Please refer to the following test plots for details:

CH01 for 11n HT40 at 65Mbps: Vertical

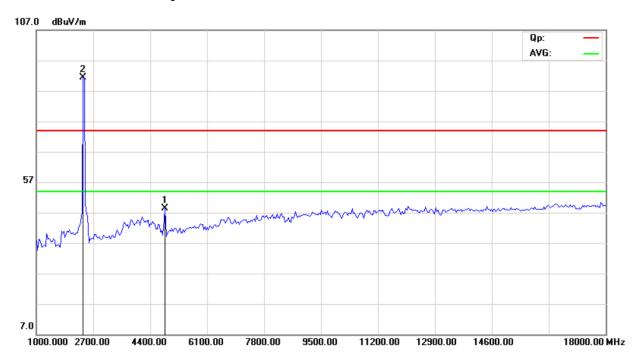

CH01 for 11n HT40 at 65Mbps: Horizontal

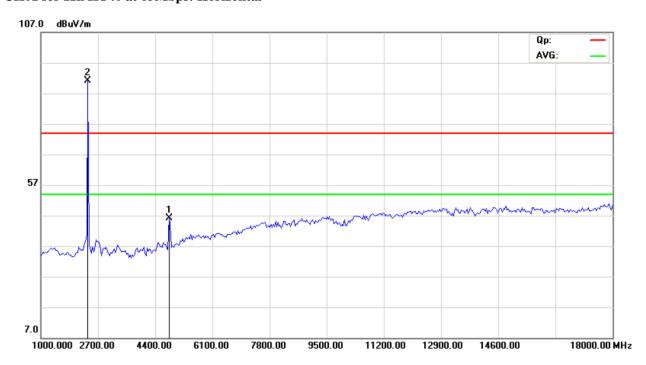

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1309014 Date: 2013-09-06



CH04 for 11n HT40 at 65Mbps: Vertical

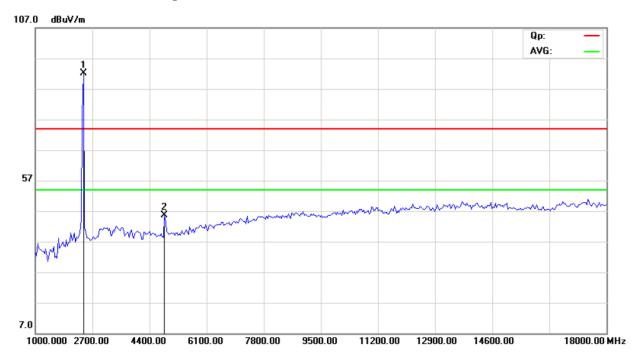

CH04 for 11n HT40 at 65Mbps: Horizontal

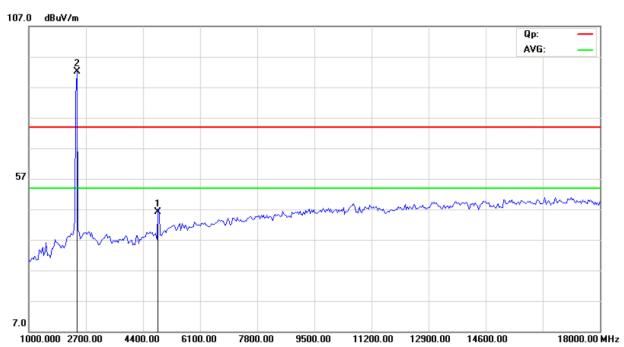

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1309014 Date: 2013-09-06



CH7 for 11n HT40 at 65Mbps: Vertical

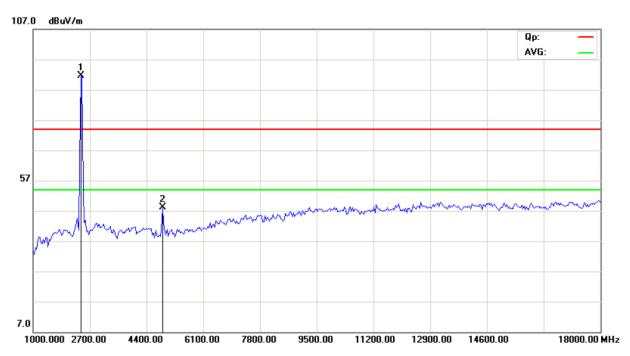

CH7 for 11n HT40 at 65Mbps: Horizontal

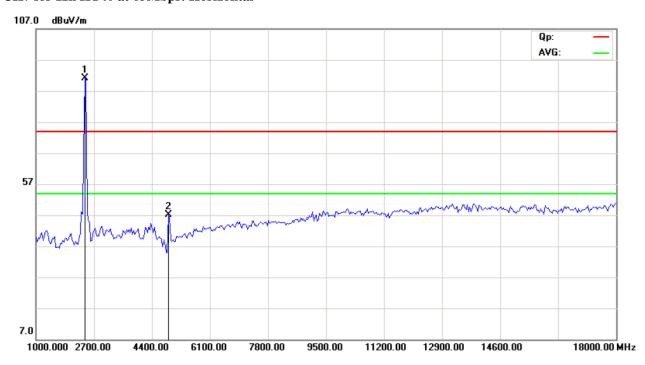

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1309014 Page 39 of 99

Date: 2013-09-06



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: 1309014 Page 40 of 99

Date: 2013-09-06




6dB Occupied Bandwidth

EUT		Tablet P	C	Model		M7021
Mode		802.111)	Input Voltage		AC 120V
Temperati	ure	24 deg.	C,	Humidity		56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	mum Limit MHz)	Pass/ Fail
1		2412	1	10.08	0.5	Pass
6		2437 1		10.08	0.5	Pass
11		2462	1	10.08	0.5	Pass
1		2412		8.64	0.5	Pass
6		2437		8.64	0.5	Pass
11		2462		8.64	0.5	Pass

Page 41 of 99 Report No: 1309014

Date: 2013-09-06

1. 802.11b at 1Mbps of CH01

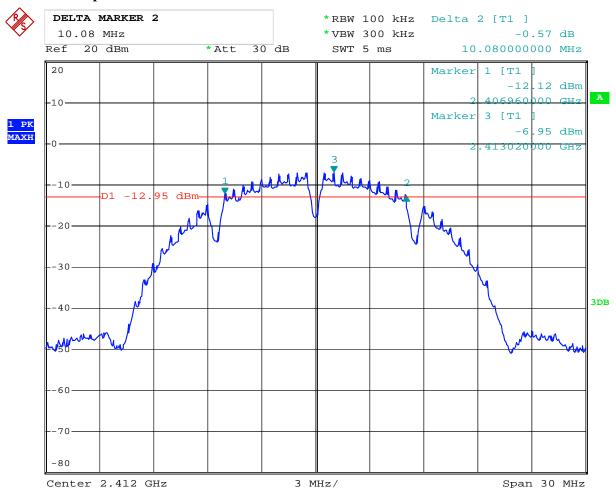


4.SEP.2013 15:25:15 Date:

Report No: 1309014 Page 42 of 99

Date: 2013-09-06



2. 802.11b at 1Mbps of CH06

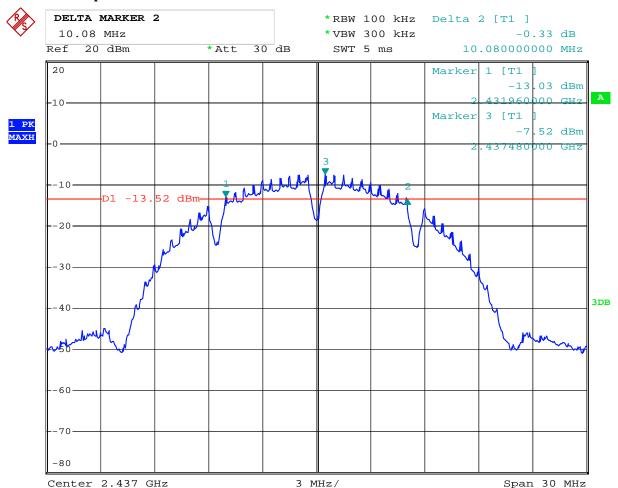


Date: 4.SEP.2013 15:27:36

Report No: 1309014 Page 43 of 99

Date: 2013-09-06



3. 802.11b at 1Mbps of CH11

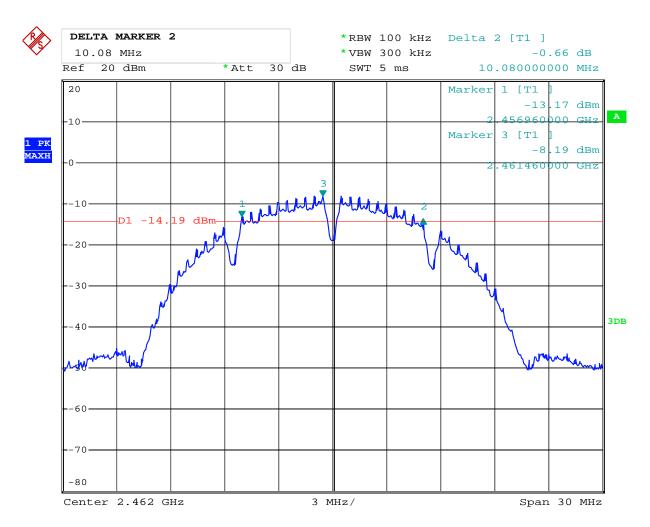


Date: 4.SEP.2013 15:29:12

Report No: 1309014 Page 44 of 99

Date: 2013-09-06



4. 802.11b at 11Mbps of CH01

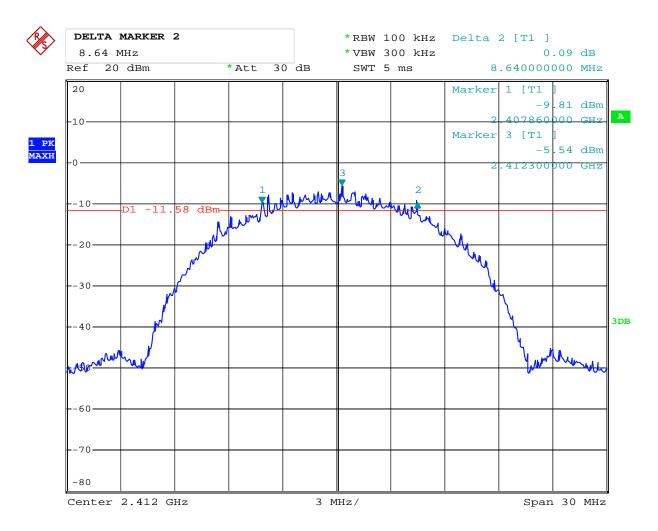


Date: 4.SEP.2013 15:34:01

Report No: 1309014 Page 45 of 99

Date: 2013-09-06



5. 802.11b at 11Mbps of CH06

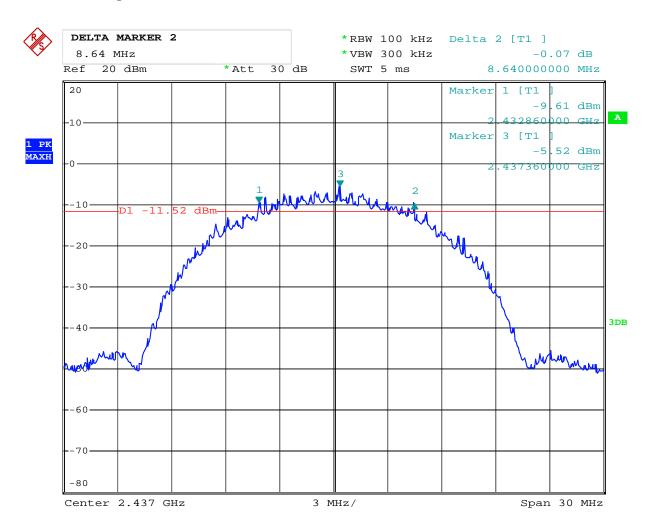


Date: 4.SEP.2013 15:35:27

Report No: 1309014 Page 46 of 99

Date: 2013-09-06



6. 802.11b at 11Mbps of CH11

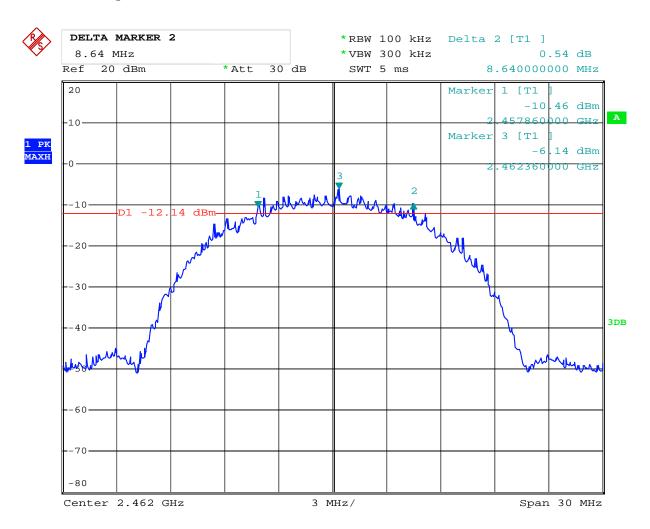

Date: 4.SEP.2013 15:37:08

Report No: 1309014 Page 47 of 99

Date: 2013-09-06



6dB Occupied Bandwidth

EUT		Tablet PC	Model		M7021		
Mode		802.11g	Input Voltage		AC 120V		
Temperat	ure	24 deg. C,	Humidity		56% R	Н	
Channel	Cl	hannel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidtl (MHz)	Minimum Limit (MHz)	Pass/ Fail	
1	2412		6	16.38	0.5	Pass	
6	2437		6	16.38	0.5	Pass	
11		2462	6	16.38	0.5	Pass	


Report No: 1309014 Page 48 of 99

Date: 2013-09-06



Test Plots:

1. 802.11g at 54Mbps **CH01**

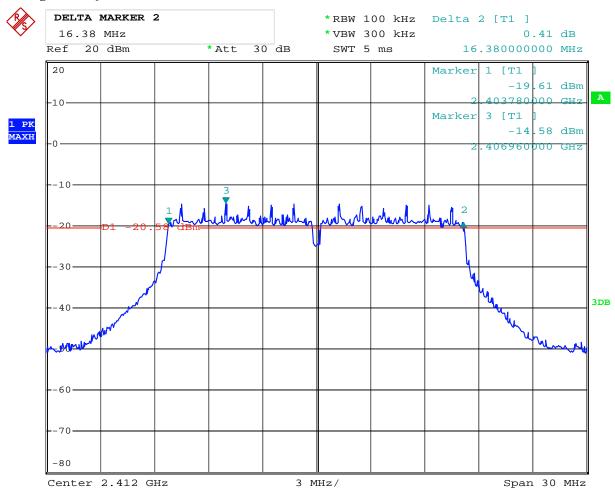


Date: 4.SEP.2013 15:33:07

Report No: 1309014 Page 49 of 99

Date: 2013-09-06



2. 802.11g at : 54Mbps CH06

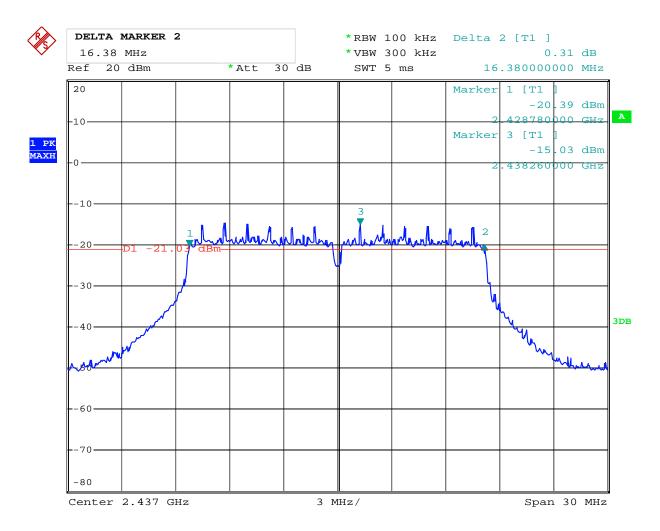


Date: 4.SEP.2013 15:31:46

Report No: 1309014 Page 50 of 99

Date: 2013-09-06



3. 802.11g at 54Mbps **CH11**

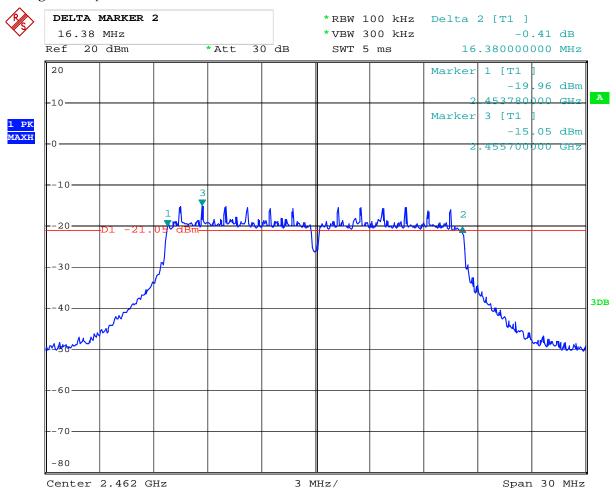

Date: 4.SEP.2013 15:30:27

Report No: 1309014 Page 51 of 99

Date: 2013-09-06



6dB Occupied Bandwidth

EUT			Tablet PC		Model			M7021
Mode			802.11n		Input Vol	tage		AC 120V
Temperat	ure		24 deg. C,		Humidity	•	56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		nndwidth Hz)			Pass/ Fail
1		2412	HT20 65Mbps	17	17.34 0.		0.5	Pass
6		2437	HT20 65Mbps 17.34		7.34	0.5		Pass
11		2462	HT20 65Mbps	17	7.34		0.5	Pass
1		2422	HT40 65Mbps	35	35.22		0.5	Pass
4		2437	HT40 65Mbps	35.20		0.5		Pass
7		2452	HT40 65Mbps	35.10		0.5		Pass


Report No: 1309014 Page 52 of 99

Date: 2013-09-06



Test Plots:

1. 802.11n at HT20 of CH01

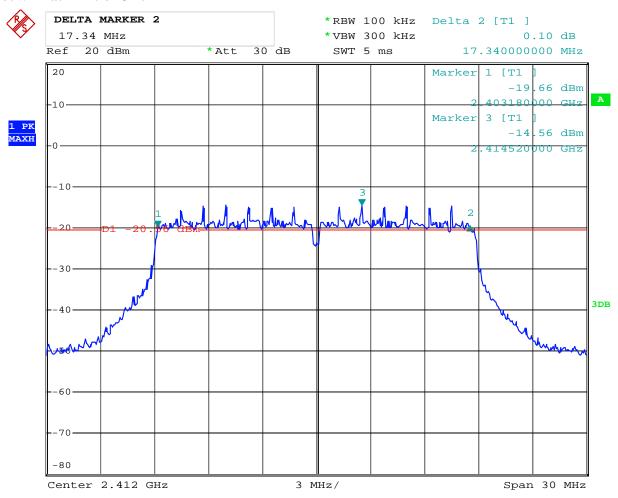


Date: 4.SEP.2013 15:40:25

Report No: 1309014 Page 53 of 99

Date: 2013-09-06



2. 802.11n at HT20 of CH06

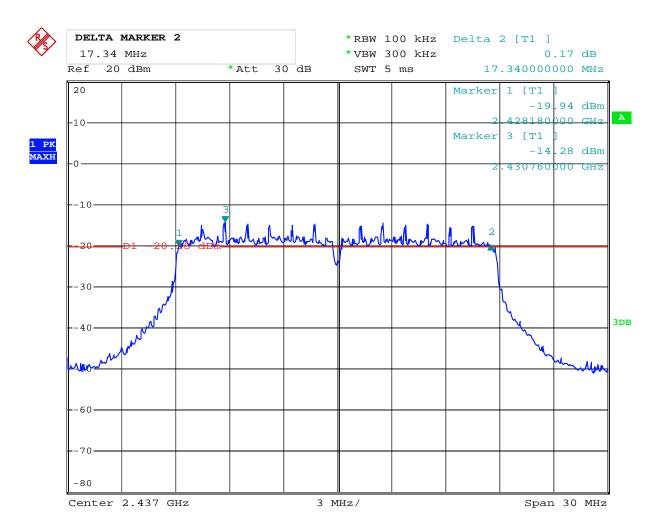


Date: 4.SEP.2013 15:39:14

Report No: 1309014 Page 54 of 99

Date: 2013-09-06



3. 802.11n at HT20 of CH11

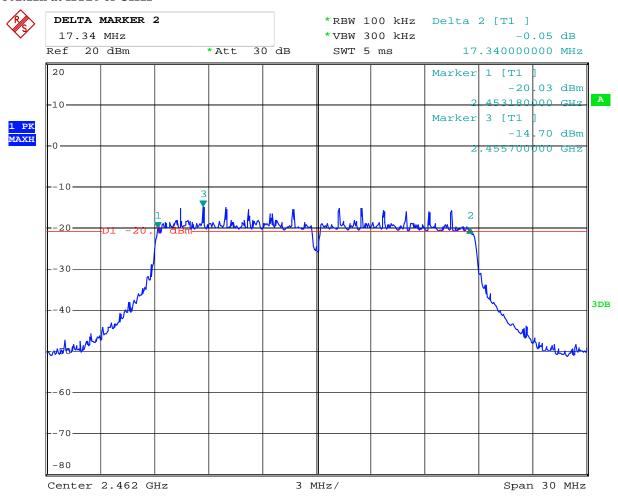


Date: 4.SEP.2013 15:37:59

Report No: 1309014 Page 55 of 99

Date: 2013-09-06



4. 802.11n at HT40 of CH01

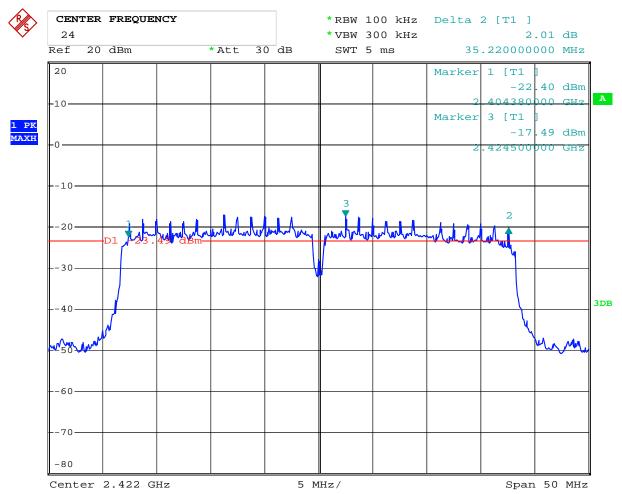


Date: 4.SEP.2013 15:42:29

Report No: 1309014 Page 56 of 99

Date: 2013-09-06



5. 802.11n at HT40 of CH04

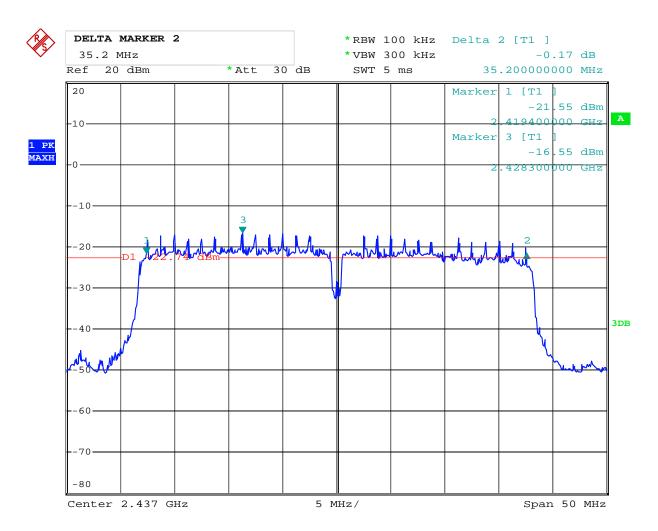


Date: 4.SEP.2013 15:43:48

Page 57 of 99 Report No: 1309014

Date: 2013-09-06

6. 802.11n at HT40 of CH07

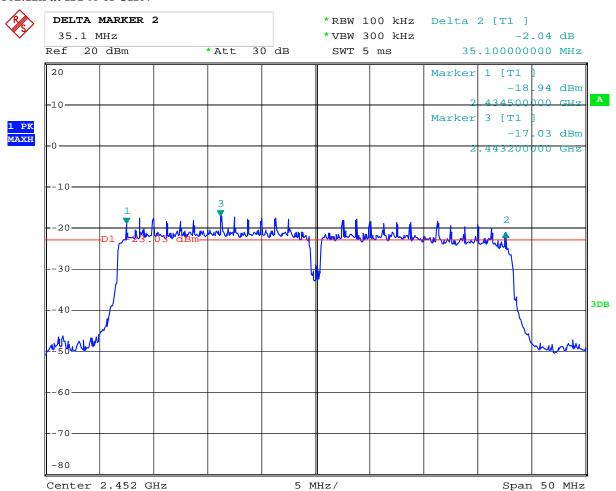


4.SEP.2013 15:45:06 Date:

Report No: 1309014 Page 58 of 99

Date: 2013-09-06

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Page 59 of 99

Report No: 1309014 Date: 2013-09-06



8.4Test Results

EUT		Tablet PC		Model		M7021		
Mode		802.11b		Input Voltage		AC 120V		
Temperat	ure	24 deg. C,		Humidity		4	56% RH	
Channel	Cha	• •		ower Output dBm)		eak Power Limit (dBm)	Pass/ Fail	
1		2412	2412			30	Pass	
6		2437		7.58		30	Pass	
11		2462		7.05		30	Pass	

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT		Tablet PC				M7021		
Mode		802.11g		Input Voltage			AC 120V	
Temperati	ure	24 deg. C,	g. C, Humidity 56% RH		Humidity 56% RH		56% RH	
Channel	Channel Frequency					Power Limit	Pass/ Fail	
		(MHz)		(dBm)	1	(dBm)		
1		2412		2412 5.04		30	Pass	
6	·	2437		5.10		30	Pass	
11		2462		4.46		30	Pass	

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

- The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The test voltage varied from AC102V-138V. The worse case was recorded

Report No: 1309014 Page 60 of 99

Date: 2013-09-06



EUT		Tablet PC		Model		M7021		
Mode		802.11n (HT20)		Input Voltage		AC 120V		
Temperati	ure	24 deg. C,		Humidity		56% RH		
Channel	Cha	Channel Frequency (MHz)		ak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail		
1		2412		5.25	30	Pass		
6		2437		4.69	30	Pass		
11		2462		4.45	30	Pass		

Note: 1. At finial test to get the worst-case emission at 65Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT		Tablet PC	1	Model		M7021
Mode	Mode 802.11n (HT40) Input Voltage		(0) Input Voltage		AC 120V	
Temperati	ure	24 deg. C	,	Humidity		56% RH
Channel	Cha	Channel Frequency (MHz)		Peak Power Output (dBm)		Pass/ Fail
1		2422	5.02		30	Pass
4		2437	5.28		30	Pass
7		2452		5.46	30	Pass

Note: 1. At finial test to get the worst-case emission at 65Mbps for CH01, CH04 and CH07

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded


Report No: 1309014 Page 61 of 99

Date: 2013-09-06



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = \max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No: 1309014 Page 62 of 99

Date: 2013-09-06



9.4Test Result

EUT	EUT Tablet PC		Model			M7021
Mode	Mode 802.11b 11Mbp		lbps	bps Input Voltage		AC 120V
Temperati	Temperature 24 deg. C,		,	Humidity		56% RH
Channel	Channel			RF Power rel (dBm)	Maximum Limit (dBm)	Pass/ Fail
				11Mbps		
1		2412		-15.20	8	Pass
6		2437 -		-17.16	8	Pass
11		2462	-	-17.07	8	Pass

EUT			Model			M7021	
Mode	Mode 802.11b 1Mbps		Input Voltage		AC 120V		
Tempera	ture 24 deg. C, Humidity				56% RH		
Channel	hannel Channel Frequency (MHz)		Final RF Power (dBm)	Final RF Power (dBm) Lin (dB		Pass/ Fail	
			1Mbps				
1		2412	-17.10	8		Pass	
6		2437	-16.80	8		Pass	
11		2462	-17.94	8		Pass	

Date: 2013-09-06



EUT		Tablet PC	Model	Model		M7021
Mode		802.11g 54Mbps	Input Voltage			AC 120V
Temperature	;	24 deg. C,	Humidity	Humidity		56% RH
Channel	Ch	annel Frequency (MHz)	Final RF Power (dBm)]	Maximum Limit (dBm)	Pass/ Fail
			54Mbps			
1		2412	-24.82		8	Pass
6		2437	-24.44		8	Pass
11		2462	-25.01		8	Pass

EUT		Tablet PC	Model			M7021	
Mode		802.11n HT20	Input Voltage	e	AC 120V		
		65Mbps					
Temperati	ure	24 deg. C,	Humidity		56% RH		
Channel	Cha	annel Frequency (MHz)	Final RF Power Level (dBm)	M	(dBm)	Pass/ Fail	
			HT20				
1		2412	-24.81		8	Pass	
6		2437	-24.13		8	Pass	
11		2462	-24.96		8	Pass	

EUT		Tablet PC	Model		M7021	
Mode		802.11n HT40 65Mbps	Input Voltage		AC 120V	
Temperati	ure	24 deg. C,	Humidity	56% RH		
Channel	Channel Frequency (MHz)		Final RF Power Level (dBm)	Maximum Limit (dBm)	Pass/ Fail	
			HT40			
1		2422	-26.74	8	Pass	
6		2437 -26.67		8	Pass	
11		2452	-26.49	8	Pass	


Report No: 1309014 Page 64 of 99

Date: 2013-09-06



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

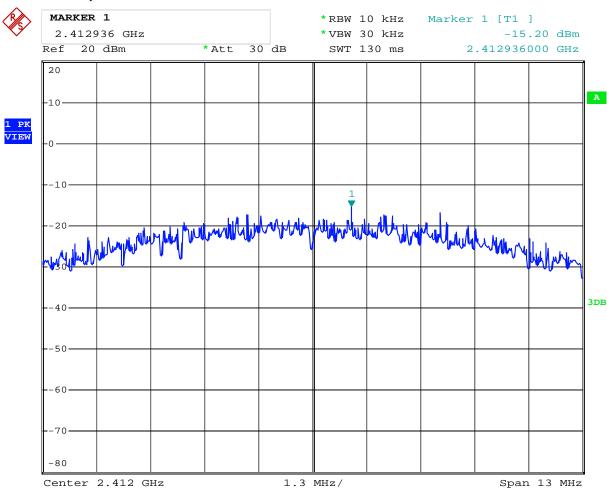


Date: 4.SEP.2013 15:57:06

Report No: 1309014 Page 65 of 99

Date: 2013-09-06



2. 802.11b at 11Mbps at CH06

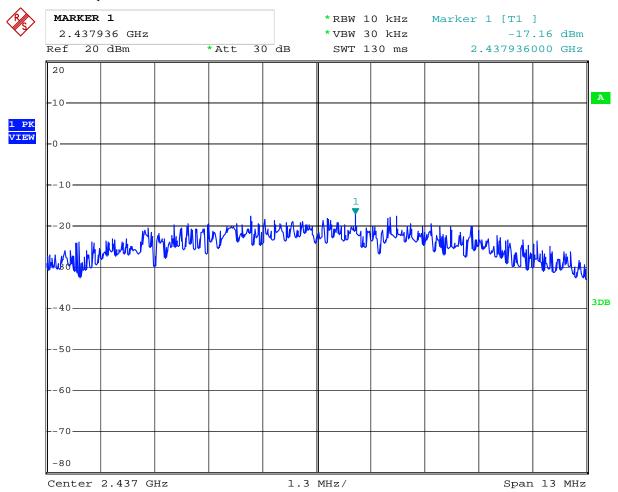


Date: 4.SEP.2013 15:56:04

Report No: 1309014 Page 66 of 99

Date: 2013-09-06



3. 802.11b at 11Mbps of CH11

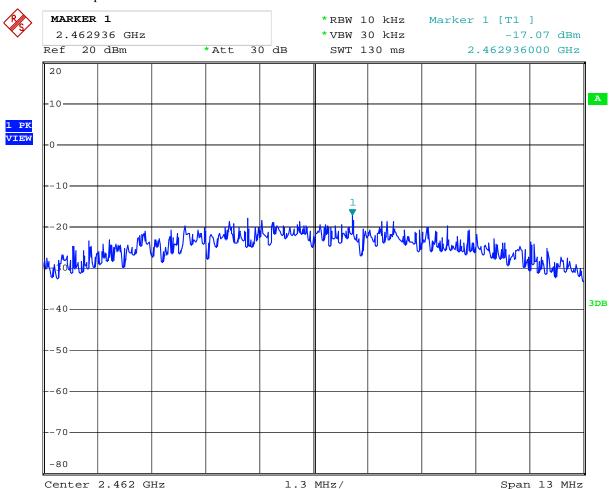


Date: 4.SEP.2013 15:55:29

Report No: 1309014 Page 67 of 99

Date: 2013-09-06



4. 802.11b at 1Mbps of CH1

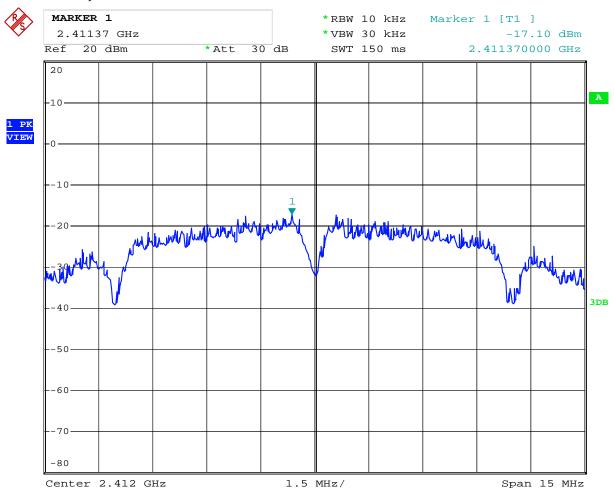


Date: 4.SEP.2013 15:51:56

Page 68 of 99

Report No: 1309014 Date: 2013-09-06



5. 802.11b at 1Mbps of CH6

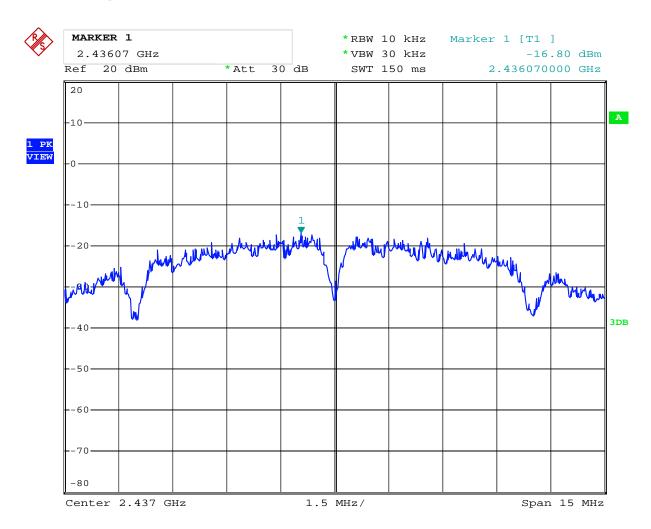


Date: 4.SEP.2013 15:51:19

Page 69 of 99

Report No: 1309014 Date: 2013-09-06



6. 802.11b at 1Mbps of CH11

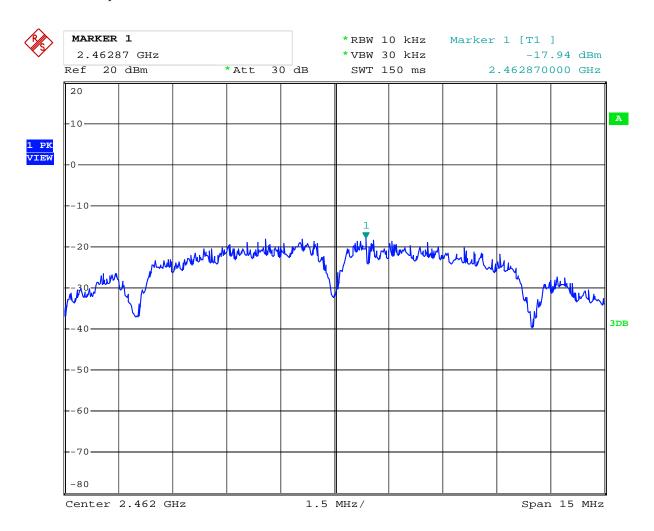


Date: 4.SEP.2013 15:50:30

Report No: 1309014 Page 70 of 99

Date: 2013-09-06



7. 802.11g at 54Mbps CH1

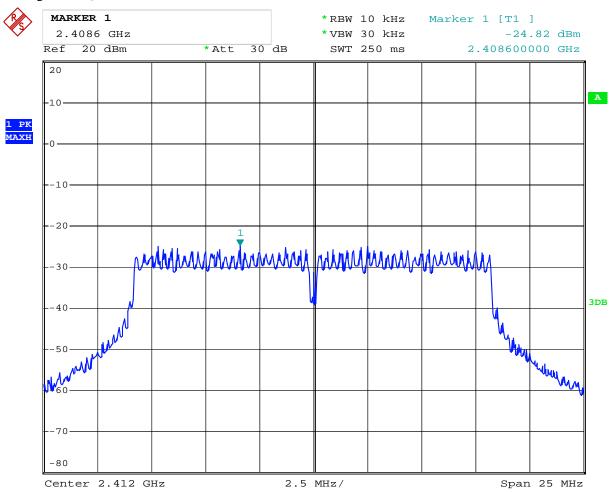

Date: 4.SEP.2013 15:52:56


Page 71 of 99

Date: 2013-09-06

Report No: 1309014



8. 802.11g at 54Mbps CH6

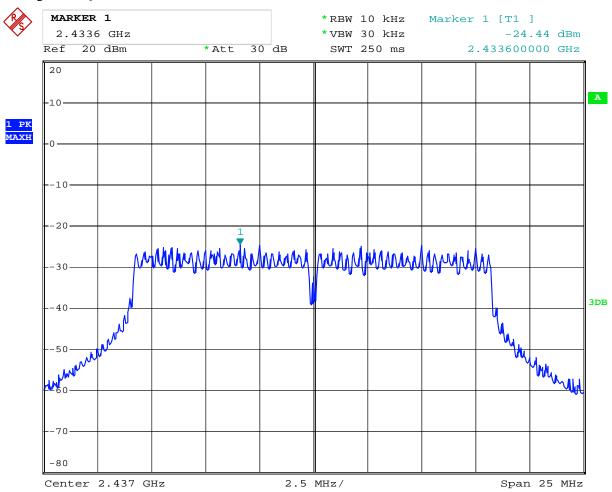


Date: 4.SEP.2013 15:53:25

Page 72 of 99

Report No: 1309014 Date: 2013-09-06



9. 802.11g at 54Mbps CH11

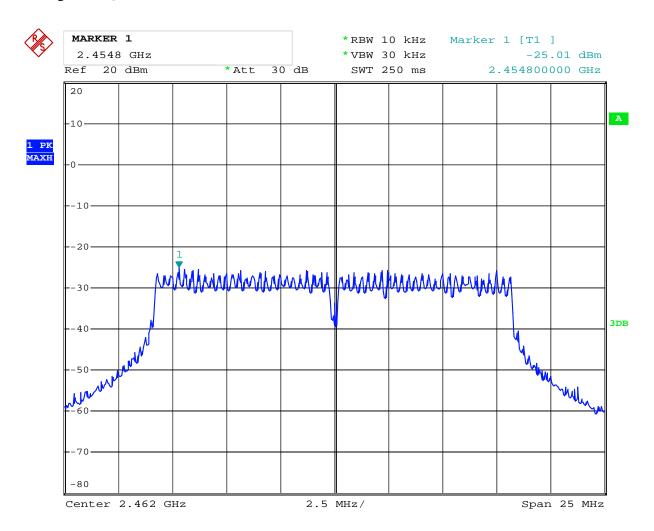


Date: 4.SEP.2013 15:54:06

Report No: 1309014 Page 73 of 99

Date: 2013-09-06



10. 802.11n at HT20 of CH01

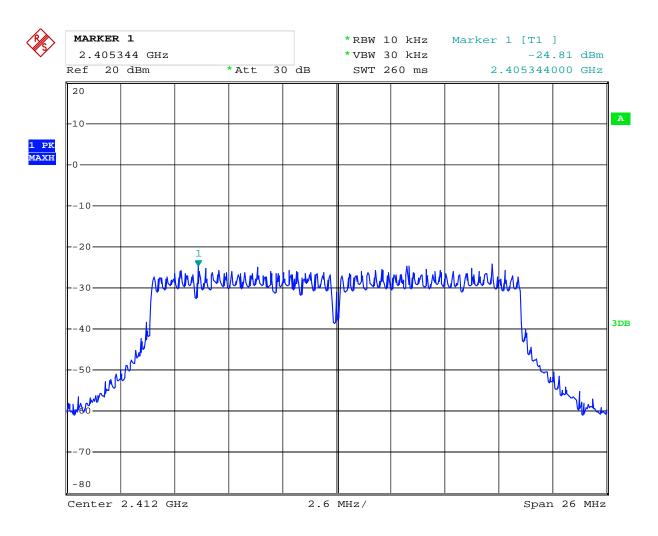


Date: 4.SEP.2013 15:48:21

Report No: 1309014 Page 74 of 99

Date: 2013-09-06



11. 802.11n at HT20 of CH06

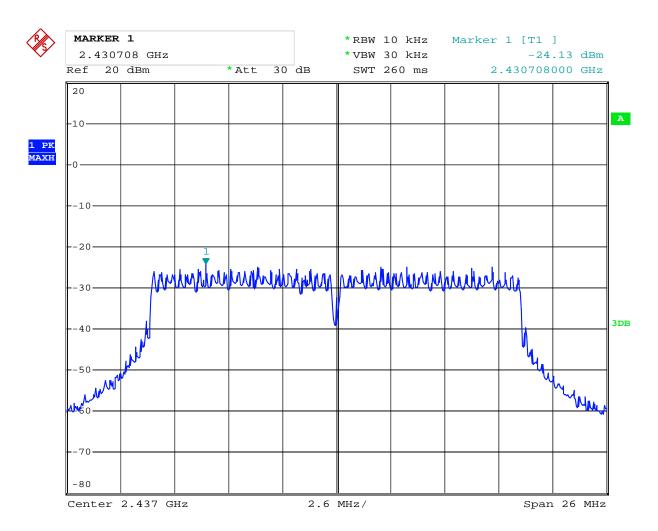


Date: 4.SEP.2013 15:49:00

Page 75 of 99

Report No: 1309014 Date: 2013-09-06



12. 802.11n at HT20 of CH11

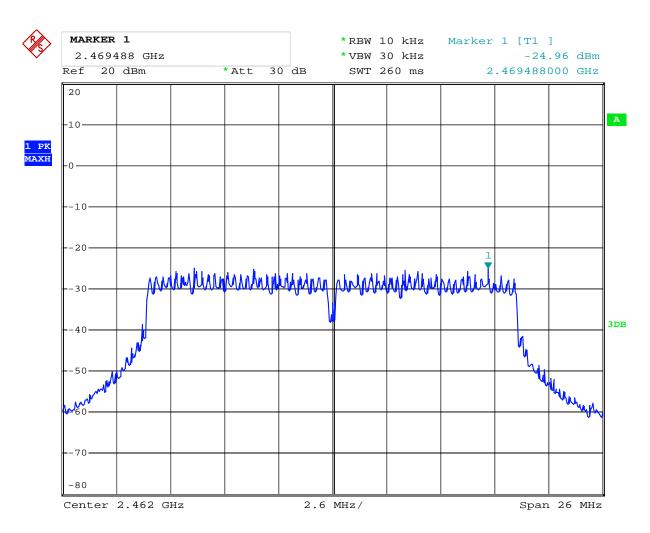


Date: 4.SEP.2013 15:49:42

Report No: 1309014 Page 76 of 99

Date: 2013-09-06



13. 802.11n at HT40 of CH01

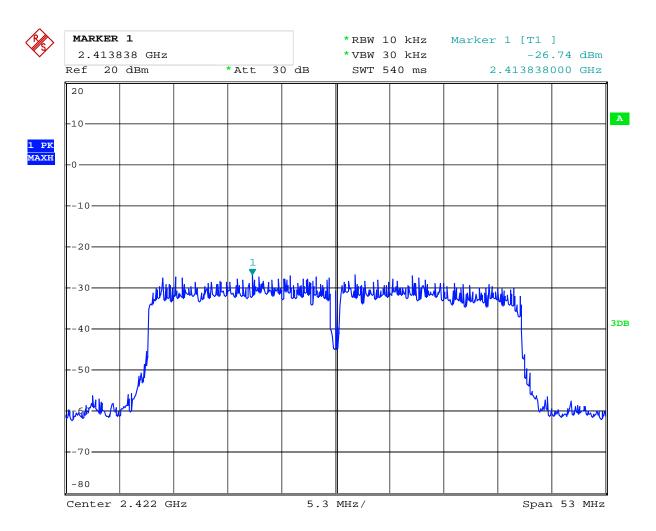


Date: 4.SEP.2013 15:47:31

Report No: 1309014 Page 77 of 99

Date: 2013-09-06



14. 802.11n at HT40 of CH04

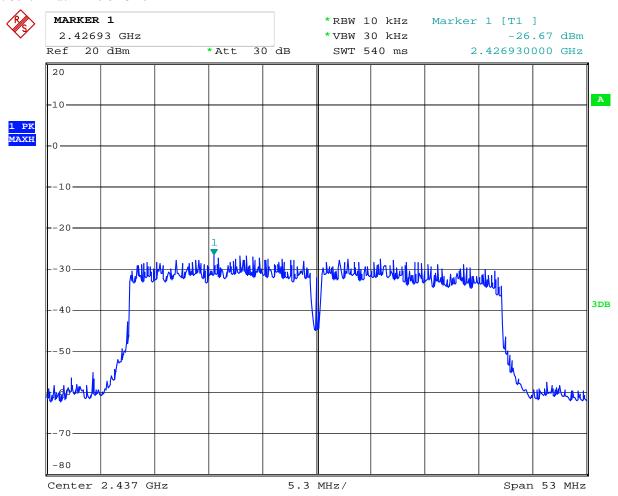


Date: 4.SEP.2013 15:46:40

Page 78 of 99

Report No: 1309014 Date: 2013-09-06



15. 802.11n at HT40 of CH07

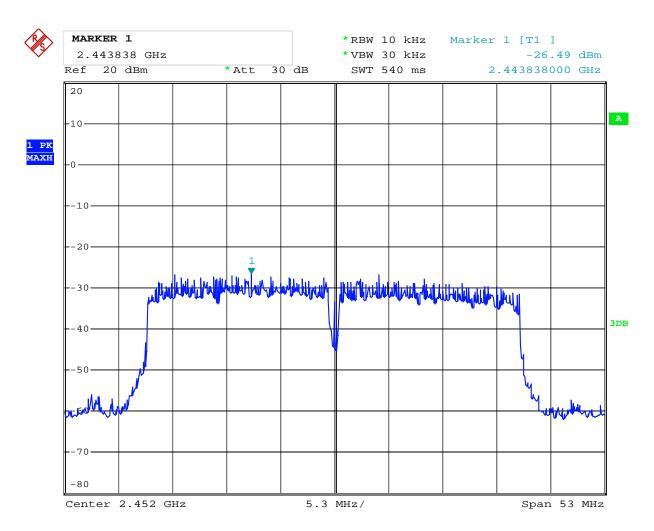

Date: 4.SEP.2013 15:46:06


Report No: 1309014 Page 79 of 99

Date: 2013-09-06



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 80 of 99

Report No: 1309014 Date: 2013-09-06




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

1011 2 min 4 mg min 1100m100m 0 min 1100m10m10m						
Product:	Tablet PC		Model:	M7021		
Mode	Keeping Transmitting		Input Voltage	AC 120V		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
2400	PK (dBµV/m)	43.58	T ::4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$		
2390	PK (dBμV/m)	35.83	Limit	74(dBμV/m)		
	AV (dBμV/m)		Limit	54(dBμV/m)		

Test Figure:

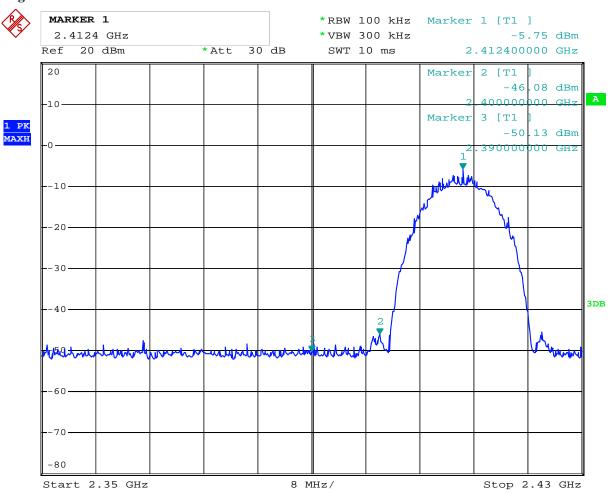

Date: 4.SEP.2013 15:58:01

Page 81 of 99

Report No: 1309014 Date: 2013-09-06




CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	38.76	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

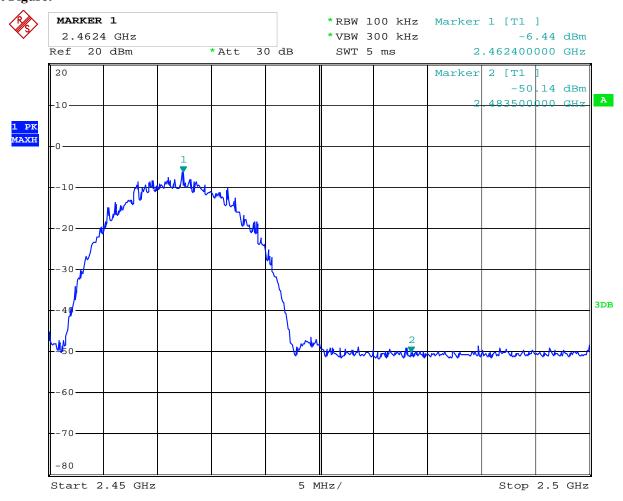

Date: 4.SEP.2013 16:06:35

Page 82 of 99

Report No: 1309014 Date: 2013-09-06




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	42.77	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)
2390	PK (dBμV/m)	36.38	Limit	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

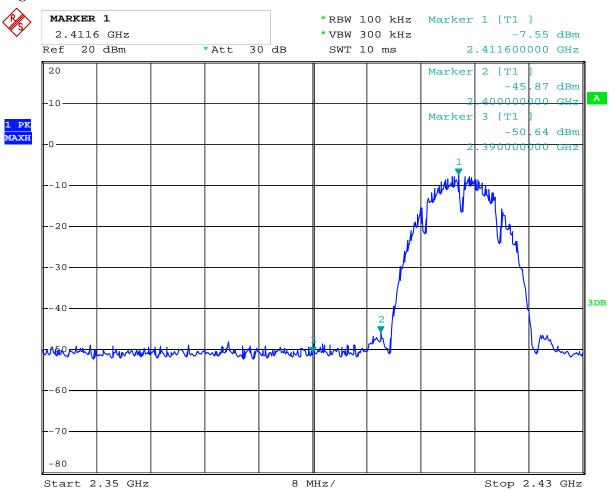

Date: 4.SEP.2013 15:59:20

Page 83 of 99

Report No: 1309014 Date: 2013-09-06




CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	40.31	T **4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

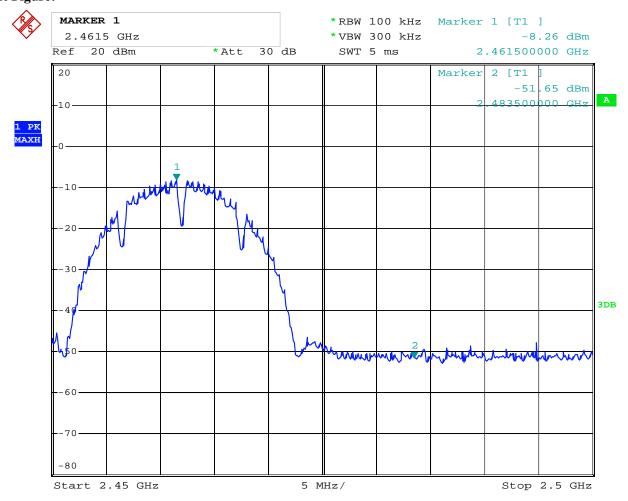

Date: 4.SEP.2013 16:04:59

Page 84 of 99

Report No: 1309014 Date: 2013-09-06




For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping	Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
2400	PK (dBμV/m)	43.59	T ::4	74(dBµV/m)
	AV (dBμV/m)		Limit	54(dBµV/m)
2390	PK (dBμV/m)	36.64	Limit	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

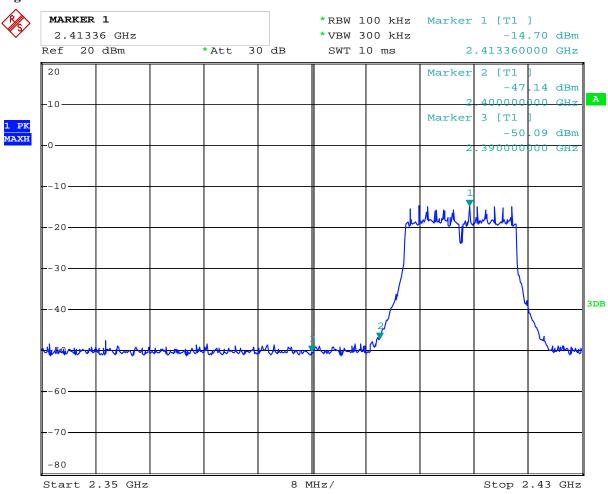

Date: 4.SEP.2013 15:58:55

Page 85 of 99

Report No: 1309014 Date: 2013-09-06




CH11 at 54Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Mod	el:	M7021
Mode	Keeping Transmitting		Input Vo	oltage	AC 120V
Temperature	24 deg. C,		Humi	dity	56% RH
Test Result:	Pass		Detec	ctor	PK
2483.5	PK (dBµV/m)	41.53	T ::4	74(dBμV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

Test Figure:

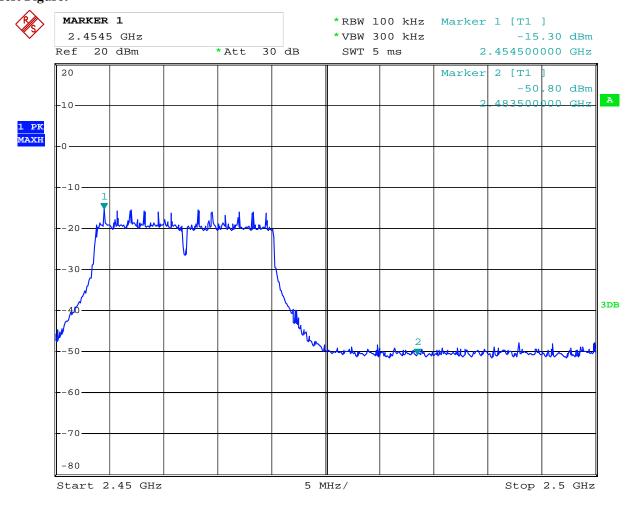

Date: 4.SEP.2013 16:05:47

Report No: 1309014 Date: 2013-09-06




For 802.11n (HT20) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping	Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	43.25	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	37.06	Limit	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBµV/m)

Test Figure:

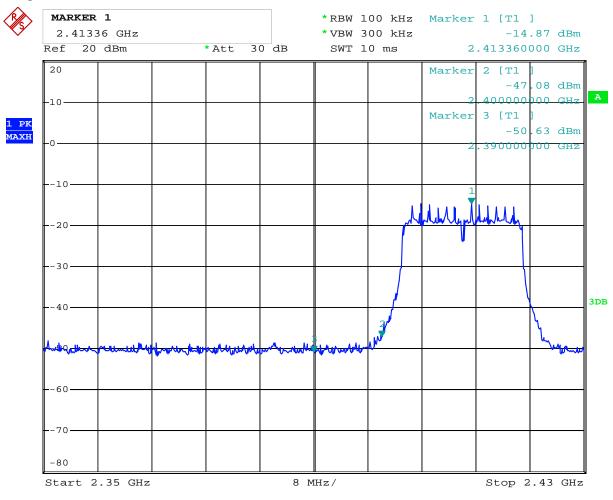

Date: 4.SEP.2013 16:00:14

Page 87 of 99

Report No: 1309014 Date: 2013-09-06




CH11 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	42.72	T in it	74(dBμV/m)
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure:

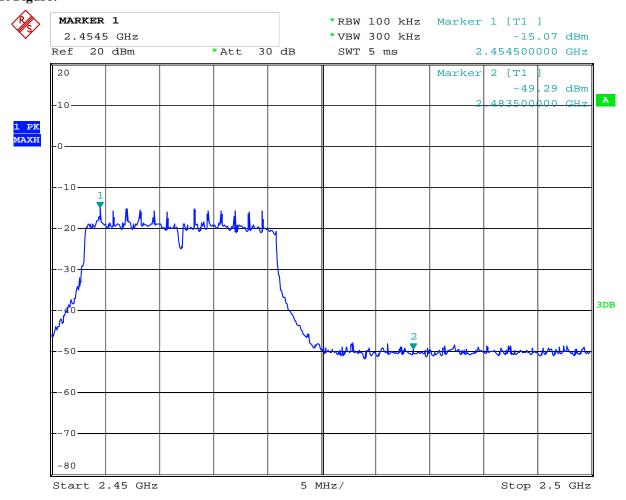

Date: 4.SEP.2013 16:04:32

Report No: 1309014 Date: 2013-09-06




For 802.11n (HT40) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping	Keeping Transmitting		AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
2400	PK (dBμV/m)	42.91	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	36.24	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

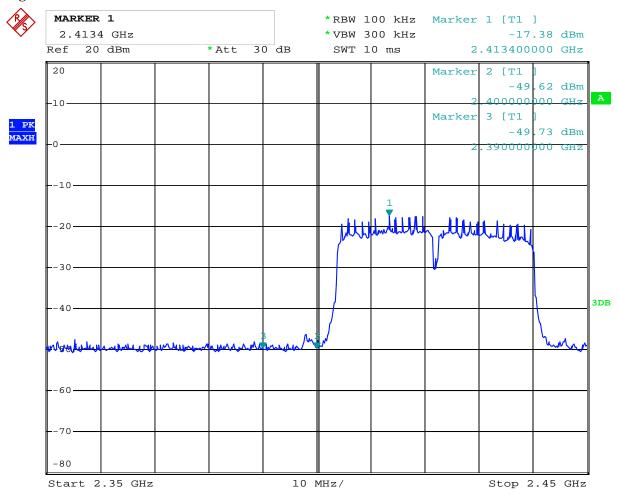

Date: 4.SEP.2013 16:02:04

Page 89 of 99

Report No: 1309014 Date: 2013-09-06




CH7 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	M7021
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	41.86	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure:

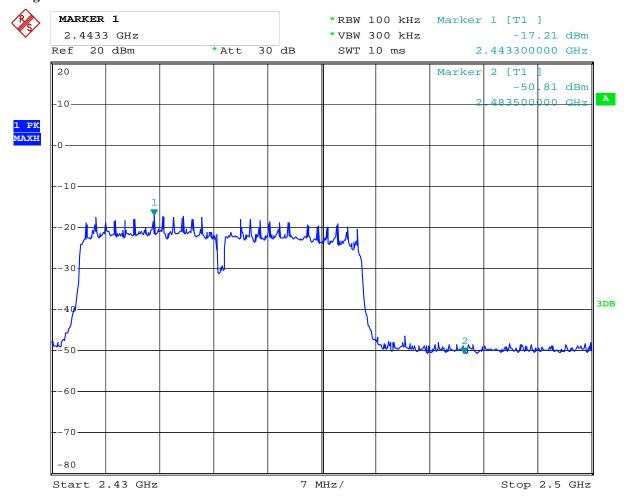

Date: 4.SEP.2013 16:03:26

Report No: 1309014 Page 90 of 99



11.0 Antenna Requirement

11.1 Standard Applicable

Date: 2013-09-06

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral Antenna used. The maximum Gain of the antennas is 1.0dBi.

Report No: 1309014 Page 91 of 99

Date: 2013-09-06




12.0 FCC ID Label

FCC ID: RBD-M7021

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

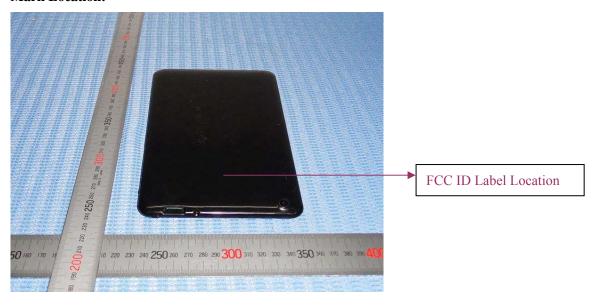

Report No: 1309014 Page 92 of 99

Date: 2013-09-06



13.0 **Photo of testing**

Conducted Emission Test Setup:



Page 93 of 99

Report No: 1309014 Date: 2013-09-06



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309014 Date: 2013-09-06



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 95 of 99

Report No: 1309014 Date: 2013-09-06



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 96 of 99

Report No: 1309014 Date: 2013-09-06



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 97 of 99

Report No: 1309014 Date: 2013-09-06



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 98 of 99

Report No: 1309014 Date: 2013-09-06



Inside view



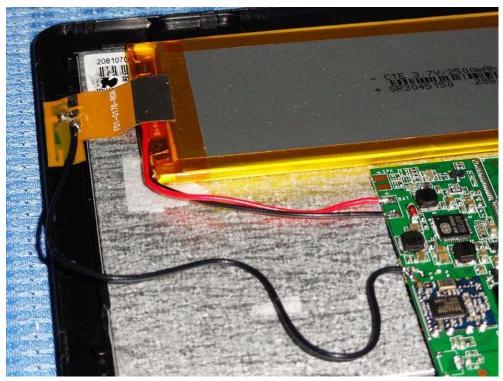

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 99 of 99

Report No: 1309014 Date: 2013-09-06



Inside view



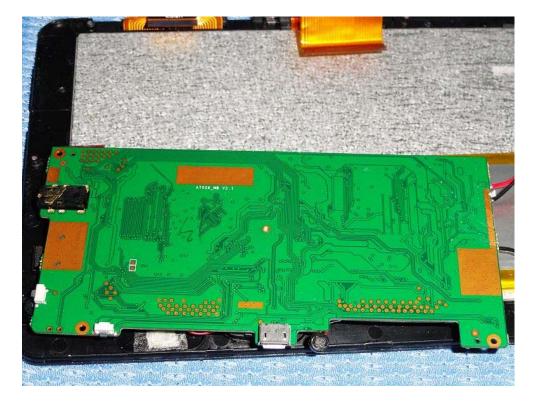

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.