



File reference No.: 2021-09-28

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No.: W113P, M10905, M10905-32, ST10905

Trademark: PACKARD BELL, Smartab

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: September 28, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2021-09-28



Page 2 of 41

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2021-09-28



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 4 |
| 1.5 | Test Duration. | 5 |
| 1.6 | Test Uncertainty | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 7 |
| 3.1 | Summary of Test Results | 7 |
| 3.2 | Test Standards | 7 |
| 4.0 | EUT Modification. | 7 |
| 5.0 | Power Line Conducted Emission Test. | 8 |
| 5.1 | Schematics of the Test. | 8 |
| 5.2 | Test Method and Test Procedure | 8 |
| 5.3 | Configuration of the EUT | 8 |
| 5.4 | EUT Operating Condition. | 9 |
| 5.5 | Conducted Emission Limit. | 9 |
| 5.6 | Test Result. | 9 |
| 6.0 | Radiated Emission test | 12 |
| 6.1 | Test Method and Test Procedure | 12 |
| 6.2 | Configuration of the EUT | 13 |
| 6.3 | EUT Operation Condition | 13 |
| 6.4 | Radiated Emission Limit | 14 |
| 6.5 | Test Result. | 15 |
| 7.0 | Band Edge | 23 |
| 7.1 | Test Method and Test Procedure | 23 |
| 7.2 | Radiated Test Setup | 23 |
| 7.3 | Configuration of the EUT | 23 |
| 7.4 | EUT Operating Condition | 23 |
| 7.5 | Band Edge Limit | 23 |
| 7.6 | Band Edge Test Result | 24 |
| 8.0 | Antenna Requirement | 28 |
| 9.0 | 20dB bandwidth measurement | 29 |
| 10.0 | FCC ID Label | 38 |
| 11.0 | Photo of Test Setup and EUT View. | 39 |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

Telephone: 0755-84688843 Fax: 0755-84688843

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Trademark: PACKARD BELL, Smartab

Model Number: W113P

Additional Model Name M10905, M10905-32, ST10905

Hardware Version: A863T-68T5B

Software Version: M10905-32 20210901

Serial No.: M109052108000001~M109052108004000

Rating: DC5.0V, 2.0A

Power Supply: Model: TPA-46050200UU; Input: 100-240V~, 50/60Hz, 0.3A; Output: DC5V, 2A

Battery: DC3.7V, 5000mAh, 18.5Wh Modulation Type: GFSK (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz Channel Number: 40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



Page 5 of 41

Antenna Designation FPC antenna used. The gain of the antennas is -0.77dBi (get from the antenna

specification provided the applicant)

1.4 Submitted Sample: 2 pcs

1.5 Test Duration

2021-09-11 to 2021-09-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Date: 2021-09-28



| 2.0 Test Equipment | | | | | |
|--------------------|--------------|------------------|--------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2021-06-18 | 2022-06-17 |
| LISN | R&S | EZH3-Z5 | 100294 | 2021-06-18 | 2022-06-17 |
| LISN | R&S | EZH3-Z5 | 100253 | 2021-06-18 | 2022-06-17 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2021-06-18 | 2022-06-17 |
| Loop Antenna | EMCO | 6507 | 00078608 | 2021-06-18 | 2024-06-17 |
| Spectrum | R&S | FSIQ26 | 100292 | 2021-06-18 | 2022-06-17 |
| Horn Antenna | A-INFO | LB-180400-KF | J211060660 | 2021-06-18 | 2022-06-17 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2021-07-02 | 2024-07-01 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2021-06-18 | 2022-06-17 |
| Power sensor | Anritsu | MA2491A | 32263 | 2021-06-18 | 2022-06-17 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2021-07-02 | 2024-07-01 |
| 9*6*6 Anechoic | | | N/A | 2021-07-02 | 2022-07-01 |
| EMI Test Receiver | RS | ESVB | 826156/011 | 2021-06-18 | 2022-06-17 |
| EMI Test Receiver | RS | ESH3 | 860904/006 | 2021-06-18 | 2022-06-17 |
| Spectrum | HP/Agilent | ESA-L1500A | US37451154 | 2021-06-18 | 2022-06-17 |
| Spectrum | HP/Agilent | E4407B | MY50441392 | 2021-06-18 | 2022-06-17 |
| Spectrum | RS | FSP | 1164.4391.38 | 2021-01-16 | 2022-01-15 |
| RF Cable | Zhengdi | ZT26-NJ-NJ-8M/FA | | 2021-06-18 | 2022-06-17 |
| RF Cable | Zhengdi | 7m | | 2021-06-18 | 2022-06-17 |
| RF Switch | EM | EMSW18 | 060391 | 2021-06-18 | 2022-06-17 |
| Pre-Amplifier | Schwarebeck | BBV9743 | #218 | 2021-06-18 | 2022-06-17 |
| Pre-Amplifier | HP/Agilent | 8449B | 3008A00160 | 2021-06-18 | 2022-06-17 |
| LISN | SCHAFFNER | NNB42 | 00012 | 2021-01-06 | 2022-01-05 |

2.2 Automation Test Software

For Conducted Emission Test

| Name | Version |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

For Radiated Emissions

| Name | Version |
|---|---------|
| EMI Test Software BL410-EV18.91 | V18.905 |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06 |

3. WIFI Test Software: RFtester_V2.4

Power Setting: default

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 7 of 41

Report No.: TW2109117-03E

Date: 2021-09-28



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

| Standard | Test Type | Result | Notes |
|---|-------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.207 | Conducted Emission Test | Pass | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit | Field Strength of Fundamental | Pass | Complies |
| FCC Part 15, Paragraph 15.209 | Radiated Emission Test | Pass | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(d) Limit | Band Edge Test | Pass | Complies |

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2021-09-28



5. Power Line Conducted Emission Test

5.1 Schematics of the test

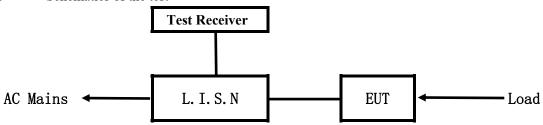


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

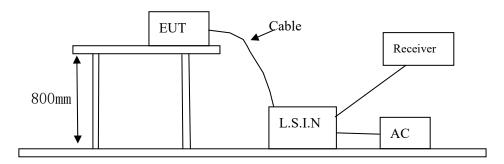

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

A. EUT

| Device | Manufacturer | Model | FCC ID |
|-----------|------------------------------|--------------------|-----------|
| Tablet PC | Shenzhen Jingwah Information | W113P, M10905, | RBD-W113P |
| | Technology Co., Ltd. | M10905-32, ST10905 | KDD-W113P |

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2109117-03E Page 9 of 41

Date: 2021-09-28



B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A | | | |

C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------------|--------------|----------------|----------------------------------|
| Power Supply | TIANYIN | TPA-46050200UU | Input: 100-240V~, 50/60Hz, 0.3A; |
| | | | Output: DC5V, 2A |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency | Limits (dB μ V) | | | |
|------------------|------------------|---------------|--|--|
| (MHz) | Quasi-peak Level | Average Level | | |
| $0.15 \sim 0.50$ | 66.0~56.0* | 56.0~46.0* | | |
| $0.50 \sim 5.00$ | 56.0 | 46.0 | | |
| 5.00 ~ 30 00 | 60.0 | 50.0 | | |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

Date: 2021-09-28



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Model: W113P Results: Pass

Please refer to following diagram for individual

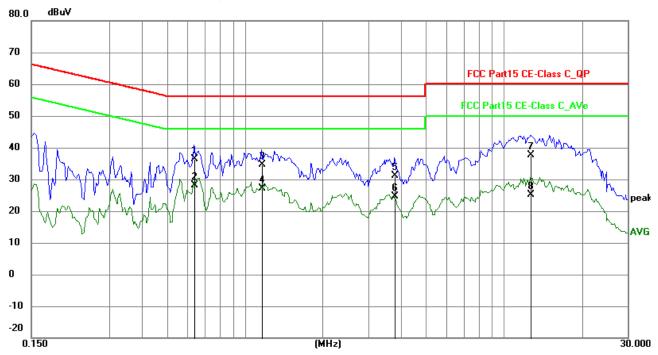

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.6375 | 26.69 | 9.78 | 36.47 | 56.00 | -19.53 | QP | Р |
| 2 | 0.6375 | 18.37 | 9.78 | 28.15 | 46.00 | -17.85 | AVG | Р |
| 3 | 1.1640 | 24.81 | 9.79 | 34.60 | 56.00 | -21.40 | QP | Р |
| 4 | 1.1640 | 17.40 | 9.79 | 27.19 | 46.00 | -18.81 | AVG | Р |
| 5 | 3.7917 | 21.15 | 9.88 | 31.03 | 56.00 | -24.97 | QP | Р |
| 6 | 3.7917 | 14.85 | 9.88 | 24.73 | 46.00 | -21.27 | AVG | Р |
| 7 | 12.6954 | 27.42 | 10.28 | 37.70 | 60.00 | -22.30 | QP | Р |
| 8 | 12.6954 | 14.91 | 10.28 | 25.19 | 50.00 | -24.81 | AVG | Р |

Date: 2021-09-28



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Model: W113P Results: Pass

Please refer to following diagram for individual

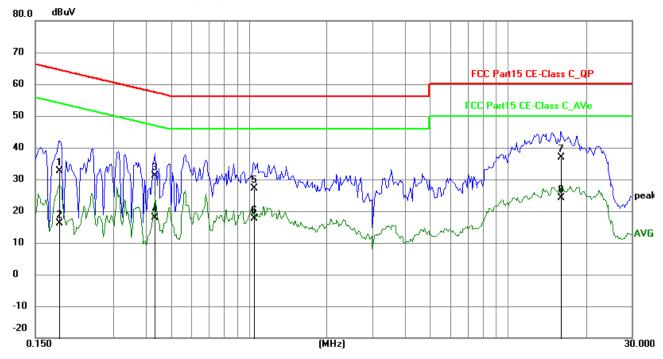

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.1850 | 22.78 | 9.76 | 32.54 | 64.26 | -31.72 | QP | Р |
| 2 | 0.1850 | 6.29 | 9.76 | 16.05 | 54.26 | -38.21 | AVG | Р |
| 3 | 0.4347 | 21.46 | 9.77 | 31.23 | 57.16 | -25.93 | QP | Р |
| 4 | 0.4347 | 8.10 | 9.77 | 17.87 | 47.16 | -29.29 | AVG | Р |
| 5 | 1.0431 | 17.38 | 9.79 | 27.17 | 56.00 | -28.83 | QP | Р |
| 6 | 1.0431 | 7.74 | 9.79 | 17.53 | 46.00 | -28.47 | AVG | Р |
| 7 | 16.0455 | 26.49 | 10.44 | 36.93 | 60.00 | -23.07 | P Q | Р |
| 8 | 16.0455 | 13.74 | 10.44 | 24.18 | 50.00 | -25.82 | AVG | Р |

Report No.: TW2109117-03E Page 12 of 41

Date: 2021-09-28




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

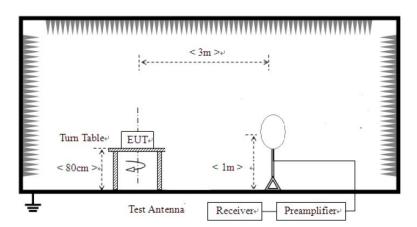


Date: 2021-09-28



For radiated emissions from 30MHz to1GHz

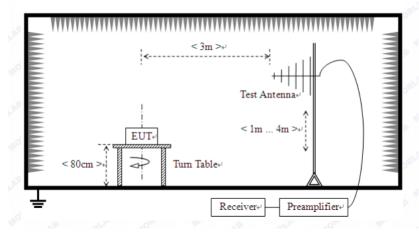

For radiated emissions above 1GHz

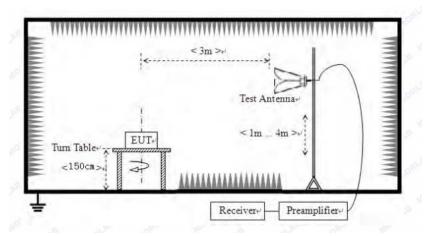

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No.: TW2109117-03E Page 14 of 41

Date: 2021-09-28



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

| Fundamental Frequency | Field Stre | d Strength of Fundamental (3m) | | | trength of Harmo | nics (3m) |
|-----------------------|------------|--------------------------------|------------|------|------------------|-----------|
| (MHz) | mV/m | dBuV/m | | uV/m | dBuV/m | |
| 2400-2483.5 | 50 | 94 (Average) | 114 (Peak) | 500 | 54 (Average) | 74 (Peak) |

Note: 1. RI

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|-------------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. Battery full charged during tests.

Report No.: TW2109117-03E Page 15 of 41

Date: 2021-09-28




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

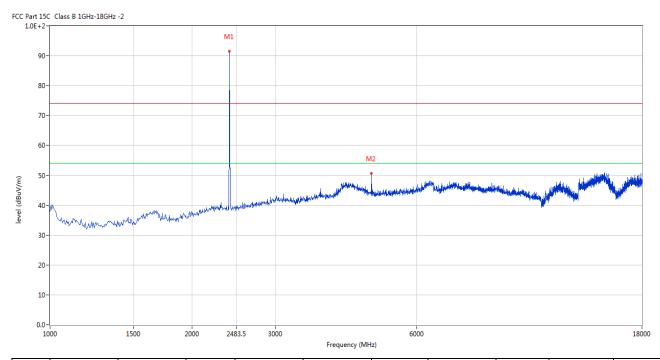


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2402.149 | 91.51 | -3.57 | 114.0 | -22.49 | Peak | 128.00 | 100 | Horizontal | Pass |
| 2 | 4802.799 | 50.59 | 3.12 | 74.0 | -23.41 | Peak | 133.00 | 100 | Horizontal | Pass |

Report No.: TW2109117-03E Page 16 of 41

Date: 2021-09-28



Vertical

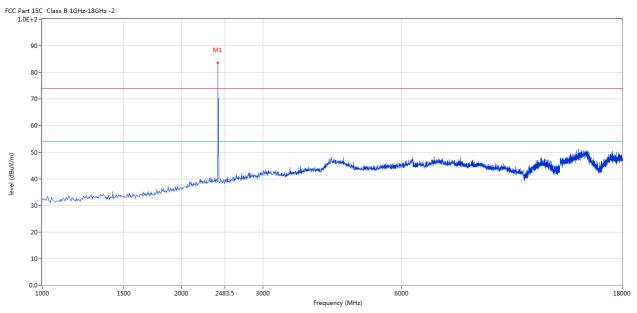

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2402.149 | 83.56 | -3.57 | 114.0 | -30.44 | Peak | 229.00 | 100 | Vertical | Pass |


Report No.: TW2109117-03E Page 17 of 41

Date: 2021-09-28



Please refer to the following test plots for details: Middle Channel-2440MHz

Horizontal

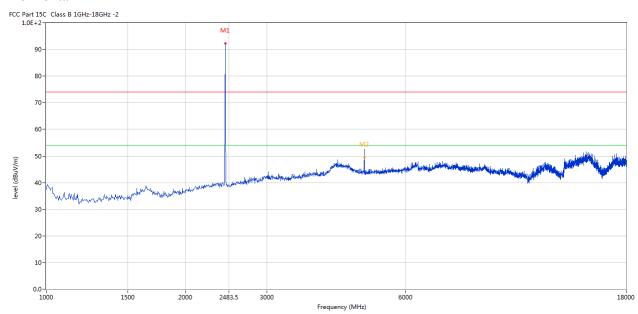


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2440.390 | 92.18 | -3.57 | 1144.0 | -21.82 | Peak | 100.00 | 100 | Horizontal | Pass |
| 2 | 4879.280 | 52.52 | 3.20 | 74.0 | -21.48 | Peak | 100.00 | 100 | Horizontal | Pass |
| 2** | 4879.280 | 49.51 | 3.20 | 54.0 | -4.49 | AV | 100.00 | 100 | Horizontal | Pass |

Report No.: TW2109117-03E Page 18 of 41

Date: 2021-09-28



Vertical

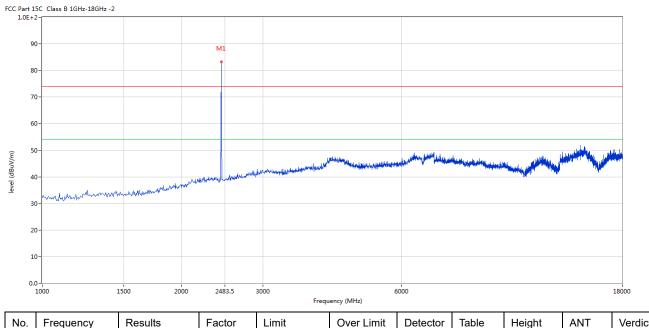

| | No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| - | 1 | 2440.390 | 83.31 | -3.57 | 114.0 | -30.69 | Peak | 228.00 | 100 | Vertical | Pass |


Report No.: TW2109117-03E Page 19 of 41

Date: 2021-09-28



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

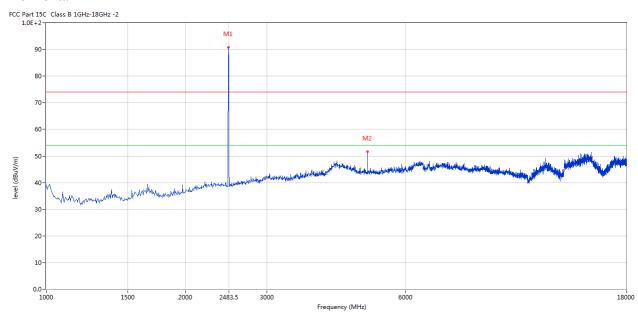


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2479.630 | 90.82 | -3.57 | 114.0 | -23.18 | Peak | 101.00 | 100 | Horizontal | Pass |
| 2 | 4960.010 | 51.62 | 3.36 | 74.0 | -22.38 | Peak | 111.00 | 100 | Horizontal | Pass |

Report No.: TW2109117-03E Page 20 of 41

Date: 2021-09-28



Vertical

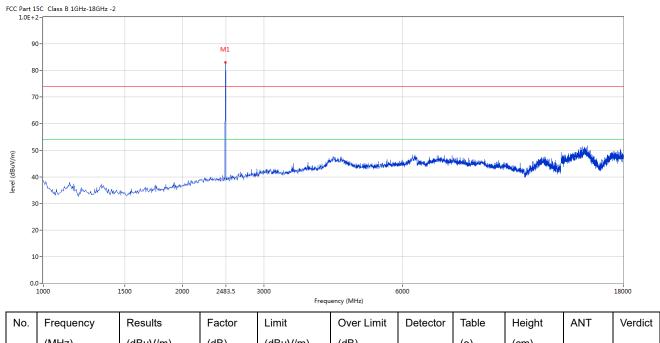

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2479.630 | 83.01 | -3.57 | 114.0 | -30.99 | Peak | 238.00 | 100 | Vertical | Pass |

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2109117-03E Page 21 of 41

Date: 2021-09-28




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

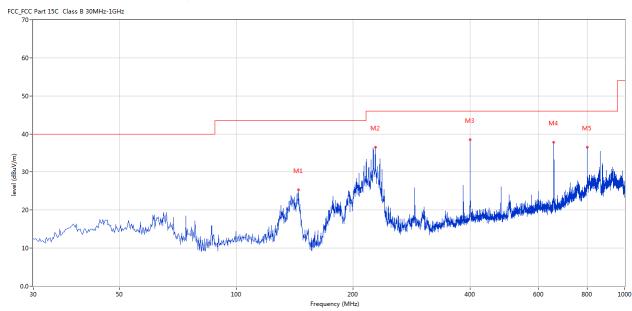

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 144.431 | 25.32 | -17.14 | 43.5 | -18.18 | Peak | 111.00 | 100 | Horizontal | Pass |
| 2 | 228.073 | 36.56 | -12.77 | 46.0 | -9.44 | Peak | 293.00 | 100 | Horizontal | Pass |
| 3 | 399.963 | 38.46 | -8.57 | 46.0 | -7.54 | Peak | 128.00 | 100 | Horizontal | Pass |
| 4 | 656.948 | 37.83 | -4.43 | 46.0 | -8.17 | Peak | 62.00 | 100 | Horizontal | Pass |
| 5 | 799.988 | 36.51 | -2.96 | 46.0 | -9.49 | Peak | 12.00 | 100 | Horizontal | Pass |

Report No.: TW2109117-03E Page 22 of 41

Date: 2021-09-28




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

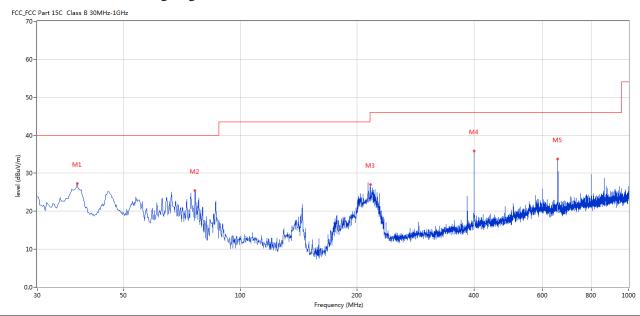

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 38.000 | 27.29 | -12.74 | 40.0 | -12.71 | Peak | 360.00 | 100 | Vertical | Pass |
| 2 | 76.306 | 25.43 | -17.58 | 40.0 | -14.57 | Peak | 360.00 | 100 | Vertical | Pass |
| 3 | 216.193 | 27.05 | -13.57 | 46.0 | -18.95 | Peak | 181.00 | 100 | Vertical | Pass |
| 4 | 399.963 | 35.81 | -8.57 | 46.0 | -10.19 | Peak | 173.00 | 100 | Vertical | Pass |
| 5 | 656.948 | 33.69 | -4.43 | 46.0 | -12.31 | Peak | 232.00 | 100 | Vertical | Pass |

Date: 2021-09-28




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

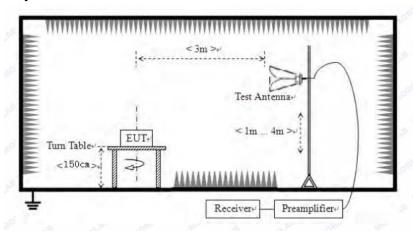

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No.: TW2109117-03E Page 24 of 41

Date: 2021-09-28



7.6 Test Result

| Product: | Tablet PC | Polarity | Horizontal |
|--------------|----------------------|--------------|------------|
| Mode | Keeping Transmitting | Test Voltage | DC3.7V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | | |

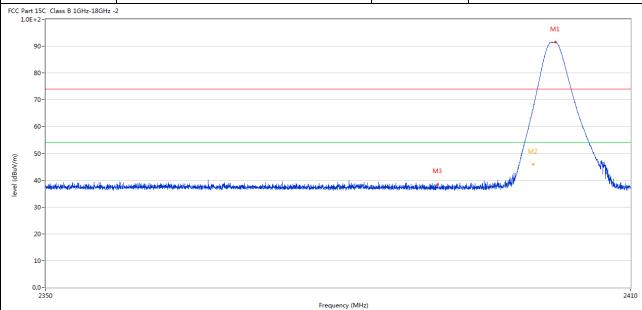

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 2 | 2400.072 | 67.85 | -3.57 | 74.0 | -6.15 | Peak | 129.00 | 100 | Horizontal | Pass |
| 2** | 2400.072 | 45.99 | -3.57 | 54.0 | -8.01 | AV | 129.00 | 100 | Horizontal | Pass |
| 3 | 2390.055 | 38.42 | -3.53 | 74.0 | -35.58 | Peak | 163.00 | 100 | Horizontal | Pass |

Report No.: TW2109117-03E Page 25 of 41



|] | Product: | | Tablet | PC |] | Detector | | Vei | tical | |
|----------|---------------------------------------|--|--|--|---------------------------------------|--|--------|---------|----------------------|--|
| | Mode | K | eeping Tra | nsmitting | Te | st Voltage | | DC | 3.7V | |
| Te | mperature | | 24 deg | g. C, | ŀ | Humidity | | 56% | 6 RH | |
| Τe | est Result: | | Pas | S | | | | | | |
| C Part 1 | .5C Class B 1GHz-18GHz 2-r | -2 | | | | | | | | |
| 9 | | | | | | | | | | |
| 9 | 0- | | | | | | | N N | 1 | |
| 8 | 0- | | | | | | | | | |
| 7 | 0- | | | | | | | | $\overline{}$ | |
| 6 | 0- | | | | | | | | \rightarrow | |
| 5 | 0- | | | | | | | | | |
| 4 | | | | | | M3 | | M2 • | 1 | |
| 4 | O - male of the first and and and and | dalin yin dagad da ang dang dalah yang dalah yang dalah sa | retari judament dert elder silder silverst silve | الماريان والمارية وا | ووالميناء والانطوال والانتجاب والمتاه | nel de de die des estates de la companya del la companya de la com | - | and the | - WIN | and the state of t |
| 3 | 0- | | | | | | | | | |
| 2 | 0- | | | | | | | | | |
| 1 | 0- | | | | | | | | | |
| 0 | 0- | | | | | | | | | |
| | 0- 2350 | | | Fre | equency (MHz) | | | | | 2410 |
| 0. | | | T = . | Limit | Over Limit | Detector | Table | Height | ANT | Verdi |
| | Frequency | Results | Factor | | 1 | | (0) | () | | |
| | Frequency (MHz) | Results (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| No. | | | | (dBuV/m) 74.0 | (dB) -12.38 | Peak | 234.00 | (cm) | Vertical | Pass |
| No. | (MHz) | (dBuV/m) | (dB) | 1 | | Peak AV | | | Vertical Vertical | Pass Pass |

Report No.: TW2109117-03E Page 26 of 41



| | Product: | | Table | et PC | Polarity | | | Horizontal | | | |
|--------------------|--|--|---------------|-----------------------|---|----------|--------|------------|-------------------|--------|--|
| | Mode Keeping Transmitting Temperature 24 deg. C, | | | Test Voltage Humidity | | | DC3.7V | | | | |
| Te | | | | | | | 56% RH | | | | |
| Te | est Result: | | Pa | SS | | | | | | | |
| CC Part 1 | 15C Class B 1GHz-18GHz - | -2 | | | | | | | | | |
| | 0- | | | | | | | | | | |
| | 0- | | $\overline{}$ | | | | | | | | |
| 6 | 0- | | | | | | | | | | |
| (w/ _A) | M | | | | WATER. | | | | | | |
| level (dbuv/m) | O- | A Bankin berganiga disa digi di sebebah di sebesah di s | | | 1 The house have a series about the contraction of the series of the contraction of the contraction of the series | | | | | | |
| 3 | 0- | | | | | | | | | | |
| 2 | 0- | | | | | | | | | | |
| 1 | 0- | | | | | | | | | | |
| 0 | 0- | | | | | | | | | | |
| | 2470 | | | 2483. | 5 Frequency (MHz) | | | | | 2500 | |
| No. | Frequency | Results | Factor | Limit | Over | Detector | Table | Height | ANT | Verdic | |
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | Limit (dB) | | (o) | (cm) | | | |
| | | T | | 74.0 | -17.83 | Peak | 111.00 | 100 | I I a mim a matal | | |
| 2 | 2483.377 | 56.17 | -3.57 | 74.0 | -17.03 | reak | 111.00 | 100 | Horizontal | Pass | |

Report No.: TW2109117-03E Page 27 of 41

Date: 2021-09-28



| | Product: | Tablet PC | | | I | Detector | | Vertical | | | |
|--|--|--|-------------|----------|---|--|--|--|---|-------------------|--|
| Mode Keeping Transmitting Temperature 24 deg. C, | | | nsmitting | Te | st Voltage | | | | | | |
| | | | 24 deg | g. C, | I. | Iumidity | | 56% RH | | | |
| Te | est Result: | | Pas | S | | | | | | | |
| CC Part : | 15C Class B 1GHz-18GHz | -2 | | | l l | | - 11 | | | | |
| 1.06+ | -2- | | | | | | | | | | |
| 9 | 90- | | | | | | | | | | |
| 8 | 30- | | | 1 | | | | | | | |
| 7 | 70- | | | | | | | | | | |
| | | | <i></i> | | | | | | | | |
| 6 | 50- | | | 1 | | | | | | | |
| | | | 7 | | | | | | | | |
| | 50- | / | 7 | 1 | | | | | | | |
| | 10- | I to a decide a complete de tempor | / | 1 | Marin and a | e panal I. Litharder stranger de la company | مرابط الماسطون | a conductorall write feet for the local dis- | (14118118441) | ale Journey Lie | |
| 4 | 10 - burgungkarangankur sang denkan sikil | limeta ya dipadamaya jindi danda | / | | washing the plant of the second constitution of | datah Liberta ing cirika ng pa | operation the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the second section in the second section is a second section in the section is a second section in the section is a second section in the section is a section in the section in the section is a section in the section in the section is a section in the section in the section is a section in the section in the section in the section is a section in the section in the section is a section in the section in the section in the section is a section in the section in the section in the section is a section in the section in the section in the section is a section in the section in the section in the section is a section in the section in the section in the section is a section in the section in the section in the section in the section is a section in the sectio | vivorada kontinguista kar katika en kita en | والمارية والعاملية ودوداهم | alp descriptes be | |
| 2 | 10 - the special property of the state of th | Liverities disconnection de la confession de la confessio | / | | Market Market Committee | tertalji. Likalita jirgi carilla utryva | n er skott stad stad for de best | il yedddadd ygillidd y ddiglawnid yn | thalumbahadhabanda eresanb | Bljedompha i bi | |
| II/Angr) Isaai | 10 - burgungkarangankur sang denkan sikil | Lincolning a Algorithm company to the lincolning of the lincolning | | | Mark Market Commencer | kerali, i. idada jinga cirila nenga | الإرادة والمتعارض المتعارض الم | n nedadonil spirithri distravnik qu | والمرابعة | Alp Annight A | |
| (Anna) Jaka | 10 - the special property of the state of th | Livershipe Algorithe anniquight de literal | | | Land And Andrewson | d ortalylu individual forgress of the entry ma | n-ephresidenistanist | issedadudi spikidya Birlikuvidya | ildianilisation-terrescond | ale de margie per | |
| 3 | 10 - hunan wan kantan da | Location de Alexandro accompanyin de insure | | | Land of the William Street | karali, i idadisi, ingi carika anyan | y ny pinggakan dak ng bendap | issedadustasjitelyk Britishovikka | nitional band and actively constant | | |
| 3 | 10 - harmonia i in distribution siddi | Lineari de galancia en | | 2483.5 F | requency (MHz) | entalji. Lidaulta, itagravitla varyna | ynyspiesiakandskumbushushushushushushushushushushushushushu | isosoladuski spilledyk filiki kuvidyyn | istambanish nasyyaasan | 2500 | |
| 3 | 10 - hunan wan kantan da | Results | Factor | | | Detector | Table | Height | ANT | 2500 | |
| 2 | 10 | | Factor (dB) | F | requency (MHz) | | | | | | |

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2021-09-28



Page 28 of 41

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a FPC antenna with gain -0.77dBi Max

Test Result: Pass

Page 29 of 41

Report No.: TW2109117-03E



| Product: | Tablet PC | | | Test Mode: | | Keep transmitting | | |
|---------------|----------------------|---------------|----------|--------------|-------------------------------------|-------------------|--------------|----------|
| Mode | Keeping Transmitting | | | Test Voltage | | DC3.7V | | |
| Temperature | 24 | 4 deg. C, | | Н | umidity | 56% RH | | |
| Test Result: | | Pass | | | Detector | | Pl | K |
| 0dB Bandwidth | 1.238MHz | | | | | | | |
| | Marker 1 [T1 ndB] | | | BW | 100 kH | ız Ri | RF Att 20 dE | |
| Ref Lvl | ndB | 20.00 dB | V | BW | 300 kI | łz | | |
| 10 dBm | BW 1. | .23847695 MHz | S | WT | 5 ms | s Uı | nit | dBm |
| 10 | | | | | v ₁ | [T1] | -5 | .18 dBm |
| | | | | | | | 2.40199 | 699 GHz |
| 0 | | | 1 | | ndB | | 20 | 0.00 dB |
| | | | \ | | BW $oldsymbol{ abla}_{\mathrm{T1}}$ | | 1.23847 | |
| -10 | | | | | VT1 | [T1] | 2.40138 | 36 dBm |
| | | | | | ∇_{T2} | [T1] | | 377 GHZ |
| -20 | T. / | | | | | 2 | 2.40262 | 224 GHz |
| 1MAX | 7 | | | | | (| | 1 |
| -30 | | | - | | | \ | | |
| | | | | | | \ | | |
| -40 | | | | | | | | |
| -50 | | | | | | | | |
| -60 | | | | | | | | |
| | | | | | | | | |
| -70 | | | | | | | | |
| | | | | | | | | |
| -80 | | | | | | | | |
| | | | | | | | | |
| -90 | | | | | | | | |
| Center 2.40 | 2 GHz | 300 | kHz/ | | | | Spa | an 3 MHz |

Page 30 of 41

Report No.: TW2109117-03E



| Product: | | Tablet PC | Test Mod | le: | Keep transmitting | | |
|---|--------------|----------------|----------|---|-------------------|------------|-----|
| Mode | Keepi | Test Volta | ige | DC3.7V 56% RH | | | |
| Temperature | | Humidit | у | | | | |
| Test Result: | | Pass | Detecto | r | PK | | |
| 20dB Bandwidth | | 1.238MHz | | | - | · - | |
| R. C. | Marker | 1 [T1 ndB] | RBW 100 | kHz R | F Att | 20 dB | |
| Ref Lvl | ndB | 20.00 dB | | kHz | | | |
| 10 dBm | BW | 1.23847695 MHz | SWT 5 | ms U | nit | dBm | |
| | | | • | 1 [T1] | -5 | .98 dBm | A |
| | | | | | 2.44000 | 301 GHz | |
| 0 | | | n | | 20 | .00 dB | |
| | | | | W T1 [T1] | 1.23847 | 695 MHz | |
| -10 | | | | | 2.43937 | | |
| | | | ▽ | T2 [T1] | | .88 dBm | |
| -20 | | / | | \ | 2.44061 | 623 GHz | |
| 1MAX | | | | Ž | | : | 1MA |
| -30 | / | | | + | | | |
| 4.0 | | | | | | | |
| -40 | | | | | | | |
| -50 | | | | | | | |
| -60 | | | | | | | |
| | | | | | | | |
| -70 | | | | | | | |
| | | | | | | | |
| -80 | | | | | | | |
| | | | | | | | |
| -90 | | | | | | | |
| Center 2 | .44 GHz | 300 | kHz/ | | Spai | n 3 MHz | |
| Date: 28 | 3.SEP.2021 1 | 4:24:05 | | | | | |

Page 31 of 41

Report No.: TW2109117-03E



| Product: | Tablet PC Keeping Transmitting | | | Iode: | Keep transmitting DC3.7V | | |
|-------------------|--------------------------------|----------|-------------------|----------------------|--------------------------|---------|-----|
| Mode | | | | oltage | | | |
| Temperature | 24 deg. (| Ξ, | Humidity Detector | | 56% RH | | |
| Test Result: | Pass | | | | I | PK | |
| OdB Bandwidth | 1.232MF | Iz | | | | | |
| € Ma | Marker 1 [T1 | ndB] | RBW 10 | 00 kHz | RF Att | 20 dB | |
| Ref Lvl | ndB 2 | 0.00 dB | VBW 30 | 00 kHz | | | |
| 10 dBm | BW 1.2324 | 6493 MHz | SWT | 5 ms | Unit | dBm | |
| 10 | | | | ▼ ₁ [T1] | -7 | .45 dBm | |
| | | | | | 2.47999 | 699 GHz | A |
| 0 | | | | ndB | 20 | .00 dB | |
| | | 1 | | BW | | 493 MHz | |
| -10 | | | | ∇ _{T1 [T1} | | .40 dBm | |
| | | | | V-0 5-13 | 2.47938 | | |
| -20 | | | | ▼ _{T2} [T1] | 2.48061 | .33 dBm | |
| 1MAX | T | | | T2 | 2.40001 | | 1M2 |
| -30 | | | | | | | |
| -40 | | | | | | | |
| -50 | | | | | | | |
| -60 | | | | | | • | |
| -70 | | | | | | | |
| -80 | | | | | | | |
| | | | | | | | |
| -90 Center 2.48 G | 111- | 300 kH | <u> </u> | | Cmo | n 3 MHz | |

Report No.: TW2109117-03E Page 32 of 41

Date: 2021-09-28




10.0 FCC ID Label

FCC ID: RBD-W113P

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

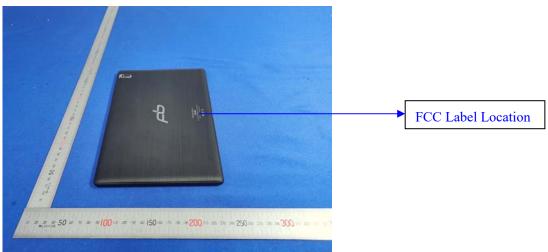

Page 33 of 41

Report No.: TW2109117-03E

Date: 2021-09-28



11.0 Photo of testing

11.1 Conducted test View--




Page 34 of 41

Report No.: TW2109117-03E

Date: 2021-09-28



Radiated emission test view

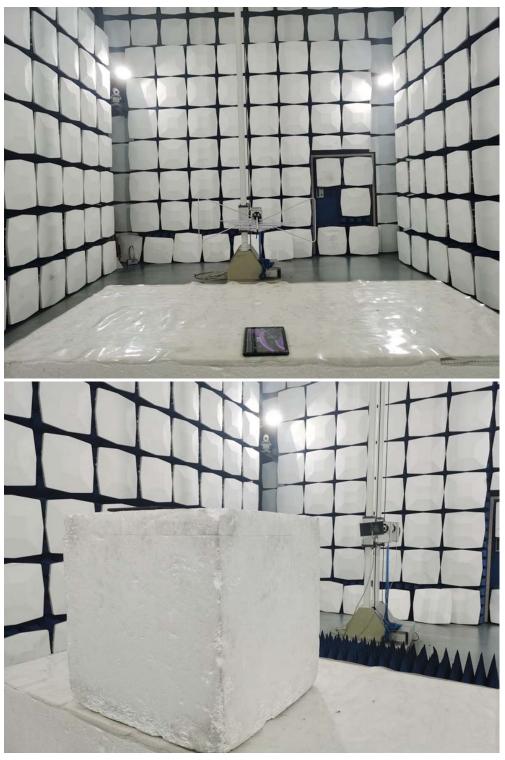

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



11.2 Photographs – EUT

Outside View



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



Photographs-EUT

Outside View

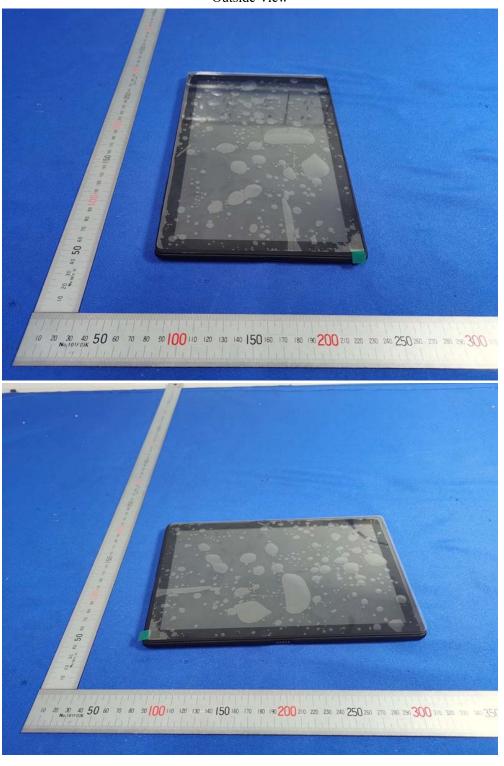

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 37 of 41

Report No.: TW2109117-03E

Date: 2021-09-28



Outside View

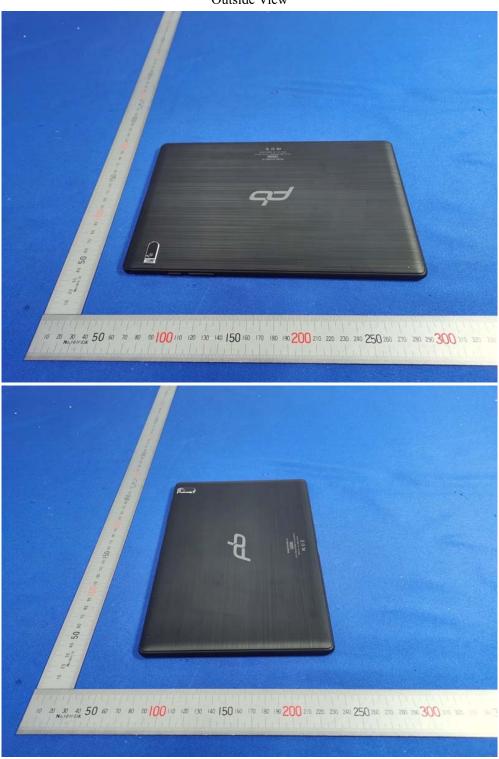

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2109117-03E Page 38 of 41



Outside View



Page 39 of 41

Report No.: TW2109117-03E

Date: 2021-09-28



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 40 of 41


Report No.: TW2109117-03E

Date: 2021-09-28



Inside View



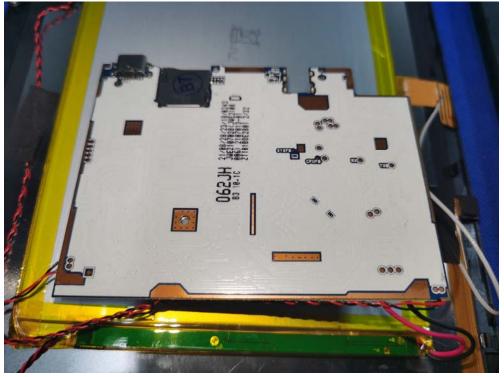

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2109117-03E Page 41 of 41



Inside View

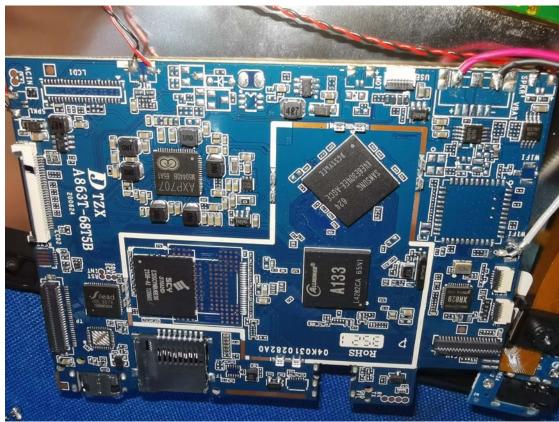

-- End of the report--