

SAR EVALUATION REPORT

For

Shenzhen Jingwah Information Technology Co., Ltd.

4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Shenzhen, China

FCC ID: RBD-S55L

Report Type: Original Report	Product Type: Smart Phone
Test Engineer: Terry XiaHou	<i>Terry XiaHou</i>
Report Number: RSZ151216006-20A	
Report Date: 2015-12-24	
Reviewed By: SAR Engineer	<i>Bell Hu</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Attestation of Test Results		
EUT Information	Company Name	Shenzhen Jingwah Information Technology Co., Ltd.
	EUT Description	Smart Phone
	FCC ID	RBD-S55L
	Model Number	Main model: S55L Multiple model: S55
	Test Date	2015-12-23
Frequency	Max. SAR Level(s) Reported	Limit(W/Kg)
GSM 850	0.236 W/kg 1g Head SAR 0.339 W/kg 1g Body SAR	1.6
PCS 1900	0.392 W/kg 1g Head SAR 0.457 W/kg 1g Body SAR	
WCDMA 850	0.072 W/kg 1g Head SAR 0.112 W/kg 1g Body SAR	
WCDMA 1700	0.327 W/kg 1g Head SAR 0.527 W/kg 1g Body SAR	
WCDMA 1900	0.157 W/kg 1g Head SAR 0.513 W/kg 1g Body SAR	
LTE Band 2	0.186 W/kg 1g Head SAR 0.354 W/kg 1g Body SAR	
LTE Band 4	0.370 W/kg 1g Head SAR 0.547 W/kg 1g Body SAR	
LTE Band 5	0.075 W/kg 1g Head SAR 0.126 W/kg 1g Body SAR	
LTE Band 7	0.054 W/kg 1g Head SAR 0.078 W/kg 1g Body SAR	
LTE Band 17	0.151 W/kg 1g Head SAR 0.216 W/kg 1g Body SAR	
Simultaneous	0.766 W/kg 1g Head SAR 0.734 W/kg 1g Body SAR	
Hotspot	0.734 W/kg 1g Body SAR	
Applicable Standards	ANSI / IEEE C95.1 : 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,3 kHz to 300 GHz.	
	ANSI / IEEE C95.3 : 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to Such Fields,100 kHz—300 GHz.	
	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices	
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	
	IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)	

KDB procedures

- KDB 447498 D01 General RF Exposure Guidance v05r02.
- KDB 648474 D04 Handset SAR v01r02.
- KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- KDB 865664 D02 RF Exposure Reporting v01r01
- KDB 941225 D01 3G SAR Procedures v03
- KDB 941225 D05 SAR for LTE Devices v02r03
- KDB 941225 D06 Hotspot Mode v02

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	6
EUT DESCRIPTION	7
TECHNICAL SPECIFICATION	7
REFERENCE, STANDARDS, AND GUIDELINES	9
SAR LIMITS	10
FACILITIES.....	11
DESCRIPTION OF TEST SYSTEM	12
EQUIPMENT LIST AND CALIBRATION	19
EQUIPMENTS LIST & CALIBRATION INFORMATION	19
SAR MEASUREMENT SYSTEM VERIFICATION	20
LIQUID VERIFICATION	20
SYSTEM ACCURACY VERIFICATION	22
SAR SYSTEM VALIDATION DATA	23
EUT TEST STRATEGY AND METHODOLOGY	43
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR.....	43
CHEEK/TOUCH POSITION	44
EAR/TILT POSITION	44
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	45
SAR EVALUATION PROCEDURE.....	46
TEST METHODOLOGY	46
CONDUCTED OUTPUT POWER MEASUREMENT	47
PROVISION APPLICABLE	47
TEST PROCEDURE	47
RADIO CONFIGURATION	47
MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITS	53
TEST RESULTS:	54
SAR MEASUREMENT RESULTS.....	67
SAR TEST DATA.....	67
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	80
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	86
APPENDIX A MEASUREMENT UNCERTAINTY	106
APPENDIX B – PROBE CALIBRATION CERTIFICATES.....	108
APPENDIX C DIPOLE CALIBRATION CERTIFICATES.....	117
APPENDIX D EUT TEST POSITION PHOTOS	162
LIQUID DEPTH ≥ 15CM	162
BODY-WORN BACK SETUP PHOTO (10MM)	162
BODY-WORN LEFT SETUP PHOTO (10MM)	163
BODY-WORN RIGHT SETUP PHOTO (10MM)	163
BODY-WORN BOTTOM SETUP PHOTO (10MM)	164
LEFT HEAD TOUCH SETUP PHOTO	164
LEFT HEAD TILT SETUP PHOTO	165
RIGHT HEAD TOUCH SETUP PHOTO	165
RIGHT HEAD TILT SETUP PHOTO	166
APPENDIX E EUT PHOTOS.....	167
EUT – FRONT VIEW.....	167

EUT – BACK VIEW 167
EUT –LEFT SIDE VIEW 168
EUT – RIGHT SIDE VIEW 168
EUT – TOP VIEW 169
EUT – BOTTOM VIEW..... 169
EUT – UNCOVER VIEW..... 170
APPENDIX F INFORMATIVE REFERENCES 171
PRODUCT SIMILARITY DECLARATION LETTER..... 172

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RSZ151216006-20A	Original Report	2015-12-24

EUT DESCRIPTION

This report has been prepared on behalf of Shenzhen Jingwah Information Technology Co., Ltd. and their product, FCC ID: RBD-S55L, Model: S55L or the EUT (Equipment under Test) as referred to in the rest of this report.

**Note: This series products model: S55L and S55, we select model: S55L to test, there is no electrical change has been made to the equipment, please refer to the product similarity letter.*

Technical Specification

Product Type	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class 12
Operation Mode :	GSM Voice, EGPRS/GPRS Data, WCDMA(Rel99, HSUPA, HSDPA, DC-HSPA, HSPA+), LTE, Wi-Fi and Bluetooth
Frequency Band:	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) WCDMA 850: 824-849 MHz(TX) ; 869-894 MHz(RX) WCDMA 1700: 1710-1755MHz(TX); 2110-2155MHz(RX) WCDMA 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) LTE Band 2: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX) ; 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX) ; 2620-2690 MHz(RX) LTE Band 17: 704-716 MHz(TX) ; 734-746 MHz(RX) Wi-Fi(802.11b/g/n20): 2412 MHz-2462 MHz Wi-Fi(802.11n40): 2422 MHz-2452 MHz Bluetooth3.0 : 2402 MHz-2480 MHz BLE:2402 MHz-2480 MHz
Conducted RF Power:	GSM 850 : 32.89 dBm PCS 1900: 29.76 dBm WCDMA 850: 22.65 dBm WCDMA 1700: 22.82 dBm WCDMA 1900: 22.79 dBm LTE Band 2: 22.76 dBm LTE Band 4: 22.97 dBm LTE Band 5: 22.98 dBm LTE Band 7: 22.84 dBm LTE Band 17: 22.88 dBm Wi-Fi(802.11b/g/n20): 9.48 dBm Wi-Fi(802.11n40) : 9.49 dBm Bluetooth3.0: 5.32 dBm

	BLE: -1.99 dBm
Dimensions (L*W*H):	155 mm (L) × 78 mm (W) × 8 mm (H)
Power Source:	3.8 V _{DC} Rechargeable Battery
Normal Operation:	Head and Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits

FCC Limit (1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit (10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm³ in the X & Y axis, and 35mm in the Z axis.



ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

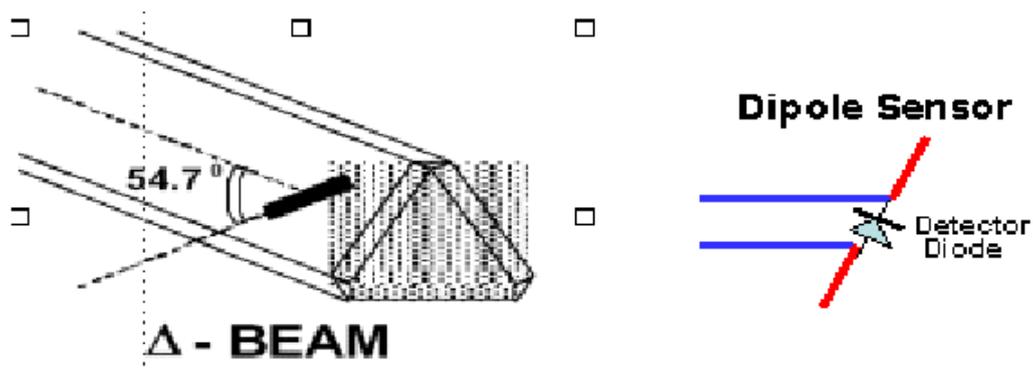

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide
Sensitivity	0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$
Dynamic Range	0.0005 W/kg to 100 W/kg
Isotropic Response	Better than 0.1 dB
Diode Compression Point (DCP)	Calibration for Specific Frequency
Probe Tip Diameter	< 2.9 mm
Sensor Offset	1.56 (+/- 0.02 mm)
Probe Length	289 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μV to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05 mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710 mm
Communication	RS232 and LAN compatible

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

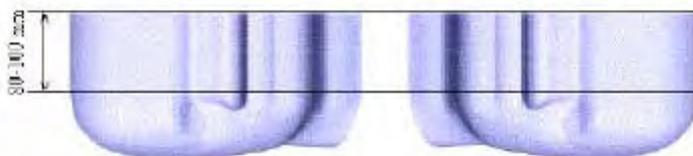

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	Calibration Date	Calibration Due Date	S/N
CRS F3 robot	ALS-F3	N/A	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A	N/A
CRS C500C controller	ALS-C500	N/A	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2015-12-14	2016-12-14	110-00212
Miniature E-Field Probe	ALS-E-020	2015-12-14	2016-12-14	500-00283
Dipole, 750MHz	ALS-D-750-S-2	2013-10-08	2016-10-08	177-00505
Dipole, 835MHz	ALS-D-835-S-2	2014-10-08	2017-10-08	180-00558
Dipole, 1750MHz	ALS-D-1750-S-2	2013-10-08	2016-10-08	198-00304
Dipole, 1900MHz	ALS-D-1900-S-2	2014-10-09	2017-10-09	210-00710
Dipole, 2450MHz	ALS-D-2450-S-2	2014-10-09	2017-10-09	220-00758
Dipole Spacer	ALS-DS-U	N/A	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	N/A	150-00413
Simulated Tissue 750 MHz Head	ALS-TS-750-H	Each Time	Each Time	270-01001
Simulated Tissue 750 MHz Body	ALS-TS-750-B	Each Time	Each Time	270-02100
Simulated Tissue 835 MHz Head	ALS-TS-835-H	Each Time	Each Time	270-01002
Simulated Tissue 835 MHz Body	ALS-TS-835-B	Each Time	Each Time	270-02101
Simulated Tissue 1750 MHz Head	ALS-TS-1750-H	Each Time	Each Time	295-01103
Simulated Tissue 1750 MHz Body	ALS-TS-1750-B	Each Time	Each Time	295-02102
Simulated Tissue 1900 MHz Head	ALS-TS-1900-H	Each Time	Each Time	295-01103
Simulated Tissue 1900 MHz Body	ALS-TS-1900-B	Each Time	Each Time	295-02102
Simulated Tissue 2450 MHz Head	ALS-TS-2450-H	Each Time	Each Time	290-01108
Simulated Tissue 2450 MHz Body	ALS-TS-2450-B	Each Time	Each Time	290-01109
Directional couple	DC6180A	N/A	N/A	0325849
Power Amplifier	5S1G4	N/A	N/A	71377
Attenuator	3dB	N/A	N/A	5402
Dielectric probe kit	HP85070B	2015-06-13	2016-06-13	US33020324
Network analyzer	8752C	2015-06-03	2016-06-03	3410A02356
Synthesized Sweeper	HP 8341B	2015-06-03	2016-06-03	2624A00116
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	2015-11-23	2016-11-23	106891
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	2015-04-19	2016-04-19	114772
EMI Test Receiver	ESCI	2015-06-13	2016-06-13	101746

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

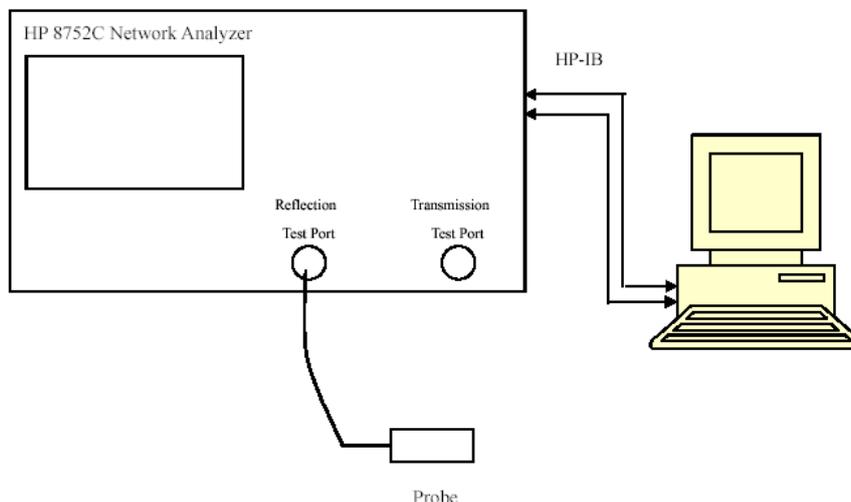

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
709.0	Head	42.31	0.90	41.95	0.89	0.858	1.124	± 5
	Body	54.57	0.97	55.50	0.96	-1.676	1.042	± 5
710.0	Head	42.34	0.90	41.95	0.89	0.930	1.124	± 5
	Body	54.64	0.97	55.50	0.96	-1.550	1.042	± 5
711.0	Head	41.97	0.91	41.95	0.89	0.048	2.247	± 5
	Body	54.54	0.98	55.50	0.96	-1.730	2.083	± 5
824.2	Head	41.55	0.91	41.50	0.90	0.120	1.111	± 5
	Body	55.35	0.98	55.20	0.97	0.272	1.031	± 5
826.4	Head	41.56	0.92	41.50	0.90	0.145	2.222	± 5
	Body	55.43	0.98	55.20	0.97	0.417	1.031	± 5
829.0	Head	41.59	0.91	41.50	0.90	0.217	1.111	± 5
	Body	55.52	0.99	55.20	0.97	0.580	2.062	± 5
836.5	Head	41.67	0.92	41.50	0.90	0.410	2.222	± 5
	Body	55.77	0.98	55.20	0.97	1.033	1.031	± 5
836.6	Head	41.87	0.92	41.50	0.90	0.892	2.222	± 5
	Body	55.86	0.99	55.20	0.97	1.196	2.062	± 5
844.0	Head	41.64	0.91	41.50	0.90	0.337	1.111	± 5
	Body	55.83	1.00	55.20	0.97	1.141	3.093	± 5
846.6	Head	41.59	0.91	41.50	0.90	0.217	1.111	± 5
	Body	55.80	0.99	55.20	0.97	1.087	2.062	± 5
848.8	Head	41.60	0.92	41.50	0.90	0.241	2.222	± 5
	Body	55.78	0.98	55.20	0.97	1.051	1.031	± 5


Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	ϵ_r	σ (S/m)	ϵ_r	
1712.4	Head	40.15	1.39	40.08	1.37	0.175	1.460	±5
	Body	53.90	1.52	53.43	1.49	0.880	2.013	±5
1720.0	Head	40.18	1.38	40.08	1.37	0.250	0.730	±5
	Body	53.55	1.52	53.43	1.49	0.225	2.013	±5
1732.5	Head	40.15	1.38	40.08	1.37	0.175	0.730	±5
	Body	53.67	1.50	53.43	1.49	0.449	0.671	±5
1732.6	Head	40.18	1.38	40.08	1.37	0.250	0.730	±5
	Body	53.95	1.50	53.43	1.49	0.973	0.671	±5
1745.0	Head	40.11	1.40	40.08	1.37	0.075	2.190	±5
	Body	53.55	1.52	53.43	1.49	0.225	2.013	±5
1752.6	Head	40.18	1.42	40.08	1.37	0.250	3.650	±5
	Body	53.59	1.53	53.43	1.49	0.299	2.685	±5
1850.2	Head	40.02	1.42	40.00	1.40	0.050	1.429	±5
	Body	53.51	1.53	53.30	1.52	0.394	0.658	±5
1852.4	Head	40.05	1.43	40.00	1.40	0.125	2.143	±5
	Body	53.37	1.53	53.30	1.52	0.131	0.658	±5
1860.0	Head	40.07	1.44	40.00	1.40	0.175	2.857	±5
	Body	53.42	1.55	53.30	1.52	0.225	1.974	±5
1880.0	Head	40.08	1.42	40.00	1.40	0.200	1.429	±5
	Body	53.55	1.53	53.30	1.52	0.469	0.658	±5
1900.0	Head	40.09	1.42	40.00	1.40	0.225	1.429	±5
	Body	53.59	1.53	53.30	1.52	0.544	0.658	±5
1907.6	Head	40.11	1.41	40.00	1.40	0.275	0.714	±5
	Body	53.62	1.53	53.30	1.52	0.600	0.658	±5
1909.8	Head	40.13	1.42	40.00	1.40	0.325	1.429	±5
	Body	53.69	1.54	53.30	1.52	0.732	1.316	±5
2510	Head	39.73	1.81	39.20	1.80	1.352	0.556	±5
	Body	52.77	1.97	52.70	1.95	0.133	1.026	±5
2535	Head	39.68	1.85	39.20	1.80	1.224	2.778	±5
	Body	52.83	1.96	52.70	1.95	0.247	0.513	±5
2560	Head	39.67	1.81	39.20	1.80	1.199	0.556	±5
	Body	52.90	1.96	52.70	1.95	0.380	0.513	±5

*Liquid Verification was performed on 2015-12-23.

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

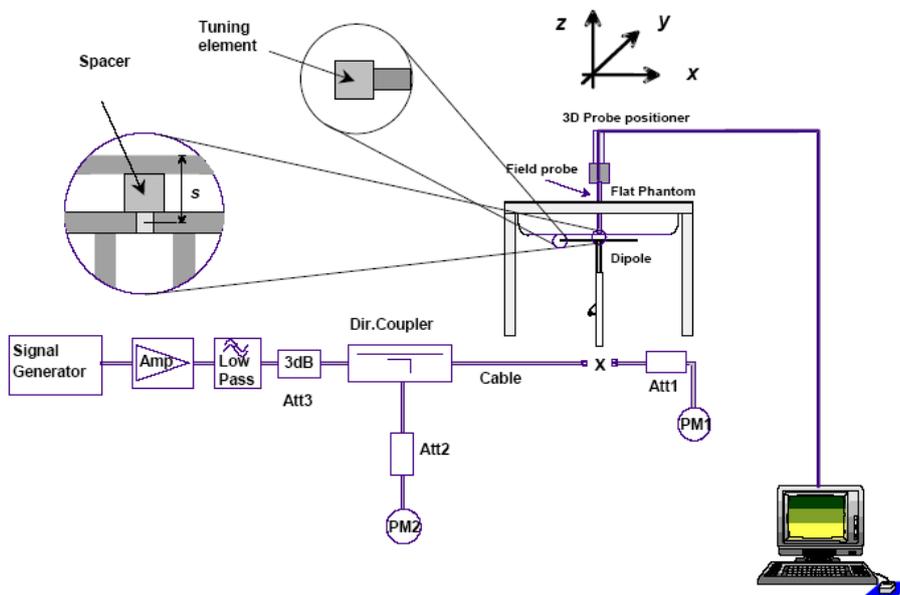

System Accuracy Check Results:

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
2015-12-23	750	Head	1g	8.352	8.5	-1.741	± 10
		Body	1g	8.473	8.54	-0.785	± 10
	835	Head	1g	10.030	9.773	2.630	± 10
		Body	1g	9.782	9.736	0.472	± 10
	1750	Head	1g	36.957	37.020	-0.170	± 10
		Body	1g	36.875	36.650	0.614	± 10
	1900	Head	1g	40.153	39.481	1.702	± 10
		Body	1g	39.886	39.715	0.431	± 10
2450	Head	1g	53.976	54.916	-1.712	± 10	
	Body	1g	52.526	52.418	0.206	± 10	

*All SAR values are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 750 MHz Head Liquid****Dipole 750 MHz; Type: ALS-D-750-S-2; S/N: 177-00505**

Product Data

Device Name : Dipole 750 MHz
Serial No. : 177-00505
Type : Dipole
Model : ALS-D-750-S-2
Frequency Band : 750
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 8.223 W/kg
Power Drift-Finish : 8.376 W/kg
Power Drift (%) : 1.861

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Head
Serial No. : 270-01001
Frequency : 750.0 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 42.13 F/m
Sigma : 0.90 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 750
Duty Cycle Factor : 1
Conversion Factor : 6.0
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 8.352 W/kg
 10 gram SAR value : 5.232 W/kg
 Area Scan Peak SAR : 8.539 W/kg
 Zoom Scan Peak SAR : 17.759 W/kg

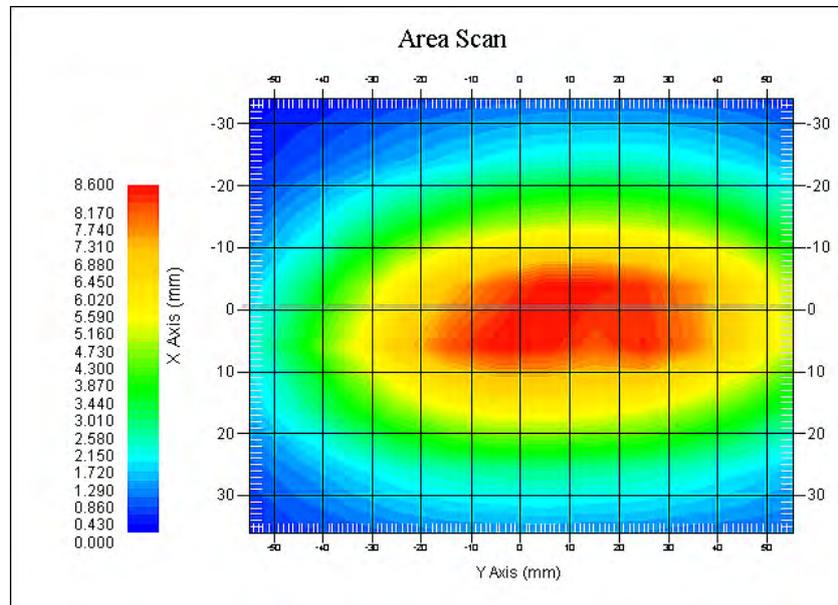

750 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 750 MHz Body Liquid****Dipole 750 MHz; Type: ALS-D-750-S-2; S/N: 177-00505**

Product Data

Device Name : Dipole 750 MHz
Serial No. : 177-00505
Type : Dipole
Model : ALS-D-750-S-2
Frequency Band : 750
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 8.337 W/kg
Power Drift-Finish : 8.547 W/kg
Power Drift (%) : 2.519

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Body
Serial No. : 270-02100
Frequency : 750.0 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 55.55 F/m
Sigma : 0.94 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 750
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 8.473 W/kg
10 gram SAR value : 5.322 W/kg
Area Scan Peak SAR : 8.820 W/kg
Zoom Scan Peak SAR : 17.598 W/kg

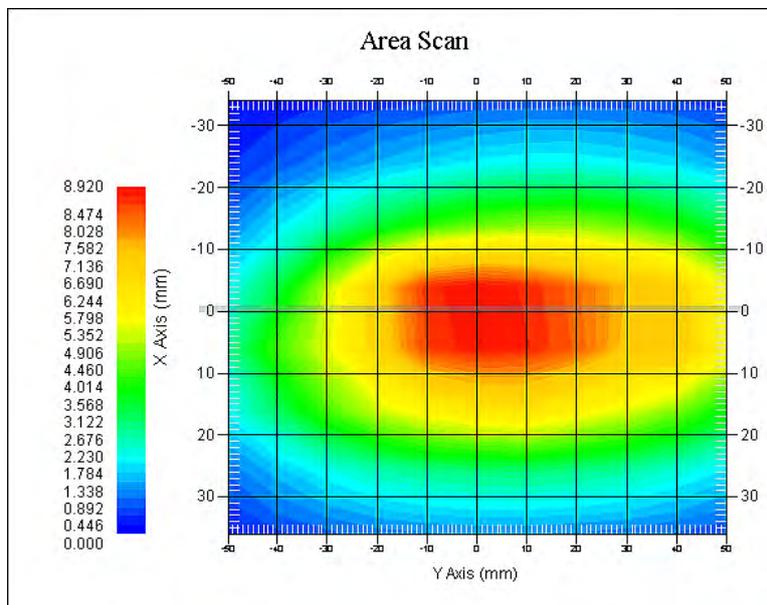

750 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 835 MHz Head Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency Band : 835
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 10.038 W/kg
Power Drift-Finish : 9.923 W/kg
Power Drift (%) : -1.061

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Head
Serial No. : 270-01002
Frequency : 835.0 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 41.02 F/m
Sigma : 0.92 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 10.030 W/kg
10 gram SAR value : 6.582 W/kg
Area Scan Peak SAR : 10.536 W/kg
Zoom Scan Peak SAR : 17.362 W/kg

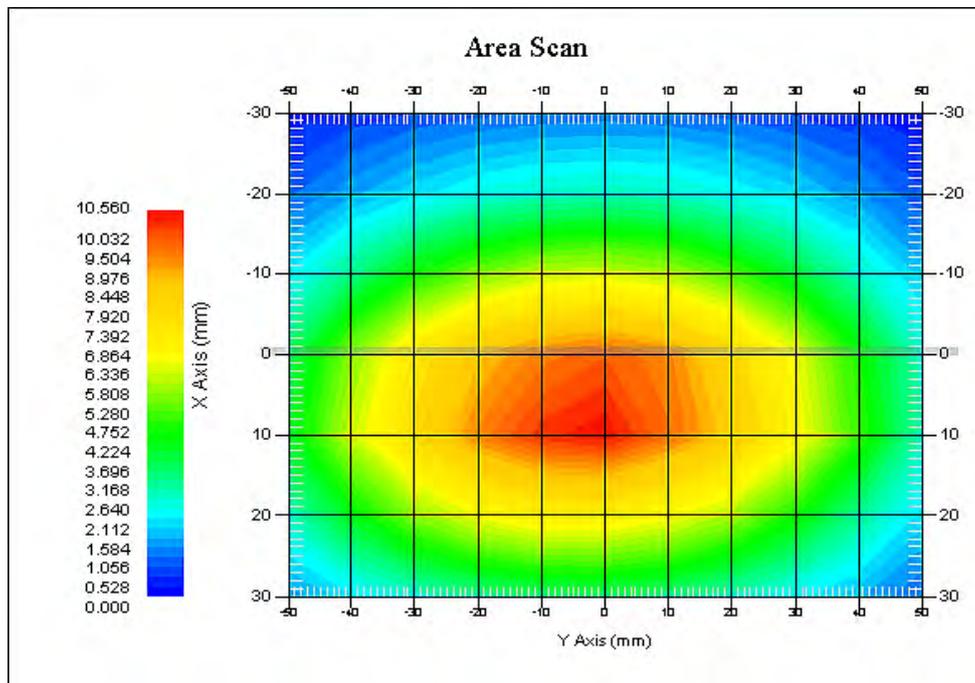

835 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 835 MHz Body Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency Band : 835
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 9.655 W/kg
Power Drift-Finish : 9.521 W/kg
Power Drift (%) : 1.379

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Body
Serial No. : 270-02101
Frequency : 835.0 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 53.86 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.782 W/kg
10 gram SAR value : 6.222 W/kg
Area Scan Peak SAR : 9.720 W/kg
Zoom Scan Peak SAR : 15.598 W/kg

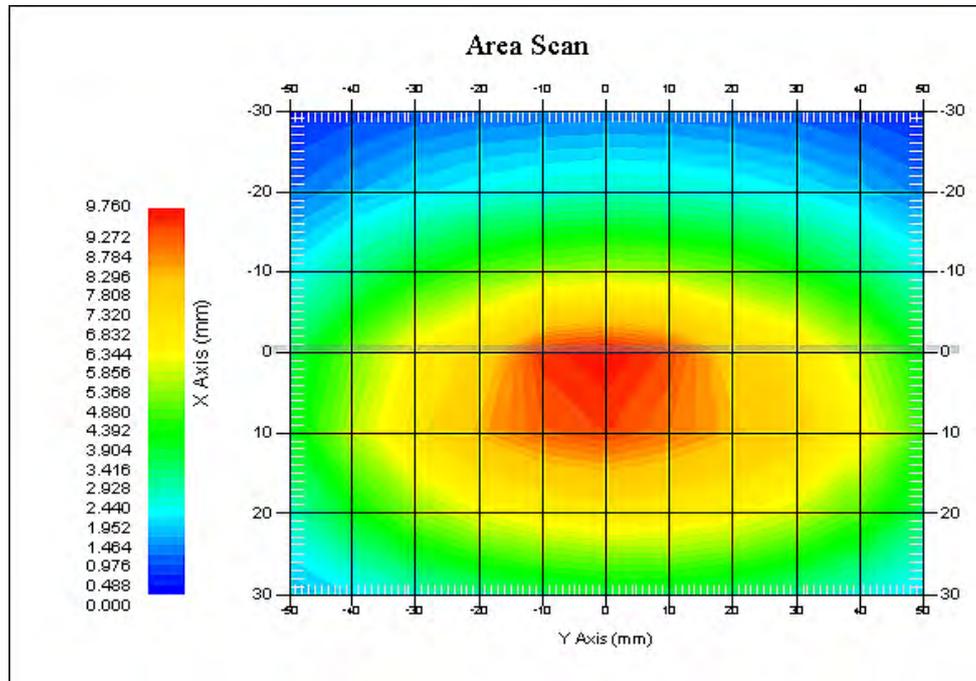

835 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1750 MHz Head Liquid****Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304**

Product Data

Device Name : Dipole 1750MHz
Serial No. : 198-00304
Type : Dipole
Model : ALS-D-1750-S-2
Frequency Band : 1700
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 32.132 W/kg
Power Drift-Finish : 32.831 W/kg
Power Drift (%) : 2.151

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 295-01101
Frequency : 1750.00 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 39.30 F/m
Sigma : 1.39 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1750
Duty Cycle Factor : 1
Conversion Factor : 5.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 36.957 W/kg
10 gram SAR value : 19.739 W/kg
Area Scan Peak SAR : 36.538 W/kg
Zoom Scan Peak SAR : 68.793 W/kg

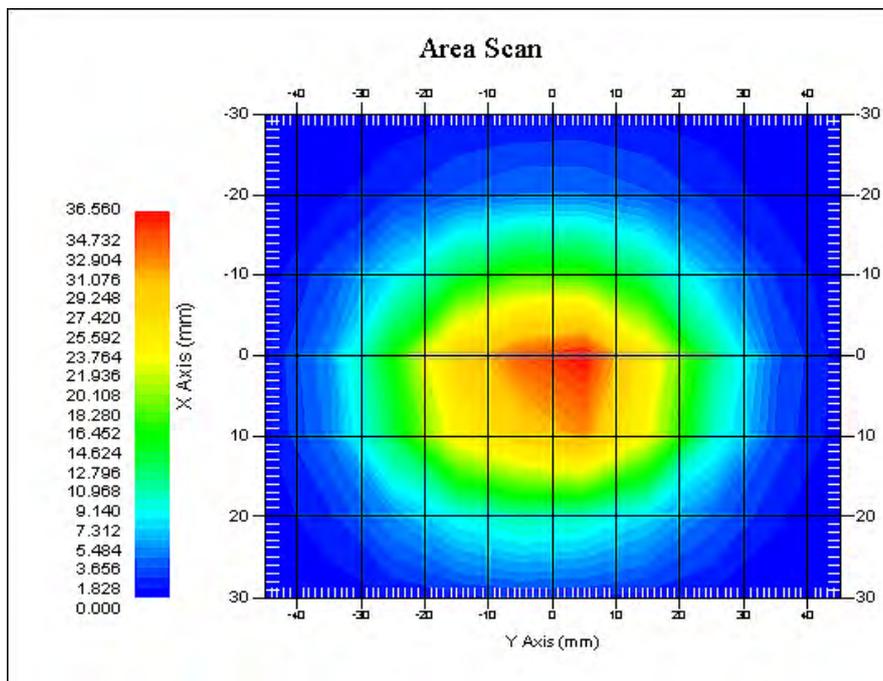

1750 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1750 MHz Body Liquid****Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304**

Product Data

Device Name : Dipole 1750MHz
Serial No. : 198-00304
Type : Dipole
Model : ALS-D-1750-S-2
Frequency Band : 1700
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 35.233 W/kg
Power Drift-Finish : 35.756 W/kg
Power Drift (%) : 1.426

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02105
Frequency : 1750.00 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 51.89 F/m
Sigma : 1.52 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1750
Duty Cycle Factor : 1
Conversion Factor : 5.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 36.875 W/kg
10 gram SAR value : 19.137 W/kg
Area Scan Peak SAR : 37.157 W/kg
Zoom Scan Peak SAR : 66.537 W/kg

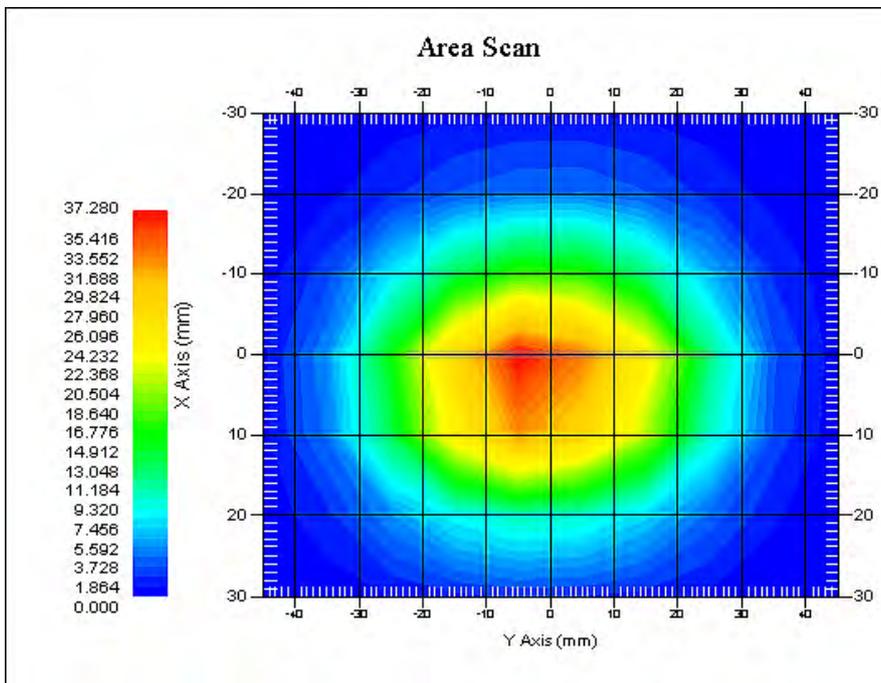

1750 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Head Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 37.862 W/kg
Power Drift-Finish : 37.331 W/kg
Power Drift (%) : -1.316

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 295-01103
Frequency : 1900.00 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 39.70 F/m
Sigma : 1.41 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 40.153 W/kg
 10 gram SAR value : 20.926 W/kg
 Area Scan Peak SAR : 42.010 W/kg
 Zoom Scan Peak SAR : 71.280 W/kg

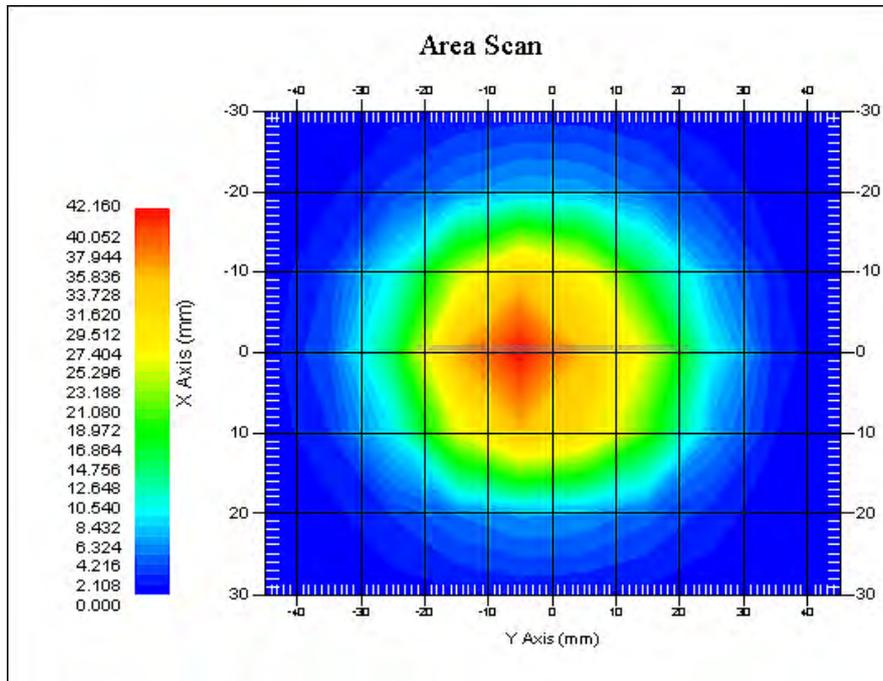

1900 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Body Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 38.436 W/kg
Power Drift-Finish : 38.899 W/kg
Power Drift (%) : 1.185

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02102
Frequency : 1900.00 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 52.04 F/m
Sigma : 1.52 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 39.886 W/kg
10 gram SAR value : 21.233 W/kg
Area Scan Peak SAR : 41.840 W/kg
Zoom Scan Peak SAR : 73.802 W/kg

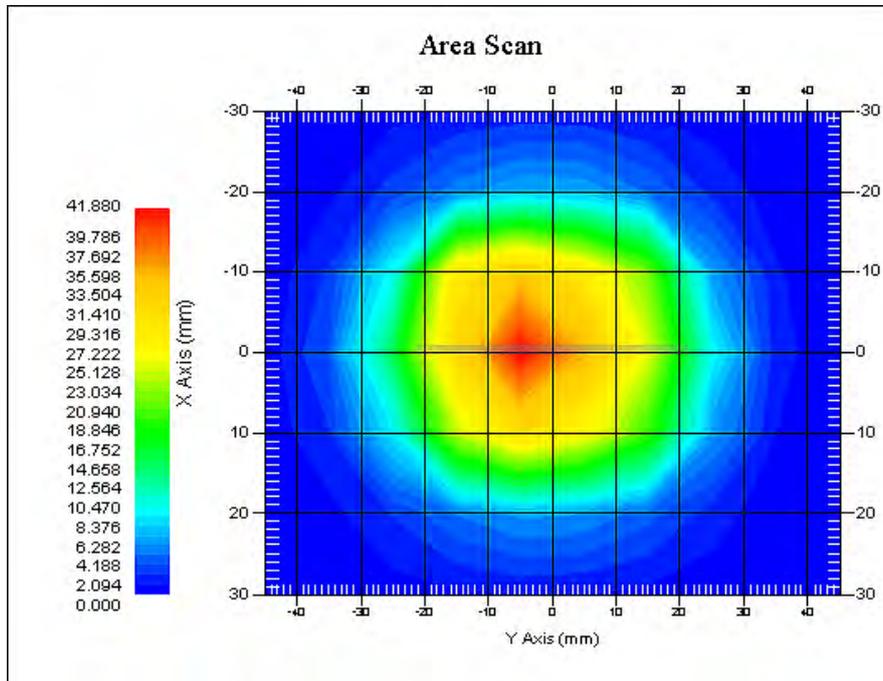

1900 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 2450 MHz Head Liquid****Dipole 2450 MHz; Type: ALS-D-2450-S-2; S/N: 220-00758**

Product Data

Device Name : Dipole 2450MHz
Serial No. : 220-00758
Type : Dipole
Model : ALS-D-2450-S-2
Frequency Band : 2450 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 48.374 W/kg
Power Drift-Finish : 49.269 W/kg
Power Drift (%) : 1.736

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 290-01109
Frequency : 2450.0 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 50.00 RH%
Epsilon : 39.61 F/m
Sigma : 1.80 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 53.976 W/kg
10 gram SAR value : 22.718 W/kg
Area Scan Peak SAR : 54.025 W/kg
Zoom Scan Peak SAR : 92.689 W/kg

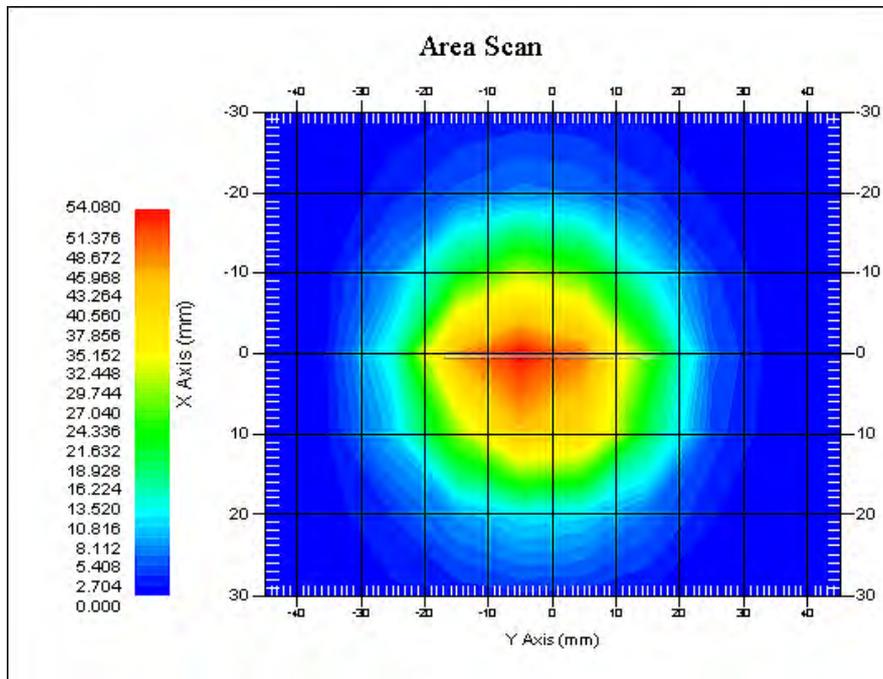

2450 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 2450 MHz Body Liquid****Dipole 2450 MHz; Type: ALS-D-2450-S-2; S/N: 220-00758**

Product Data

Device Name : Dipole 2450MHz
Serial No. : 220-00758
Type : Dipole
Model : ALS-D-2450-S-2
Frequency Band : 2450 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 54.355 W/kg
Power Drift-Finish : 52.986 W/kg
Power Drift (%) : 2.367

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : BODY
Serial No. : 290-01109
Frequency : 2450.0 MHz
Last Calib. Date : 23-Dec-2015
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 50.00 RH%
Epsilon : 51.74 F/m
Sigma : 1.90 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 8x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 52.526 W/kg
 10 gram SAR value : 23.711 W/kg
 Area Scan Peak SAR : 56.655 W/kg
 Zoom Scan Peak SAR : 95.396 W/kg

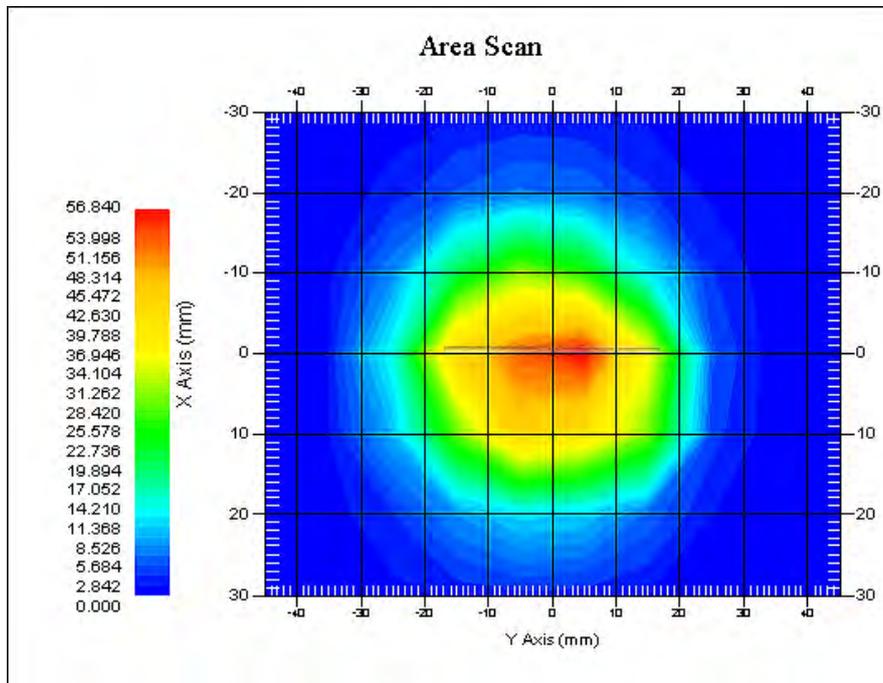


2450 MHz System Validation with Body Tissue

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

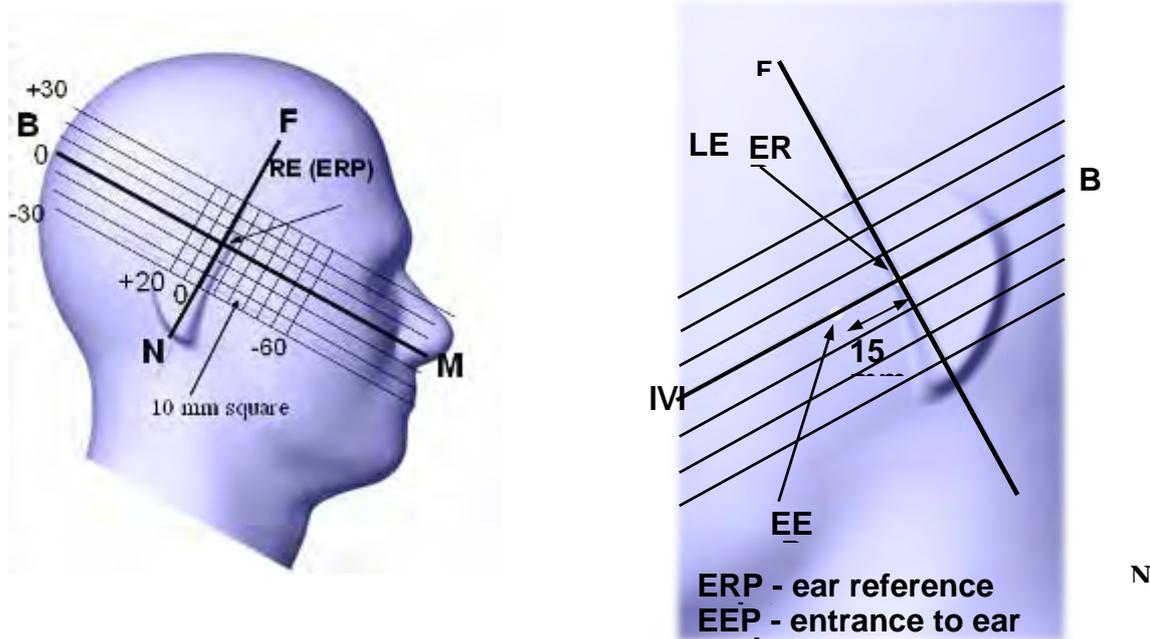

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

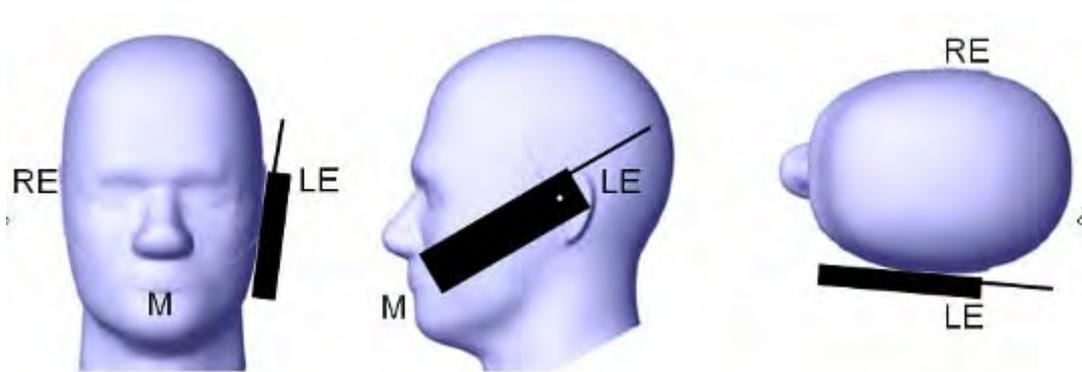

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

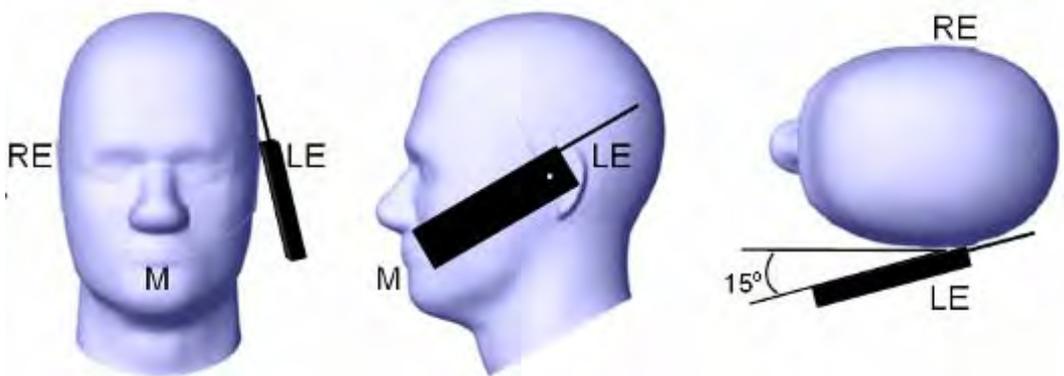

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

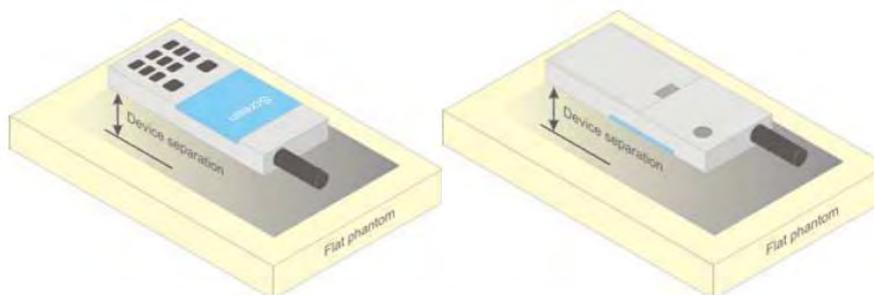


Figure 5 – Test positions for body-worn devices

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 447498 D01 General RF Exposure Guidance v05r02.
KDB 648474 D04 Handset SAR v01r02.
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
KDB 865664 D02 RF Exposure Reporting v01r01
KDB 941225 D01 3G SAR Procedures v03
KDB 941225 D05 SAR for LTE Devices v02r03
KDB 941225 D06 Hotspot Mode v02


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

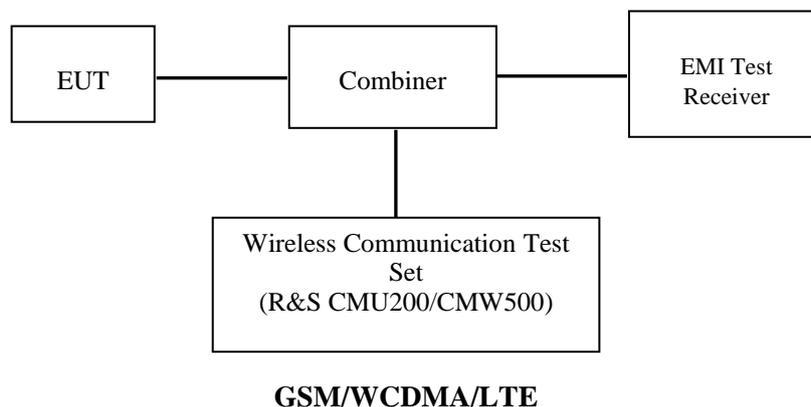

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set CMU200 & CMW500 for all Radio configurations.

GSM

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + only

MS Signal

> 33 dBm for GSM 850

> 30 dBm for PCS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

TCH > choose desired test channel

Hopping > Off

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
 Press Connection control to choose the different menus
 Press RESET > choose all the reset all settings
 Connection: Press Signal Off to turn off the signal and change settings
 Network Support > GSM + GPRS or GSM + EGSM
 Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off
 MS Signal: Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850
 > 30 dBm for GPRS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel
 Frequency Offset >+ 0 Hz
 Mode >BCCH and TCH
 BCCH Level >-85 dBm (May need to adjust if link is not stable)
 BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off
 P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping >Off
 Main Timeslot >3
 Network: Coding Scheme >CS4 (GPRS)
 Bit Stream >2E9-1 PSR Bit Stream
 AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection: Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta c / \beta d$	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	βc	2/15	12/15	15/15	15/15
	βd	15/15	15/15	8/15	4/15
	βd (SF)	64			
	$\beta c / \beta d$	2/15	12/15	15/8	15/4
	βhs	4/15	24/15	30/15	30/15
MPR(dB)	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$Ahs = \beta hs / \beta c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA A General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	βc	11/15	6/15	15/15	2/15	15/15
	βd	15/15	15/15	9/15	15/15	0
	βec	209/225	12/15	30/15	2/15	5/15
	$\beta c/ \beta d$	11/15	6/15	15/9	2/15	-
	βhs	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$Ahs = \beta hs / \beta c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
<p>Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.</p> <p>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).</p> <p>Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.</p> <p>Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.</p> <p>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.</p>											

DC-HSDPA

The following tests were conducted according to the test requirements in Table Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{BF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
<p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p>		

LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified subclauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in subclause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
				Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.2.2.1				
	6.6.3.2				
NS_32	-	-	-	-	-

Maximum Output Power among production units

Max Target Power for Production Unit (dBm)				
Mode/Band		Channel		
		Low	Middle	High
GSM 850		32.90	32.90	32.90
GPRS 1 TX Slot		32.60	32.60	32.60
GPRS 2 TX Slot		31.70	31.70	31.70
GPRS 3 TX Slot		29.80	29.80	29.80
GPRS 4 TX Slot		28.90	28.90	28.90
EDGE 1 TX Slot		26.80	26.80	26.80
EDGE 2 TX Slot		24.90	24.90	24.90
EDGE 3 TX Slot		22.90	22.90	22.90
EDGE 4 TX Slot		21.20	21.20	21.20
PCS 1900		29.80	29.80	29.80
GPRS 1 TX Slot		28.90	28.90	28.90
GPRS 2 TX Slot		27.60	27.60	27.60
GPRS 3 TX Slot		26.20	26.20	26.20
GPRS 4 TX Slot		24.40	24.40	24.40
EDGE 1 TX Slot		25.70	25.70	25.70
EDGE 2 TX Slot		23.90	23.90	23.90
EDGE 3 TX Slot		22.30	22.30	22.30
EDGE 4 TX Slot		20.60	20.60	20.60
WCDMA 850	RMC	22.70	22.70	22.70
	HSDPA	21.80	21.80	21.80
	HSUPA	21.70	21.70	21.70
	DC-HSDPA	21.70	21.70	21.70
	HSPA+	21.60	21.60	21.60
WCDMA 1700	RMC	22.90	22.90	22.90
	HSDPA	22.20	22.20	22.20
	HSUPA	22.10	22.10	22.10
	DC-HSDPA	22.10	22.10	22.10
	HSPA+	22.00	22.00	22.00
WCDMA 1900	RMC	22.80	22.80	22.80
	HSDPA	22.00	22.00	22.00
	HSUPA	22.10	22.10	22.10
	DC-HSDPA	22.00	22.00	22.00
	HSPA+	22.00	22.00	22.00
LTE Band 2		22.80	22.80	22.80
LTE Band 4		23.00	23.00	23.00
LTE Band 5		23.00	23.00	23.00
LTE Band 7		22.90	22.90	22.90
LTE Band 17		22.90	22.90	22.90
Wi-Fi(b/g/n20)		9.50	9.50	9.50
Wi-Fi(n40)		9.50	9.50	9.50
Bluetooth		5.40	5.40	5.40
BLE		-1.90	-1.90	-1.90

Test Results:

GSM:

Band	Channel No.	Frequency (MHz)	Conducted Output Power	
			Meas. Power (dBm)	Meas. Power (W)
GSM 850	128	824.2	32.76	1.888
	190	836.6	32.89	1.945
	251	848.8	32.62	1.828
PCS 1900	512	1850.2	29.34	0.859
	661	1880.0	29.47	0.885
	810	1909.8	29.76	0.946

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	32.37	31.67	29.73	28.78
	190	836.6	32.58	31.50	29.66	28.66
	251	848.8	32.50	31.48	29.79	28.87
PCS 1900	512	1850.2	28.86	27.50	26.10	24.38
	661	1880.0	28.81	27.58	26.01	24.39
	810	1909.8	28.75	27.39	26.05	24.38

EGPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	26.25	24.88	22.40	21.04
	190	836.6	26.75	24.22	22.82	21.18
	251	848.8	26.22	24.85	22.53	21.11
PCS 1900	512	1850.2	25.24	23.75	22.17	20.49
	661	1880.0	25.68	23.56	22.13	20.51
	810	1909.8	25.35	23.81	22.23	20.48

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	23.37	25.67	25.48	25.78
	190	836.6	23.58	25.50	25.41	25.66
	251	848.8	23.50	25.48	25.54	25.87
PCS 1900	512	1850.2	19.86	21.50	21.85	21.38
	661	1880.0	19.81	21.58	21.76	21.39
	810	1909.8	19.75	21.39	21.80	21.38

The time based average power for EGPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	17.25	18.88	18.15	18.04
	190	836.6	17.75	18.22	18.57	18.18
	251	848.8	17.22	18.85	18.28	18.11
PCS 1900	512	1850.2	16.24	17.75	17.92	17.49
	661	1880.0	16.68	17.56	17.88	17.51
	810	1909.8	16.35	17.81	17.98	17.48

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. For EGPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 6(850 MHz band) and 5(1900 MHz band).
5. According to KDB941225D01-SAR for GPRS and EDGE modes are not required when the source-based time-averaged output power for each data mode is lower than that in the normal GSM voice mode

WCDMA 850

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.44	22.57	22.65
	HSDPA	1	21.67	21.74	21.53
		2	21.54	21.64	21.48
		3	21.46	21.59	21.46
		4	21.43	21.52	21.41
	HSUPA	1	21.54	21.69	21.57
		2	21.46	21.66	21.55
		3	21.44	21.57	21.51
		4	21.41	21.54	21.42
		5	21.35	21.48	21.37
	DC-HSDPA	1	21.38	21.62	21.45
		2	21.32	21.53	21.42
		3	21.26	21.49	21.36
		4	21.21	21.32	21.31
	HSPA+ (16QAM)	1	21.58	21.41	21.52

WCDMA 1700

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.69	22.82	22.13
	HSDPA	1	22.12	22.05	21.70
		2	22.06	21.94	21.65
		3	21.97	21.81	21.68
		4	21.89	21.77	21.62
	HSUPA	1	22.01	22.00	21.59
		2	21.94	21.94	21.55
		3	21.85	21.87	21.60
		4	21.74	21.80	21.54
		5	21.68	21.68	21.51
	DC-HSDPA	1	22.01	21.95	21.43
		2	21.94	21.93	21.50
		3	21.88	21.88	21.48
		4	21.79	21.78	21.44
	HSPA+ (16QAM)	1	21.90	21.95	21.64

WCDMA 1900

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.64	22.79	22.68
	HSDPA	1	21.93	21.94	21.92
		2	21.87	21.82	21.89
		3	21.79	21.76	21.81
		4	21.68	21.65	21.76
	HSUPA	1	22.08	22.07	22.09
		2	22.01	21.98	22.02
		3	21.94	21.91	21.96
		4	21.89	21.87	21.87
		5	21.78	21.76	21.76
	DC-HSDPA	1	21.94	21.84	21.97
		2	21.85	21.81	21.90
		3	21.71	21.72	21.84
		4	21.64	21.62	21.76
	HSPA+ (16QAM)	1	21.84	21.89	21.92

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1850.7MHz	1880MHz	1909.3MHz
1.4M	QPSK	RB Size=1, RB Offset=0	0	0	22.63	22.67	22.49
		RB Size=1, RB Offset=2	0	0	22.72	22.65	22.49
		RB Size=1, RB Offset=5	0	0	22.73	22.64	22.41
		RB Size=3, RB Offset=0	1	1	22.24	22.65	22.54
		RB Size=3, RB Offset=1	1	1	22.23	22.56	22.39
		RB Size=3, RB Offset=2	1	1	22.23	22.42	22.24
		RB Size=6, RB Offset=0	1	1	22.17	22.14	22.12
	16QAM	RB Size=1, RB Offset=0	1	1	22.11	22.15	22.13
		RB Size=1, RB Offset=2	1	1	22.03	22.06	22.07
		RB Size=1, RB Offset=5	1	1	22.07	22.06	22.04
		RB Size=3, RB Offset=0	2	2	21.60	21.68	21.54
		RB Size=3, RB Offset=1	2	2	21.35	21.57	21.80
		RB Size=3, RB Offset=2	2	2	21.57	21.71	21.75
		RB Size=6, RB Offset=0	2	2	21.09	21.11	21.17

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1851.5MHz	1880MHz	1908.5MHz
3M	QPSK	RB Size=1, RB Offset=0	0	0	22.46	22.21	22.51
		RB Size=1, RB Offset=7	0	0	22.41	22.41	22.16
		RB Size=1, RB Offset=14	0	0	22.32	22.37	22.00
		RB Size=8, RB Offset=0	1	1	22.02	21.95	21.88
		RB Size=8, RB Offset=4	1	1	21.95	21.99	21.88
		RB Size=8, RB Offset=7	1	1	21.83	21.77	21.73
	16QAM	RB Size=15, RB Offset=0	1	1	20.99	20.99	20.93
		RB Size=1, RB Offset=0	1	1	21.79	21.88	21.85
		RB Size=1, RB Offset=7	1	1	21.68	21.79	21.66
		RB Size=1, RB Offset=14	1	1	21.66	21.73	21.82
		RB Size=8, RB Offset=0	2	2	21.63	21.42	21.43
		RB Size=8, RB Offset=4	2	2	21.90	21.17	21.39
		RB Size=8, RB Offset=7	2	2	21.62	21.52	21.55
		RB Size=15, RB Offset=0	2	2	20.88	20.83	20.67
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1852.5MHz	1880MHz	1907.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	22.87	22.14	22.53
		RB Size=1, RB Offset=12	0	0	22.66	22.41	22.03
		RB Size=1, RB Offset=24	0	0	22.47	22.37	22.19
		RB Size=12, RB Offset=0	1	1	21.55	21.51	21.52
		RB Size=12, RB Offset=6	1	1	21.84	21.30	21.75
		RB Size=12, RB Offset=11	1	1	21.53	21.28	21.52
	16QAM	RB Size=25, RB Offset=0	1	1	20.88	20.83	20.78
		RB Size=1, RB Offset=0	1	1	21.77	21.42	21.81
		RB Size=1, RB Offset=12	1	1	21.81	21.25	21.69
		RB Size=1, RB Offset=24	1	1	21.15	21.12	21.79
		RB Size=12, RB Offset=0	2	2	21.56	21.26	21.08
		RB Size=12, RB Offset=6	2	2	21.36	21.40	21.12
		RB Size=12, RB Offset=11	2	2	21.37	20.90	21.07
		RB Size=25, RB Offset=0	2	2	20.65	20.60	20.47
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1855MHz	1880MHz	1905MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	22.48	22.37	22.11
		RB Size=1, RB Offset=24	0	0	22.75	22.69	22.71
		RB Size=1, RB Offset=49	0	0	22.32	22.08	22.23
		RB Size=25, RB Offset=0	1	1	21.84	21.49	21.44
		RB Size=25, RB Offset=12	1	1	21.98	21.47	21.61
		RB Size=25, RB Offset=24	1	1	21.85	21.43	21.65
	16QAM	RB Size=50, RB Offset=0	1	1	21.35	21.13	21.21
		RB Size=1, RB Offset=0	1	1	22.30	22.03	22.14
		RB Size=1, RB Offset=24	1	1	22.11	22.11	22.01
		RB Size=1, RB Offset=49	1	1	22.03	22.13	22.06
		RB Size=25, RB Offset=0	2	2	21.64	21.40	21.01

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1857.5MHz	1880MHz	1902.5MHz
		RB Size=25, RB Offset=12	2	2	21.49	21.51	21.15
		RB Size=25, RB Offset=24	2	2	21.47	21.35	21.07
		RB Size=50, RB Offset=0	2	2	20.52	20.30	20.13
15M	QPSK	RB Size=1, RB Offset=0	0	0	22.25	22.25	22.32
		RB Size=1, RB Offset=37	0	0	22.25	22.35	22.34
		RB Size=1, RB Offset=74	0	0	22.08	22.22	22.52
		RB Size=36, RB Offset=0	1	1	21.79	21.77	21.80
		RB Size=36, RB Offset=18	1	1	21.71	21.88	21.79
		RB Size=36, RB Offset=37	1	1	21.46	21.86	21.98
	16QAM	RB Size=75, RB Offset=0	1	1	21.50	20.74	20.82
		RB Size=1, RB Offset=0	1	1	22.13	21.62	21.80
		RB Size=1, RB Offset=37	1	1	22.11	21.34	21.53
		RB Size=1, RB Offset=74	1	1	22.00	21.29	21.68
		RB Size=36, RB Offset=0	2	2	21.41	20.38	20.77
		RB Size=36, RB Offset=18	2	2	21.54	20.78	20.94
		RB Size=36, RB Offset=37	2	2	21.45	20.63	20.86
		RB Size=75, RB Offset=0	2	2	20.67	20.14	19.99
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1860MHz	1880MHz	1900MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	22.21	21.78	22.01
		RB Size=1, RB Offset=49	0	0	22.35	21.96	22.35
		RB Size=1, RB Offset=99	0	0	22.30	22.17	22.76
		RB Size=50, RB Offset=0	1	1	21.62	21.18	21.81
		RB Size=50, RB Offset=24	1	1	21.45	21.30	21.94
		RB Size=50, RB Offset=49	1	1	22.66	21.55	21.63
	16QAM	RB Size=100, RB Offset=0	1	1	21.46	20.75	20.82
		RB Size=1, RB Offset=0	1	1	21.89	21.72	21.89
		RB Size=1, RB Offset=49	1	1	22.10	21.55	21.76
		RB Size=1, RB Offset=99	1	1	21.93	21.55	21.95
		RB Size=50, RB Offset=0	2	2	21.31	20.86	20.98
		RB Size=50, RB Offset=24	2	2	21.24	21.08	21.07
		RB Size=50, RB Offset=49	2	2	21.18	21.00	20.92
		RB Size=100, RB Offset=0	2	2	20.24	20.39	20.39

LTE Band 4:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1710.7MHz	1732.5MHz	1754.3MHz
1.4M	QPSK	RB Size=1, RB Offset=0	0	0	22.37	22.43	22.29
		RB Size=1, RB Offset=2	0	0	22.46	22.41	22.24
		RB Size=1, RB Offset=5	0	0	22.49	22.44	22.23
		RB Size=3, RB Offset=0	1	1	22.04	22.43	21.62
		RB Size=3, RB Offset=1	1	1	21.89	22.34	21.71

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					1711.5MHz	1732.5MHz	1753.5MHz
	16QAM	RB Size=3, RB Offset=2	1	1	21.65	22.32	21.64
		RB Size=6, RB Offset=0	1	1	21.03	21.33	21.03
		RB Size=1, RB Offset=0	1	1	22.02	22.14	21.75
		RB Size=1, RB Offset=2	1	1	22.24	21.47	21.62
		RB Size=1, RB Offset=5	1	1	22.14	22.17	21.52
		RB Size=3, RB Offset=0	2	2	21.52	22.19	21.17
		RB Size=3, RB Offset=1	2	2	21.28	22.19	21.44
		RB Size=3, RB Offset=2	2	2	21.52	22.12	21.41
		RB Size=6, RB Offset=0	2	2	20.72	20.37	20.81
3M	QPSK	RB Size=1, RB Offset=0	0	0	22.18	21.95	22.29
		RB Size=1, RB Offset=7	0	0	22.14	22.16	21.95
		RB Size=1, RB Offset=14	0	0	22.08	22.15	21.82
		RB Size=8, RB Offset=0	1	1	21.74	21.69	21.66
		RB Size=8, RB Offset=4	1	1	21.68	21.74	21.67
		RB Size=8, RB Offset=7	1	1	21.54	21.50	21.50
	16QAM	RB Size=15, RB Offset=0	1	1	20.75	20.77	20.75
		RB Size=1, RB Offset=0	1	1	22.08	21.62	21.63
		RB Size=1, RB Offset=7	1	1	22.15	21.56	21.47
		RB Size=1, RB Offset=14	1	1	22.13	21.48	21.61
		RB Size=8, RB Offset=0	2	2	21.36	21.17	21.22
		RB Size=8, RB Offset=4	2	2	21.63	20.92	21.18
		RB Size=8, RB Offset=7	2	2	21.36	21.28	21.35
		RB Size=15, RB Offset=0	2	2	20.61	20.58	20.46
		5M	QPSK	RB Size=1, RB Offset=0	0	0	22.61
RB Size=1, RB Offset=12	0			0	22.41	21.77	21.84
RB Size=1, RB Offset=24	0			0	22.19	19.78	21.97
RB Size=12, RB Offset=0	1			1	21.27	21.25	21.30
RB Size=12, RB Offset=6	1			1	21.59	21.07	21.56
RB Size=12, RB Offset=11	1			1	21.26	21.03	21.31
16QAM	RB Size=25, RB Offset=0		1	1	20.62	20.59	20.58
	RB Size=1, RB Offset=0		1	1	21.47	21.14	21.57
	RB Size=1, RB Offset=12		1	1	21.58	21.04	21.52
	RB Size=1, RB Offset=24		1	1	20.90	20.89	21.60
	RB Size=12, RB Offset=0		2	2	21.27	20.99	20.85
	RB Size=12, RB Offset=6		2	2	21.10	21.16	20.92
	RB Size=12, RB Offset=11		2	2	21.08	20.63	20.84
	RB Size=25, RB Offset=0		2	2	20.41	20.38	20.29
	10M		QPSK	RB Size=1, RB Offset=0	0	0	22.18
RB Size=1, RB Offset=24		0		0	22.50	21.71	21.87

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)				
					Low Channel	Mid Channel	High Channel		
					1717.5MHz	1732.5MHz	1747.5MHz		
		RB Size=1, RB Offset=49	0	0	22.02	21.80	21.99		
		RB Size=25, RB Offset=0	1	1	21.56	21.23	21.22		
		RB Size=25, RB Offset=12	1	1	21.75	21.26	21.44		
		RB Size=25, RB Offset=24	1	1	21.57	21.17	21.43		
		RB Size=50, RB Offset=0	1	1	21.09	20.58	20.62		
	16QAM	RB Size=1, RB Offset=0	1	1	22.03	21.69	21.52		
		RB Size=1, RB Offset=24	1	1	21.86	21.61	21.59		
		RB Size=1, RB Offset=49	1	1	20.84	21.38	21.44		
		RB Size=25, RB Offset=0	2	2	21.38	21.16	20.81		
		RB Size=25, RB Offset=12	2	2	21.17	21.21	20.89		
		RB Size=25, RB Offset=24	2	2	20.27	20.37	20.82		
		RB Size=50, RB Offset=0	2	2	20.26	20.06	19.93		
		15M	QPSK	RB Size=1, RB Offset=0	0	0	22.01	22.02	22.13
				RB Size=1, RB Offset=37	0	0	21.96	22.08	22.11
RB Size=1, RB Offset=74	0			0	21.85	22.01	22.35		
RB Size=36, RB Offset=0	1			1	21.50	21.50	21.57		
RB Size=36, RB Offset=18	1			1	21.45	21.64	21.59		
RB Size=36, RB Offset=37	1			1	21.22	21.64	21.80		
RB Size=75, RB Offset=0	1			1	21.23	20.49	20.61		
16QAM	RB Size=1, RB Offset=0		1	1	21.84	21.35	21.57		
	RB Size=1, RB Offset=37		1	1	21.84	21.09	21.32		
	RB Size=1, RB Offset=74		1	1	21.73	21.04	21.47		
	RB Size=36, RB Offset=0		2	2	21.14	20.13	20.56		
	RB Size=36, RB Offset=18		2	2	21.29	20.55	20.75		
	RB Size=36, RB Offset=37		2	2	21.20	20.40	20.67		
	RB Size=75, RB Offset=0		2	2	20.42	19.91	19.80		
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)				
					Low Channel	Mid Channel	High Channel		
					1720MHz	1732.5MHz	1745MHz		
20M	QPSK	RB Size=1, RB Offset=0	0	0	21.95	21.54	21.81		
		RB Size=1, RB Offset=49	0	0	22.08	21.71	22.14		
		RB Size=1, RB Offset=99	0	0	22.04	21.93	22.97		
		RB Size=50, RB Offset=0	1	1	21.38	20.96	21.63		
		RB Size=50, RB Offset=24	1	1	21.19	21.06	21.74		
		RB Size=50, RB Offset=49	1	1	22.38	21.29	21.41		
		RB Size=100, RB Offset=0	1	1	21.18	20.49	20.60		
	16QAM	RB Size=1, RB Offset=0	1	1	21.60	21.45	21.66		
		RB Size=1, RB Offset=49	1	1	21.81	21.28	21.53		
		RB Size=1, RB Offset=99	1	1	21.66	21.30	21.74		
		RB Size=50, RB Offset=0	2	2	21.04	20.61	20.77		
		RB Size=50, RB Offset=24	2	2	20.96	20.82	20.85		
		RB Size=50, RB Offset=49	2	2	20.88	20.72	20.68		
		RB Size=100, RB Offset=0	2	2	19.99	20.16	20.20		

LTE Band 5:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					824.7MHz	836.5MHz	848.3MHz
1.4M	QPSK	RB Size=1, RB Offset=0	0	0	23.09	22.93	22.87
		RB Size=1, RB Offset=2	0	0	23.04	22.99	22.83
		RB Size=1, RB Offset=5	0	0	22.81	23.02	22.73
		RB Size=3, RB Offset=0	1	1	22.28	22.07	22.31
		RB Size=3, RB Offset=1	1	1	22.35	22.39	21.82
		RB Size=3, RB Offset=2	1	1	22.17	22.32	22.10
	16QAM	RB Size=6, RB Offset=0	1	1	21.73	21.81	21.57
		RB Size=1, RB Offset=0	1	1	22.32	22.40	22.29
		RB Size=1, RB Offset=2	1	1	22.37	22.30	21.96
		RB Size=1, RB Offset=5	1	1	22.19	22.59	22.02
		RB Size=3, RB Offset=0	2	2	21.60	21.36	21.37
		RB Size=3, RB Offset=1	2	2	21.16	21.26	21.12
		RB Size=3, RB Offset=2	2	2	21.29	21.51	21.09
		RB Size=6, RB Offset=0	2	2	21.72	20.68	20.62
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					825.5MHz	836.5MHz	847.5MHz
3M	QPSK	RB Size=1, RB Offset=0	0	0	22.85	23.02	22.60
		RB Size=1, RB Offset=7	0	0	22.75	22.78	22.56
		RB Size=1, RB Offset=14	0	0	22.69	22.95	22.75
		RB Size=8, RB Offset=0	1	1	22.70	22.41	21.76
		RB Size=8, RB Offset=4	1	1	22.50	22.32	22.11
		RB Size=8, RB Offset=7	1	1	22.37	22.31	21.94
	16QAM	RB Size=15, RB Offset=0	1	1	21.76	21.97	21.37
		RB Size=1, RB Offset=0	1	1	22.35	22.20	22.20
		RB Size=1, RB Offset=7	1	1	22.01	22.40	22.32
		RB Size=1, RB Offset=14	1	1	22.20	22.41	22.12
		RB Size=8, RB Offset=0	2	2	21.34	21.57	21.01
		RB Size=8, RB Offset=4	2	2	21.40	21.23	20.94
		RB Size=8, RB Offset=7	2	2	21.43	21.33	20.95
		RB Size=15, RB Offset=0	2	2	20.53	20.80	20.45
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					826.5MHz	836.5MHz	846.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	22.93	22.83	22.65
		RB Size=1, RB Offset=12	0	0	22.97	22.67	22.46
		RB Size=1, RB Offset=24	0	0	22.86	22.68	22.79
		RB Size=12, RB Offset=0	1	1	22.21	22.38	21.93
		RB Size=12, RB Offset=6	1	1	22.46	22.12	22.08
		RB Size=12, RB Offset=11	1	1	22.20	22.20	21.89
		RB Size=25, RB Offset=0	1	1	21.69	21.67	21.34
	16QAM	RB Size=1, RB Offset=0	1	1	22.26	22.29	22.01

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					844MHz	836.5MHz	829MHz
		RB Size=1, RB Offset=12	1	1	22.45	22.21	22.10
		RB Size=1, RB Offset=24	1	1	22.44	22.67	21.93
		RB Size=12, RB Offset=0	2	2	21.43	21.40	20.95
		RB Size=12, RB Offset=6	2	2	21.11	21.57	21.09
		RB Size=12, RB Offset=11	2	2	21.22	21.63	20.86
		RB Size=25, RB Offset=0	2	2	20.68	20.91	20.63
10M	QPSK	RB Size=1, RB Offset=0	0	0	22.83	22.62	22.04
		RB Size=1, RB Offset=24	0	0	22.85	22.98	22.25
		RB Size=1, RB Offset=49	0	0	22.86	22.72	21.95
		RB Size=25, RB Offset=0	1	1	22.05	22.37	21.62
		RB Size=25, RB Offset=12	1	1	22.34	22.50	21.78
		RB Size=25, RB Offset=24	1	1	22.12	22.49	21.74
	16QAM	RB Size=50, RB Offset=0	1	1	21.65	21.66	21.15
		RB Size=1, RB Offset=0	1	1	22.46	22.13	21.99
		RB Size=1, RB Offset=24	1	1	22.30	22.01	21.82
		RB Size=1, RB Offset=49	1	1	22.24	22.19	22.00
		RB Size=25, RB Offset=0	2	2	21.46	21.74	21.24
		RB Size=25, RB Offset=12	2	2	21.68	21.71	21.35
		RB Size=25, RB Offset=24	2	2	21.65	21.89	21.46
		RB Size=50, RB Offset=0	2	2	20.31	20.80	20.57

LTE Band 7:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2502.5MHz	2535MHz	2567.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	22.57	22.61	22.38
		RB Size=1, RB Offset=12	0	0	22.64	22.45	22.23
		RB Size=1, RB Offset=24	0	0	22.52	22.45	22.51
		RB Size=12, RB Offset=0	1	1	21.85	22.17	21.68
		RB Size=12, RB Offset=6	1	1	22.11	21.91	21.85
		RB Size=12, RB Offset=11	1	1	21.82	21.98	21.65
	16QAM	RB Size=25, RB Offset=0	1	1	21.35	21.44	21.11
		RB Size=1, RB Offset=0	1	1	21.88	22.05	21.75
		RB Size=1, RB Offset=12	1	1	22.09	22.01	21.84
		RB Size=1, RB Offset=24	1	1	22.01	22.45	21.72
		RB Size=12, RB Offset=0	2	2	21.07	21.17	20.72
		RB Size=12, RB Offset=6	2	2	20.74	21.31	20.83
		RB Size=12, RB Offset=11	2	2	20.87	21.41	20.60
		RB Size=25, RB Offset=0	2	2	20.35	20.69	20.37
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					2505MHz	2535MHz	2565MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	22.47	22.37	21.81
		RB Size=1, RB Offset=24	0	0	22.51	22.78	22.01

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)				
					Low Channel	Mid Channel	High Channel		
					2507.5MHz	2535MHz	2562.5MHz		
		RB Size=1, RB Offset=49	0	0	22.49	22.48	21.70		
		RB Size=25, RB Offset=0	1	1	21.73	22.12	21.39		
		RB Size=25, RB Offset=12	1	1	21.99	22.28	21.53		
		RB Size=25, RB Offset=24	1	1	21.75	22.22	21.49		
		RB Size=50, RB Offset=0	1	1	21.32	21.44	20.92		
	16QAM	RB Size=1, RB Offset=0	1	1	22.15	21.91	21.77		
		RB Size=1, RB Offset=24	1	1	21.92	21.80	21.59		
		RB Size=1, RB Offset=49	1	1	21.88	21.95	21.75		
		RB Size=25, RB Offset=0	2	2	21.08	21.51	20.99		
		RB Size=25, RB Offset=12	2	2	21.31	21.48	21.07		
		RB Size=25, RB Offset=24	2	2	21.27	21.64	21.24		
		RB Size=50, RB Offset=0	2	2	19.95	20.55	20.32		
		15M	QPSK	RB Size=1, RB Offset=0	0	0	22.76	22.99	22.01
				RB Size=1, RB Offset=37	0	0	22.76	22.99	22.14
RB Size=1, RB Offset=74	0			0	22.80	22.89	22.35		
RB Size=36, RB Offset=0	1			1	21.87	22.16	21.11		
RB Size=36, RB Offset=18	1			1	22.10	21.97	21.01		
RB Size=36, RB Offset=37	1			1	22.18	22.06	21.25		
RB Size=75, RB Offset=0	1			1	21.42	21.46	20.70		
16QAM	RB Size=1, RB Offset=0		1	1	21.91	21.75	21.87		
	RB Size=1, RB Offset=37		1	1	22.04	22.05	21.67		
	RB Size=1, RB Offset=74		1	1	21.88	21.70	21.42		
	RB Size=36, RB Offset=0		2	2	20.98	21.30	21.16		
	RB Size=36, RB Offset=18		2	2	20.90	21.33	20.94		
	RB Size=36, RB Offset=37		2	2	20.82	21.40	20.93		
	RB Size=75, RB Offset=0		2	2	19.92	20.74	20.34		
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)				
					Low Channel	Mid Channel	High Channel		
					2510MHz	2535MHz	2560MHz		
20M	QPSK	RB Size=1, RB Offset=0	0	0	22.35	22.79	22.04		
		RB Size=1, RB Offset=49	0	0	22.50	22.84	21.99		
		RB Size=1, RB Offset=99	0	0	22.64	22.84	22.15		
		RB Size=50, RB Offset=0	1	1	22.23	22.17	21.29		
		RB Size=50, RB Offset=24	1	1	21.89	21.72	21.45		
		RB Size=50, RB Offset=49	1	1	21.91	21.36	21.52		
		RB Size=100, RB Offset=0	1	1	21.33	20.60	20.62		
	16QAM	RB Size=1, RB Offset=0	1	1	21.99	21.70	21.53		
		RB Size=1, RB Offset=49	1	1	21.95	21.97	21.64		
		RB Size=1, RB Offset=99	1	1	21.72	21.81	21.86		
		RB Size=50, RB Offset=0	2	2	21.10	21.08	20.68		
		RB Size=50, RB Offset=24	2	2	20.91	20.97	20.59		
		RB Size=50, RB Offset=49	2	2	21.02	20.97	21.00		
		RB Size=100, RB Offset=0	2	2	20.29	20.78	19.95		

LTE Band 17:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					706.5 MHz	710 MHz	713.5 MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	22.96	22.76	22.73
		RB Size=1, RB Offset=12	0	0	22.98	22.57	22.56
		RB Size=1, RB Offset=24	0	0	22.84	22.56	22.86
		RB Size=12, RB Offset=0	1	1	22.25	22.25	21.91
		RB Size=12, RB Offset=6	1	1	22.49	22.31	22.17
		RB Size=12, RB Offset=11	1	1	22.35	22.11	21.96
		RB Size=25, RB Offset=0	1	1	21.69	21.54	21.42
	16QAM	RB Size=1, RB Offset=0	1	1	22.27	22.15	22.10
		RB Size=1, RB Offset=12	1	1	22.48	22.12	22.16
		RB Size=1, RB Offset=24	1	1	22.42	22.57	22.03
		RB Size=12, RB Offset=0	2	2	21.44	21.29	21.05
		RB Size=12, RB Offset=6	2	2	21.10	21.46	21.15
		RB Size=12, RB Offset=11	2	2	21.26	21.52	20.97
		RB Size=25, RB Offset=0	2	2	20.70	20.79	20.71
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Mid Channel	High Channel
					709 MHz	710 MHz	711 MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	22.83	22.48	22.11
		RB Size=1, RB Offset=24	0	0	22.87	22.88	22.33
		RB Size=1, RB Offset=49	0	0	22.85	22.58	22.05
		RB Size=25, RB Offset=0	1	1	22.08	22.23	21.69
		RB Size=25, RB Offset=12	1	1	22.33	22.36	21.86
		RB Size=25, RB Offset=24	1	1	22.11	22.38	21.82
		RB Size=50, RB Offset=0	1	1	21.69	21.52	21.24
	16QAM	RB Size=1, RB Offset=0	1	1	22.48	22.06	22.07
		RB Size=1, RB Offset=24	1	1	22.29	21.93	21.88
		RB Size=1, RB Offset=49	1	1	22.25	22.07	22.06
		RB Size=25, RB Offset=0	2	2	21.46	21.67	21.33
		RB Size=25, RB Offset=12	2	2	21.68	21.60	21.40
		RB Size=25, RB Offset=24	2	2	21.67	21.78	21.57
		RB Size=50, RB Offset=0	2	2	20.33	20.70	20.66

Note:

1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
2. The CMW500 Wideband Radio Communication tester is used for LTE output power measurements and SAR testing. Closed loop power control is used to keep the radio transmitters the max output power during the test.
3. KDB941225D05v02- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 1/2 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg

Bluetooth

Mode	Frequency (MHz)	Conducted Output Power	
		(dBm)	(mw)
BDR(GFSK)	2402	0.22	1.052
	2410	4.09	2.564
	2441	3.29	2.133
	2450	5.32	3.404
	2480	4.65	2.917
EDR(4-DQPSK)	2402	-0.82	0.828
	2410	3.05	2.018
	2441	3.08	2.032
	2448	4.41	2.761
	2480	3.54	2.259
EDR-8DPSK	2402	-0.18	0.959
	2410	3.41	2.193
	2441	3.34	2.158
	2450	4.80	3.020
	2480	3.82	2.410
BT4.0	2402	-3.16	0.483
	2440	-2.43	0.571
	2480	-1.99	0.632

Wi-Fi

Band	Channel No.	Frequency (MHz)	Conducted Output Power	
			(dBm)	(mw)
802.11b	1	2412	9.39	8.690
	6	2437	9.43	8.770
	11	2462	9.48	8.872
802.11g	1	2412	9.36	8.630
	6	2437	9.47	8.851
	11	2462	9.31	8.531
802.11n HT20	1	2412	9.41	8.730
	6	2437	9.46	8.831
	11	2462	9.33	8.570
802.11n HT40	1	2422	9.43	8.770
	4	2437	9.37	8.650
	7	2452	9.49	8.892

Note:

1. The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n HT20, 13.5Mbps for 802.11n HT40.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21-24 °C
Relative Humidity:	50-53 %
ATM Pressure:	1001-1002 mbar

Testing was performed by Terry XiaHou on 2015-12-23

GSM 850:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	824.2	GSM	-0.005	32.76	32.90	1.033	0.187	0.193	/
	836.6	GSM	1.031	32.89	32.90	1.002	0.235	0.236	1#
	848.8	GSM	-0.325	32.62	32.90	1.067	0.173	0.185	/
Left Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-0.500	32.89	32.90	1.002	0.152	0.152	/
	848.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	0.501	32.89	32.90	1.002	0.22	0.221	/
	848.8	GSM	/	/	/	/	/	/	/
Right Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-2.538	32.89	32.90	1.002	0.137	0.137	/
	848.8	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-3.793	32.89	32.90	1.002	0.187	0.187	/
	848.8	GSM	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

PCS Band:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1850.2	GSM	1.387	29.34	29.80	1.112	0.321	0.357	/
	1880	GSM	0.545	29.47	29.80	1.079	0.363	0.392	2#
	1909.8	GSM	-3.469	29.76	29.80	1.009	0.307	0.310	/
Left Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	1.336	29.47	29.80	1.079	0.189	0.204	/
	1909.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	1.760	29.47	29.80	1.079	0.324	0.350	/
	1909.8	GSM	/	/	/	/	/	/	/
Right Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	-0.628	29.47	29.80	1.079	0.173	0.187	/
	1909.8	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	2.525	29.47	29.80	1.079	0.217	0.234	/
	1909.8	GSM	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

WCDMA 850 Band:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	826.4	RMC	-0.234	22.44	22.70	1.062	0.057	0.061	/
	836.6	RMC	1.365	22.57	22.70	1.030	0.07	0.072	3#
	846.6	RMC	-4.757	22.65	22.70	1.012	0.052	0.053	/
Left Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.251	22.57	22.70	1.030	0.037	0.038	/
	846.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-2.032	22.57	22.70	1.030	0.068	0.070	/
	846.6	RMC	/	/	/	/	/	/	/
Right Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	4.409	22.57	22.70	1.030	0.035	0.036	/
	846.6	RMC	/	/	/	/	/	/	/

WCDMA 1700 Band:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1712.4	RMC	/	/	/	/	/	/	/
	1732.6	RMC	-3.974	22.82	22.90	1.019	0.317	0.323	/
	1752.6	RMC	/	/	/	/	/	/	/
Left Head Tilt	1712.4	RMC	/	/	/	/	/	/	/
	1732.6	RMC	4.346	22.82	22.90	1.019	0.189	0.193	/
	1752.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	1712.4	RMC	1.060	22.69	22.90	1.050	0.301	0.316	/
	1732.6	RMC	-0.211	22.82	22.90	1.019	0.321	0.327	4#
	1752.6	RMC	-4.133	22.13	22.90	1.194	0.227	0.271	/
Right Head Tilt	1712.4	RMC	/	/	/	/	/	/	/
	1732.6	RMC	3.834	22.82	22.90	1.019	0.175	0.178	/
	1752.6	RMC	/	/	/	/	/	/	/

WCDMA 1900 Band:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	0.286	22.79	22.80	1.002	0.122	0.122	/
	1907.6	RMC	/	/	/	/	/	/	/
Left Head Tilt	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	2.032	22.79	22.80	1.002	0.085	0.085	/
	1907.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	1852.4	RMC	0.128	22.64	22.80	1.038	0.123	0.128	/
	1880	RMC	2.250	22.79	22.80	1.002	0.157	0.157	5#
	1907.6	RMC	1.723	22.68	22.80	1.028	0.109	0.112	/
Right Head Tilt	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	3.032	22.79	22.80	1.002	0.073	0.073	/
	1907.6	RMC	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	-1.267	22.76	22.80	1.009	0.184	0.186	6#
	1860	20	50%RB, Offset=49	-2.508	22.66	22.80	1.033	0.152	0.157	/
Left Head Tilt	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	-0.012	22.76	22.80	1.009	0.073	0.074	/
	1860	20	50%RB, Offset=49	-4.720	22.66	22.80	1.033	0.065	0.067	/
Right Head Cheek	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	1.959	22.76	22.80	1.009	0.173	0.175	/
	1860	20	50%RB, Offset=49	-3.153	22.66	22.80	1.033	0.143	0.148	/
Right Head Tilt	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	-3.114	22.76	22.80	1.009	0.087	0.088	/
	1860	20	50%RB, Offset=49	4.154	22.66	22.80	1.033	0.08	0.083	/

LTE Band 4:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	-1.357	22.97	23.00	1.007	0.367	0.370	7#
	1720	20	50%RB, Offset=49	2.842	22.38	23.00	1.153	0.302	0.348	/
Left Head Tilt	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	-0.255	22.97	23.00	1.007	0.183	0.184	/
	1720	20	50%RB, Offset=49	3.196	22.38	23.00	1.153	0.165	0.190	/
Right Head Cheek	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	2.128	22.97	23.00	1.007	0.335	0.337	/
	1720	20	50%RB, Offset=49	-4.145	22.38	23.00	1.153	0.307	0.354	/
Right Head Tilt	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	0.378	22.97	23.00	1.007	0.182	0.183	/
	1720	20	50%RB, Offset=49	-3.915	22.38	23.00	1.153	0.157	0.181	/

LTE Band 5:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	-3.026	22.98	23.00	1.005	0.075	0.075	8#
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	-4.725	22.50	23.00	1.122	0.057	0.064	/
Left Head Tilt	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	-2.438	22.98	23.00	1.005	0.032	0.032	/
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	2.929	22.50	23.00	1.122	0.033	0.037	/
Right Head Cheek	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	2.884	22.98	23.00	1.005	0.072	0.072	/
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	4.420	22.50	23.00	1.122	0.059	0.066	/
Right Head Tilt	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	1.994	22.98	23.00	1.005	0.035	0.035	/
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	1.772	22.50	23.00	1.122	0.032	0.036	/

LTE Band 7:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	2.727	22.84	22.90	1.014	0.053	0.054	9#
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	-1.581	22.23	22.90	1.167	0.044	0.051	/
Left Head Tilt	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	1.615	22.84	22.90	1.014	0.028	0.028	/
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	-3.970	22.23	22.90	1.167	0.023	0.027	/
Right Head Cheek	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	3.100	22.84	22.90	1.014	0.05	0.051	/
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	-0.358	22.23	22.90	1.167	0.043	0.050	/
Right Head Tilt	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	-0.700	22.84	22.90	1.014	0.025	0.025	/
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	0.973	22.23	22.90	1.167	0.021	0.025	/

LTE Band 17:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-1.325	22.88	22.90	1.005	0.150	0.151	10#
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	-2.849	22.38	22.90	1.127	0.103	0.116	/
Left Head Tilt	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-0.304	22.88	22.90	1.005	0.072	0.072	/
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	-4.416	22.38	22.90	1.127	0.07	0.079	/
Right Head Cheek	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-2.019	22.88	22.90	1.005	0.138	0.139	/
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	-0.649	22.38	22.90	1.127	0.132	0.149	/
Right Head Tilt	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-0.681	22.88	22.90	1.005	0.068	0.068	/
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	4.700	22.38	22.90	1.127	0.062	0.070	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45\text{ W/kg}$
4. KDB941225D05- For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45\text{ W/kg}$, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
6. KDB941225D05- Start with the largest channel bandwidth (20M) and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. Worst case SAR for 50% RB allocation is selected to be tested.

Mobile Hot-Spot Test Result

The DUT is capable of functioning as a Wi-Fi to Cellular Mobile hotspot. Additional SAR testing was performed according to KDB 941225 D06. Testing was performed with a separation of 1cm between the DUT and the flat phantom. The DUT was positioned for SAR tests with the front and back surfaces facing the phantom, and also with the edges facing the phantom in which the transmitting antenna is <2.5 cm from the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

Hot spot-GPRS (Frequency Band: 850)

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	824.2	GPRS	-0.275	28.78	28.90	1.028	0.287	0.295	/
	836.6	GPRS	1.356	28.66	28.90	1.057	0.321	0.339	11#
	848.8	GPRS	-2.400	28.87	28.90	1.007	0.295	0.297	/
Body-Left (10mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	3.846	28.66	28.90	1.057	0.252	0.266	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	-0.531	28.66	28.90	1.057	0.163	0.172	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	2.940	28.66	28.90	1.057	0.301	0.318	/
	848.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. According to IEEE 1528-2013, the middle channel is required to be tested first.
3. KDB 447498D01- When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
2. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
3. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
4. The EUT transmit and receive through the same GSM antenna while testing SAR.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

Hot spot-GPRS (Frequency Band: 1900)

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1850.2	GPRS	-4.756	26.1	26.20	1.023	0.401	0.410	/
	1880.0	GPRS	-0.833	26.01	26.20	1.045	0.437	0.457	12#
	1909.8	GPRS	-3.607	26.05	26.20	1.035	0.389	0.403	/
Body-Left (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	-1.811	26.01	26.20	1.045	0.228	0.238	/
	1909.8	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	-1.271	26.01	26.20	1.045	0.125	0.131	/
	1909.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	0.542	26.01	26.20	1.045	0.327	0.342	/
	1909.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. According to IEEE 1528-2013, the middle channel is required to be tested first.
3. KDB 447498D01- When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
4. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
5. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 2DL+3UL is the worst case.
6. The EUT transmit and receive through the same GSM antenna while testing SAR.
7. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

Hot Spot-WCDMA 850 Band

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	826.4	RMC	-3.160	22.44	22.7	1.062	0.079	0.084	/
	836.6	RMC	1.042	22.57	22.7	1.030	0.109	0.112	13#
	846.6	RMC	3.976	22.65	22.7	1.012	0.075	0.076	/
Body-Left (10mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	4.254	22.57	22.7	1.030	0.062	0.064	/
	846.6	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.664	22.57	22.7	1.030	0.035	0.036	/
	846.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	3.002	22.57	22.7	1.030	0.057	0.059	/
	846.6	RMC	/	/	/	/	/	/	/

Hot Spot-WCDMA 1700 Band

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1712.4	RMC	-3.470	22.69	22.9	1.050	0.438	0.460	/
	1732.6	RMC	1.770	22.82	22.9	1.019	0.517	0.527	14#
	1752.6	RMC	1.690	22.13	22.9	1.194	0.401	0.479	/
Body-Left (10mm)	1712.4	RMC	/	/	/	/	/	/	/
	1732.6	RMC	2.859	22.82	22.9	1.019	0.388	0.395	/
	1752.6	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	1712.4	RMC	/	/	/	/	/	/	/
	1732.6	RMC	4.217	22.82	22.9	1.019	0.323	0.329	/
	1752.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1712.4	RMC	/	/	/	/	/	/	/
	1732.6	RMC	1.251	22.82	22.9	1.019	0.355	0.362	/
	1752.6	RMC	/	/	/	/	/	/	/

Hot Spot-WCDMA 1900 Band

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1852.4	RMC	0.969	22.64	22.8	1.038	0.457	0.474	/
	1880.0	RMC	1.626	22.79	22.8	1.002	0.512	0.513	15#
	1907.6	RMC	1.563	22.68	22.8	1.028	0.439	0.451	/
Body-Left (10mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	-3.332	22.79	22.8	1.002	0.387	0.388	/
	1907.6	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	0.416	22.79	22.8	1.002	0.316	0.317	/
	1907.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	-4.830	22.79	22.8	1.002	0.44	0.441	/
	1907.6	RMC	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. According to IEEE 1528-2013, the middle channel is required to be tested first.
3. KDB 447498D01- When the maximum output power variation across the required test channels is $> 1/2$ dB, instead of the middle channel, the highest output power channel must be used.
4. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

Hot Spot-LTE Band 2

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	2.326	22.76	22.8	1.009	0.351	0.354	16#
	1860	20	50%RB, Offset=49	-2.832	22.66	22.8	1.033	0.327	0.338	/
Body-Left (10mm)	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	-4.681	22.76	22.8	1.009	0.3	0.303	/
	1860	20	50%RB, Offset=49	0.549	22.66	22.8	1.033	0.258	0.266	/
Body-Right (10mm)	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	-3.174	22.76	22.8	1.009	0.239	0.241	/
	1860	20	50%RB, Offset=49	3.165	22.66	22.8	1.033	0.209	0.216	/
Body-Bottom (10mm)	1860	20	1RB, Offset=99	/	/	/	/	/	/	/
	1880	20	1RB, Offset=99	/	/	/	/	/	/	/
	1900	20	1RB, Offset=99	-4.490	22.76	22.8	1.009	0.335	0.338	/
	1860	20	50%RB, Offset=49	-0.675	22.66	22.8	1.033	0.317	0.327	/

Hot Spot-LTE Band 4

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	0.862	22.97	23	1.007	0.543	0.547	17#
	1720	20	50%RB, Offset=49	-1.089	22.38	23	1.153	0.472	0.544	/
Body-Left (10mm)	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	0.963	22.97	23	1.007	0.344	0.346	/
	1720	20	50%RB, Offset=49	2.322	22.38	23	1.153	0.308	0.355	/
Body-Right (10mm)	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	-2.468	22.97	23	1.007	0.287	0.289	/
	1720	20	50%RB, Offset=49	0.474	22.38	23	1.153	0.225	0.260	/
Body-Bottom (10mm)	1720	20	1RB, Offset=99	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=99	/	/	/	/	/	/	/
	1745	20	1RB, Offset=99	4.186	22.97	23	1.007	0.339	0.341	/
	1720	20	50%RB, Offset=49	-4.842	22.38	23	1.153	0.318	0.367	/

Hot Spot-LTE Band 5

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	1.905	22.98	23	1.005	0.125	0.126	18#
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	-1.172	22.5	23	1.122	0.108	0.121	/
Body-Left (10mm)	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	3.238	22.98	23	1.005	0.087	0.087	/
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	-4.558	22.5	23	1.122	0.085	0.095	/
Body-Right (10mm)	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	1.398	22.98	23	1.005	0.062	0.062	/
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	-4.425	22.5	23	1.122	0.057	0.064	/
Body-Bottom (10mm)	829	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	1RB, Offset=24	-3.712	22.98	23	1.005	0.087	0.087	/
	844	10	1RB, Offset=24	/	/	/	/	/	/	/
	836.5	10	50%RB, Offset=12	-3.911	22.5	23	1.122	0.083	0.093	/

Hot Spot-LTE Band 7

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	4.023	22.84	22.9	1.014	0.077	0.078	19#
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	-1.191	22.23	22.9	1.167	0.063	0.074	/
Body-Left (10mm)	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	1.519	22.84	22.9	1.014	0.052	0.053	/
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	0.841	22.23	22.9	1.167	0.05	0.058	/
Body-Right (10mm)	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	4.476	22.84	22.9	1.014	0.038	0.039	/
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	-0.706	22.23	22.9	1.167	0.036	0.042	/
Body-Bottom (10mm)	2510	20	1RB, Offset=49	/	/	/	/	/	/	/
	2535	20	1RB, Offset=49	-1.816	22.84	22.9	1.014	0.035	0.035	/
	2560	20	1RB, Offset=49	/	/	/	/	/	/	/
	2510	20	50%RB, Offset=0	-2.752	22.23	22.9	1.167	0.032	0.037	/

Hot Spot-LTE Band 17


EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-0.641	22.88	22.9	1.005	0.215	0.216	20#
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	4.571	22.38	22.9	1.127	0.176	0.198	/
Body-Left (10mm)	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	1.454	22.88	22.9	1.005	0.153	0.154	/
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	4.294	22.38	22.9	1.127	0.142	0.160	/
Body-Right (10mm)	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-1.406	22.88	22.9	1.005	0.102	0.102	/
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	0.569	22.38	22.9	1.127	0.089	0.100	/
Body-Bottom (10mm)	709	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	1RB, Offset=24	-0.578	22.88	22.9	1.005	0.138	0.139	/
	711	10	1RB, Offset=24	/	/	/	/	/	/	/
	710	10	50%RB, Offset=24	0.881	22.38	22.9	1.127	0.105	0.118	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45 W/kg$
4. KDB941225D05- For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45 W/kg$, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8 W/kg$.
6. KDB941225D05- Start with the largest channel bandwidth (20M) and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. Worst case SAR for 50% RB allocation is selected to be tested.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

BT& Wi-Fi and LTE&GSM&3G Antennas Location:

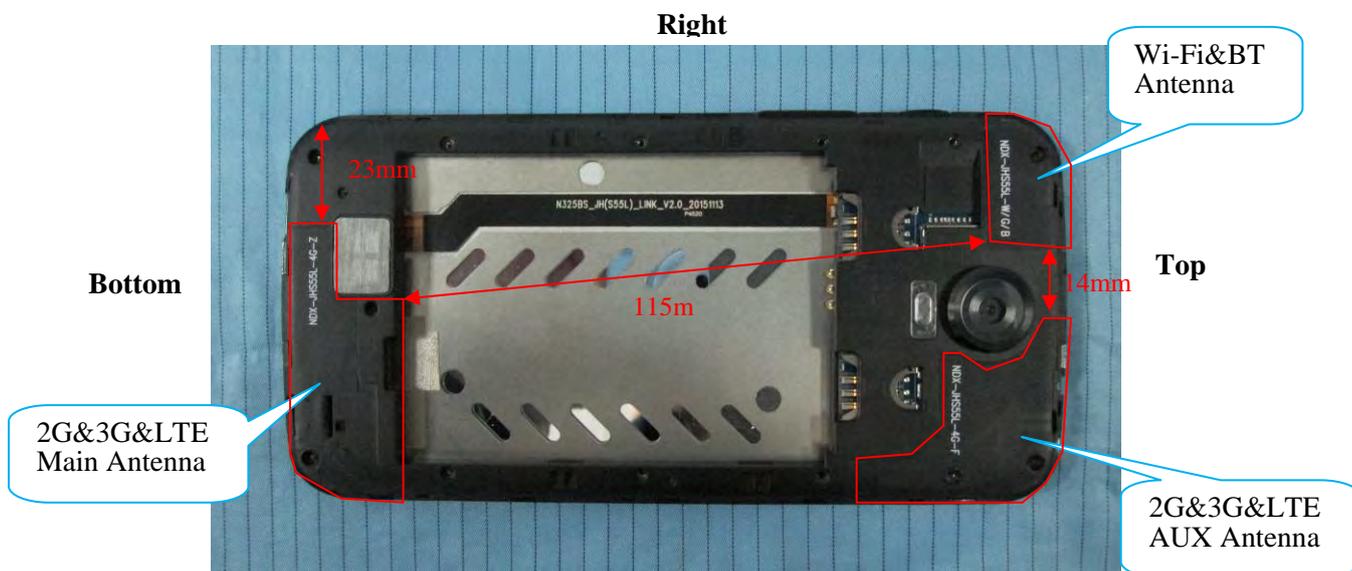

Left

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities			Antennas Distance (mm)
Transmitter Combination	Simultaneous?	Hotspot?	
GSM + WCDMA	×	×	0
GSM + LTE	×	×	0
GSM + Bluetooth	√	×	115
GSM + Wi-Fi	√	√	115
WCDMA + LTE	×	×	0
WCDMA + Bluetooth	√	×	115
WCDMA + Wi-Fi	√	√	115
LTE+ Bluetooth	√	×	115
LTE+ Wi-Fi	√	√	115

Standalone SAR test exclusion considerations

Head Position:

Mode	Frequency (MHz)	P _{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Wi-Fi	2462	9.50	8.913	0	2.8	3.0	Yes
Bluetooth	2480	5.40	3.467	0	1.1	3.0	Yes

Body Position:

Mode	Frequency (MHz)	P _{avg} (dBm)	P _{avg} (Mw)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Wi-Fi	2462	9.50	8.913	10.00	1.4	3.0	Yes
Bluetooth	2480	5.40	3.467	10.00	0.5	3.0	Yes

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	Estimated 1-g (W/kg)
BT Head	2.48	0	5.40	3.467	0.146
BT Body	2.48	10	5.40	3.467	0.073
Wi-Fi Head	2.472	0	9.50	8.913	0.374
Wi-Fi Body	2.472	10	9.50	8.913	0.187

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance,mm})] \cdot [\sqrt{f(\text{GHz})}/x]$$

W/kg for *test separation distances* ≤ 50 mm;

where *x* = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous SAR test exclusion considerations:

GSM with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		GSM	BT	< 1.6W/kg
GSM 850	Left Head Cheek	0.236	0.146	0.382
	Left Head Tilt	0.152	0.146	0.298
	Right Head Cheek	0.221	0.146	0.367
	Right Head Tilt	0.137	0.146	0.283
	Body-Headset-Back	0.187	0.073	0.26
PCS 1900	Left Head Cheek	0.392	0.146	0.538
	Left Head Tilt	0.204	0.146	0.35
	Right Head Cheek	0.350	0.146	0.496
	Right Head Tilt	0.187	0.146	0.333
	Body-Headset-Back	0.234	0.073	0.307

WCDMA with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		WCDMA	BT	< 1.6W/kg
WCDMA 850	Left Head Cheek	0.072	0.146	0.218
	Left Head Tilt	0.038	0.146	0.184
	Right Head Cheek	0.070	0.146	0.216
	Right Head Tilt	0.036	0.146	0.182
WCDMA 1700	Left Head Cheek	0.323	0.146	0.469
	Left Head Tilt	0.193	0.146	0.339
	Right Head Cheek	0.327	0.146	0.473
	Right Head Tilt	0.178	0.146	0.324
WCDMA 1900	Left Head Cheek	0.122	0.146	0.268
	Left Head Tilt	0.085	0.146	0.231
	Right Head Cheek	0.157	0.146	0.303
	Right Head Tilt	0.073	0.146	0.219

LTE with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		LTE	BT	< 1.6W/kg
LTE Band 2	Left Head Cheek	0.186	0.146	0.332
	Left Head Tilt	0.074	0.146	0.22
	Right Head Cheek	0.175	0.146	0.321
	Right Head Tilt	0.088	0.146	0.234
LTE Band 4	Left Head Cheek	0.370	0.146	0.516
	Left Head Tilt	0.190	0.146	0.336
	Right Head Cheek	0.354	0.146	0.5
	Right Head Tilt	0.183	0.146	0.329
LTE Band 5	Left Head Cheek	0.075	0.146	0.221
	Left Head Tilt	0.037	0.146	0.183
	Right Head Cheek	0.072	0.146	0.218
	Right Head Tilt	0.036	0.146	0.182
LTE Band 7	Left Head Cheek	0.054	0.146	0.2
	Left Head Tilt	0.028	0.146	0.174
	Right Head Cheek	0.051	0.146	0.197
	Right Head Tilt	0.025	0.146	0.171
LTE Band 17	Left Head Cheek	0.151	0.146	0.297
	Left Head Tilt	0.079	0.146	0.225
	Right Head Cheek	0.149	0.146	0.295
	Right Head Tilt	0.070	0.146	0.216

GSM with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		GSM	Wi-Fi	< 1.6W/kg
GSM 850	Left Head Cheek	0.236	0.374	0.61
	Left Head Tilt	0.152	0.374	0.526
	Right Head Cheek	0.221	0.374	0.595
	Right Head Tilt	0.137	0.374	0.511
	Body-Headset-Back	0.187	0.187	0.374
PCS 1900	Left Head Cheek	0.392	0.374	0.766
	Left Head Tilt	0.204	0.374	0.578
	Right Head Cheek	0.350	0.374	0.724
	Right Head Tilt	0.187	0.374	0.561
	Body-Headset-Back	0.234	0.187	0.421

WCDMA with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		WCDMA	Wi-Fi	< 1.6W/kg
WCDMA 850	Left Head Cheek	0.072	0.374	0.446
	Left Head Tilt	0.038	0.374	0.412
	Right Head Cheek	0.070	0.374	0.444
	Right Head Tilt	0.036	0.374	0.41
WCDMA 1700	Left Head Cheek	0.323	0.374	0.697
	Left Head Tilt	0.193	0.374	0.567
	Right Head Cheek	0.327	0.374	0.701
	Right Head Tilt	0.178	0.374	0.552
WCDMA 1900	Left Head Cheek	0.122	0.374	0.496
	Left Head Tilt	0.085	0.374	0.459
	Right Head Cheek	0.157	0.374	0.531
	Right Head Tilt	0.073	0.374	0.447

LTE with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		LTE	Wi-Fi	< 1.6W/kg
LTE Band 2	Left Head Cheek	0.186	0.374	0.56
	Left Head Tilt	0.074	0.374	0.448
	Right Head Cheek	0.175	0.374	0.549
	Right Head Tilt	0.088	0.374	0.462
LTE Band 4	Left Head Cheek	0.370	0.374	0.744
	Left Head Tilt	0.190	0.374	0.564
	Right Head Cheek	0.354	0.374	0.728
	Right Head Tilt	0.183	0.374	0.557
LTE Band 5	Left Head Cheek	0.075	0.374	0.449
	Left Head Tilt	0.037	0.374	0.411
	Right Head Cheek	0.072	0.374	0.446
	Right Head Tilt	0.036	0.374	0.41
LTE Band 7	Left Head Cheek	0.054	0.374	0.428
	Left Head Tilt	0.028	0.374	0.402
	Right Head Cheek	0.051	0.374	0.425
	Right Head Tilt	0.025	0.374	0.399
LTE Band 17	Left Head Cheek	0.151	0.374	0.525
	Left Head Tilt	0.079	0.374	0.453
	Right Head Cheek	0.149	0.374	0.523
	Right Head Tilt	0.070	0.374	0.444

Conclusion:

ΣSAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

Evaluations for Simultaneous SAR, BT+GSM/3G/4G					
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode	Stand Alone 1-g SAR (W/Kg)				
GPRS 850	0.339	0.266	0.172	0.318	/
GPRS 1900	0.457	0.238	0.131	0.342	/
WCDMA 850	0.112	0.064	0.036	0.059	/
WCDMA 1700	0.527	0.395	0.329	0.362	/
WCDMA 1900	0.513	0.388	0.317	0.441	/
LTE Band 2	0.354	0.303	0.241	0.338	/
LTE Band 4	0.547	0.355	0.289	0.367	/
LTE Band 5	0.126	0.095	0.064	0.093	/
LTE Band 7	0.078	0.058	0.042	0.037	/
LTE Band 17	0.216	0.160	0.102	0.139	/
BT	0.073	/	0.073	/	0.073
	Σ 1-g SAR(W/Kg)				
GPRS 850 + BT	0.412	/	0.245	/	/
GPRS 1900 + BT	0.53	/	0.204	/	/
WCDMA 850 + BT	0.185	/	0.109	/	/
WCDMA 1700 + BT	0.6	/	0.402	/	/

WCDMA 1900+ BT	0.586	/	0.39	/	/
LTE Band 2+ BT	0.427	/	0.314	/	/
LTE Band 4+ BT	0.62	/	0.362	/	/
LTE Band 5+ BT	0.199	/	0.137	/	/
LTE Band 7+ BT	0.151	/	0.115	/	/
LTE Band 17+ BT	0.289	/	0.175	/	/

Evaluations for Simultaneous SAR, Mobile Hot Spot Positions					
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode	Stand Alone 1-g SAR (W/Kg)				
GPRS 850	0.339	0.266	0.172	0.318	/
GPRS 1900	0.457	0.238	0.131	0.342	/
WCDMA 850	0.112	0.064	0.036	0.059	/
WCDMA 1700	0.527	0.395	0.329	0.362	/
WCDMA 1900	0.513	0.388	0.317	0.441	/
LTE Band 2	0.354	0.303	0.241	0.338	/
LTE Band 4	0.547	0.355	0.289	0.367	/
LTE Band 5	0.126	0.095	0.064	0.093	/
LTE Band 7	0.078	0.058	0.042	0.037	/
LTE Band 17	0.216	0.160	0.102	0.139	/
Wi-Fi	0.187	/	0.187	/	0.187
	Σ 1-g SAR(W/Kg)				
GPRS 850 + Wi-Fi	0.526	/	0.359	/	/
GPRS 1900 + Wi-Fi	0.644	/	0.318	/	/
WCDMA 850 + Wi-Fi	0.299	/	0.223	/	/
WCDMA 1700+ Wi-Fi	0.714	/	0.516	/	/
WCDMA 1900+ Wi-Fi	0.7	/	0.504	/	/
LTE Band 2+ Wi-Fi	0.541	/	0.428	/	/
LTE Band 4+ Wi-Fi	0.734	/	0.476	/	/
LTE Band 5+ Wi-Fi	0.313	/	0.251	/	/
LTE Band 7+ Wi-Fi	0.265	/	0.229	/	/
LTE Band 17+ Wi-Fi	0.403		0.289		

Note:

If the sum of the 1g SAR measured for the simultaneously transmitting antennas is less than the SAR limit, SAR measurement for simultaneous transmission is not required.

SAR Plots (Summary of the Highest SAR Values)

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.097 W/kg
 Power Drift-Finish : 0.098 W/kg
 Power Drift (%) : 1.031

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 41.87 F/m
 Sigma : 0.92 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.235 W/kg
 10 gram SAR value : 0.155 W/kg
 Area Scan Peak SAR : 0.241 W/kg
 Zoom Scan Peak SAR : 0.355 W/kg

Plot 1#

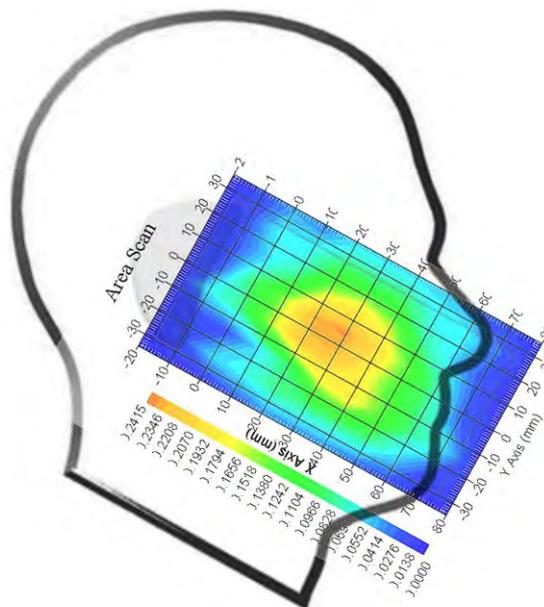

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek(1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.013 W/kg
 Power Drift-Finish : 0.013 W/kg
 Power Drift (%) : 0.545

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 40.08 F/m
 Sigma : 1.42 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.363 W/kg
 10 gram SAR value : 0.187 W/kg
 Area Scan Peak SAR : 0.376 W/kg
 Zoom Scan Peak SAR : 0.492 W/kg

Plot 2#

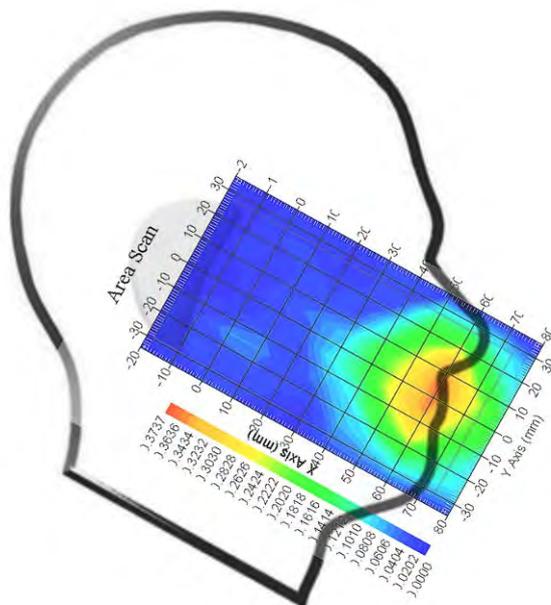

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.028 W/kg
 Power Drift-Finish : 0.028 W/kg
 Power Drift (%) : 1.365

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 41.87 F/m
 Sigma : 0.92 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.070 W/kg
 10 gram SAR value : 0.036 W/kg
 Area Scan Peak SAR : 0.083 W/kg
 Zoom Scan Peak SAR : 0.125 W/kg

Plot 3#

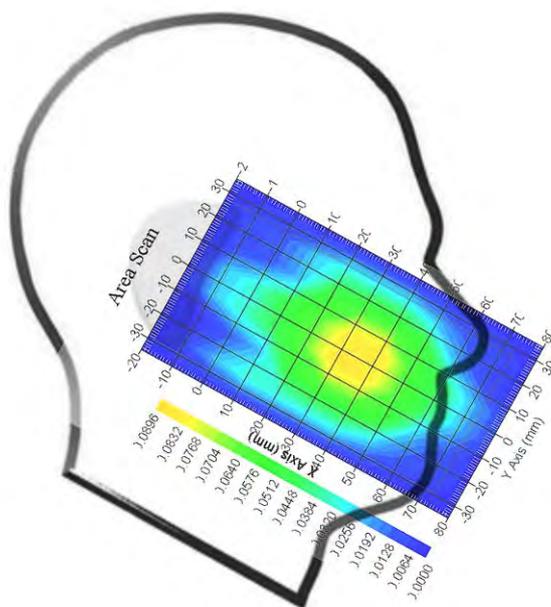

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA 1700; Right Head Cheek (1732.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.021 W/kg
 Power Drift-Finish : 0.021 W/kg
 Power Drift (%) : -0.211

Tissue Data


Type : Head
 Frequency : 1732.6 MHz
 Epsilon : 40.18 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.321 W/kg
 10 gram SAR value : 0.192 W/kg
 Area Scan Peak SAR : 0.336 W/kg
 Zoom Scan Peak SAR : 0.437 W/kg

Plot 4#

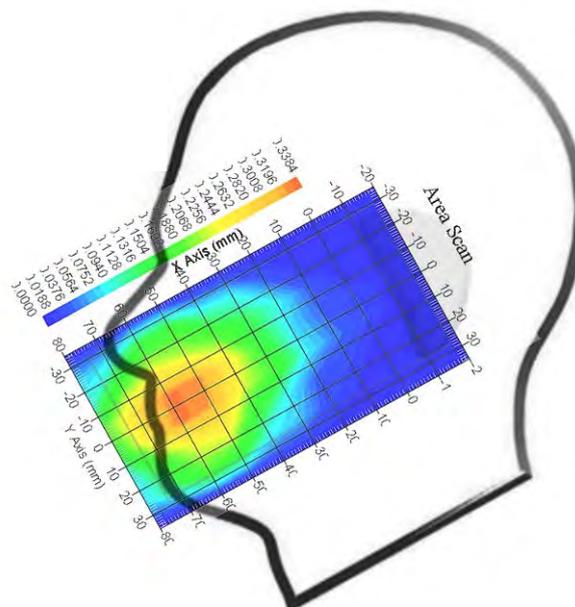

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA 1900; Right Head Cheek (1880.0 MHz Middle Channel)

Measurement Data

Test mode : RMC
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.007 W/kg
 Power Drift-Finish : 0.007 W/kg
 Power Drift (%) : 2.250

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 40.08 F/m
 Sigma : 1.42 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.157 W/kg
 10 gram SAR value : 0.096 W/kg
 Area Scan Peak SAR : 0.165 W/kg
 Zoom Scan Peak SAR : 0.253 W/kg

Plot 5#

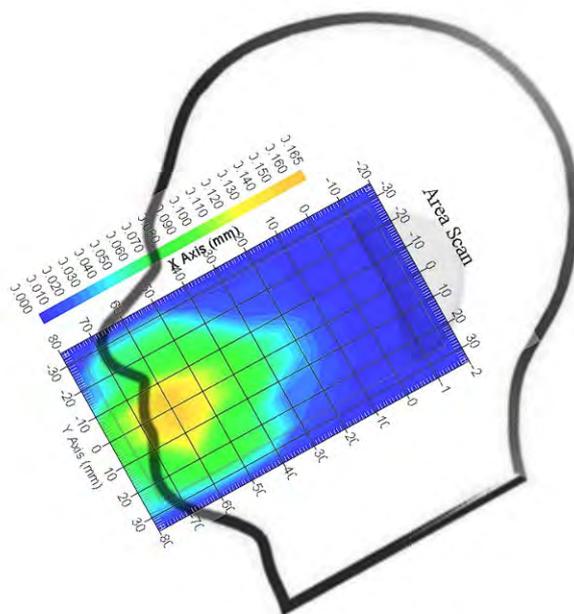

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band2; Left-Head-Cheek (1900 MHz High Channel);

Measurement Data

Test mode : RB1
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.005 W/kg
 Power Drift-Finish : 0.005 W/kg
 Power Drift (%) : -1.267

Tissue Data


Type : Head
 Frequency : 1900 MHz
 Epsilon : 40.09 F/m
 Sigma : 1.42 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.184 W/kg
 10 gram SAR value : 0.123 W/kg
 Area Scan Peak SAR : 0.185 W/kg
 Zoom Scan Peak SAR : 0.350 W/kg

Plot 6#

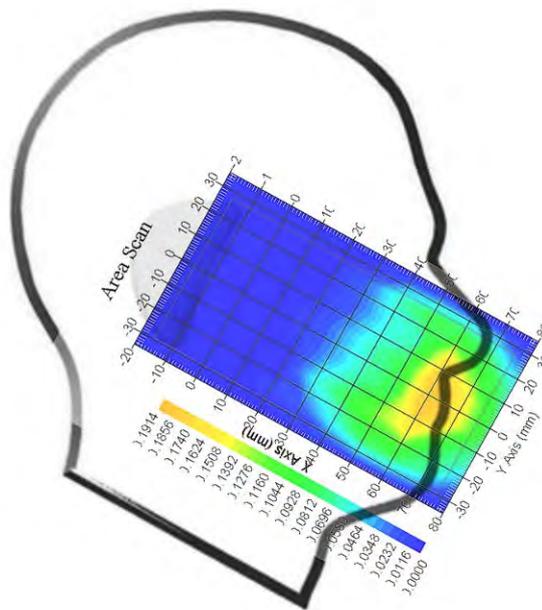

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band4; Left-Head-Cheek (1745 MHz High Channel);

Measurement Data

Test mode : RB1
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.065 W/kg
 Power Drift-Finish : 0.064 W/kg
 Power Drift (%) : -1.357

Tissue Data


Type : Head
 Frequency : 1745 MHz
 Epsilon : 40.11 F/m
 Sigma : 1.40 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.367 W/kg
 10 gram SAR value : 0.283 W/kg
 Area Scan Peak SAR : 0.375 W/kg
 Zoom Scan Peak SAR : 0.520 W/kg

Plot 7#

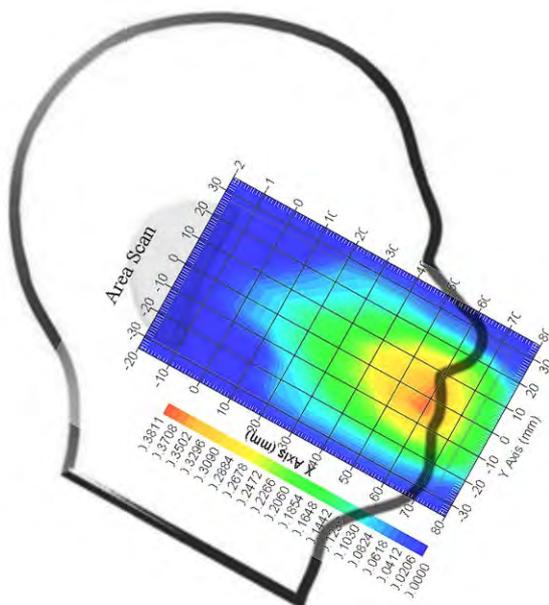

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band5; Left-Head-Cheek (836.5 MHz Middle Channel);

Measurement Data

Test mode : RB1
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.012 W/kg
 Power Drift-Finish : 0.012 W/kg
 Power Drift (%) : -3.026

Tissue Data


Type : Head
 Frequency : 836.5 MHz
 Epsilon : 41.87 F/m
 Sigma : 0.92 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.075 W/kg
 10 gram SAR value : 0.052 W/kg
 Area Scan Peak SAR : 0.078 W/kg
 Zoom Scan Peak SAR : 0.135 W/kg

Plot 8#

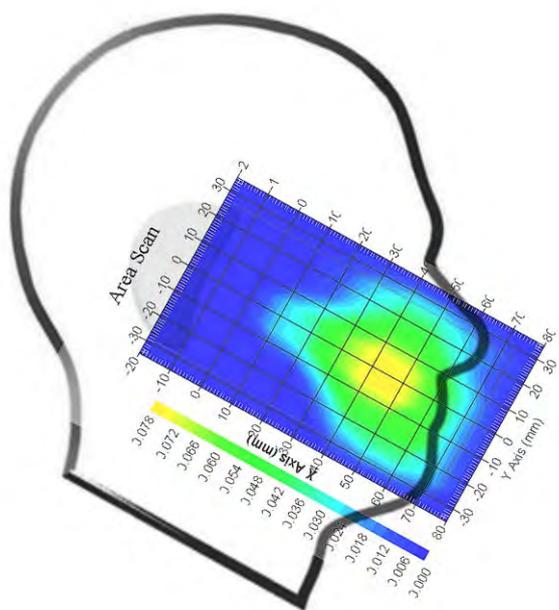

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band7; Left-Head-Cheek (2535 MHz Middle Channel);

Measurement Data

Test mode : RB1
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.004 W/kg
 Power Drift-Finish : 0.004 W/kg
 Power Drift (%) : 2.727

Tissue Data


Type : Head
 Frequency : 2535 MHz
 Epsilon : 39.68 F/m
 Sigma : 1.85 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 2450
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.053 W/kg
 10 gram SAR value : 0.031 W/kg
 Area Scan Peak SAR : 0.055 W/kg
 Zoom Scan Peak SAR : 0.077 W/kg

Plot 9#

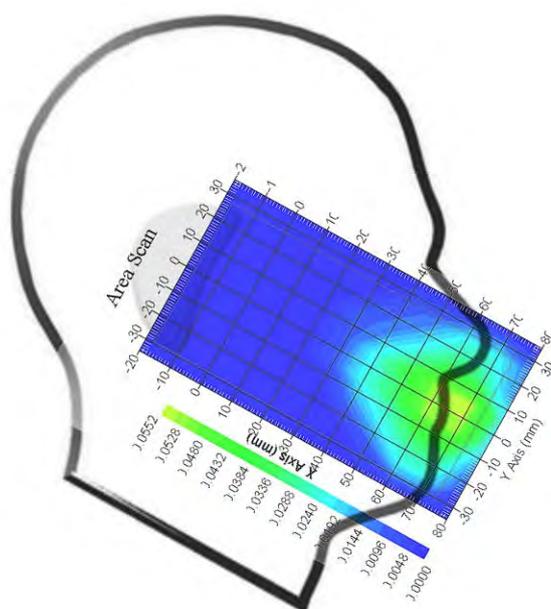

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band17; Left-Head-Cheek (710 MHz Middle Channel);

Measurement Data

Test mode : RB1
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.075 W/kg
 Power Drift-Finish : 0.074 W/kg
 Power Drift (%) : -1.325

Tissue Data


Type : Head
 Frequency : 710 MHz
 Epsilon : 42.34 F/m
 Sigma : 0.90 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.150 W/kg
 10 gram SAR value : 0.096 W/kg
 Area Scan Peak SAR : 0.160 W/kg
 Zoom Scan Peak SAR : 0.235 W/kg

Plot 10#

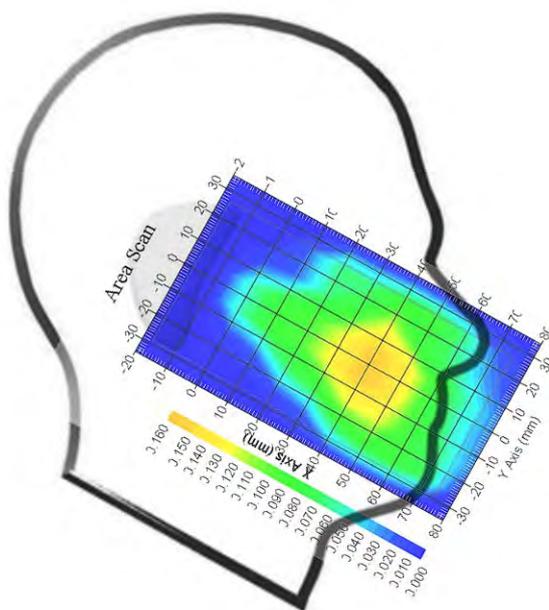

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.295 W/kg
 Power Drift-Finish : 0.299 W/kg
 Power Drift (%) : 1.356

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 55.86 F/m
 Sigma : 0.99 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 2
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.321 W/kg
 10 gram SAR value : 0.192 W/kg
 Area Scan Peak SAR : 0.336 W/kg
 Zoom Scan Peak SAR : 0.668 W/kg

Plot 11#

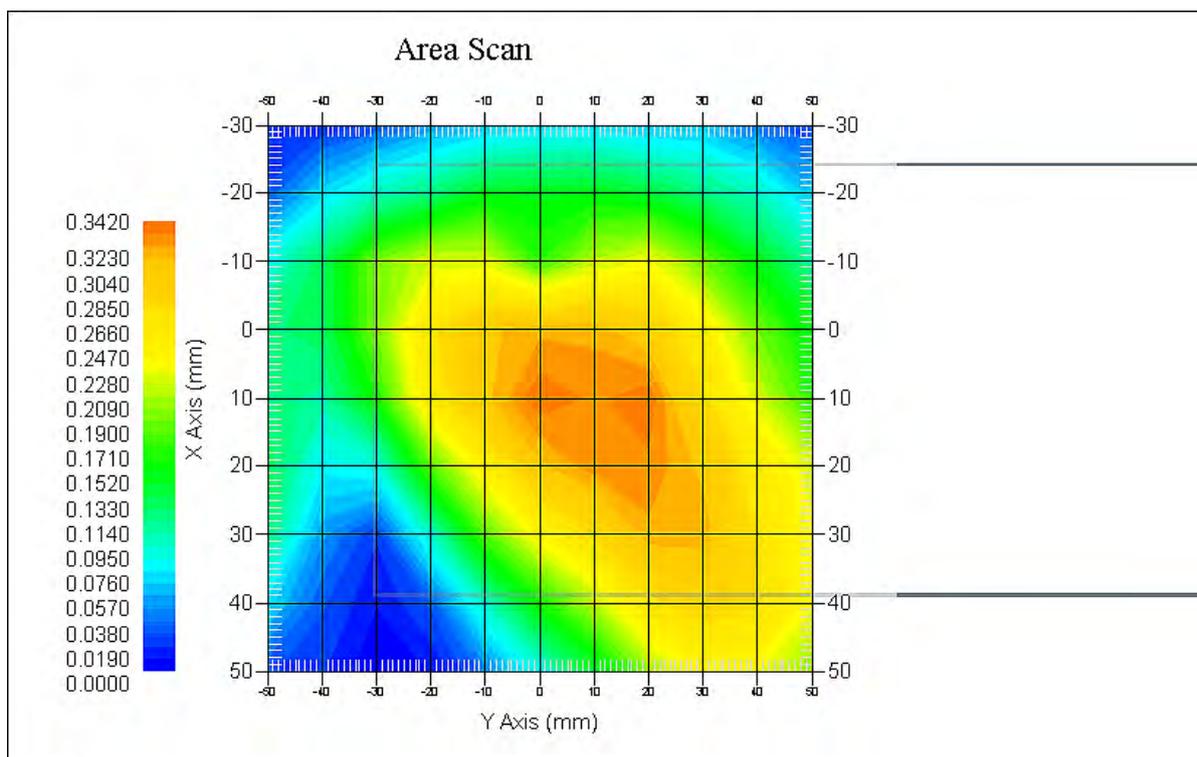

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Back (1880 MHz Middle Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2.67
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.120 W/kg
 Power Drift-Finish : 0.119 W/kg
 Power Drift (%) : -0.833

Tissue Data


Type : Body
 Frequency : 1880 MHz
 Epsilon : 53.55 F/m
 Sigma : 1.53 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 2.67
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.437 W/kg
 10 gram SAR value : 0.276 W/kg
 Area Scan Peak SAR : 0.450 W/kg
 Zoom Scan Peak SAR : 0.655 W/kg

Plot 12#

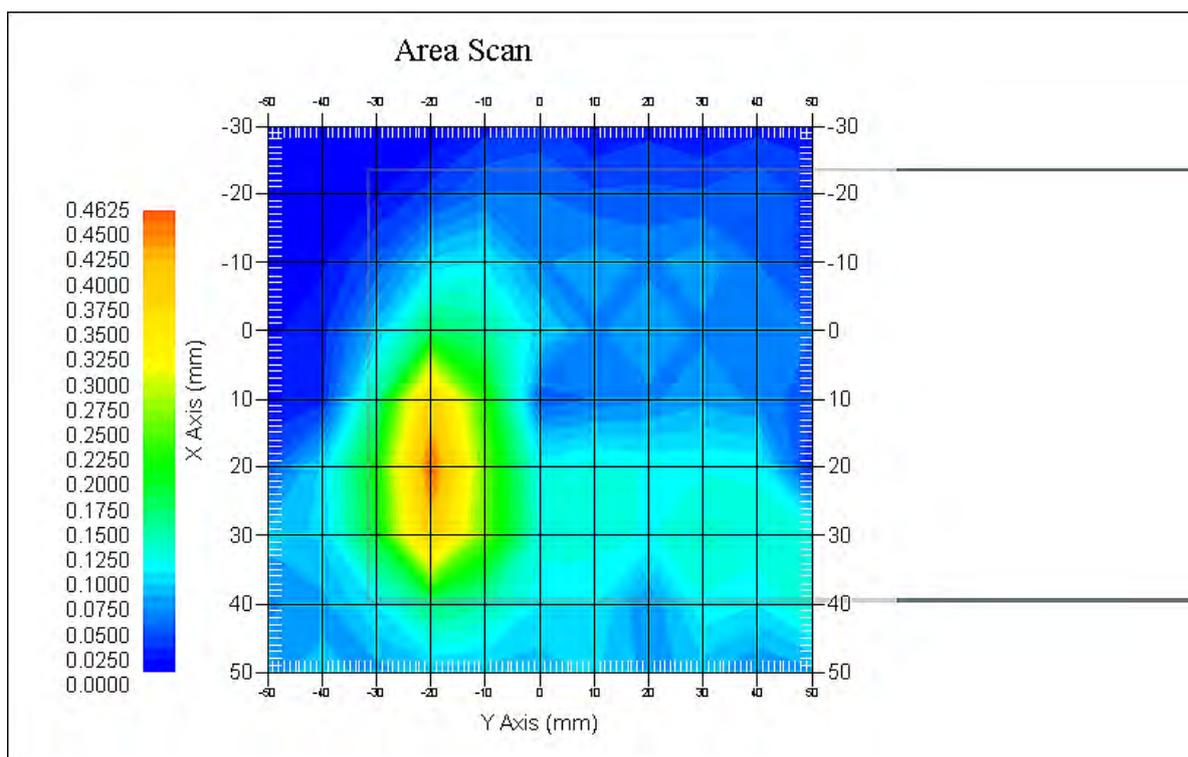

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Body-Worn-Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.096 W/kg
 Power Drift-Finish : 0.097 W/kg
 Power Drift (%) : 1.042

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 55.86 F/m
 Sigma : 0.99 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.109 W/kg
 10 gram SAR value : 0.078 W/kg
 Area Scan Peak SAR : 0.114 W/kg
 Zoom Scan Peak SAR : 0.272 W/kg

Plot 13#

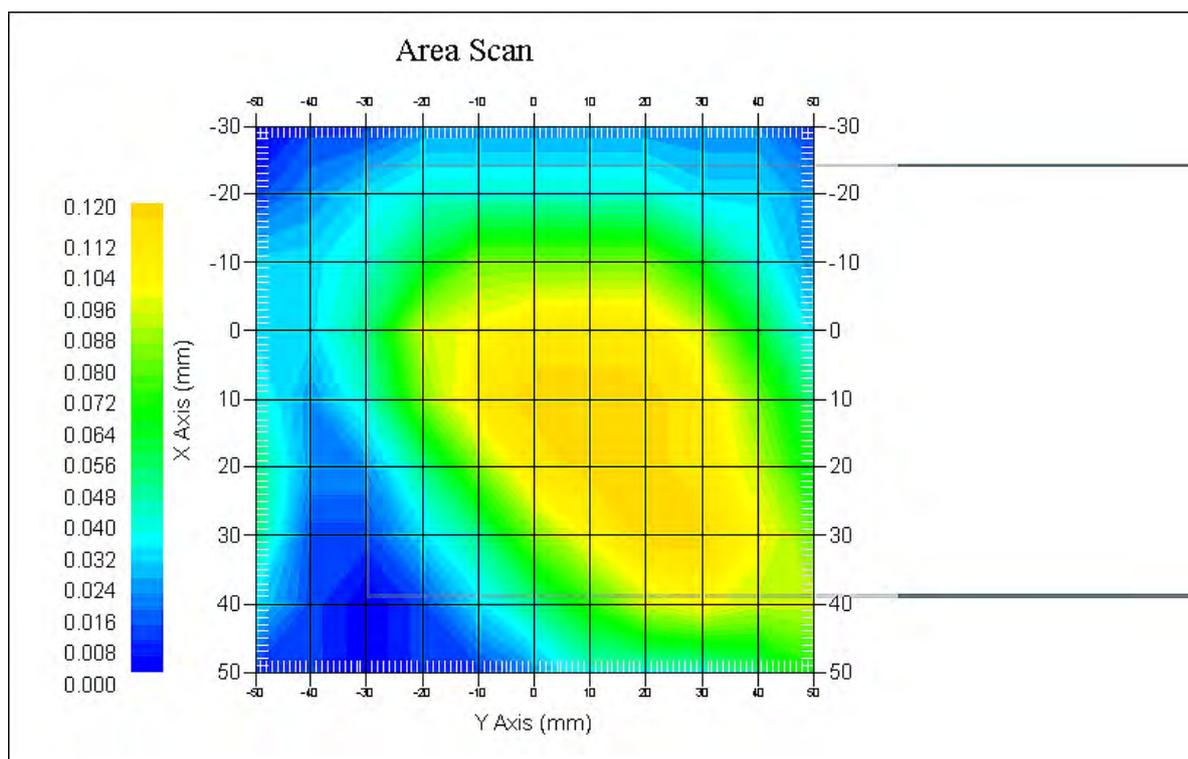

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1700; Body-Worn-Back (1732.6 MHz Middle Channel)

Measurement Data

Test mode : RMC
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.113 W/kg
 Power Drift-Finish : 0.115 W/kg
 Power Drift (%) : 1.770

Tissue Data


Type : Body
 Frequency : 1732.6 MHz
 Epsilon : 53.95 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.517 W/kg
 10 gram SAR value : 0.357 W/kg
 Area Scan Peak SAR : 0.537 W/kg
 Zoom Scan Peak SAR : 0.873 W/kg

Plot 14#

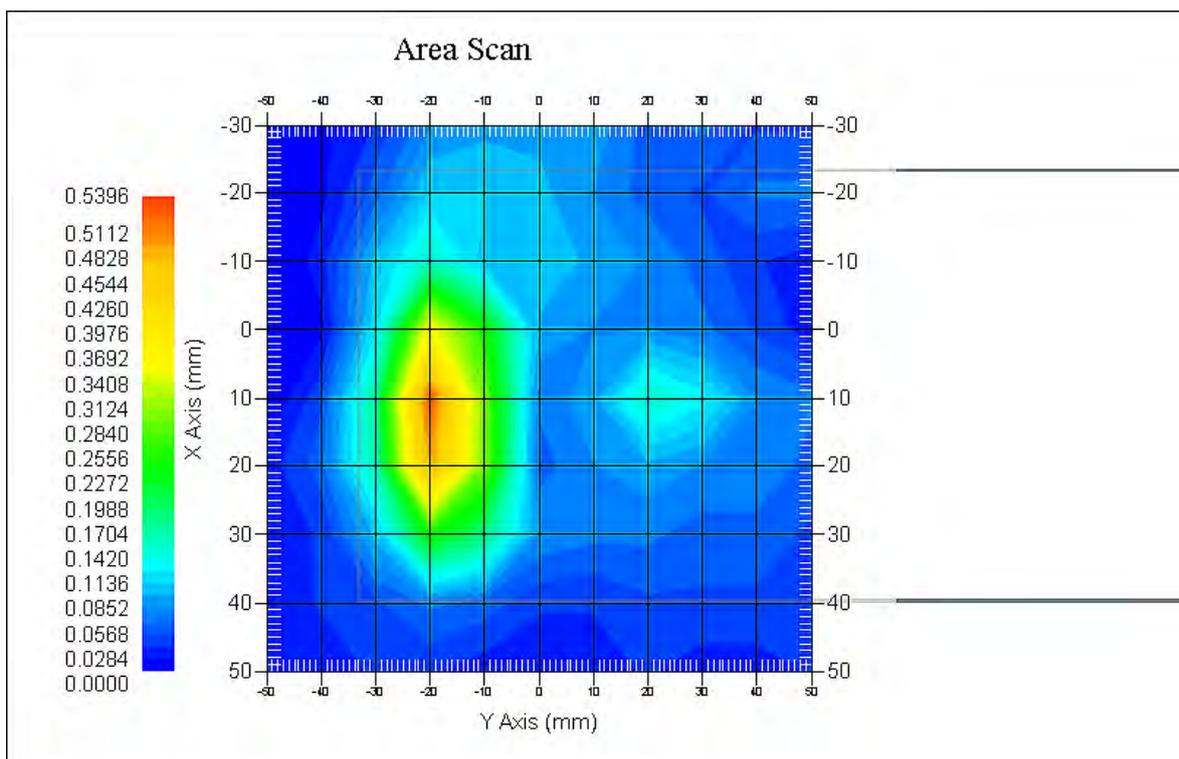

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Body-Worn-Back (1880 MHz Middle Channel)

Measurement Data

Test mode : RMC
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.123 W/kg
 Power Drift-Finish : 0.125 W/kg
 Power Drift (%) : 1.626

Tissue Data


Type : Body
 Frequency : 1880.0 MHz
 Epsilon : 53.55 F/m
 Sigma : 1.53 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.512 W/kg
 10 gram SAR value : 0.341 W/kg
 Area Scan Peak SAR : 0.532 W/kg
 Zoom Scan Peak SAR : 0.720 W/kg

Plot 15#

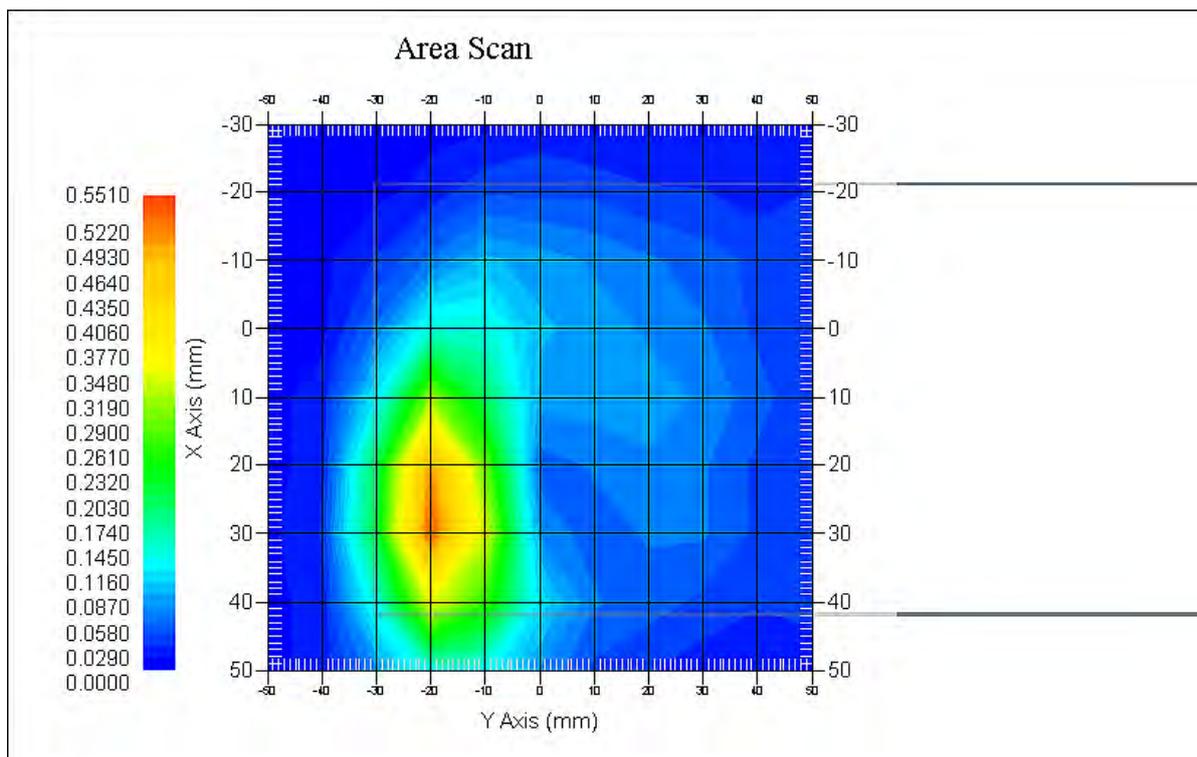

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band2; Body-Worn-Back (1900 MHz High Channel);

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.043 W/kg
 Power Drift-Finish : 0.044 W/kg
 Power Drift (%) : 2.326

Tissue Data


Type : Body
 Frequency : 1900 MHz
 Epsilon : 53.59 F/m
 Sigma : 1.53 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.351 W/kg
 10 gram SAR value : 0.275 W/kg
 Area Scan Peak SAR : 0.357 W/kg
 Zoom Scan Peak SAR : 0.488 W/kg

Plot 16#

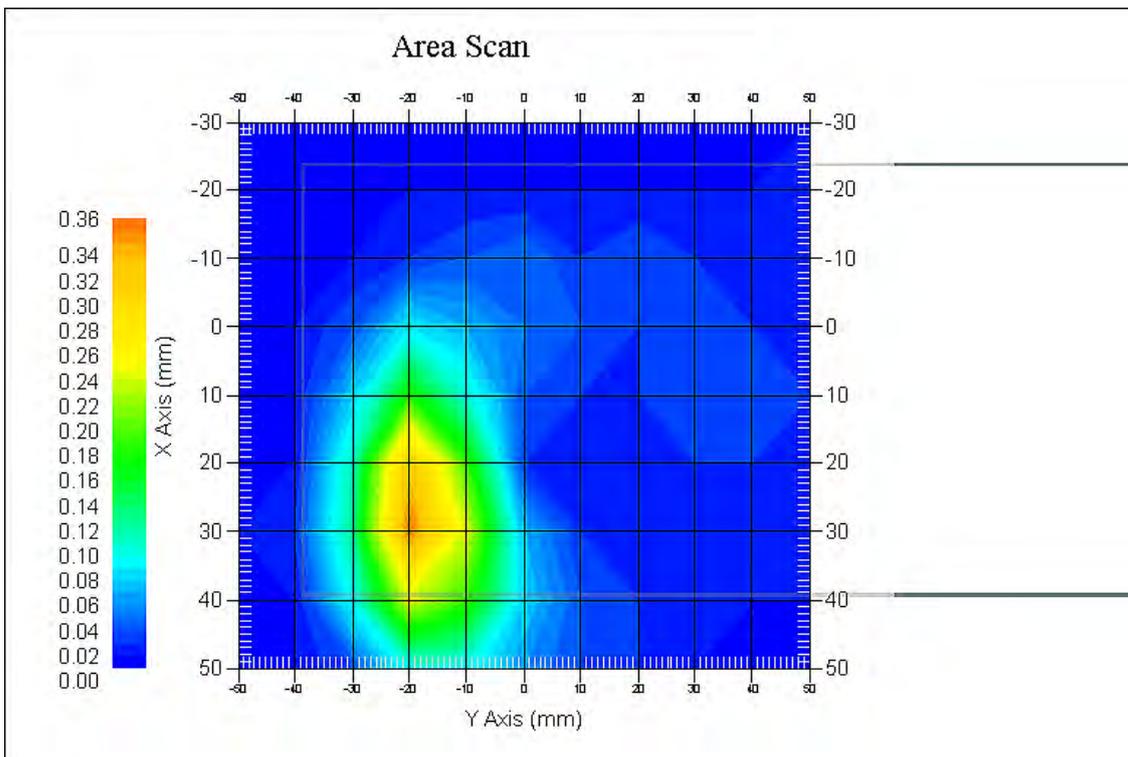

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band4; Body-Worn-Back (1745 MHz High Channel);

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.116 W/kg
 Power Drift-Finish : 0.117 W/kg
 Power Drift (%) : 0.862

Tissue Data


Type : Body
 Frequency : 1745 MHz
 Epsilon : 53.55 F/m
 Sigma : 1.52 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.543 W/kg
 10 gram SAR value : 0.357 W/kg
 Area Scan Peak SAR : 0.551 W/kg
 Zoom Scan Peak SAR : 0.720 W/kg

Plot 17#

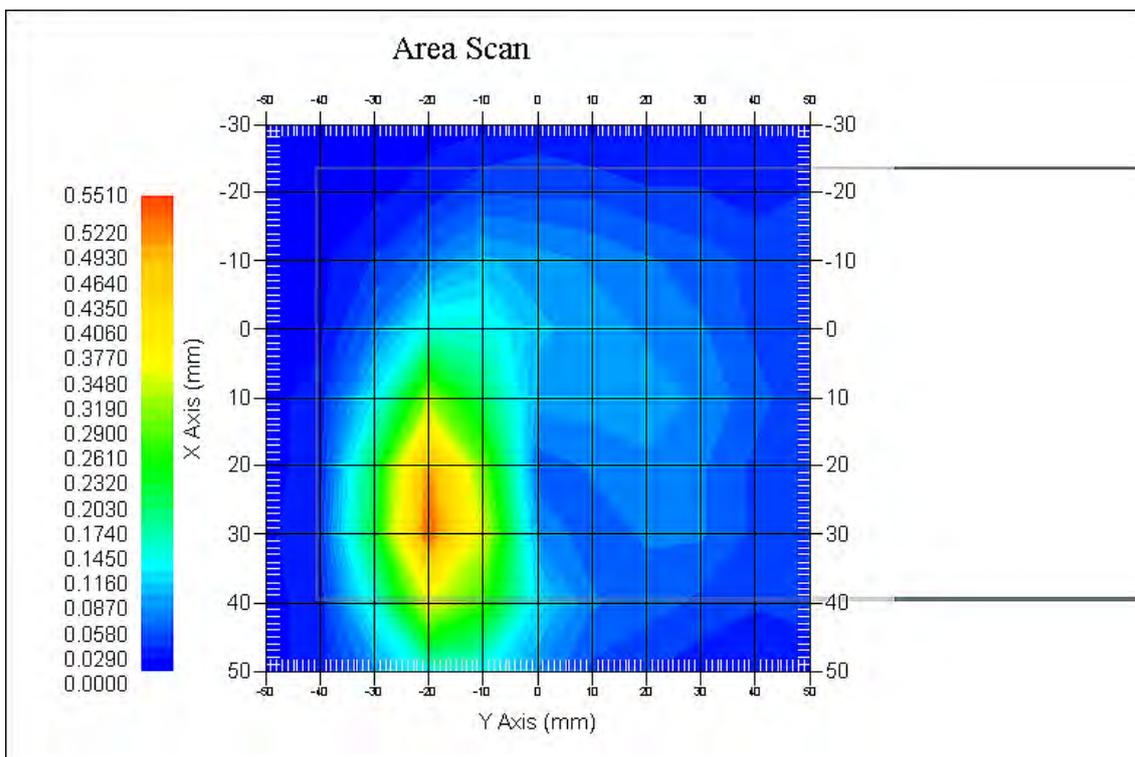

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band5; Body-Worn-Back (836.5 MHz Middle Channel);

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.105 W/kg
 Power Drift-Finish : 0.107 W/kg
 Power Drift (%) : 1.905

Tissue Data


Type : Body
 Frequency : 836.5 MHz
 Epsilon : 55.86 F/m
 Sigma : 0.99 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.125 W/kg
 10 gram SAR value : 0.071 W/kg
 Area Scan Peak SAR : 0.130 W/kg
 Zoom Scan Peak SAR : 0.259 W/kg

Plot 18#

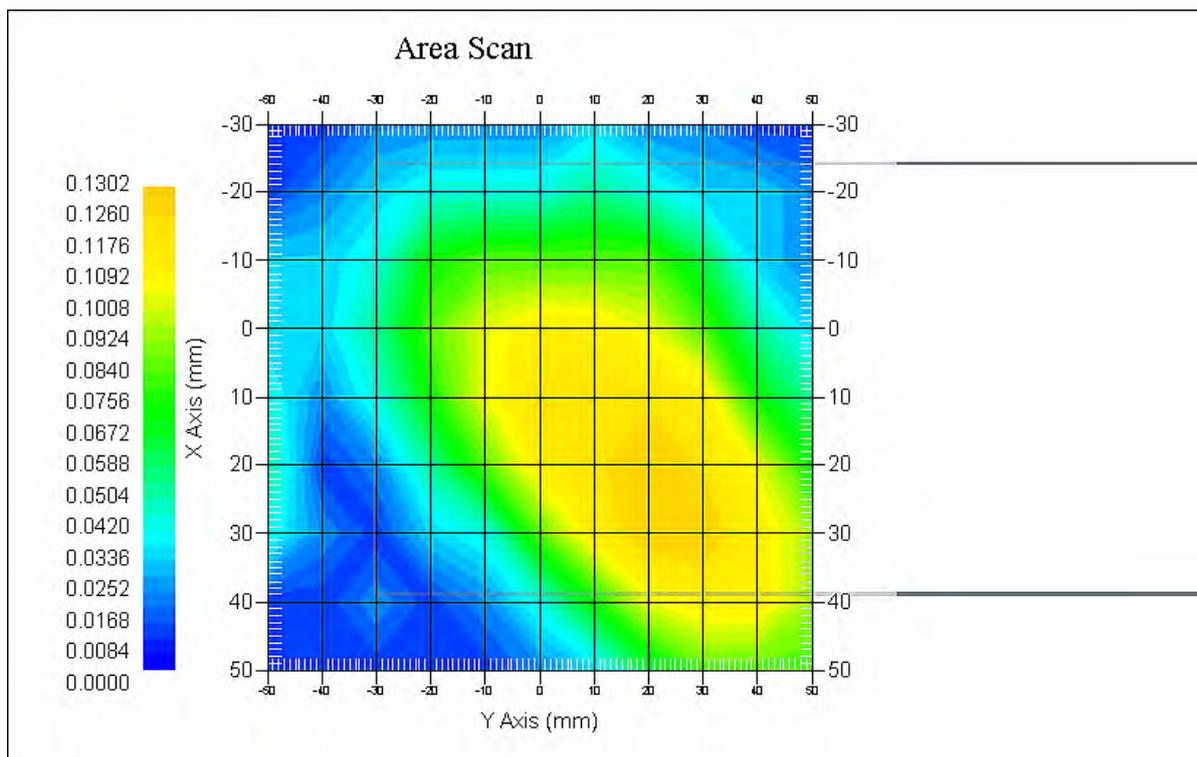

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band7; Body-Worn-Back (2535 MHz Middle Channel);

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.023 W/kg
 Power Drift-Finish : 0.024 W/kg
 Power Drift (%) : 4.023

Tissue Data


Type : Body
 Frequency : 2535 MHz
 Epsilon : 52.83 F/m
 Sigma : 1.96 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 2450
 Duty Cycle Factor : 1
 Conversion Factor : 4.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.077 W/kg
 10 gram SAR value : 0.051 W/kg
 Area Scan Peak SAR : 0.085 W/kg
 Zoom Scan Peak SAR : 0.125 W/kg

Plot 19#

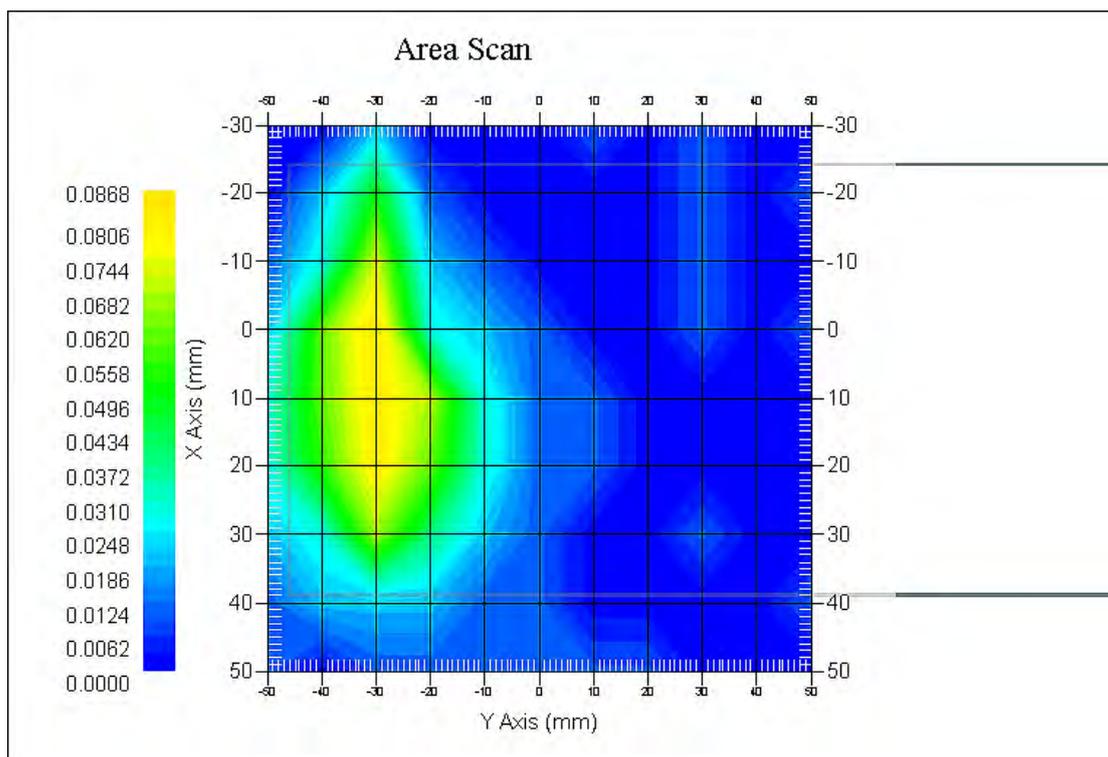

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE FDD Band17; Body-Worn-Back (710 MHz Middle Channel);

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.156 W/kg
 Power Drift-Finish : 0.155 W/kg
 Power Drift (%) : -0.641

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 54.64 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.215 W/kg
 10 gram SAR value : 0.128 W/kg
 Area Scan Peak SAR : 0.221 W/kg
 Zoom Scan Peak SAR : 0.357 W/kg

Plot 20#

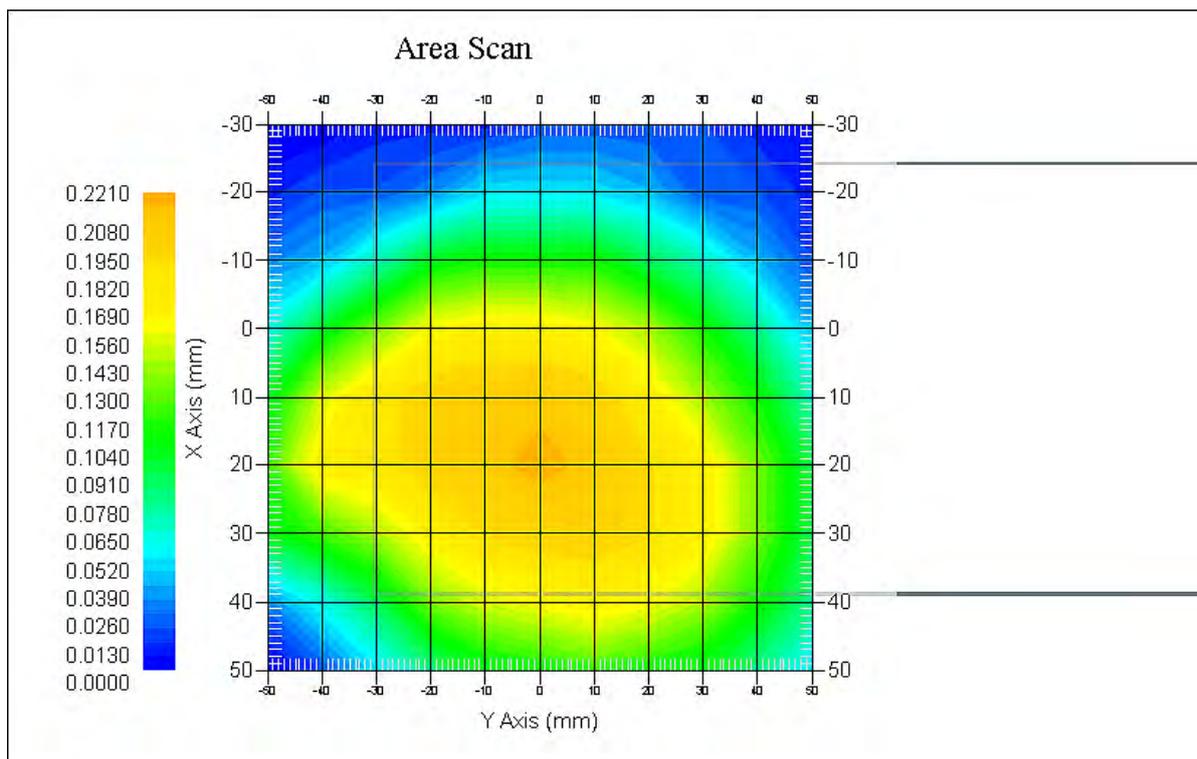

APPENDIX A MEASUREMENT UNCERTAINTY

According to **IEEE1528:2013**, the uncertainty budget has been determined for the Head SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1-g)	c_i^1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	\sqrt{cp}	\sqrt{cp}	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test sample related							
Test sample positioning	2.0	normal	1	1	1	2.0	2.0
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67
Phantom and Setup							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.85	1.2	1.0
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6
Liquid permittivity measurement	5.0	normal	1	0.25	0.29	1.3	1.5
conductivity—temperature	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5
permittivity—temperature	1.3	rectangular	$\sqrt{3}$	0.23	0.23	0.2	0.2
Combined Uncertainty		RSS				10.78	10.55
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10

According to **IEC62209-2:2010**, the uncertainty budget has been determined for the Body SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1-g)	c_i^1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	1	1	1.5	1.5
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test sample related							
Test sample positioning	2.0	normal	1	1	1	2.0	2.0
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67
Phantom and Setup							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.84	1.2	1.0
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6
Liquid permittivity measurement	5.0	normal	1	0.23	0.26	1.3	1.5
conductivity—temperature	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5
permittivity—temperature	1.3	rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.2
Combined Uncertainty		RSS				9.58	9.49
Expanded uncertainty (coverage factor=2)		Normal(k=2)				19.16	18.98

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1654

Task No: BACL-5805

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe

Record of Calibration

Head and Body

Manufacturer: APREL Inc.

Model No.: ALS-E020

Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole
Project No: BACL-5805

Calibrated: 12th December 2015
Released on: 14th December 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr,
OTTAWA, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL, Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification.

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- IEEE Standard 1528:2013
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- IEC 62209-1:2006
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- IEC 62209-2:2010
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

NCL Calibration Laboratories

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration.

Ambient Temperature of the Laboratory: 20 °C +/- 1.5°C
Temperature of the Tissue: 21 °C +/- 1.5°C
Relative Humidity: < 60%

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Power Meter Tektronix USB	11C940	Apr 2, 2017
Signal Generator Agilent E4438C	MY45094463	Dec 11, 2017

Secondary Measurement Standards

Network Analyzer Anritsu 37347C	002106	Feb. 4, 2017
---------------------------------	--------	--------------

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Dan Brooks, Test Engineer

NCL Calibration Laboratories

Division of APREL, Inc.

Probe Summary

Probe Type: E-Field Probe E-020
Serial Number: 500-00283
Frequency: As presented on page 5
Sensor Offset: 1.56
Sensor Length: 2.5
Tip Enclosure: Composite*
Tip Diameter: < 2.9 mm
Tip Length: 55 mm
Total Length: 289 mm
Diode Compression Point: 95 mV

Sensitivity in Air

Frequency Range	Channel X, $\mu\text{V}/(\text{V}/\text{m})^2$	Channel Y, $\mu\text{V}/(\text{V}/\text{m})^2$	Channel Z, $\mu\text{V}/(\text{V}/\text{m})^2$	Tolerance, $\mu\text{V}/(\text{V}/\text{m})^2$
450 MHz	1.212	1.205	1.199	± 0.004
750 MHz, 835 MHz 900 MHz	1.212	1.21	1.209	± 0.004
1 GHz – 4 GHz	1.21	1.21	1.207	± 0.004
5 GHz – 6 GHz	1.2	1.192	1.19	± 0.005

*Resistive to recommended tissue recipes per IEEE-1528

NCL Calibration Laboratories

Division of APREL, Inc.

Calibration for Tissue (Head H, Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
450 H	Head	43.5	0.84	3.5	±50	5.7
450 B	Body	56.77	0.93	3.5	±50	5.8
750 H	Head	42.92	0.92	3.5	±50	6.0
750 B	Body	55.57	0.93	3.5	±50	5.9
835 H	Head	43.44	0.94	3.5	±50	5.9
835 B	Body	54.91	1.00	3.5	±50	5.9
900 H	Head	41.05	1.01	3.5	±50	6.0
900 B	Body	54.86	1.04	3.5	±50	5.9
1450 H	Head	X	X	X	X	X
1450 B	Body	X	X	X	X	X
1500 H	Head	X	X	X	X	X
1500 B	Body	X	X	X	X	X
1640 H	Head	X	X	X	X	X
1640 B	Body	X	X	X	X	X
1750 H	Head	38.58	1.36	3.5	±75	5.4
1750 B	Body	51.5	1.52	3.5	±75	5.3
1800 H	Head	X	X	X	X	X
1800 B	Body	X	X	X	X	X
1900 H	Head	40.72	1.37	3.5	±75	4.8
1900 B	Body	52.29	1.58	3.5	±75	4.8
2000 H	Head	X	X	X	X	X
2000 B	Body	X	X	X	X	X
2100 H	Head	X	X	X	X	X
2100 B	Body	X	X	X	X	X
2300 H	Head	X	X	X	X	X
2300 B	Body	X	X	X	X	X
2450 H	Head	37.35	1.85	3.5	±75	4.8
2450 B	Body	53.26	1.96	3.5	±75	4.3
3000 H	Head	X	X	X	X	X
3000 B	Body	X	X	X	X	X
3600 H	Head	37.24	3.14	3.5	±100	4.4
3600 B	Body	50.23	3.81	3.5	±100	4.1
5250 H	Head	35.05	4.65	3.5	±100	3.1
5250 B	Body	46.24	5.11	3.5	±100	2.9
5600 H	Head	34.95	5.06	3.5	±100	3.0
5600 B	Body	45.95	5.73	3.5	±100	2.4
5800 H	Head	34.57	5.27	3.5	±100	3.1
5800 B	Body	46.01	6.10	3.5	±100	2.6

NCL Calibration Laboratories

Division of APREL, Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe.
 The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.


Probe Calibration Uncertainty

Uncertainty component	Tolerance (± %)	Probability distribution	Divisor	Standard uncertainty (± %)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	√3	0.58
Liquid permittivity measurement	1	R	√3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	√3	1.30
Field homogeneity	2.5	R	√3	1.44
Field-probe positioning	2.5	R	√3	1.44
Field-probe linearity	1.55	R	√3	0.89
Combined standard uncertainty		RSS		3.50

NCL Calibration Laboratories

Division of APREL, Inc.



Receiving Pattern Air

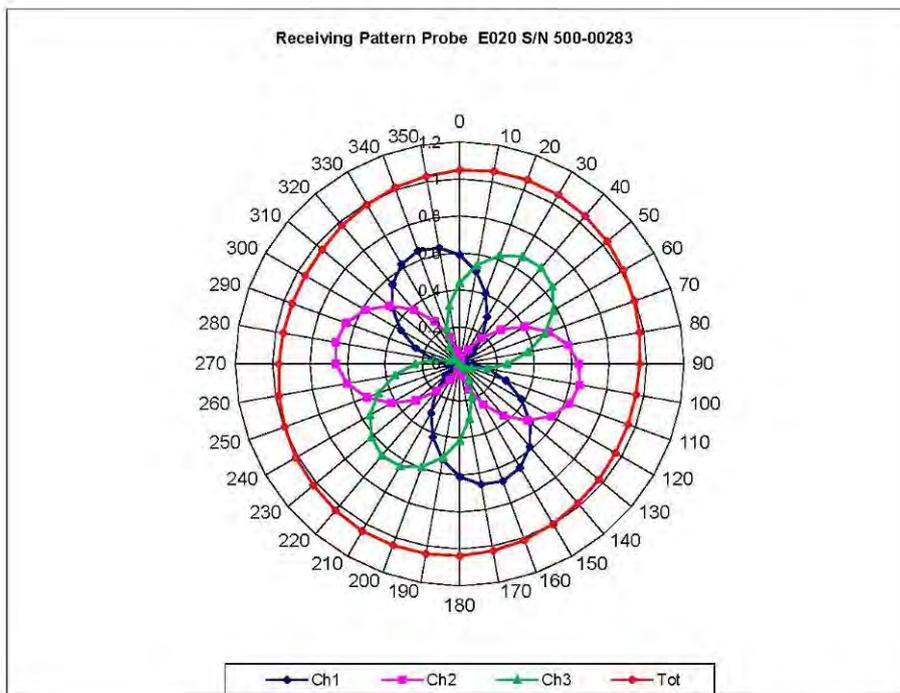

NCL Calibration Laboratories

Division of APREL, Inc.


Isotropy Error Air

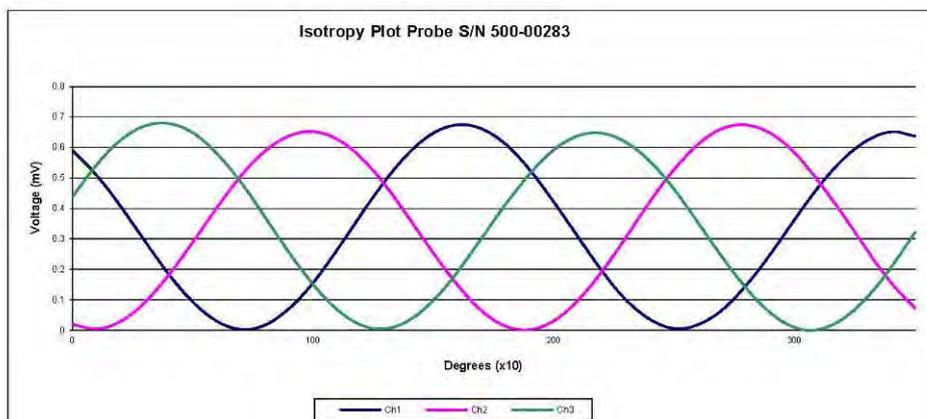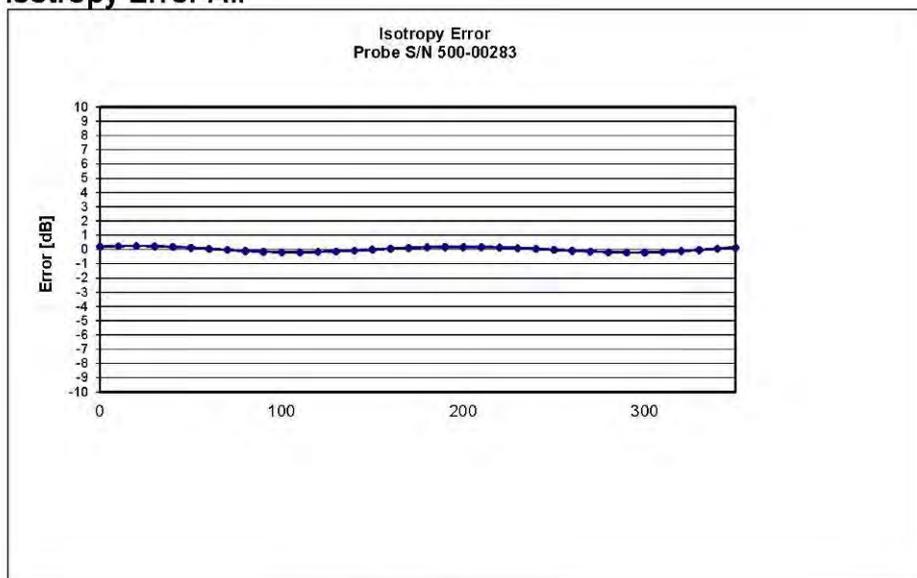


NCL Calibration Laboratories

Division of APREL, Inc.

Dynamic Range

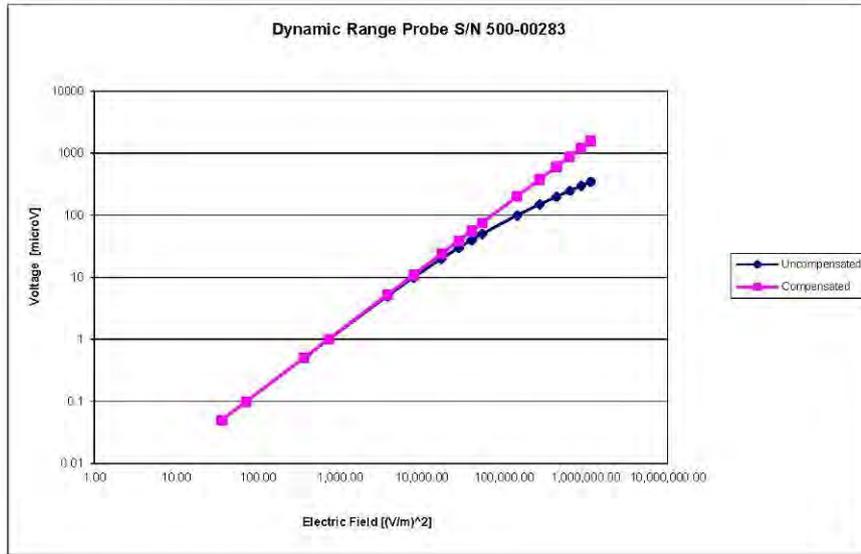

Video Bandwidth

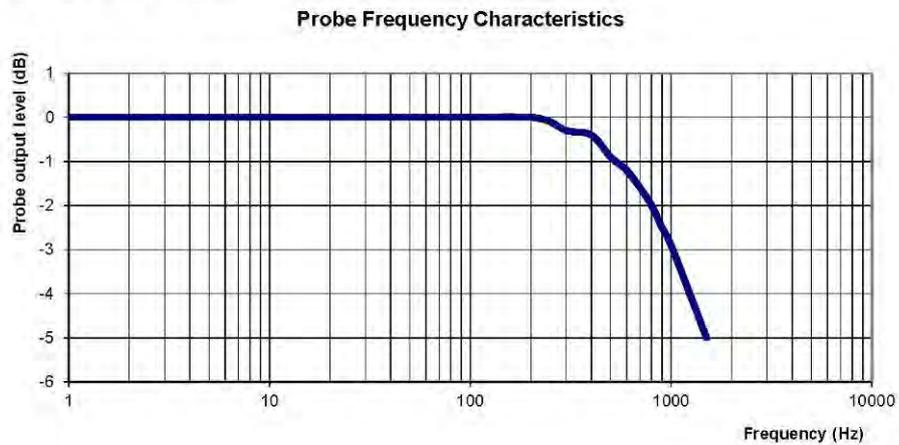

Video Bandwidth at 500 Hz 1 dB
Video Bandwidth at 1.02 KHz: 3 dB

Page 9 of 10
 This page has been reviewed for content and attested to on Page 2 of this document.

Probe S/N 500-00283

APPENDIX C DIPOLE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1532

Project Number: BACL-5745

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole

Manufacturer: APREL Laboratories

Part number: ALS-D-750-S-2

Frequency: 750 MHz

Serial No: 177-00505

Customer: BACL

Calibrated: 8th of October 2013

Released on: 8th of October 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102
Kanata, Ontario
CANADA K2K 3J1

Division of APREL
TEL: (613) 436-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions


Dipole 177-00505 was a new calibration, removed from stock.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this device has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Dan Brooks, Test Engineer

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 180.2 mm
 Height: 97.0 mm


Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-27.621 dB	-21.672 dB
SWR	1.106 U	1.201 U
Impedance	52.505 Ω	55.933 Ω


System Validation Results

Frequency 750 MHz	1 Gram	10 Gram
Head	8.5	54.0
Body	8.54	5.42

Head

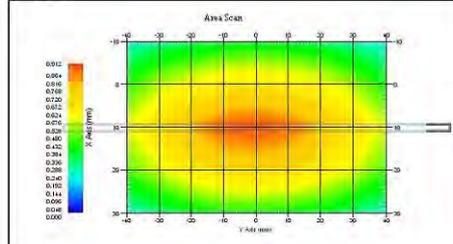

Body

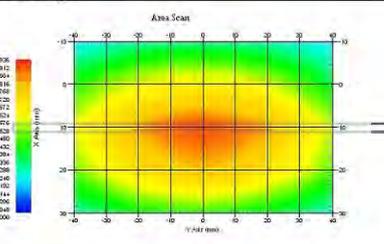

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 177-00505. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 130 MHz to 26 GHz E-Field Probe Serial Number 2225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Dipole 177-00505 was a new calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 20 °C +/- 0.5°C

This page has been reviewed for content and attested to by signature within this document.

4

NCL Calibration Laboratories

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height
180.0 mm	97.8 mm	180.2 mm	97.0 mm

Tissue Validation

Tissue 750MHz	Measured Head	Measured Body
Dielectric constant, ϵ_r	42.7	56.6
Conductivity, σ [S/m]	0.85	0.94

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.


Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-27.621 dB	-21.672 dB
SWR	1.106 U	1.201 U
Impedance	52.505 Ω	55.933 Ω


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

HEAD

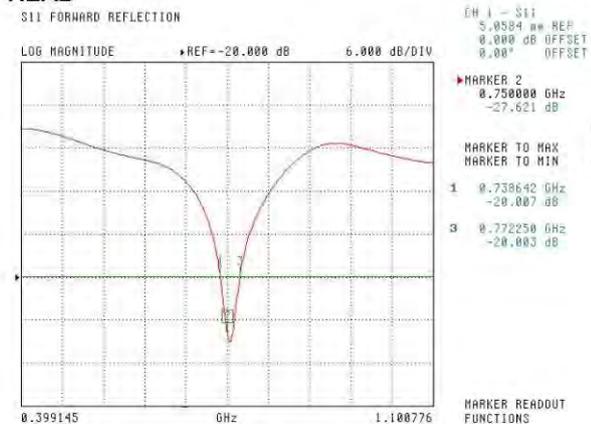

BODY

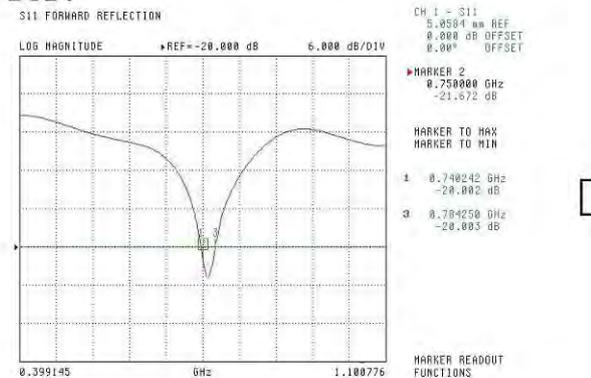


This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Laboratories.

SWR

Head

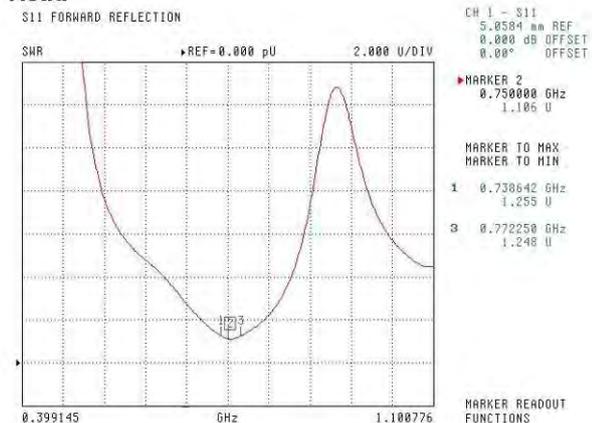

Body

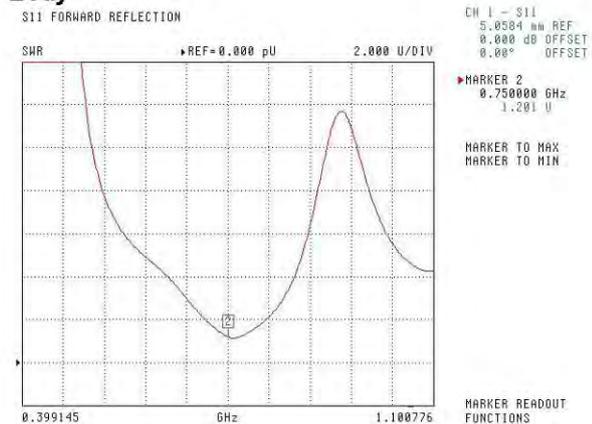

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

S11 FORWARD REFLECTION
IMPEDANCE

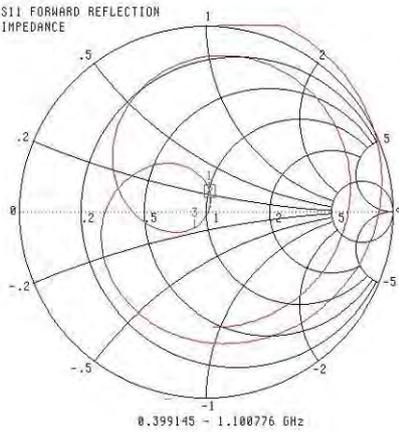

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET


MARKER 2
0.750000 GHz
52.505 Ω
2.731 jΩ

MARKER TO MAX
MARKER TO MIN
1 0.738642 GHz
50.918 Ω
11.112 jΩ
3 0.772250 GHz
43.762 Ω
-8.112 jΩ

MARKER READOUT
FUNCTIONS

Body

S11 FORWARD REFLECTION
IMPEDANCE

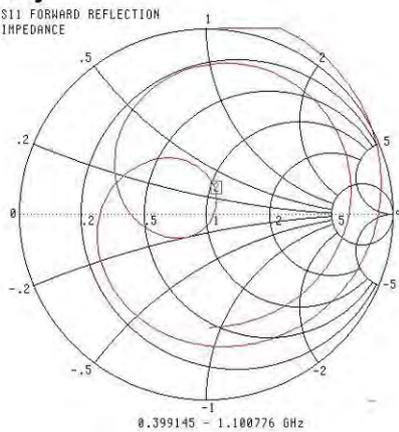

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
0.750000 GHz
55.933 Ω
6.574 jΩ

MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2013.

This page has been reviewed for content and attested to by signature within this document.

9

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1599
Project Number: BAC-dipole-cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.


Validation Dipole(Head and Body)

Manufacturer: APREL Laboratories
Part number: ALS-D-835-S-2
Frequency: 835 MHz
Serial No: 180-00558

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 8th October 2014
Released on: 8th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: 
Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.
Kanata, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613)435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 180-00558 was received with a damaged connection for a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 162.2 mm
 Height: 89.4 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	835 MHz	1.066 U	-30.344 dB	49.001 Ω
Body	835 MHz	1.089 U	-28.118 dB	53.117 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	835 MHz	9.773	6.174	14.713
Body	835 MHz	9.736	6.297	14.513

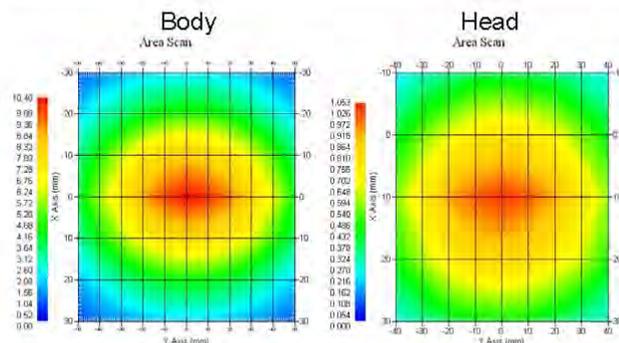

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00558. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Dipole 180-00558 was repaired prior to this calibration. The repair reliability depends upon correct usage of the dipole.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height
161.0 mm	89.8 mm	162.2 mm	89.4 mm

Electrical Verification

Tissue Type	Return Loss:	SWR:	Impedance:
Head	-30.344 dB	1.066 U	49.001 Ω
Body	-28.118 dB	1.089 U	53.117 Ω □

Tissue Validation

	Dielectric constant, ϵ_r	Conductivity, σ [S/m]
Head Tissue 835MHz	43.42	0.94
Body Tissue 835MHz	55.77	1.01

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head Tissue: Frequency Range 0.817 to 0.848 GHz

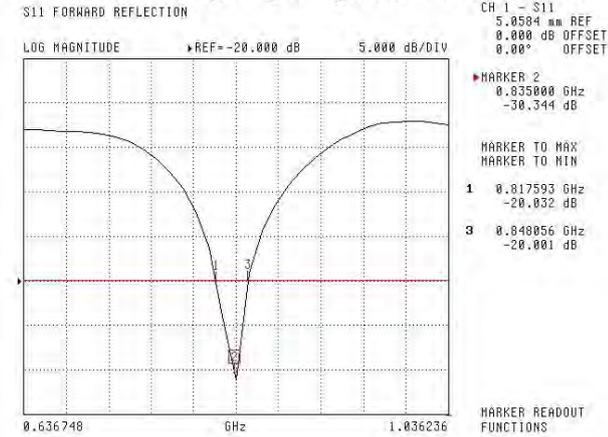

Body Tissue: Frequency Range 0.823 to 0.851 GHz

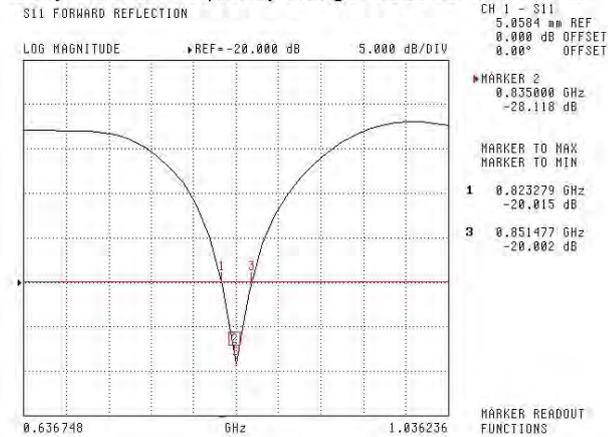


This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Laboratories.

SWR

Head

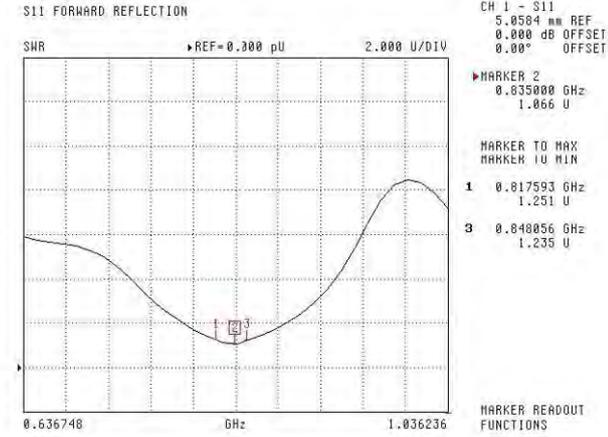

Body

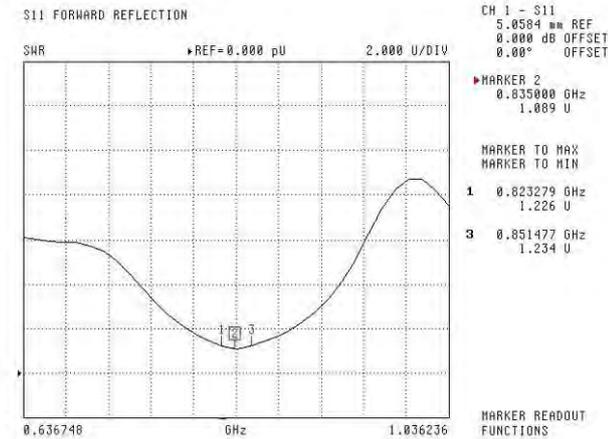


This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

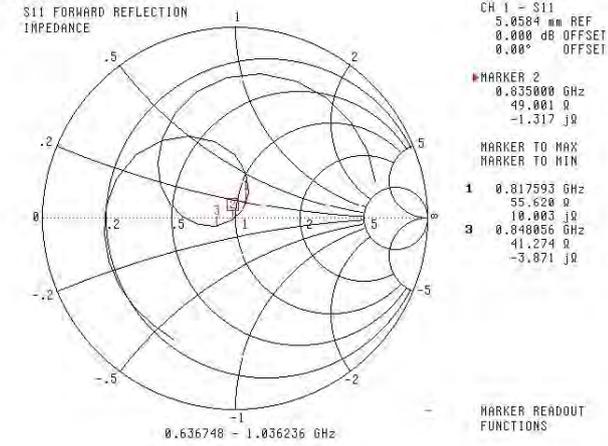

Body

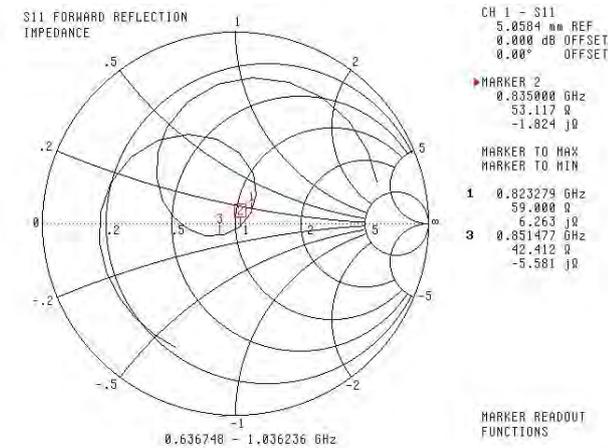

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014.

This page has been reviewed for content and attested to by signature within this document.

9

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1531
Project Number: BACL-5745

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

BACL Head & Body Validation Dipole

Manufacturer: APREL Laboratories
Part number: ALS-D-1750-S-2
Frequency: 1750 MHz
Serial No: 198-00304

Customer: ISL

Calibrated: 8th October, 2013
Released on: 8th October, 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: _____



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr,
OTTAWA, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 198-00304 was an original calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Constantin Teodorian, Test Engineer

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 75 mm
 Height: 42 mm

Electrical Calibration


Test	Result Head	Result Body
S11 R/L	-25.567	-20.548 dB
SWR	1.111U	1.207 U
Impedance	53.637Ω	55.929 Ω

System Validation Results, 1750 MHz


	1g	10g
Head	37.02	18.99
Body	36.65	18.85

Type	Epsilon	Sigma
Head	38.51	1.36
Body	51.79	1.53

Head

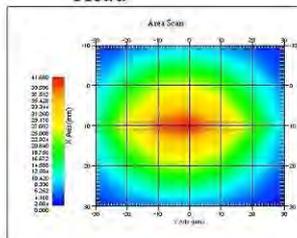

Body

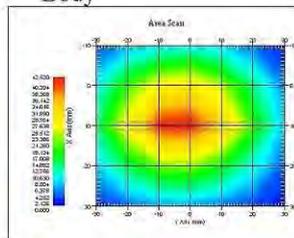

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-030 130 MHz to 26 GHz E-Field Probe Serial Number 215.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2 *Draft*: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"

Conditions

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 20 °C +/- 0.5°C

This was an original calibration taken from stock.

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

Measured Length	Measured Height
75 mm	42 mm

Tissue Validation

Frequency	Permittivity ϵ	Conductivity σ
1750 Head	38.23	1.38
1750 Body	52.86	1.54

This page has been reviewed for content and attested to by signature within this document.

5

NCL Calibration Laboratories

Division of APREL Laboratories.


Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-25.567	-20.548 dB
SWR	1.111U	1.207 U
Impedance	53.637Ω	55.929 Ω


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head

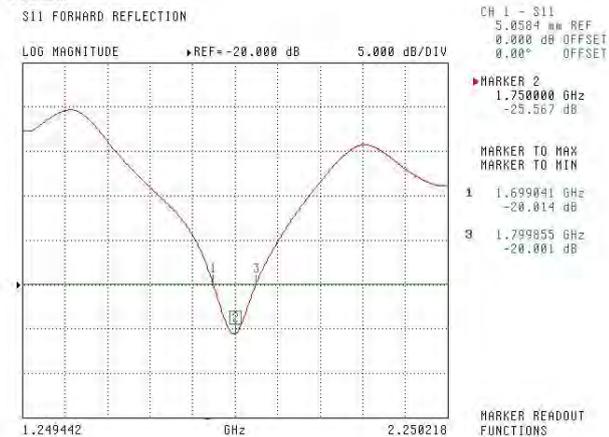

Body

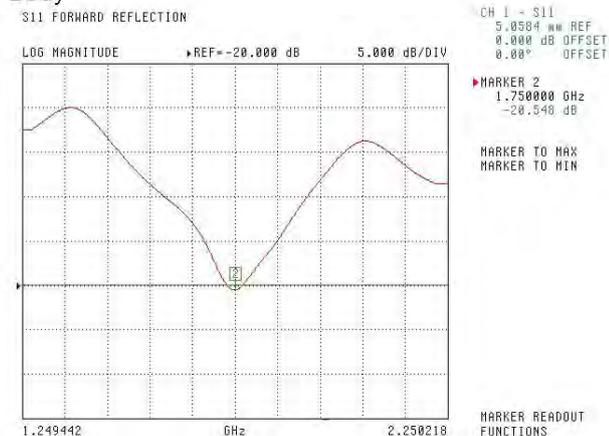


This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

**SWR
Head**

S11 FORWARD REFLECTION

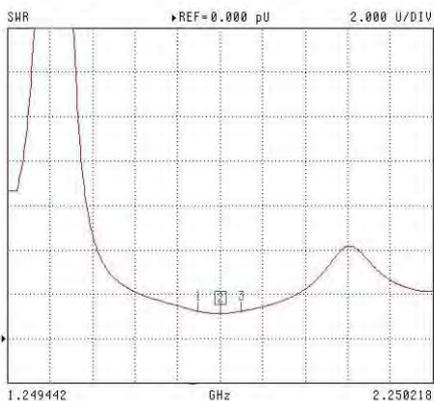

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.750000 GHz
1.111 U


MARKER TO MAX
MARKER TO MIN

- 1 1.699041 GHz
1.225 U
- 3 1.799055 GHz
1.225 U

MARKER READOUT
FUNCTIONS

Body

S11 FORWARD REFLECTION

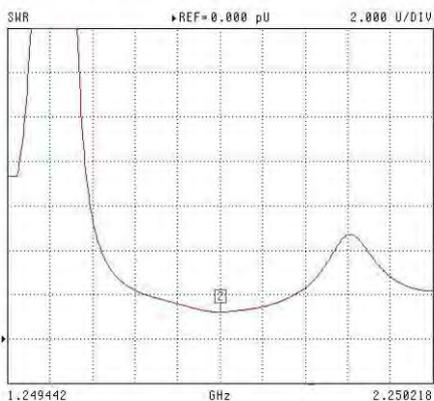

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.750000 GHz
1.207 U

MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.


7

NCL Calibration Laboratories

Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

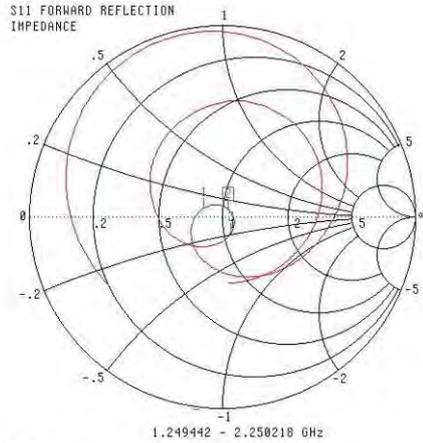

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET


MARKER 2
1.750000 GHz
53.637 Ω
3.752 jΩ

MARKER TO MAX
MARKER TO MIN

- 1 1.699041 GHz
41.539 Ω
3.495 jΩ
- 3 1.799055 GHz
54.266 Ω
-9.601 jΩ

MARKER READOUT
FUNCTIONS

Body

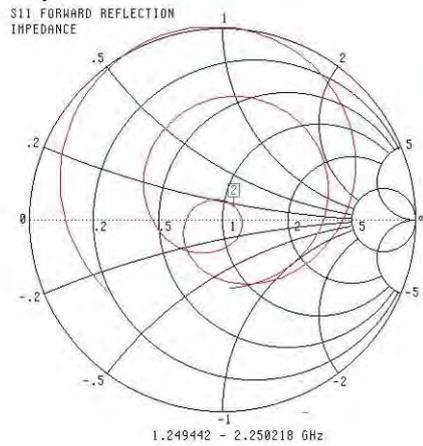

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.750000 GHz
55.929 Ω
7.016 jΩ

MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2013

This page has been reviewed for content and attested to by signature within this document.

9

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1601
Project Number: BAC-dipole -cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.


Validation Dipole (Head & Body)

Manufacturer: APREL Laboratories
Part number: ALS-D-1900-S-2
Frequency: 1900 MHz
Serial No: 210-00710

Customer: Bay Area Compliance Laboratory (China)

Calibrated: 9th October, 2014
Released on: 9th October, 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

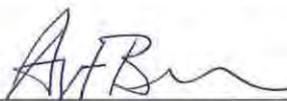Released By: 
Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.
Kanata, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613)435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 210-00710 was received in good condition and was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C


Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager

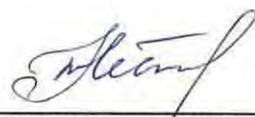

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 67.1 mm
Height: 38.9 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	1900 MHz	39.481	20.44	73.364
Body	1900 MHz	39.715	20.552	73.565

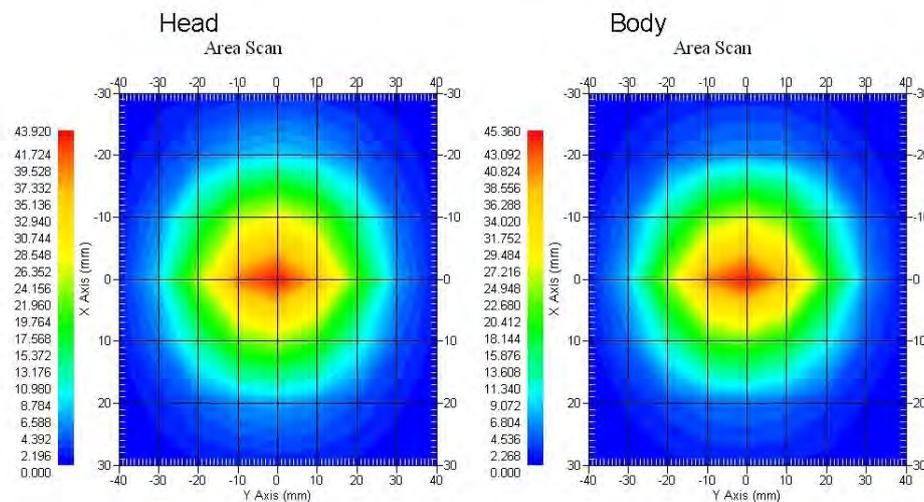

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00710. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions

Dipole 210-00710 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height
68.0 mm	39.5 mm	67.1mm	38.9 mm

Electrical Validation

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	1900MHz	1.084 U	-27.92 dB	52.247 Ω
Body	1900MHz	1.128 U	-24.40 dB	52.618 Ω

Tissue Validation

	Dielectric constant, ϵ_r	Conductivity, σ [S/m]
Head Tissue 1900MHz	40.20	1.38
Body Tissue 1900MHz	52.63	1.46

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head: Frequency Range 1.865 to 1.937 GHz

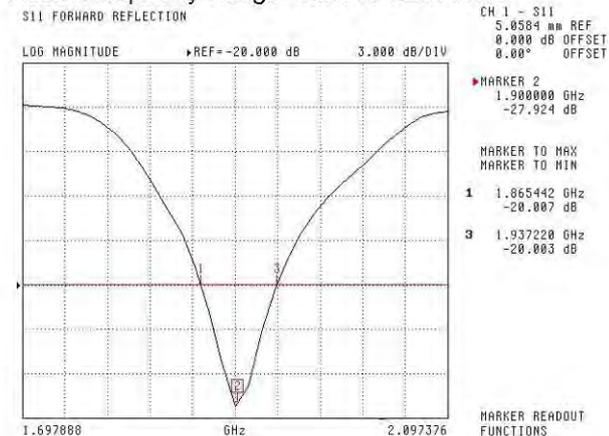

Body: Frequency Range 1.869 to 1.931 MHz

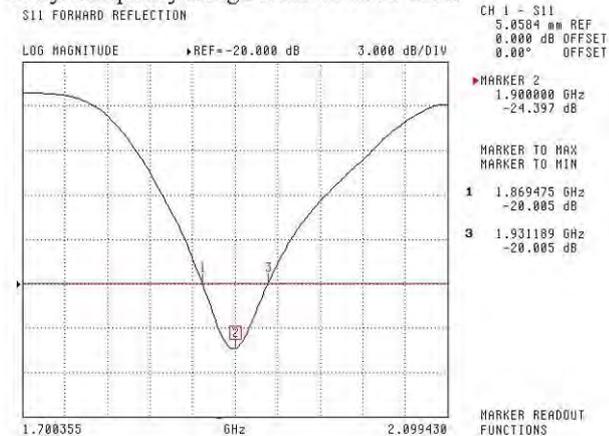


This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Laboratories.

SWR

Head

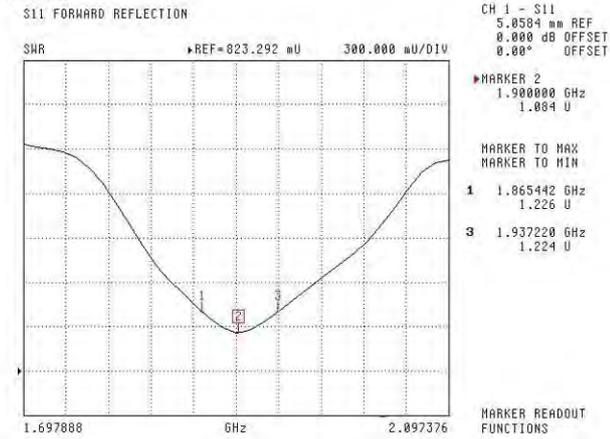

Body

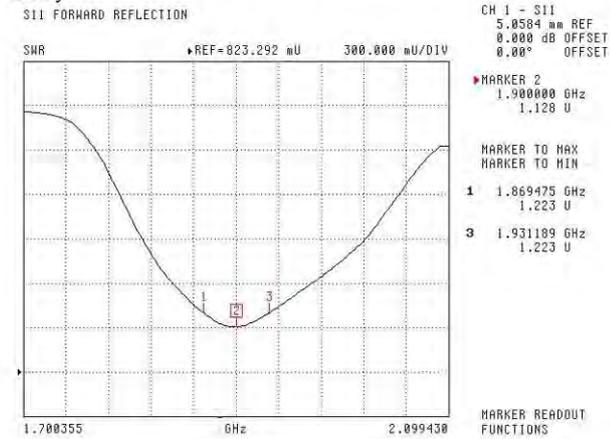

This page has been reviewed for content and attested to by signature within this document.

7


NCL Calibration Laboratories

Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

S11 FORWARD REFLECTION
IMPEDANCE

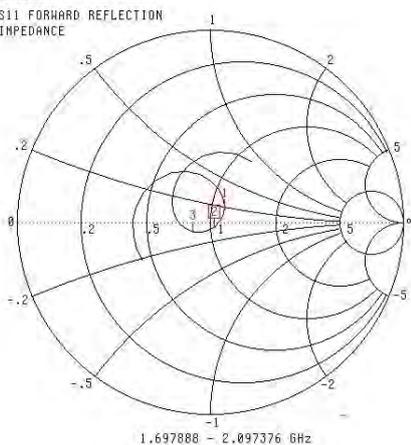

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.900000 GHz
52.247 Ω
-3.103 jΩ

MARKER TO MAX
MARKER TO MIN


1 1.865442 GHz
57.627 Ω
7.644 jΩ

3 1.937220 GHz
41.868 Ω
-4.273 jΩ

MARKER READOUT
FUNCTIONS

Body

S11 FORWARD REFLECTION
IMPEDANCE

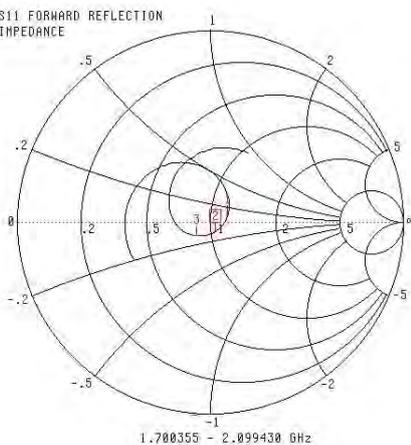

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.900000 GHz
52.618 Ω
-5.535 jΩ

MARKER TO MAX
MARKER TO MIN

1 1.869475 GHz
60.277 Ω
4.049 jΩ

3 1.931189 GHz
43.257 Ω
-6.479 jΩ

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2014

This page has been reviewed for content and attested to by signature within this document.

9

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1602
Project Number: BAC-dipole-cal-5779

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.


Validation Dipole (Head & Body)

Manufacturer: APREL Laboratories
Part number: ALS-D-2450-S-2
Frequency: 2450 MHz
Serial No: 220-00758

Customer: Bay Area Compliance Laboratory

Calibrated: 9th October, 2014
Released on: 9th October, 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

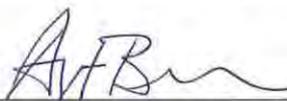Released By: 
Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.
Kanata, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613)435-8306

NCL Calibration Laboratories

Division of APREL Laboratories.

Conditions

Dipole 220-00758 was received in good condition and was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 52.4 mm
 Height: 30.3 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	2450 MHz	1.014 U	-45.184 dB	50.006Ω
Body	2450 MHz	1.070 U	-29.453 dB	50.672 Ω

System Validation Results

Tissue	Frequency	1 Gram	10 Gram	Peak
Head	2450 MHz	54.916	25.327	111.97
Body	2450 MHz	52.418	24.691	103.91

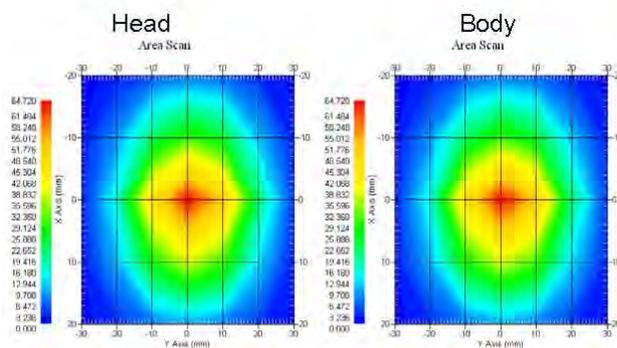

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 220-00758. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2 *Draft*: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"

Conditions

Dipole 220-00758 was a re-calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 20 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height
51.5 mm	30.4 mm	52.4 mm	30.3 mm

Electrical Specification

Tissue	Frequency	SWR:	Return Loss	Impedance
Head	2450 MHz	1.014 U	-45.184 dB	50.006Ω
Body	2450 MHz	1.070 U	-29.453 dB	50.672 Ω

Tissue Validation

	Dielectric constant, ϵ_r	Conductivity, σ [S/m]
Head Tissue 2450MHz	37.26	1.84
Body Tissue 2450MHz	53.61	1.90

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head: Frequency Range 2.390 to 2.517 GHz

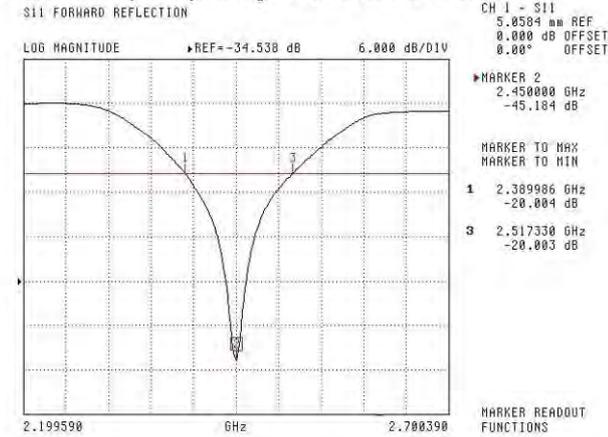

Body: Frequency Range 2.400 to 2.516 GHz

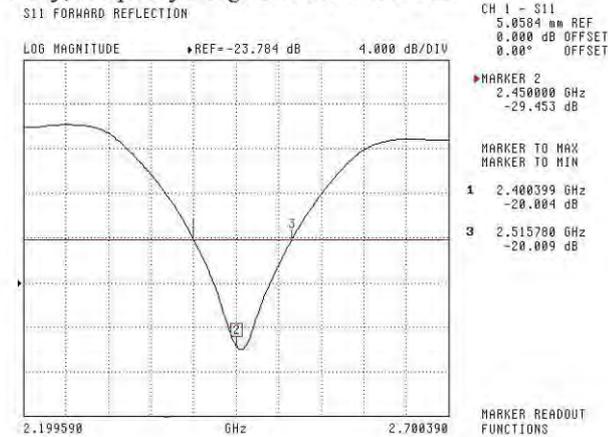

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.

SWR

Head

S11 FORWARD REFLECTION

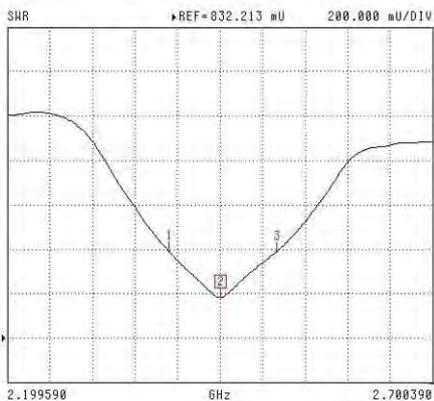

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
2.450000 GHz
1.014 U

MARKER TO MAX

MARKER TO MIN

- 1 2.389986 GHz
1.223 U
- 3 2.517330 GHz
1.223 U

MARKER READOUT FUNCTIONS

Body

S11 FORWARD REFLECTION



CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
2.450000 GHz
1.070 U

MARKER TO MAX

MARKER TO MIN

- 1 2.400399 GHz
1.223 U
- 3 2.515780 GHz
1.223 U

MARKER READOUT FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

7


NCL Calibration Laboratories

Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

S11 FORWARD REFLECTION
IMPEDANCE

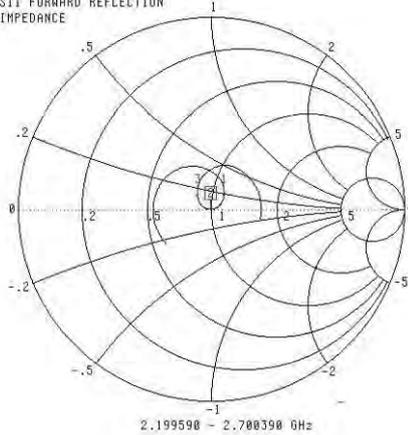

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
2.450000 GHz
50.006 Ω
-106.117 jΩ


MARKER TO MAX
MARKER TO MIN

- 1 2.389906 GHz
56.893 Ω
8.250 jΩ
- 3 2.517330 GHz
43.250 Ω
6.439 jΩ

MARKER READOUT
FUNCTIONS

Body

S11 FORWARD REFLECTION
IMPEDANCE

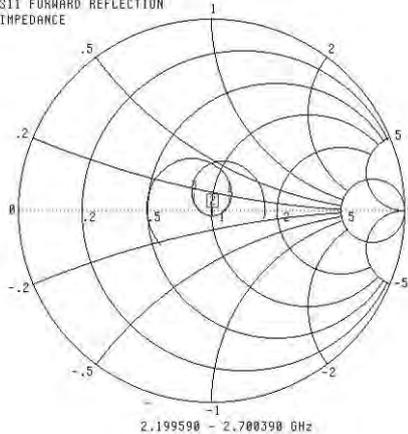

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
2.450000 GHz
50.672 Ω
-3.256 jΩ

MARKER TO MAX
MARKER TO MIN

- 1 2.400399 GHz
60.450 Ω
3.550 jΩ
- 3 2.515780 GHz
41.655 Ω
3.800 jΩ

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Test Equipment


The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2014.

This page has been reviewed for content and attested to by signature within this document.


9

APPENDIX D EUT TEST POSITION PHOTOS

Liquid depth $\geq 15\text{cm}$

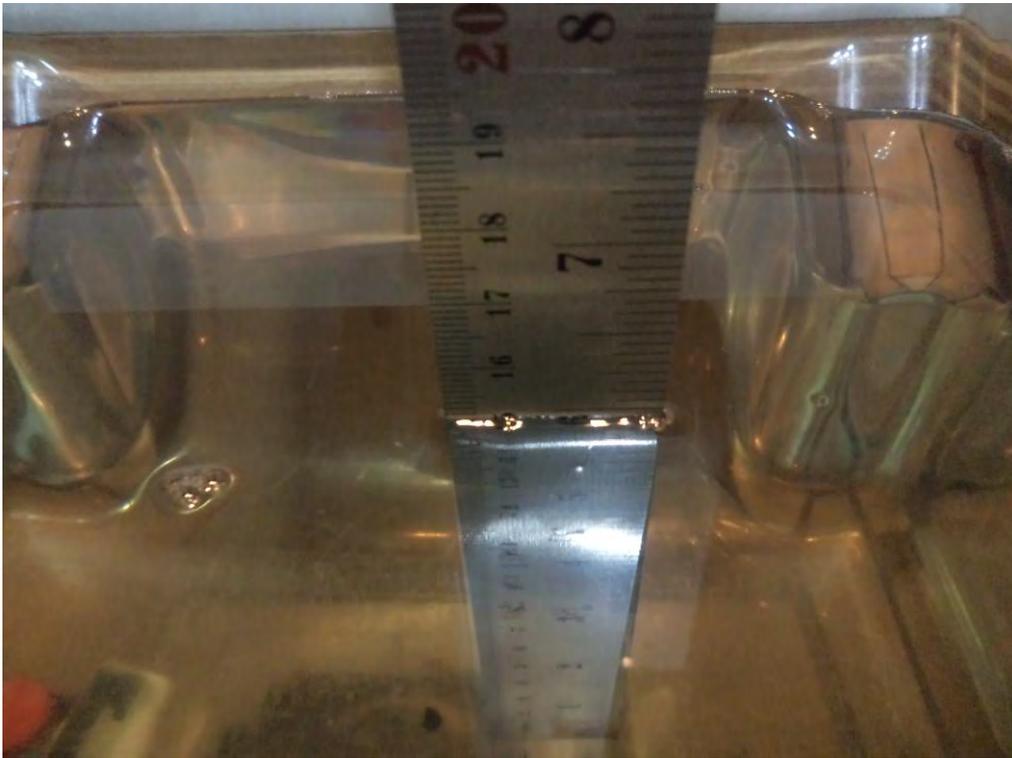

Body-worn Back Setup Photo (10mm)

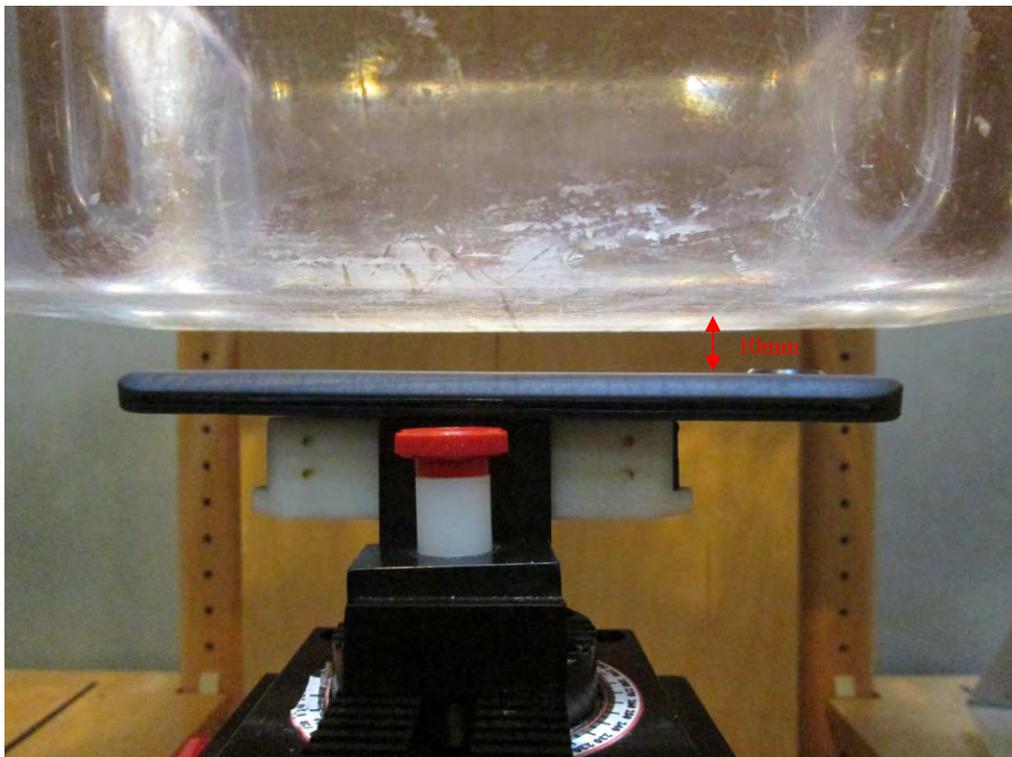


Body-worn Left Setup Photo (10mm)




Body-worn Right Setup Photo (10mm)




Body-worn Bottom Setup Photo (10mm)

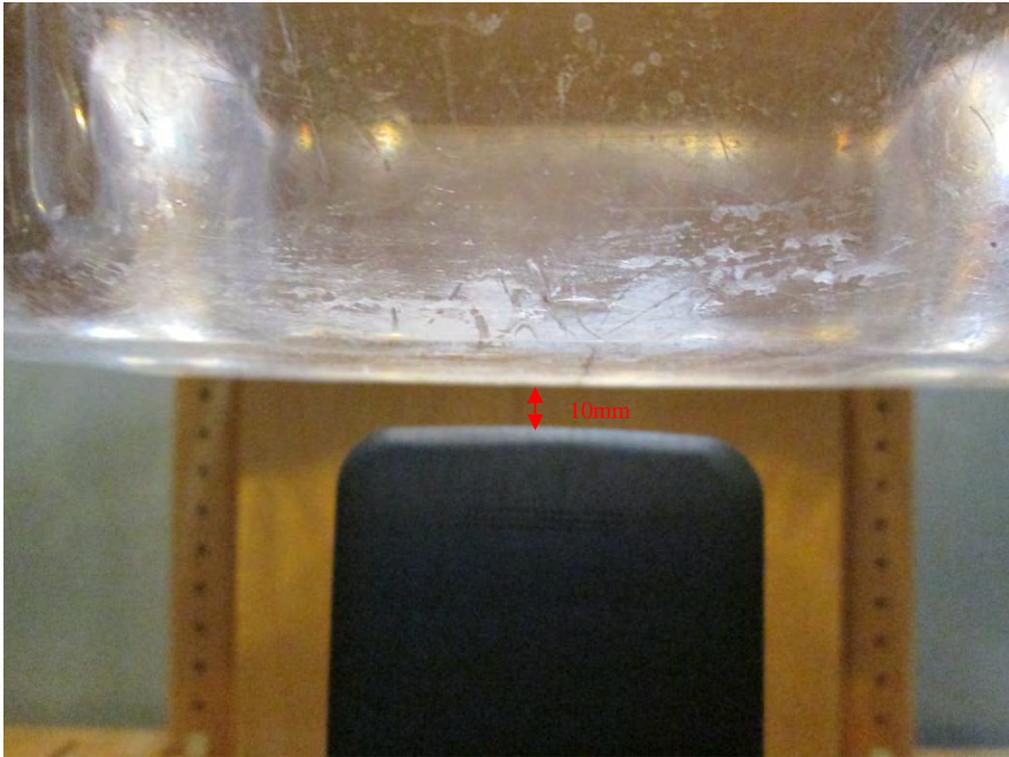


Left Head Touch Setup Photo

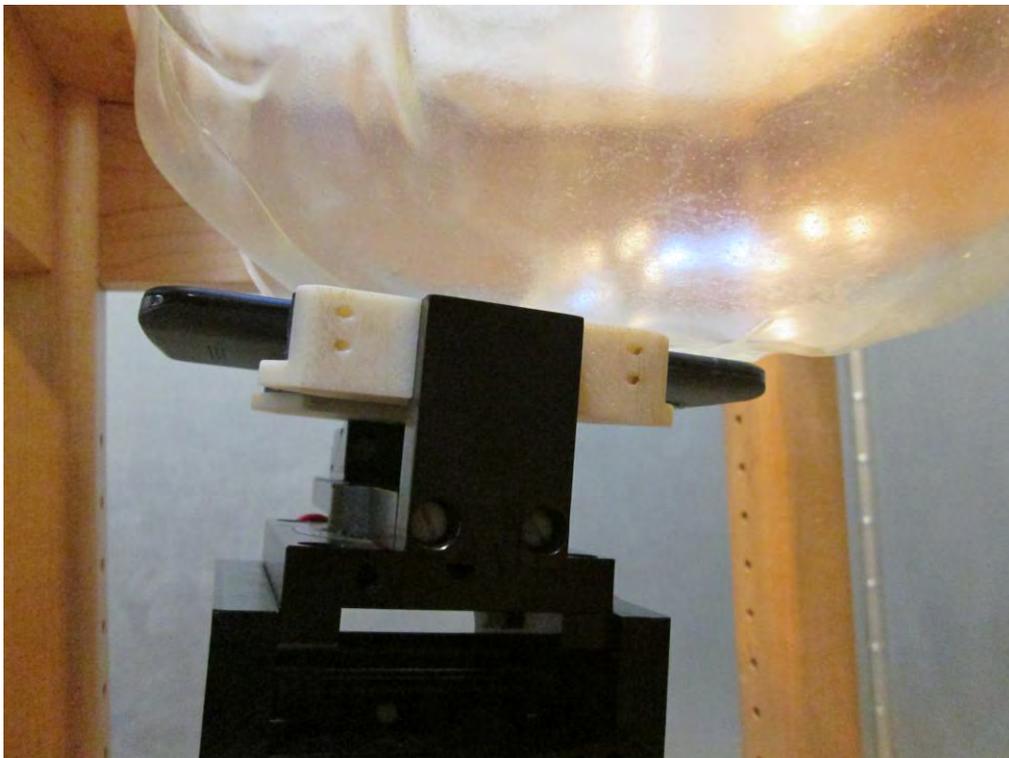

Left Head Tilt Setup Photo

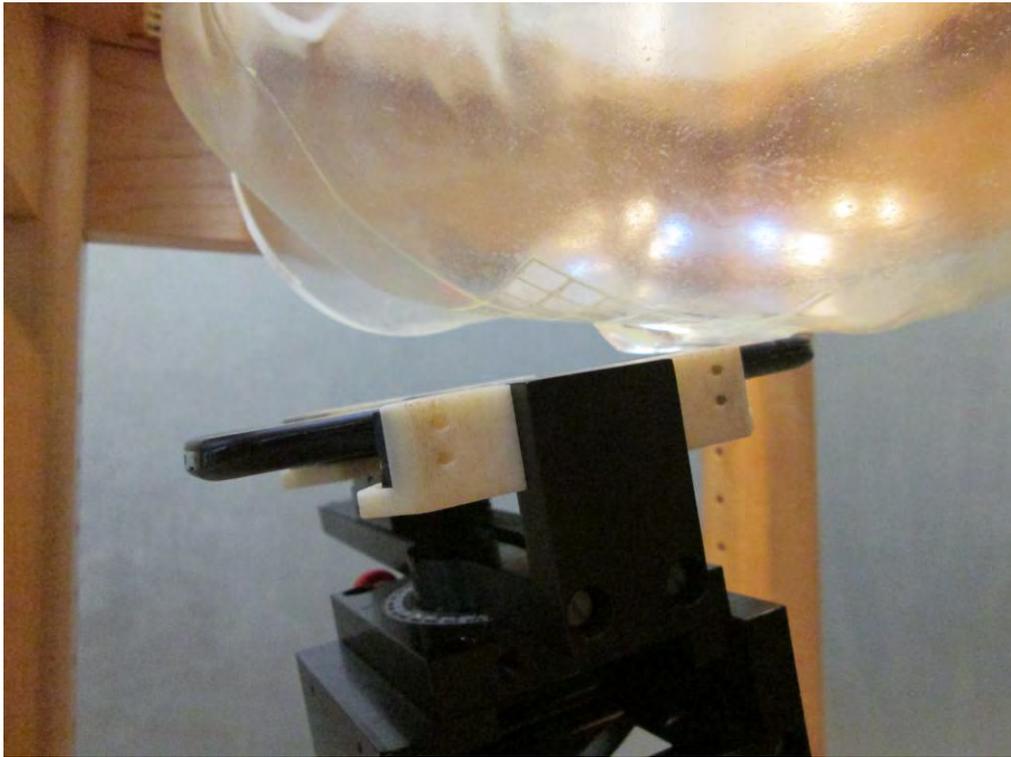

Right Head Touch Setup Photo

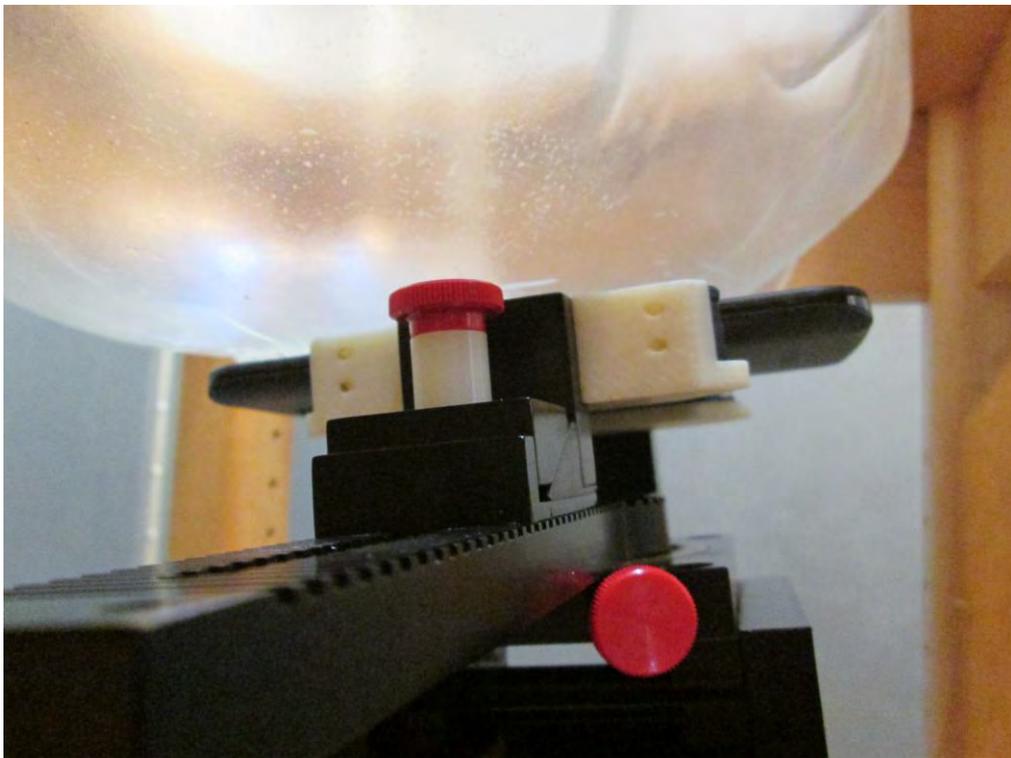

Right Head Tilt Setup Photo



APPENDIX E EUT PHOTOS

EUT – Front View



EUT – Back View



EUT –Left Side View




EUT – Right Side View



EUT – Top View



EUT – Bottom View

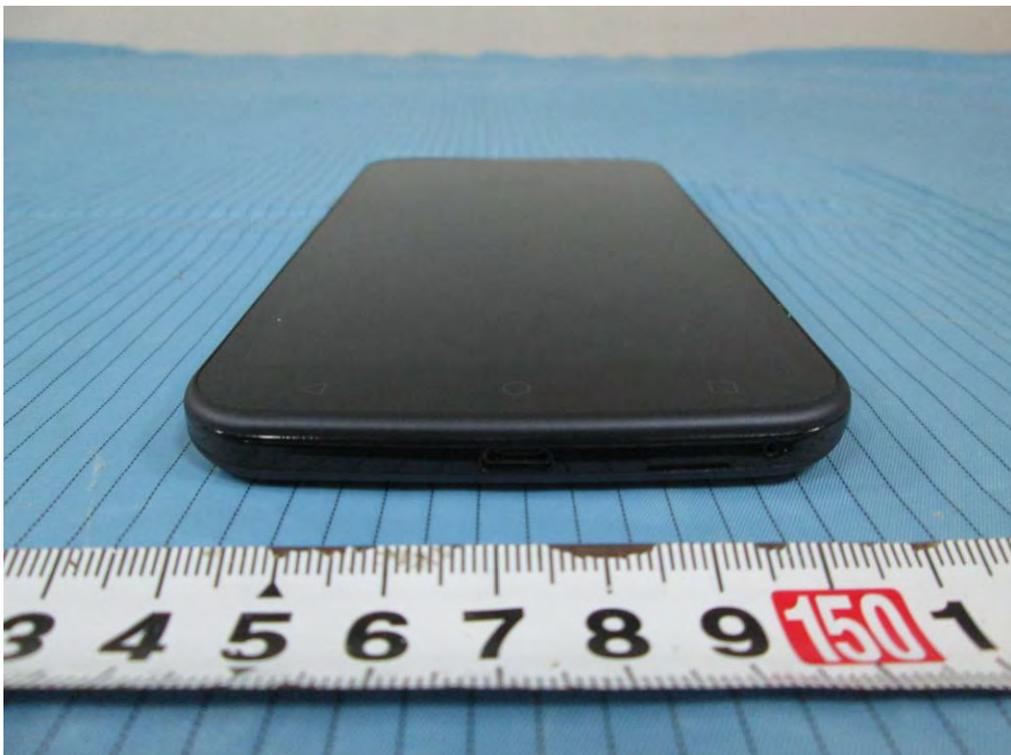

EUT – Uncover View



APPENDIX F INFORMATIVE REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645-652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.

PRODUCT SIMILARITY DECLARATION LETTER

Shenzhen Jingwah Information Technology Co., Ltd.
ADD: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Shenzhen, China
TEL: 0755-83975295 FAX: 0755-83204874

Product Similarity Declaration

To Whom It May Concern,

We, Shenzhen Jingwah Information Technology Co., Ltd. , hereby declare that we have a product named as Smart Phone(Model no: S55L) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series model (S55) on reports and certificate, all the models are identical schematics, except for the different Model No.

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature:

Sun MingXue

Manager



2015/12/28

***** END OF REPORT *****