

EMISSION - TEST REPORT

Report Number : **64.710.07.453.01** Date of Issue: 21 January 2008

Model / Serial No. : **R209KK-W / NIL**

Product Type : **Microwave oven**

Applicant : **Tsann Kuen Enterprise Co., Ltd.**

Manufacturer : **Tsann Kuen (Zhangzhou) Enterprise Co., Ltd.**

License holder : **Tsann Kuen Enterprise Co., Ltd.**

Address : **3 Kai Fa 2nd Rd, Pao An Industrial District, Ren Teh.**
Hsiang,
: **Tainan, Taiwan**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **18**

The test result only responds to the tested sample.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

DIRECTORY

	Pages
A) Documentation	
Directory	<u>2</u>
Test Regulations	<u>3</u>
General information	<u>3 - 4</u>
Equipment under Test	<u>5</u>
B) Test Data	
Radiation Hazard Measurement	<u>6</u>
Input Power Measurement	<u>7</u>
RF Output Power Measurement	<u>8 - 9</u>
Operating Frequency Measurement	<u>10 - 11</u>
Conducted Emission	12 - 15
Radiated Emission	<u>16 - 18</u>
C) Photographs of The Test Set-Up	
Set-up for radiation measurement below 1GHz	21
Set-up for radiation measurement above 1GHz	<u>22</u>

TEST REGULATIONS :

The tests were performed according to the following regulations:

- - 47 CFR Part 18

Test Facilities

- - Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory.

Add: Bldg, of Shenzhen Metrology & Quality Inspection Institute, Longzhu Road,
Nanshan, Shenzhen 518055 P.R.C.

Environmental Conditions

Temperature:	: 25 °C
Relative Humidity:	: 66 %
Atmospheric Pressure:	: 1006 mBar

Power Supply System Utilized:

Power supply system : 120V/60Hz/1Ø

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Short Description of the Equipment under Test(EUT)

R209KK-W is a microwave oven operates in the frequency 2.450GHz.

Communication type:	R209KK-W
Power Consumption:	120V~60Hz, 1170W (microwave)
Output power:	800W
Operation Frequency:	2450MHz
Magnetron Manufacturer:	TOSHIBA
Magnetron Model Number:	2M231H(L)
Power Cable:	120cm

Report Number: 64.710.07.453.01

Page 3 of 22

Rev.No 1.7

R2XXK Derived Types:

A Model No. (s)	B Model No. (s)	Comments
R-230K#-W	R-220K#-W	Appearance of door frame sash
R-209K#-W	R-220K#-W	Key-sheet design on control panel and appearance of door frame sash

Note: “#” maybe replaced by capitalized letter denoting cosmetic color.

Definitions For Symbols Used In This Test Report

- - Black box indicates that the listed condition, standard or equipment is applicable for this report
- - Blank box indicates that the listed condition, standard or equipment was not applicable for this report.

Status of Facility Used for Testing

Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory located at Bldg, of Shenzhen Metrology & Quality Inspection Institute, Longzhu Road, Nanshan, Shenzhen, Guangdong, China is listed in the US Federal Communications Commission list of facilities approved to perform measurements.

Load for Microwave Ovens

For all measurements, the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000 watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000 watts output, each quantity was increased by 50% for each 500 watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- Load for power Input and output measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for radiation hazard measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.
- Load for other measurement: 700 milliliters of water in the beaker located in the center of the oven.

**Test Equipment Used:**

Serial No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
99171	Microwave survey meter	Holaday	HI-1501	05 Dec. 2007	1 Year
508015	power meter	EVERFINE	PF9808B	04 Jun.2007	1 Year
SB2552	Digital thermometer	Anritsu	HFT-90V/90	14 Mar. 2007	1 year
100003	EMI Test Receiver	Rohde & Schwarz	ESCS30	30 Jan. 2007	1 Year
100002	AMN	Rohde & Schwarz	ESH2-Z5	30 Jan. 2007	1 Year
838786/013	EMI Test Receiver	Rohde & Schwarz	ESI26	30 Jan. 2007	1 Year
2591	Bilog Antenna	Chase	CBL6112B	Jan.26, 2007	1 Year
100014	Horn Antenna	Rohde & Schwarz	HF906	Jan.26, 2007	1 Year
100013	Horn Antenna	Rohde & Schwarz	HF906	Jan.26, 2007	1 Year
SB3435/01	Amplifier(1-18GHz)	Rohde & Schwarz	---	Jan.26, 2007	1 Year
SB3450/01	3m Semi-anechoic chamber	Albatross Projects	9X6X6	Jan 26,2007	1 Year

RADIATION HAZARD MEASUREMENT

TEST REFERENCE: ANSI C63.4:2003, FCC/OST MP-5:1986

TEST PROCEDURE

The EUT was set up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed.

A 1000ml water load was placed in the center of the oven and the oven was operated at maximum output power.

TEST Result:

There were no microwave leakage exceeding power level of $0.35\text{mW}/\text{cm}^2$ (with transformer YL-R805ACKA-1) and $0.2\text{ mW}/\text{cm}^2$ (with transformer RTRN-A766WRZZ) observed at any point 5cm or more from the external surface of the oven.

A maximum of $1.0\text{ mW}/\text{cm}^2$ is allowed in accordance with the applicable Federal Standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.

INPUT POWER MEASUREMENT

TEST REFERENCE: ANSI C63.4:2003, FCC/OST MP-5:1986

TEST PROCEDURE

The EUT was set up according to the FCC MP-5 and FCC Part 18 for Input power measurement.

Input power and current was measured using a power analyzer.

A 1000ml water load was placed in the center of the oven and oven was operated at maximum output power.

A 1000ml water load was chosen for its compatibility with the procedure commonly used by manufacturers to determine their input ratings.

TEST Result:

:

With transformer YL-R805ACKA-1:

Input Voltage (Vac/Hz)	Input Current (amps)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	8.2	1030	1170

With transformer RTRN-A766WRZZ

Input Voltage (Vac/Hz)	Input Current (amps)	Measured Input Power (watts)	Rated Input Power (watts)
120/60	8.6	1075	1170

RF OUTPUT POWER MEASUREMENT

TEST REFERENCE: ANSI C63.4:2003, FCC/OST MP-5:1986

TEST PROCEDURE

The EUT was set up according to the FCC MP-5 and FCC Part 18C for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 1000ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.

RF Output Power

$$= (4.2\text{joules/calorie})(\text{volume in milliliters})(\text{temperature rise}) / (\text{time in seconds})$$

$$= 4.2\text{joules/calorie} \times 1000 \times (\text{Final Temp} - \text{Initial Temp}) / 120$$

TEST Result:

With transformer YL-R805ACKA-1:

Quality of Water (ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)	RF Output Power (watts)
1000	23.3	43.1	120	693

With transformer RTRN-A766WRZZ:

Quality of Water (ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)	RF Output Power (watts)
1000	23.7	40.1	120	572

☐ The measurement output power was found to be less than 500watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared to the limit of 25uV/meter at a 300-meters measurement distance

☐ The measured output power was found to exceed 500watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared with the limit calculated as following:

With transformer YL-R805ACKA-1:

$$\begin{aligned} \text{LFS} &= 25 \times \text{SQRT} (\text{power output} / 500) \\ &= 25 \times \text{SQRT} (693 / 500) \end{aligned}$$

≈ 29.43

Where: LFS is the maximum allowable field strength for out-of-band emissions in uV/meter at a 300-meters measurement distance. Power Output is the measured output power in watts.

Model Number	LFS	dB(uV/M)	dB(uV/M)@3m
R209KK-W	29.4	29.4	69.4

With transformer RTRN-A766WRZZ:

$$\begin{aligned}
 \text{LFS} &= 25 \times \text{SQRT} (\text{power output} / 500) \\
 &= 25 \times \text{SQRT} (572 / 500) \\
 &\approx 26.74
 \end{aligned}$$

Where: LFS is the maximum allowable field strength for out-of-band emissions in uV/meter at a 300-meters measurement distance. Power Output is the measured output power in watts.

Model Number	LFS	dB(uV/M)	dB(uV/M)@3m
R209KK-W	26.74	28.5	68.5

OPERATING FREQUENCY MEASUREMENT

TEST REFERENCE: ANSI C63.4:2003, FCC/OST MP-5:1986

TEST PROCEDURE

The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating frequency measurement.

1) *Variation in Operating Frequency with Time*

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

2) *Variation in Operating Frequency with Line Voltage*

The EUT was operated/ warmed by at least 10minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

TEST Result:

With transformer YL-R805ACKA-1:

Variation in Operating Frequency with Time:

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2458.4	2461.2

Variation in Operating Frequency with Line Voltage:

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2459.2	2462.4
Note: Line voltage varied from 96Vac to 150Vac	

With transformer RTRN-A766WRZZ:

Variation in Operating Frequency with Time:

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2456.8	2459.6

Variation in Operating Frequency with Line Voltage:

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2452	2458.4
Note: Line voltage varied from 96Vac to 150Vac	

CONDUCTED EMISSION

TEST REFERENCE: ANSI C63.4:2003, FCC/OST MP-5:1986

TEST PROCEDURE

The EUT was set up according to the guideline of ANSI C63.4: 2003 & FCC MP-5 for conducted emissions.

The EMI test receiver was set to investigate the spectrum from 150KHz to 30MHz.


During the conducted emission test, IF B/W of the EMI test receiver was set to 9KHz.

During the conducted emission test, the EUT power cord was connected to the outlet the LISN.

Maximizing procedure were performed on the six(6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

TEST Setups:

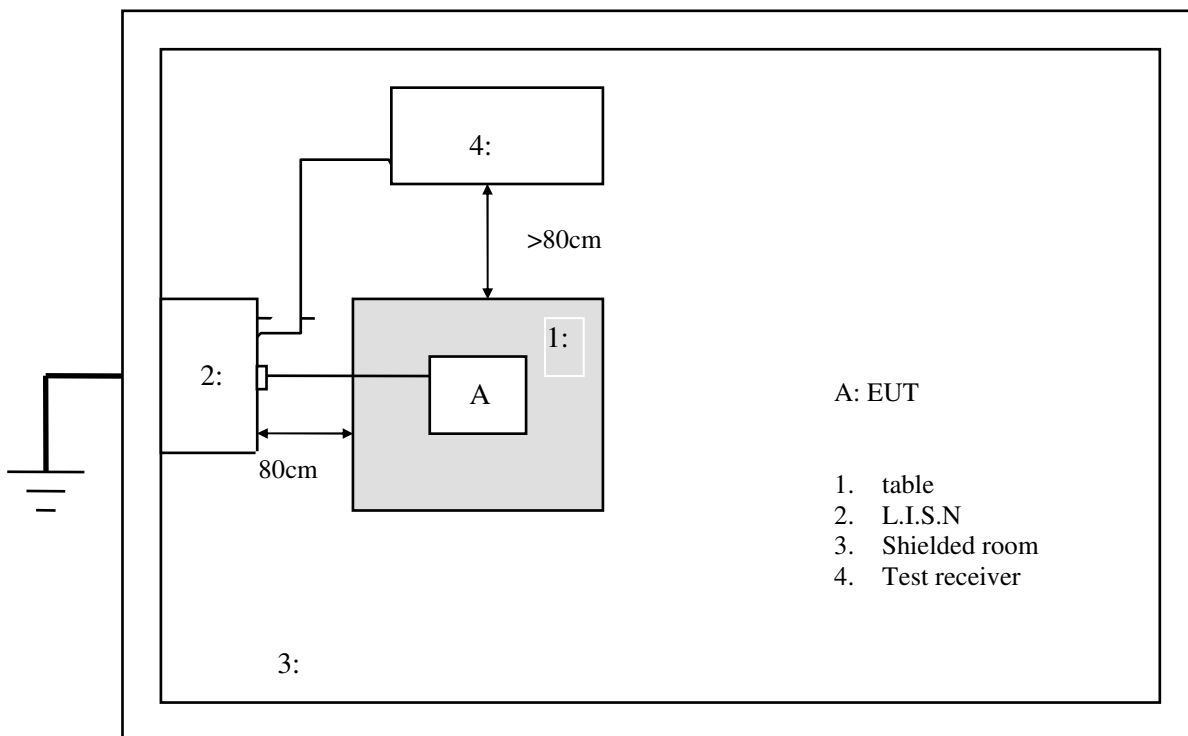

TEST Result:

With transformer YL-R805ACKA-1:

Line	Frequency (MHz)	Corrected QP Reading (dBuV)	Limit (dBuV)	Corrected AV Reading (dBuV)	Limit (dBuV)
L	0.323	48.6	59.6	15.1	49.6
L	0.664	35.4	56	12.8	46
L	0.708	30.8	56	14.1	46
L	0.736	38.6	56	12.3	46
L	0.796	26.2	56	9.4	46
L	1.295	15.6	56	3.9	46
N	0.290	51.2	60.5	22.6	50.5
N	0.322	50.5	59.6	22.8	49.6
N	0.752	46	56	19.4	46
N	0.972	40.1	56	16.8	46
N	1.420	37.6	56	17.8	46
N	1.490	30.9	56	10.1	46


With transformer RTRN-A766WRZZ:

Line	Frequency (MHz)	Corrected QP Reading (dBuV)	Limit (dBuV)	Corrected AV Reading (dBuV)	Limit (dBuV)
L	0.165	47.5	65.2	16.7	55.2
L	0.222	51.5	62.7	19.1	52.7
L	0.326	47.4	59.5	25.6	49.5
L	0.382	51.8	58.2	20.0	48.2
L	0.410	43.1	57.6	17.7	47.6
L	0.466	47.5	56.5	15.9	46.5
N	0.398	28.9	57.8	6.5	47.8
N	0.450	28.8	56.8	5.8	46.8
N	0.572	25.0	56	5.8	46
N	0.764	21.1	56	4.3	46
N	1.266	22.3	56	4.3	46
N	1.660	22.8	56	5.3	46




China

With transformer YL-R805ACKA-1:

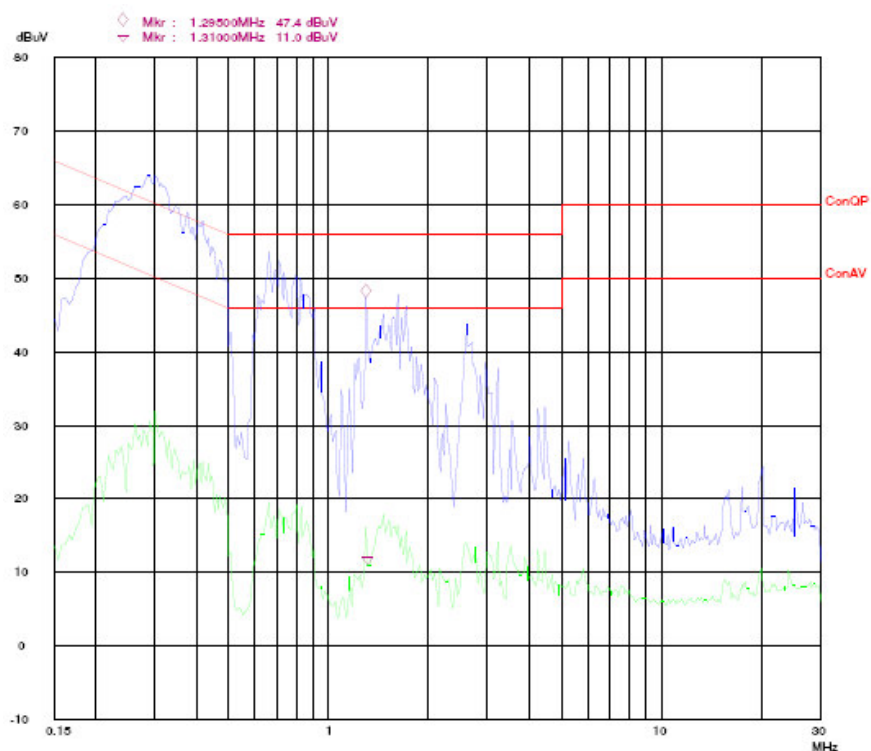

Line L Conducted Emission Graph

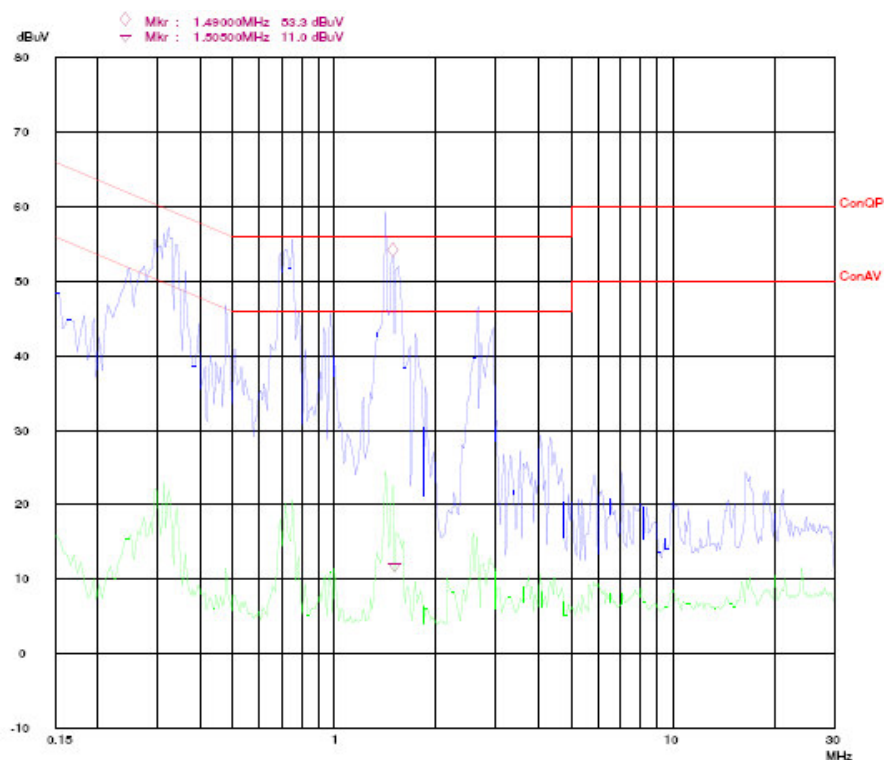


Line N Conducted Emission Graph




China

With transformer RTRN-A766WRZZ:

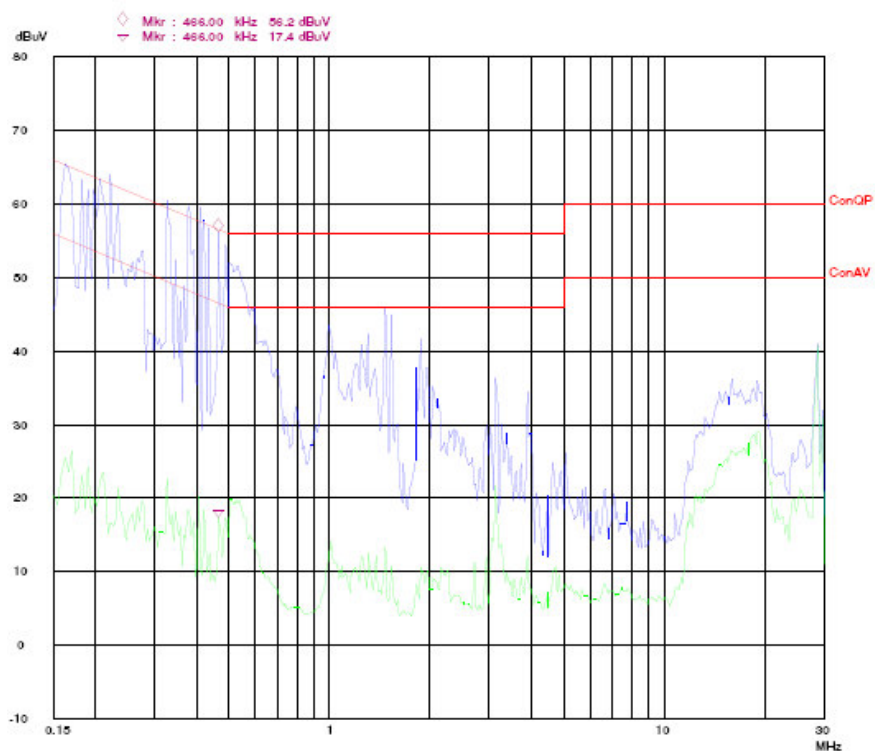

Line L Conducted Emission Graph

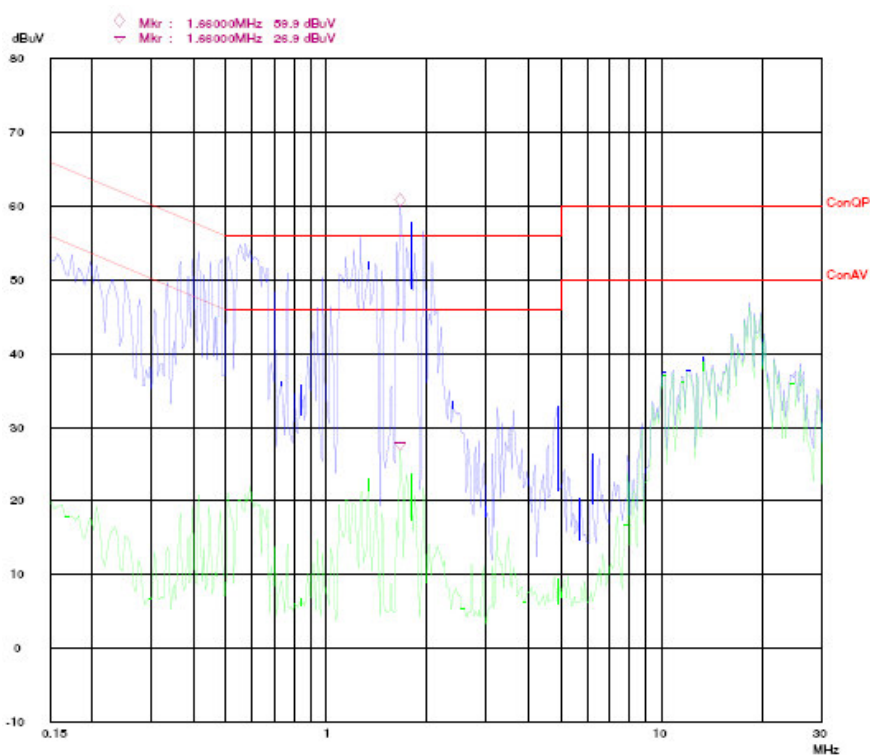

Line N Conducted Emission Graph

RADIATED EMISSION

TEST REFERENCE: ANSI C63.4:2003, FCC/OST MP-5:1986

TEST PROCEDURE

The EUT was set up according to the guideline of ANSI C63.4: 2003 & FCC MP-5 for radiated emissions. The radiated emission tests were performed in the 3 meters chamber A test site.

The EUT was connected to 120VAC/60Hz power source.

The system was investigated from 30MHz to 24.5GHz

During the radiated emission test, the EMI test receiver was set with the following configurations:


<i>Frequency Range</i>	<i>R B/W</i>	<i>Video B/W</i>	<i>IF B/W</i>
30 – 1000 MHz	100 kHz	300 kHz	120 kHz
Above 1 GHz	1 MHz	30Hz	
Start Frequency.....	1 GHz		
Stop Frequency.....	24.5 GHz		
Sweep Speed.....	Auto		
Video Bandwidth.....	30 Hz		
Resolution Bandwidth.....	1 MHz		

Maximizing procedure was performed on the six(6) highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was in the normal operating mode during the final qualification test to represent the worst results.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz and average detection mode above 1GHz.

TEST Setups:

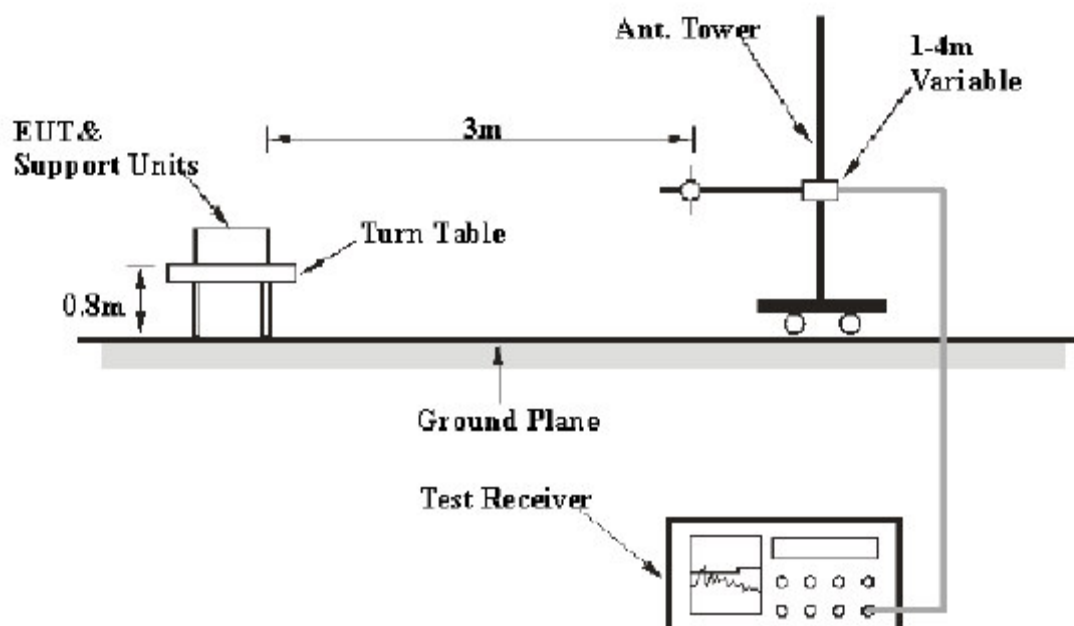

Corrected Amplitude

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

TEST Result:

With transformer YL-R805ACKA-1:

Frequency (MHz)	Antenna Polarization	Corrected Reading, QP (dBuV/m)	3 Meters Limit (dBuV/m)
30MHz – 1GHz			
30.003	H	22.8	69.4
109.677	H	18.9	69.4
177.734	H	21.8	69.4
206.389	H	22.4	69.4
689.063	H	31.1	69.4
949.460	H	32.6	69.4
30.005	V	23.0	69.4
119.388	V	19.7	69.4
199.123	V	16.2	69.4
342.659	V	28.4	69.4
634.546	V	28.4	69.4
865.871	V	28.9	69.4
Frequency (MHz)	Antenna Polarization	Corrected Reading, AV (dBuV/m)	3 Meters Limit (dBuV/m)
1GHz – 25GHz			
4924.840	H	47.7	69.4
7381.513	H	53.6	69.4
9213.436	H	48.4	69.4
9839.409	H	47.9	69.4
14761.833	H	51.3	69.4
17234.585	H	49.9	69.4
4925.962	V	44.2	69.4
7382.255	V	55.2	69.4
7616.162	V	40.1	69.4
9837.725	V	52.8	69.4
14768.877	V	46.6	69.4
17246.463	V	47.8	69.4



With transformer RTRN-A766WRZZ:

Frequency (MHz)	Antenna Polarization	Corrected Reading, QP (dBuV/m)	3 Meters Limit (dBuV/m)
30MHz – 1GHz			
55.973	H	16.7	68.5
64.789	H	18.5	68.5
173.695	H	21.9	68.5
197.145	H	22.5	68.5
690.948	H	33.7	68.5
716.385	H	34.0	68.5
30.010	V	22.6	68.5
68.877	V	12.8	68.5
169.952	V	20.9	68.5
360.461	V	25.7	68.5
723.679	V	34.8	68.5
922.442	V	35.7	68.5
Frequency (MHz)	Antenna Polarization	Corrected Reading, AV (dBuV/m)	3 Meters Limit (dBuV/m)
1GHz – 25GHz			
4921.012	H	44.6	68.5
7381.376	H	63.2	68.5
8510.351	H	40.5	68.5
9846.222	H	55.5	68.5
14784.479	H	46.9	68.5
4216.282	V	32.9	68.5
4560.691	V	32.9	68.5
4916.122	V	38.9	68.5
7324.418	V	61.0	68.5
9838.406	V	40.9	68.5
14782.816	V	47.8	68.5

Equipment Under Test

The equipment under test was operated under the following conditions during emissions testing:

- ☐ - Standby
- ☐ - Test Program (H - Pattern)
- ☐ - Test Program (Color Bar)
- ☐ - Test Program (Customer Specified)

■ - Normal use

- ☐ - _____
- ☐ - _____
- ☐ - _____

The following peripheral devices and interface cables were connected during the testing:

- | | |
|----------------------------------|--------------|
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |

■ - unshielded power cable (75cm)

☐ - unshielded cables

☐ - shielded cables

TUVPS.No.: _____

☐ - customer specific cables

- ☐ - _____
- ☐ - _____



China

GENERAL REMARKS:

FIANL JUDGEMENT:

The requirements according to the technical regulations and tested operation modes are

☒ - Met

☐ - **Not** Met

The Equipment Under Test

☒ - **Fulfills** the general approval requirements cited on page 3.

☐ - **Does not** fulfill the general approval requirements cited on page 3.

Testing Start Date: 20 November 2007

Testing End Date: 10 January 2008

- TÜV PRODUCT SERVICE ASIA LTD. -

Reviewed by:

A handwritten signature in black ink, appearing to read "Kitty Xu".

Kitty Xu

Prepared by:

A handwritten signature in black ink, appearing to read "Tony Liu".

Tony Liu


Report Number: 64.710.07.453.01

Page 20 of 22

Rev.No 1.7

Photographs of the Test Set-Up

Set-up for radiation measurement below 1GHz

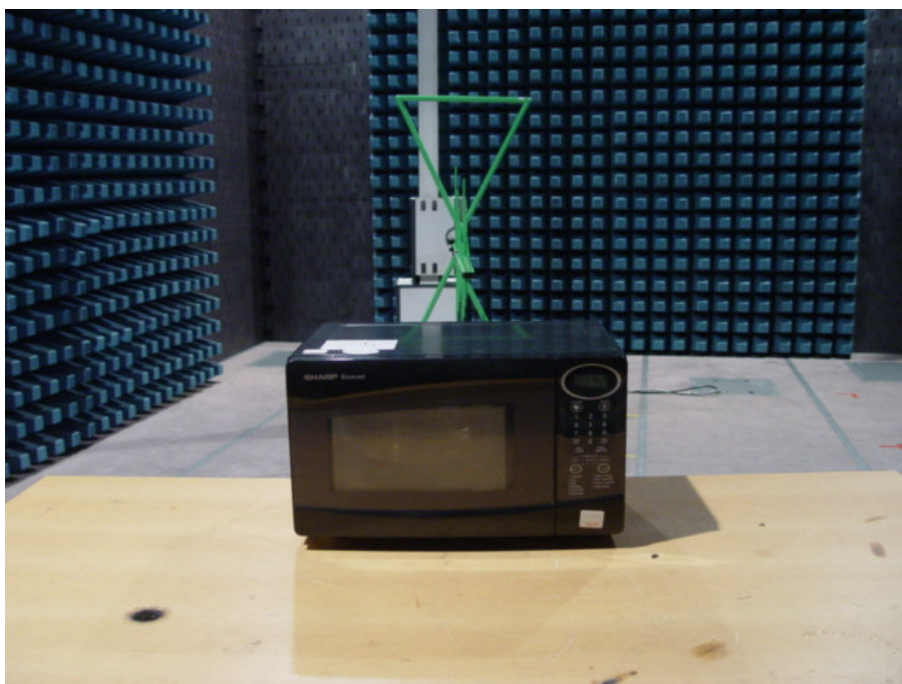

Set-up for radiation measurement above 1GHz

