



849 NW State Road 45  
Newberry, FL 32669 USA  
Ph: 888.472.2424 or 352.472.5500  
Fax: 352.472.2030  
Email: [info@timcoengr.com](mailto:info@timcoengr.com)  
Website: [www.timcoengr.com](http://www.timcoengr.com)

## FCC PART 15.247 TEST REPORT DIGITAL SPREAD SPECTRUM

<b>Applicant</b>	SABINE, INC.	
<b>Address</b>	13301 HWY 441	
	ALACHUA FL 32615 USA	
<b>FCC ID</b>	RBODS80C	
<b>Model Number</b>	DS80C	
<b>Product Description</b>	TABLETOP BOUNDARY MICROPHONE	
<b>Date Sample Received</b>	6/10/2013	
<b>Date Tested</b>	6/10/2013	
<b>Tested By</b>	Nam Nguyen	
<b>Approved By</b>	Nam Nguyen	
<b>Report Number</b>	3082AXUT12TestReport.docx	
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Testing Certificate # 0955-01



## TABLE OF CONTENT

GENERAL REMARKS.....	3
GENERAL INFORMATION .....	4
EMC EQUIPMENT LIST .....	5
TEST PROCEDURES .....	6
RADIATION INTERFERENCE .....	7
POWER LINE CONDUCTED INTERFERENCE .....	11
OCCUPIED BANDWIDTH.....	12
POWER OUTPUT .....	14
SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....	15
RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND .....	16
POWER SPECTRAL DENSITY.....	18

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

## Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

## Authorized Signatory Name:



Nam Nguyen  
Project Manager/Testing Technician

**Date:** June 20, 2013

APPLICANT: SABINE, INC.  
FCC ID: RBODS80C  
REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## GENERAL INFORMATION

### DUT Specification

Applicable Standard	Part 15.247		
DUT Description	TABLETOP BOUNDARY MICROPHONE		
FCC ID	RBODS80C		
Operating Frequency	TX: (902.4 – 927.6) MHz		
Number of channels	16 channels		
DUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input type="checkbox"/> Portable
Antenna Connector	None		
Antenna	Internal monopole antenna		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
Test Conditions	Temperature: 26°C Relative humidity: 50%		
Test Exercise	The DUT was placed in continuous transmit mode of operation.		

### Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

**EMC EQUIPMENT LIST**

<b>Device</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal/Char Date</b>	<b>Due Date</b>
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/11	12/31/13
Antenna: Active Loop	ETS-Lindgren	3117	00041534	10/5/12	10/5/14
Frequency Counter	HP	5385A	2730A03025	8/17/11	8/17/13
Hygro-Thermometer	Extech	445703	0602	6/15/11	6/15/13
Modulation Analyzer	HP	8901A	3435A06868	7/18/11	7/18/13
Digital Multimeter	Fluke	FLUKE-77	35053830	9/9/11	9/9/13
Power Meter	Boonton Electronics	4531	11793	1/9/13	1/9/15
Sensor	Boonton	51072A	34647	01/19/13	01/19/15
EMI Receiver	Rohde & Schwarz	ESIB40	100274	3/16/12	3/16/14
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	10/28/11	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	10/28/11	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	10/28/11	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	10/28/11	10/28/13
Temperature Chamber	Tenney Engineering	TTRC	11717-7	7/3/12	7/3/13
Temperature Chamber	Thermotron	S 1.2 Mini max	25-1420-0	7/3/12	7/3/14
Horn Antenna	ETS	3117	35923	12/7/11	12/7/13
Antenna	Electro metrics	LPA-25	1122	05/9/13	05/9/15
Antenna: Biconnical	Eaton	94455-1	1096	05/10/13	05/10/15

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## TEST PROCEDURES

**Radiation Interference:** ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL	= FS
33	20 dB $\mu$ V	+ 10.36 dB	+ 0.5	= 30.86 dB $\mu$ V/m @ 3m

**Power Line Conducted Interference:** The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

**Bandwidth 6.0dB:** The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=1 MHz and the video bandwidth (VBW) =3 MHz and the span set as shown on plot.

**Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.

**Antenna Conducted Emissions:** The RBW=100 kHz, VBW=300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10<sup>th</sup> Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

**ANSI C63.4-2003 10.1 Measurement Procedures:** The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

**RADIATION INTERFERENCE**
**Rules Part No.:** 15.247, 15.209

**Requirements:**

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) $\mu$ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu$ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu$ V/m @ 30 meters
30 – 88	40.0 dB $\mu$ V/m @ 3 meters
80 – 216	43.5 dB $\mu$ V/m @ 3 meters
216 – 960	46.0 dB $\mu$ V/m @ 3 meters
Above 960	54.0 dB $\mu$ V/m @ 3 meters
Part 15.247	
Fundamental 902 – 928 MHz	127.37 dB $\mu$ V/m @ 3 meters
Fundamental 2.4 – 2.4835 MHz	127.37 dB $\mu$ V/m @ 3 meters
Harmonics	54.0 dB $\mu$ V/m @ 3 meters

Any emissions that fall in the restricted bands (15.205) must be less than or equal to 54 dB $\mu$ V/m. Spurious emissions not in a restricted band must be 20 dBc. Harmonics were checked through the 10<sup>th</sup> harmonic.

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity	Detector	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Margin dB
902.8	902.8	75.2	V	Peak	1.95	23.8	100.95	26.43
902.8	902.8	78.3	H	Peak	1.95	23.8	104.05	23.33
902.8	1,805.60	29.4	H	Peak	2.74	30.47	62.61	21.44
902.8	1,805.60	27.8	V	Peak	2.74	30.47	61.01	23.04
902.8	2,708.40	19.2	H	Peak	3.4	32.77	55.37	18.63
	2,708.40	11.7	H	Avg	3.4	32.77	47.87	6.13
902.8	2,708.40	21.3	V	Peak	3.4	32.77	57.47	16.53
	2,708.40	14.7	V	Avg	3.4	32.77	50.87	3.13
902.8	3,611.20	15.8	H	Peak	4.15	33.21	53.16	0.84
902.8	3,611.20	16.3	V	Peak	4.15	33.21	53.66	0.34
902.8	4,514.00	11.4	V	Peak	4.76	34.21	50.37	3.63
902.8	4,514.00	9.5	H	Peak	4.76	34.21	48.47	5.53
902.8	5,416.80	8.4	H	Peak	5.13	34.75	48.28	5.72
902.8	5,416.80	8.5	V	Peak	5.13	34.75	48.38	5.62
902.8	6,319.60	10.3	H	Peak	5.4	35.79	51.49	32.56
902.8	6,319.60	11.3	V	Peak	5.4	35.79	52.49	31.56

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity	Detector	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Margin dB
902.8	7,222.40	9.3	V	Peak	5.73	36.16	51.19	32.86
902.8	7,222.40	9.2	H	Peak	5.73	36.16	51.09	32.96
915.8	915.8	74.5	V	Peak	1.97	23.8	100.27	27.11
915.8	915.8	78.7	H	Peak	1.97	23.8	104.47	22.91
915.8	1,831.60	30.1	H	Peak	2.77	30.62	63.49	20.98
915.8	1,831.60	29.7	V	Peak	2.77	30.62	63.09	21.38
915.8	2,747.40	21.3	V	Peak	3.42	32.8	57.52	16.48
	2,747.40	14.7	V	Avg	3.42	32.8	50.92	3.08
915.8	2,747.40	17.7	H	Peak	3.42	32.8	53.92	20.08
	2,747.40	10.2	H	Avg	3.42	32.8	46.42	7.58
915.8	3,663.20	15.7	V	Peak	4.2	33.26	53.16	0.84
915.8	3,663.20	15.3	H	Peak	4.2	33.26	52.76	1.24
915.8	4,579.00	10.1	H	Peak	4.79	34.25	49.14	4.86
915.8	4,579.00	12.2	V	Peak	4.79	34.25	51.24	2.76
915.8	5,494.80	8.7	V	Peak	5.15	34.8	48.65	35.82
915.8	5,494.80	8.5	H	Peak	5.15	34.8	48.45	36.02
915.8	6,410.60	10.2	H	Peak	5.42	35.85	51.47	33
915.8	6,410.60	12.3	V	Peak	5.42	35.85	53.57	30.9
915.8	7,326.40	8.8	V	Peak	5.8	36.13	50.73	3.27
915.8	7,326.40	10.1	H	Peak	5.8	36.13	52.03	1.97
915.8	8,242.20	9.2	H	Peak	6.3	36.1	51.6	2.4
915.8	8,242.20	8.7	V	Peak	6.3	36.1	51.1	2.9
927.2	927.2	71.3	V	Peak	1.99	23.94	97.23	30.15
927.2	927.2	76.2	H	Peak	1.99	23.94	102.13	25.25
927.2	1,854.40	25.4	V	Peak	2.78	30.76	58.94	23.19
927.2	1,854.40	27.8	H	Peak	2.78	30.76	61.34	20.79
927.2	2,781.60	16.2	H	Peak	3.45	32.83	52.48	21.52
	2,781.60	7.3	H	Avg	3.45	32.83	43.58	10.42
927.2	2,781.60	16.3	V	Peak	3.45	32.83	52.58	21.42
	2,781.60	6.5	V	Avg	3.45	32.83	42.78	11.22
927.2	3,708.80	13.7	H	Peak	4.24	33.31	51.25	2.75
927.2	3,708.80	14.8	V	Peak	4.24	33.31	52.35	1.65
927.2	4,636.00	9.8	H	Peak	4.82	34.28	48.9	5.1
927.2	4,636.00	11	V	Peak	4.82	34.28	50.1	3.9
927.2	5,563.20	7.9	H	Peak	5.17	34.9	47.97	34.16

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity	Detector	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Margin dB
927.2	5,563.20	8.3	V	Peak	5.17	34.9	48.37	33.76
927.2	6,490.40	10.1	H	Peak	5.45	35.89	51.44	30.69
927.2	6,490.40	11.5	V	Peak	5.45	35.89	52.84	29.29
927.2	7,417.60	11.2	H	Peak	5.85	36.12	53.17	0.83
927.2	7,417.60	9.9	V	Peak	5.85	36.12	51.87	2.13
927.2	8,344.80	8.5	H	Peak	6.34	36.1	50.94	3.06
927.2	8,344.80	9.7	V	Peak	6.34	36.1	52.14	1.86


APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## Method of Measuring Radiated Spurious Emissions

Antenna is Calibrated  
and appropriate one.  
Raised from 1 to 4 M.

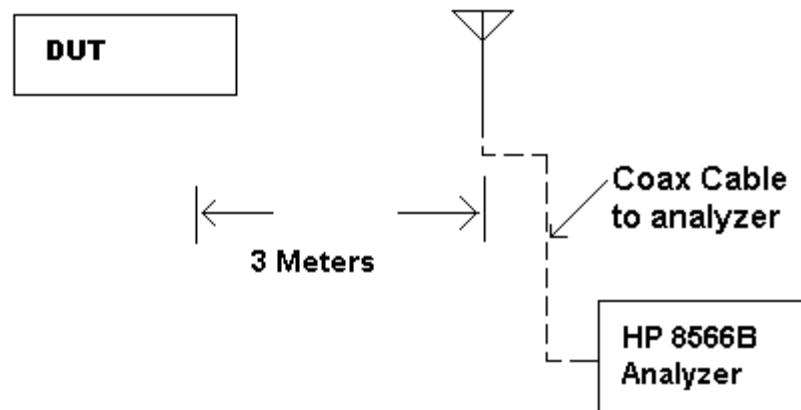

**METHOD OF MEASUREMENT:** The procedure used was ANSI standard C63.4-2003 & the FCC/OET Guidance on Measurements for Spread Spectrum Systems – KDB 558074 dated April 9, 2013.

APPLICANT: SABINE, INC.  
FCC ID: RBODS80C  
REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

**POWER LINE CONDUCTED INTERFERENCE**
**Rules Part No.:** Part 15.207

**Requirements:**

Frequency (MHz)	Quasi Peak Limits (dB $\mu$ V)	Average Limits (dB $\mu$ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50

\* Decrease with logarithm of frequency

**Test Data:** N/A

Battery powered DUT.

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx


## OCCUPIED BANDWIDTH

**Rules Part No.:** 15.247(a)(2)

**Requirements:** The 6 dB bandwidth must be greater than 500 kHz.

**Test Data:** Three places in the band were measured and the worst case reported.

### 6dB Bandwidth

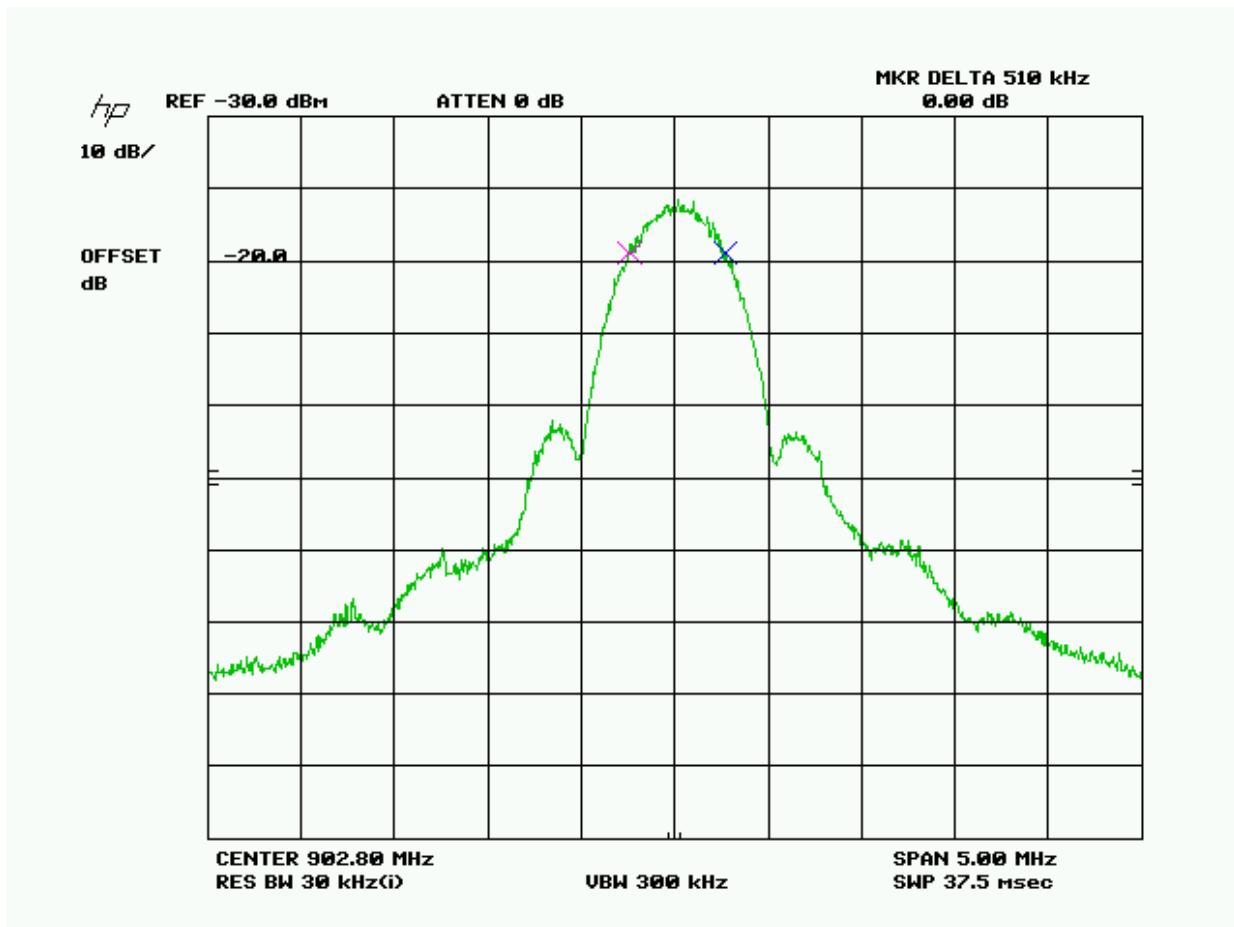


APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

**20 dB Bandwidth**

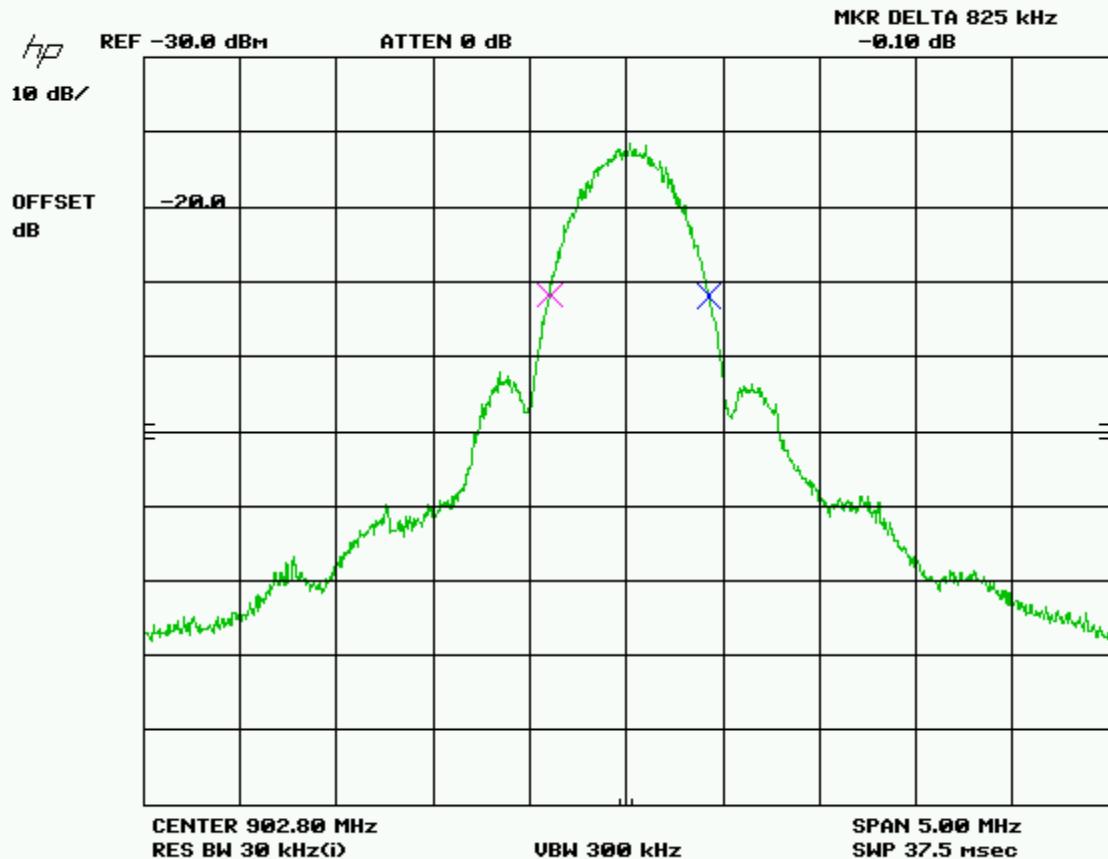


APPLICANT: SABINE, INC.  
FCC ID: RBODS80C  
REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## POWER OUTPUT

**Rules Part #:** 15.247(b) 1 Watt conducted, 4W ERP

TEST SET UP:

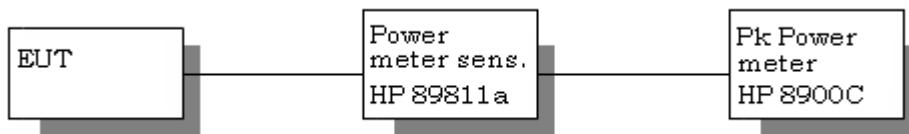

\*Harmonics were checked through the 10<sup>th</sup> harmonic\*

### Test Results:

Frequency MHz	Po dBm	Po milli-Watts
902.8	14.6	28.8
915.8	14.0	25.1
927.2	13.8	24.0

APPLICANT: SABINE, INC.  
 FCC ID: RBODS80C  
 REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx


## SPURIOUS EMISSIONS AT ANTENNA TERMINALS

**Requirements:** Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

**Test Data:**

**N/A, Device has permanently attached antenna and no antenna connector.**

15.247(c) Method of Measuring RF Conducted Spurious Emissions

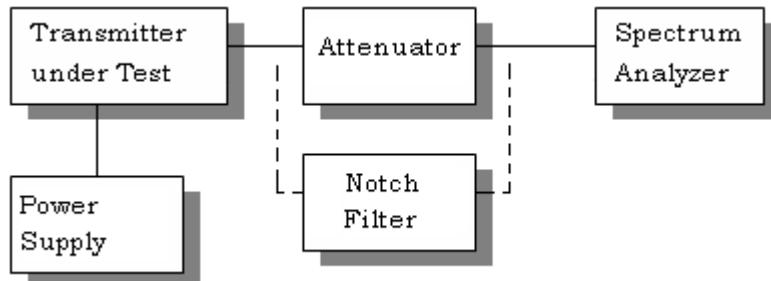

APPLICANT: SABINE, INC.

FCC ID: RBODS80C


REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

**Requirements:** Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500  $\mu$ V/m (54 dB $\mu$ V/m).

**Test Procedure:** An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.

Lower bandedge 902 MHz Peak Horiz.

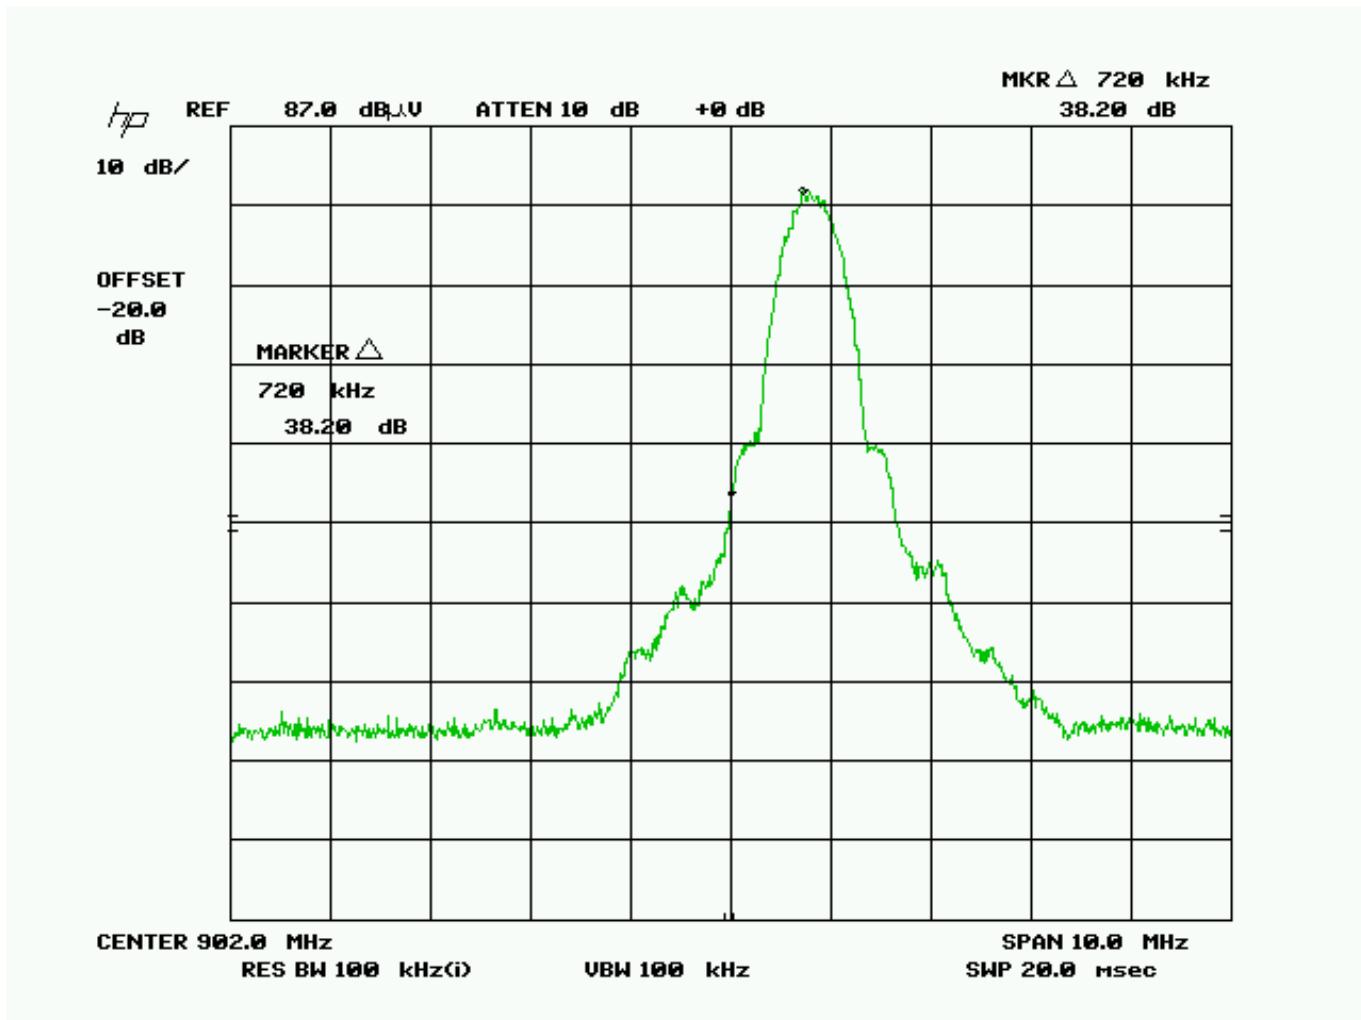


APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

Upper bandedge 928 MHz Peak Horiz.

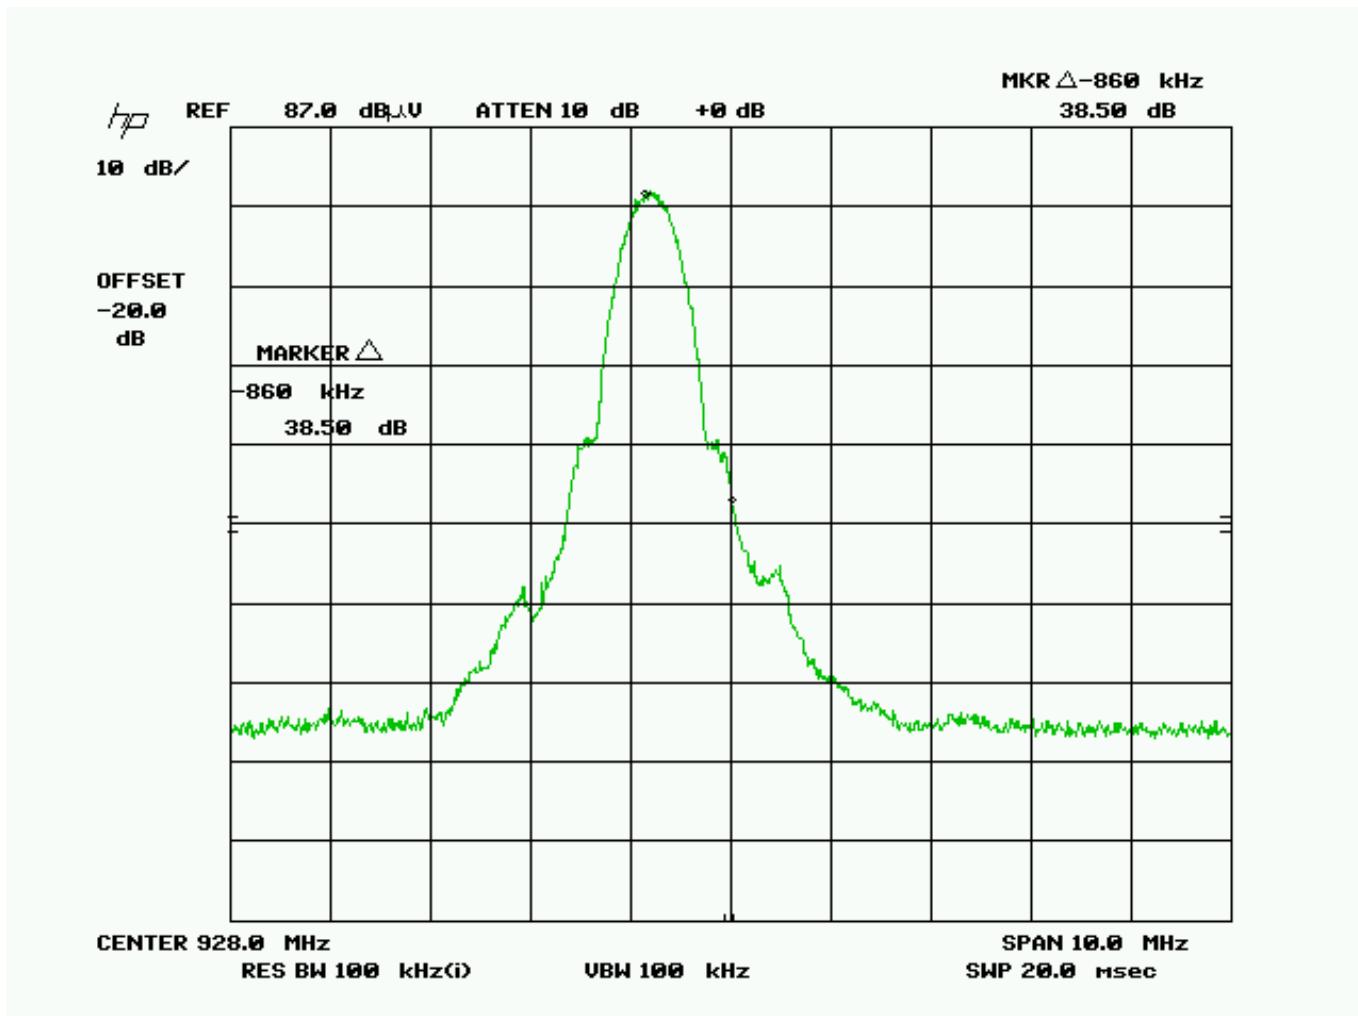

APPLICANT: SABINE, INC.  
 FCC ID: RBODS80C  
 REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx

## POWER SPECTRAL DENSITY

**Rules Part No.:** 15.247(d)

**Requirements:** The peak level measured must be less than +8.0 dBm.

**Test Data:** SEE THE FOLLOWING PLOTS

Three places in the band were measured and the worst case reported.



$$-11.0 \text{ dBm} + 20 \text{ dB (attn)} - 15.2 \text{ dB} = \text{PSD} -6.2 \text{ dB}$$

APPLICANT: SABINE, INC.

FCC ID: RBODS80C

REPORT: S\SABINE\_RBO\3082AXUT12\3082AXUT12TestReport.docx