

13_LTE Band 13_10M_QPSK_1RB_0Offset_Front_10mm_Ch23230

Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0

Medium: HSL. Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.402 W/kg; SAR (10g) = 0.274 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.07 dB

SAR (1g) = 0.402 W/kg; SAR (10g) = 0.266 W/kg;

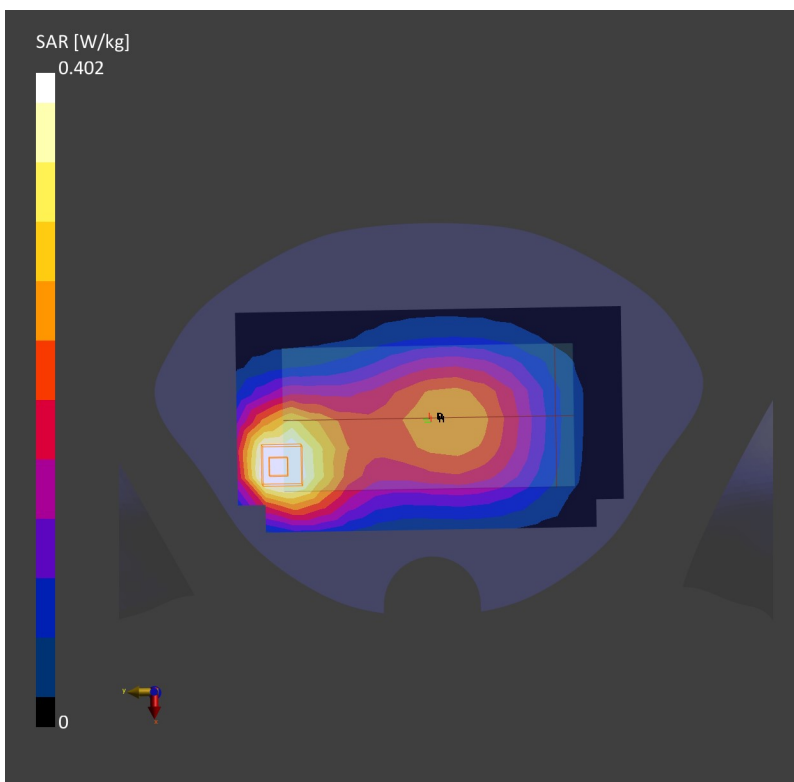

14_WCDMA V_RMC 12.2Kbps_Front_10mm_Ch4182


Communication System: Band 5, UTRA/FDD; Frequency: 836.4
Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 42.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.614 W/kg; SAR (10g) = 0.414 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.02 dB
SAR (1g) = 0.624 W/kg; SAR (10g) = 0.417 W/kg;

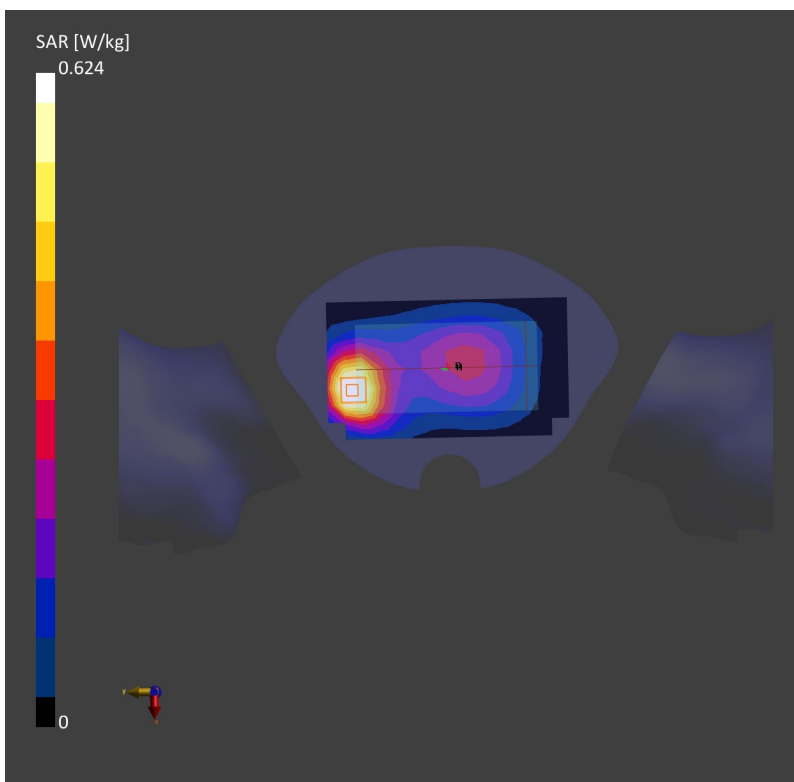

15_WCDMA IV_RMC 12.2Kbps_Front_10mm_Ch1413


Communication System: Band 4, UTRA/FDD; Frequency: 1732.6
Medium: HSL. Medium parameters used: $f=1732.6$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.346 W/kg; SAR (10g) = 0.196 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.04 dB
SAR (1g) = 0.364 W/kg; SAR (10g) = 0.203 W/kg;

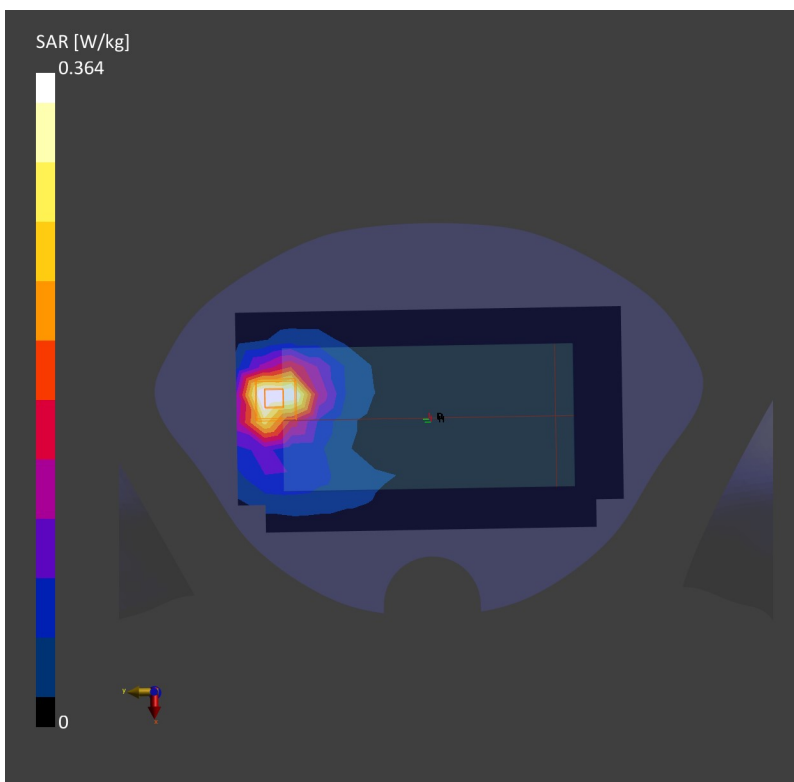

16_LTE Band 66_20M_QPSK_1RB_0Offset_Front_10mm_Ch132572

Communication System: Band 66, E-UTRA/FDD; Frequency: 1770.0

Medium: HSL. Medium parameters used: $f= 1770.0$ MHz; $\sigma= 1.39$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.454 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.503 W/kg; SAR (10g) = 0.285 W/kg;

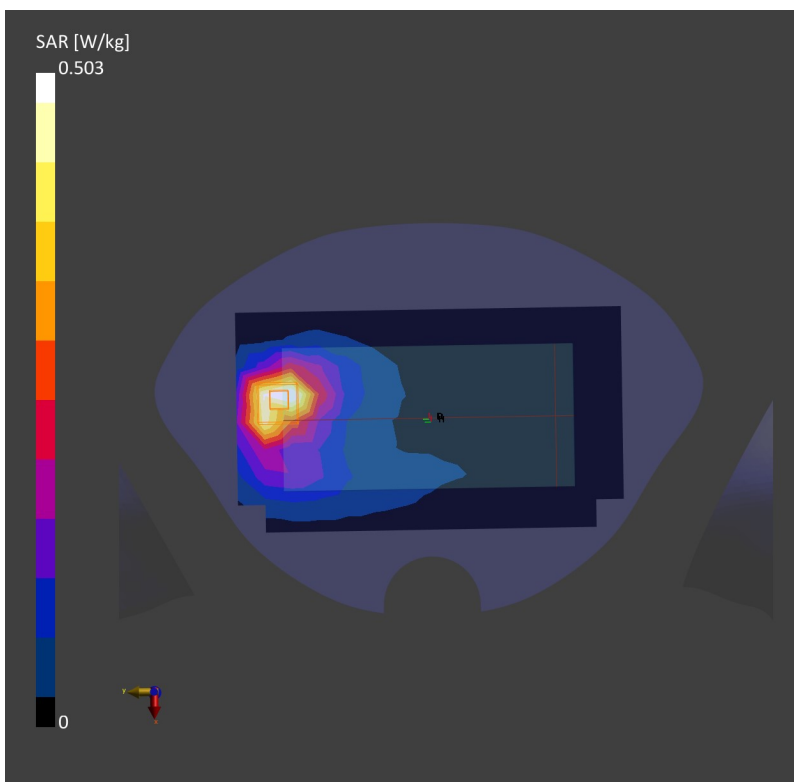

17_WCDMA II_RMC 12.2Kbps_Front_10mm_Ch4182

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f=1880.0$ MHz; $\sigma=1.44$ S/m; $\epsilon_r=39.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.644 W/kg; SAR (10g) = 0.368 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.388 W/kg;

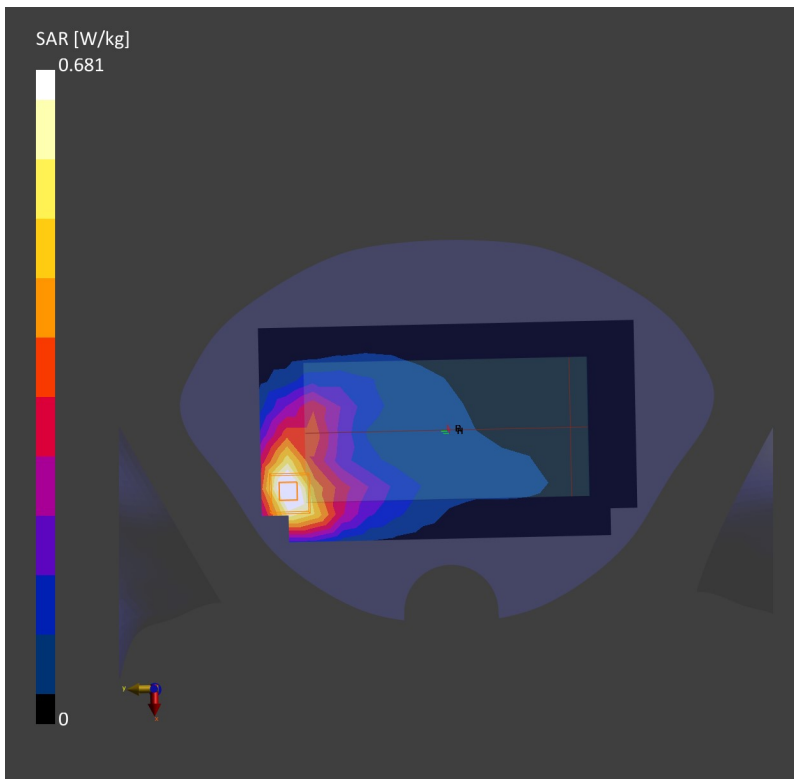

18_LTE Band 2_20M_QPSK_1RB_0Offset_Front_10mm_Ch18900

Communication System: Band 2, E-UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f=1880.0$ MHz; $\sigma=1.44$ S/m; $\epsilon_r=39.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.331 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.572 W/kg; SAR (10g) = 0.331 W/kg;

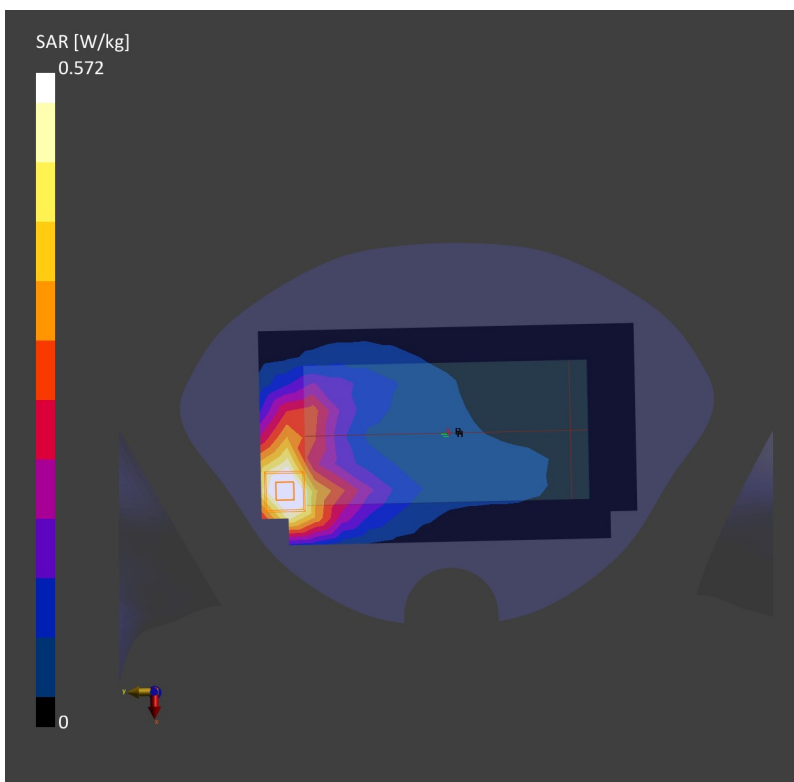

19_WLAN 2.4G_802.11b_1 Mbps_Front_10mm Ch1


Communication System: WLAN 2.4GHz; Frequency: 2412.0
Medium: HSL. Medium parameters used: $f= 2412.0$ MHz; $\sigma= 1.84$ S/m; $\epsilon_r = 40.9$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.097 W/kg; SAR (10g) = 0.053 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = 0.08 dB
SAR (1g) = 0.099 W/kg; SAR (10g) = 0.051 W/kg;

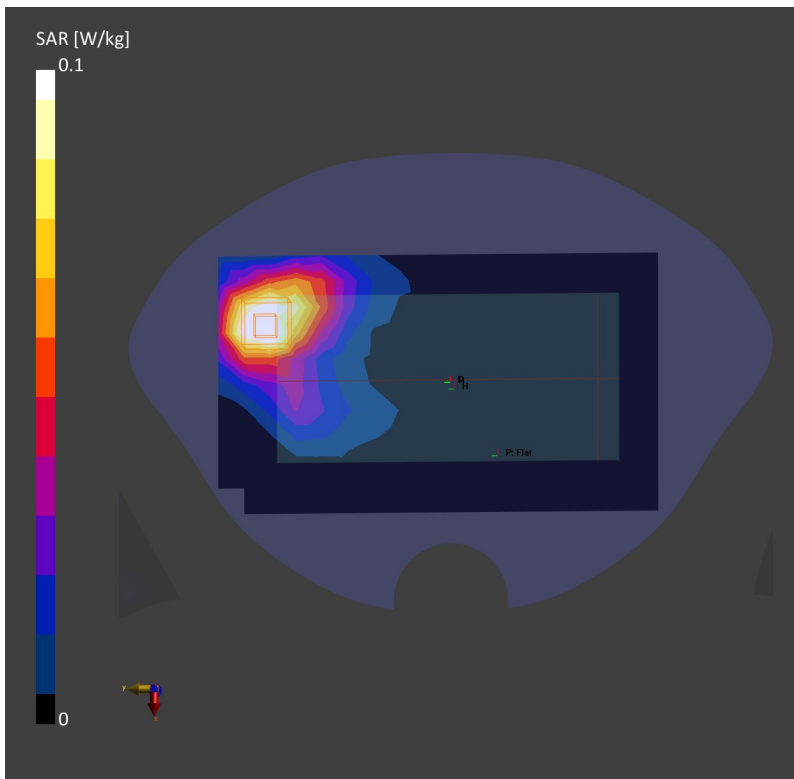

20_Bluetooth_1 Mbps_Front_10mm Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.0

Medium: HSL. Medium parameters used: $f= 2441.0$ MHz; $\sigma= 1.86$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.01 W/kg; SAR (10g) = 0.005 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.013 W/kg; SAR (10g) = 0.006 W/kg;

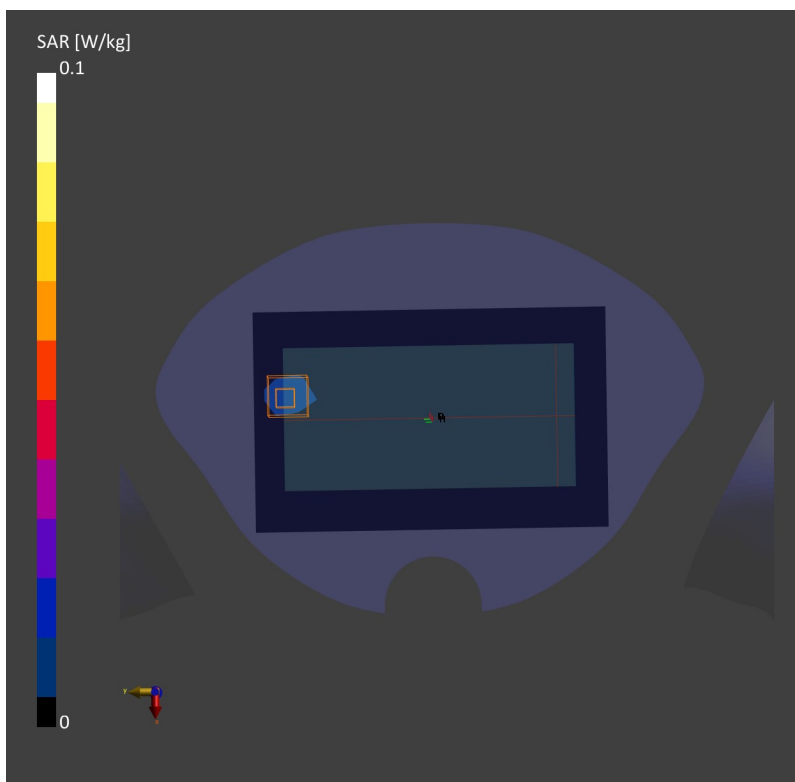

21_WLAN5G_802.11a 6Mbps_Back_10mm_Ch56

Communication System: WLAN 5GHz; Frequency: 5280.0

Medium: HSL. Medium parameters used: $f= 5280.0$ MHz; $\sigma= 4.59$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(5.38, 5.38, 5.38); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.078 W/kg; SAR (10g) = 0.033 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 24.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.081 W/kg; SAR (10g) = 0.034 W/kg;

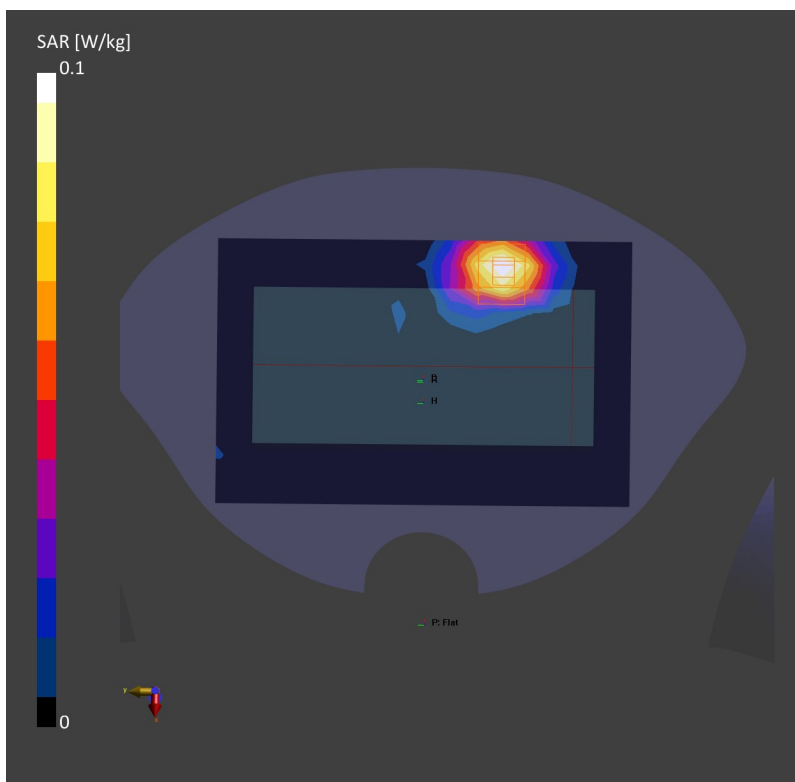

22_WLAN5G_802.11a 6Mbps_Front_10mm_Ch132

Communication System: WLAN 5GHz; Frequency: 5660.0

Medium: HSL. Medium parameters used: $f= 5660.0$ MHz; $\sigma= 5.02$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.68, 4.68, 4.68); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.048 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.046 W/kg;

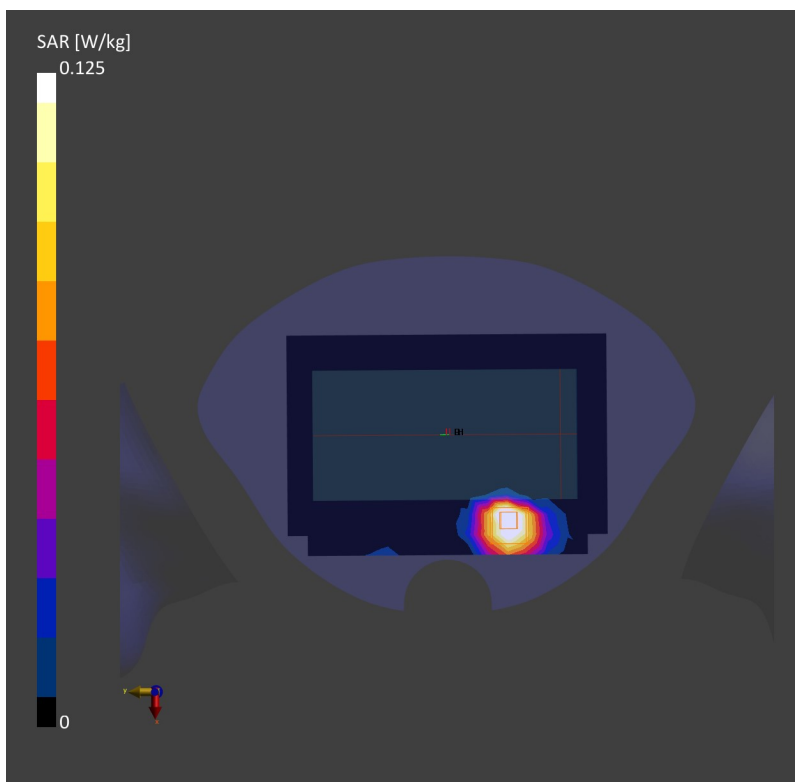

23_WLAN5G_802.11a 6Mbps_Front_10mm_Ch149


Communication System: WLAN 5GHz; Frequency: 5745.0
Medium: HSL. Medium parameters used: $f= 5745.0$ MHz; $\sigma= 5.11$ S/m; $\epsilon_r = 34.1$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.82, 4.82, 4.82); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.102 W/kg; SAR (10g) = 0.040 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4.0 mm
Power Drift = -0.05 dB
SAR (1g) = 0.105 W/kg; SAR (10g) = 0.041 W/kg;

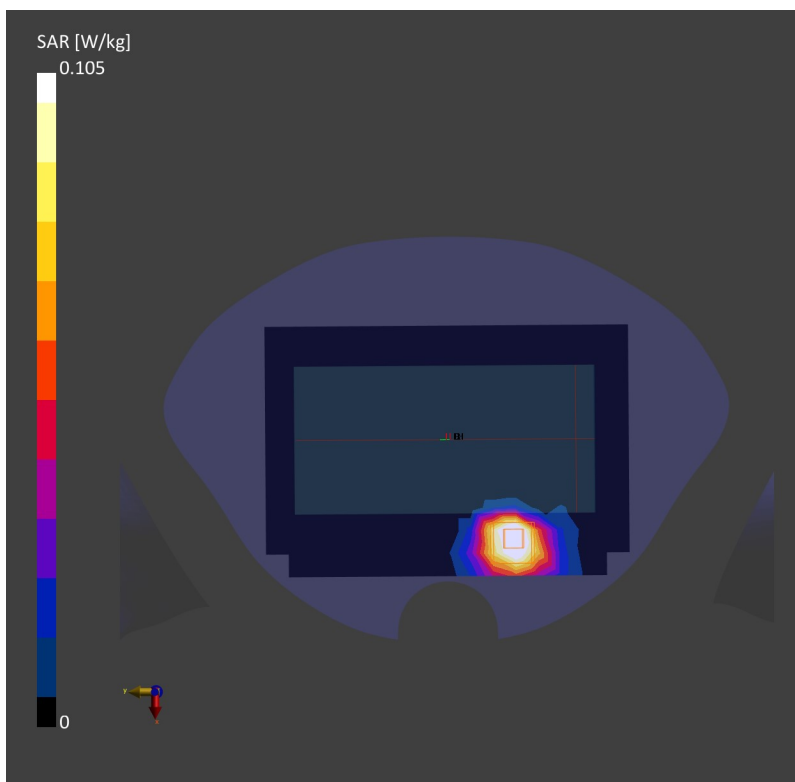

24_LTE Band 12_10M_QPSK_25RB_0Offset_Front_0mm_Ch23095

Communication System: Band 12, E-UTRA/FDD; Frequency: 707.5

Medium: HSL. Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.705 W/kg; SAR (10g) = 0.464 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.699 W/kg; SAR (10g) = 0.424 W/kg;

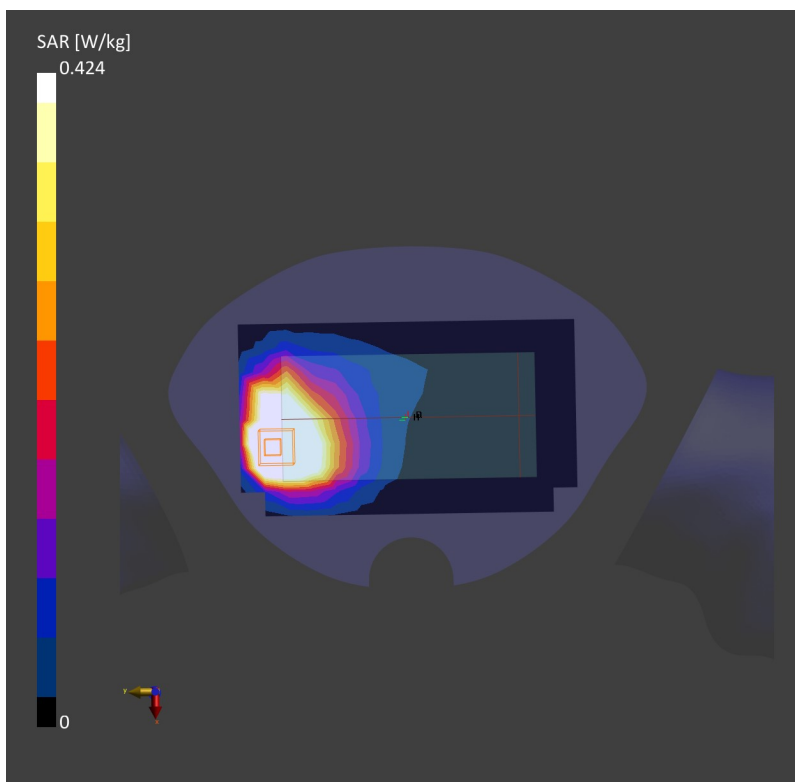

25_LTE Band 13_10M_QPSK_1RB_0Offset_Front_0mm_Ch23230


Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0
Medium: HSL. Medium parameters used: $f=782.0$ MHz; $\sigma=0.910$ S/m; $\epsilon_r=42.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.26 W/kg; SAR (10g) = 0.788 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.18 dB
SAR (1g) = 1.22 W/kg; SAR (10g) = 0.699 W/kg;

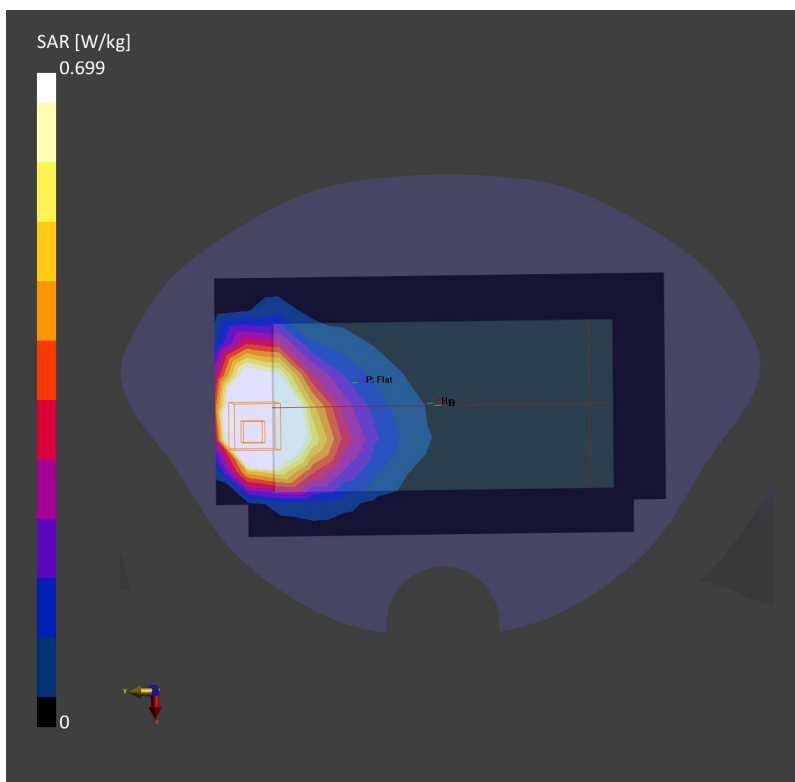

26_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4182


Communication System: Band 5, UTRA/FDD; Frequency: 836.4
Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.940$ S/m; $\epsilon_r = 42.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.834 W/kg; SAR (10g) = 0.556 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.03 dB
SAR (1g) = 0.829 W/kg; SAR (10g) = 0.551 W/kg;

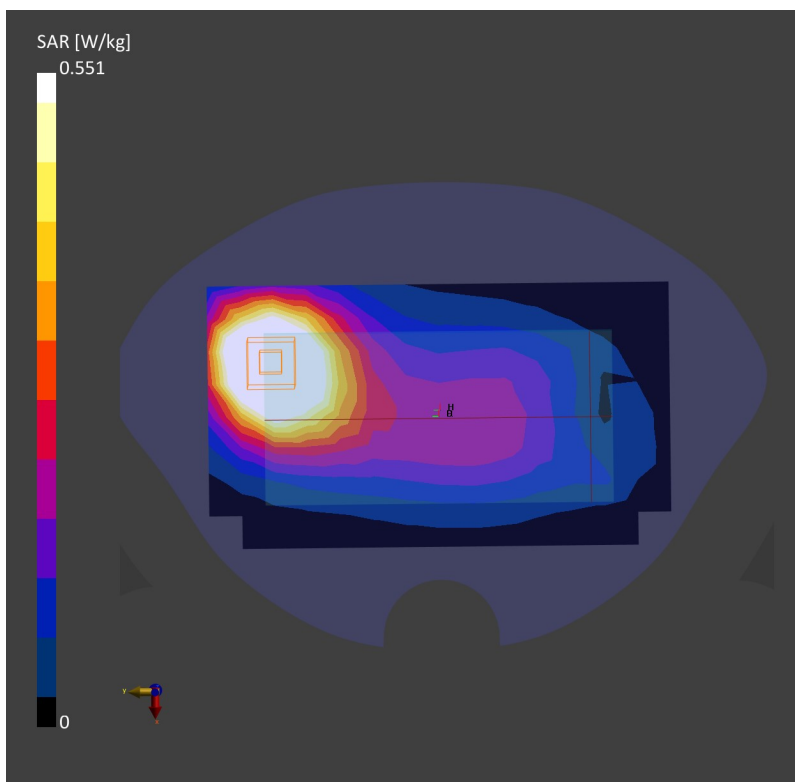

27_WCDMA IV_RMC 12.2Kbps_Front_0mm_Ch1413


Communication System: Band 4, UTRA/FDD; Frequency: 1732.6
Medium: HSL. Medium parameters used: $f=1732.6$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.998 W/kg; SAR (10g) = 0.534 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.03 dB
SAR (1g) = 1.04 W/kg; SAR (10g) = 0.521 W/kg;

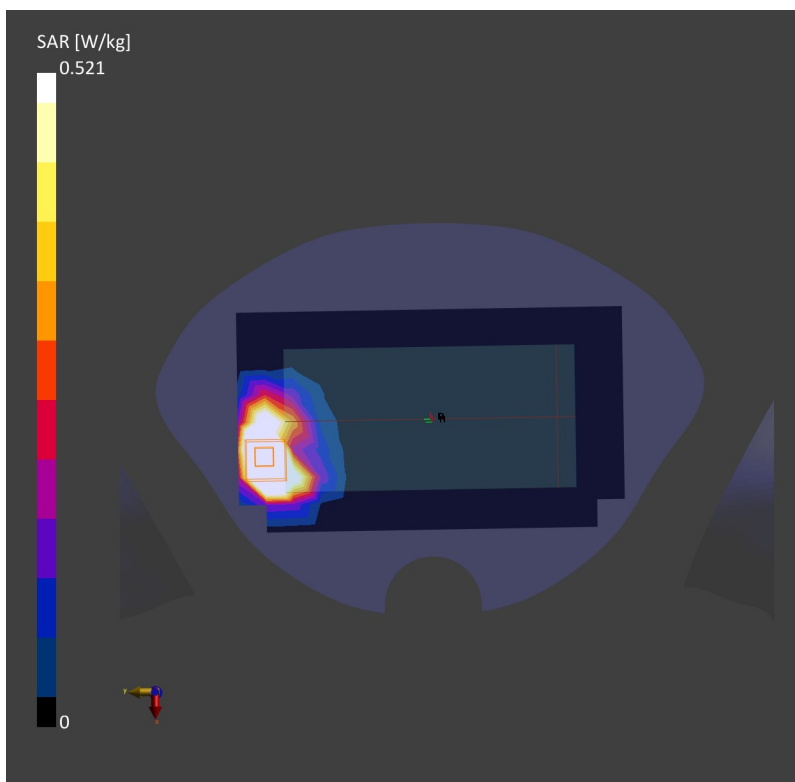

28_LTE Band 66_20M_QPSK_50RB_0Offset_Top Side_0mm_Ch132322


Communication System: Band 66, E-UTRA/FDD; Frequency: 1745.0
Medium: HSL. Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.907 W/kg; SAR (10g) = 0.492 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.02 dB
SAR (1g) = 0.929 W/kg; SAR (10g) = 0.487 W/kg;

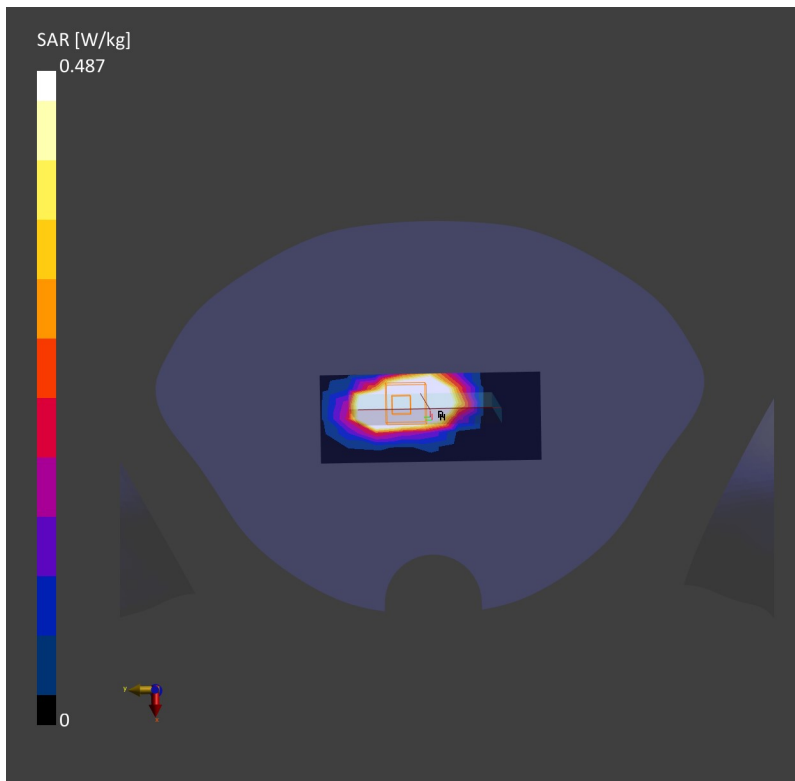

29_WCDMA II_RMC 12.2Kbps_Front_0mm_Ch9400

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f=1880.0$ MHz; $\sigma=1.44$ S/m; $\epsilon_r=39.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.69 W/kg; SAR (10g) = 0.904 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 1.80 W/kg; SAR (10g) = 0.884 W/kg;

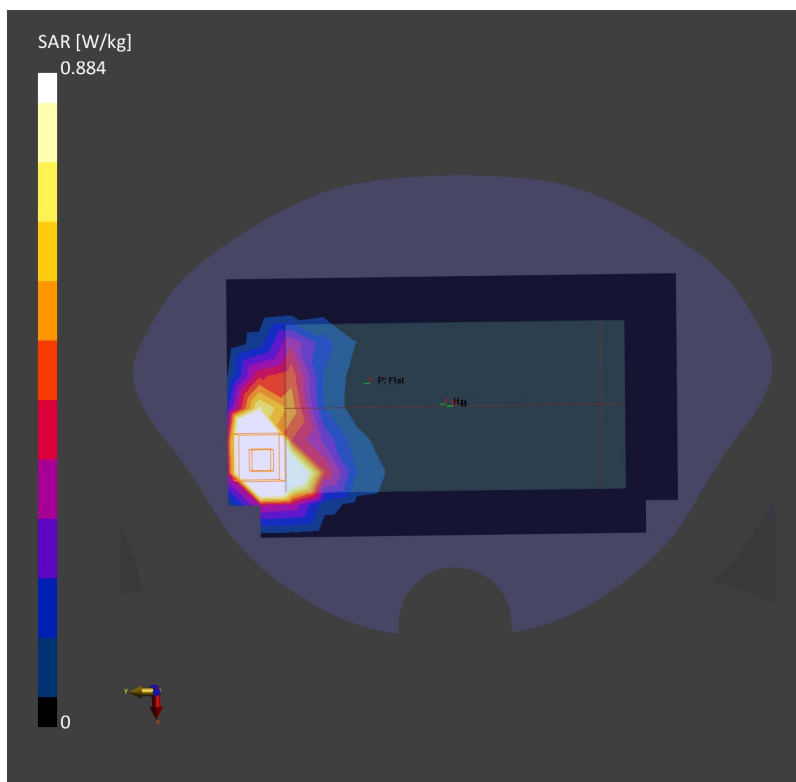

30_LTE Band 2_20M_QPSK_50RB_0Offset_Top Side_0mm_Ch18900

Communication System: Band 2, E-UTRA/FDD; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f= 1880.0$ MHz; $\sigma= 1.45$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.79 W/kg; SAR (10g) = 0.943 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.12 dB

SAR (1g) = 1.84 W/kg; SAR (10g) = 0.917 W/kg;

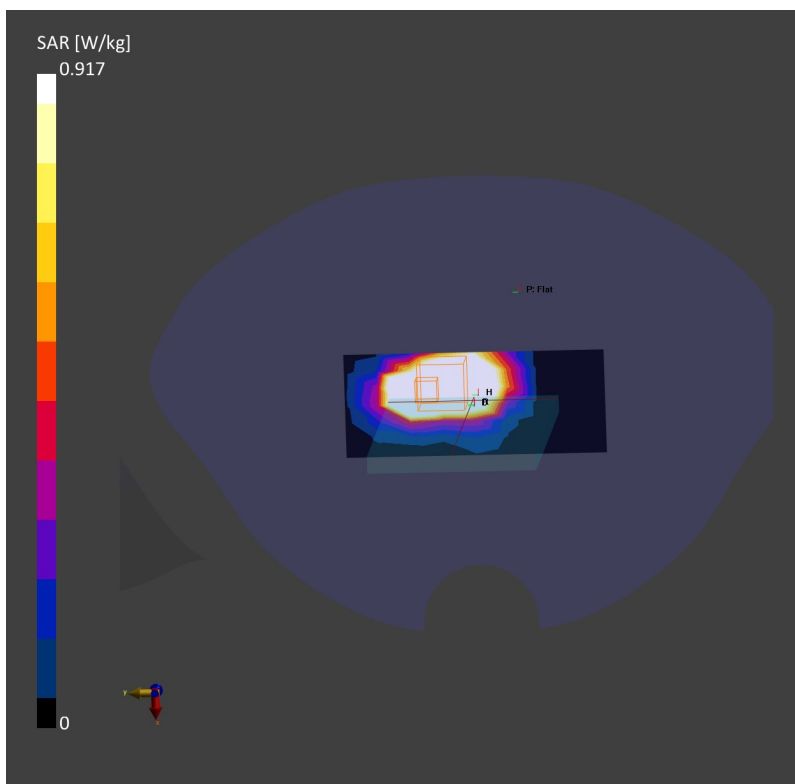

31_WLAN 2.4G_802.11b_1 Mbps_Front_0mm Ch1


Communication System: WLAN 2.4GHz; Frequency: 2412.0
Medium: HSL. Medium parameters used: $f= 2412.0$ MHz; $\sigma= 1.84$ S/m; $\epsilon_r = 40.9$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.564 W/kg; SAR (10g) = 0.286 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.09 dB
SAR (1g) = 0.541 W/kg; SAR (10g) = 0.271 W/kg;

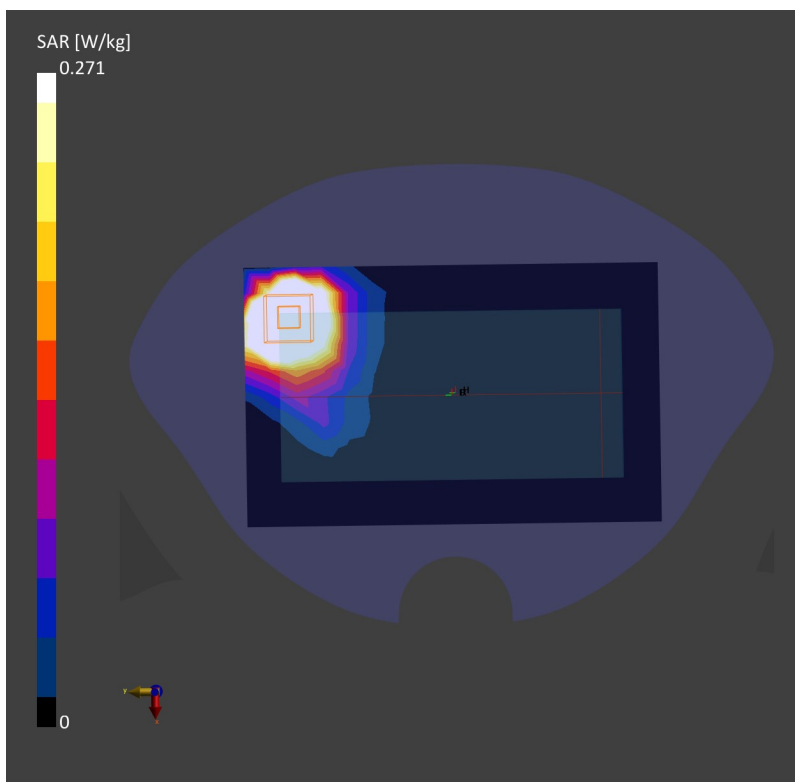

32_Bluetooth_1 Mbps_Front_0mm Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.0

Medium: HSL. Medium parameters used: $f= 2441.0$ MHz; $\sigma= 1.86$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.096 W/kg; SAR (10g) = 0.049 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.099 W/kg; SAR (10g) = 0.049 W/kg;

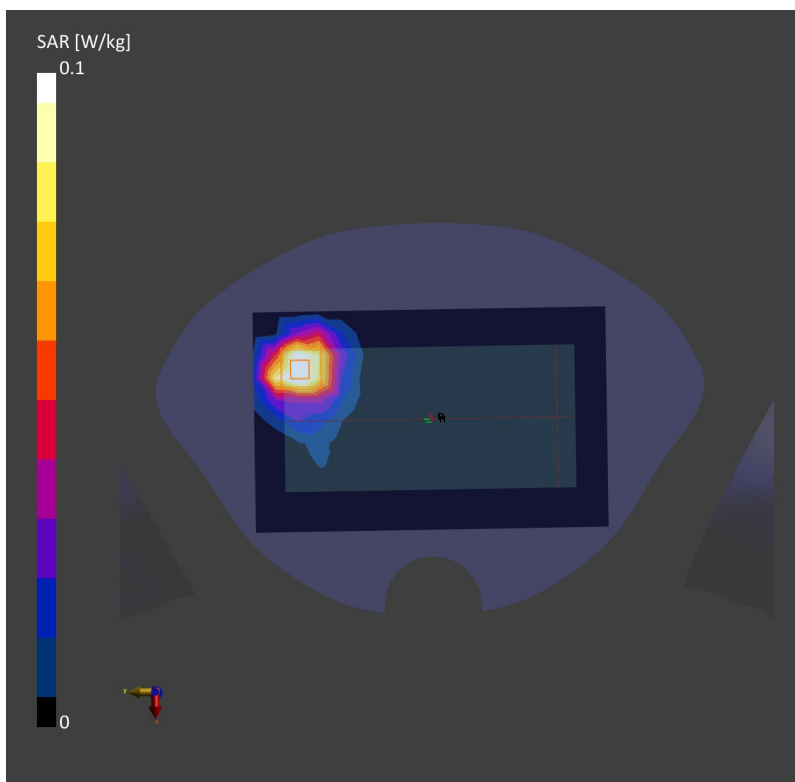

33_WLAN 5G_802.11a_6 Mbps_Right Side_0mm Ch64


Communication System: WLAN 5GHz; Frequency: 5320.0
Medium: HSL. Medium parameters used: $f= 5320.0$ MHz; $\sigma= 4.64$ S/m; $\epsilon_r = 34.9$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(5.38, 5.38, 5.38); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.84 W/kg; SAR (10g) = 0.406 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.04 dB
SAR (1g) = 2.09 W/kg; SAR (10g) = 0.436 W/kg;

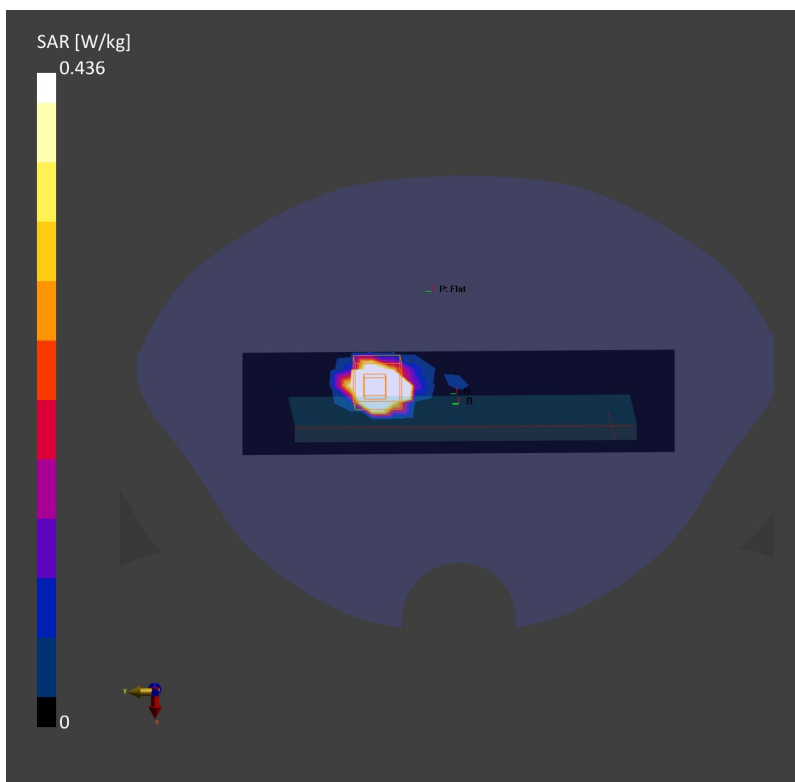

34_WLAN 5G_802.11a 6Mbps_Right Side_0mm_Ch132

Communication System: WLAN 5GHz; Frequency: 5660.0

Medium: HSL. Medium parameters used: $f= 5660.0$ MHz; $\sigma= 5.02$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.68, 4.68, 4.68); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.95 W/kg; SAR (10g) = 0.659 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 3.47 W/kg; SAR (10g) = 0.716 W/kg;

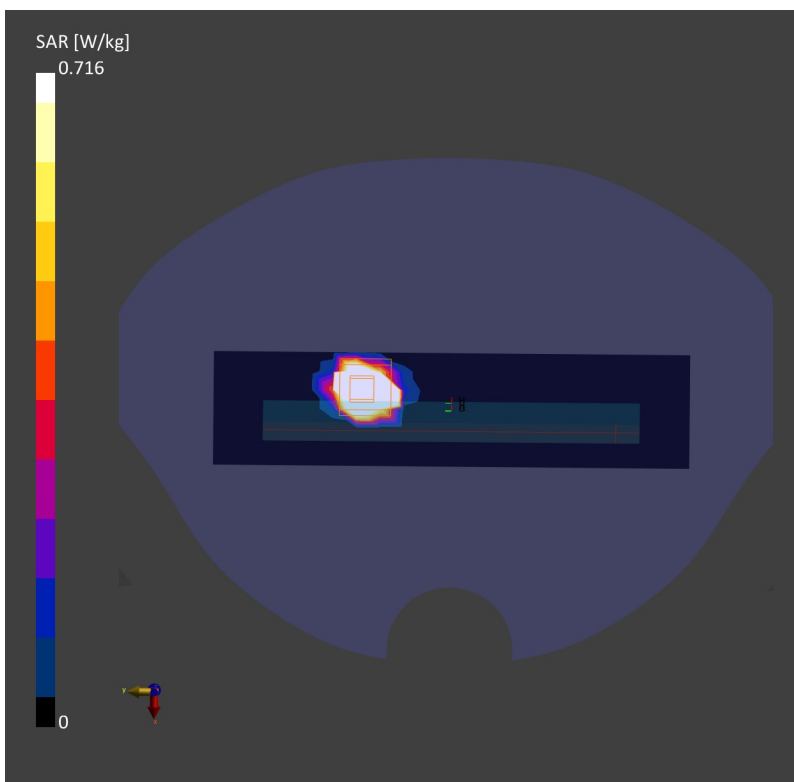

35_WLAN 5G_802.11a 6Mbps_Right Side_0mm Ch165


Communication System: WLAN 5GHz; Frequency: 5825.0
Medium: HSL. Medium parameters used: $f= 5825.0$ MHz; $\sigma= 5.2$ S/m; $\epsilon_r = 34$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.82, 4.82, 4.82); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.68 W/kg; SAR (10g) = 0.623 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4 mm x 4 mm x 1.4 mm
Power Drift = -0.09 dB
SAR (1g) = 3.35 W/kg; SAR (10g) = 0.633 W/kg;

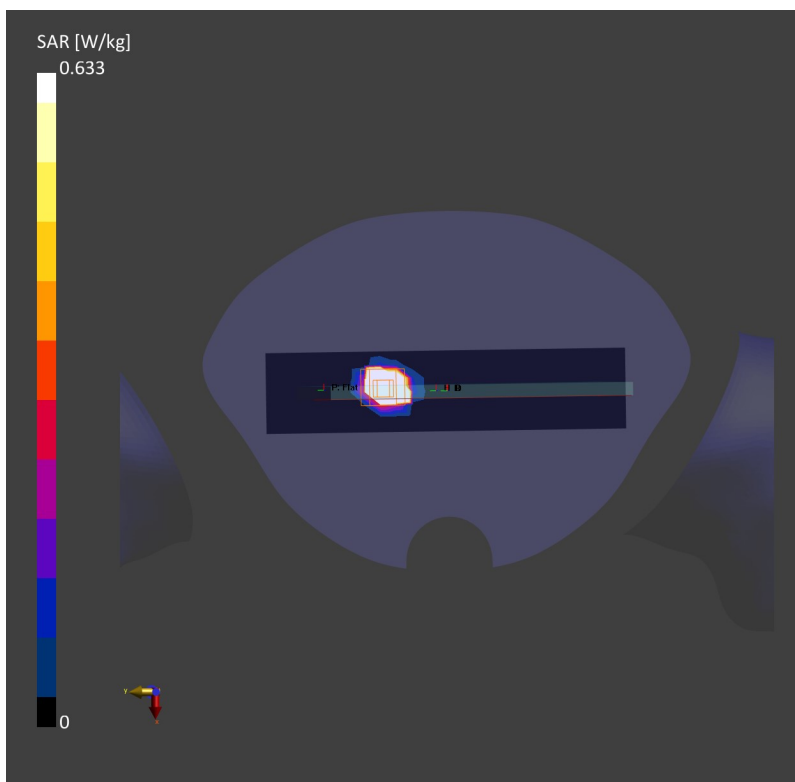



Appendix C. DAS Y Calibration Certificate

The DAS Y calibration certificates are shown as follows.



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **Sporton**

Certificate No: **Z19-60081**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1087**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **March 27, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|--|-----------------------|
| Power Meter NRP2 | 106277 | 20-Aug-18 (CTTL, No.J18X06862) | Aug-19 |
| Power sensor NRP8S | 104291 | 20-Aug-18 (CTTL, No.J18X06862) | Aug-19 |
| Reference Probe EX3DV4 | SN 3617 | 31-Jan-19(SPEAG,No.EX3-3617_Jan19) | Jan-20 |
| DAE4 | SN 1331 | 06-Feb-19(SPEAG,No.DAE4-1331_Feb19) | Feb-20 |
| Secondary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-19 (CTTL, No.J19X00336) | Jan-20 |
| NetworkAnalyzer E5071C | MY46110673 | 24-Jan-19 (CTTL, No.J19X00547) | Jan-20 |

| | Name | Function | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: March 29, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

| | |
|-------|--|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.