

MT578 WIFI2 Antenna catalogue

1. Project images

2. Testing fixtures

3. Matching circuit

4. S11 test

4.0 S11 test method

4.1 S11 parameter

4.2 Parameter image

4.2.1 Return loss

5. Darkroom test data

5.0 Testing equipment

5.1 Active data


5.2 Passive data

6. drawing

1. Project images


1. Testing fixtures

1. Matching

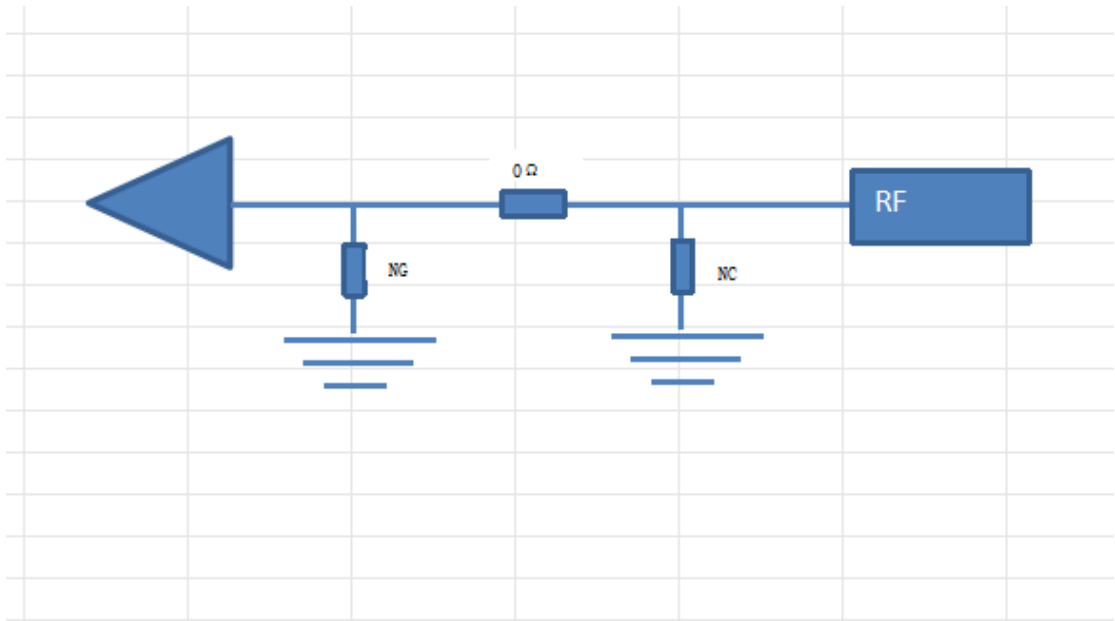

1. S11 test

4.0 S11 test method

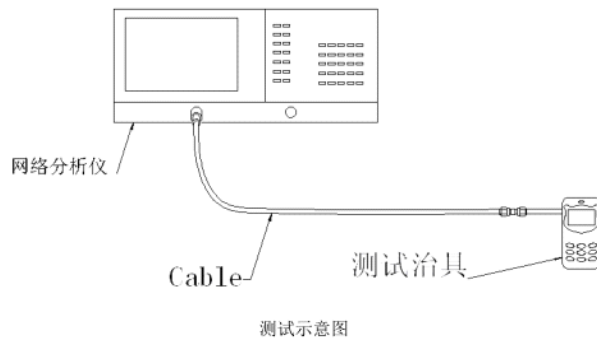


4.1 S11 parameter

频率 (MHZ)	1575	2400	2500	5150	5850
RL	-18.4	-11.6	-7.14	-18.7	-12.9

4.2 Parameter image

4.2.1 Return loss

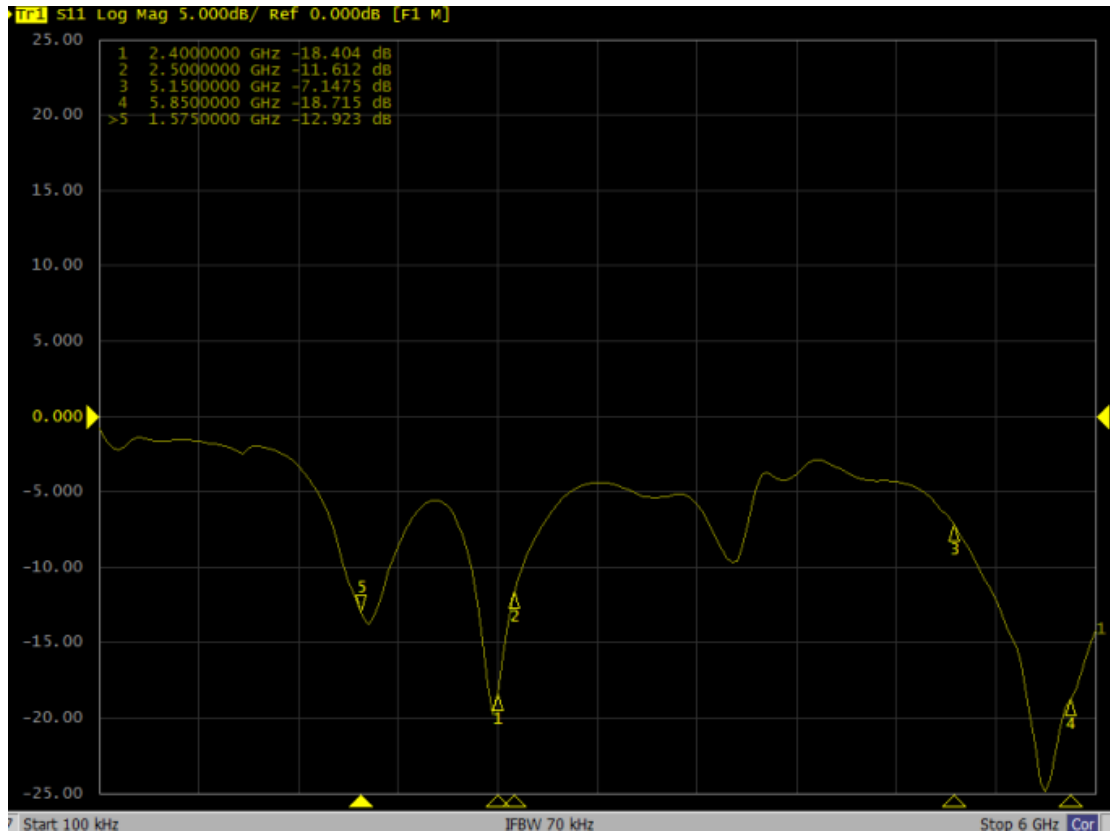

5. Darkroom test data

5.0 Testing equipment

Testing equipment

Test system: shielded darkroom

Test environment: temperature $22\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$, humidity $50\% \pm 15\%$

Test equipment: When testing passive data, use a network analyzer **Agilent 8753ES**

When testing active data, use a comprehensive tester **CMW**

500


5.1 Passive data





Frequency/Mhz	Efficiency / dB	Gain/dBi	Efficiency / %
1500	-4.43	-2.1	36.06
1505	-4.42	-2.09	36.15
1510	-4.48	-2.22	35.63
1515	-4.49	-2.21	35.6
1520	-4.36	-1.99	36.63
1525	-4.24	-1.69	37.71
1530	-4.11	-1.39	38.85
1535	-4.01	-1.25	39.76
1540	-3.91	-1.1	40.61
1545	-3.89	-1	40.83
1550	-3.91	-1.07	40.62
1555	-3.94	-1.19	40.35
1560	-3.99	-1.24	39.92
1565	-4.09	-1.33	39.03
1570	-4.17	-1.41	38.28
1575	-4.18	-1.4	38.16
1580	-4.16	-1.32	38.4
1585	-4.18	-1.36	38.18
1590	-4.24	-1.54	37.68
1595	-4.35	-1.47	36.73
1600	-4.48	-1.58	35.65
1605	-4.53	-1.57	35.2
1610	-4.5	-1.52	35.5
1615	-4.49	-1.56	35.53
1620	-4.56	-1.58	34.96
1625	-4.62	-1.61	34.52
1630	-4.65	-1.63	34.25
1635	-4.72	-1.65	33.69
1640	-4.81	-1.59	33.05
1645	-4.83	-1.59	32.9
1650	-4.83	-1.58	32.91
2400	-4.67	1.8	34.12
2410	-4.45	2.05	35.9
2420	-4.39	2.12	36.36
2430	-4.47	2.02	35.74
2440	-4.41	2.09	36.26
2450	-4.47	2.13	35.7
2460	-4.57	1.99	34.95
2470	-4.54	2.05	35.18
2480	-4.5	2.18	35.44
2490	-4.66	2.11	34.17
2500	-4.74	2.07	33.54
2510	-4.6	2.15	34.65
2520	-4.54	2.28	35.19
2530	-4.51	2.37	35.43
2540	-4.36	2.49	36.67
2550	-4.44	2.56	35.98
2560	-4.63	2.4	34.44
2570	-4.7	2.43	33.92



2580	-4.61	2.52	34.61
2590	-4.68	2.44	34.03
2600	-5.08	2.06	31.07
5000	-8.09	-1.93	15.52
5020	-8.06	-1.83	15.65
5040	-8.02	-1.83	15.77
5060	-7.82	-1.64	16.53
5080	-8.09	-1.93	15.53
5100	-7.64	-1.58	17.24
5120	-7.52	-1.43	17.72
5140	-6.8	-0.64	20.92
5160	-6.43	-0.2	22.77
5180	-6.28	-0.05	23.54
5200	-6.52	-0.42	22.27
5220	-6.1	-0.26	24.56
5240	-6.02	-0.2	25.01
5260	-5.41	0.55	28.76
5280	-5.39	0.85	28.92
5300	-5.14	1.32	30.61
5320	-5.02	1.37	31.48
5340	-5.06	1.12	31.18
5360	-5.23	1.17	30.01
5380	-5.09	1.74	30.96
5400	-5.66	1.31	27.14
5420	-5.68	1.42	27.04
5440	-5.38	1.88	28.99
5460	-5.36	2.05	29.08
5480	-4.86	2.58	32.7
5500	-5.28	2.14	29.64
5520	-5.09	2.25	30.96
5540	-5.06	2.53	31.2
5560	-5.58	1.97	27.64
5580	-5.5	2.05	28.16
5600	-6.38	0.82	23.01
5620	-6.19	1.13	24.03
5640	-5.66	1.56	27.14
5660	-5.99	1.1	25.2
5680	-5.52	1.25	28.06
5700	-5.56	1.44	27.83
5720	-5.99	1.3	25.16
5740	-5.82	1.27	26.2
5760	-6.02	0.86	24.98
5780	-6.74	-0.04	21.17
5800	-6.66	0.12	21.58
5820	-7.18	-0.37	19.12
5840	-6.28	0.32	23.55
5860	-6.78	-0.77	21.01
5880	-6.45	-0.69	22.67
5900	-6.32	-0.44	23.34
5920	-6.5	-0.26	22.38
5940	-6.39	-0.08	22.96
5960	-6.78	-0.49	21.01

5980	-6.87	-0.6	20.55
6000	-7.11	-0.95	19.46


5.2 3D map/directional map

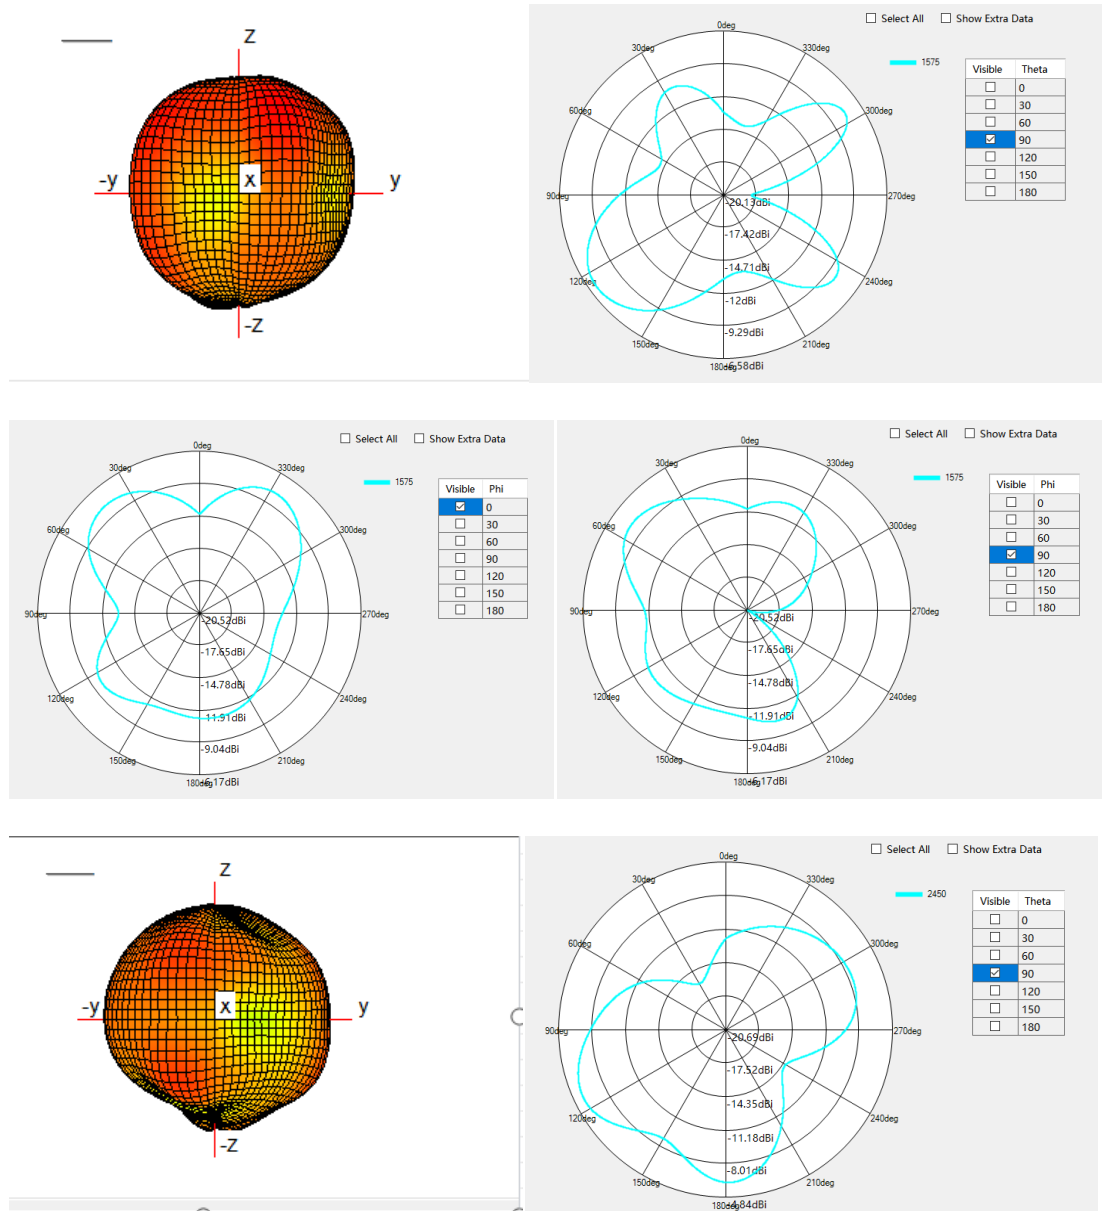

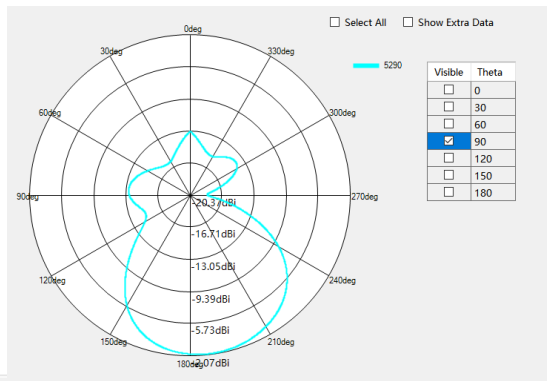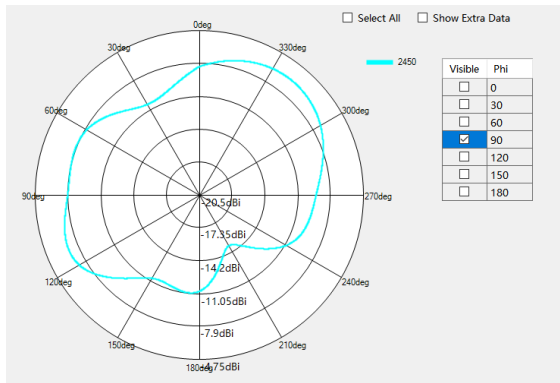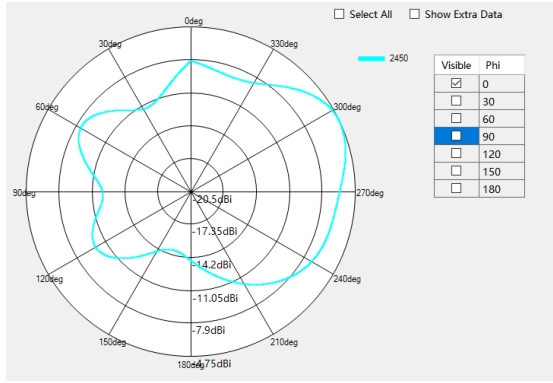

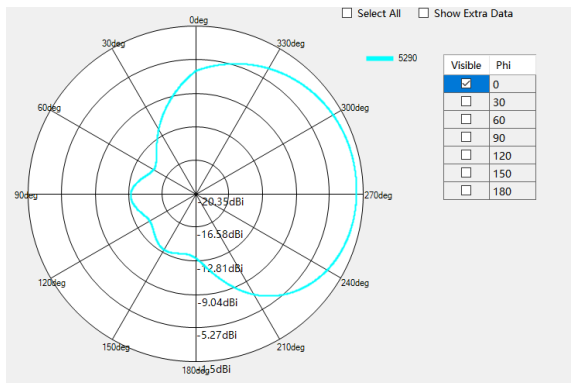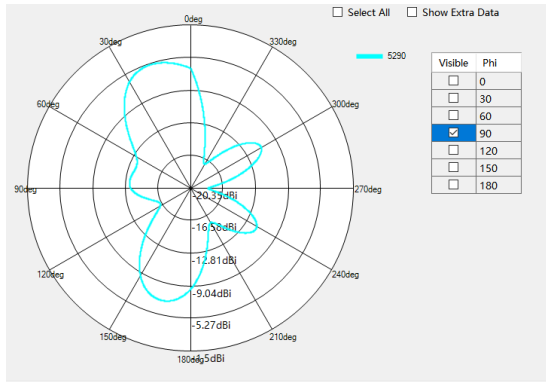

6. drawing

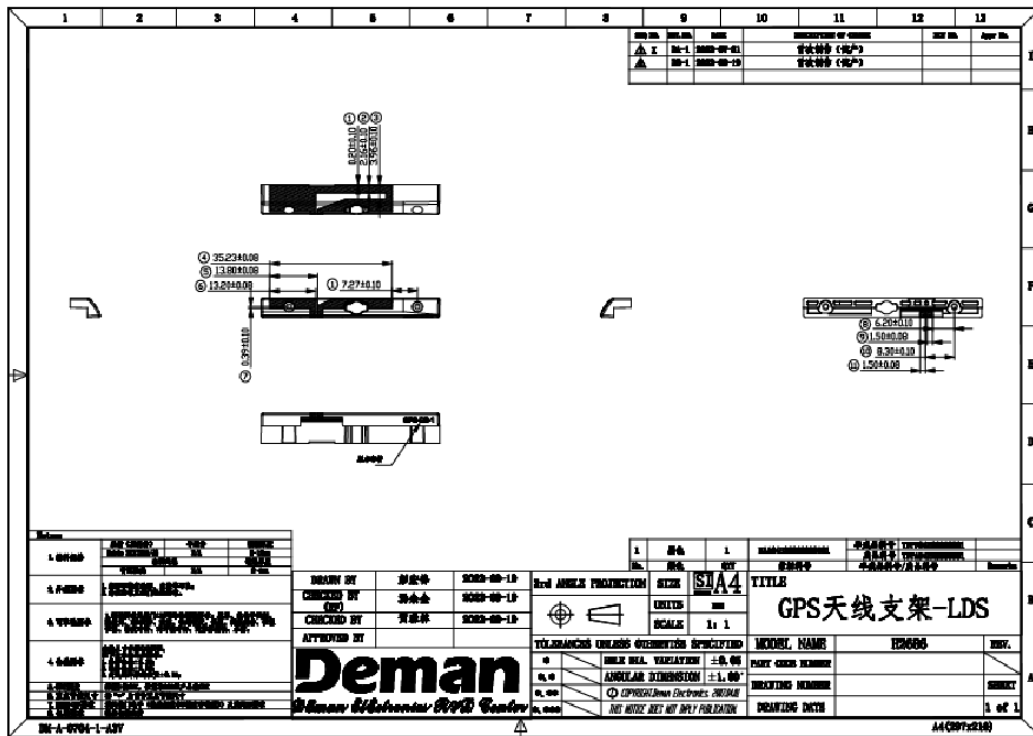

Manufacturer: Shenzhen Deman Electronics Co.,LTD.

Manufacturer address: Shunluo Industrial Park, No. 1 Fengtai Road, Tangxia Town, Dongguan City, Guangdong

Model name: GPS-DB-1