




Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 3, CH106		:	

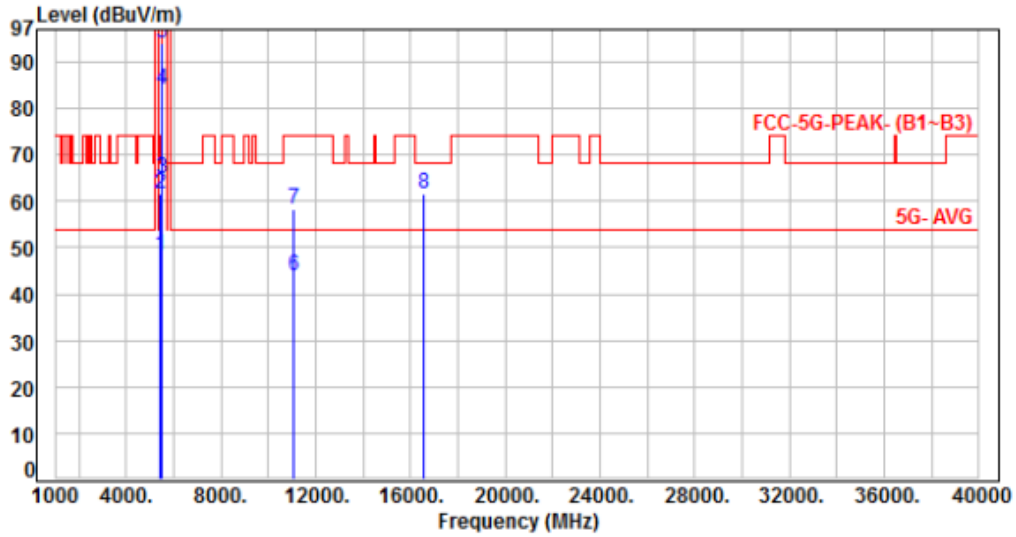


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.81	48.50	54.00	-5.50	Average	242	310	P
2	5460.00	6.69	54.93	61.62	74.00	-12.38	Peak	242	310	P
3	5470.00	6.72	58.06	64.78	68.20	-3.42	Peak	242	310	P
4	5530.00	6.76	77.39	84.15	200.00	-115.85	Average	242	310	P
5	5530.00	6.76	87.19	93.95	200.00	-106.05	Peak	242	310	P
6	11060.00	14.66	29.28	43.94	54.00	-10.06	Average	100	196	P
7	11060.00	14.66	43.61	58.27	74.00	-15.73	Peak	100	196	P
8	16590.00	17.84	43.79	61.63	68.20	-6.57	Peak	100	167	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 6, Band 3, CH122		:	

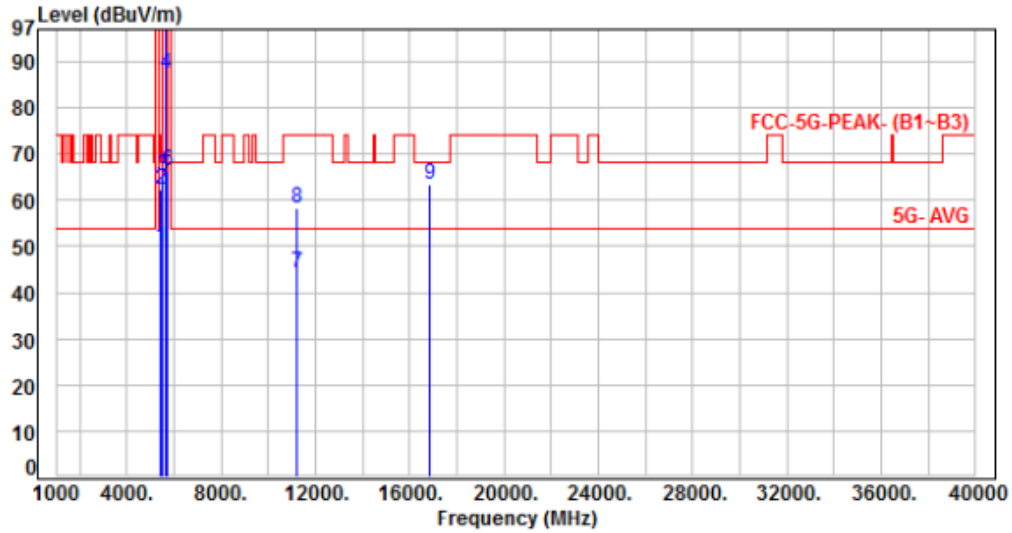


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	43.12	49.81	54.00	-4.19	Average	269	15	P
2	5460.00	6.69	55.49	62.18	74.00	-11.82	Peak	269	15	P
3	5470.00	6.72	58.51	65.23	68.20	-2.97	Peak	269	15	P
4	5610.00	6.75	80.73	87.48	200.00	-112.52	Average	269	15	P
5	5610.00	6.75	90.27	97.02	200.00	-102.98	Peak	269	15	P
6	5725.00	6.83	59.60	66.43	68.20	-1.77	Peak	269	15	P
7	11220.00	14.73	29.43	44.16	54.00	-9.84	Average	100	288	P
8	11220.00	14.73	43.66	58.39	74.00	-15.61	Peak	100	288	P
9	16830.00	19.35	44.00	63.35	68.20	-4.85	Peak	100	163	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 3, CH122		:	

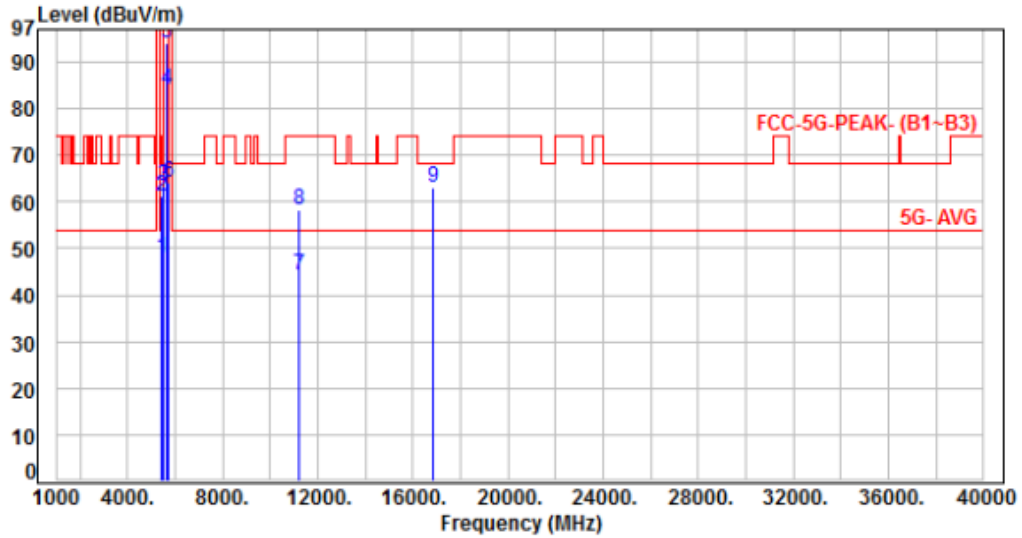


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.37	48.06	54.00	-5.94	Average	244	310	P
2	5460.00	6.69	54.62	61.31	74.00	-12.69	Peak	244	310	P
3	5470.00	6.72	56.80	63.52	68.20	-4.68	Peak	244	310	P
4	5610.00	6.75	77.18	83.93	200.00	-116.07	Average	244	310	P
5	5610.00	6.75	87.42	94.17	200.00	-105.83	Peak	244	310	P
6	5725.00	6.83	57.45	64.28	68.20	-3.92	Peak	244	310	P
7	11220.00	14.73	29.50	44.23	54.00	-9.77	Average	100	198	P
8	11220.00	14.73	43.51	58.24	74.00	-15.76	Peak	100	198	P
9	16830.00	19.35	43.63	62.98	68.20	-5.22	Peak	100	169	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, Band 3 Straddle Channel, CH144		:	

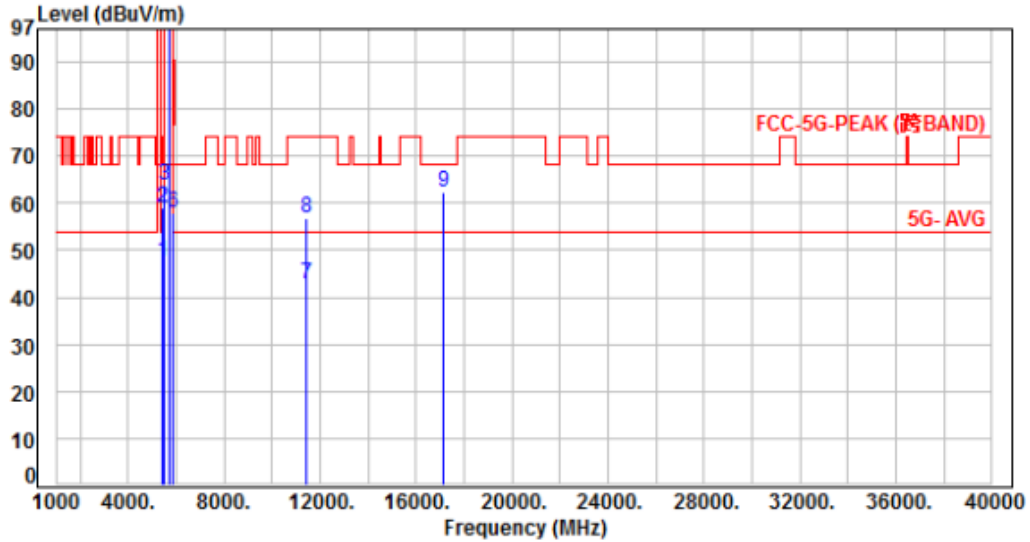


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	40.94	47.63	54.00	-6.37	Average	330	357	P
2	5460.00	6.69	52.36	59.05	74.00	-14.95	Peak	330	357	P
3	5470.00	6.72	57.21	63.93	68.20	-4.27	Peak	330	357	P
4	5720.00	6.83	92.46	99.29	200.00	-100.71	Average	330	357	P
5	5720.00	6.83	102.33	109.16	200.00	-90.84	Peak	330	357	P
6	5850.00	6.86	51.17	58.03	122.20	-64.17	Peak	330	357	P
7	11440.00	15.05	27.75	42.80	54.00	-11.20	Average	100	299	P
8	11440.00	15.05	41.67	56.72	74.00	-17.28	Peak	100	299	P
9	17160.00	21.14	41.04	62.18	68.20	-6.02	Peak	100	134	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, Band 3 Straddle Channel, CH144		:	

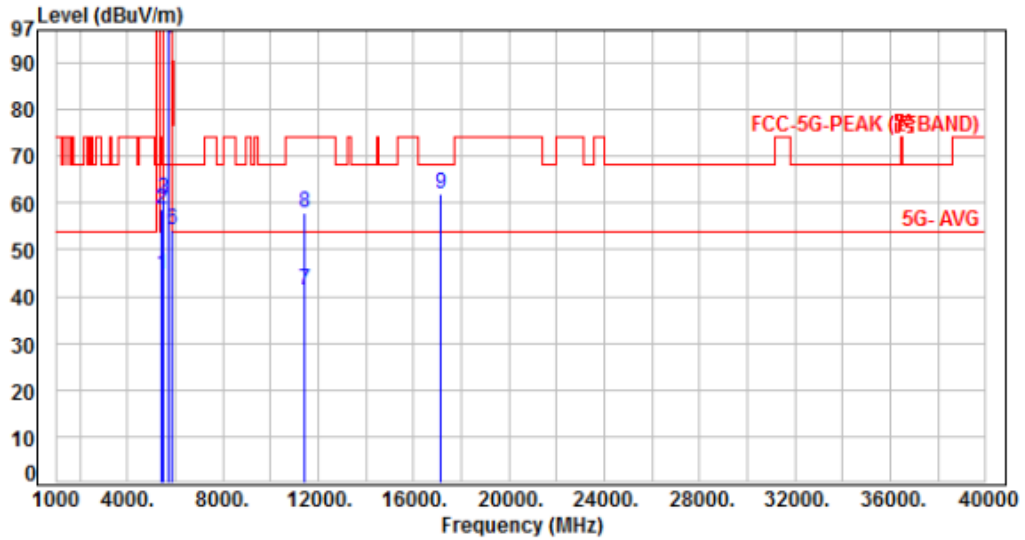


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	37.86	44.55	54.00	-9.45	Average	250	311	P
2	5460.00	6.69	51.95	58.64	74.00	-15.36	Peak	250	311	P
3	5470.00	6.72	54.07	60.79	68.20	-7.41	Peak	250	311	P
4	5720.00	6.83	88.34	95.17	200.00	-104.83	Average	250	311	P
5	5720.00	6.83	98.53	105.36	200.00	-94.64	Peak	250	311	P
6	5850.00	6.86	47.49	54.35	122.20	-67.85	Peak	250	311	P
7	11440.00	15.05	26.44	41.49	54.00	-12.51	Average	100	205	P
8	11440.00	15.05	42.79	57.84	74.00	-16.16	Peak	100	205	P
9	17160.00	21.14	40.86	62.00	68.20	-6.20	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, Band 3 Straddle Channel, CH144		:	

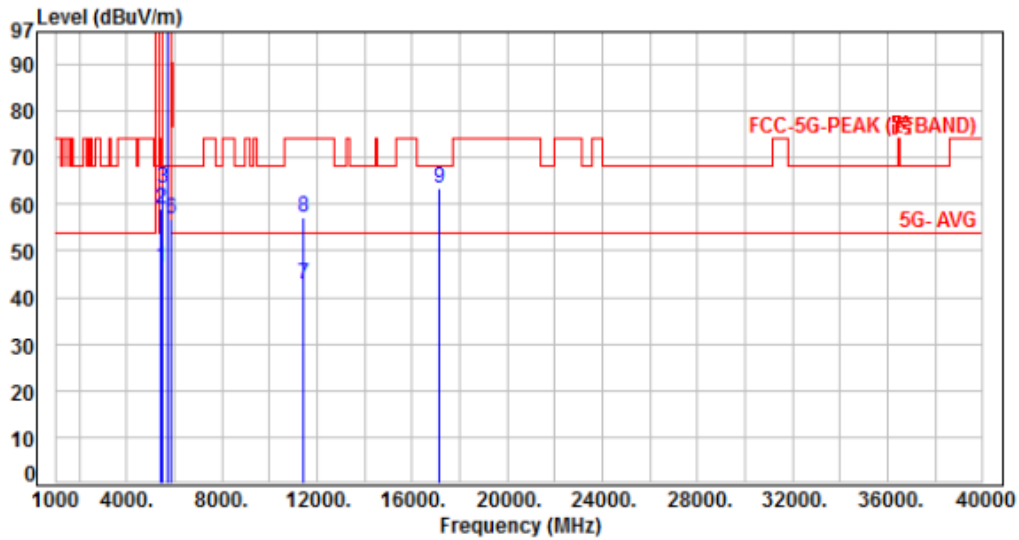


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	39.91	46.60	54.00	-7.40	Average	350	355	P
2	5460.00	6.69	52.25	58.94	74.00	-15.06	Peak	350	355	P
3	5470.00	6.72	56.83	63.55	68.20	-4.65	Peak	350	355	P
4	5720.00	6.83	91.93	98.76	200.00	-101.24	Average	350	355	P
5	5720.00	6.83	102.32	109.15	200.00	-90.85	Peak	350	355	P
6	5850.00	6.86	50.04	56.90	122.20	-65.30	Peak	350	355	P
7	11440.00	15.05	27.87	42.92	54.00	-11.08	Average	100	310	P
8	11440.00	15.05	42.01	57.06	74.00	-16.94	Peak	100	310	P
9	17160.00	21.14	42.21	63.35	68.20	-4.85	Peak	100	180	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 3 Straddle Channel, CH144		:	

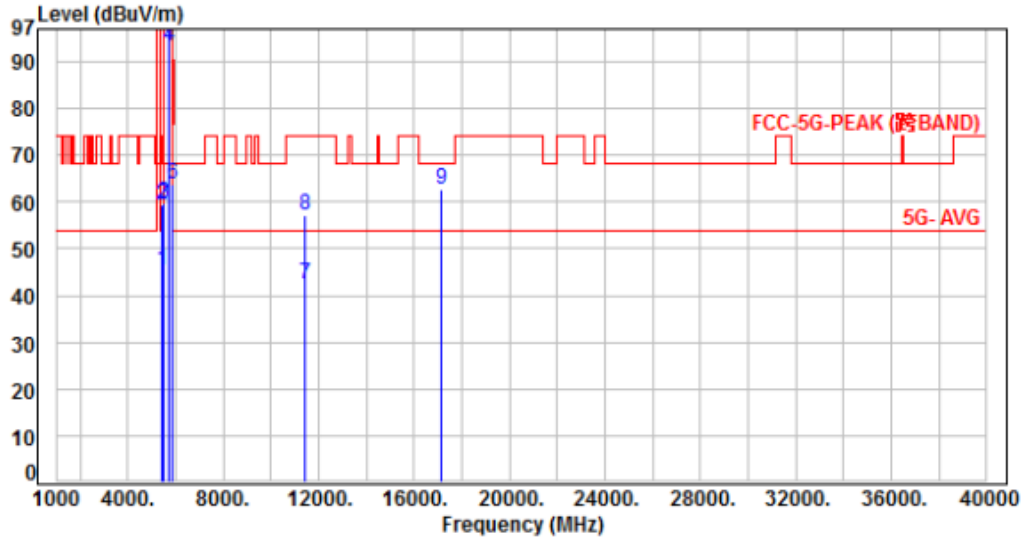


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	38.83	45.52	54.00	-8.48	Average	200	309	P
2	5460.00	6.69	52.84	59.53	74.00	-14.47	Peak	200	309	P
3	5470.00	6.72	53.06	59.78	68.20	-8.42	Peak	200	309	P
4	5720.00	6.83	86.32	93.15	200.00	-106.85	Average	200	309	P
5	5720.00	6.83	97.61	104.44	200.00	-95.56	Peak	200	309	P
6	5850.00	6.86	57.08	63.94	122.20	-58.26	Peak	200	309	P
7	11440.00	15.05	27.49	42.54	54.00	-11.46	Average	100	215	P
8	11440.00	15.05	42.08	57.13	74.00	-16.87	Peak	100	215	P
9	17160.00	21.14	41.51	62.65	68.20	-5.55	Peak	100	180	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: From Adapter (AC 120V / 60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3 Straddle Channel, CH142		:

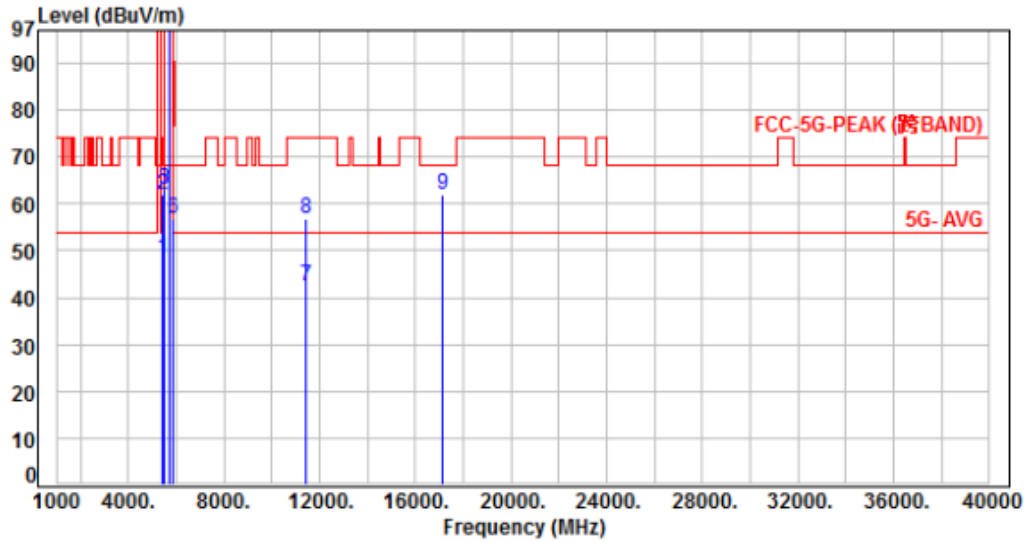


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.48	48.17	54.00	-5.83	Average	321	351	P
2	5460.00	6.69	55.34	62.03	74.00	-11.97	Peak	321	351	P
3	5470.00	6.72	56.29	63.01	68.20	-5.19	Peak	321	351	P
4	5710.00	6.84	89.19	96.03	200.00	-103.97	Average	321	351	P
5	5710.00	6.84	98.19	105.03	200.00	-94.97	Peak	321	351	P
6	5850.00	6.86	50.05	56.91	122.20	-65.29	Peak	321	351	P
7	11420.00	15.00	27.26	42.26	54.00	-11.74	Average	100	336	P
8	11420.00	15.00	41.79	56.79	74.00	-17.21	Peak	100	336	P
9	17130.00	20.97	40.99	61.96	68.20	-6.24	Peak	100	139	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 3 Straddle Channel, CH142		:	

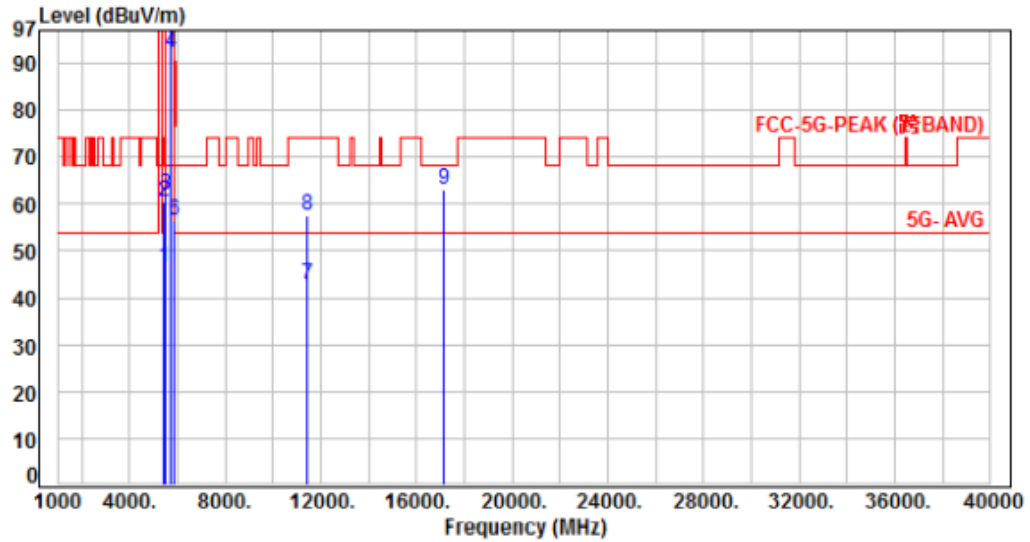


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	39.96	46.65	54.00	-7.35	Average	100	316	P
2	5460.00	6.69	53.82	60.51	74.00	-13.49	Peak	100	316	P
3	5470.00	6.72	55.14	61.86	68.20	-6.34	Peak	100	316	P
4	5710.00	6.84	85.38	92.22	200.00	-107.78	Average	100	316	P
5	5710.00	6.84	94.50	101.34	200.00	-98.66	Peak	100	316	P
6	5850.00	6.86	49.72	56.58	122.20	-65.62	Peak	100	316	P
7	11420.00	15.00	27.83	42.83	54.00	-11.17	Average	100	139	P
8	11420.00	15.00	42.49	57.49	74.00	-16.51	Peak	100	139	P
9	17130.00	20.97	42.13	63.10	68.20	-5.10	Peak	100	58	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 6, Band 3 Straddle Channel, CH138		:	

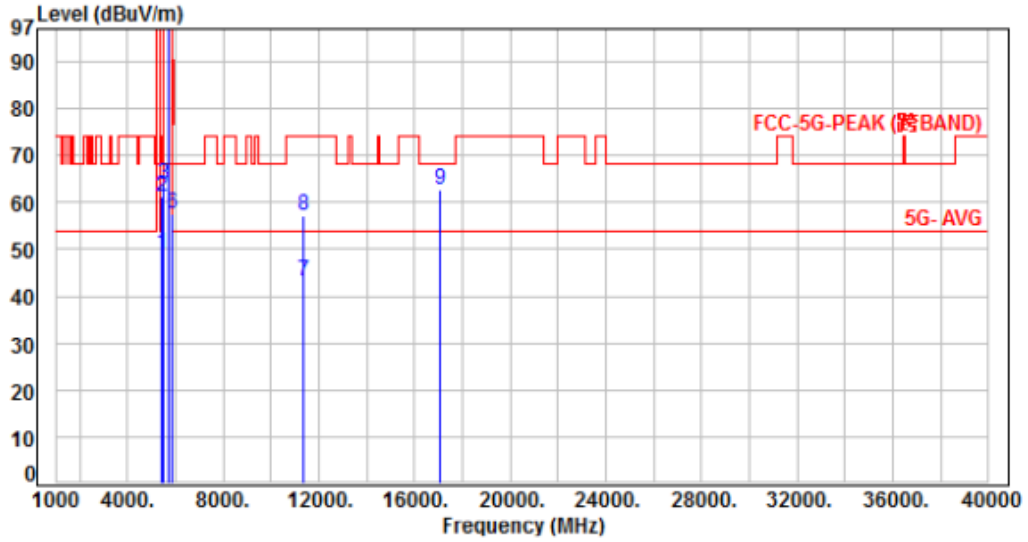


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	42.25	48.94	54.00	-5.06	Average	272	50	P
2	5460.00	6.69	54.46	61.15	74.00	-12.85	Peak	272	50	P
3	5470.00	6.72	57.26	63.98	68.20	-4.22	Peak	272	50	P
4	5690.00	6.81	89.17	95.98	200.00	-104.02	Average	272	50	P
5	5690.00	6.81	98.44	105.25	200.00	-94.75	Peak	272	50	P
6	5850.00	6.86	50.79	57.65	122.20	-64.55	Peak	272	50	P
7	11380.00	14.91	28.32	43.23	54.00	-10.77	Average	100	337	P
8	11380.00	14.91	42.23	57.14	74.00	-16.86	Peak	100	337	P
9	17070.00	20.74	41.78	62.52	68.20	-5.68	Peak	100	145	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: From Adapter (AC 120V / 60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, Band 3 Straddle Channel, CH138		:

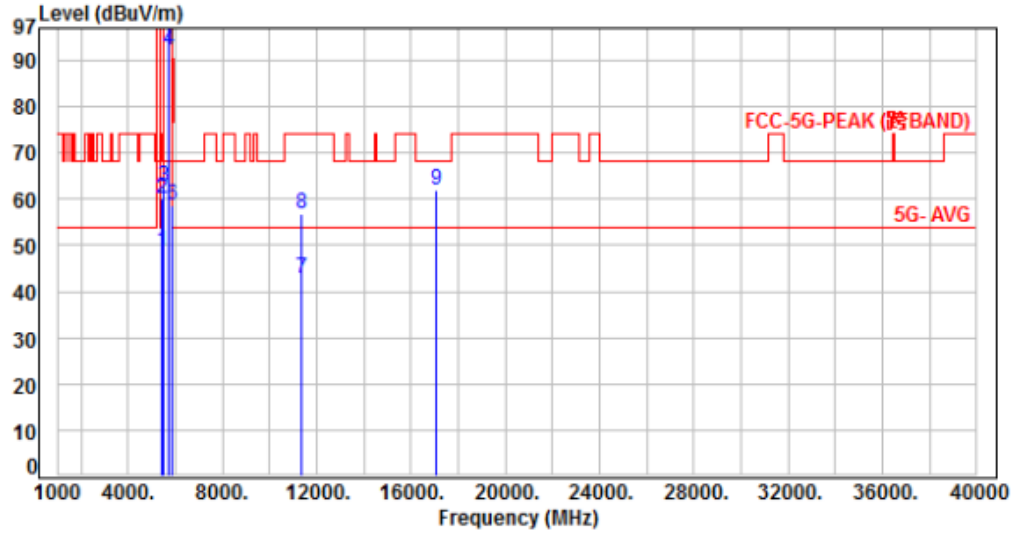


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.69	41.94	48.63	54.00	-5.37	Average	242	280	P
2	5460.00	6.69	53.52	60.21	74.00	-13.79	Peak	242	280	P
3	5470.00	6.72	56.07	62.79	68.20	-5.41	Peak	242	280	P
4	5690.00	6.81	85.47	92.28	200.00	-107.72	Average	242	280	P
5	5690.00	6.81	95.08	101.89	200.00	-98.11	Peak	242	280	P
6	5850.00	6.86	51.85	58.71	122.20	-63.49	Peak	242	280	P
7	11380.00	14.91	27.74	42.65	54.00	-11.35	Average	100	149	P
8	11380.00	14.91	41.99	56.90	74.00	-17.10	Peak	100	149	P
9	17070.00	20.74	41.08	61.82	68.20	-6.38	Peak	100	329	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, Band 4, CH149		:	

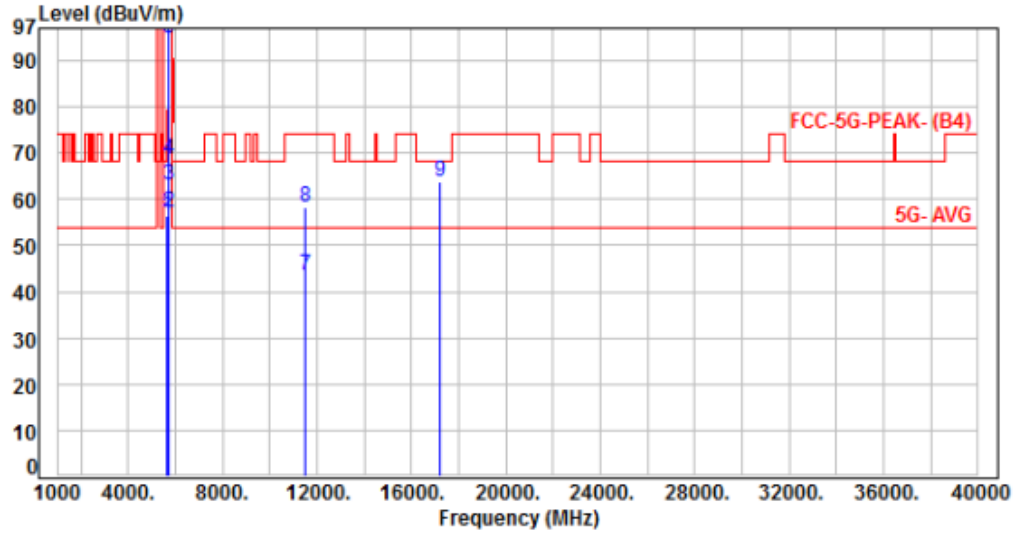


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	49.71	56.33	68.20	-11.87	Peak	100	155	P
2	5700.00	6.86	50.40	57.26	105.20	-47.94	Peak	100	155	P
3	5720.00	6.83	56.11	62.94	110.80	-47.86	Peak	100	155	P
4	5725.00	6.83	61.82	68.65	122.20	-53.55	Peak	100	155	P
5	5745.00	6.80	88.09	94.89	200.00	-105.11	Average	100	155	P
6	5745.00	6.80	98.12	104.92	200.00	-95.08	Peak	100	155	P
7	11490.00	15.18	28.41	43.59	54.00	-10.41	Average	100	60	P
8	11490.00	15.18	43.05	58.23	74.00	-15.77	Peak	100	60	P
9	17235.00	21.58	42.39	63.97	68.20	-4.23	Peak	100	102	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, Band 4, CH149		:	

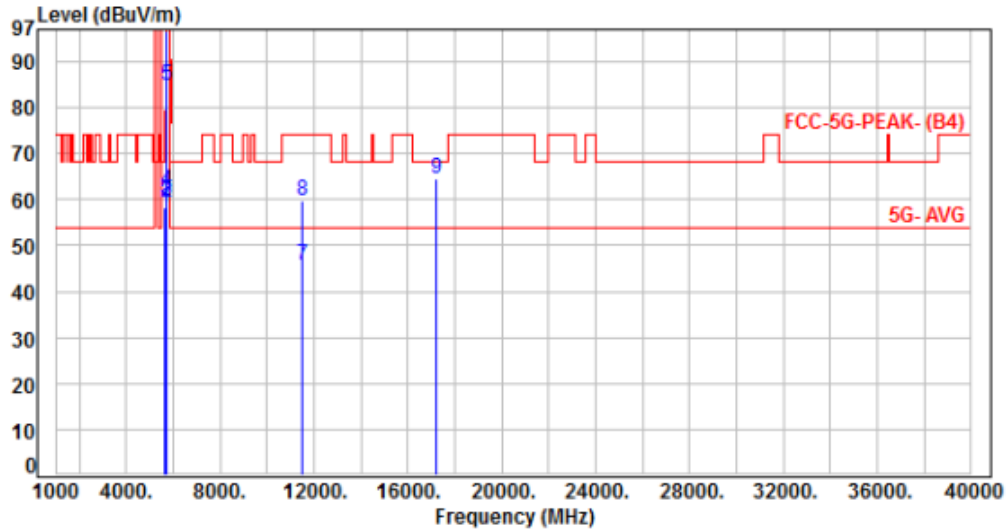


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.48	58.10	68.20	-10.10	Peak	100	69	P
2	5700.00	6.86	52.58	59.44	105.20	-45.76	Peak	100	69	P
3	5720.00	6.83	52.94	59.77	110.80	-51.03	Peak	100	69	P
4	5725.00	6.83	55.07	61.90	122.20	-60.30	Peak	100	69	P
5	5745.00	6.80	78.08	84.88	200.00	-115.12	Average	100	69	P
6	5745.00	6.80	89.76	96.56	200.00	-103.44	Peak	100	69	P
7	11490.00	15.18	30.39	45.57	54.00	-8.43	Average	100	196	P
8	11490.00	15.18	44.49	59.67	74.00	-14.33	Peak	100	196	P
9	17235.00	21.58	43.08	64.66	68.20	-3.54	Peak	100	137	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, Band 4, CH157		:	

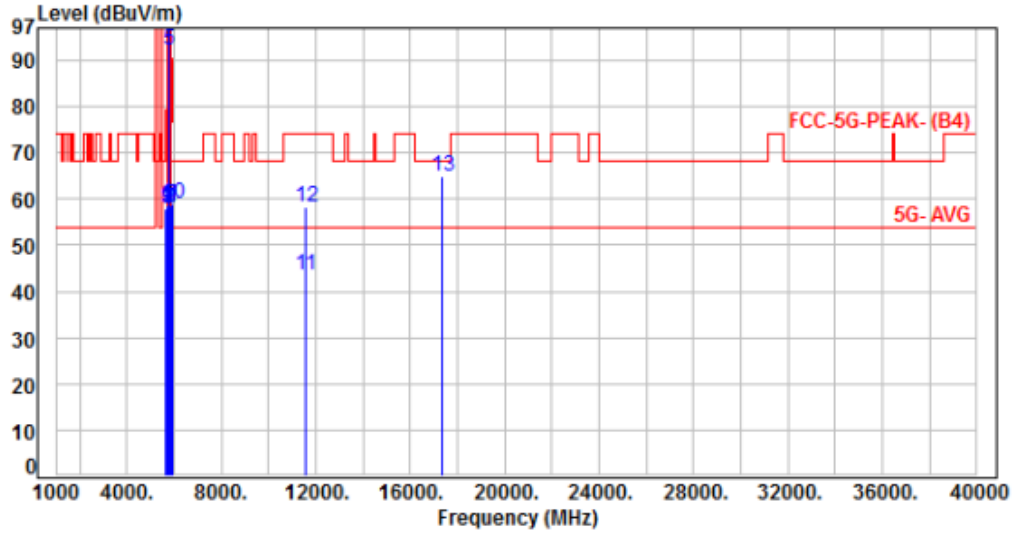


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.25	57.87	68.20	-10.33	Peak	100	154	P
2	5700.00	6.86	51.23	58.09	105.20	-47.11	Peak	100	154	P
3	5720.00	6.83	50.96	57.79	110.80	-53.01	Peak	100	154	P
4	5725.00	6.83	51.68	58.51	122.20	-63.69	Peak	100	154	P
5	5785.00	6.81	85.24	92.05	200.00	-107.95	Average	100	154	P
6	5785.00	6.81	97.23	104.04	200.00	-95.96	Peak	100	154	P
7	5850.00	6.86	51.88	58.74	122.20	-63.46	Peak	100	154	P
8	5855.00	6.91	51.12	58.03	110.80	-52.77	Peak	100	154	P
9	5875.00	7.08	51.49	58.57	105.20	-46.63	Peak	100	154	P
10	5925.00	7.32	51.73	59.05	68.20	-9.15	Peak	100	154	P
11	11570.00	15.42	28.18	43.60	54.00	-10.40	Average	100	55	P
12	11570.00	15.42	42.90	58.32	74.00	-15.68	Peak	100	55	P
13	17355.00	22.30	42.76	65.06	68.20	-3.14	Peak	100	97	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, Band 4, CH157		:	

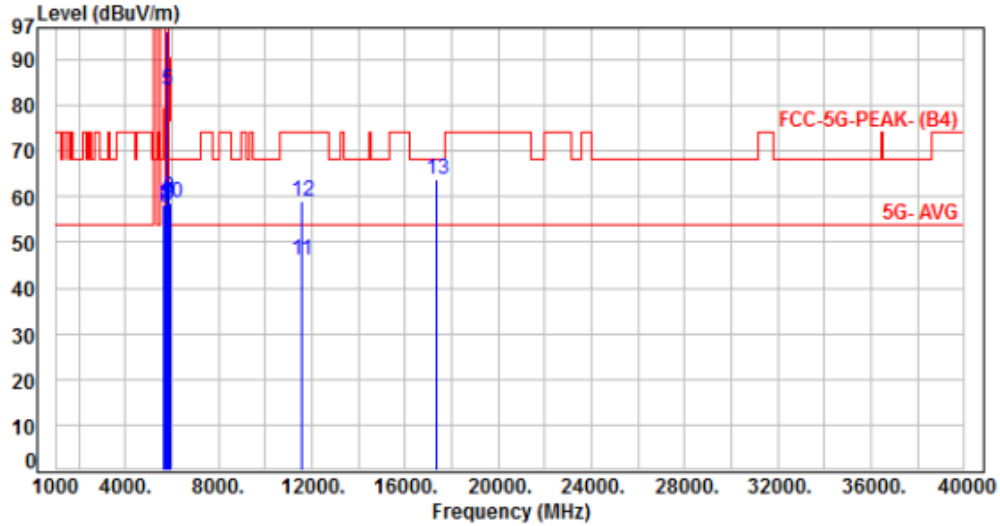


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.57	58.19	68.20	-10.01	Peak	100	74	P
2	5700.00	6.86	51.45	58.31	105.20	-46.89	Peak	100	74	P
3	5720.00	6.83	50.73	57.56	110.80	-53.24	Peak	100	74	P
4	5725.00	6.83	51.28	58.11	122.20	-64.09	Peak	100	74	P
5	5785.00	6.81	76.70	83.51	200.00	-116.49	Average	100	74	P
6	5785.00	6.81	89.43	96.24	200.00	-103.76	Peak	100	74	P
7	5850.00	6.86	51.84	58.70	122.20	-63.50	Peak	100	74	P
8	5855.00	6.91	52.94	59.85	110.80	-50.95	Peak	100	74	P
9	5875.00	7.08	51.29	58.37	105.20	-46.83	Peak	100	74	P
10	5925.00	7.32	51.26	58.58	68.20	-9.62	Peak	100	74	P
11	11570.00	15.42	30.78	46.20	54.00	-7.80	Average	100	199	P
12	11570.00	15.42	43.55	58.97	74.00	-15.03	Peak	100	199	P
13	17355.00	22.30	41.49	63.79	68.20	-4.41	Peak	100	143	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: From Adapter (AC 120V / 60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH165		:

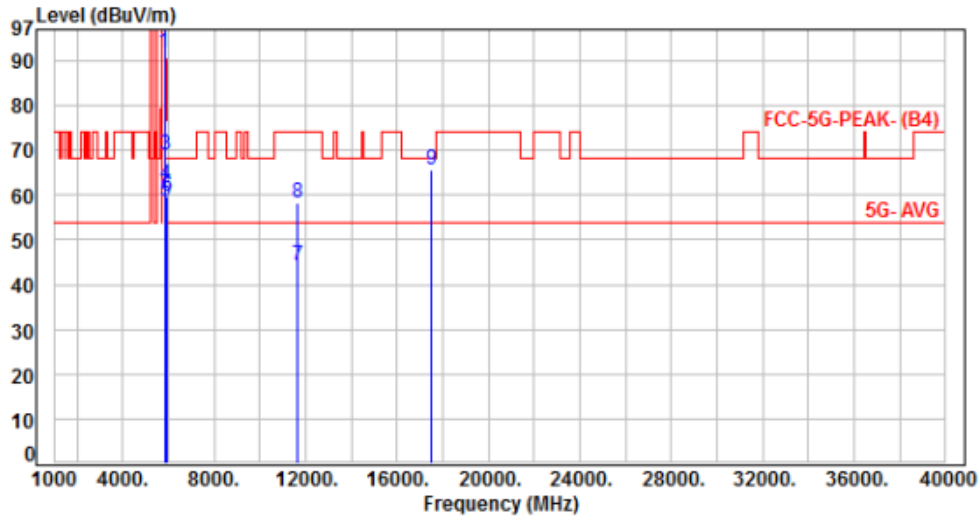


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	85.07	91.91	200.00	-108.09	Average	100	159	P
2	5825.00	6.84	96.24	103.08	200.00	-96.92	Peak	100	159	P
3	5850.00	6.86	61.95	68.81	122.20	-53.39	Peak	100	159	P
4	5855.00	6.91	55.29	62.20	110.80	-48.60	Peak	100	159	P
5	5875.00	7.08	51.68	58.76	105.20	-46.44	Peak	100	159	P
6	5925.00	7.32	52.49	59.81	68.20	-8.39	Peak	100	159	P
7	11650.00	15.64	28.74	44.38	54.00	-9.62	Average	100	54	P
8	11650.00	15.64	42.52	58.16	74.00	-15.84	Peak	100	54	P
9	17475.00	23.17	42.39	65.56	68.20	-2.64	Peak	100	103	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, Band 4, CH165		:	

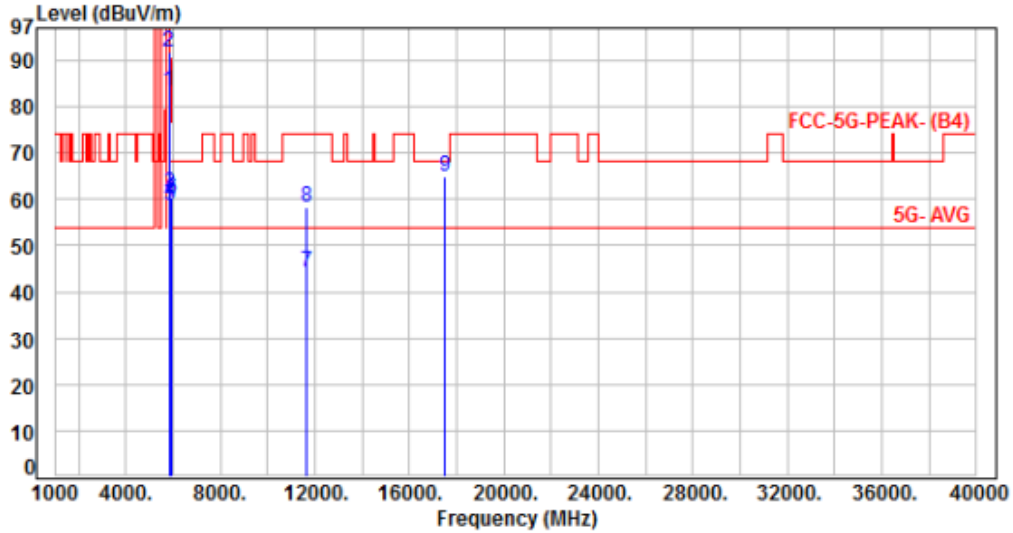


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	76.44	83.28	200.00	-116.72	Average	100	66	P
2	5825.00	6.84	84.91	91.75	200.00	-108.25	Peak	100	66	P
3	5850.00	6.86	54.40	61.26	122.20	-60.94	Peak	100	66	P
4	5855.00	6.91	52.50	59.41	110.80	-51.39	Peak	100	66	P
5	5875.00	7.08	51.41	58.49	105.20	-46.71	Peak	100	66	P
6	5925.00	7.32	52.86	60.18	68.20	-8.02	Peak	100	66	P
7	11650.00	15.64	28.72	44.36	54.00	-9.64	Average	100	197	P
8	11650.00	15.64	42.51	58.15	74.00	-15.85	Peak	100	197	P
9	17475.00	23.17	41.79	64.96	68.20	-3.24	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, Band 4, CH149		:	

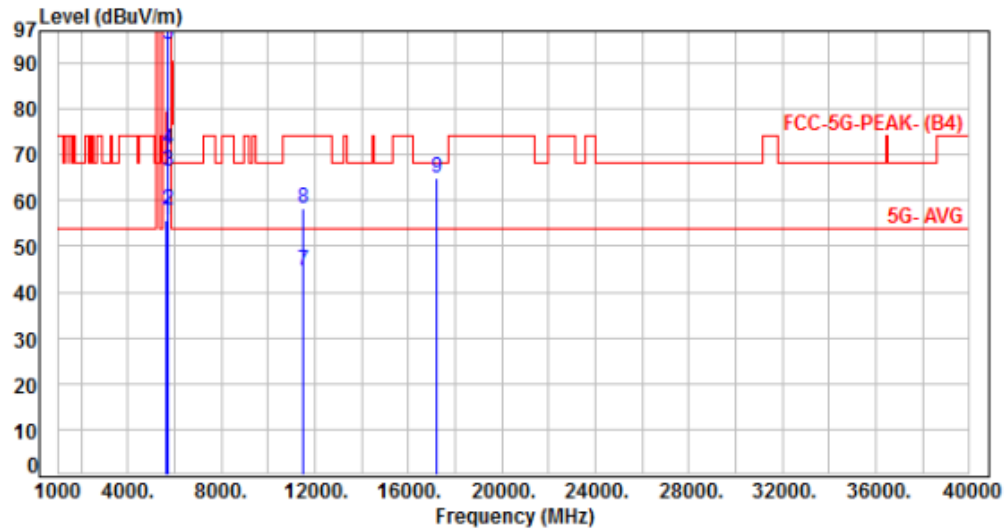


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	49.19	55.81	68.20	-12.39	Peak	100	157	P
2	5700.00	6.86	51.21	58.07	105.20	-47.13	Peak	100	157	P
3	5720.00	6.83	59.43	66.26	110.80	-44.54	Peak	100	157	P
4	5725.00	6.83	64.17	71.00	122.20	-51.20	Peak	100	157	P
5	5745.00	6.80	87.24	94.04	200.00	-105.96	Average	100	157	P
6	5745.00	6.80	96.98	103.78	200.00	-96.22	Peak	100	157	P
7	11490.00	15.18	29.45	44.63	54.00	-9.37	Average	100	58	P
8	11490.00	15.18	42.91	58.09	74.00	-15.91	Peak	100	58	P
9	17235.00	21.58	43.28	64.86	68.20	-3.34	Peak	100	100	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 4, CH149		:	

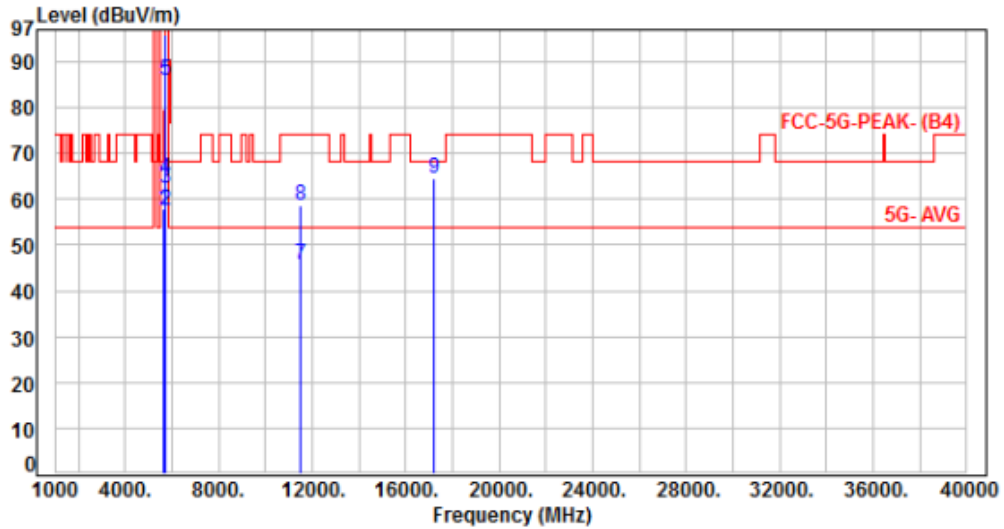


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.27	57.89	68.20	-10.31	Peak	100	68	P
2	5700.00	6.86	50.74	57.60	105.20	-47.60	Peak	100	68	P
3	5720.00	6.83	55.49	62.32	110.80	-48.48	Peak	100	68	P
4	5725.00	6.83	57.84	64.67	122.20	-57.53	Peak	100	68	P
5	5745.00	6.80	79.05	85.85	200.00	-114.15	Average	100	68	P
6	5745.00	6.80	89.12	95.92	200.00	-104.08	Peak	100	68	P
7	11490.00	15.18	30.42	45.60	54.00	-8.40	Average	100	196	P
8	11490.00	15.18	43.61	58.79	74.00	-15.21	Peak	100	196	P
9	17235.00	21.58	43.08	64.66	68.20	-3.54	Peak	100	140	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: From Adapter (AC 120V / 60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH157		:

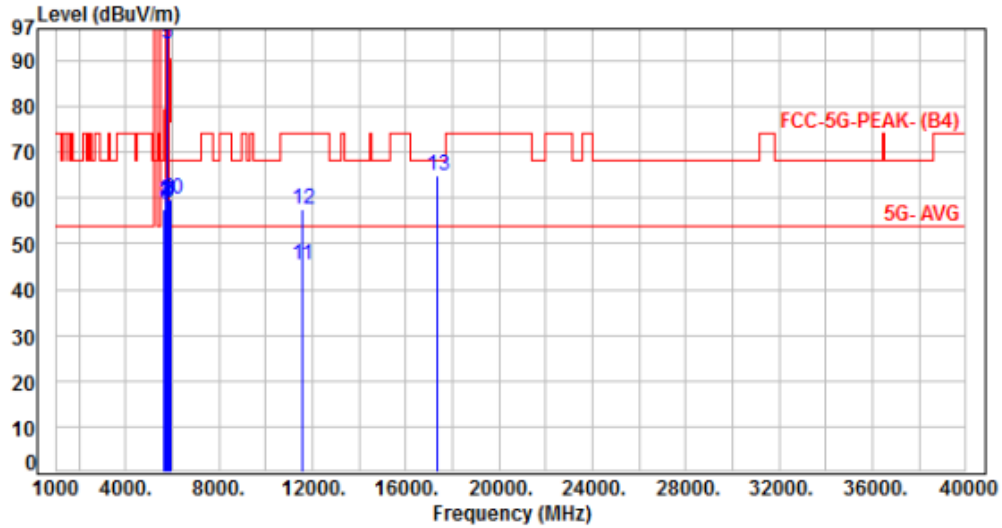


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	50.93	57.55	68.20	-10.65	Peak	100	156	P
2	5700.00	6.86	52.63	59.49	105.20	-45.71	Peak	100	156	P
3	5720.00	6.83	51.67	58.50	110.80	-52.30	Peak	100	156	P
4	5725.00	6.83	52.36	59.19	122.20	-63.01	Peak	100	156	P
5	5785.00	6.81	86.80	93.61	200.00	-106.39	Average	100	156	P
6	5785.00	6.81	96.94	103.75	200.00	-96.25	Peak	100	156	P
7	5850.00	6.86	52.18	59.04	122.20	-63.16	Peak	100	156	P
8	5855.00	6.91	52.94	59.85	110.80	-50.95	Peak	100	156	P
9	5875.00	7.08	51.84	58.92	105.20	-46.28	Peak	100	156	P
10	5925.00	7.32	52.29	59.61	68.20	-8.59	Peak	100	156	P
11	11570.00	15.42	29.85	45.27	54.00	-8.73	Average	100	54	P
12	11570.00	15.42	42.18	57.60	74.00	-16.40	Peak	100	54	P
13	17355.00	22.30	42.57	64.87	68.20	-3.33	Peak	100	103	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 4, CH157		:	

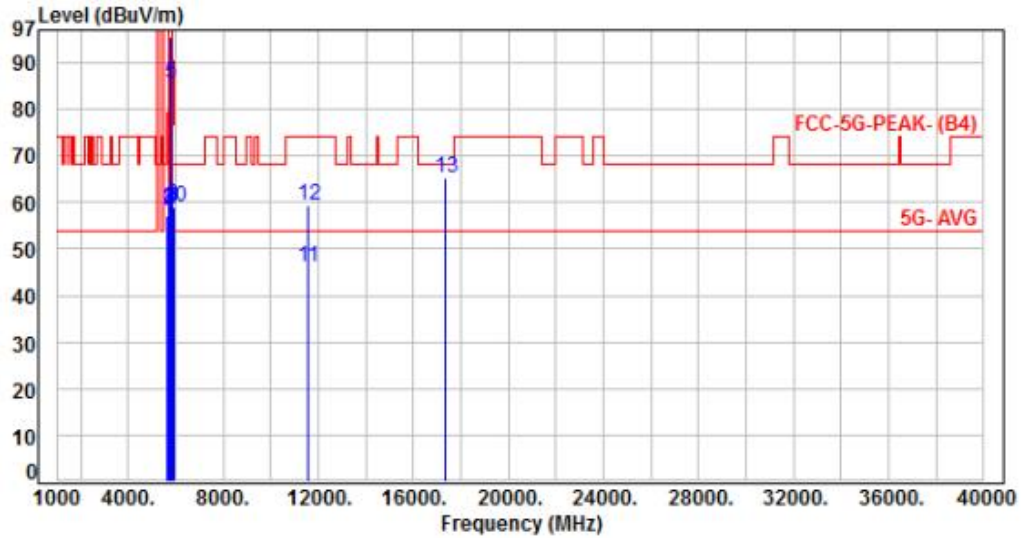


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	50.45	57.07	68.20	-11.13	Peak	100	73	P
2	5700.00	6.86	51.48	58.34	105.20	-46.86	Peak	100	73	P
3	5720.00	6.83	51.92	58.75	110.80	-52.05	Peak	100	73	P
4	5725.00	6.83	51.32	58.15	122.20	-64.05	Peak	100	73	P
5	5785.00	6.81	78.70	85.51	200.00	-114.49	Average	100	73	P
6	5785.00	6.81	88.87	95.68	200.00	-104.32	Peak	100	73	P
7	5850.00	6.86	51.67	58.53	122.20	-63.67	Peak	100	73	P
8	5855.00	6.91	52.44	59.35	110.80	-51.45	Peak	100	73	P
9	5875.00	7.08	51.40	58.48	105.20	-46.72	Peak	100	73	P
10	5925.00	7.32	51.86	59.18	68.20	-9.02	Peak	100	73	P
11	11570.00	15.42	30.57	45.99	54.00	-8.01	Average	100	202	P
12	11570.00	15.42	43.81	59.23	74.00	-14.77	Peak	100	202	P
13	17355.00	22.30	42.81	65.11	68.20	-3.09	Peak	100	141	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, Band 4, CH165		:	

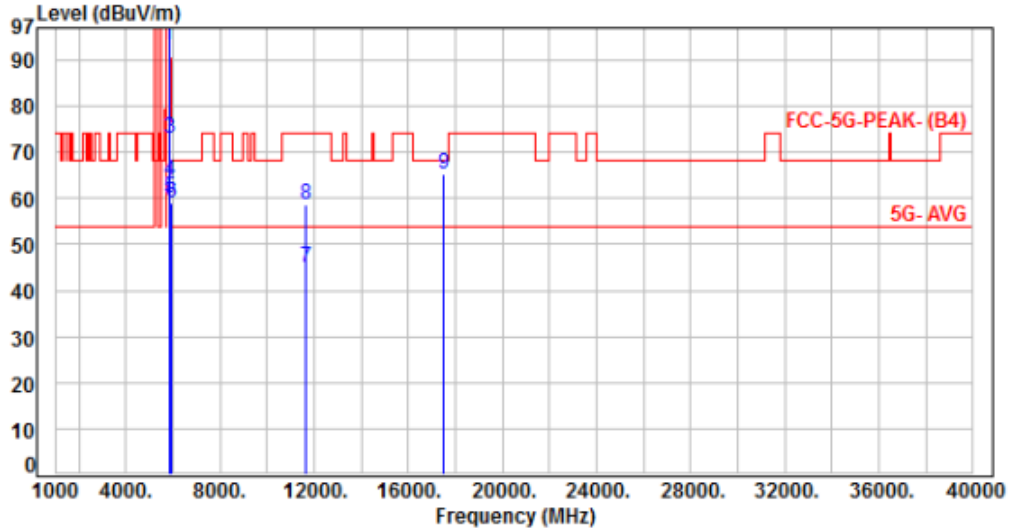


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	86.45	93.29	200.00	-106.71	Average	100	160	P
2	5825.00	6.84	95.97	102.81	200.00	-97.19	Peak	100	160	P
3	5850.00	6.86	66.29	73.15	122.20	-49.05	Peak	100	160	P
4	5855.00	6.91	56.73	63.64	110.80	-47.16	Peak	100	160	P
5	5875.00	7.08	53.17	60.25	105.20	-44.95	Peak	100	160	P
6	5925.00	7.32	51.60	58.92	68.20	-9.28	Peak	100	160	P
7	11650.00	15.64	29.48	45.12	54.00	-8.88	Average	100	53	P
8	11650.00	15.64	42.96	58.60	74.00	-15.40	Peak	100	53	P
9	17475.00	23.17	42.16	65.33	68.20	-2.87	Peak	100	105	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 4, CH165		:	

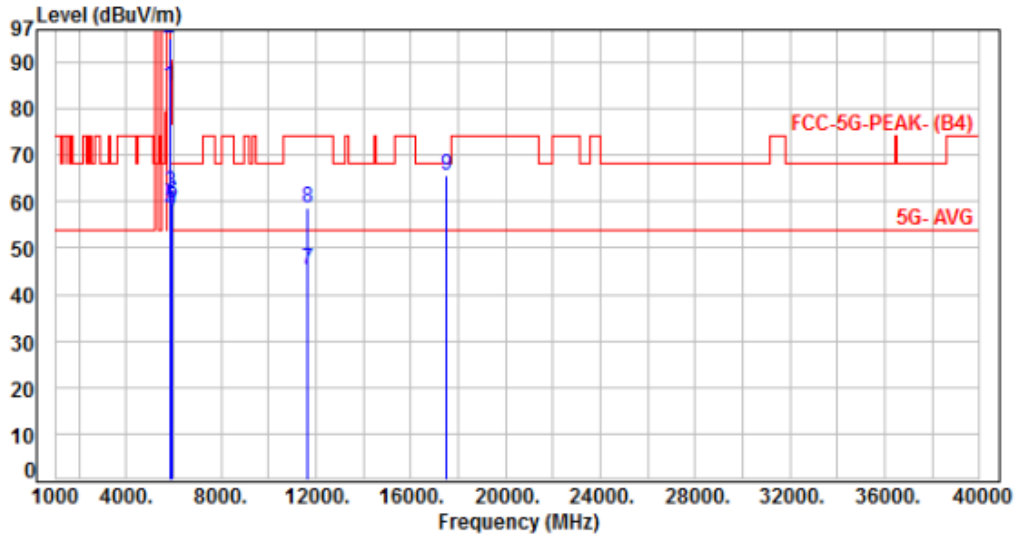


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	6.84	78.07	84.91	200.00	-115.09	Average	100	70	P
2	5825.00	6.84	88.41	95.25	200.00	-104.75	Peak	100	70	P
3	5850.00	6.86	55.17	62.03	122.20	-60.17	Peak	100	70	P
4	5855.00	6.91	51.07	57.98	110.80	-52.82	Peak	100	70	P
5	5875.00	7.08	51.70	58.78	105.20	-46.42	Peak	100	70	P
6	5925.00	7.32	52.54	59.86	68.20	-8.34	Peak	100	70	P
7	11650.00	15.64	29.87	45.51	54.00	-8.49	Average	100	204	P
8	11650.00	15.64	43.09	58.73	74.00	-15.27	Peak	100	204	P
9	17475.00	23.17	42.44	65.61	68.20	-2.59	Peak	100	143	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 5, Band 4, CH151		:	

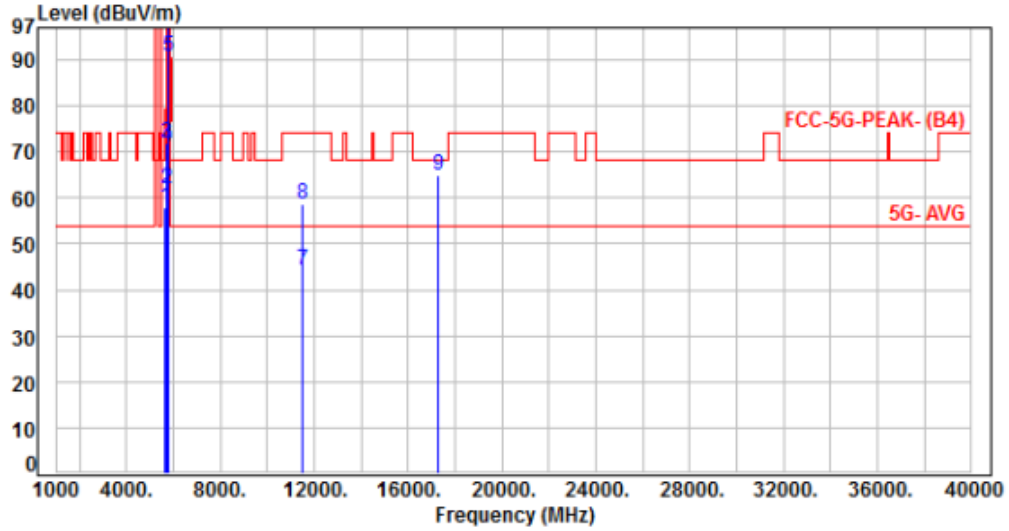


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.29	57.91	68.20	-10.29	Peak	100	161	P
2	5700.00	6.86	55.28	62.14	105.20	-43.06	Peak	100	161	P
3	5720.00	6.83	65.18	72.01	110.80	-38.79	Peak	100	161	P
4	5725.00	6.83	64.27	71.10	122.20	-51.10	Peak	100	161	P
5	5755.00	6.79	84.10	90.89	200.00	-109.11	Average	100	161	P
6	5755.00	6.79	94.36	101.15	200.00	-98.85	Peak	100	161	P
7	11510.00	15.24	29.17	44.41	54.00	-9.59	Average	100	55	P
8	11510.00	15.24	43.51	58.75	74.00	-15.25	Peak	100	55	P
9	17265.00	21.77	43.07	64.84	68.20	-3.36	Peak	100	96	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 4, CH151		:	

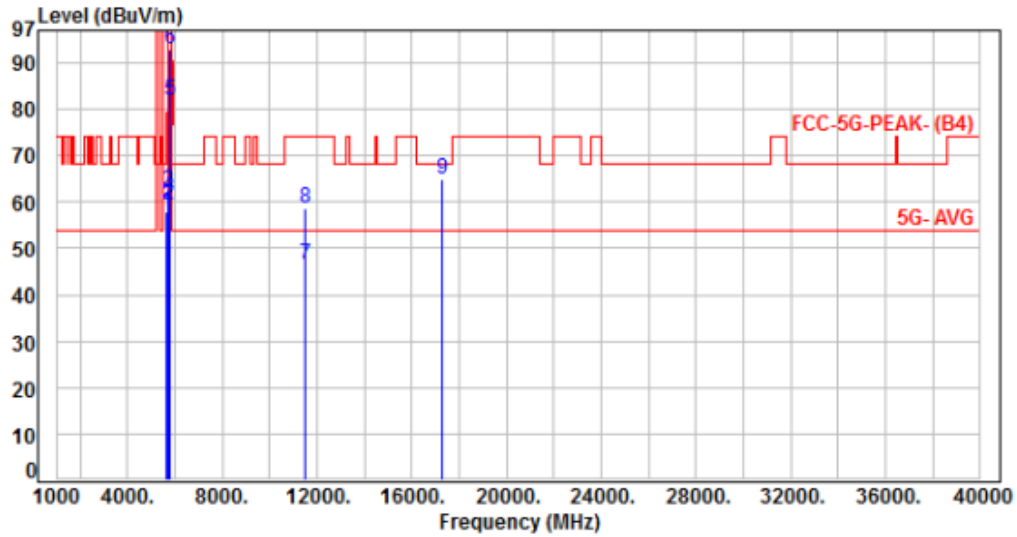


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.27	57.89	68.20	-10.31	Peak	100	75	P
2	5700.00	6.86	52.65	59.51	105.20	-45.69	Peak	100	75	P
3	5720.00	6.83	55.49	62.32	110.80	-48.48	Peak	100	75	P
4	5725.00	6.83	54.28	61.11	122.20	-61.09	Peak	100	75	P
5	5755.00	6.79	75.20	81.99	200.00	-118.01	Average	100	75	P
6	5755.00	6.79	86.29	93.08	200.00	-106.92	Peak	100	75	P
7	11510.00	15.24	31.11	46.35	54.00	-7.65	Average	100	202	P
8	11510.00	15.24	43.23	58.47	74.00	-15.53	Peak	100	202	P
9	17265.00	21.77	43.17	64.94	68.20	-3.26	Peak	100	139	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: From Adapter (AC 120V / 60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 4, CH159		:

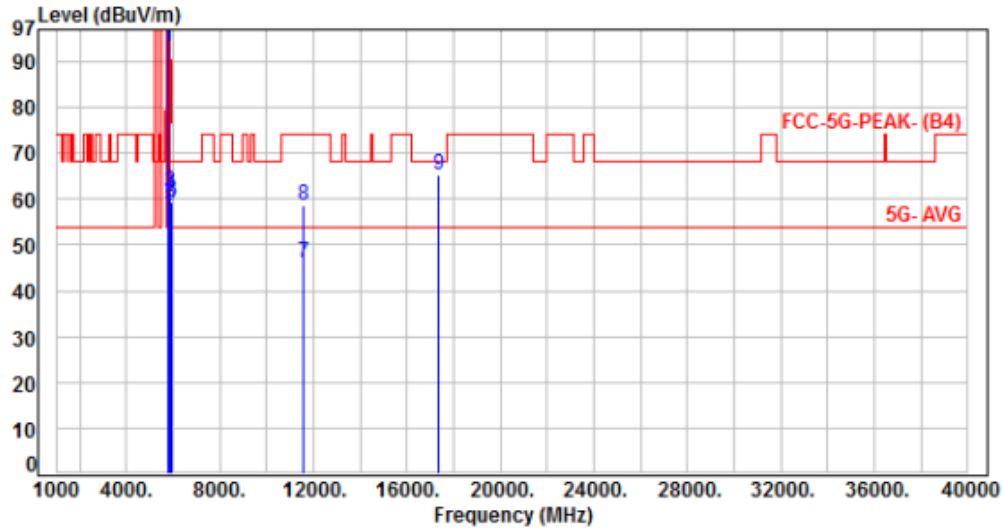


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	6.82	86.41	93.23	200.00	-106.77	Average	100	153	P
2	5795.00	6.82	95.68	102.50	200.00	-97.50	Peak	100	153	P
3	5850.00	6.86	54.92	61.78	122.20	-60.42	Peak	100	153	P
4	5855.00	6.91	53.86	60.77	110.80	-50.03	Peak	100	153	P
5	5875.00	7.08	51.45	58.53	105.20	-46.67	Peak	100	153	P
6	5925.00	7.32	51.96	59.28	68.20	-8.92	Peak	100	153	P
7	11590.00	15.47	30.49	45.96	54.00	-8.04	Average	100	58	P
8	11590.00	15.47	43.19	58.66	74.00	-15.34	Peak	100	58	P
9	17385.00	22.45	43.01	65.46	68.20	-2.74	Peak	100	105	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5, Band 4, CH159		:	

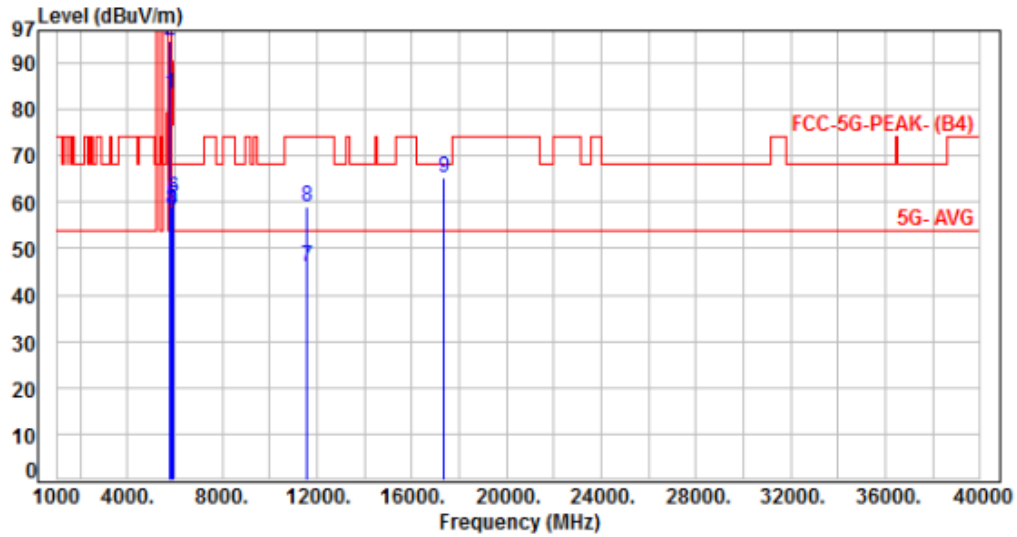


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	6.82	76.66	83.48	200.00	-116.52	Average	100	69	P
2	5795.00	6.82	87.79	94.61	200.00	-105.39	Peak	100	69	P
3	5850.00	6.86	51.47	58.33	122.20	-63.87	Peak	100	69	P
4	5855.00	6.91	51.39	58.30	110.80	-52.50	Peak	100	69	P
5	5875.00	7.08	51.95	59.03	105.20	-46.17	Peak	100	69	P
6	5925.00	7.32	53.49	60.81	68.20	-7.39	Peak	100	69	P
7	11590.00	15.47	30.77	46.24	54.00	-7.76	Average	100	201	P
8	11590.00	15.47	43.67	59.14	74.00	-14.86	Peak	100	201	P
9	17385.00	22.45	42.85	65.30	68.20	-2.90	Peak	100	137	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: From Adapter (AC 120V / 60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, Band 4, CH155		:

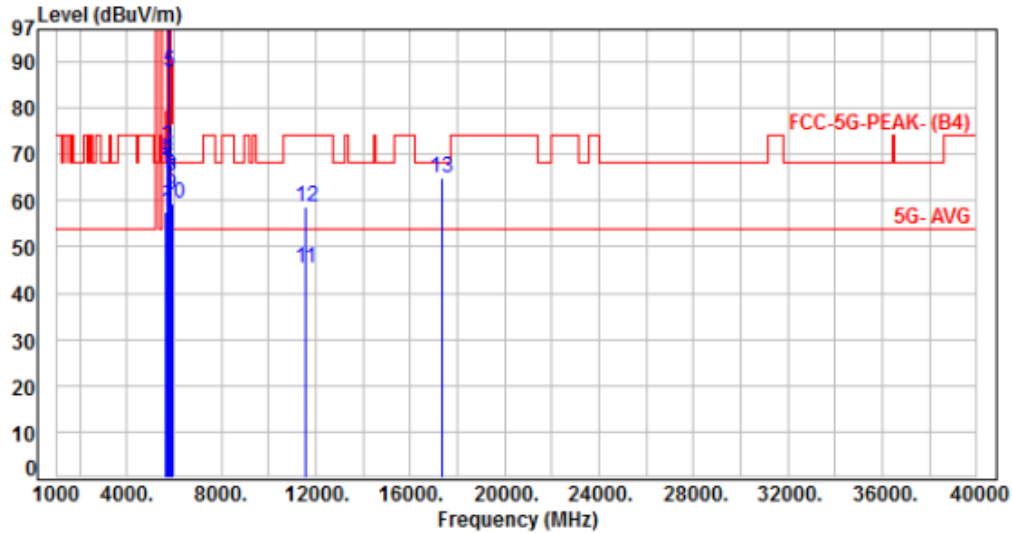


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	51.05	57.67	68.20	-10.53	Peak	100	163	P
2	5700.00	6.86	61.58	68.44	105.20	-36.76	Peak	100	163	P
3	5720.00	6.83	64.54	71.37	110.80	-39.43	Peak	100	163	P
4	5725.00	6.83	62.32	69.15	122.20	-53.05	Peak	100	163	P
5	5775.00	6.80	81.00	87.80	200.00	-112.20	Average	100	163	P
6	5775.00	6.80	91.48	98.28	200.00	-101.72	Peak	100	163	P
7	5850.00	6.86	57.61	64.47	122.20	-57.73	Peak	100	163	P
8	5855.00	6.91	58.49	65.40	110.80	-45.40	Peak	100	163	P
9	5875.00	7.08	54.27	61.35	105.20	-43.85	Peak	100	163	P
10	5925.00	7.32	52.10	59.42	68.20	-8.78	Peak	100	163	P
11	11550.00	15.36	30.06	45.42	54.00	-8.58	Average	100	60	P
12	11550.00	15.36	43.29	58.65	74.00	-15.35	Peak	100	60	P
13	17325.00	22.13	42.66	64.79	68.20	-3.41	Peak	100	99	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From Adapter (AC 120V / 60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 6, Band 4, CH155		:	

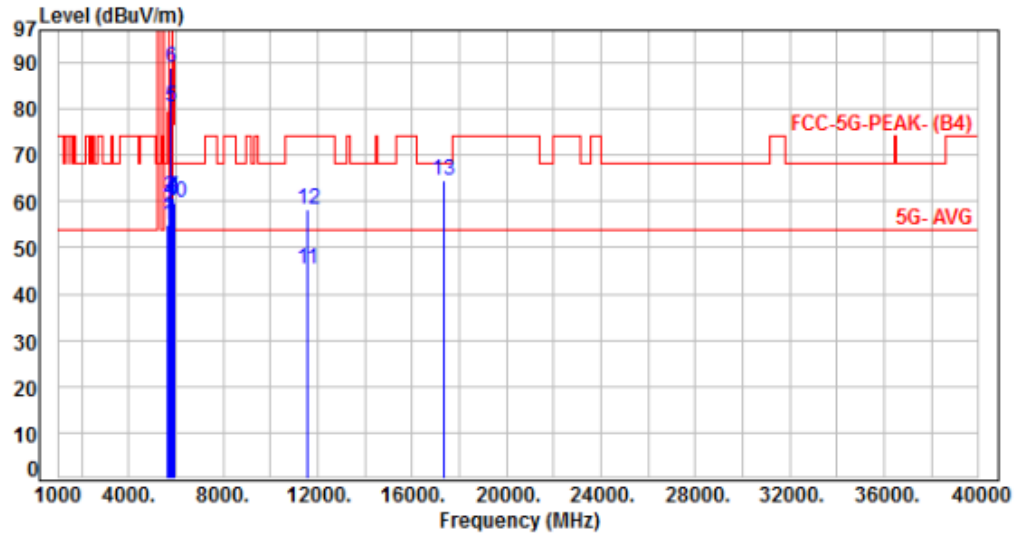

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	6.62	48.27	54.89	68.20	-13.31	Peak	100	75	P
2	5700.00	6.86	51.68	58.54	105.20	-46.66	Peak	100	75	P
3	5720.00	6.83	54.11	60.94	110.80	-49.86	Peak	100	75	P
4	5725.00	6.83	53.33	60.16	122.20	-62.04	Peak	100	75	P
5	5775.00	6.80	73.42	80.22	200.00	-119.78	Average	100	75	P
6	5775.00	6.80	82.26	89.06	200.00	-110.94	Peak	100	75	P
7	5850.00	6.86	53.92	60.78	122.20	-61.42	Peak	100	75	P
8	5855.00	6.91	53.69	60.60	110.80	-50.20	Peak	100	75	P
9	5875.00	7.08	53.09	60.17	105.20	-45.03	Peak	100	75	P
10	5925.00	7.32	52.61	59.93	68.20	-8.27	Peak	100	75	P
11	11550.00	15.36	30.11	45.47	54.00	-8.53	Average	100	203	P
12	11550.00	15.36	42.91	58.27	74.00	-15.73	Peak	100	203	P
13	17325.00	22.13	42.57	64.70	68.20	-3.50	Peak	100	144	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	2.07	2.10	98.57%
802.11ac VHT20	1.94	1.97	98.58%
802.11ac VHT40	0.96	0.99	96.76%
802.11ac VHT80	0.47	0.50	93.11%

7.5. Measurement Methods


26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




Modulation Type: 802.11a (6Mbps)

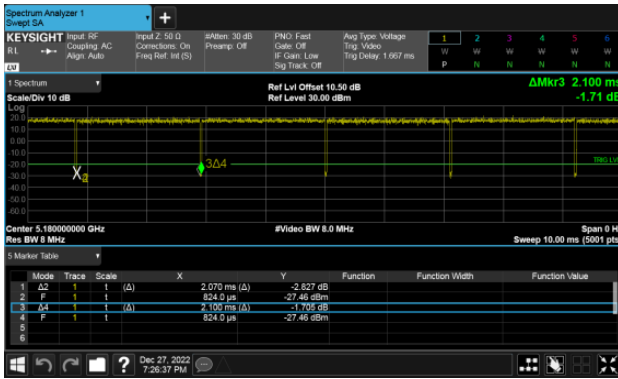


Modulation Type: 802.11ac VHT80 (29.3Mbps)

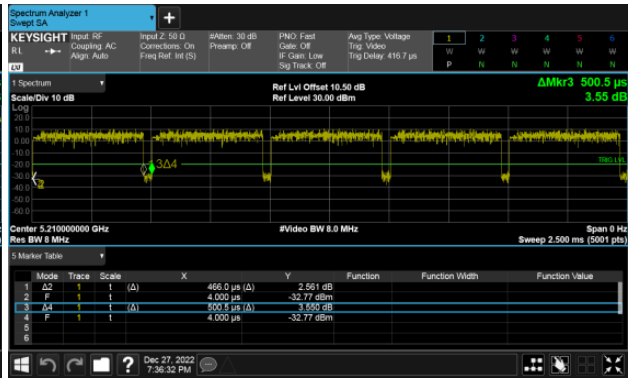

Modulation Type: 802.11ac VHT20 (6.5Mbps)

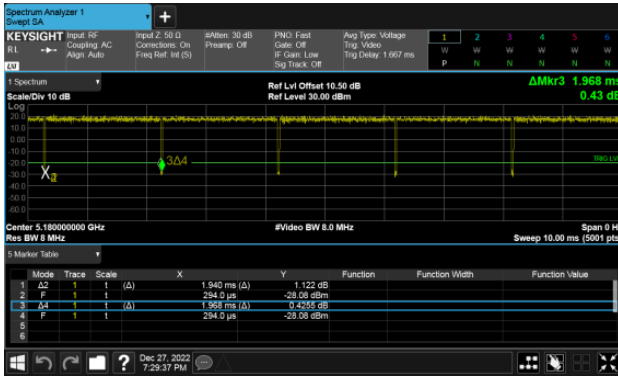

Modulation Type: 802.11ac VHT40 (13.5Mbps)

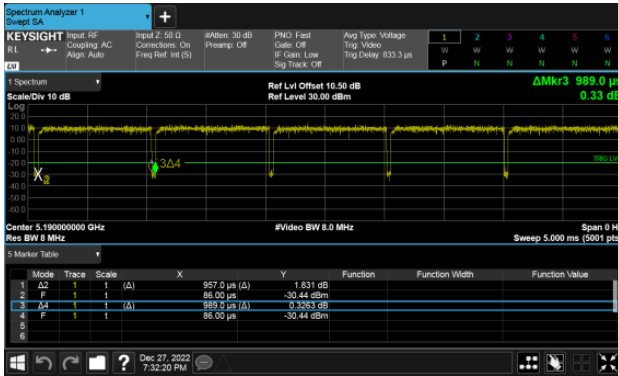



8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout

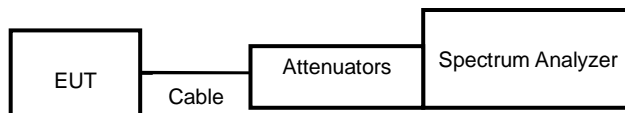



8.4. Test Result and Data

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)		Minimum Limit (MHz)
			ANT A	ANT B	
11a	149	5745	15.15	15.13	0.50
11a	157	5785	15.14	15.70	0.50
11a	165	5825	15.14	16.30	0.50
11ac VHT20	149	5745	15.15	15.94	0.50
11ac VHT20	157	5785	15.96	16.83	0.50
11ac VHT20	165	5825	15.45	17.52	0.50
11ac VHT40	151	5755	35.46	35.46	0.50
11ac VHT40	159	5795	35.47	36.05	0.50
11ac VHT80	155	5775	75.09	75.07	0.50

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11a	149	5745	17.39	19.89
11a	157	5785	17.81	20.45
11a	165	5825	18.74	22.67
11ac VHT20	149	5745	18.34	20.36
11ac VHT20	157	5785	18.53	20.99
11ac VHT20	165	5825	19.35	23.17
11ac VHT40	151	5755	36.80	37.94
11ac VHT40	159	5795	36.81	39.93
11ac VHT80	155	5775	76.04	80.24





UNII Emission Bandwidth Result (Extends across 5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth(MHz)		99% Bandwidth(MHz)	
			ANT A	ANT B	ANT A	ANT B
11a	6 Mbps	5720	3.13	3.15	9.99	12.14
11ac VHT20	NSS1-MCS0	5720	3.57	3.52	7.50	9.29
11ac VHT40	NSS1-MCS0	5710	3.19	3.20	28.29	33.60
11ac VHT80	NSS1-MCS0	5690	3.16	3.15	61.35	69.32




6dB Bandwidth ANT A
Modulation Type: 802.11a (6Mbps)
CH149


Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH149

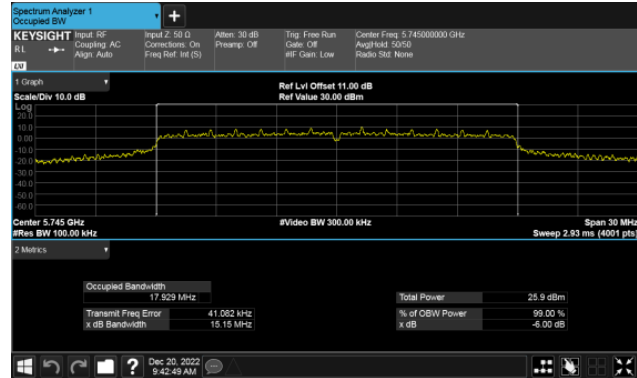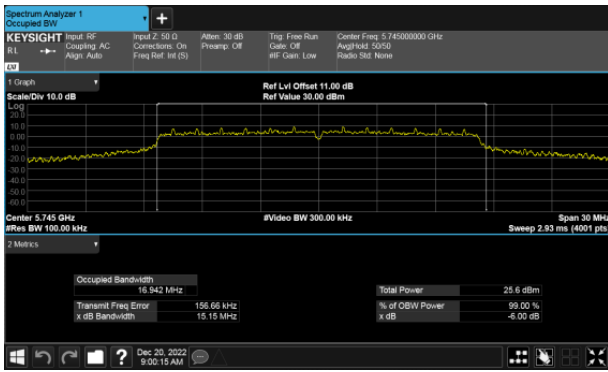


CH157

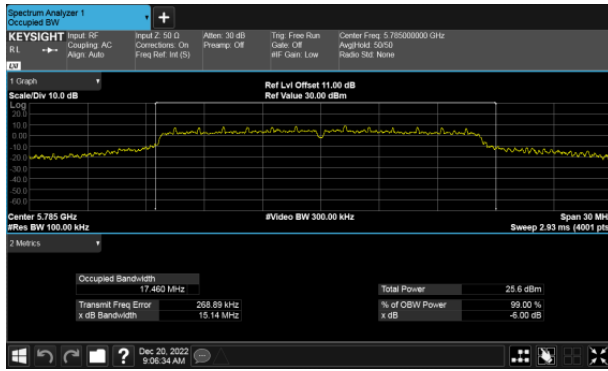


CH157

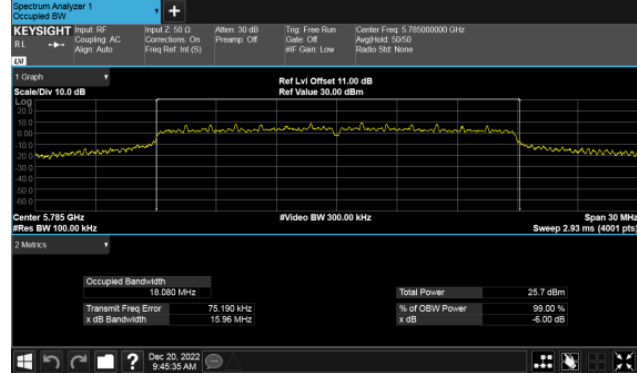

CH165

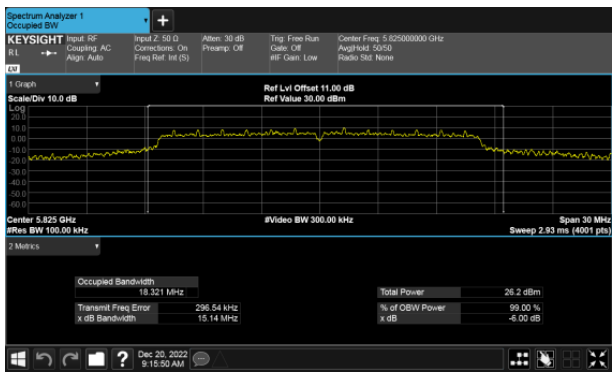



CH165

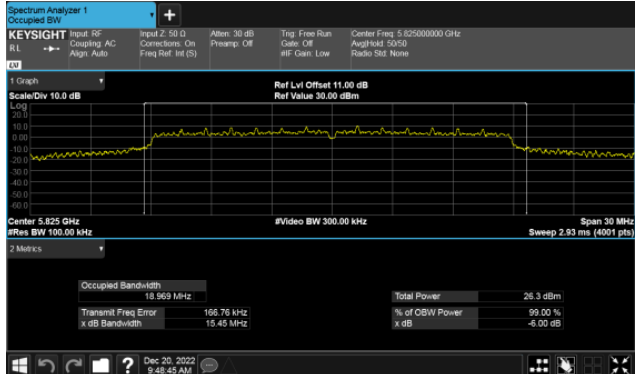




6dB Bandwidth ANT A
Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155

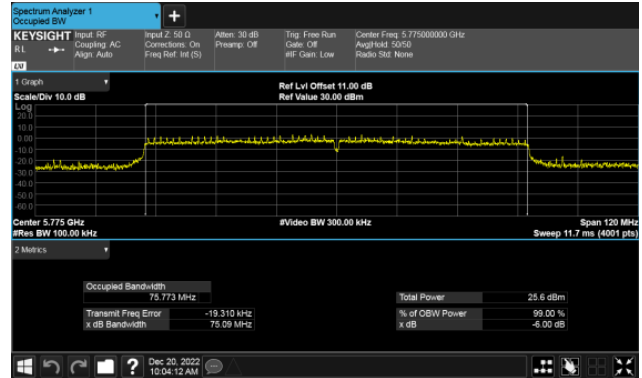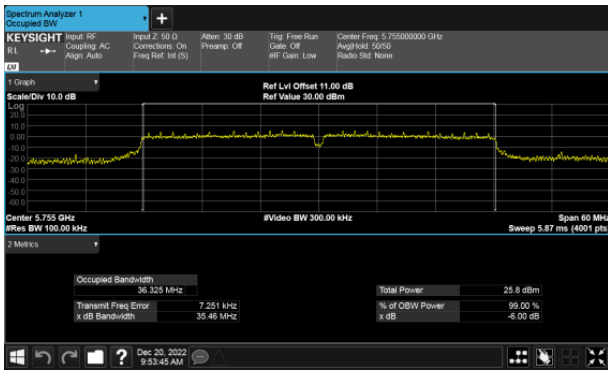



CH159

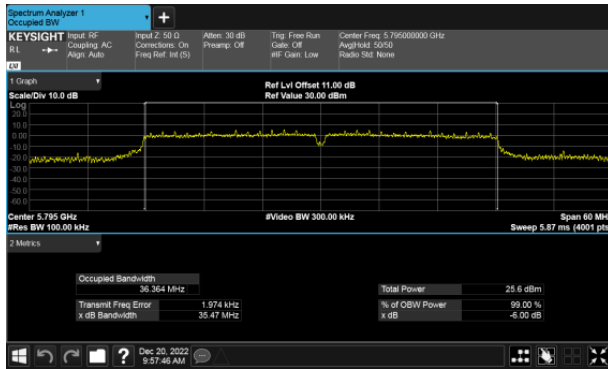





6dB Bandwidth ANT B
Modulation Type: 802.11a (6Mbps)
CH149

Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH149

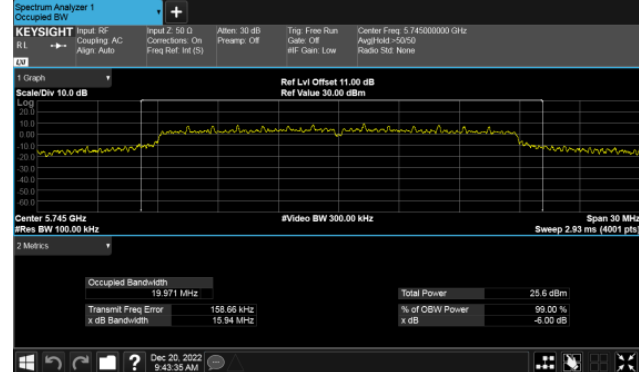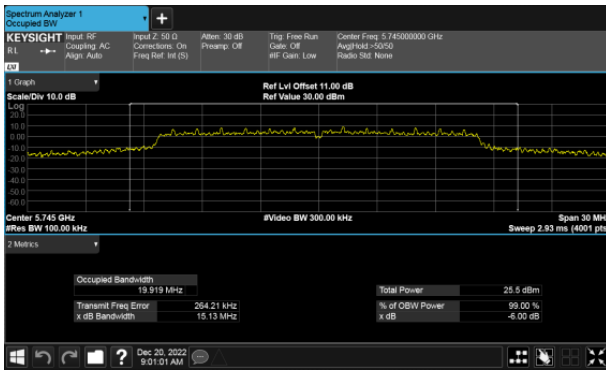



CH157

CH157

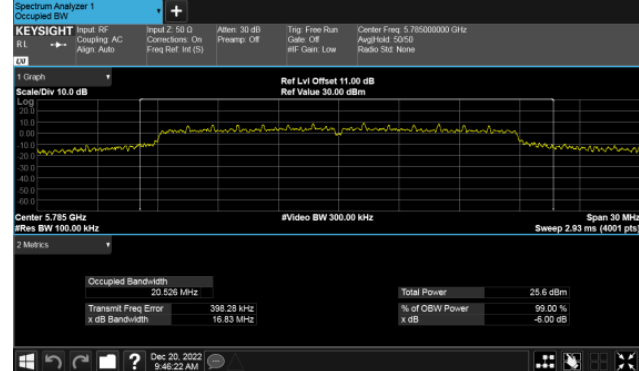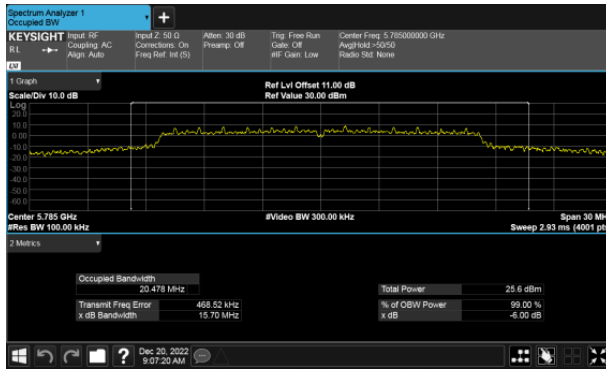

CH165



CH165

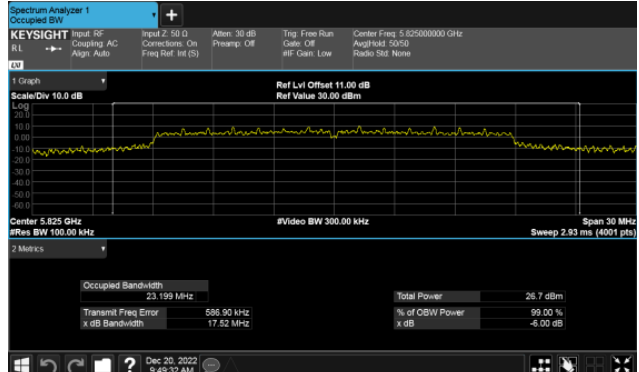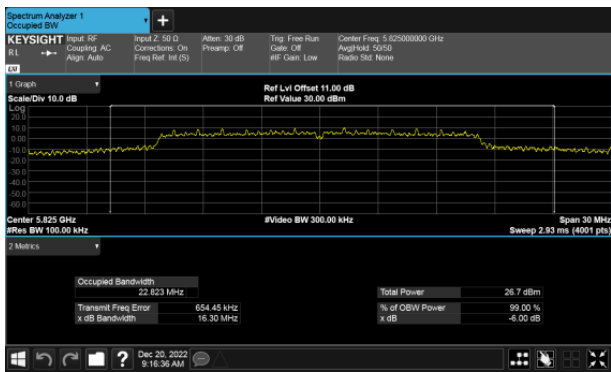




6dB Bandwidth ANT B
Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155

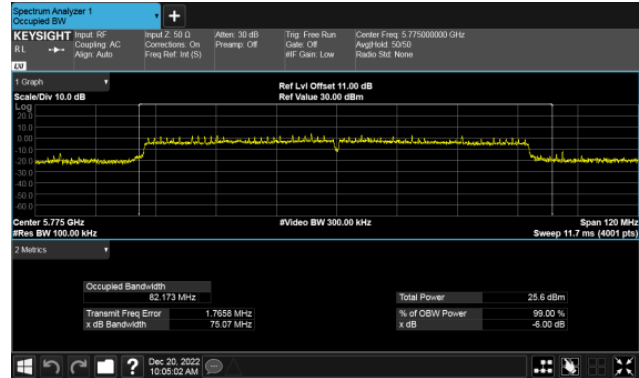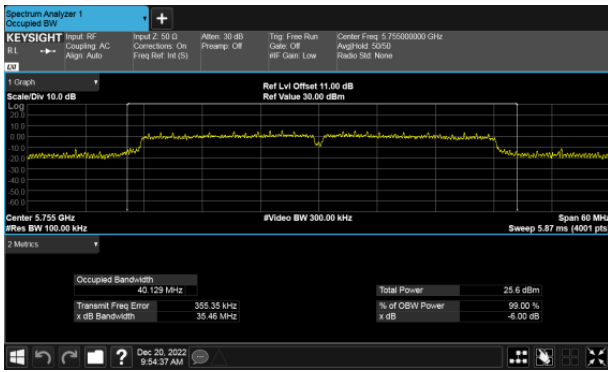


CH159

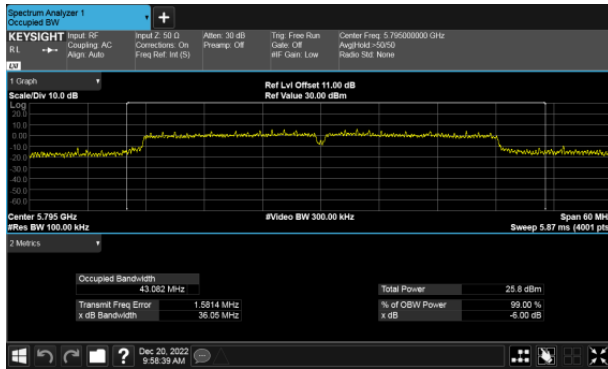





6dB Bandwidth ANT A
 Extends across 5725MHz Band, Straddle Channel
 Modulation Type: 802.11a (6Mbps)
 CH144

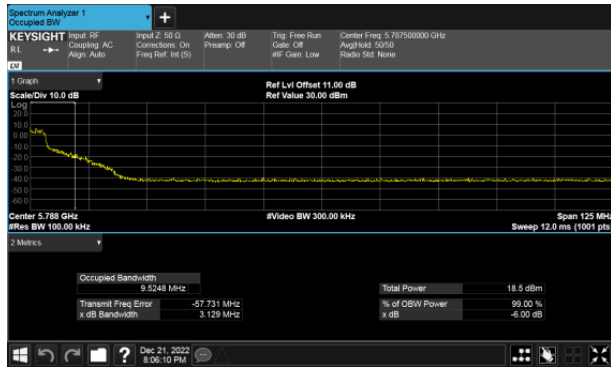


Modulation Type: 802.11ac VHT80 (29.3Mbps)
 CH138

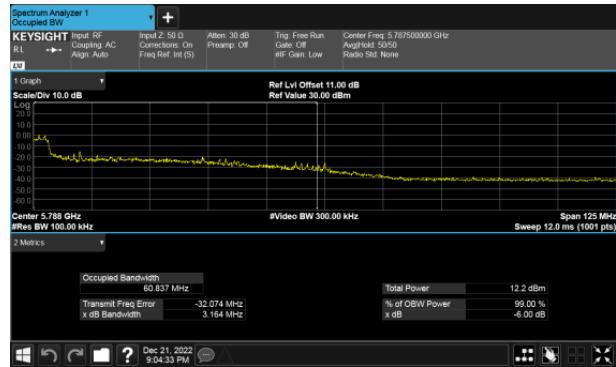

Modulation Type: 802.11ac VHT20 (6.5Mbps)
 CH144

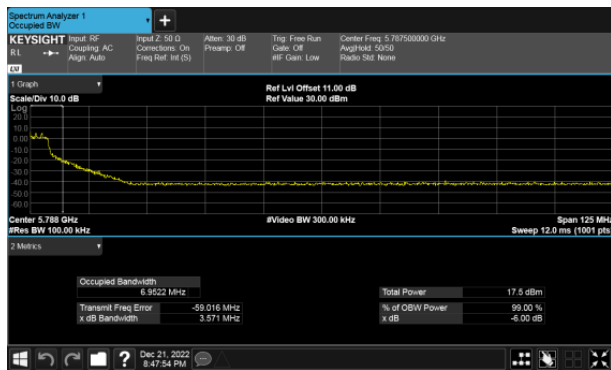



Modulation Type: 802.11ac VHT40 (29.3Mbps)
 CH142

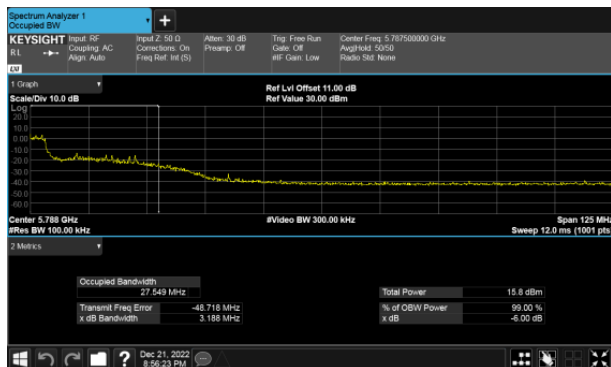




6dB Bandwidth ANT B
 Extends across 5725MHz Band, Straddle Channel
 Modulation Type: 802.11a (6Mbps)
 CH144


Modulation Type: 802.11ac VHT80 (29.3Mbps)
 CH138

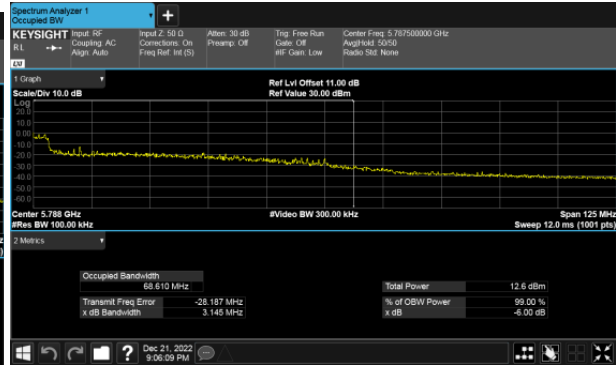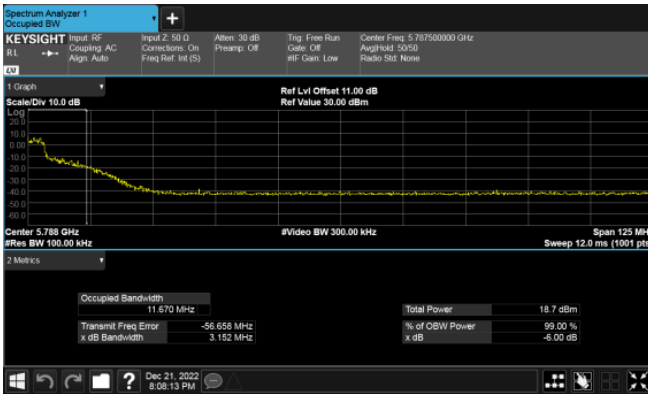

Modulation Type: 802.11ac VHT20 (6.5Mbps)
 CH144

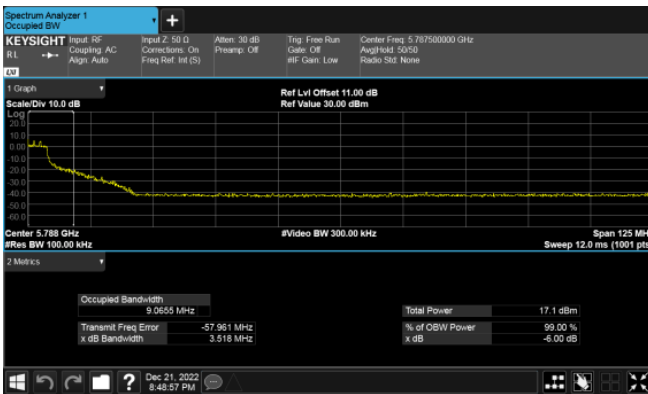



Modulation Type: 802.11ac VHT40 (29.3Mbps)
 CH142

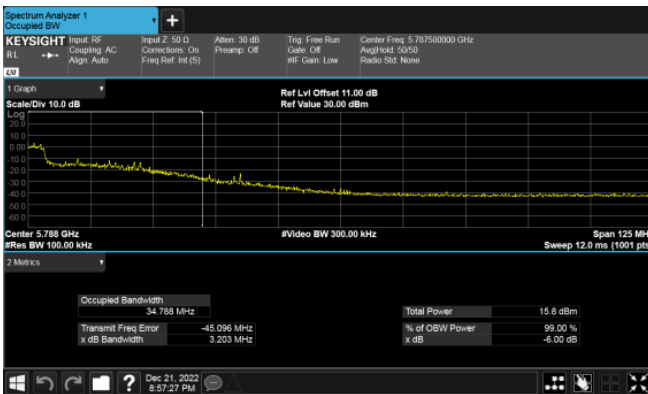




99% Occupied Bandwidth ANT A
Modulation Type: 802.11a (6Mbps)
CH149


Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH149

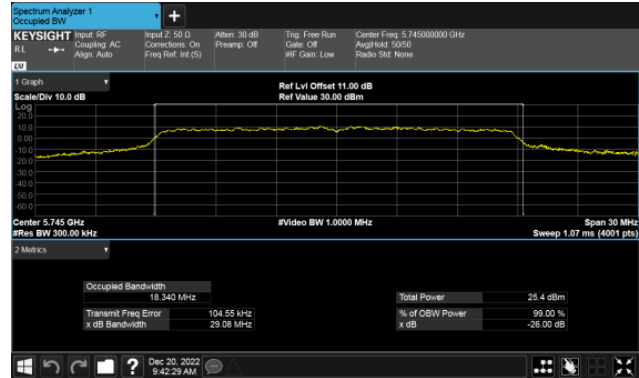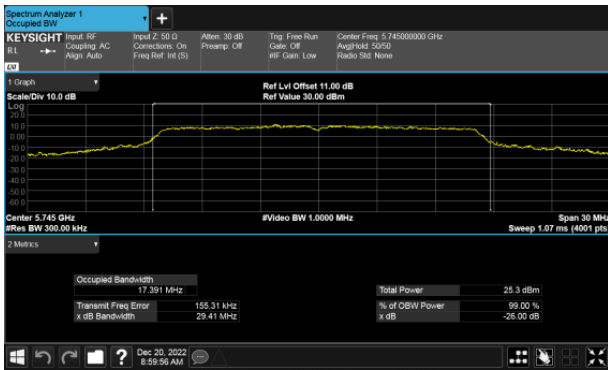

CH157

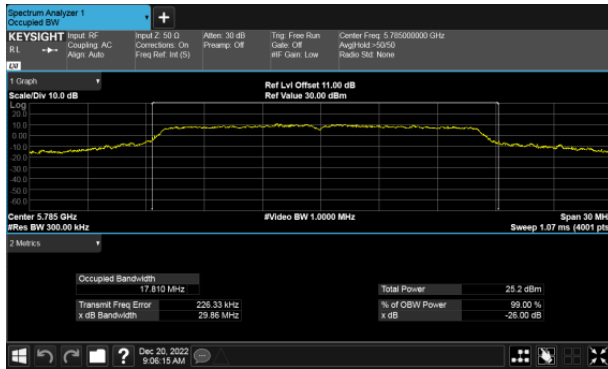


CH157

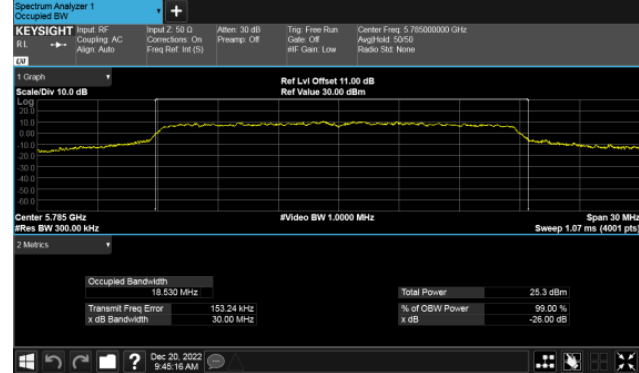

CH165





CH165

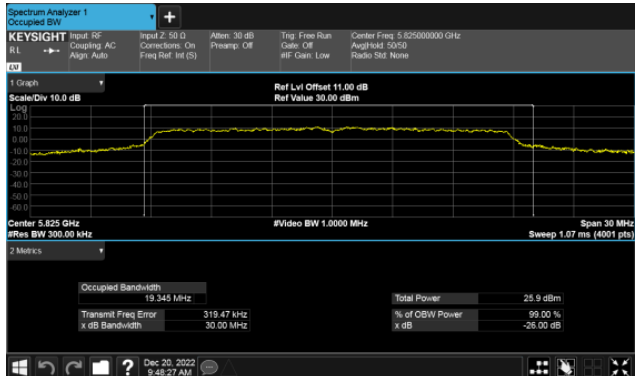



99% Occupied Bandwidth ANT A
Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151

Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155

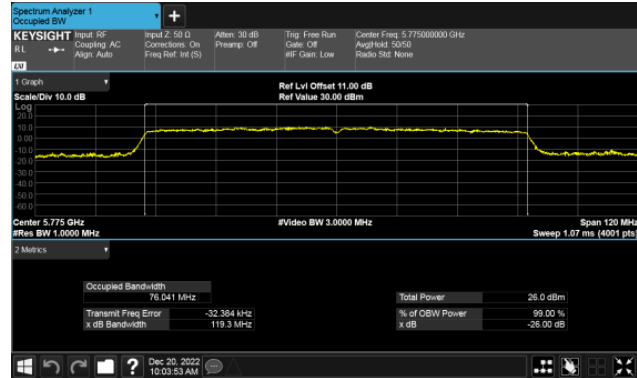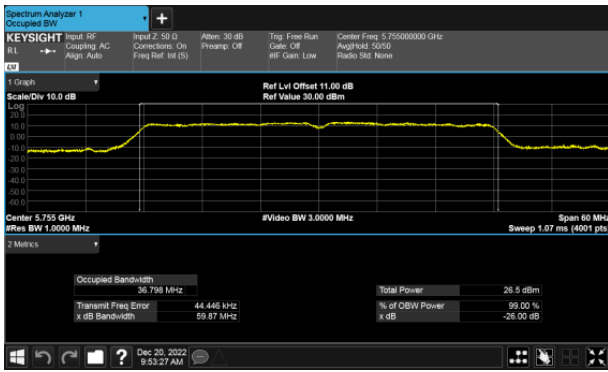

CH159

