



Appendix B Test Result and Data (30MHz ~ 1GHz)

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adatper(AC240V/60Hz)
Pol : Vertical


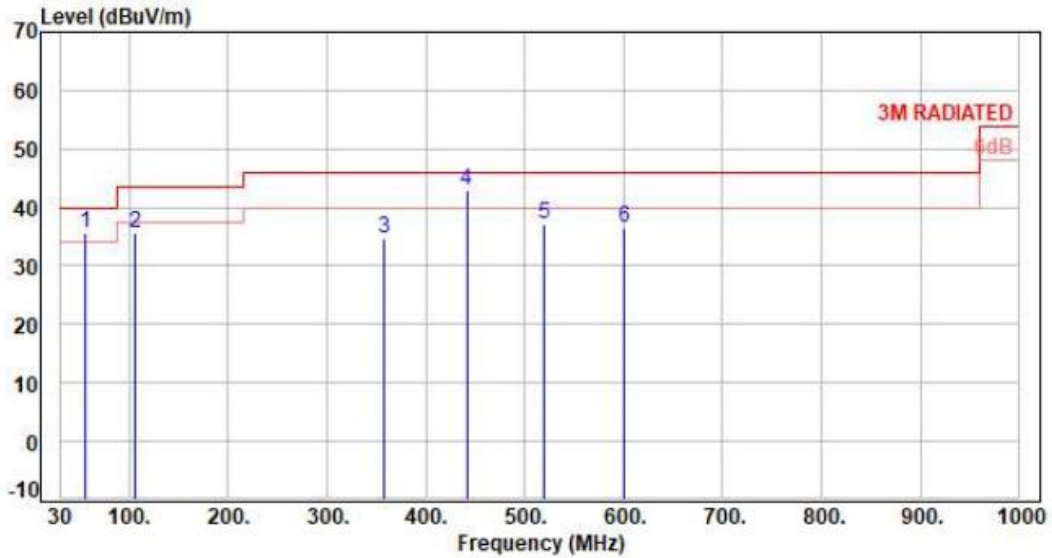


Table with 11 columns: No., Frequency (MHz), Factor (dB), Reading (dBUV), Level (dBUV/m), Limit (dBUV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It contains 6 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adatper(AC240V/60Hz)
Pol : Horizontal

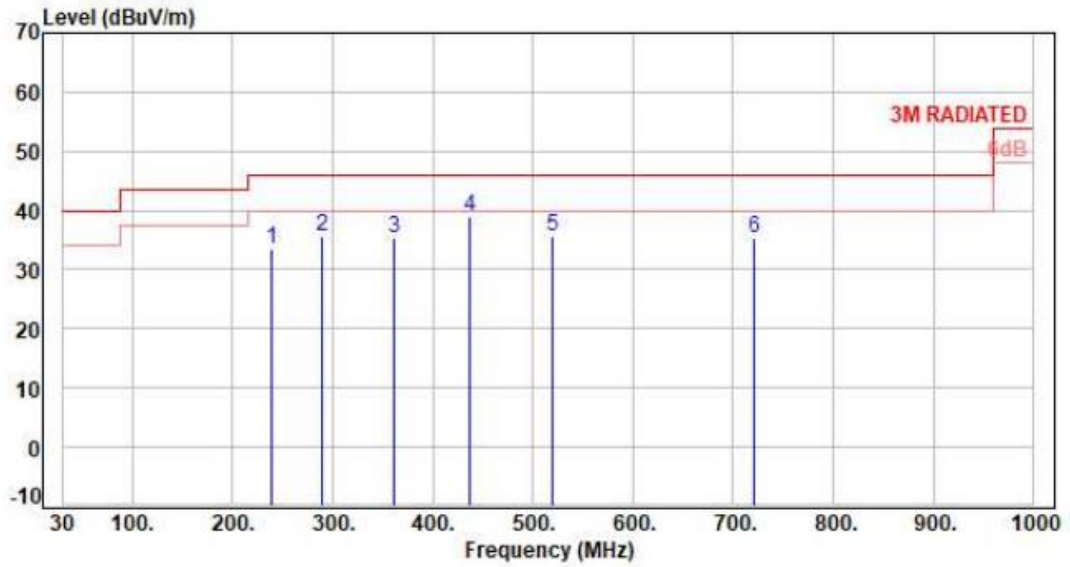

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	239.52	-10.52	44.11	33.59	46.00	-12.41	Peak	400	360	P
2	289.96	-8.72	44.35	35.63	46.00	-10.37	Peak	400	360	P
3	361.74	-6.85	42.14	35.29	46.00	-10.71	Peak	400	360	P
4	437.40	-4.72	43.57	38.85	46.00	-7.15	Peak	400	360	P
5	518.88	-2.82	38.57	35.75	46.00	-10.25	Peak	400	360	P
6	720.64	0.84	34.46	35.30	46.00	-10.70	Peak	400	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor