



Appendix C. Test Result and Data (1GHz ~ 40GHz)
SISO-ANT B

Test Mode : 1TX 11a CH01 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

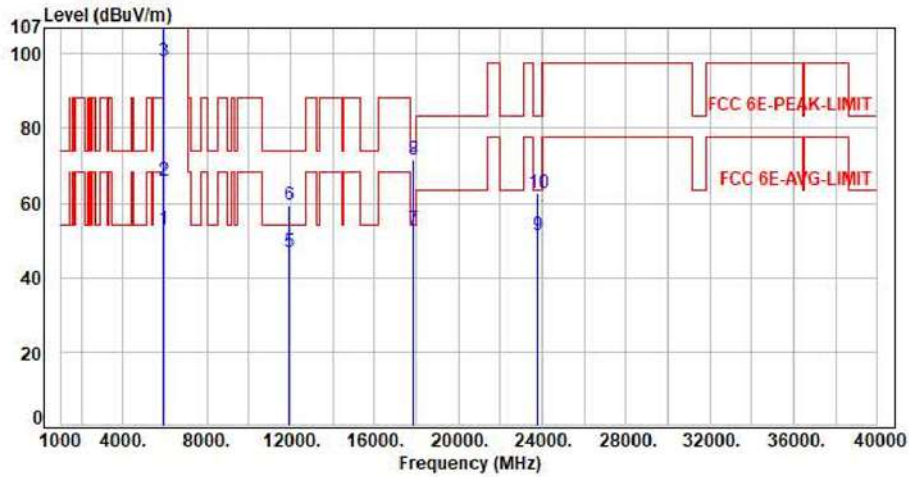



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH01 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

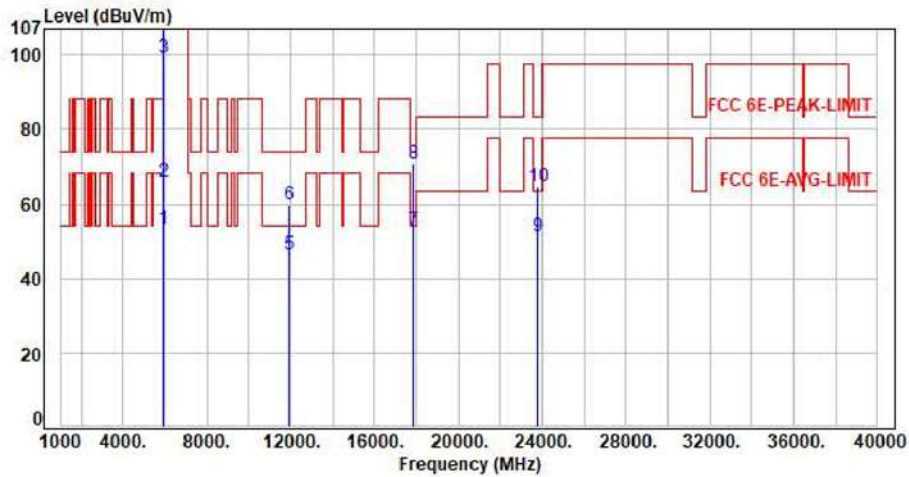

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	45.68	53.41	68.20	-14.79	Average	124	344	P
2	5925.00	7.73	58.32	66.05	88.20	-22.15	Peak	124	344	P
3	5955.00	7.79	91.41	99.20	200.00	-100.80	Average	124	344	P
4	5955.00	7.79	101.34	109.13	200.00	-90.87	Peak	124	344	P
5	11910.00	16.61	29.92	46.53	54.00	-7.47	Average	100	134	P
6	11910.00	16.61	43.24	59.85	74.00	-14.15	Peak	100	134	P
7	17865.00	26.42	26.41	52.83	54.00	-1.17	Average	100	195	P
8	17865.00	26.42	44.34	70.76	74.00	-3.24	Peak	100	195	P
9	23820.00	9.80	41.58	51.38	63.54	-12.16	Average	150	360	P
10	23820.00	9.80	54.87	64.67	83.54	-18.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

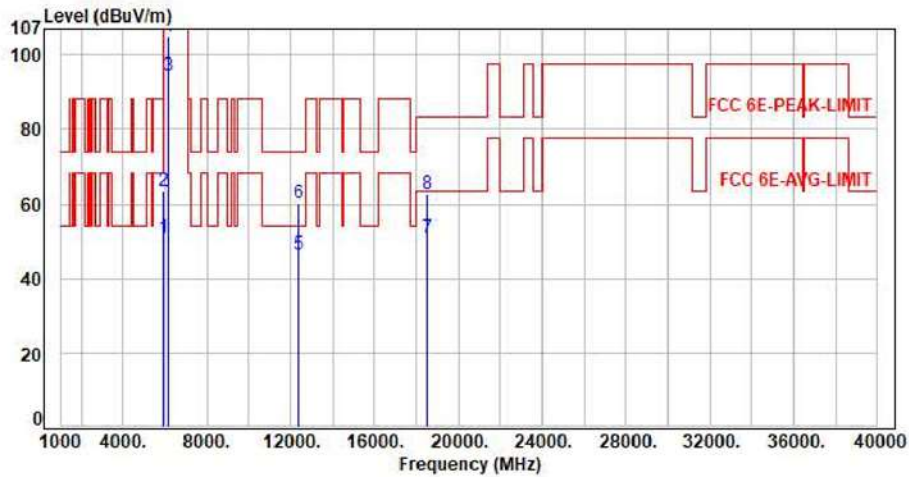


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of data points.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

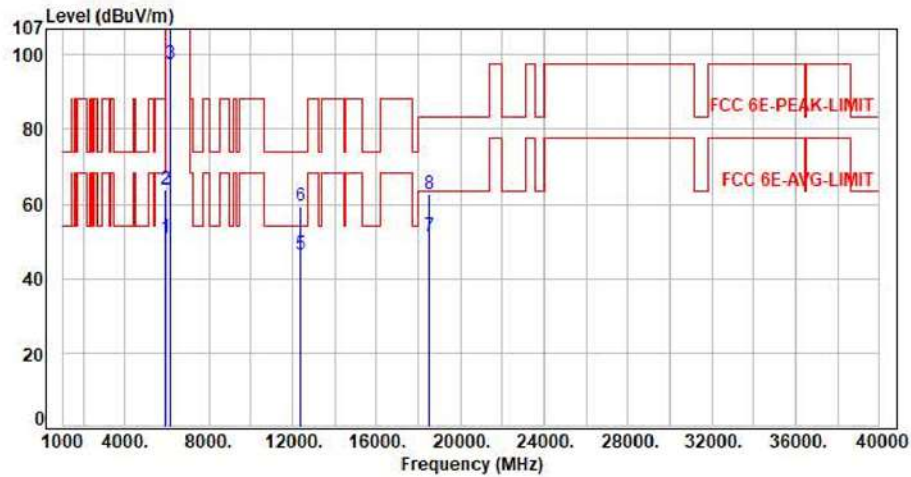


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of data points.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

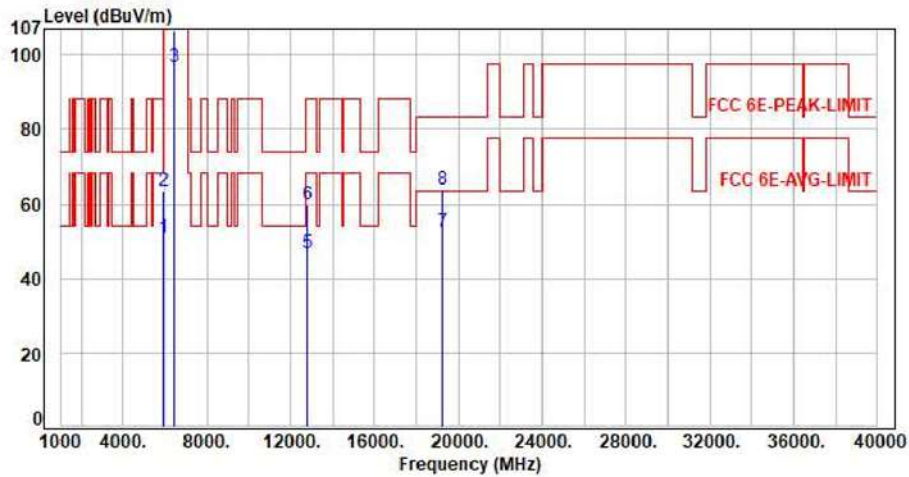


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

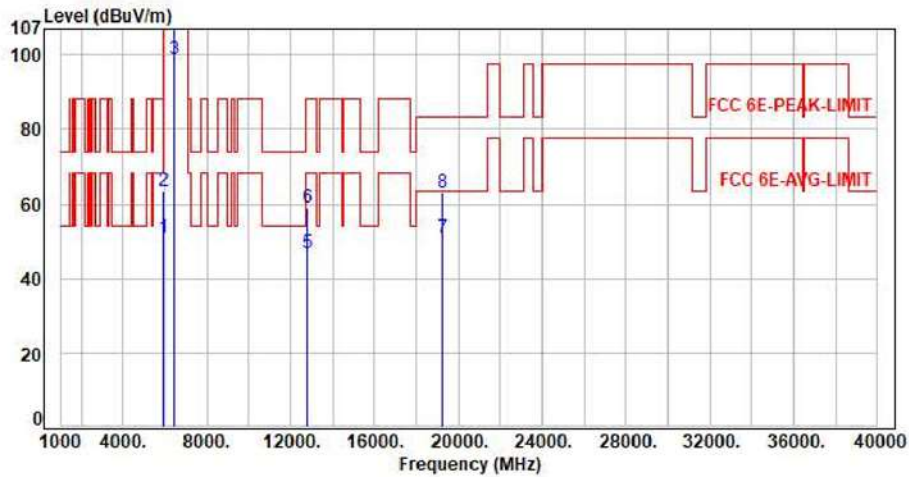


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of data points.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

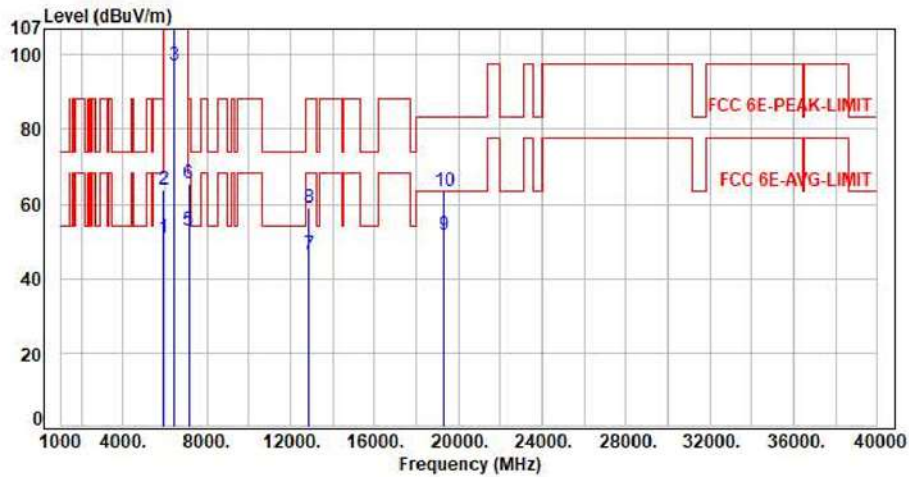


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

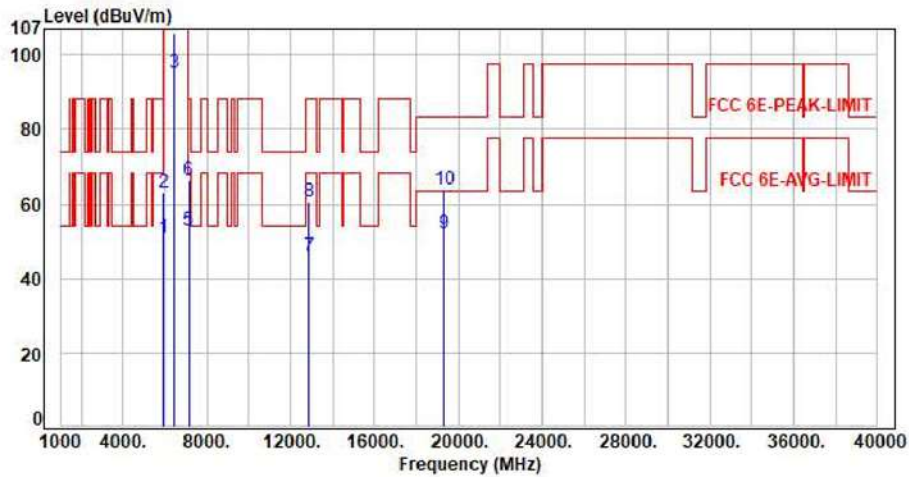


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

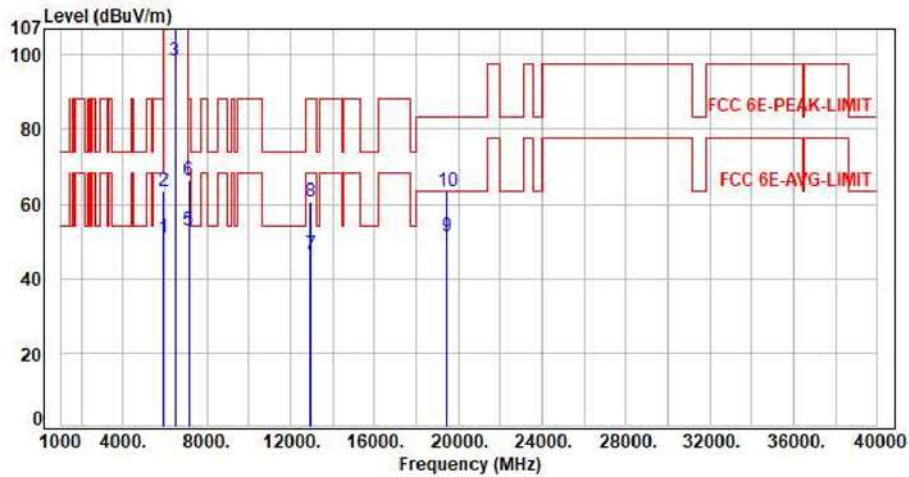


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

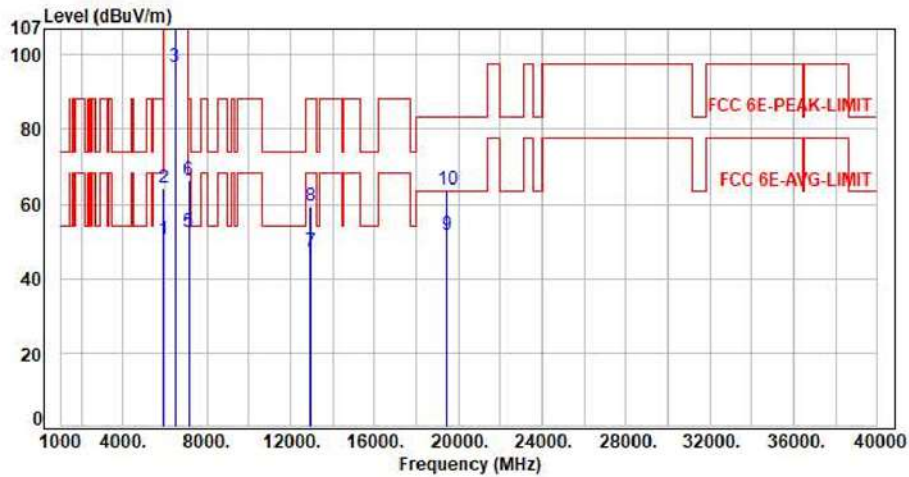


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH113 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

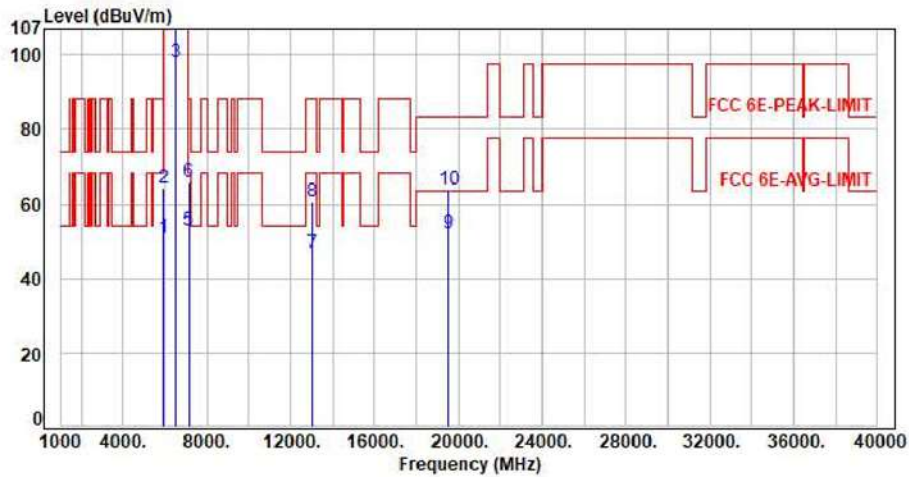


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH113 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

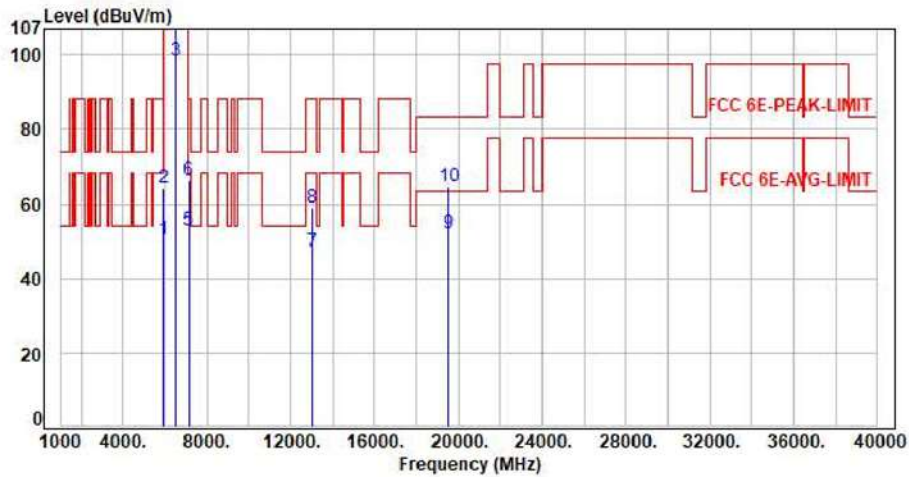


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points with their respective values and limits.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

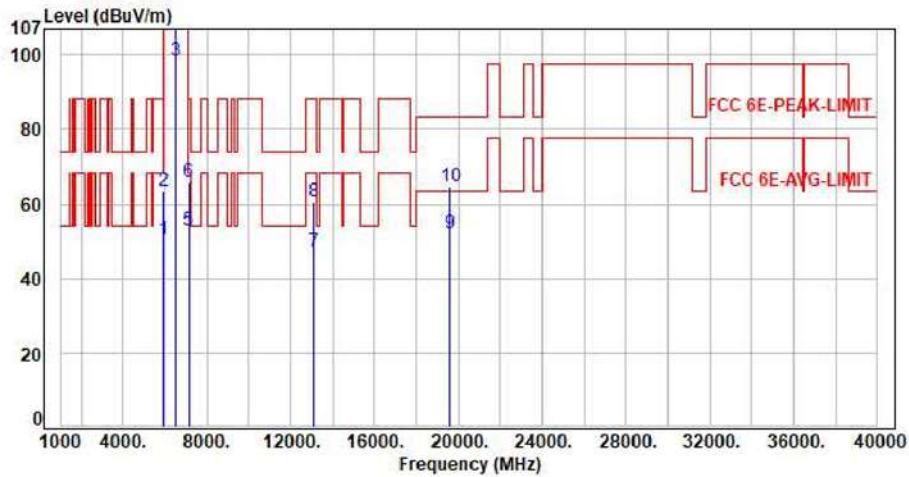


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

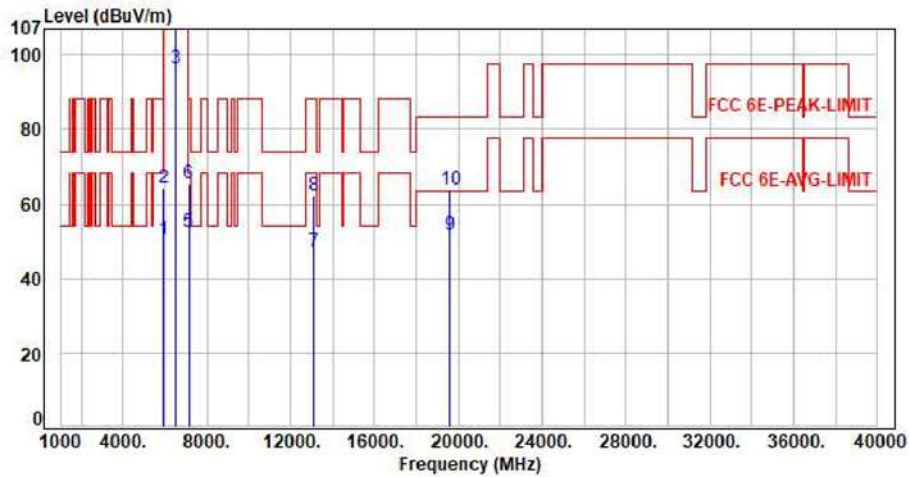


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

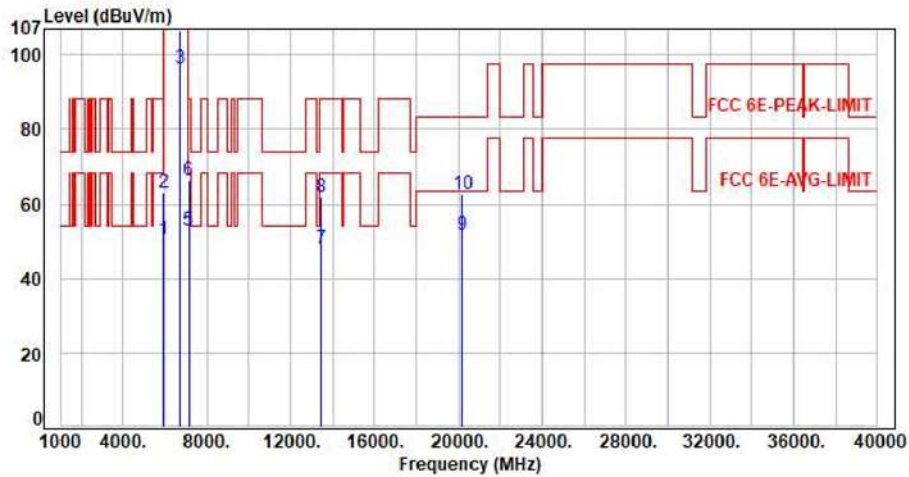


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

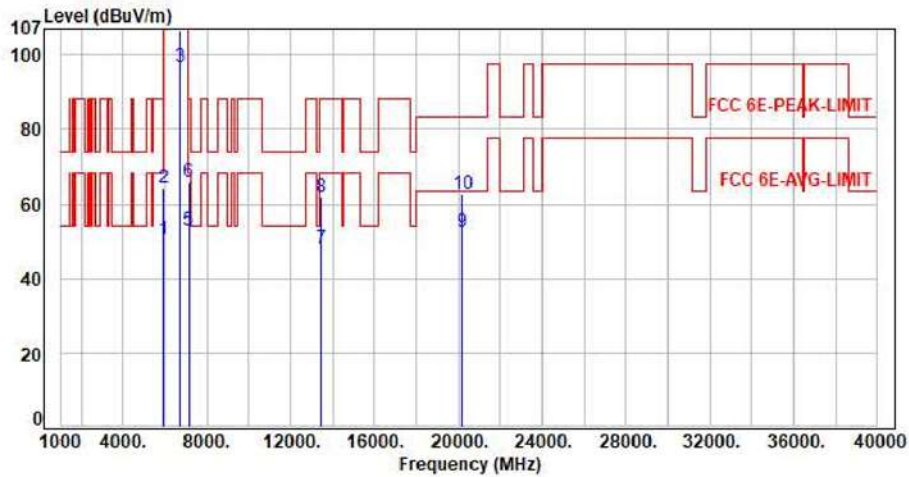



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

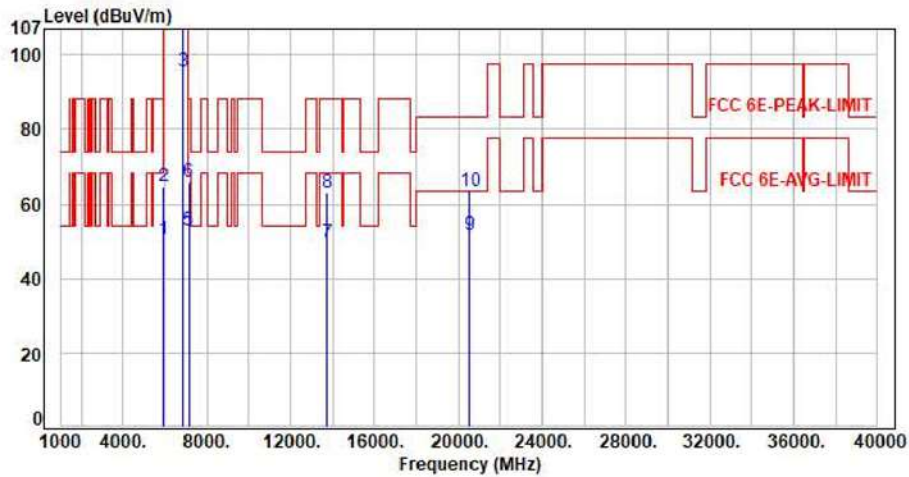

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.82	50.55	68.20	-17.65	Average	108	349	P
2	5925.00	7.73	56.91	64.64	88.20	-23.56	Peak	108	349	P
3	6855.00	9.48	86.07	95.55	200.00	-104.45	Average	108	349	P
4	6855.00	9.48	97.45	106.93	200.00	-93.07	Peak	108	349	P
5	7125.00	9.92	42.81	52.73	68.20	-15.47	Average	108	349	P
6	7125.00	9.92	55.90	65.82	88.20	-22.38	Peak	108	349	P
7	13710.00	21.36	28.34	49.70	68.20	-18.50	Average	100	225	P
8	13710.00	21.36	41.89	63.25	88.20	-24.95	Peak	100	225	P
9	20565.00	9.83	41.69	51.52	63.54	-12.02	Average	150	360	P
10	20565.00	9.83	53.64	63.47	83.54	-20.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

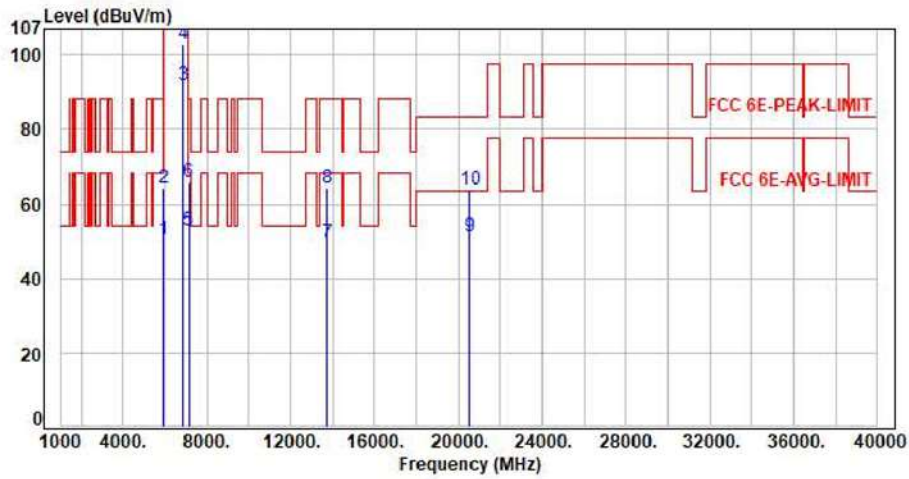


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

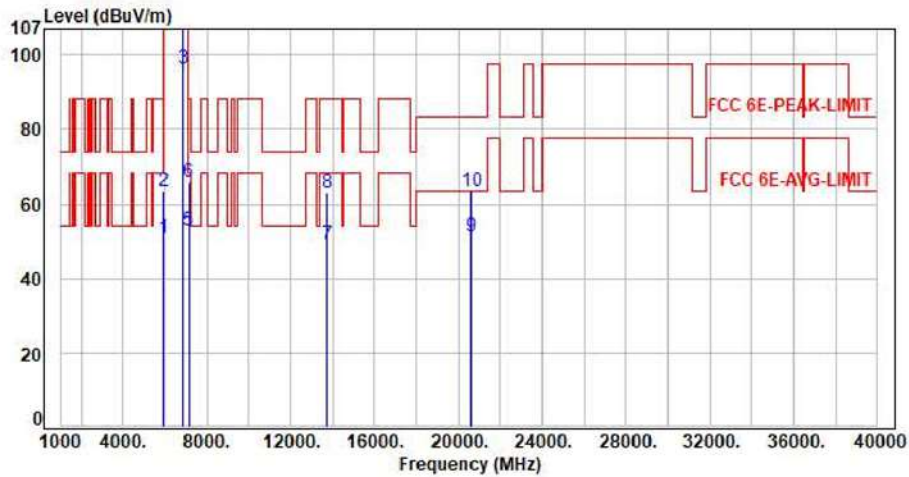


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

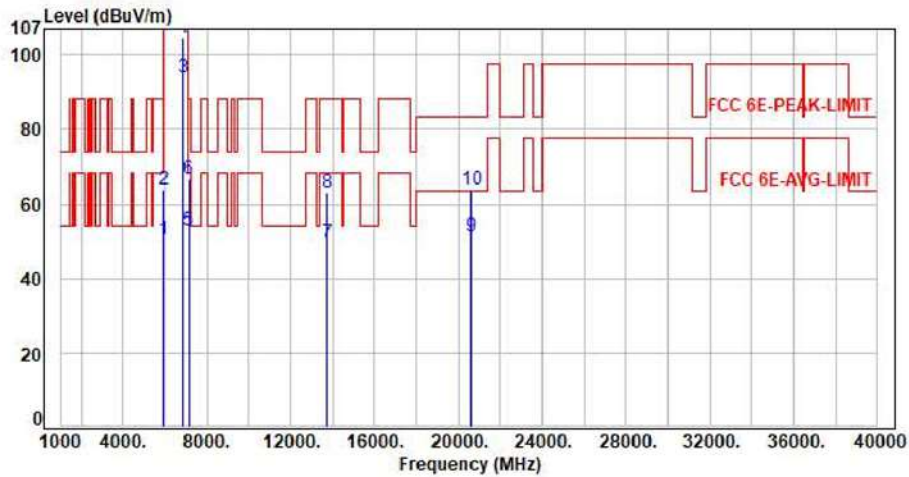


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

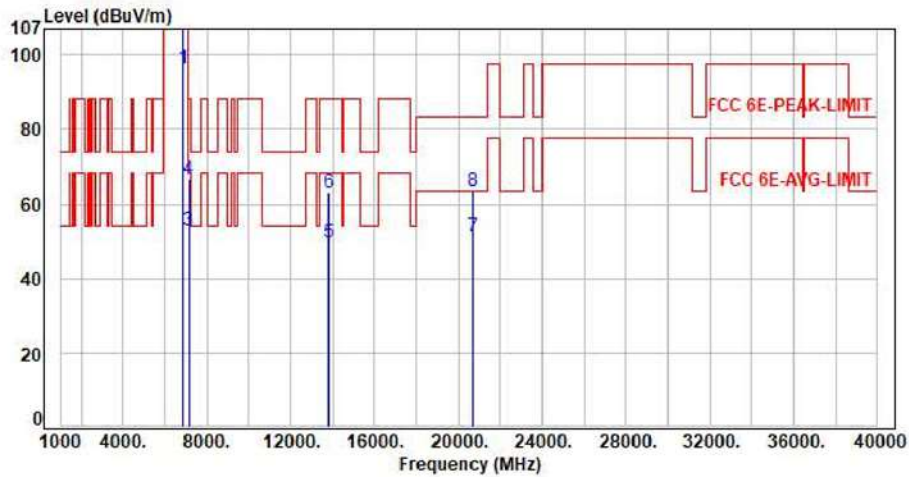


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

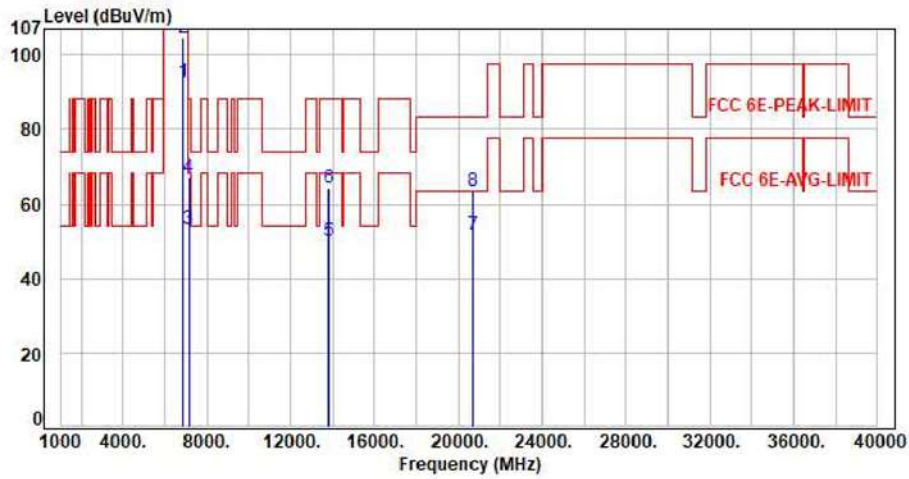


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

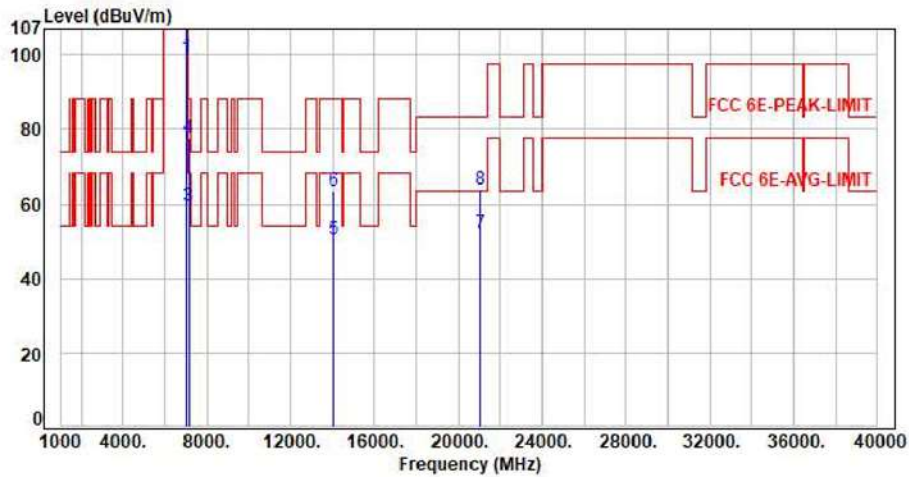


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

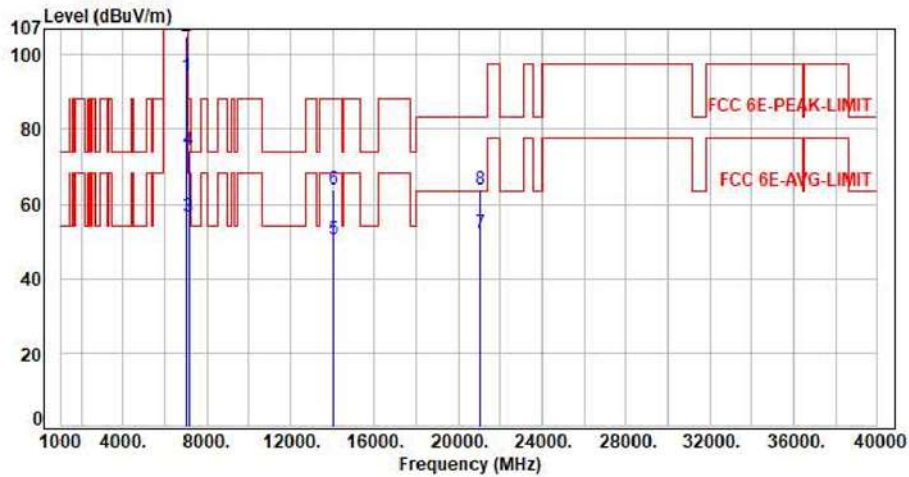


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

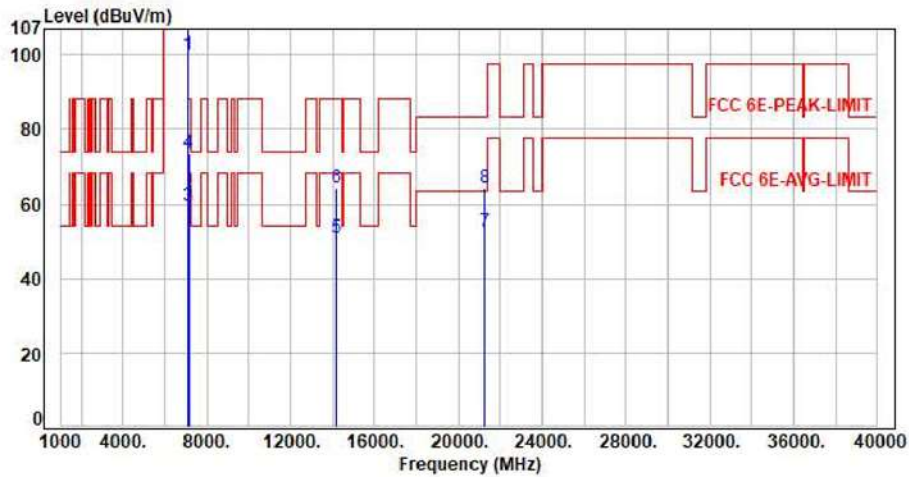



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

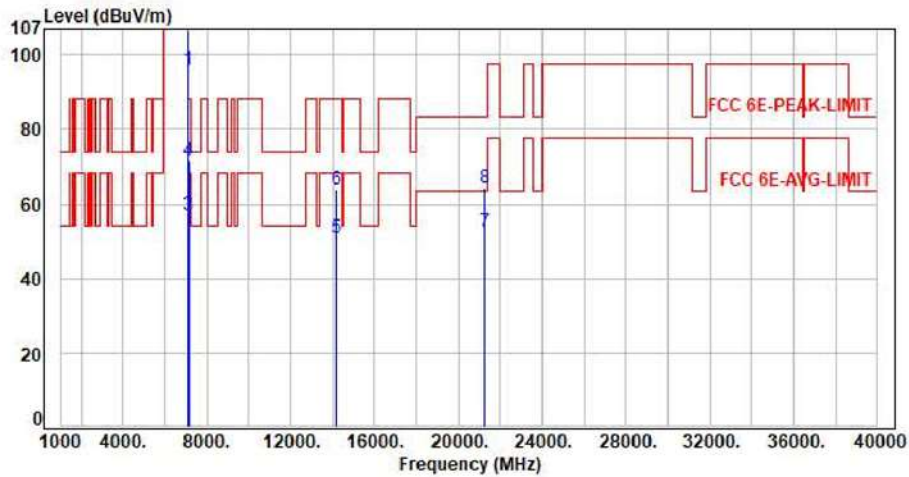

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	86.08	95.87	200.00	-104.13	Average	122	45	P
2	7095.00	9.79	96.30	106.09	200.00	-93.91	Peak	122	45	P
3	7125.00	9.92	46.88	56.80	68.20	-11.40	Average	122	45	P
4	7125.00	9.92	61.49	71.41	88.20	-16.79	Peak	122	45	P
5	14190.00	22.77	28.10	50.87	68.20	-17.33	Average	100	196	P
6	14190.00	22.77	41.20	63.97	88.20	-24.23	Peak	100	196	P
7	21285.00	10.94	41.55	52.49	63.54	-11.05	Average	150	360	P
8	21285.00	10.94	53.44	64.38	83.54	-19.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

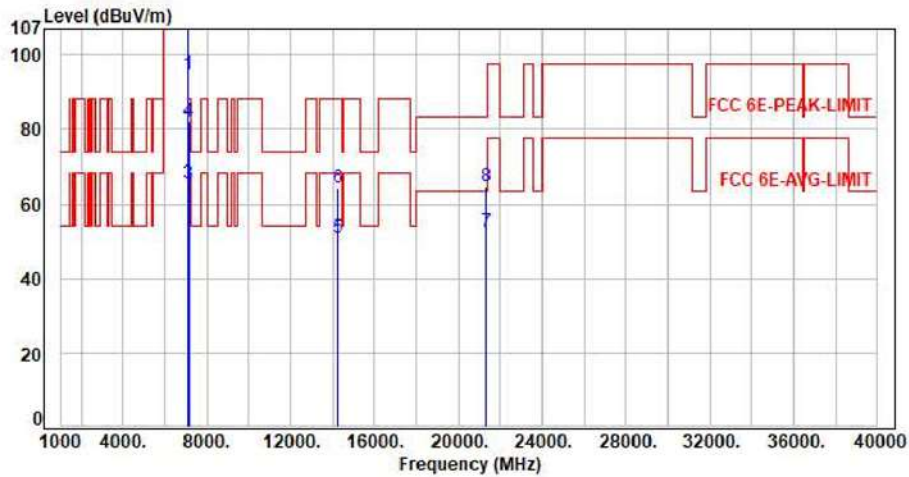


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT B

Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

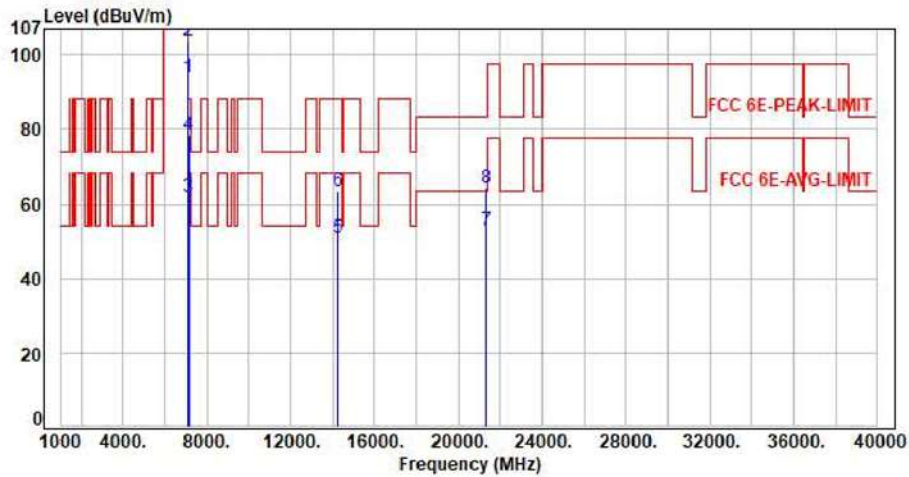


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH1 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

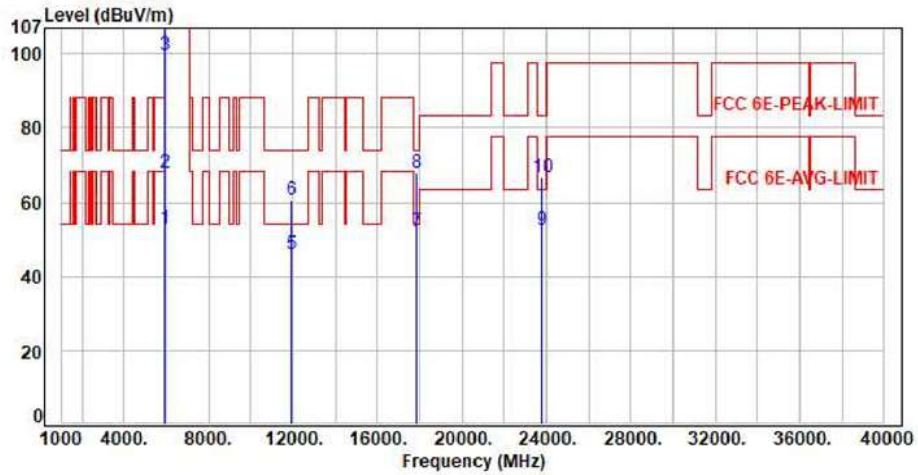


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH1 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

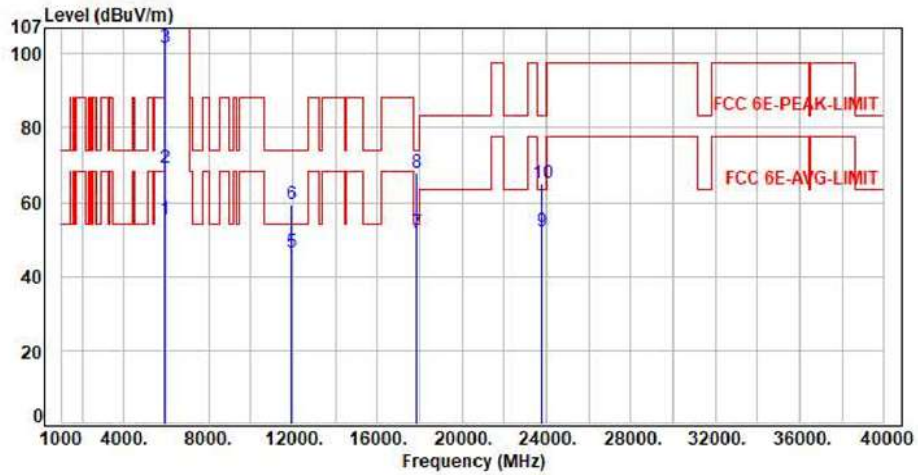



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH45 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

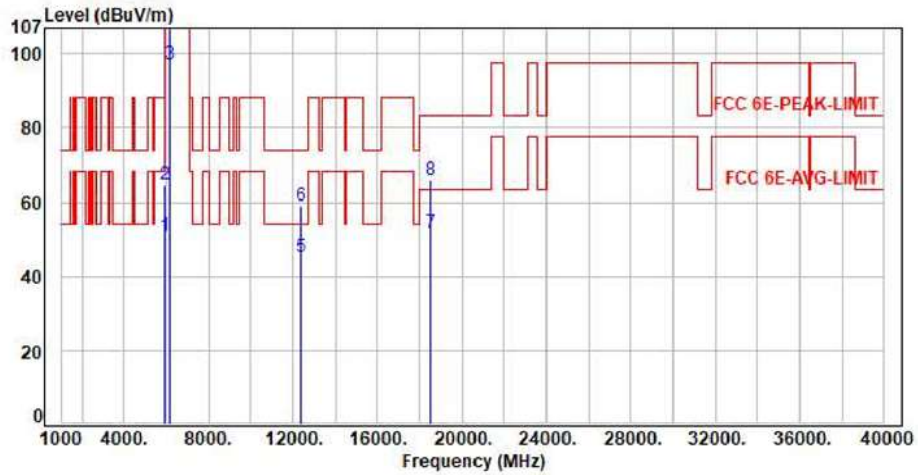


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.12	50.85	68.20	-17.35	Average	180	320	P
2	5925.00	7.73	56.88	64.61	88.20	-23.59	Peak	180	320	P
3	6175.00	8.36	88.78	97.14	200.00	-102.86	Average	180	320	P
4	6175.00	8.36	102.15	110.51	200.00	-89.49	Peak	180	320	P
5	12350.00	16.58	28.61	45.19	54.00	-8.81	Average	100	229	P
6	12350.00	16.58	42.45	59.03	74.00	-14.97	Peak	100	229	P
7	18525.00	9.06	42.63	51.69	63.54	-11.85	Average	150	360	P
8	18525.00	9.06	56.95	66.01	83.54	-17.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

MIMO



Test Mode : 2TX 11x20 CH45 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

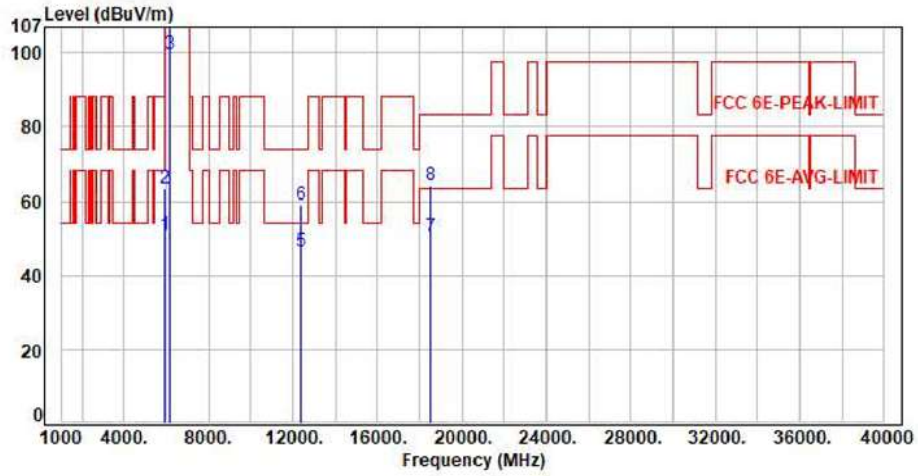


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.96	50.69	68.20	-17.51	Average	120	330	P
2	5925.00	7.73	55.62	63.35	88.20	-24.85	Peak	120	330	P
3	6175.00	8.36	91.45	99.81	200.00	-100.19	Average	120	330	P
4	6175.00	8.36	103.77	112.13	200.00	-87.87	Peak	120	330	P
5	12350.00	16.58	29.65	46.23	54.00	-7.77	Average	100	152	P
6	12350.00	16.58	42.31	58.89	74.00	-15.11	Peak	100	152	P
7	18525.00	9.06	41.47	50.53	63.54	-13.01	Average	150	360	P
8	18525.00	9.06	55.24	64.30	83.54	-19.24	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH93 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

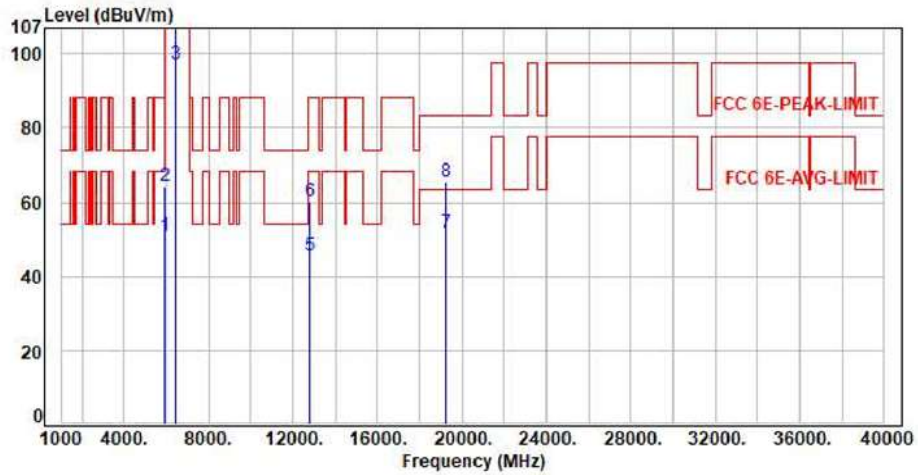

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.03	50.76	68.20	-17.44	Average	154	46	P
2	5925.00	7.73	56.48	64.21	88.20	-23.99	Peak	154	46	P
3	6415.00	8.42	88.67	97.09	200.00	-102.91	Average	154	46	P
4	6415.00	8.42	101.87	110.29	200.00	-89.71	Peak	154	46	P
5	12830.00	17.78	27.63	45.41	68.20	-22.79	Average	100	55	P
6	12830.00	17.78	42.55	60.33	88.20	-27.87	Peak	100	55	P
7	19245.00	9.42	42.13	51.55	63.54	-11.99	Average	150	360	P
8	19245.00	9.42	56.11	65.53	83.54	-18.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH93 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

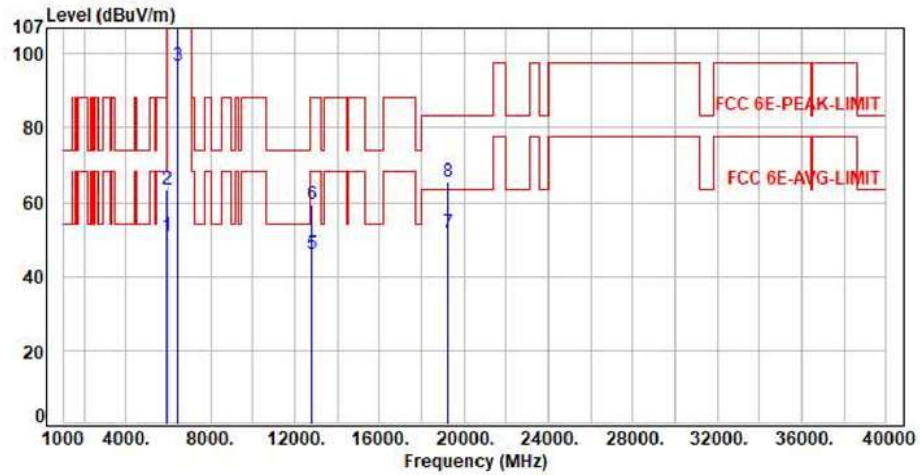



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH3 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

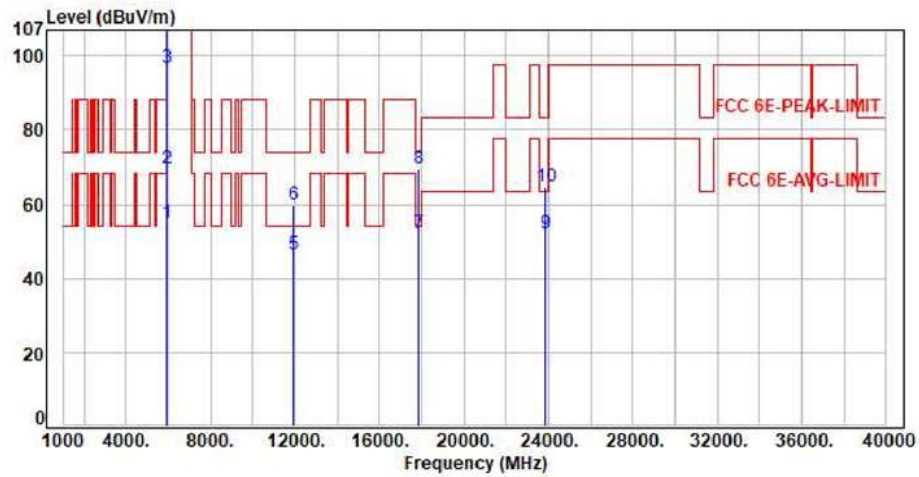


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	47.23	54.96	68.20	-13.24	Average	177	336	P
2	5925.00	7.73	61.78	69.51	88.20	-18.69	Peak	177	336	P
3	5965.00	7.79	88.93	96.72	200.00	-103.28	Average	177	336	P
4	5965.00	7.79	101.44	109.23	200.00	-90.77	Peak	177	336	P
5	11930.00	16.61	29.71	46.32	54.00	-7.68	Average	100	299	P
6	11930.00	16.61	43.03	59.64	74.00	-14.36	Peak	100	299	P
7	17895.00	26.47	25.45	51.92	54.00	-2.08	Average	177	336	P
8	17895.00	26.47	43.26	69.73	74.00	-4.27	Peak	177	336	P
9	23860.00	9.86	42.15	52.01	63.54	-11.53	Average	150	360	P
10	23860.00	9.86	54.96	64.82	83.54	-18.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH3 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

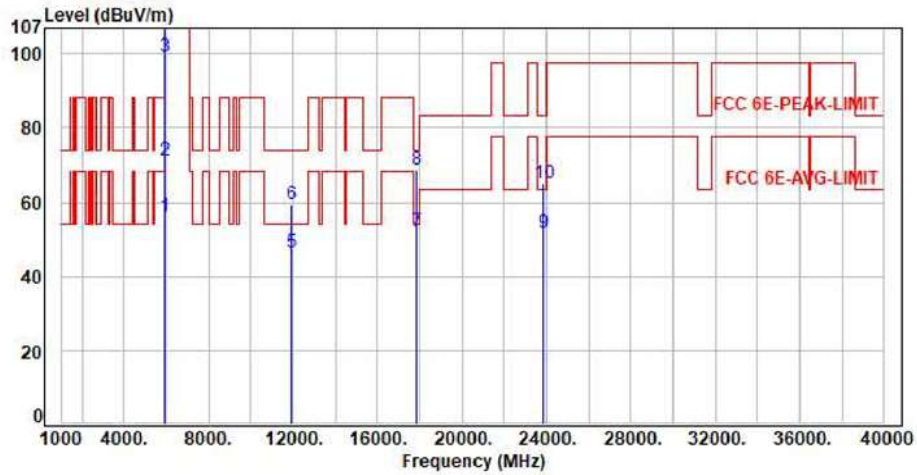


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	48.34	56.07	68.20	-12.13	Average	150	3	P
2	5925.00	7.73	63.35	71.08	88.20	-17.12	Peak	150	3	P
3	5965.00	7.79	91.41	99.20	200.00	-100.80	Average	150	3	P
4	5965.00	7.79	103.87	111.66	200.00	-88.34	Peak	150	3	P
5	11930.00	16.61	29.92	46.53	54.00	-7.47	Average	100	163	P
6	11930.00	16.61	42.77	59.38	74.00	-14.62	Peak	100	163	P
7	17895.00	26.47	25.63	52.10	54.00	-1.90	Average	150	3	P
8	17895.00	26.47	42.37	68.84	74.00	-5.16	Peak	150	3	P
9	23860.00	9.86	41.88	51.74	63.54	-11.80	Average	150	360	P
10	23860.00	9.86	55.41	65.27	83.54	-18.27	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH43 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

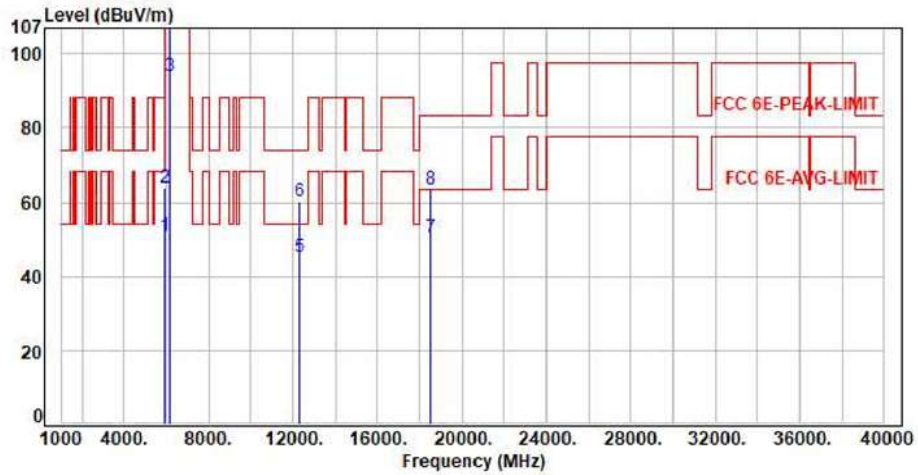

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.12	50.85	68.20	-17.35	Average	180	320	P
2	5925.00	7.73	56.03	63.76	88.20	-24.44	Peak	180	320	P
3	6165.00	8.36	85.67	94.03	200.00	-105.97	Average	180	320	P
4	6165.00	8.36	98.93	107.29	200.00	-92.71	Peak	180	320	P
5	12330.00	16.54	28.81	45.35	54.00	-8.65	Average	100	219	P
6	12330.00	16.54	43.58	60.12	74.00	-13.88	Peak	100	219	P
7	18495.00	8.94	41.38	50.32	63.54	-13.22	Average	150	360	P
8	18495.00	8.94	54.33	63.27	83.54	-20.27	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH43 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

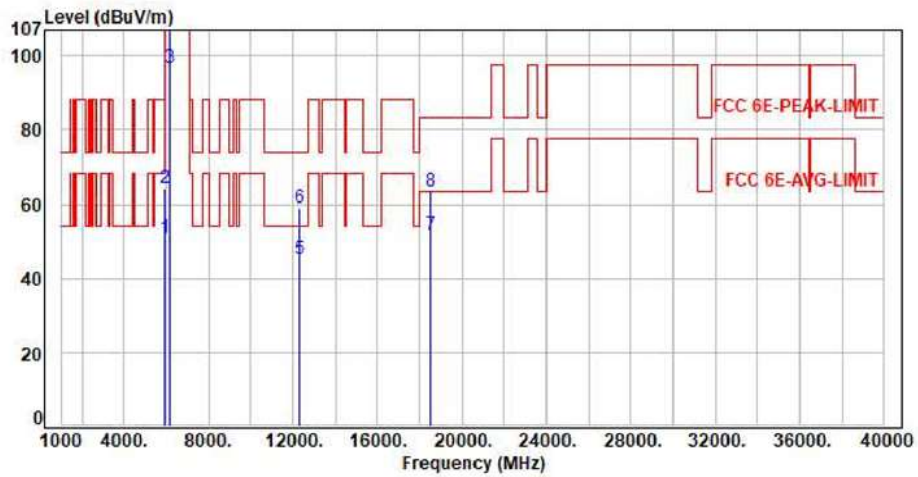


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH91 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

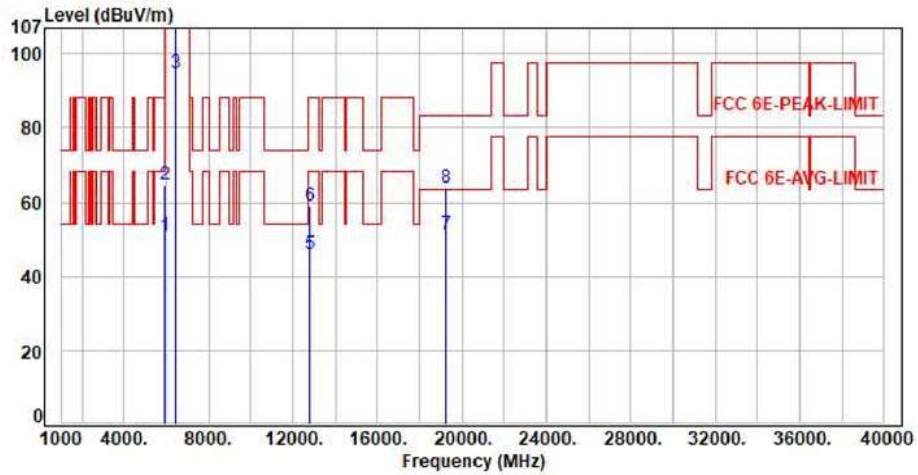



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH91 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

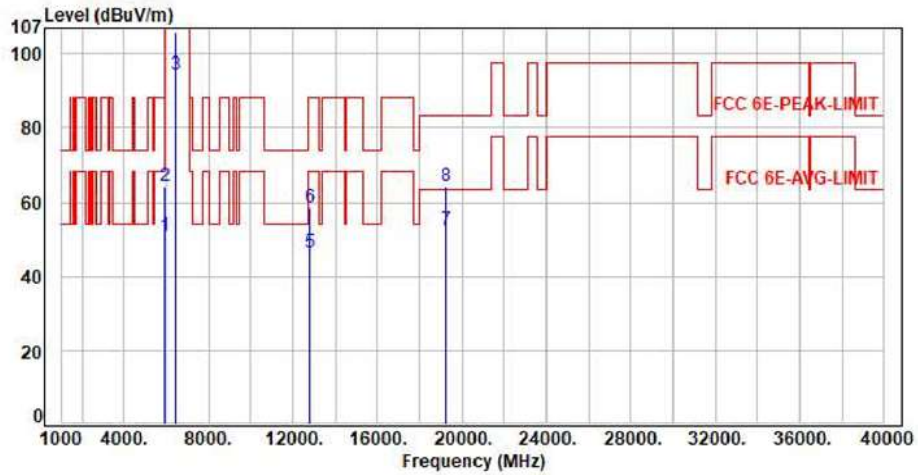

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.99	50.72	68.20	-17.48	Average	100	321	P
2	5925.00	7.73	56.39	64.12	88.20	-24.08	Peak	100	321	P
3	6405.00	8.45	86.09	94.54	200.00	-105.46	Average	100	321	P
4	6405.00	8.45	97.50	105.95	200.00	-94.05	Peak	100	321	P
5	12810.00	17.66	28.67	46.33	68.20	-21.87	Average	100	217	P
6	12810.00	17.66	40.98	58.64	88.20	-29.56	Peak	100	217	P
7	19215.00	9.53	42.85	52.38	63.54	-11.16	Average	150	360	P
8	19215.00	9.53	54.72	64.25	83.54	-19.29	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH7 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

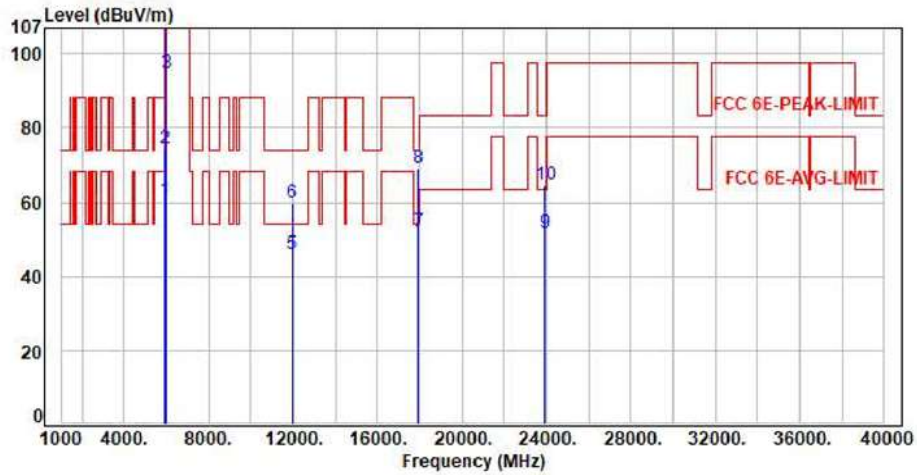


Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH7 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

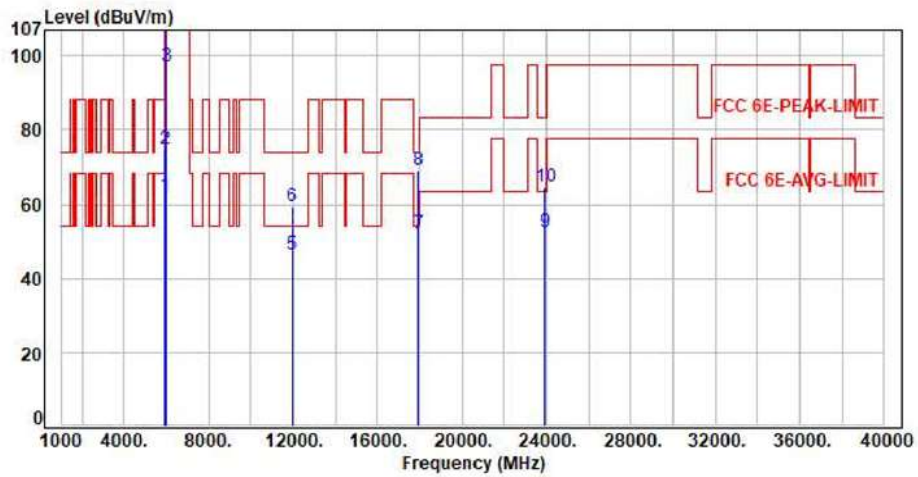



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH39 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

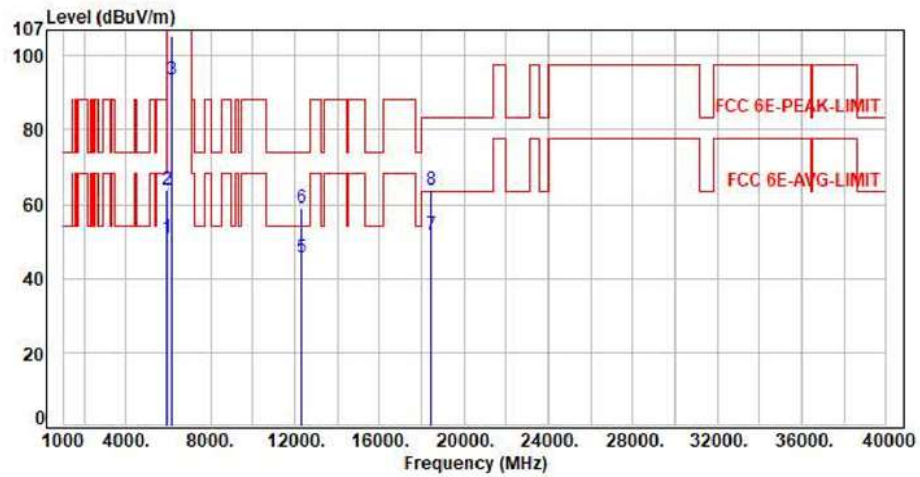


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.95	50.68	68.20	-17.52	Average	180	38	P
2	5925.00	7.73	55.99	63.72	88.20	-24.48	Peak	180	38	P
3	6145.00	8.33	85.41	93.74	200.00	-106.26	Average	180	38	P
4	6145.00	8.33	96.88	105.21	200.00	-94.79	Peak	180	38	P
5	12290.00	16.49	28.93	45.42	54.00	-8.58	Average	100	167	P
6	12290.00	16.49	42.31	58.80	74.00	-15.20	Peak	100	167	P
7	18435.00	8.88	42.84	51.72	63.54	-11.82	Average	150	360	P
8	18435.00	8.88	54.81	63.69	83.54	-19.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH39 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

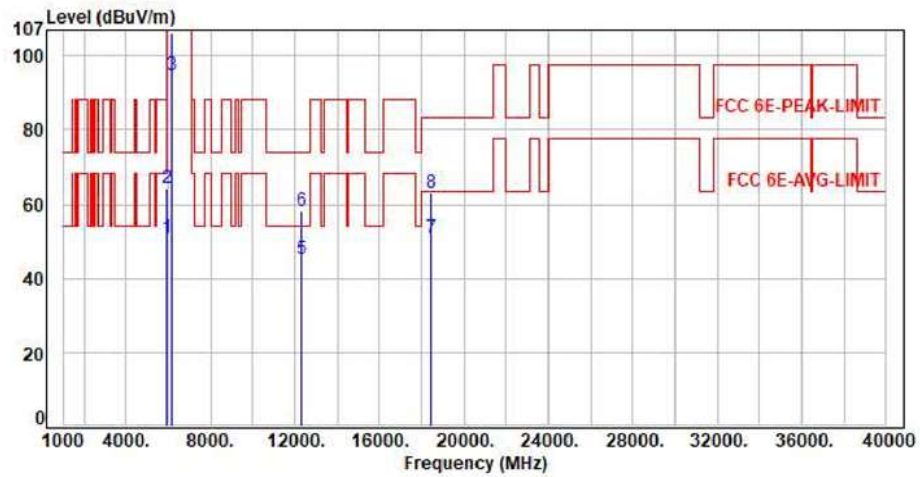


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.01	50.74	68.20	-17.46	Average	140	331	P
2	5925.00	7.73	56.75	64.48	88.20	-23.72	Peak	140	331	P
3	6145.00	8.33	86.55	94.88	200.00	-105.12	Average	140	331	P
4	6145.00	8.33	97.95	106.28	200.00	-93.72	Peak	140	331	P
5	12290.00	16.49	28.66	45.15	54.00	-8.85	Average	100	77	P
6	12290.00	16.49	41.88	58.37	74.00	-15.63	Peak	100	77	P
7	18435.00	8.88	42.17	51.05	63.54	-12.49	Average	150	360	P
8	18435.00	8.88	54.11	62.99	83.54	-20.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH87 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

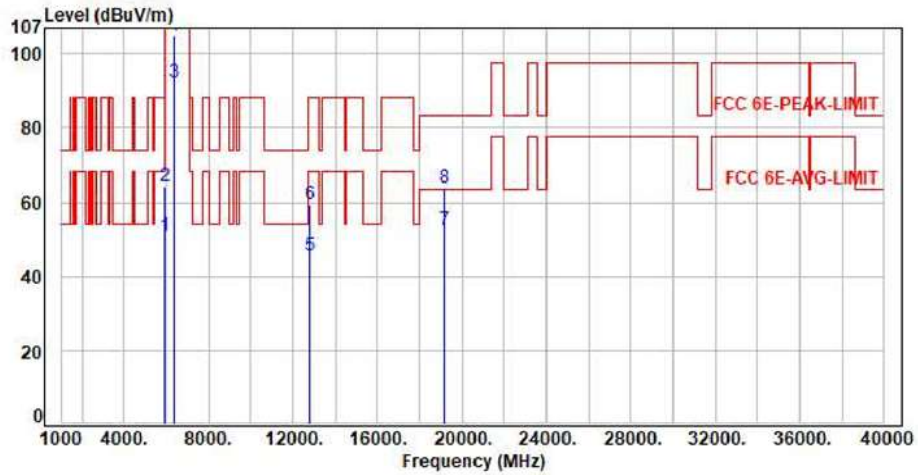

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.97	50.70	68.20	-17.50	Average	211	159	P
2	5925.00	7.73	56.54	64.27	88.20	-23.93	Peak	211	159	P
3	6385.00	8.45	83.81	92.26	200.00	-107.74	Average	211	159	P
4	6385.00	8.45	96.61	105.06	200.00	-94.94	Peak	211	159	P
5	12770.00	17.49	28.27	45.76	68.20	-22.44	Average	100	162	P
6	12770.00	17.49	42.00	59.49	88.20	-28.71	Peak	100	162	P
7	19155.00	9.76	42.85	52.61	63.54	-10.93	Average	150	360	P
8	19155.00	9.76	54.21	63.97	83.54	-19.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH87 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

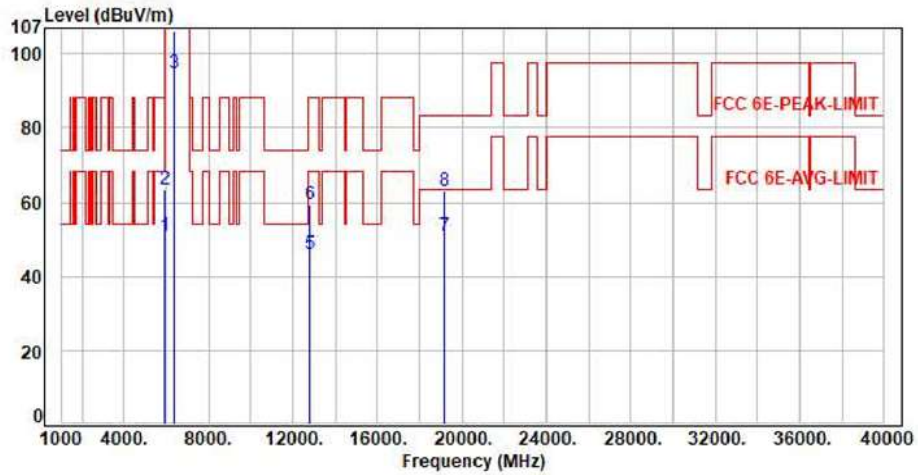



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH15 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

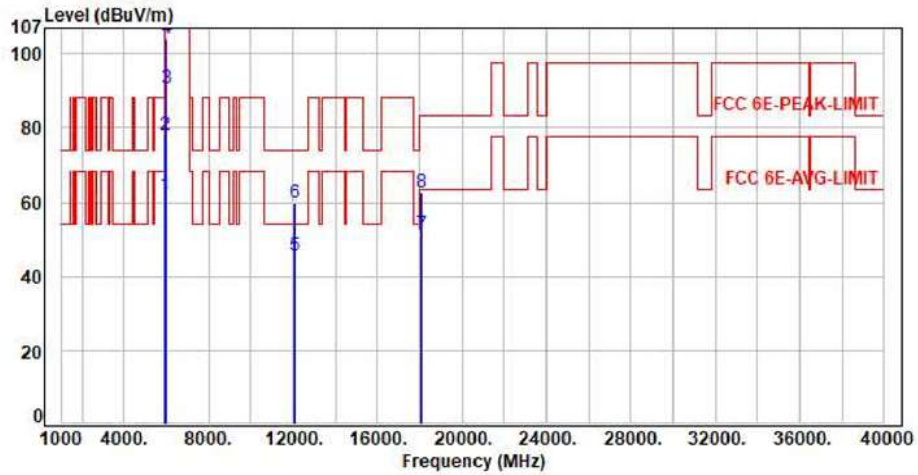


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	54.23	61.96	68.20	-6.24	Average	181	336	P
2	5925.00	7.73	70.28	78.01	88.20	-10.19	Peak	181	336	P
3	6025.00	7.92	82.97	90.89	200.00	-109.11	Average	181	336	P
4	6025.00	7.92	96.15	104.07	200.00	-95.93	Peak	181	336	P
5	12050.00	16.46	29.08	45.54	54.00	-8.46	Average	100	221	P
6	12050.00	16.46	43.46	59.92	74.00	-14.08	Peak	100	221	P
7	18075.00	8.61	42.81	51.42	63.54	-12.12	Average	150	360	P
8	18075.00	8.61	54.18	62.79	83.54	-20.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH15 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

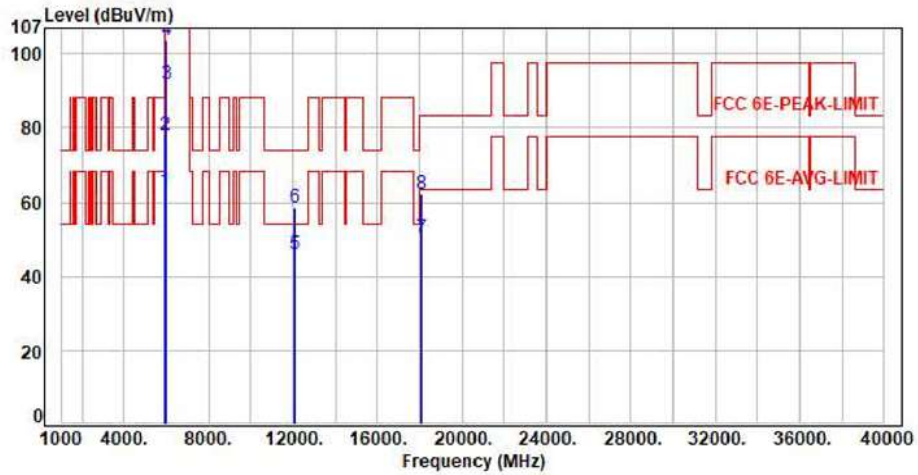


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	55.36	63.09	68.20	-5.11	Average	121	330	P
2	5925.00	7.73	70.33	78.06	88.20	-10.14	Peak	121	330	P
3	6025.00	7.92	83.85	91.77	200.00	-108.23	Average	121	330	P
4	6025.00	7.92	95.97	103.89	200.00	-96.11	Peak	121	330	P
5	12050.00	16.46	29.67	46.13	54.00	-7.87	Average	100	192	P
6	12050.00	16.46	41.95	58.41	74.00	-15.59	Peak	100	192	P
7	18075.00	8.61	41.75	50.36	63.54	-13.18	Average	150	360	P
8	18075.00	8.61	53.74	62.35	83.54	-21.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH47 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

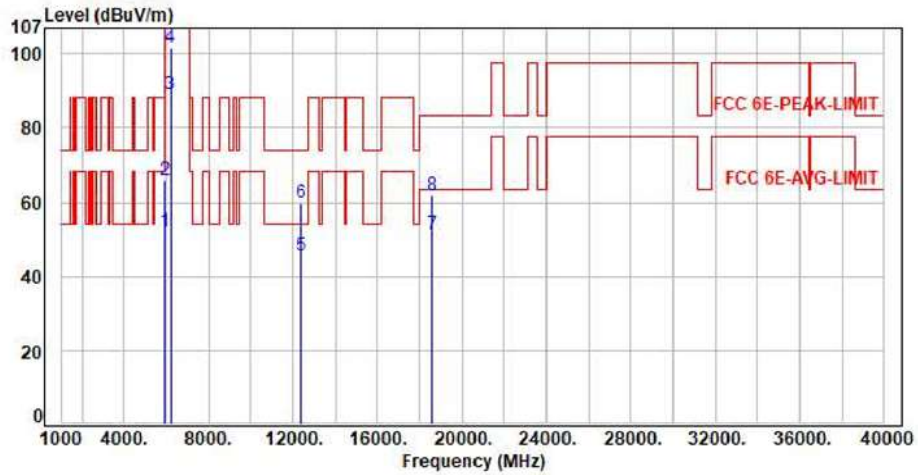


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	44.24	51.97	68.20	-16.23	Average	180	321	P
2	5925.00	7.73	58.31	66.04	88.20	-22.16	Peak	180	321	P
3	6185.00	8.37	80.66	89.03	200.00	-110.97	Average	180	321	P
4	6185.00	8.37	93.40	101.77	200.00	-98.23	Peak	180	321	P
5	12370.00	16.61	28.77	45.38	54.00	-8.62	Average	100	228	P
6	12370.00	16.61	43.02	59.63	74.00	-14.37	Peak	100	228	P
7	18555.00	9.17	42.17	51.34	63.54	-12.20	Average	150	360	P
8	18555.00	9.17	52.71	61.88	83.54	-21.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH47 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

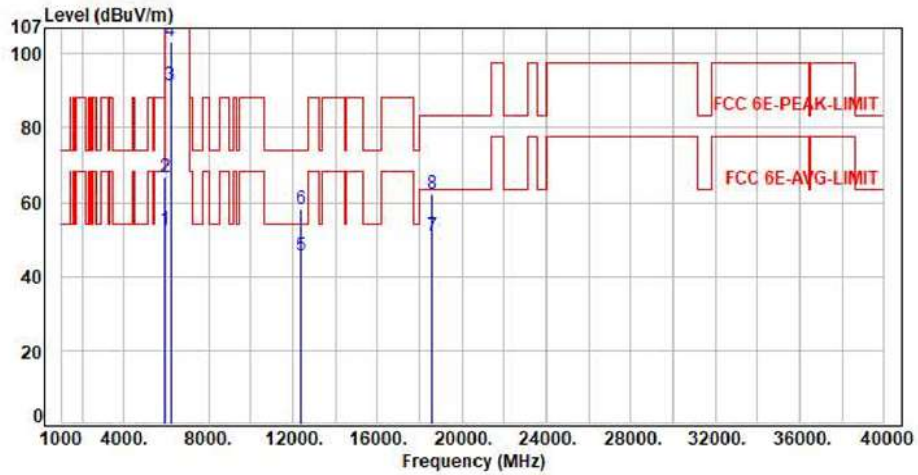


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	44.90	52.63	68.20	-15.57	Average	121	339	P
2	5925.00	7.73	58.88	66.61	88.20	-21.59	Peak	121	339	P
3	6185.00	8.37	83.01	91.38	200.00	-108.62	Average	121	339	P
4	6185.00	8.37	95.15	103.52	200.00	-96.48	Peak	121	339	P
5	12370.00	16.61	28.92	45.53	54.00	-8.47	Average	100	195	P
6	12370.00	16.61	41.49	58.10	74.00	-15.90	Peak	100	195	P
7	18555.00	9.17	41.69	50.86	63.54	-12.68	Average	150	360	P
8	18555.00	9.17	53.18	62.35	83.54	-21.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH79 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

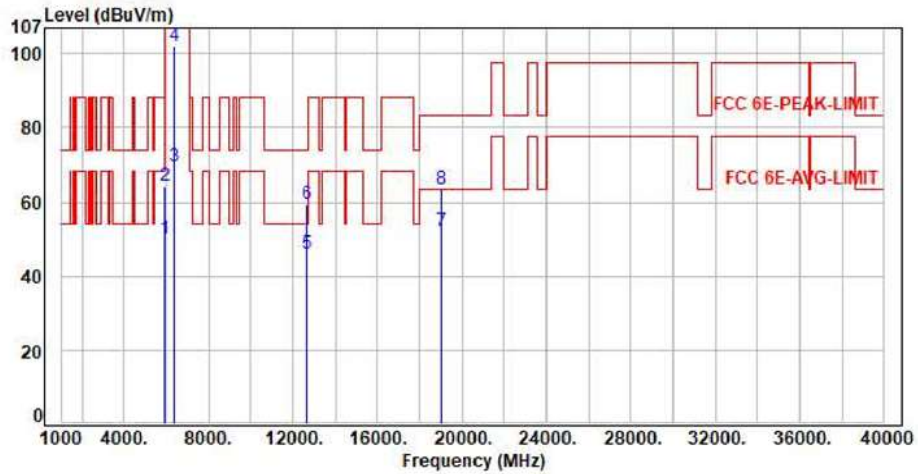


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.30	50.03	68.20	-18.17	Average	173	320	P
2	5925.00	7.73	56.56	64.29	88.20	-23.91	Peak	173	320	P
3	6345.00	8.41	61.09	69.50	200.00	-130.50	Average	173	320	P
4	6345.00	8.41	93.76	102.17	200.00	-97.83	Peak	173	320	P
5	12690.00	17.20	28.92	46.12	54.00	-7.88	Average	100	226	P
6	12690.00	17.20	42.02	59.22	74.00	-14.78	Peak	100	226	P
7	19035.00	9.45	42.81	52.26	63.54	-11.28	Average	150	360	P
8	19035.00	9.45	54.21	63.66	83.54	-19.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH79 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

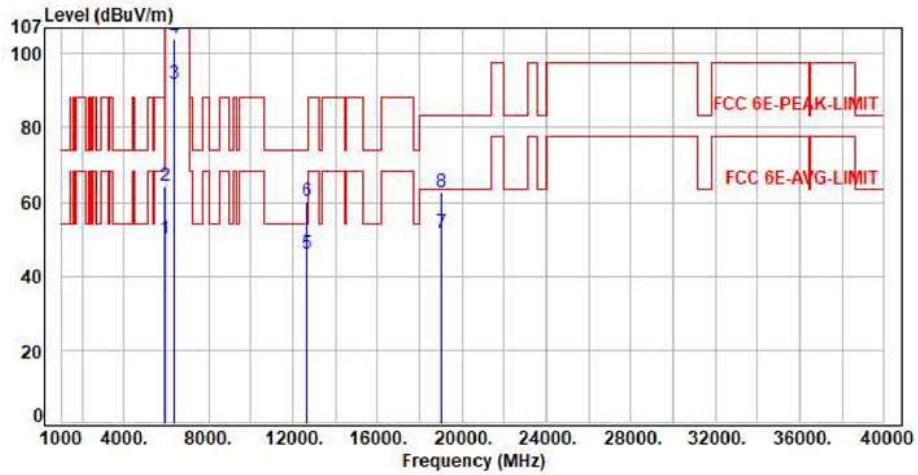


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.34	50.07	68.20	-18.13	Average	127	339	P
2	5925.00	7.73	56.61	64.34	88.20	-23.86	Peak	127	339	P
3	6345.00	8.41	83.56	91.97	200.00	-108.03	Average	127	339	P
4	6345.00	8.41	95.55	103.96	200.00	-96.04	Peak	127	339	P
5	12690.00	17.20	28.82	46.02	54.00	-7.98	Average	100	211	P
6	12690.00	17.20	43.04	60.24	74.00	-13.76	Peak	100	211	P
7	19035.00	9.45	42.11	51.56	63.54	-11.98	Average	150	360	P
8	19035.00	9.45	53.11	62.56	83.54	-20.98	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH97 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

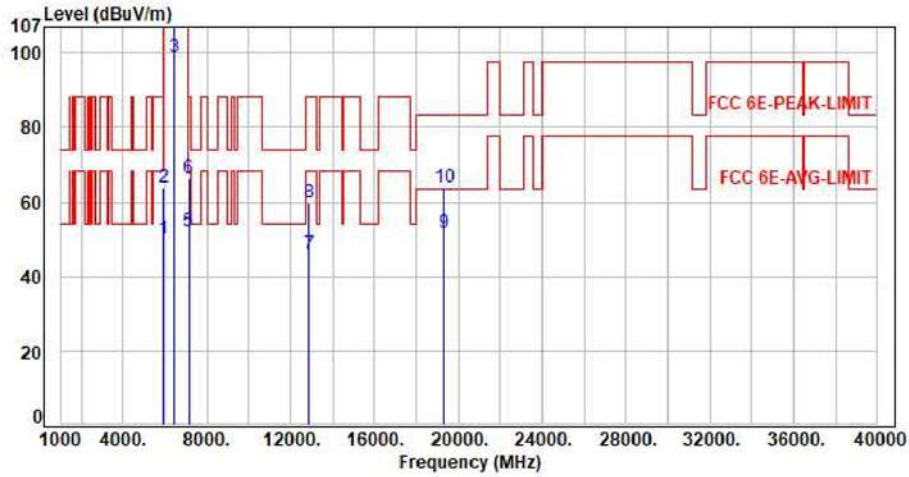


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.22	49.95	68.20	-18.25	Average	192	312	P
2	5925.00	7.73	56.09	63.82	88.20	-24.38	Peak	192	312	P
3	6435.00	8.36	90.34	98.70	200.00	-101.30	Average	192	312	P
4	6435.00	8.36	103.44	111.80	200.00	-88.20	Peak	192	312	P
5	7125.00	9.92	42.12	52.04	68.20	-16.16	Average	192	312	P
6	7125.00	9.92	56.38	66.30	88.20	-21.90	Peak	192	312	P
7	12870.00	17.98	28.10	46.08	68.20	-22.12	Average	100	186	P
8	12870.00	17.98	41.67	59.65	88.20	-28.55	Peak	100	186	P
9	19305.00	9.63	42.14	51.77	63.54	-11.77	Average	150	60	P
10	19305.00	9.63	54.21	63.84	83.54	-19.70	Peak	150	60	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH97 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

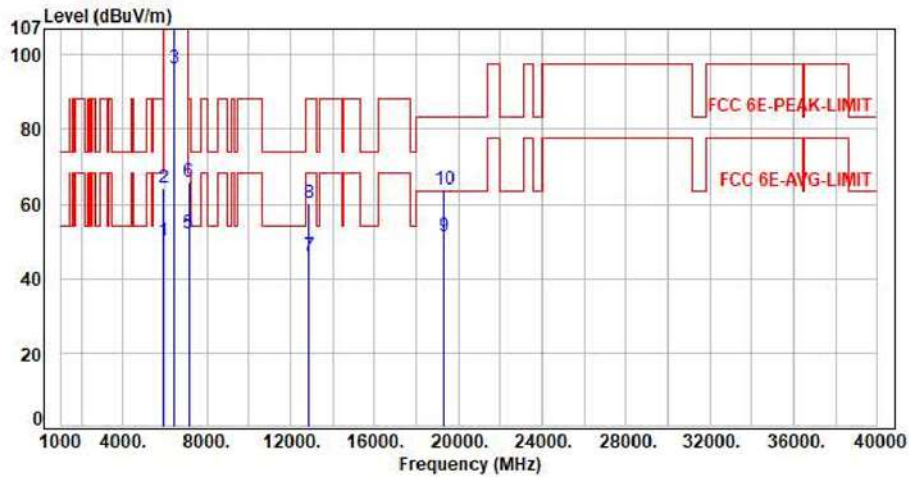


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.24	49.97	68.20	-18.23	Average	102	322	P
2	5925.00	7.73	56.72	64.45	88.20	-23.75	Peak	102	322	P
3	6435.00	8.36	88.06	96.42	200.00	-103.58	Average	102	322	P
4	6435.00	8.36	101.54	109.90	200.00	-90.10	Peak	102	322	P
5	7125.00	9.92	42.11	52.03	68.20	-16.17	Average	102	322	P
6	7125.00	9.92	56.16	66.08	88.20	-22.12	Peak	102	322	P
7	12870.00	17.98	28.00	45.98	68.20	-22.22	Average	100	213	P
8	12870.00	17.98	42.27	60.25	88.20	-27.95	Peak	100	213	P
9	19305.00	9.63	41.62	51.25	63.54	-12.29	Average	150	360	P
10	19305.00	9.63	54.28	63.91	83.54	-19.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH105 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

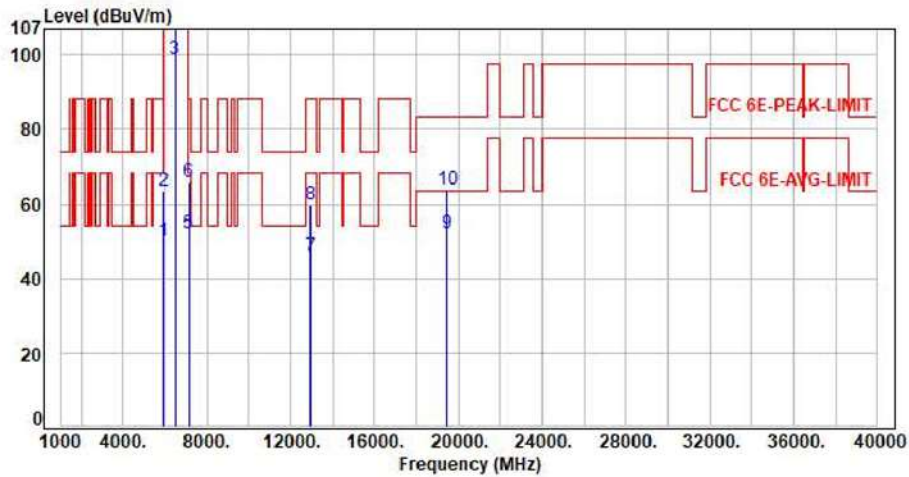


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	187	313	P
2	5925.00	7.73	55.89	63.62	88.20	-24.58	Peak	187	313	P
3	6475.00	8.34	90.65	98.99	200.00	-101.01	Average	187	313	P
4	6475.00	8.34	102.27	110.61	200.00	-89.39	Peak	187	313	P
5	7125.00	9.92	42.10	52.02	68.20	-16.18	Average	187	313	P
6	7125.00	9.92	55.88	65.80	88.20	-22.40	Peak	187	313	P
7	12950.00	18.39	27.49	45.88	68.20	-22.32	Average	100	188	P
8	12950.00	18.39	41.30	59.69	88.20	-28.51	Peak	100	188	P
9	19425.00	10.06	41.82	51.88	63.54	-11.66	Average	150	360	P
10	19425.00	10.06	53.88	63.94	83.54	-19.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

MIMO



Test Mode : 2TX 11x20 CH105 NSS MCS0
 Voltage : From Adatper(AC120V/60Hz)
 Pol : Horizontal

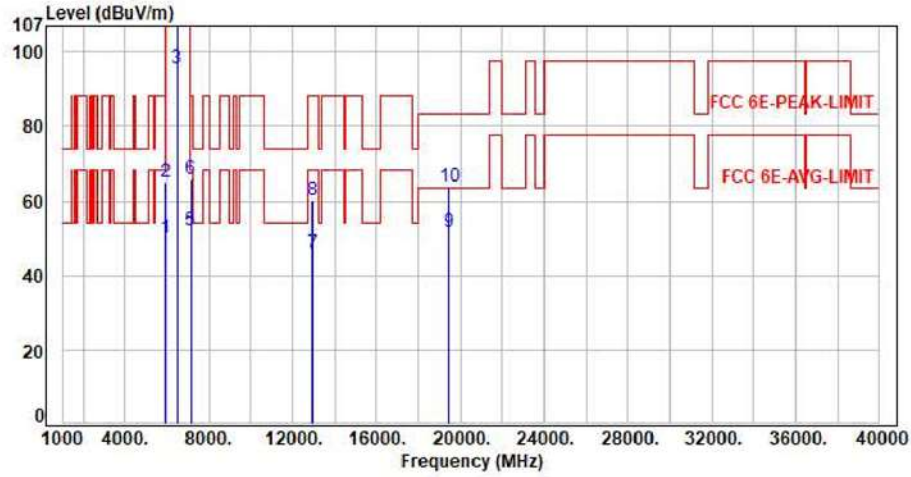

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.23	49.96	68.20	-18.24	Average	100	322	P
2	5925.00	7.73	57.53	65.26	88.20	-22.94	Peak	100	322	P
3	6475.00	8.34	87.22	95.56	200.00	-104.44	Average	100	322	P
4	6475.00	8.34	98.92	107.26	200.00	-92.74	Peak	100	322	P
5	7125.00	9.92	42.12	52.04	68.20	-16.16	Average	100	322	P
6	7125.00	9.92	56.10	66.02	88.20	-22.18	Peak	100	322	P
7	12950.00	18.39	27.41	45.80	68.20	-22.40	Average	100	198	P
8	12950.00	18.39	41.63	60.02	88.20	-28.18	Peak	100	198	P
9	19425.00	10.06	41.52	51.58	63.54	-11.96	Average	150	360	P
10	19425.00	10.06	53.74	63.80	83.54	-19.74	Peak	150	360	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH113 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

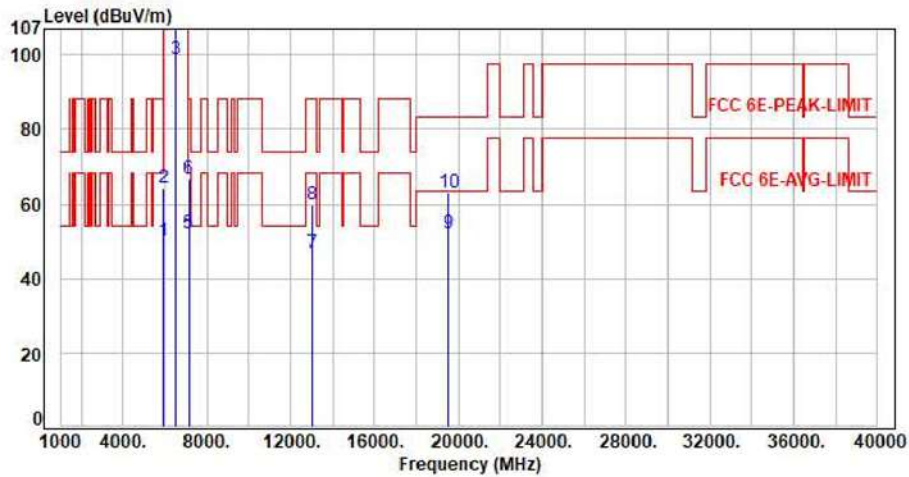



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH113 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

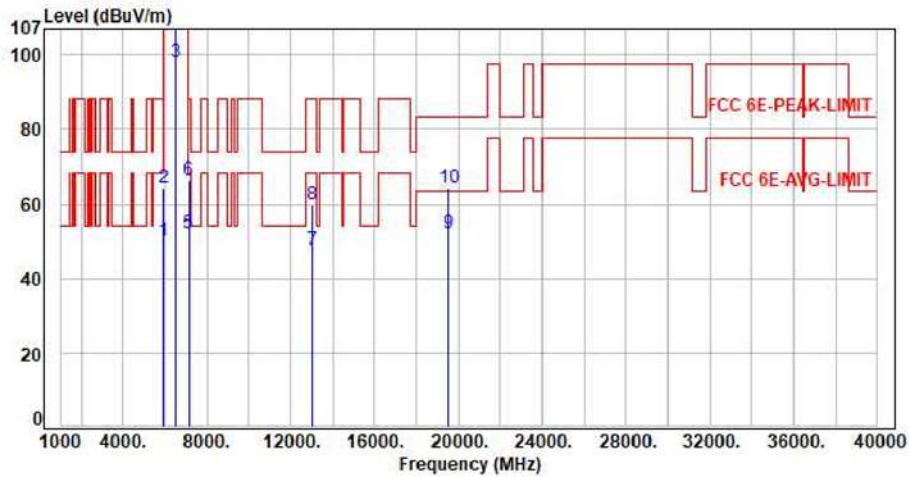


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.23	49.96	68.20	-18.24	Average	137	26	P
2	5925.00	7.73	56.38	64.11	88.20	-24.09	Peak	137	26	P
3	6515.00	8.45	89.72	98.17	200.00	-101.83	Average	137	26	P
4	6515.00	8.45	102.54	110.99	200.00	-89.01	Peak	137	26	P
5	7125.00	9.92	42.11	52.03	68.20	-16.17	Average	137	26	P
6	7125.00	9.92	56.24	66.16	88.20	-22.04	Peak	137	26	P
7	13030.00	18.71	28.92	47.63	68.20	-20.57	Average	100	256	P
8	13030.00	18.71	41.28	59.99	88.20	-28.21	Peak	100	256	P
9	19545.00	10.24	41.82	52.06	63.54	-11.48	Average	150	360	P
10	19545.00	10.24	53.96	64.20	83.54	-19.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH99 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

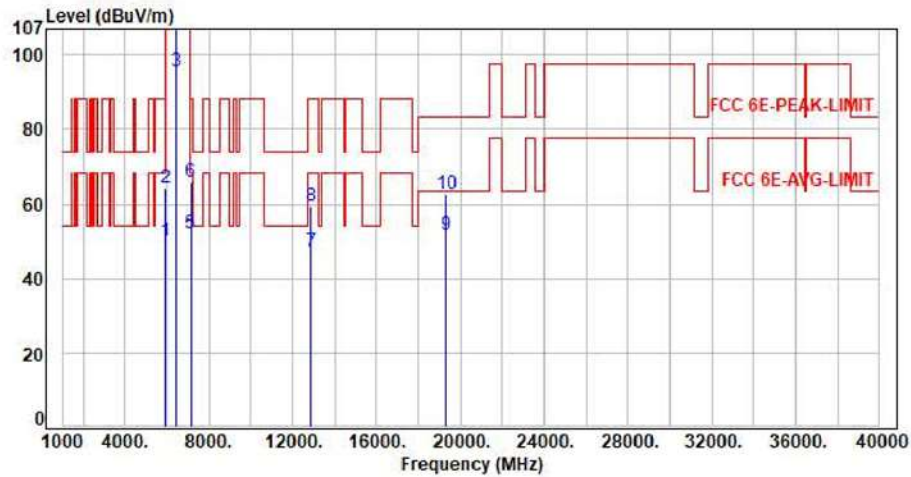

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.25	49.98	68.20	-18.22	Average	189	312	P
2	5925.00	7.73	56.53	64.26	88.20	-23.94	Peak	189	312	P
3	6445.00	8.33	87.19	95.52	200.00	-104.48	Average	189	312	P
4	6445.00	8.33	99.86	108.19	200.00	-91.81	Peak	189	312	P
5	7125.00	9.92	42.12	52.04	68.20	-16.16	Average	189	312	P
6	7125.00	9.92	55.84	65.76	88.20	-22.44	Peak	189	312	P
7	12890.00	18.06	29.09	47.15	68.20	-21.05	Average	100	313	P
8	12890.00	18.06	41.53	59.59	88.20	-28.61	Peak	100	313	P
9	19335.00	9.70	41.82	51.52	63.54	-12.02	Average	150	360	P
10	19335.00	9.70	52.95	62.65	83.54	-20.89	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor