



MIMO

Test Mode : 2TX 11x40 CH99 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

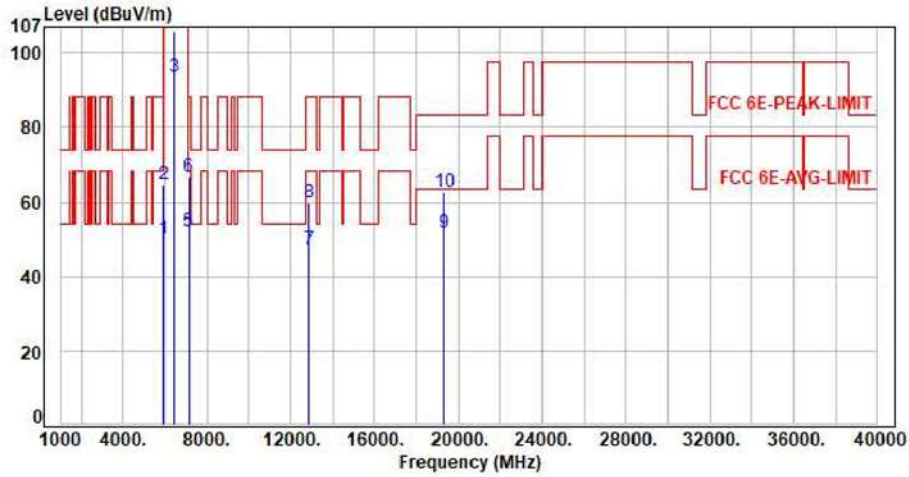



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH107 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

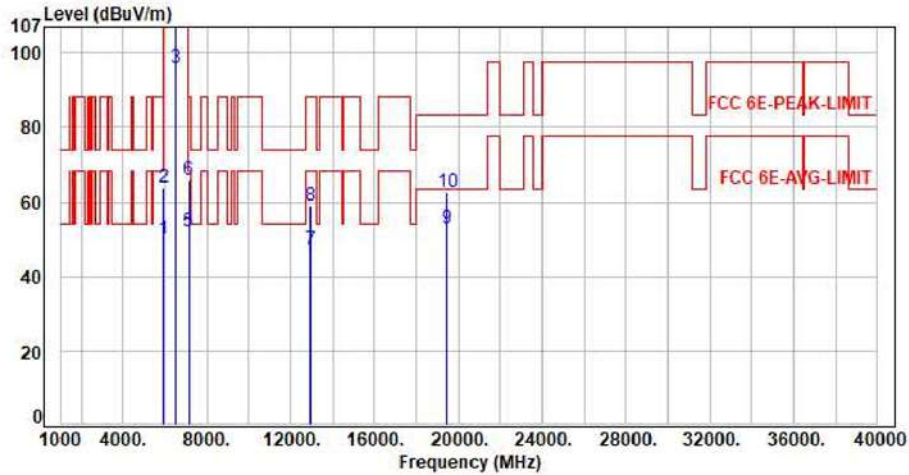

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.24	49.97	68.20	-18.23	Average	199	313	P
2	5925.00	7.73	56.27	64.00	88.20	-24.20	Peak	199	313	P
3	6485.00	8.35	87.72	96.07	200.00	-103.93	Average	199	313	P
4	6485.00	8.35	101.71	110.06	200.00	-89.94	Peak	199	313	P
5	7125.00	9.92	42.14	52.06	68.20	-16.14	Average	199	313	P
6	7125.00	9.92	56.14	66.06	88.20	-22.14	Peak	199	313	P
7	12970.00	18.48	28.85	47.33	68.20	-20.87	Average	100	169	P
8	12970.00	18.48	40.38	58.86	88.20	-29.34	Peak	100	169	P
9	19455.00	10.08	42.61	52.69	63.54	-10.85	Average	150	360	P
10	19455.00	10.08	52.47	62.55	83.54	-20.99	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH107 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

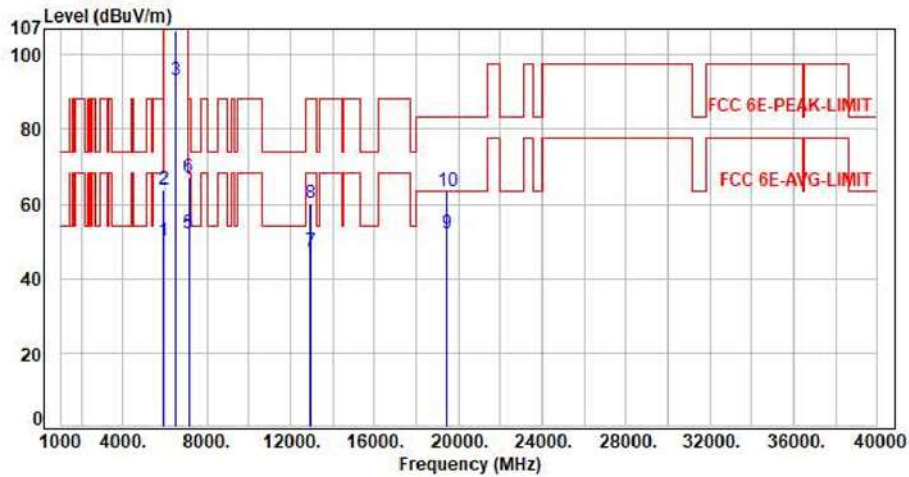



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH103 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

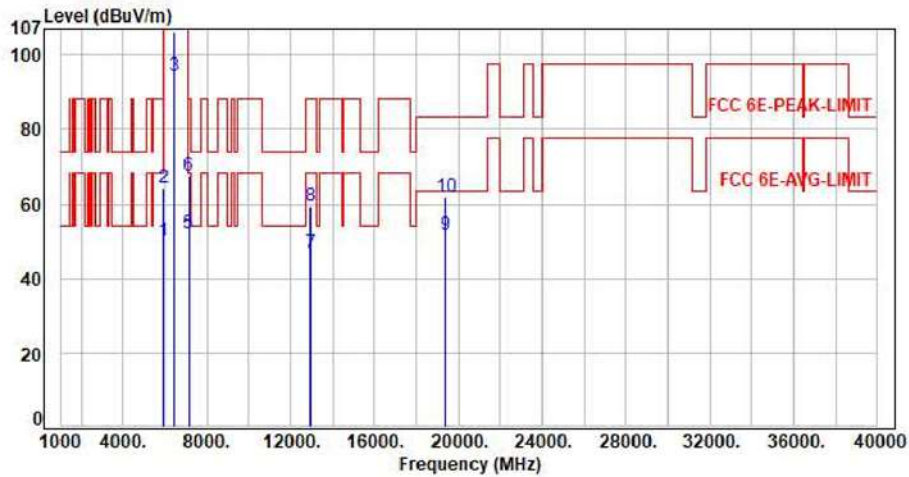


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.23	49.96	68.20	-18.24	Average	185	313	P
2	5925.00	7.73	56.48	64.21	88.20	-23.99	Peak	185	313	P
3	6465.00	8.33	86.01	94.34	200.00	-105.66	Average	185	313	P
4	6465.00	8.33	97.83	106.16	200.00	-93.84	Peak	185	313	P
5	7125.00	9.92	42.16	52.08	68.20	-16.12	Average	185	313	P
6	7125.00	9.92	57.51	67.43	88.20	-20.77	Peak	185	313	P
7	12930.00	18.27	28.67	46.94	68.20	-21.26	Average	100	186	P
8	12930.00	18.27	40.99	59.26	88.20	-28.94	Peak	100	186	P
9	19395.00	10.02	41.62	51.64	63.54	-11.90	Average	150	360	P
10	19395.00	10.02	51.99	62.01	83.54	-21.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH103 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

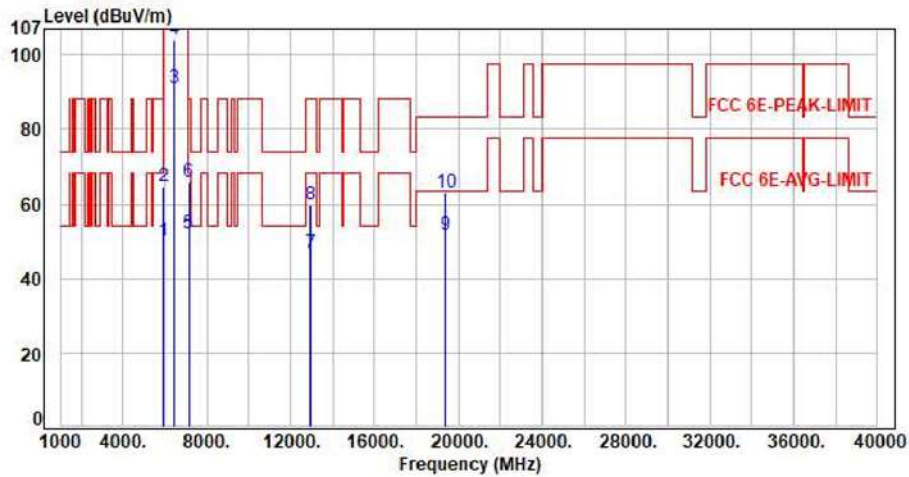


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.25	49.98	68.20	-18.22	Average	100	322	P
2	5925.00	7.73	56.78	64.51	88.20	-23.69	Peak	100	322	P
3	6465.00	8.33	82.73	91.06	200.00	-108.94	Average	100	322	P
4	6465.00	8.33	95.98	104.31	200.00	-95.69	Peak	100	322	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	100	322	P
6	7125.00	9.92	56.05	65.97	88.20	-22.23	Peak	100	322	P
7	12930.00	18.27	28.32	46.59	68.20	-21.61	Average	100	195	P
8	12930.00	18.27	41.67	59.94	88.20	-28.26	Peak	100	195	P
9	19395.00	10.02	41.78	51.80	63.54	-11.74	Average	150	360	P
10	19395.00	10.02	53.22	63.24	83.54	-20.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH115 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

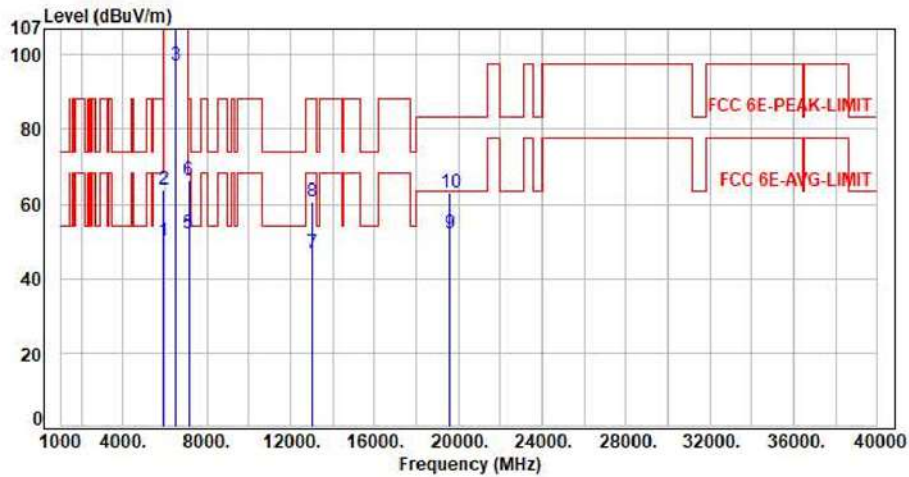


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.29	50.02	68.20	-18.18	Average	196	314	P
2	5925.00	7.73	55.96	63.69	88.20	-24.51	Peak	196	314	P
3	6525.00	8.52	88.64	97.16	200.00	-102.84	Average	196	314	P
4	6525.00	8.52	101.29	109.81	200.00	-90.19	Peak	196	314	P
5	7125.00	9.92	42.25	52.17	68.20	-16.03	Average	196	314	P
6	7125.00	9.92	56.57	66.49	88.20	-21.71	Peak	196	314	P
7	13050.00	18.79	27.82	46.61	68.20	-21.59	Average	100	221	P
8	13050.00	18.79	41.85	60.64	88.20	-27.56	Peak	100	221	P
9	19575.00	10.24	41.87	52.11	63.54	-11.43	Average	150	360	P
10	19575.00	10.24	52.74	62.98	83.54	-20.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH115 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

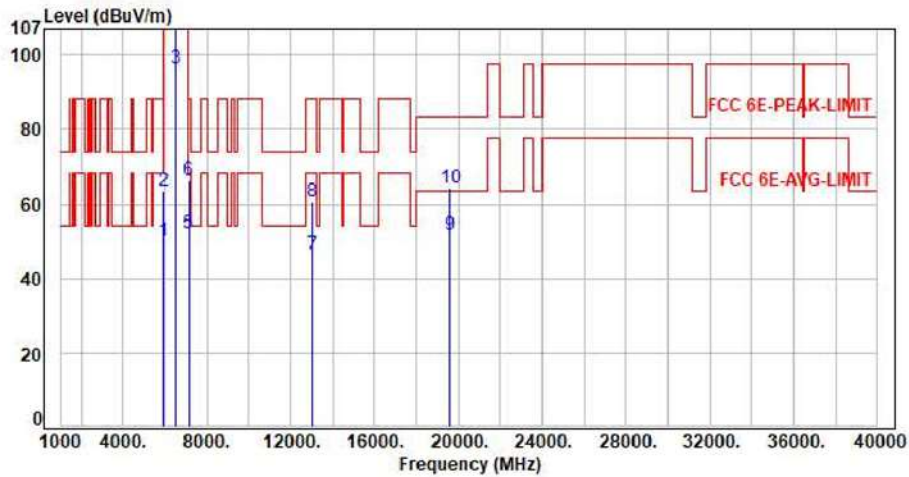


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.27	50.00	68.20	-18.20	Average	136	27	P
2	5925.00	7.73	55.83	63.56	88.20	-24.64	Peak	136	27	P
3	6525.00	8.52	87.82	96.34	200.00	-103.66	Average	136	27	P
4	6525.00	8.52	100.69	109.21	200.00	-90.79	Peak	136	27	P
5	7125.00	9.92	42.24	52.16	68.20	-16.04	Average	136	27	P
6	7125.00	9.92	56.48	66.40	88.20	-21.80	Peak	136	27	P
7	13050.00	18.79	27.57	46.36	68.20	-21.84	Average	100	192	P
8	13050.00	18.79	41.88	60.67	88.20	-27.53	Peak	100	192	P
9	19575.00	10.24	41.56	51.80	63.54	-11.74	Average	150	360	P
10	19575.00	10.24	53.87	64.11	83.54	-19.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH119 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

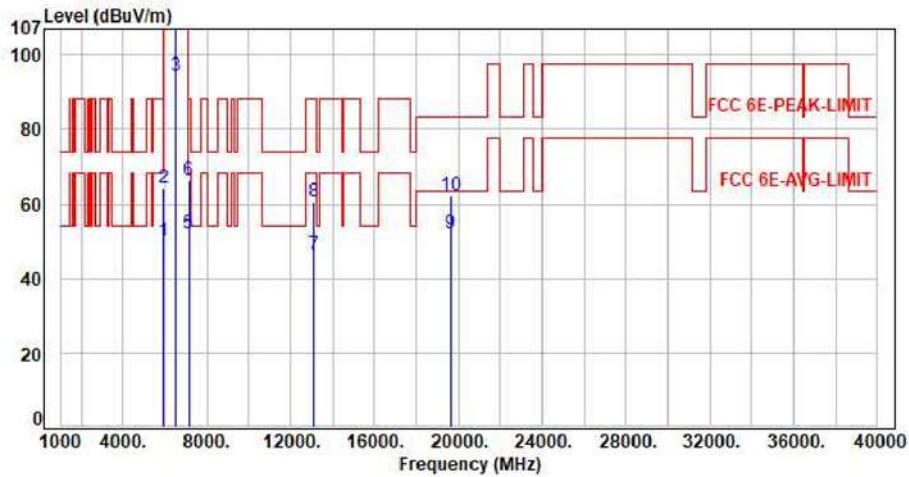


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.29	50.02	68.20	-18.18	Average	183	313	P
2	5925.00	7.73	56.62	64.35	88.20	-23.85	Peak	183	313	P
3	6545.00	8.63	85.75	94.38	200.00	-105.62	Average	183	313	P
4	6545.00	8.63	98.40	107.03	200.00	-92.97	Peak	183	313	P
5	7125.00	9.92	42.27	52.19	68.20	-16.01	Average	183	313	P
6	7125.00	9.92	56.42	66.34	88.20	-21.86	Peak	183	313	P
7	13090.00	19.04	27.41	46.45	68.20	-21.75	Average	100	224	P
8	13090.00	19.04	41.67	60.71	88.20	-27.49	Peak	100	224	P
9	19635.00	10.48	41.63	52.11	63.54	-11.43	Average	150	360	P
10	19635.00	10.48	51.87	62.35	83.54	-21.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

MIMO



Test Mode : 2TX 11x80 CH119 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

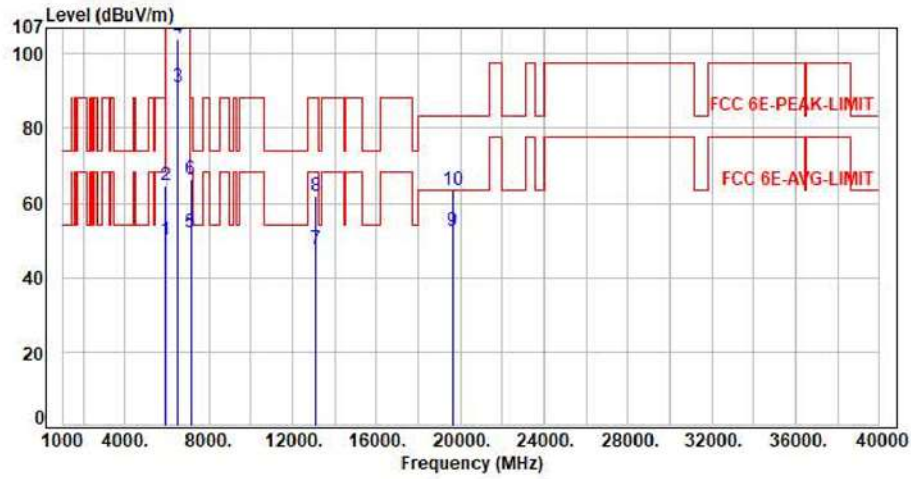

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	121	24	P
2	5925.00	7.73	56.85	64.58	88.20	-23.62	Peak	121	24	P
3	6545.00	8.63	82.70	91.33	200.00	-108.67	Average	121	24	P
4	6545.00	8.63	95.71	104.34	200.00	-95.66	Peak	121	24	P
5	7125.00	9.92	42.10	52.02	68.20	-16.18	Average	121	24	P
6	7125.00	9.92	56.37	66.29	88.20	-21.91	Peak	121	24	P
7	13090.00	19.04	28.47	47.51	68.20	-20.69	Average	100	176	P
8	13090.00	19.04	42.63	61.67	88.20	-26.53	Peak	100	176	P
9	19635.00	10.48	42.11	52.59	63.54	-10.95	Average	150	360	P
10	19635.00	10.48	53.16	63.64	83.54	-19.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x160 CH111 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

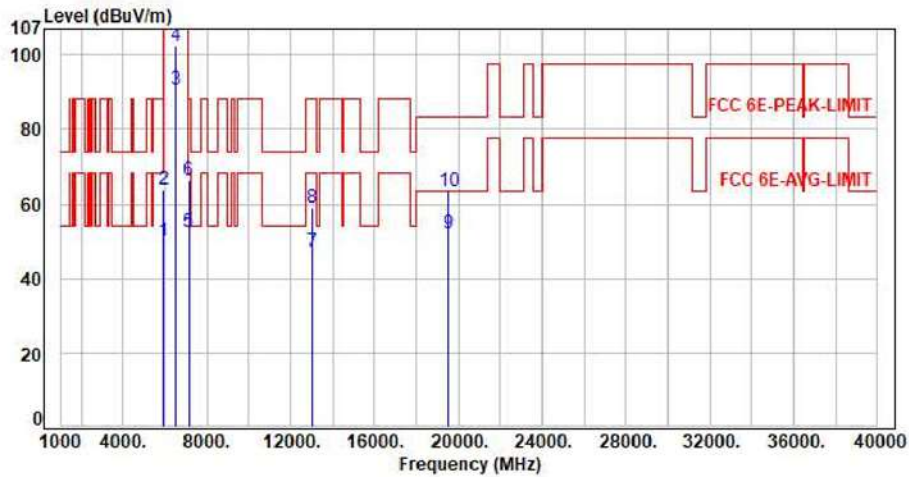



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of measurement data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x160 CH111 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

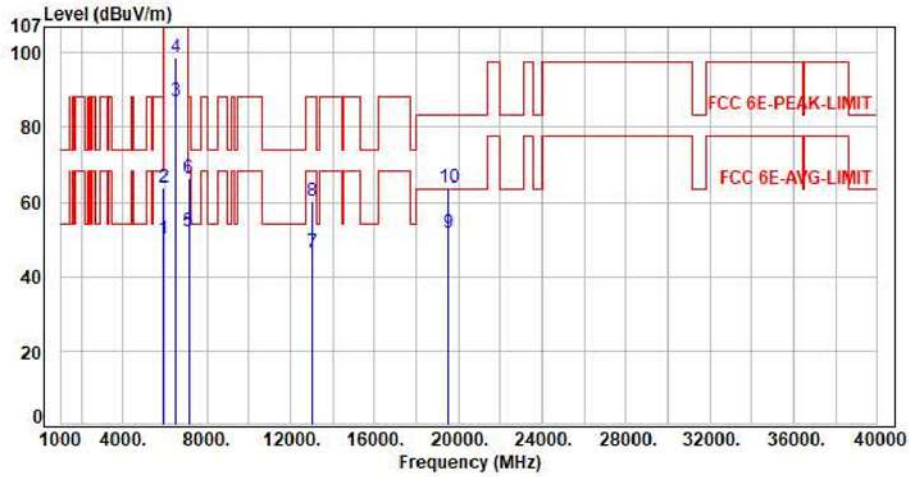


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.37	50.10	68.20	-18.10	Average	101	323	P
2	5925.00	7.73	55.96	63.69	88.20	-24.51	Peak	101	323	P
3	6505.00	8.39	78.52	86.91	200.00	-113.09	Average	101	323	P
4	6505.00	8.39	90.47	98.86	200.00	-101.14	Peak	101	323	P
5	7125.00	9.92	42.29	52.21	68.20	-15.99	Average	101	323	P
6	7125.00	9.92	56.29	66.21	88.20	-21.99	Peak	101	323	P
7	13010.00	18.63	27.60	46.23	68.20	-21.97	Average	100	199	P
8	13010.00	18.63	41.65	60.28	88.20	-27.92	Peak	100	199	P
9	19515.00	10.20	41.52	51.72	63.54	-11.82	Average	150	360	P
10	19515.00	10.20	53.69	63.89	83.54	-19.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH117 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

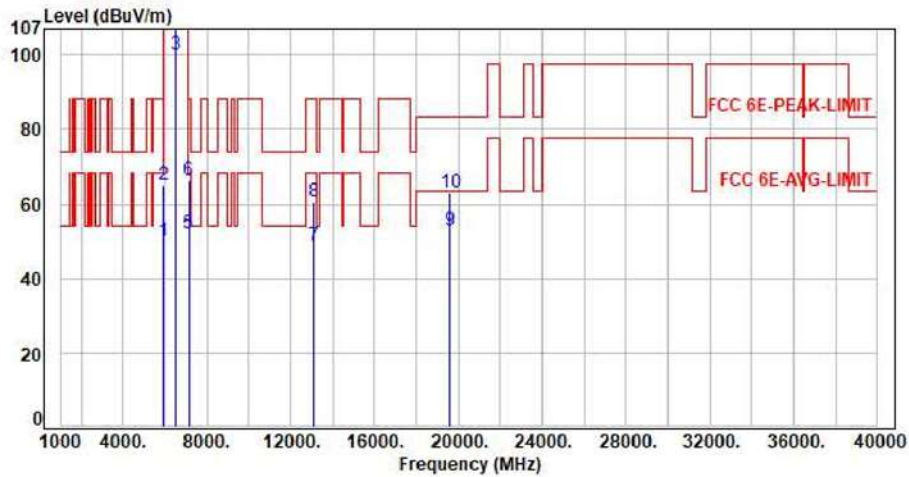


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.25	49.98	68.20	-18.22	Average	219	149	P
2	5925.00	7.73	57.40	65.13	88.20	-23.07	Peak	219	149	P
3	6535.00	8.57	91.53	100.10	200.00	-99.90	Average	219	149	P
4	6535.00	8.57	104.31	112.88	200.00	-87.12	Peak	219	149	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	219	149	P
6	7125.00	9.92	56.44	66.36	88.20	-21.84	Peak	219	149	P
7	13070.00	18.92	29.87	48.79	68.20	-19.41	Average	100	225	P
8	13070.00	18.92	41.73	60.65	88.20	-27.55	Peak	100	225	P
9	19605.00	10.26	42.52	52.78	63.54	-10.76	Average	150	360	P
10	19605.00	10.26	52.88	63.14	83.54	-20.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH117 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

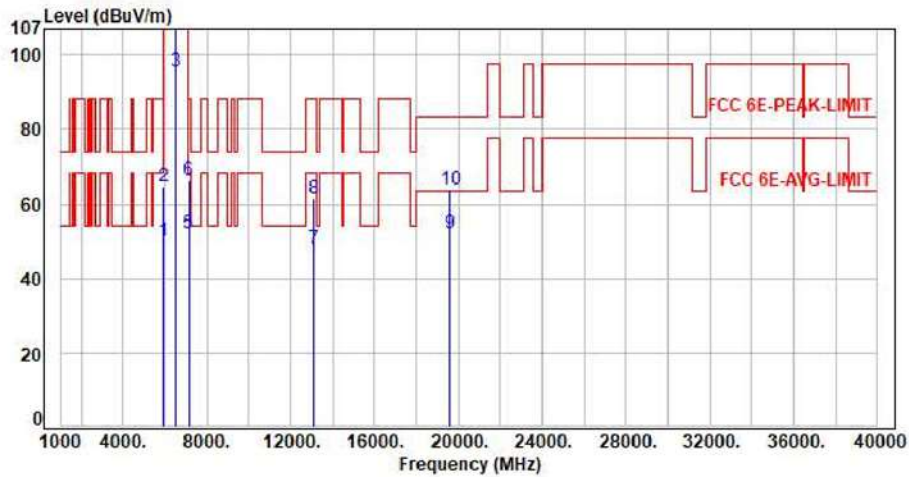


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.24	49.97	68.20	-18.23	Average	109	325	P
2	5925.00	7.73	56.85	64.58	88.20	-23.62	Peak	109	325	P
3	6535.00	8.57	86.85	95.42	200.00	-104.58	Average	109	325	P
4	6535.00	8.57	99.95	108.52	200.00	-91.48	Peak	109	325	P
5	7125.00	9.92	42.16	52.08	68.20	-16.12	Average	109	325	P
6	7125.00	9.92	56.31	66.23	88.20	-21.97	Peak	109	325	P
7	13070.00	18.92	29.09	48.01	68.20	-20.19	Average	109	294	P
8	13070.00	18.92	42.65	61.57	88.20	-26.63	Peak	109	294	P
9	19605.00	10.26	41.88	52.14	63.54	-11.40	Average	150	360	P
10	19605.00	10.26	53.82	64.08	83.54	-19.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH153 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

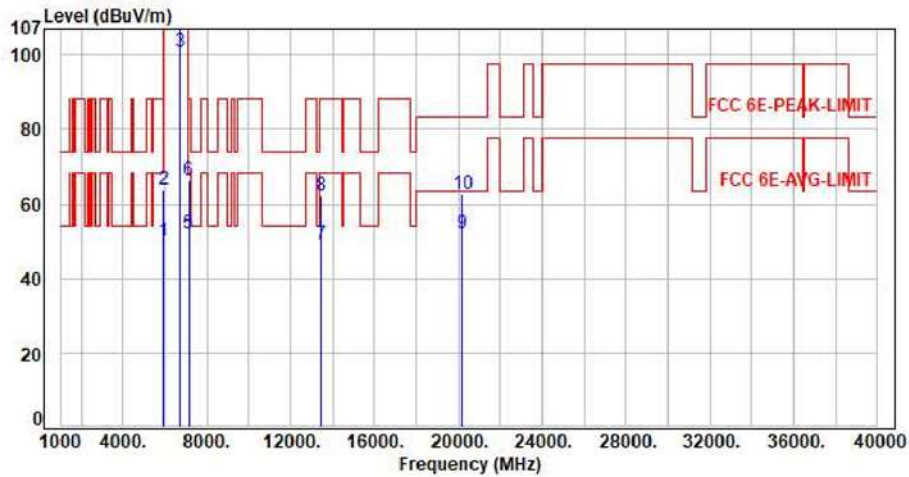


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	214	151	P
2	5925.00	7.73	56.29	64.02	88.20	-24.18	Peak	214	151	P
3	6715.00	9.20	91.57	100.77	200.00	-99.23	Average	214	151	P
4	6715.00	9.20	105.03	114.23	200.00	-85.77	Peak	214	151	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	214	151	P
6	7125.00	9.92	56.53	66.45	88.20	-21.75	Peak	214	151	P
7	13430.00	20.57	28.62	49.19	68.20	-19.01	Average	100	136	P
8	13430.00	20.57	41.64	62.21	88.20	-25.99	Peak	100	136	P
9	20145.00	10.14	41.96	52.10	63.54	-11.44	Average	150	360	P
10	20145.00	10.14	52.62	62.76	83.54	-20.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

MIMO



Test Mode : 2TX 11x20 CH153 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

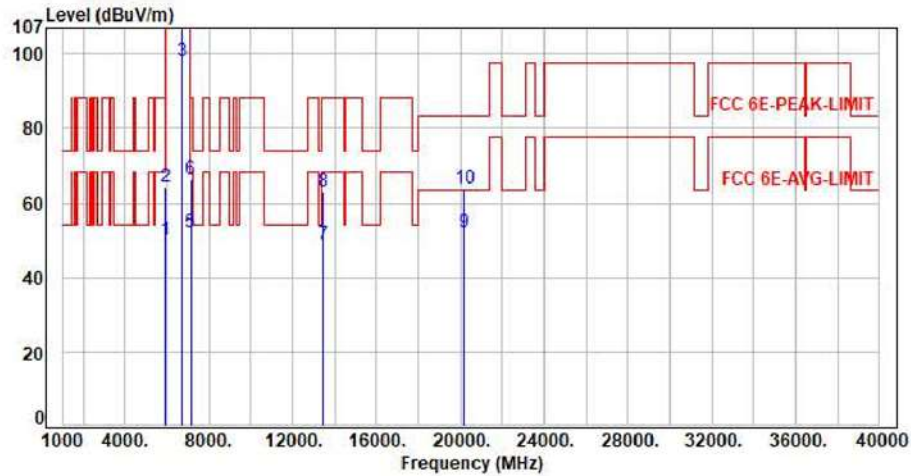


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.25	49.98	68.20	-18.22	Average	135	12	P
2	5925.00	7.73	56.45	64.18	88.20	-24.02	Peak	135	12	P
3	6715.00	9.20	89.00	98.20	200.00	-101.80	Average	135	12	P
4	6715.00	9.20	102.48	111.68	200.00	-88.32	Peak	135	12	P
5	7125.00	9.92	42.18	52.10	68.20	-16.10	Average	135	12	P
6	7125.00	9.92	56.35	66.27	88.20	-21.93	Peak	135	12	P
7	13430.00	20.57	28.43	49.00	68.20	-19.20	Average	100	109	P
8	13430.00	20.57	42.63	63.20	88.20	-25.00	Peak	100	109	P
9	20145.00	10.14	41.99	52.13	63.54	-11.41	Average	150	360	P
10	20145.00	10.14	53.77	63.91	83.54	-19.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH181 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

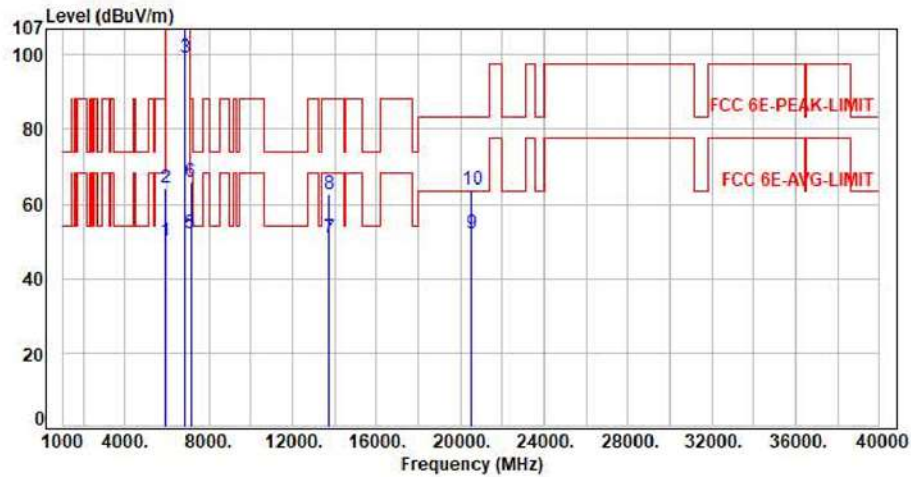


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	207	152	P
2	5925.00	7.73	56.43	64.16	88.20	-24.04	Peak	207	152	P
3	6855.00	9.48	89.63	99.11	200.00	-100.89	Average	207	152	P
4	6855.00	9.48	102.88	112.36	200.00	-87.64	Peak	207	152	P
5	7125.00	9.92	42.16	52.08	68.20	-16.12	Average	207	152	P
6	7125.00	9.92	55.83	65.75	88.20	-22.45	Peak	207	152	P
7	13710.00	21.36	29.56	50.92	68.20	-17.28	Average	100	152	P
8	13710.00	21.36	41.15	62.51	88.20	-25.69	Peak	100	152	P
9	20565.00	9.83	42.11	51.94	63.54	-11.60	Average	150	360	P
10	20565.00	9.83	53.87	63.70	83.54	-19.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH181 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

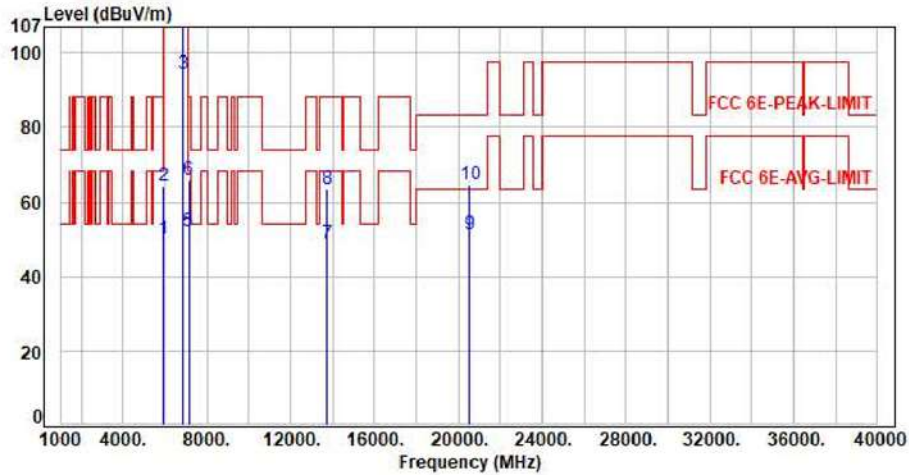

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	167	27	P
2	5925.00	7.73	56.63	64.36	88.20	-23.84	Peak	167	27	P
3	6855.00	9.48	85.00	94.48	200.00	-105.52	Average	167	27	P
4	6855.00	9.48	98.89	108.37	200.00	-91.63	Peak	167	27	P
5	7125.00	9.92	42.16	52.08	68.20	-16.12	Average	167	27	P
6	7125.00	9.92	56.19	66.11	88.20	-22.09	Peak	167	27	P
7	13710.00	21.36	27.57	48.93	68.20	-19.27	Average	100	166	P
8	13710.00	21.36	42.12	63.48	88.20	-24.72	Peak	100	166	P
9	20565.00	9.83	41.52	51.35	63.54	-12.19	Average	150	360	P
10	20565.00	9.83	54.81	64.64	83.54	-18.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH123 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

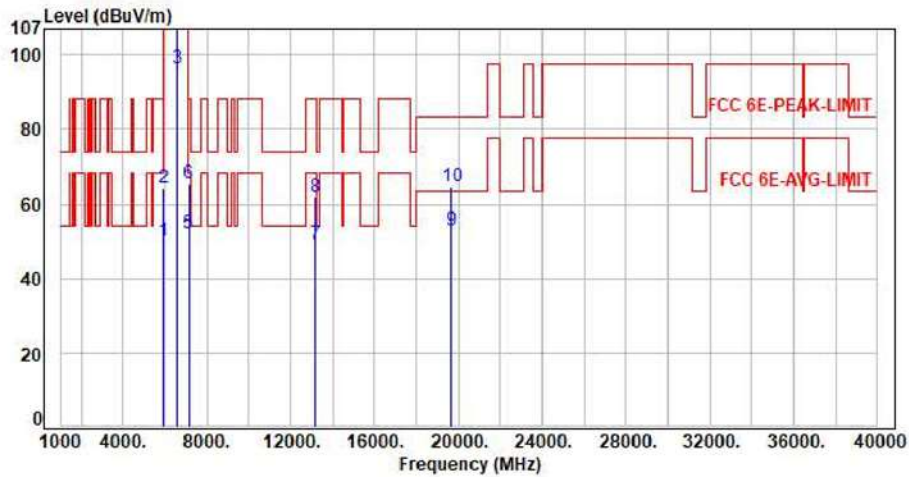



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points with their respective values and limits.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH123 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

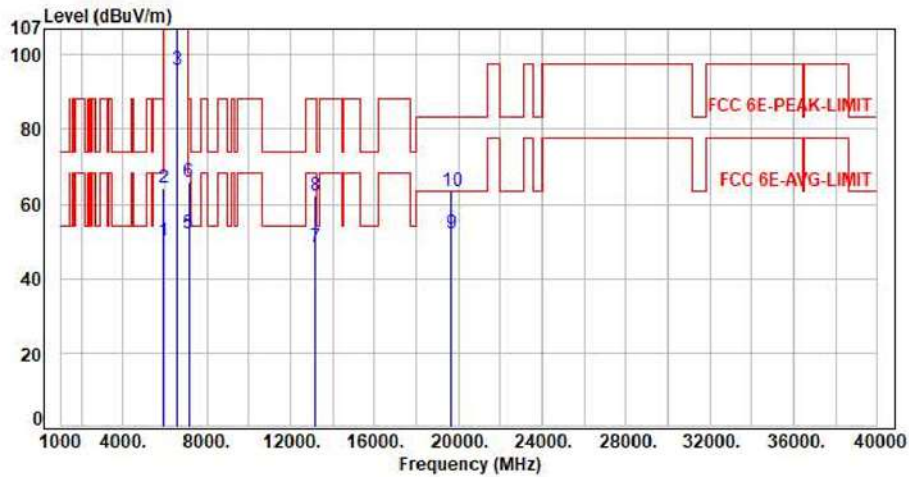

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.25	49.98	68.20	-18.22	Average	127	27	P
2	5925.00	7.73	56.40	64.13	88.20	-24.07	Peak	127	27	P
3	6565.00	8.72	87.18	95.90	200.00	-104.10	Average	127	27	P
4	6565.00	8.72	100.51	109.23	200.00	-90.77	Peak	127	27	P
5	7125.00	9.92	42.15	52.07	68.20	-16.13	Average	127	27	P
6	7125.00	9.92	55.89	65.81	88.20	-22.39	Peak	127	27	P
7	13130.00	19.16	29.43	48.59	68.20	-19.61	Average	100	170	P
8	13130.00	19.16	43.01	62.17	88.20	-26.03	Peak	100	170	P
9	19695.00	10.65	41.62	52.27	63.54	-11.27	Average	150	360	P
10	19695.00	10.65	52.74	63.39	83.54	-20.15	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH155 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

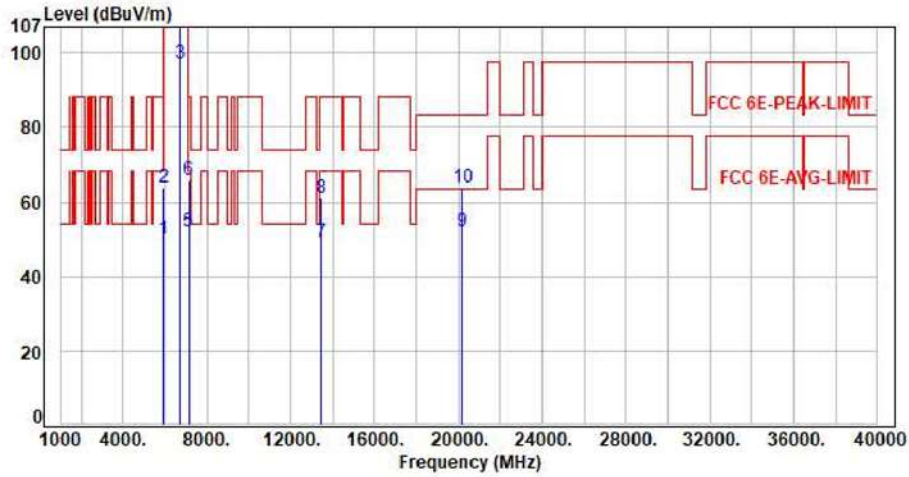



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points across various frequencies.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH155 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

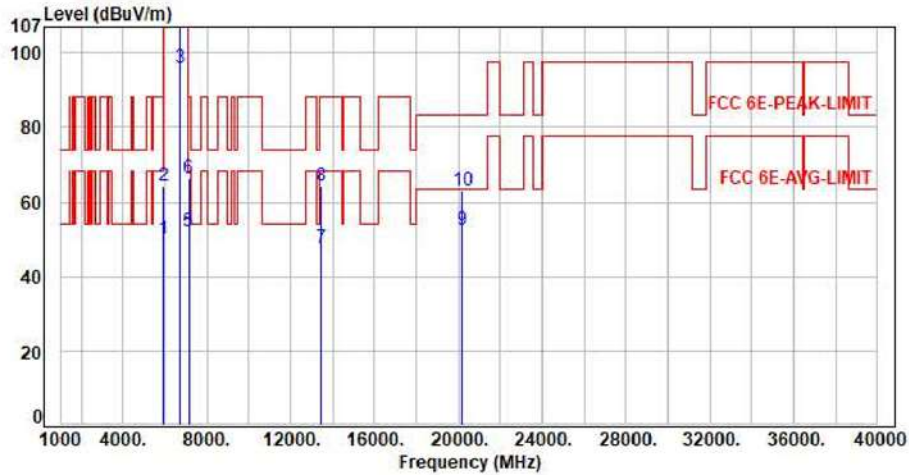


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	162	12	P
2	5925.00	7.73	56.52	64.25	88.20	-23.95	Peak	162	12	P
3	6725.00	9.22	86.83	96.05	200.00	-103.95	Average	162	12	P
4	6725.00	9.22	100.76	109.98	200.00	-90.02	Peak	162	12	P
5	7125.00	9.92	42.16	52.08	68.20	-16.12	Average	162	12	P
6	7125.00	9.92	56.38	66.30	88.20	-21.90	Peak	162	12	P
7	13450.00	20.62	27.11	47.73	68.20	-20.47	Average	100	188	P
8	13450.00	20.62	43.68	64.30	88.20	-23.90	Peak	100	188	P
9	20175.00	10.28	42.11	52.39	63.54	-11.15	Average	150	360	P
10	20175.00	10.28	52.74	63.02	83.54	-20.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH179 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

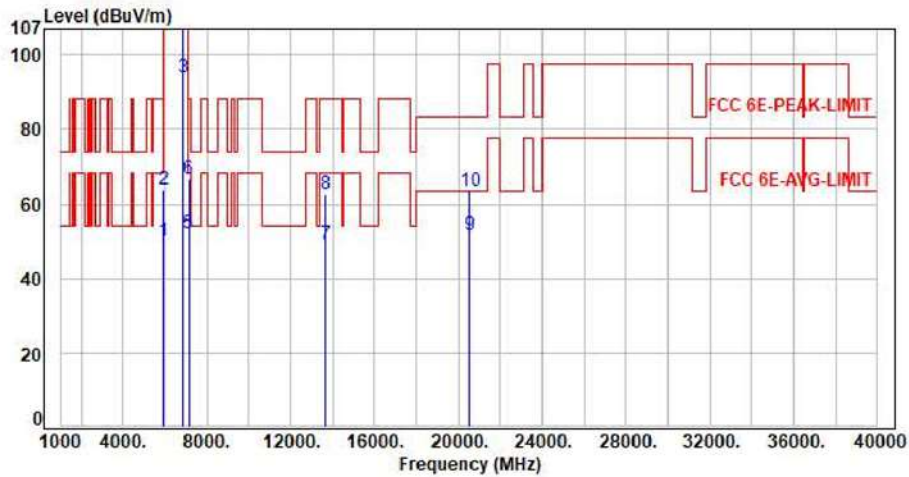

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.22	49.95	68.20	-18.25	Average	105	214	P
2	5925.00	7.73	56.05	63.78	88.20	-24.42	Peak	105	214	P
3	6845.00	9.48	84.46	93.94	200.00	-106.06	Average	105	214	P
4	6845.00	9.48	97.34	106.82	200.00	-93.18	Peak	105	214	P
5	7125.00	9.92	42.14	52.06	68.20	-16.14	Average	105	214	P
6	7125.00	9.92	56.92	66.84	88.20	-21.36	Peak	105	214	P
7	13690.00	21.28	28.10	49.38	68.20	-18.82	Average	100	118	P
8	13690.00	21.28	41.33	62.61	88.20	-25.59	Peak	100	118	P
9	20535.00	9.90	41.85	51.75	63.54	-11.79	Average	150	360	P
10	20535.00	9.90	53.44	63.34	83.54	-20.20	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH179 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

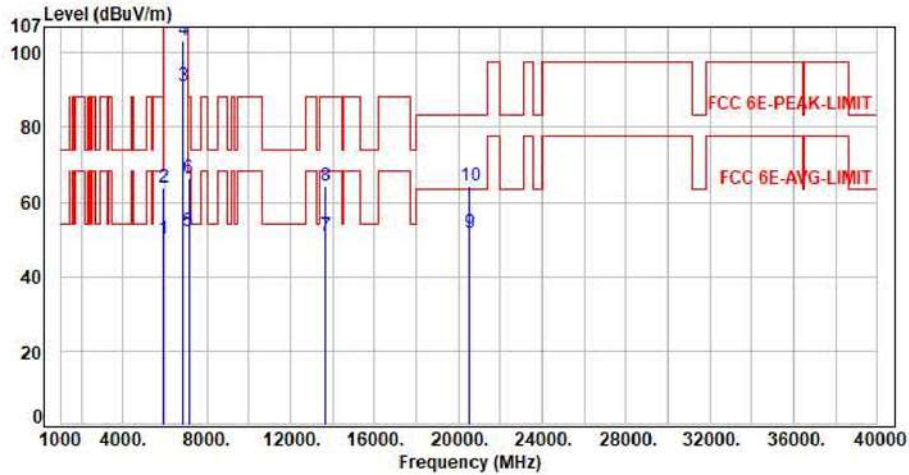



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points with their respective values and limits.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH135 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

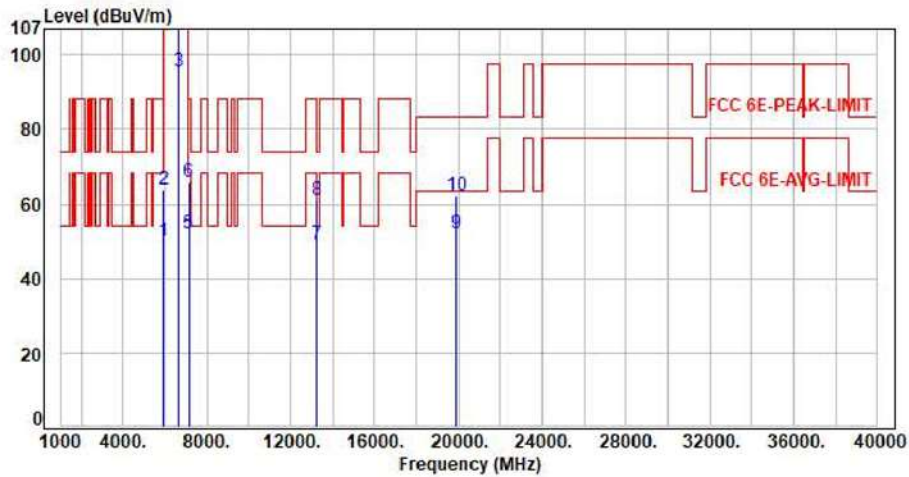


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.24	49.97	68.20	-18.23	Average	189	151	P
2	5925.00	7.73	56.21	63.94	88.20	-24.26	Peak	189	151	P
3	6625.00	8.97	86.78	95.75	200.00	-104.25	Average	189	151	P
4	6625.00	8.97	99.96	108.93	200.00	-91.07	Peak	189	151	P
5	7125.00	9.92	42.17	52.09	68.20	-16.11	Average	189	151	P
6	7125.00	9.92	56.01	65.93	88.20	-22.27	Peak	189	151	P
7	13250.00	19.81	29.51	49.32	54.00	-4.68	Average	100	138	P
8	13250.00	19.81	41.31	61.12	74.00	-12.88	Peak	100	138	P
9	19875.00	10.41	41.51	51.92	63.54	-11.62	Average	150	360	P
10	19875.00	10.41	51.88	62.29	83.54	-21.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH135 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

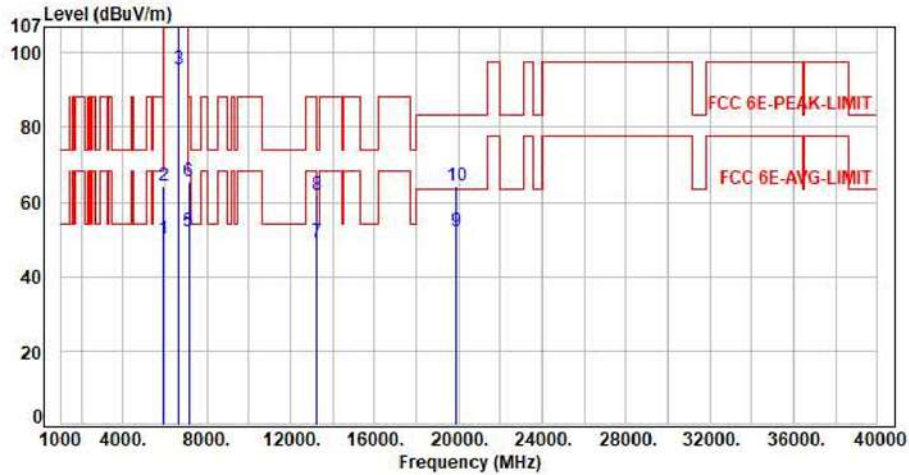

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.28	50.01	68.20	-18.19	Average	145	13	P
2	5925.00	7.73	56.52	64.25	88.20	-23.95	Peak	145	13	P
3	6625.00	8.97	86.56	95.53	200.00	-104.47	Average	145	13	P
4	6625.00	8.97	99.68	108.65	200.00	-91.35	Peak	145	13	P
5	7125.00	9.92	42.22	52.14	68.20	-16.06	Average	145	13	P
6	7125.00	9.92	55.68	65.60	88.20	-22.60	Peak	145	13	P
7	13250.00	19.81	29.23	49.04	54.00	-4.96	Average	100	192	P
8	13250.00	19.81	42.21	62.02	74.00	-11.98	Peak	100	192	P
9	19875.00	10.41	41.64	52.05	63.54	-11.49	Average	150	360	P
10	19875.00	10.41	53.86	64.27	83.54	-19.27	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH151 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

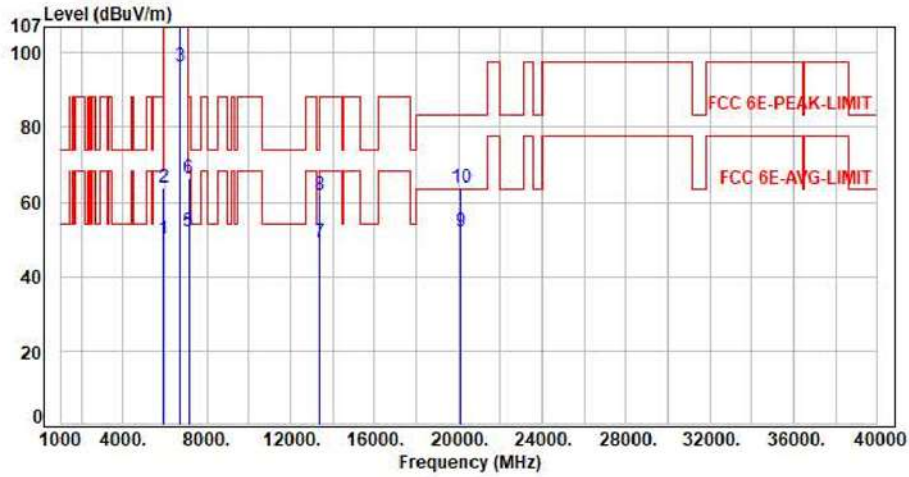



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. It lists 10 measurement points with their respective values and margins.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH151 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

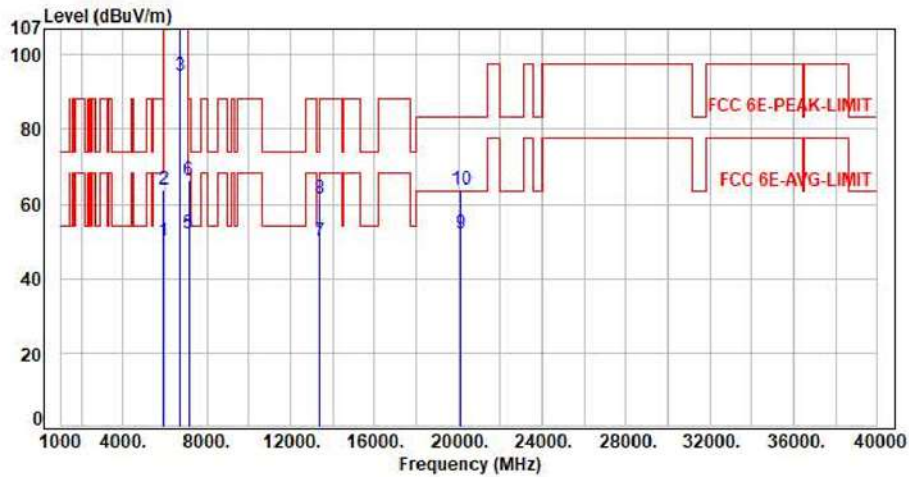


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.27	50.00	68.20	-18.20	Average	152	12	P
2	5925.00	7.73	56.13	63.86	88.20	-24.34	Peak	152	12	P
3	6705.00	9.18	85.24	94.42	200.00	-105.58	Average	152	12	P
4	6705.00	9.18	98.31	107.49	200.00	-92.51	Peak	152	12	P
5	7125.00	9.92	42.23	52.15	68.20	-16.05	Average	152	12	P
6	7125.00	9.92	56.33	66.25	88.20	-21.95	Peak	152	12	P
7	13410.00	20.53	29.51	50.04	68.20	-18.16	Average	100	132	P
8	13410.00	20.53	40.96	61.49	88.20	-26.71	Peak	100	132	P
9	20115.00	10.11	41.82	51.93	63.54	-11.61	Average	150	360	P
10	20115.00	10.11	53.87	63.98	83.54	-19.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH167 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

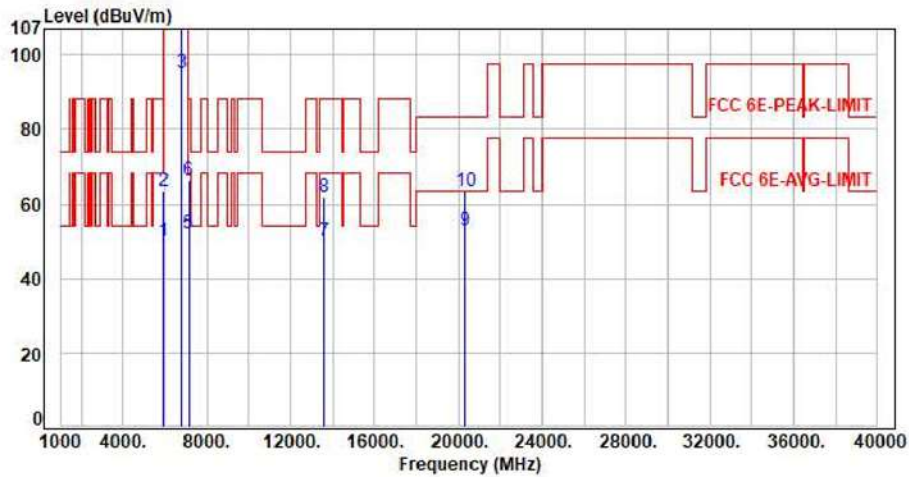


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	215	150	P
2	5925.00	7.73	55.76	63.49	88.20	-24.71	Peak	215	150	P
3	6785.00	9.41	85.93	95.34	200.00	-104.66	Average	215	150	P
4	6785.00	9.41	98.72	108.13	200.00	-91.87	Peak	215	150	P
5	7125.00	9.92	42.21	52.13	68.20	-16.07	Average	215	150	P
6	7125.00	9.92	56.43	66.35	88.20	-21.85	Peak	215	150	P
7	13570.00	20.80	29.33	50.13	68.20	-18.07	Average	100	131	P
8	13570.00	20.80	41.15	61.95	88.20	-26.25	Peak	100	131	P
9	20355.00	9.98	42.82	52.80	63.54	-10.74	Average	150	360	P
10	20355.00	9.98	53.66	63.64	83.54	-19.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH167 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

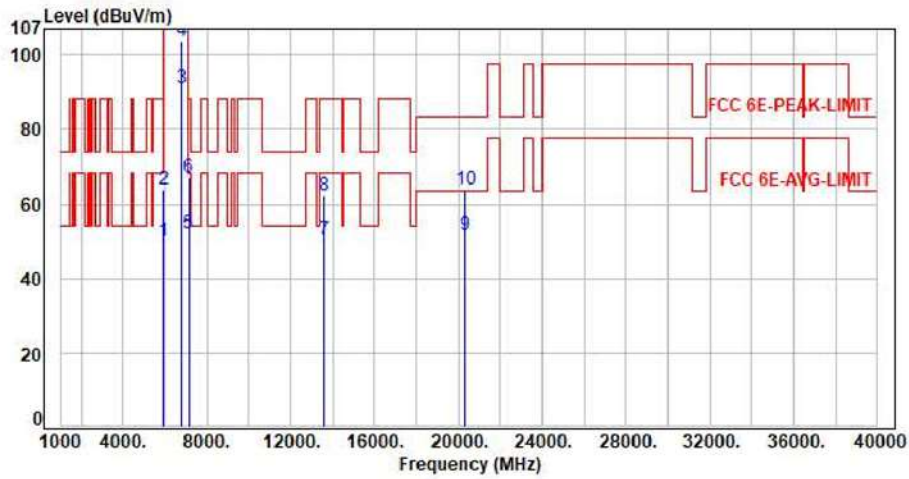


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.26	49.99	68.20	-18.21	Average	172	27	P
2	5925.00	7.73	56.33	64.06	88.20	-24.14	Peak	172	27	P
3	6785.00	9.41	81.88	91.29	200.00	-108.71	Average	172	27	P
4	6785.00	9.41	94.52	103.93	200.00	-96.07	Peak	172	27	P
5	7125.00	9.92	42.23	52.15	68.20	-16.05	Average	172	27	P
6	7125.00	9.92	57.01	66.93	88.20	-21.27	Peak	172	27	P
7	13570.00	20.80	29.61	50.41	68.20	-17.79	Average	100	221	P
8	13570.00	20.80	41.25	62.05	88.20	-26.15	Peak	100	221	P
9	20355.00	9.98	41.62	51.60	63.54	-11.94	Average	150	360	P
10	20355.00	9.98	53.88	63.86	83.54	-19.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x160 CH143 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

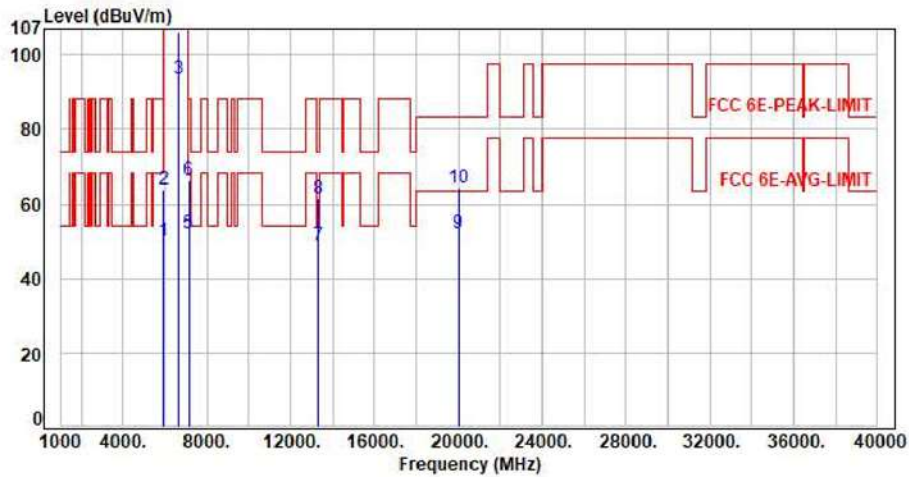


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.28	50.01	68.20	-18.19	Average	215	152	P
2	5925.00	7.73	56.26	63.99	88.20	-24.21	Peak	215	152	P
3	6665.00	9.10	84.59	93.69	200.00	-106.31	Average	215	152	P
4	6665.00	9.10	97.19	106.29	200.00	-93.71	Peak	215	152	P
5	7125.00	9.92	42.35	52.27	68.20	-15.93	Average	215	152	P
6	7125.00	9.92	56.34	66.26	88.20	-21.94	Peak	215	152	P
7	13330.00	20.17	28.62	48.79	54.00	-5.21	Average	100	156	P
8	13330.00	20.17	41.25	61.42	74.00	-12.58	Peak	100	156	P
9	19995.00	10.55	41.38	51.93	63.54	-11.61	Average	150	360	P
10	19995.00	10.55	53.68	64.23	83.54	-19.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x160 CH143 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

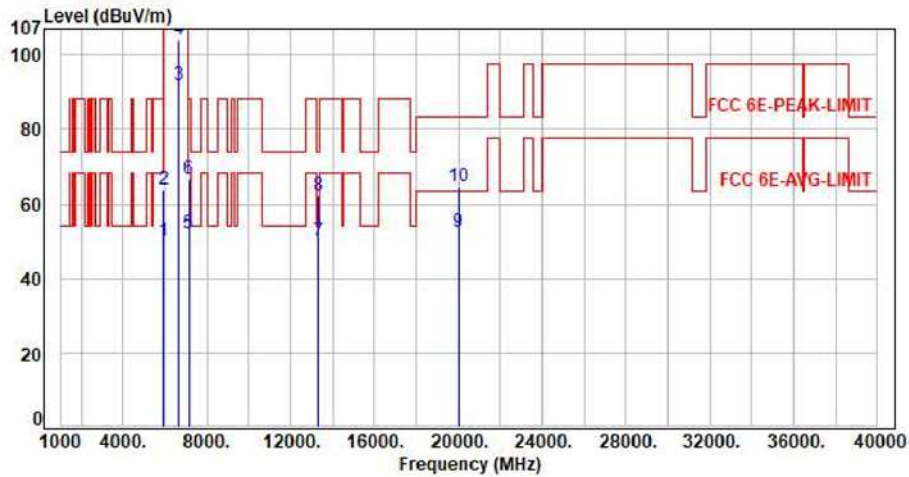


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.28	50.01	68.20	-18.19	Average	129	11	P
2	5925.00	7.73	56.22	63.95	88.20	-24.25	Peak	129	11	P
3	6665.00	9.10	82.90	92.00	200.00	-108.00	Average	129	11	P
4	6665.00	9.10	94.87	103.97	200.00	-96.03	Peak	129	11	P
5	7125.00	9.92	42.31	52.23	68.20	-15.97	Average	129	11	P
6	7125.00	9.92	56.63	66.55	88.20	-21.65	Peak	129	11	P
7	13330.00	20.17	29.91	50.08	54.00	-3.92	Average	100	187	P
8	13330.00	20.17	42.00	62.17	74.00	-11.83	Peak	100	187	P
9	19995.00	10.55	41.82	52.37	63.54	-11.17	Average	150	360	P
10	19995.00	10.55	53.96	64.51	83.54	-19.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH185 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

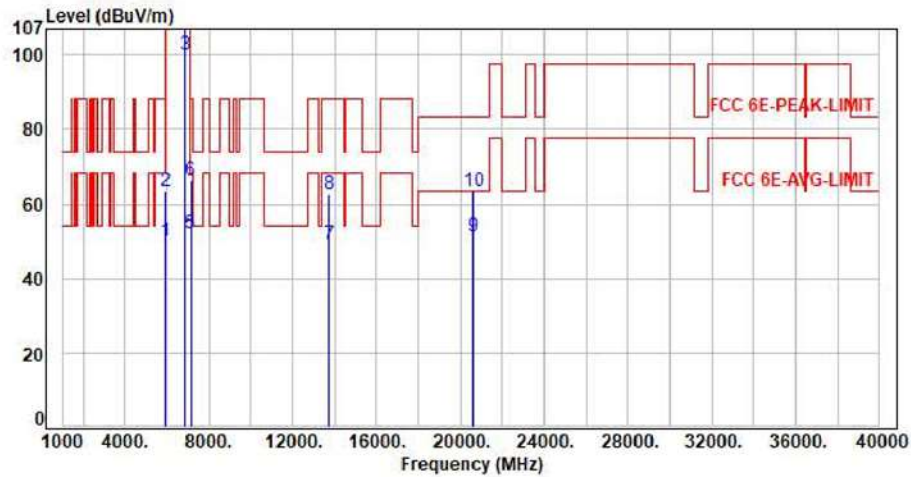


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.31	50.04	68.20	-18.16	Average	213	148	P
2	5925.00	7.73	55.77	63.50	88.20	-24.70	Peak	213	148	P
3	6875.00	9.47	90.44	99.91	200.00	-100.09	Average	213	148	P
4	6875.00	9.47	103.19	112.66	200.00	-87.34	Peak	213	148	P
5	7125.00	9.92	42.27	52.19	68.20	-16.01	Average	213	148	P
6	7125.00	9.92	56.33	66.25	88.20	-21.95	Peak	213	148	P
7	13750.00	21.47	27.81	49.28	68.20	-18.92	Average	100	225	P
8	13750.00	21.47	41.11	62.58	88.20	-25.62	Peak	100	225	P
9	20625.00	9.65	41.56	51.21	63.54	-12.33	Average	150	360	P
10	20625.00	9.65	53.62	63.27	83.54	-20.27	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH185 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

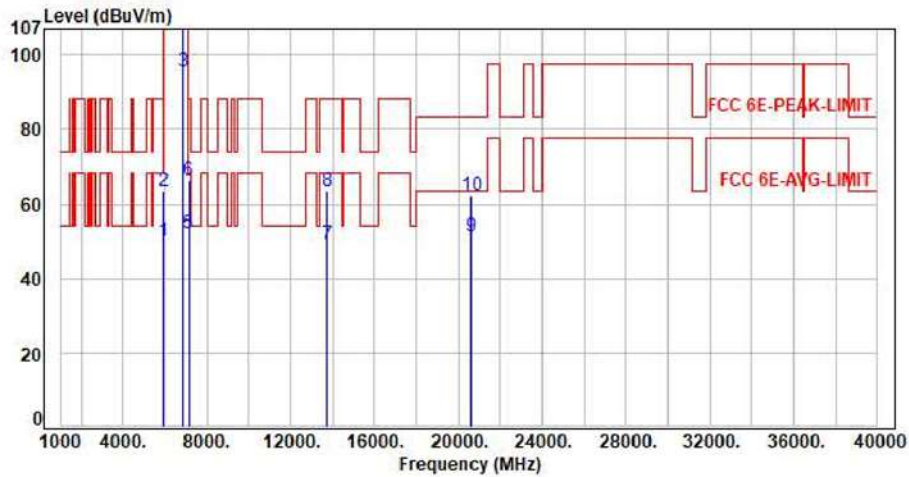


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.30	50.03	68.20	-18.17	Average	151	15	P
2	5925.00	7.73	55.90	63.63	88.20	-24.57	Peak	151	15	P
3	6875.00	9.47	86.03	95.50	200.00	-104.50	Average	151	15	P
4	6875.00	9.47	99.18	108.65	200.00	-91.35	Peak	151	15	P
5	7125.00	9.92	42.18	52.10	68.20	-16.10	Average	151	15	P
6	7125.00	9.92	56.39	66.31	88.20	-21.89	Peak	151	15	P
7	13750.00	21.47	27.75	49.22	68.20	-18.98	Average	100	223	P
8	13750.00	21.47	42.10	63.57	88.20	-24.63	Peak	100	223	P
9	20625.00	9.65	41.68	51.33	63.54	-12.21	Average	150	360	P
10	20625.00	9.65	52.66	62.31	83.54	-21.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH187 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

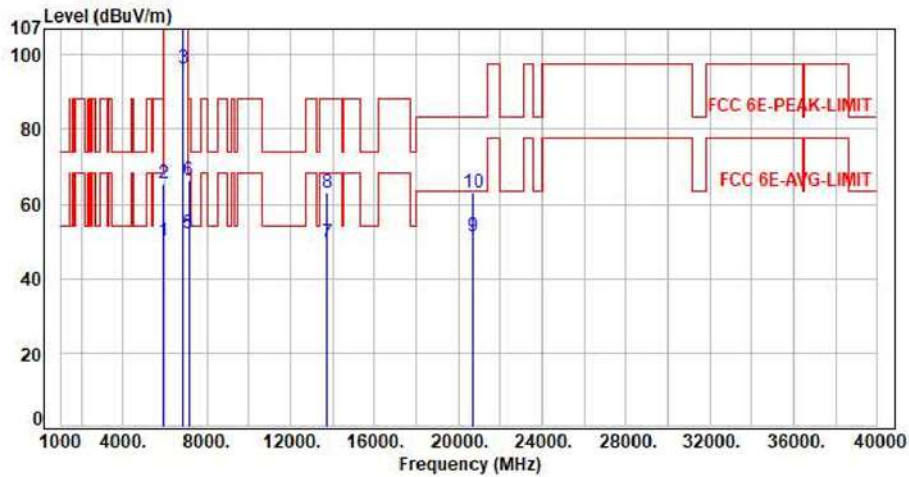


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.32	50.05	68.20	-18.15	Average	207	152	P
2	5925.00	7.73	57.63	65.36	88.20	-22.84	Peak	207	152	P
3	6885.00	9.47	86.92	96.39	200.00	-103.61	Average	207	152	P
4	6885.00	9.47	99.27	108.74	200.00	-91.26	Peak	207	152	P
5	7125.00	9.92	42.14	52.06	68.20	-16.14	Average	207	152	P
6	7125.00	9.92	56.35	66.27	88.20	-21.93	Peak	207	152	P
7	13770.00	21.56	28.14	49.70	68.20	-18.50	Average	100	199	P
8	13770.00	21.56	41.34	62.90	88.20	-25.30	Peak	100	199	P
9	20655.00	9.71	41.56	51.27	63.54	-12.27	Average	150	360	P
10	20655.00	9.71	53.44	63.15	83.54	-20.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH187 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

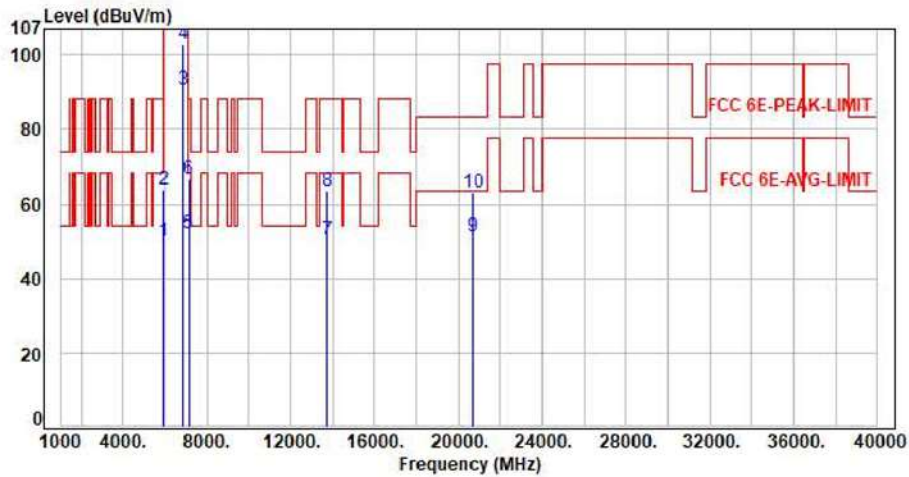


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.32	50.05	68.20	-18.15	Average	103	48	P
2	5925.00	7.73	55.96	63.69	88.20	-24.51	Peak	103	48	P
3	6885.00	9.47	81.46	90.93	200.00	-109.07	Average	103	48	P
4	6885.00	9.47	93.54	103.01	200.00	-96.99	Peak	103	48	P
5	7125.00	9.92	42.20	52.12	68.20	-16.08	Average	103	48	P
6	7125.00	9.92	56.82	66.74	88.20	-21.46	Peak	103	48	P
7	13770.00	21.56	28.69	50.25	68.20	-17.95	Average	100	135	P
8	13770.00	21.56	41.96	63.52	88.20	-24.68	Peak	100	135	P
9	20655.00	9.71	41.62	51.33	63.54	-12.21	Average	150	360	P
10	20655.00	9.71	53.28	62.99	83.54	-20.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH183 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

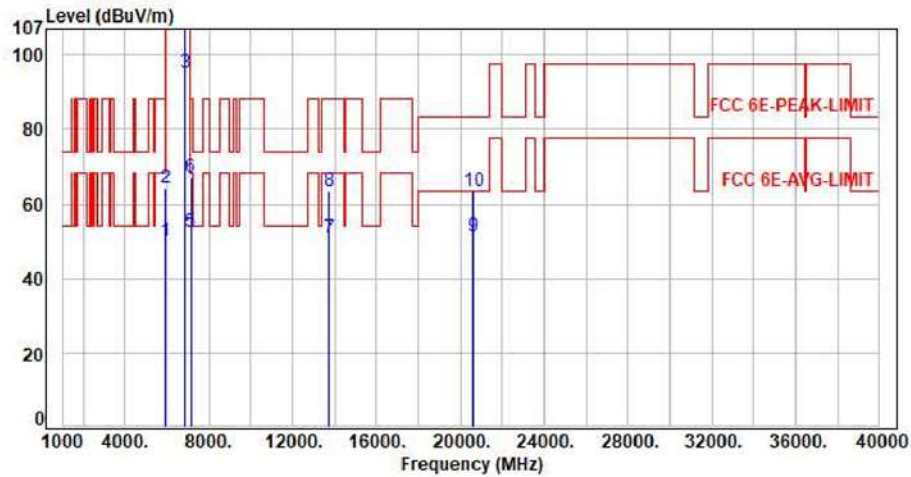


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.32	50.05	68.20	-18.15	Average	211	150	P
2	5925.00	7.73	56.47	64.20	88.20	-24.00	Peak	211	150	P
3	6865.00	9.47	85.84	95.31	200.00	-104.69	Average	211	150	P
4	6865.00	9.47	98.07	107.54	200.00	-92.46	Peak	211	150	P
5	7125.00	9.92	42.45	52.37	68.20	-15.83	Average	211	150	P
6	7125.00	9.92	57.01	66.93	88.20	-21.27	Peak	211	150	P
7	13730.00	21.42	29.63	51.05	68.20	-17.15	Average	100	188	P
8	13730.00	21.42	42.17	63.59	88.20	-24.61	Peak	100	188	P
9	20595.00	9.64	41.68	51.32	63.54	-12.22	Average	150	360	P
10	20595.00	9.64	53.68	63.32	83.54	-20.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH183 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

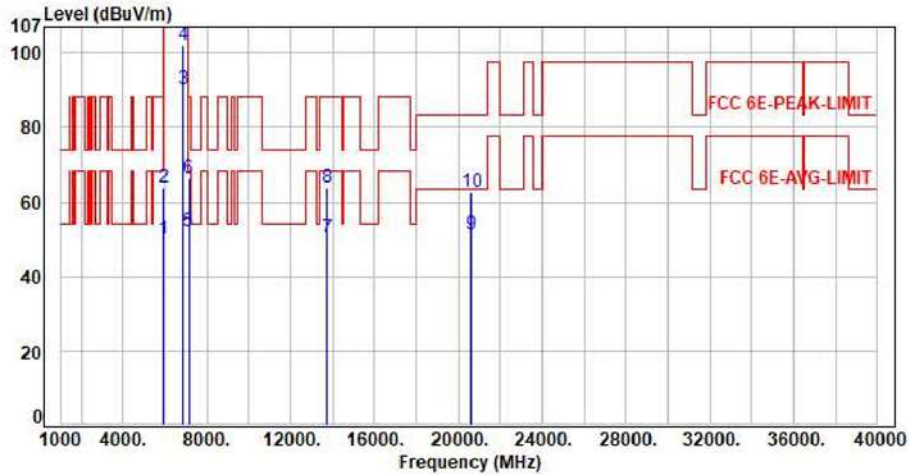


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.32	50.05	68.20	-18.15	Average	156	314	P
2	5925.00	7.73	56.07	63.80	88.20	-24.40	Peak	156	314	P
3	6865.00	9.47	80.84	90.31	200.00	-109.69	Average	156	314	P
4	6865.00	9.47	92.78	102.25	200.00	-97.75	Peak	156	314	P
5	7125.00	9.92	42.30	52.22	68.20	-15.98	Average	156	314	P
6	7125.00	9.92	56.33	66.25	88.20	-21.95	Peak	156	314	P
7	13730.00	21.42	29.14	50.56	68.20	-17.64	Average	100	196	P
8	13730.00	21.42	42.34	63.76	88.20	-24.44	Peak	100	196	P
9	20595.00	9.64	41.66	51.30	63.54	-12.24	Average	150	360	P
10	20595.00	9.64	53.16	62.80	83.54	-20.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH175 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

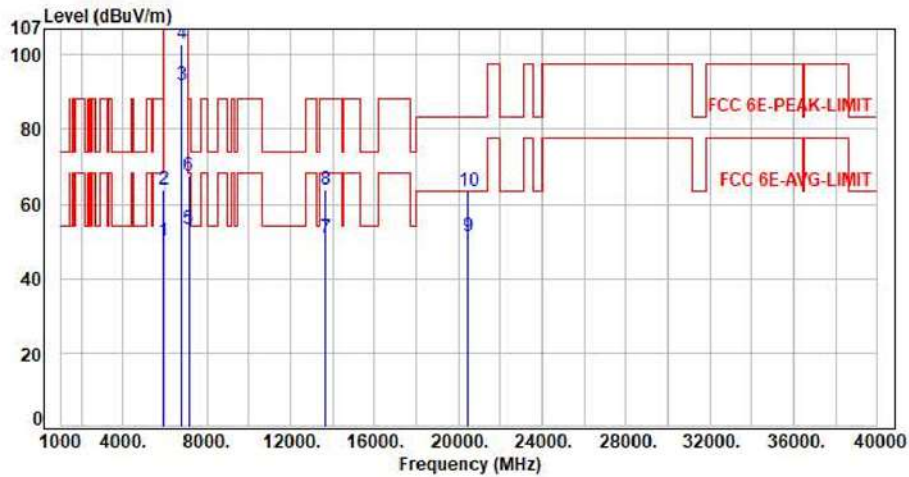

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.34	50.07	68.20	-18.13	Average	209	152	P
2	5925.00	7.73	56.15	63.88	88.20	-24.32	Peak	209	152	P
3	6825.00	9.47	82.46	91.93	200.00	-108.07	Average	209	152	P
4	6825.00	9.47	93.63	103.10	200.00	-96.90	Peak	209	152	P
5	7125.00	9.92	43.32	53.24	68.20	-14.96	Average	209	152	P
6	7125.00	9.92	57.68	67.60	88.20	-20.60	Peak	209	152	P
7	13650.00	21.01	29.65	50.66	68.20	-17.54	Average	100	321	P
8	13650.00	21.01	42.68	63.69	88.20	-24.51	Peak	100	321	P
9	20475.00	9.81	41.62	51.43	63.54	-12.11	Average	150	360	P
10	20475.00	9.81	53.69	63.50	83.54	-20.04	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x160 CH175 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

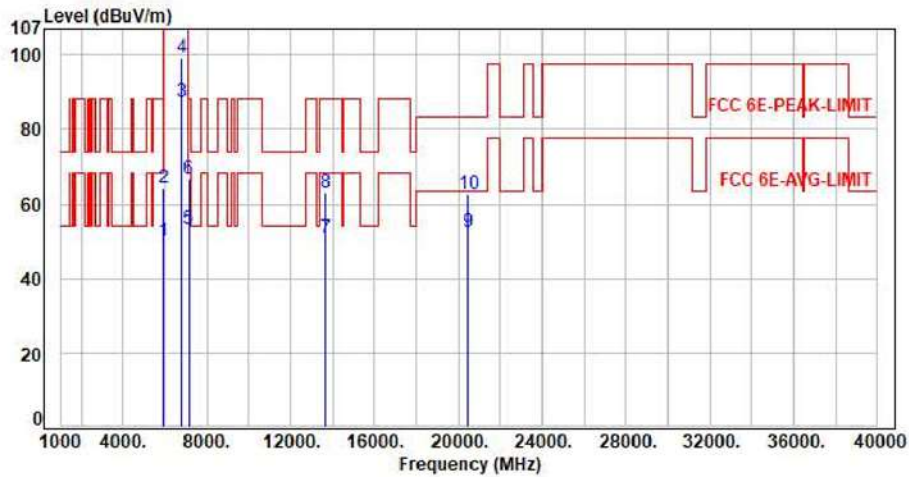



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 10 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH189 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

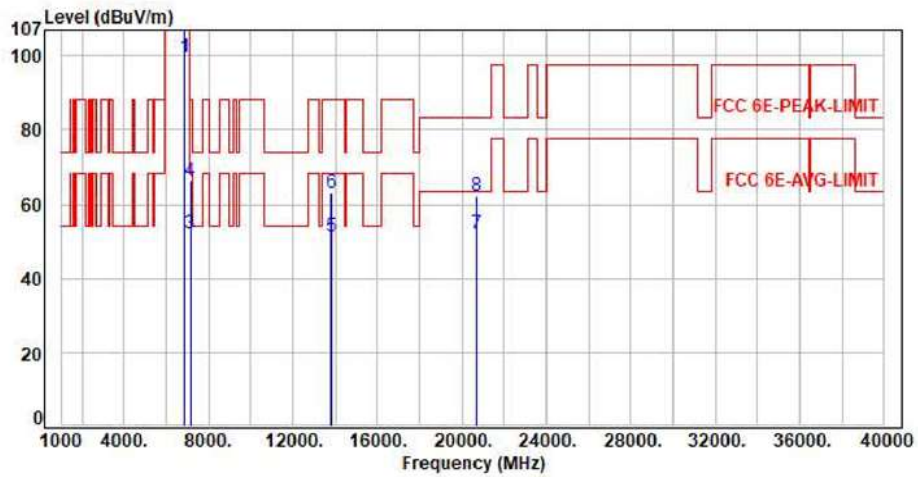

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	90.21	99.69	200.00	-100.31	Average	210	148	P
2	6895.00	9.48	102.18	111.66	200.00	-88.34	Peak	210	148	P
3	7125.00	9.92	42.19	52.11	68.20	-16.09	Average	210	148	P
4	7125.00	9.92	56.58	66.50	88.20	-21.70	Peak	210	148	P
5	13790.00	21.66	29.65	51.31	68.20	-16.89	Average	100	248	P
6	13790.00	21.66	41.42	63.08	88.20	-25.12	Peak	100	248	P
7	20685.00	9.82	42.31	52.13	63.54	-11.41	Average	150	360	P
8	20685.00	9.82	52.47	62.29	83.54	-21.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH189 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

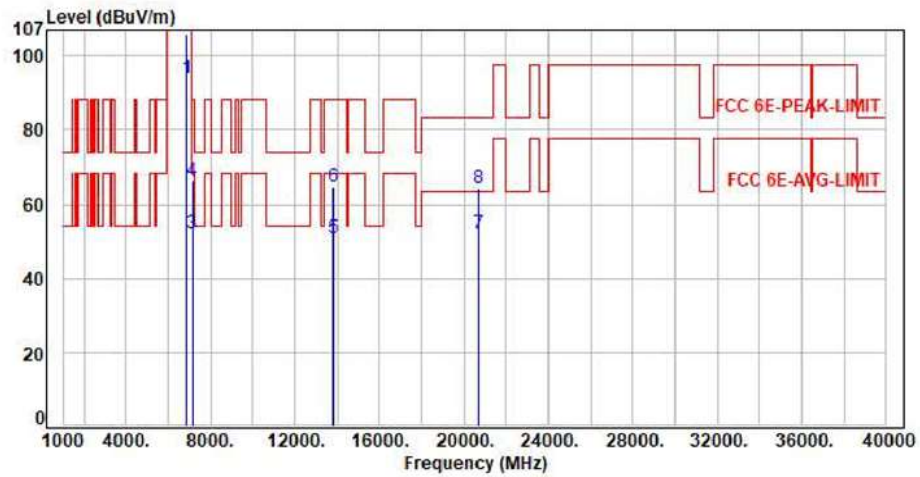



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH213 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

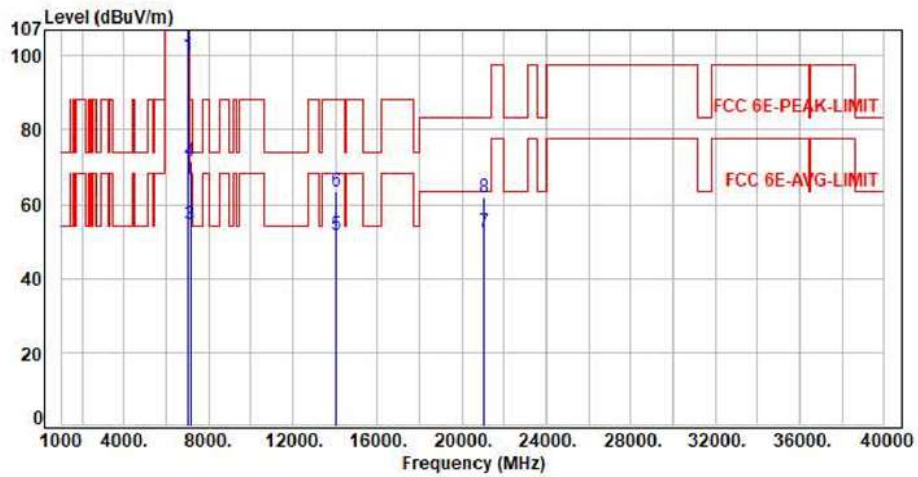


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	90.60	100.19	200.00	-99.81	Average	100	49	P
2	7015.00	9.59	103.41	113.00	200.00	-87.00	Peak	100	49	P
3	7125.00	9.92	44.52	54.44	68.20	-13.76	Average	100	49	P
4	7125.00	9.92	61.78	71.70	88.20	-16.50	Peak	100	49	P
5	14030.00	22.33	29.42	51.75	68.20	-16.45	Average	100	131	P
6	14030.00	22.33	41.14	63.47	88.20	-24.73	Peak	100	131	P
7	21045.00	10.28	42.31	52.59	63.54	-10.95	Average	150	360	P
8	21045.00	10.28	51.68	61.96	83.54	-21.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

MIMO



Test Mode : 2TX 11x20 CH213 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

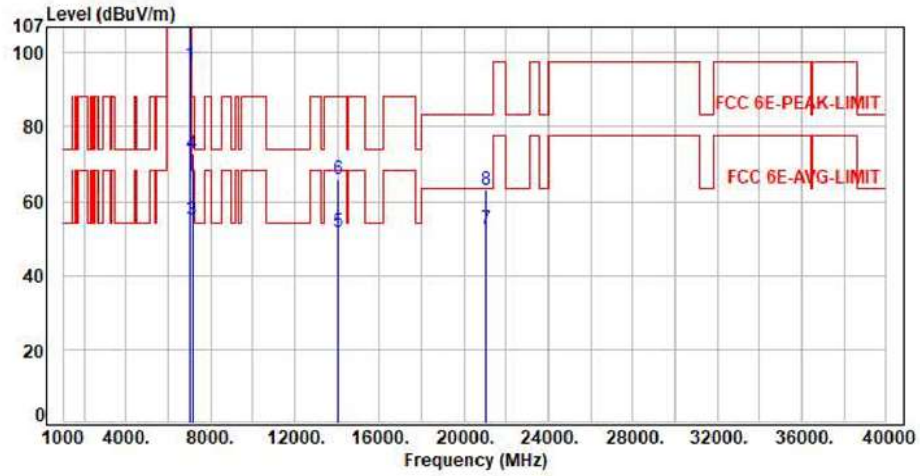


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	87.13	96.72	200.00	-103.28	Average	152	14	P
2	7015.00	9.59	100.20	109.79	200.00	-90.21	Peak	152	14	P
3	7125.00	9.92	44.98	54.90	68.20	-13.30	Average	152	14	P
4	7125.00	9.92	63.02	72.94	88.20	-15.26	Peak	152	14	P
5	14030.00	22.33	29.37	51.70	68.20	-16.50	Average	100	192	P
6	14030.00	22.33	43.61	65.94	88.20	-22.26	Peak	100	192	P
7	21045.00	10.28	42.16	52.44	63.54	-11.10	Average	150	360	P
8	21045.00	10.28	52.61	62.89	83.54	-20.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH229 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

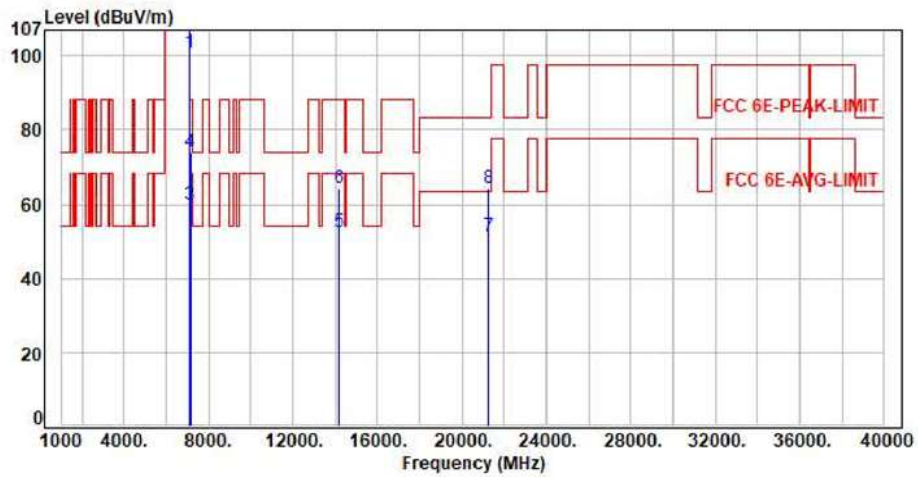


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	90.99	100.78	200.00	-99.22	Average	142	225	P
2	7095.00	9.79	104.67	114.46	200.00	-85.54	Peak	142	225	P
3	7125.00	9.92	50.03	59.95	68.20	-8.25	Average	142	225	P
4	7125.00	9.92	64.13	74.05	88.20	-14.15	Peak	142	225	P
5	14190.00	22.77	29.88	52.65	68.20	-15.55	Average	100	131	P
6	14190.00	22.77	41.66	64.43	88.20	-23.77	Peak	100	131	P
7	21285.00	10.94	40.51	51.45	63.54	-12.09	Average	150	360	P
8	21285.00	10.94	53.41	64.35	83.54	-19.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH229 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

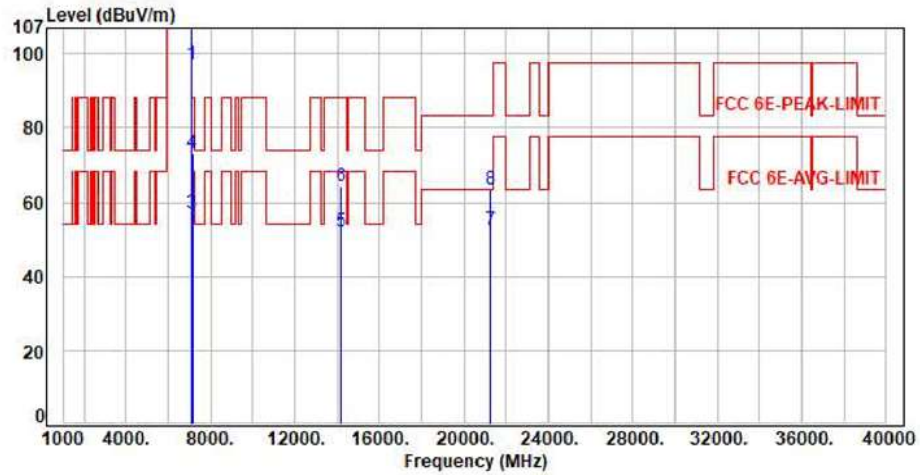


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	87.63	97.42	200.00	-102.58	Average	168	1	P
2	7095.00	9.79	101.35	111.14	200.00	-88.86	Peak	168	1	P
3	7125.00	9.92	47.22	57.14	68.20	-11.06	Average	168	1	P
4	7125.00	9.92	63.18	73.10	88.20	-15.10	Peak	168	1	P
5	14190.00	22.77	29.33	52.10	68.20	-16.10	Average	100	269	P
6	14190.00	22.77	41.66	64.43	88.20	-23.77	Peak	100	269	P
7	21285.00	10.94	41.52	52.46	63.54	-11.08	Average	150	360	P
8	21285.00	10.94	52.41	63.35	83.54	-20.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH233 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

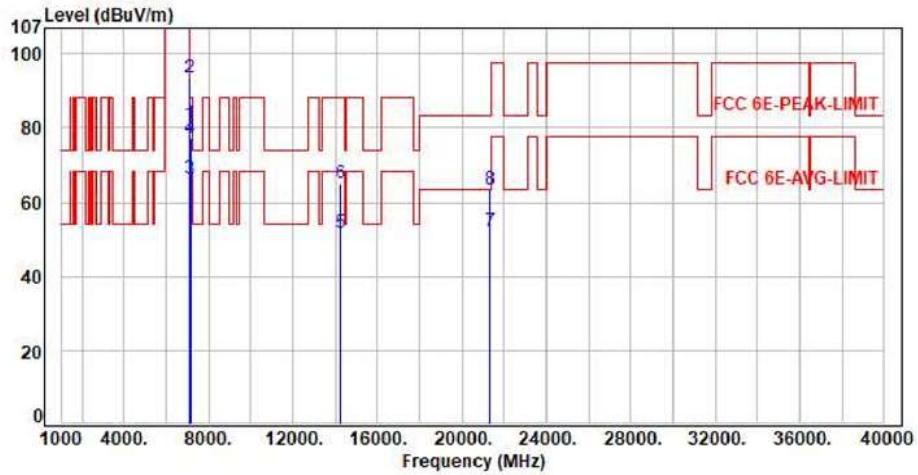


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	71.00	80.87	200.00	-119.13	Average	205	150	P
2	7115.00	9.87	83.53	93.40	200.00	-106.60	Peak	205	150	P
3	7125.00	9.92	56.54	66.46	68.20	-1.74	Average	205	150	P
4	7125.00	9.92	67.39	77.31	68.20	-10.89	Peak	205	150	P
5	14230.00	22.90	28.67	51.57	68.20	-16.63	Average	100	165	P
6	14230.00	22.90	42.06	64.96	68.20	-23.24	Peak	100	165	P
7	21345.00	10.74	41.52	52.26	63.54	-11.28	Average	150	360	P
8	21345.00	10.74	52.61	63.35	83.54	-20.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH233 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

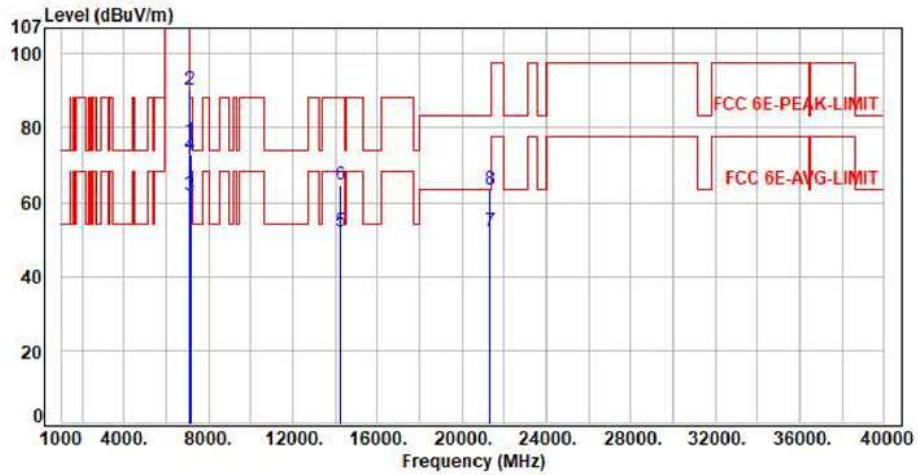


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	66.57	76.44	200.00	-123.56	Average	146	1	P
2	7115.00	9.87	80.34	90.21	200.00	-109.79	Peak	146	1	P
3	7125.00	9.92	51.82	61.74	68.20	-6.46	Average	146	1	P
4	7125.00	9.92	62.98	72.90	68.20	-15.30	Peak	146	1	P
5	14230.00	22.90	29.38	52.28	68.20	-15.92	Average	100	221	P
6	14230.00	22.90	41.89	64.79	68.20	-23.41	Peak	100	221	P
7	21345.00	10.74	41.28	52.02	63.54	-11.52	Average	150	360	P
8	21345.00	10.74	52.61	63.35	83.54	-20.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH195 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

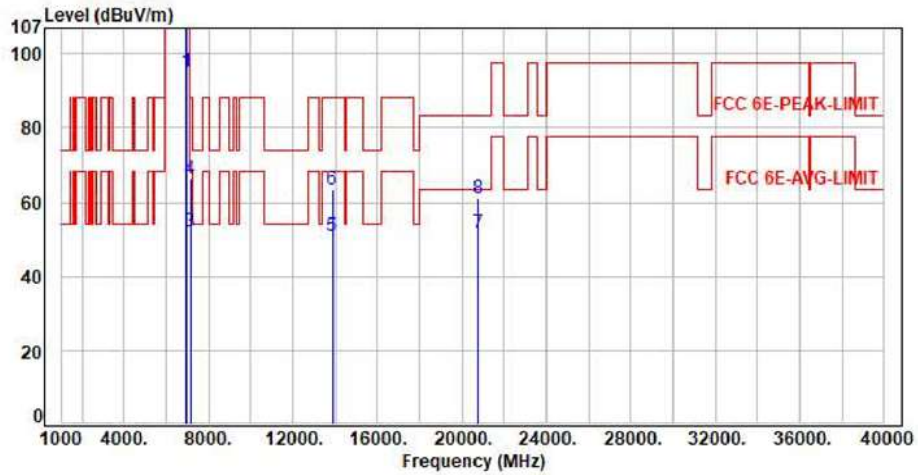


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	85.83	95.35	200.00	-104.65	Average	100	48	P
2	6925.00	9.52	99.09	108.61	200.00	-91.39	Peak	100	48	P
3	7125.00	9.92	42.19	52.11	68.20	-16.09	Average	100	48	P
4	7125.00	9.92	56.23	66.15	88.20	-22.05	Peak	100	48	P
5	13850.00	21.83	29.17	51.00	68.20	-17.20	Average	100	251	P
6	13850.00	21.83	41.66	63.49	88.20	-24.71	Peak	100	251	P
7	20775.00	9.75	41.95	51.70	63.54	-11.84	Average	150	360	P
8	20775.00	9.75	51.47	61.22	83.54	-22.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH195 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

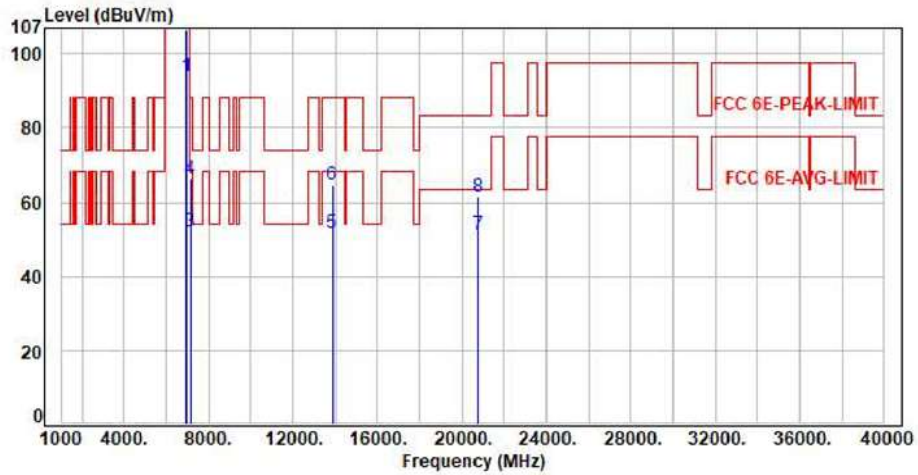


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	84.45	93.97	200.00	-106.03	Average	163	331	P
2	6925.00	9.52	97.18	106.70	200.00	-93.30	Peak	163	331	P
3	7125.00	9.92	42.17	52.09	68.20	-16.11	Average	163	331	P
4	7125.00	9.92	56.25	66.17	88.20	-22.03	Peak	163	331	P
5	13850.00	21.83	29.81	51.64	68.20	-16.56	Average	100	166	P
6	13850.00	21.83	42.80	64.63	88.20	-23.57	Peak	100	166	P
7	20775.00	9.75	41.58	51.33	63.54	-12.21	Average	150	360	P
8	20775.00	9.75	51.80	61.55	83.54	-21.99	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH211 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

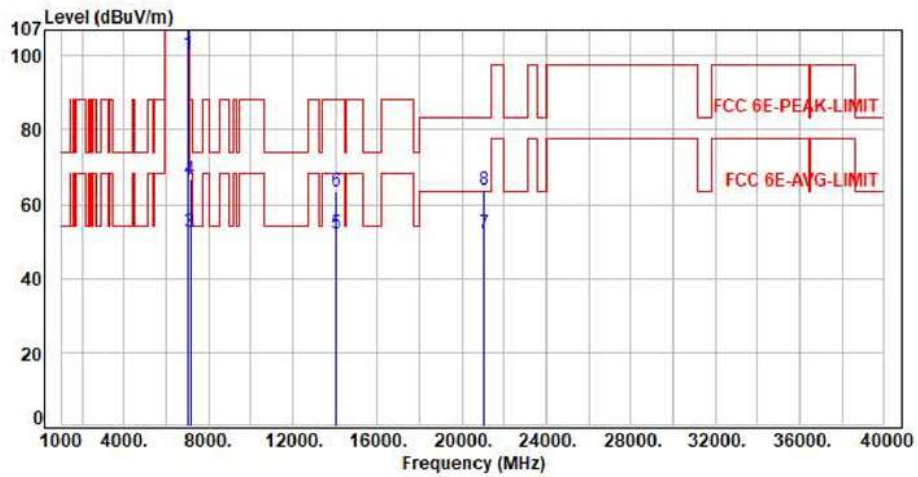


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	90.91	100.49	200.00	-99.51	Average	172	7	P
2	7005.00	9.58	102.83	112.41	200.00	-87.59	Peak	172	7	P
3	7125.00	9.92	42.57	52.49	68.20	-15.71	Average	172	7	P
4	7125.00	9.92	56.82	66.74	88.20	-21.46	Peak	172	7	P
5	14010.00	22.26	29.65	51.91	68.20	-16.29	Average	100	252	P
6	14010.00	22.26	41.17	63.43	88.20	-24.77	Peak	100	252	P
7	21015.00	10.08	41.86	51.94	63.54	-11.60	Average	150	360	P
8	21015.00	10.08	53.68	63.76	83.54	-19.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH211 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

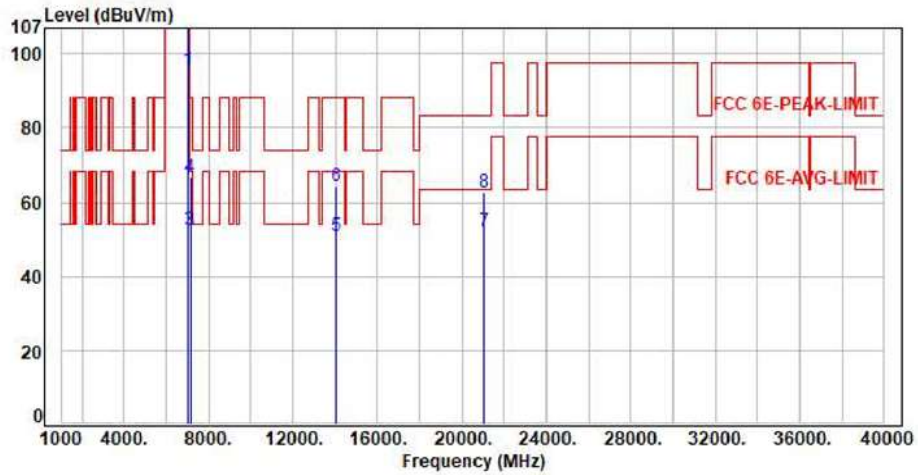

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.58	85.86	95.44	200.00	-104.56	Average	163	9	P
2	7005.00	9.58	99.10	108.68	200.00	-91.32	Peak	163	9	P
3	7125.00	9.92	42.41	52.33	68.20	-15.87	Average	163	9	P
4	7125.00	9.92	56.61	66.53	88.20	-21.67	Peak	163	9	P
5	14010.00	22.26	28.65	50.91	68.20	-17.29	Average	100	98	P
6	14010.00	22.26	42.21	64.47	88.20	-23.73	Peak	100	98	P
7	21015.00	10.08	41.82	51.90	63.54	-11.64	Average	150	360	P
8	21015.00	10.08	52.48	62.56	83.54	-20.98	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH227 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

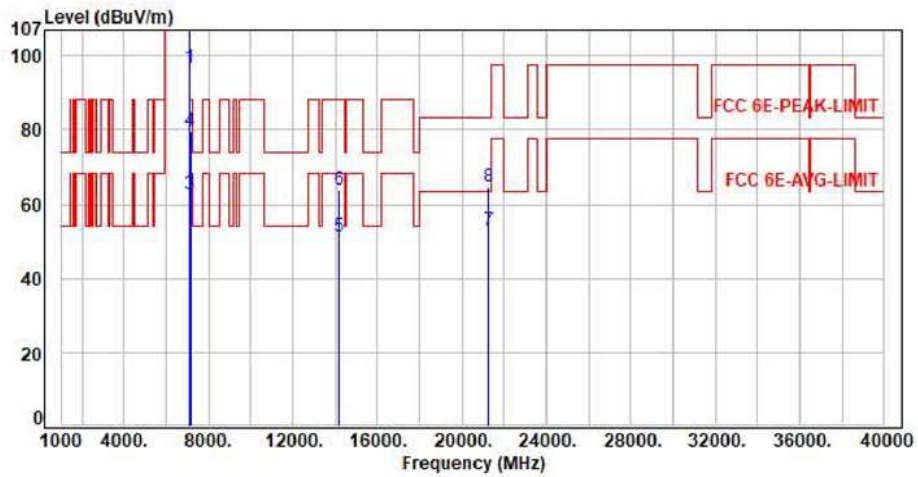



Table with 10 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x40 CH227 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

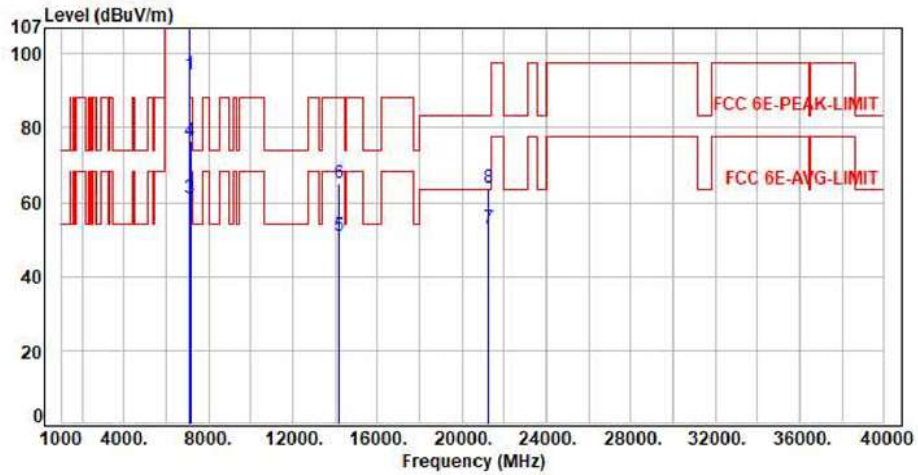


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.75	84.84	94.59	200.00	-105.41	Average	124	1	P
2	7085.00	9.75	96.96	106.71	200.00	-93.29	Peak	124	1	P
3	7125.00	9.92	51.02	60.94	68.20	-7.26	Average	124	1	P
4	7125.00	9.92	66.44	76.36	88.20	-11.84	Peak	124	1	P
5	14170.00	22.70	28.34	51.04	68.20	-17.16	Average	100	165	P
6	14170.00	22.70	42.33	65.03	88.20	-23.17	Peak	100	165	P
7	21255.00	11.04	41.82	52.86	63.54	-10.68	Average	150	360	P
8	21255.00	11.04	52.86	63.90	83.54	-19.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH199 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

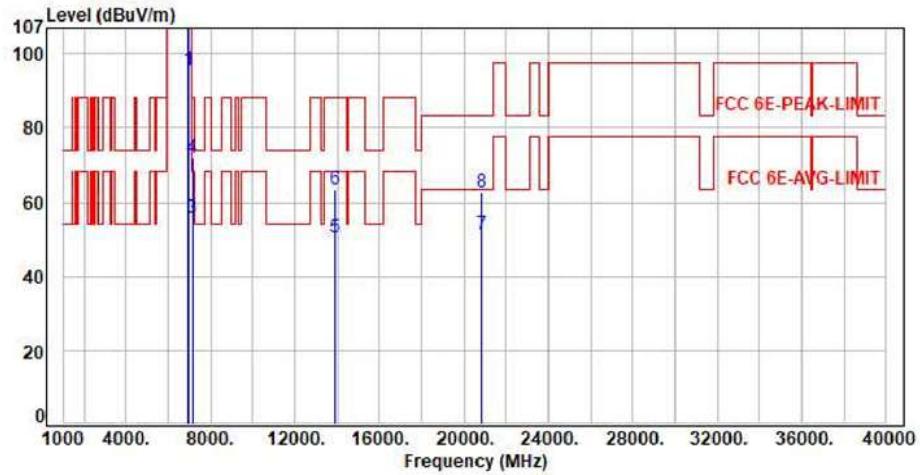


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	85.90	95.47	200.00	-104.53	Average	208	151	P
2	6945.00	9.57	98.24	107.81	200.00	-92.19	Peak	208	151	P
3	7125.00	9.92	45.99	55.91	68.20	-12.29	Average	208	151	P
4	7125.00	9.92	62.03	71.95	88.20	-16.25	Peak	208	151	P
5	13890.00	21.85	28.46	50.31	68.20	-17.89	Average	100	199	P
6	13890.00	21.85	41.48	63.33	88.20	-24.87	Peak	100	199	P
7	20835.00	9.94	41.33	51.27	63.54	-12.27	Average	150	360	P
8	20835.00	9.94	52.61	62.55	83.54	-20.99	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH199 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

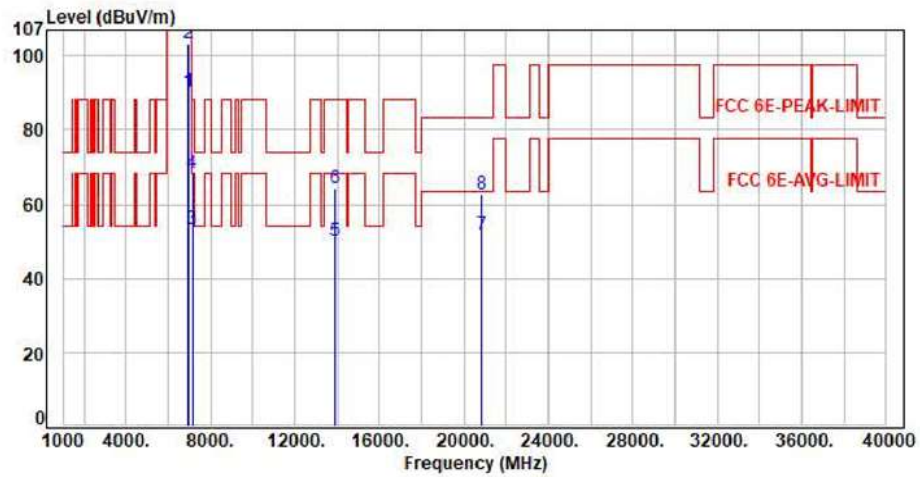


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	80.62	90.19	200.00	-109.81	Average	137	31	P
2	6945.00	9.57	93.97	103.54	200.00	-96.46	Peak	137	31	P
3	7125.00	9.92	43.33	53.25	68.20	-14.95	Average	137	31	P
4	7125.00	9.92	58.44	68.36	68.20	-19.84	Peak	137	31	P
5	13890.00	21.85	28.39	50.24	68.20	-17.96	Average	100	225	P
6	13890.00	21.85	42.33	64.18	68.20	-24.02	Peak	100	225	P
7	20835.00	9.94	41.88	51.82	63.54	-11.72	Average	150	360	P
8	20835.00	9.94	52.64	62.58	83.54	-20.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH215 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

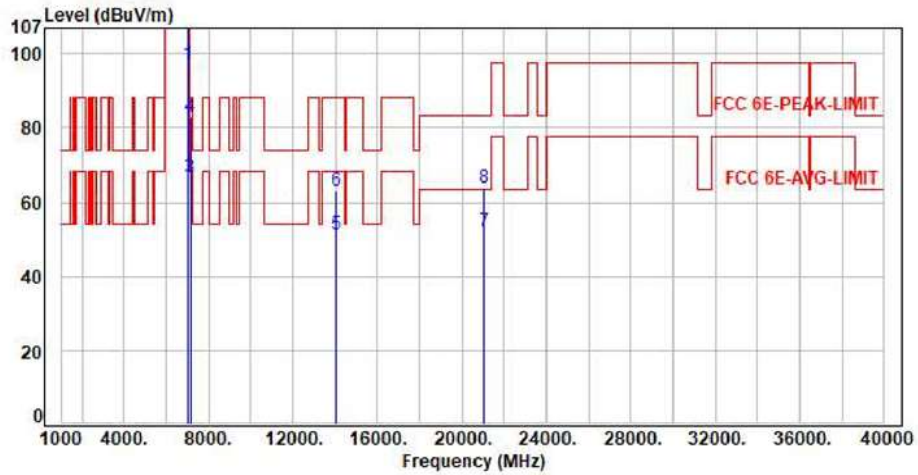


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	87.48	97.06	200.00	-102.94	Average	233	7	P
2	7025.00	9.58	100.17	109.75	200.00	-90.25	Peak	233	7	P
3	7125.00	9.92	56.91	66.83	68.20	-1.37	Average	233	7	P
4	7125.00	9.92	73.01	82.93	88.20	-5.27	Peak	233	7	P
5	14050.00	22.39	28.82	51.21	68.20	-16.99	Average	100	195	P
6	14050.00	22.39	40.55	62.94	88.20	-25.26	Peak	100	195	P
7	21075.00	10.28	41.88	52.16	63.54	-11.38	Average	150	360	P
8	21075.00	10.28	53.46	63.74	83.54	-19.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x80 CH215 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

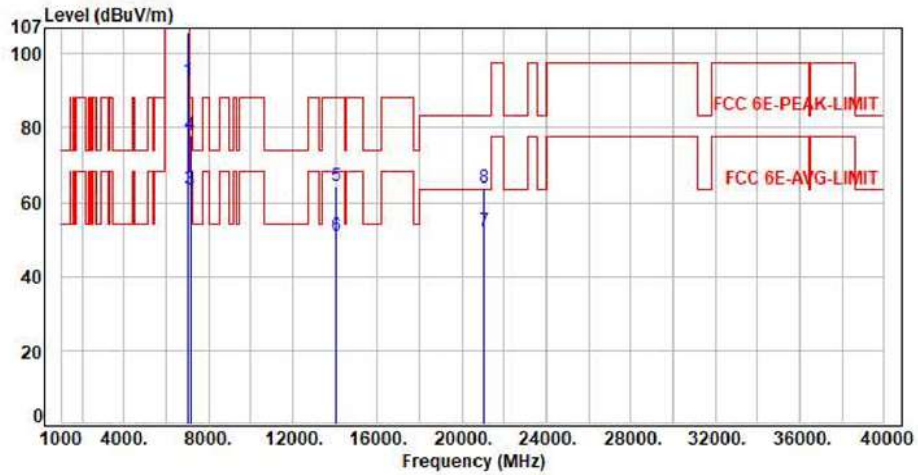


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.58	83.29	92.87	200.00	-107.13	Average	146	15	P
2	7025.00	9.58	96.11	105.69	200.00	-94.31	Peak	146	15	P
3	7125.00	9.92	53.65	63.57	68.20	-4.63	Average	146	15	P
4	7125.00	9.92	68.31	78.23	88.20	-9.97	Peak	146	15	P
5	14050.00	22.39	41.83	64.22	68.20	-3.98	Average	100	231	P
6	14050.00	22.39	28.47	50.86	88.20	-37.34	Peak	100	231	P
7	21075.00	10.28	41.88	52.16	63.54	-11.38	Average	150	360	P
8	21075.00	10.28	53.60	63.88	83.54	-19.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH207 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Vertical

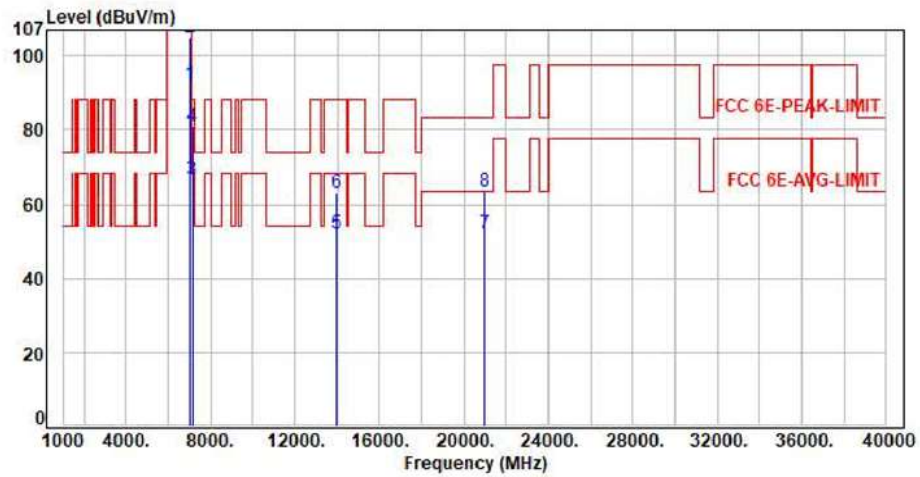


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	82.87	92.45	200.00	-107.55	Average	173	7	P
2	6985.00	9.58	95.40	104.98	200.00	-95.02	Peak	173	7	P
3	7125.00	9.92	56.79	66.71	68.20	-1.49	Average	173	7	P
4	7125.00	9.92	71.16	81.08	88.20	-7.12	Peak	173	7	P
5	13970.00	22.09	29.87	51.96	68.20	-16.24	Average	100	162	P
6	13970.00	22.09	41.00	63.09	88.20	-25.11	Peak	100	162	P
7	20955.00	9.99	41.88	51.87	63.54	-11.67	Average	150	360	P
8	20955.00	9.99	53.62	63.61	83.54	-19.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH207 NSS MCS0
Voltage : From Adatper(AC120V/60Hz)
Pol : Horizontal

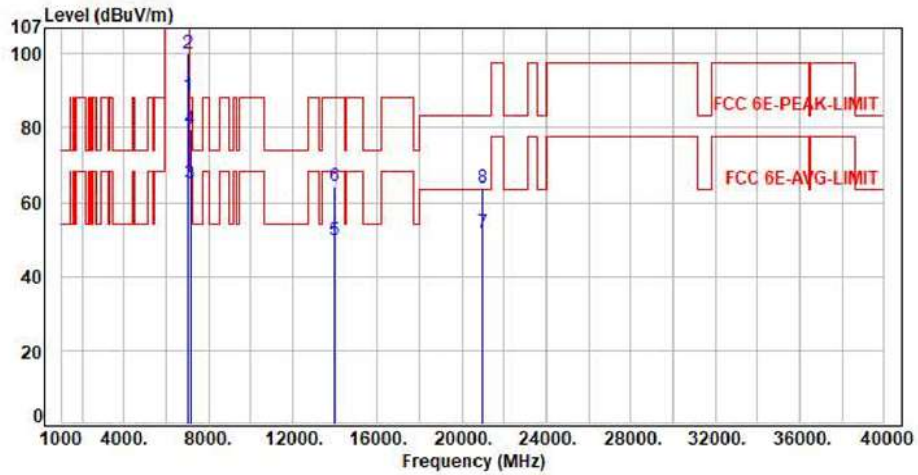

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	79.01	88.59	200.00	-111.41	Average	182	346	P
2	6985.00	9.58	90.60	100.18	200.00	-99.82	Peak	182	346	P
3	7125.00	9.92	55.17	65.09	68.20	-3.11	Average	182	346	P
4	7125.00	9.92	69.90	79.82	68.20	-8.38	Peak	182	346	P
5	13970.00	22.09	27.67	49.76	68.20	-18.44	Average	100	162	P
6	13970.00	22.09	42.04	64.13	68.20	-24.07	Peak	100	162	P
7	20955.00	9.99	41.86	51.85	63.54	-11.69	Average	150	360	P
8	20955.00	9.99	53.68	63.67	63.54	-19.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor