




Test Mode : ITX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

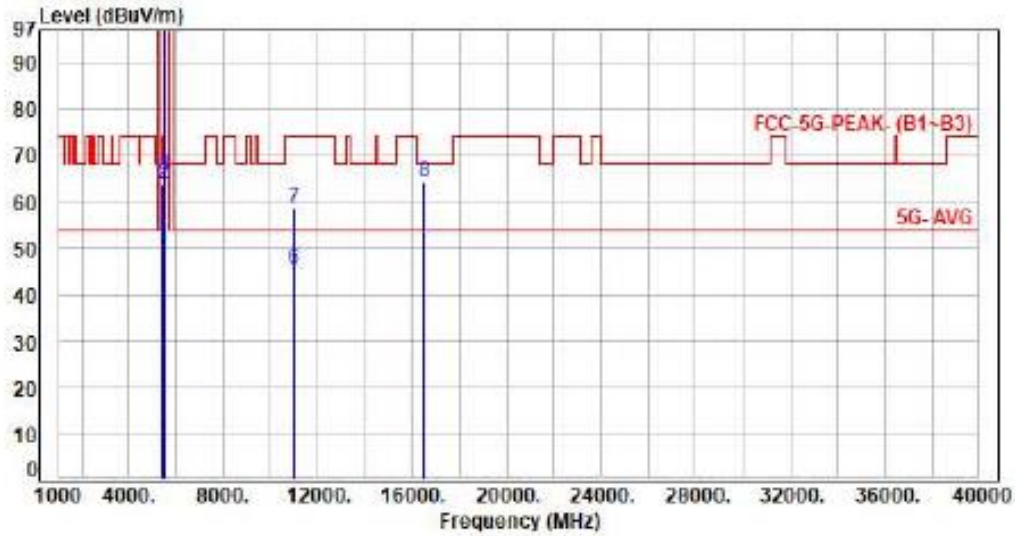


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 42.99 | 50.54 | 54.00 | -3.46 | Average | 100 | 345 | P |
| 2 | 5460.00 | 7.55 | 56.12 | 63.67 | 74.00 | -10.33 | Peak | 100 | 345 | P |
| 3 | 5470.00 | 7.58 | 58.17 | 65.75 | 68.20 | -2.45 | Peak | 100 | 345 | P |
| 4 | 5500.00 | 7.68 | 88.33 | 96.01 | 200.00 | -103.99 | Average | 100 | 345 | P |
| 5 | 5500.00 | 7.68 | 98.67 | 106.35 | 200.00 | -93.65 | Peak | 100 | 345 | P |
| 6 | 11000.00 | 16.20 | 29.23 | 45.43 | 54.00 | -8.57 | Average | 100 | 187 | P |
| 7 | 11000.00 | 16.20 | 42.45 | 58.65 | 74.00 | -15.35 | Peak | 100 | 187 | P |
| 8 | 16500.00 | 18.92 | 45.13 | 64.05 | 68.20 | -4.15 | Peak | 100 | 195 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH128 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

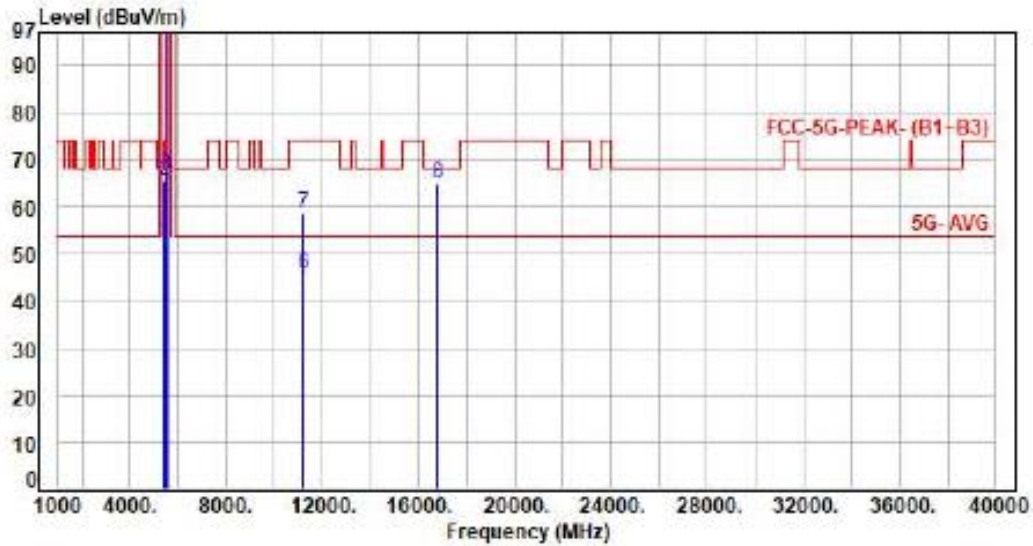


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 44.95 | 52.50 | 54.00 | -1.50 | Average | 190 | 334 | P |
| 2 | 5460.00 | 7.55 | 57.92 | 65.47 | 74.00 | -8.53 | Peak | 190 | 334 | P |
| 3 | 5470.00 | 7.58 | 59.06 | 66.64 | 68.20 | -1.56 | Peak | 190 | 334 | P |
| 4 | 5600.00 | 7.51 | 96.10 | 103.61 | 200.00 | -96.39 | Average | 190 | 334 | P |
| 5 | 5600.00 | 7.51 | 106.17 | 113.68 | 200.00 | -86.32 | Peak | 190 | 334 | P |
| 6 | 11200.00 | 16.28 | 29.38 | 45.66 | 54.00 | -8.34 | Average | 100 | 185 | P |
| 7 | 11200.00 | 16.28 | 42.34 | 58.62 | 74.00 | -15.38 | Peak | 100 | 185 | P |
| 8 | 16800.00 | 20.60 | 44.14 | 64.74 | 68.20 | -3.46 | Peak | 100 | 194 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

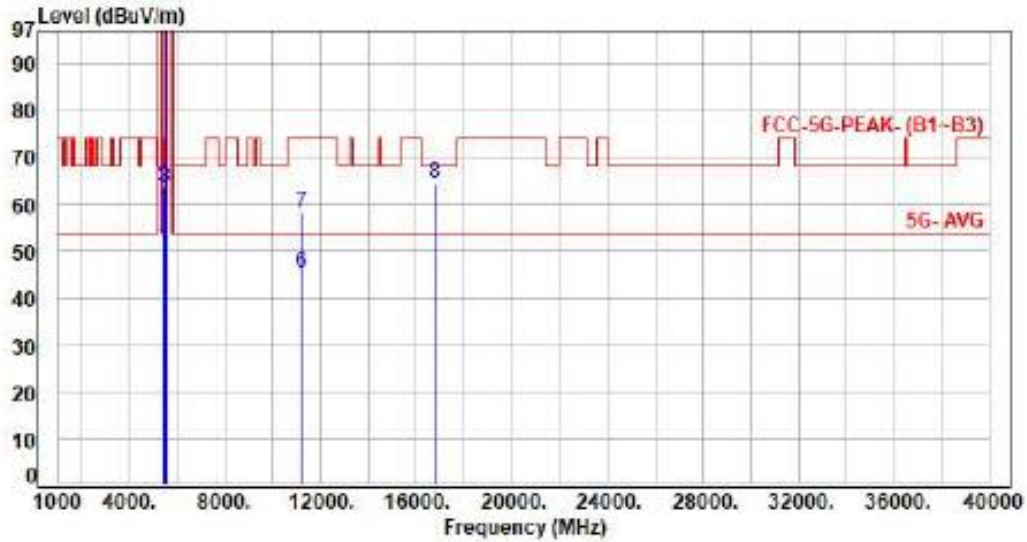


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 43.36 | 50.91 | 54.00 | -3.09 | Average | 100 | 357 | P |
| 2 | 5460.00 | 7.55 | 56.29 | 63.84 | 74.00 | -10.16 | Peak | 100 | 357 | P |
| 3 | 5470.00 | 7.58 | 55.90 | 63.48 | 68.20 | -4.72 | Peak | 100 | 357 | P |
| 4 | 5600.00 | 7.51 | 93.10 | 100.61 | 200.00 | -99.39 | Average | 100 | 357 | P |
| 5 | 5600.00 | 7.51 | 103.14 | 110.65 | 200.00 | -89.35 | Peak | 100 | 357 | P |
| 6 | 11200.00 | 16.28 | 29.25 | 45.53 | 54.00 | -8.47 | Average | 100 | 164 | P |
| 7 | 11200.00 | 16.28 | 42.05 | 58.34 | 74.00 | -15.66 | Peak | 100 | 164 | P |
| 8 | 16800.00 | 20.60 | 44.05 | 64.65 | 68.20 | -3.55 | Peak | 100 | 214 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

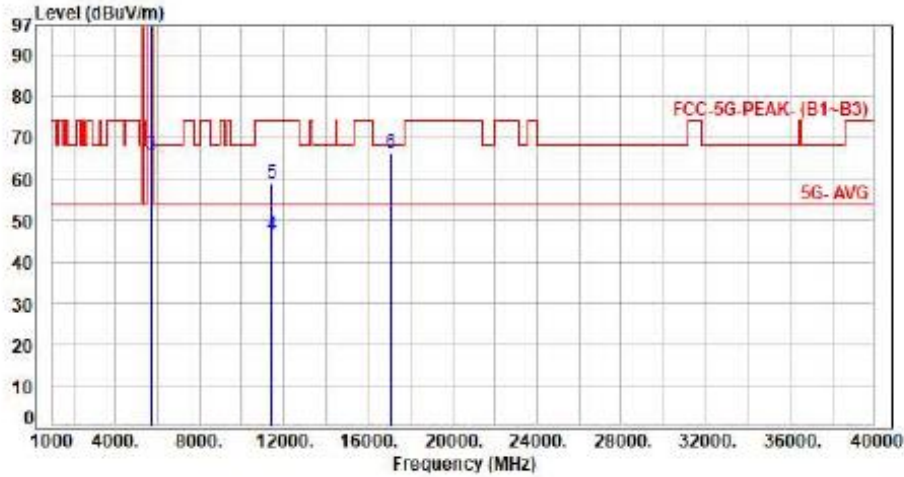


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5700.00 | 7.43 | 92.08 | 99.51 | 200.00 | -100.49 | Average | 204 | 100 | P |
| 2 | 5700.00 | 7.43 | 102.71 | 110.14 | 200.00 | -89.86 | Peak | 204 | 100 | P |
| 3 | 5725.00 | 7.43 | 58.42 | 65.85 | 68.20 | -2.35 | Peak | 204 | 100 | P |
| 4 | 11400.00 | 16.35 | 29.94 | 46.29 | 54.00 | -7.71 | Average | 100 | 187 | P |
| 5 | 11400.00 | 16.35 | 42.00 | 59.15 | 74.00 | -14.85 | Peak | 100 | 187 | P |
| 6 | 17100.00 | 21.91 | 44.42 | 66.33 | 68.20 | -1.87 | Peak | 100 | 174 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

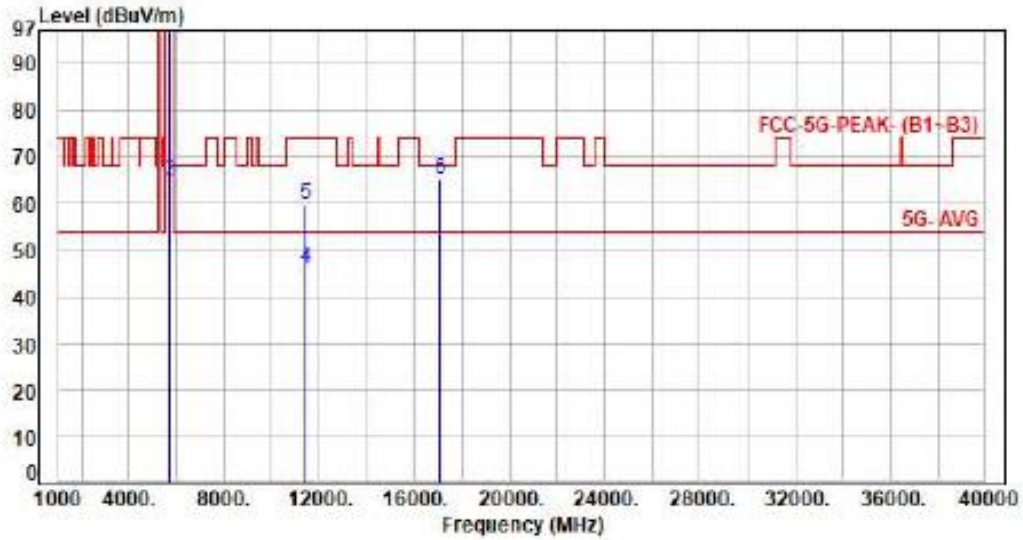


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5700.00 | 7.43 | 89.38 | 96.81 | 200.00 | -103.19 | Average | 100 | 313 | P |
| 2 | 5700.00 | 7.43 | 99.77 | 107.20 | 200.00 | -92.80 | Peak | 100 | 313 | P |
| 3 | 5725.00 | 7.43 | 57.34 | 64.77 | 68.20 | -3.43 | Peak | 100 | 313 | P |
| 4 | 11400.00 | 16.35 | 29.77 | 46.12 | 54.00 | -7.88 | Average | 100 | 20 | P |
| 5 | 11400.00 | 16.35 | 43.52 | 59.87 | 74.00 | -14.13 | Peak | 100 | 20 | P |
| 6 | 17100.00 | 21.91 | 43.37 | 65.28 | 68.20 | -2.92 | Peak | 100 | 221 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

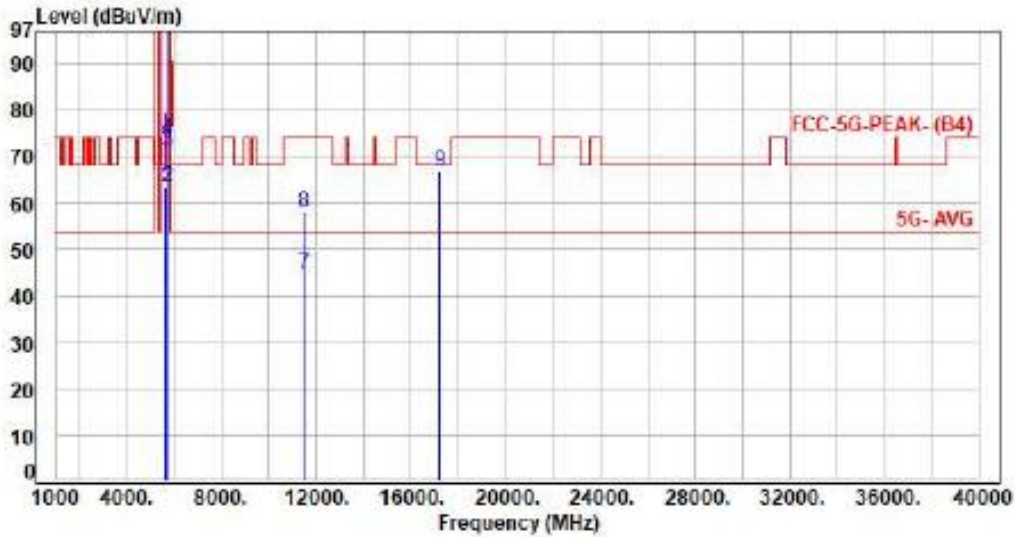


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5650.00 | 7.51 | 55.87 | 63.38 | 68.20 | -4.82 | Peak | 178 | 330 | P |
| 2 | 5700.00 | 7.43 | 56.15 | 63.58 | 105.20 | -41.62 | Peak | 178 | 330 | P |
| 3 | 5720.00 | 7.43 | 63.89 | 71.32 | 110.80 | -39.48 | Peak | 178 | 330 | P |
| 4 | 5725.00 | 7.43 | 66.24 | 73.67 | 122.20 | -48.53 | Peak | 178 | 330 | P |
| 5 | 5745.00 | 7.44 | 92.28 | 99.72 | 200.00 | -100.28 | Average | 178 | 330 | P |
| 6 | 5745.00 | 7.44 | 102.77 | 110.21 | 200.00 | -89.79 | Peak | 178 | 330 | P |
| 7 | 11490.00 | 16.52 | 27.95 | 44.47 | 54.00 | -9.53 | Average | 100 | 188 | P |
| 8 | 11490.00 | 16.52 | 41.49 | 58.01 | 74.00 | -15.99 | Peak | 100 | 188 | P |
| 9 | 17235.00 | 22.43 | 44.21 | 66.64 | 68.20 | -1.56 | Peak | 100 | 174 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

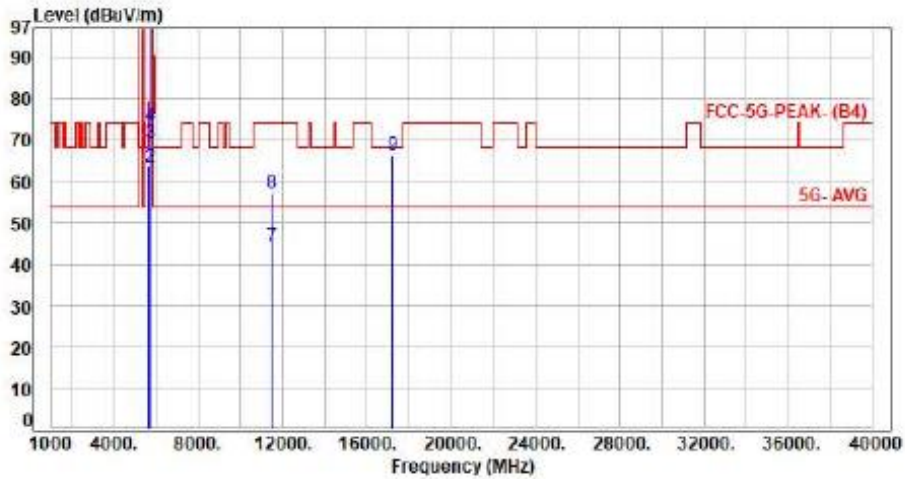


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5650.00 | 7.51 | 56.20 | 63.71 | 68.20 | -4.49 | Peak | 120 | 344 | P |
| 2 | 5700.00 | 7.43 | 55.84 | 63.27 | 105.20 | -41.93 | Peak | 120 | 344 | P |
| 3 | 5720.00 | 7.43 | 62.03 | 69.46 | 110.80 | -41.34 | Peak | 120 | 344 | P |
| 4 | 5725.00 | 7.43 | 66.03 | 73.46 | 122.20 | -48.74 | Peak | 120 | 344 | P |
| 5 | 5745.00 | 7.44 | 91.03 | 98.47 | 200.00 | -101.53 | Average | 120 | 344 | P |
| 6 | 5745.00 | 7.44 | 101.60 | 109.04 | 200.00 | -90.96 | Peak | 120 | 344 | P |
| 7 | 11490.00 | 16.52 | 27.82 | 44.34 | 54.00 | -9.66 | Average | 100 | 146 | P |
| 8 | 11490.00 | 16.52 | 40.49 | 57.01 | 74.00 | -16.99 | Peak | 100 | 146 | P |
| 9 | 17235.00 | 22.43 | 44.13 | 66.56 | 68.20 | -1.64 | Peak | 100 | 195 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

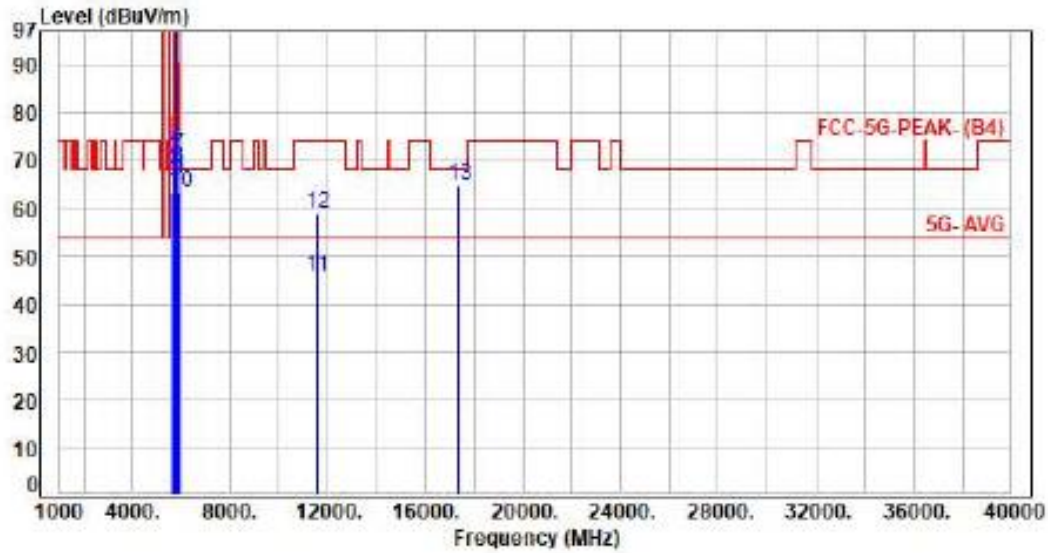


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5650.00 | 7.51 | 55.82 | 63.33 | 68.20 | -4.87 | Peak | 177 | 204 | P |
| 2 | 5700.00 | 7.43 | 60.95 | 68.38 | 105.20 | -36.82 | Peak | 177 | 204 | P |
| 3 | 5720.00 | 7.43 | 63.17 | 70.60 | 110.00 | -40.20 | Peak | 177 | 204 | P |
| 4 | 5725.00 | 7.43 | 64.95 | 72.38 | 122.20 | -49.82 | Peak | 177 | 204 | P |
| 5 | 5785.00 | 7.45 | 94.07 | 101.52 | 200.00 | -98.48 | Average | 177 | 204 | P |
| 6 | 5785.00 | 7.45 | 103.47 | 110.92 | 200.00 | -89.08 | Peak | 177 | 204 | P |
| 7 | 5850.00 | 7.47 | 63.83 | 71.30 | 122.20 | -50.90 | Peak | 177 | 204 | P |
| 8 | 5855.00 | 7.49 | 61.15 | 68.64 | 110.00 | -42.16 | Peak | 177 | 204 | P |
| 9 | 5875.00 | 7.57 | 58.62 | 66.19 | 105.20 | -39.01 | Peak | 177 | 204 | P |
| 10 | 5925.00 | 7.73 | 55.88 | 63.61 | 68.20 | -4.59 | Peak | 177 | 204 | P |
| 11 | 11570.00 | 16.76 | 28.90 | 45.66 | 54.00 | -8.34 | Average | 100 | 188 | P |
| 12 | 11570.00 | 16.76 | 42.09 | 58.85 | 74.00 | -15.15 | Peak | 100 | 188 | P |
| 13 | 17355.00 | 23.20 | 41.85 | 65.05 | 68.20 | -3.15 | Peak | 100 | 164 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

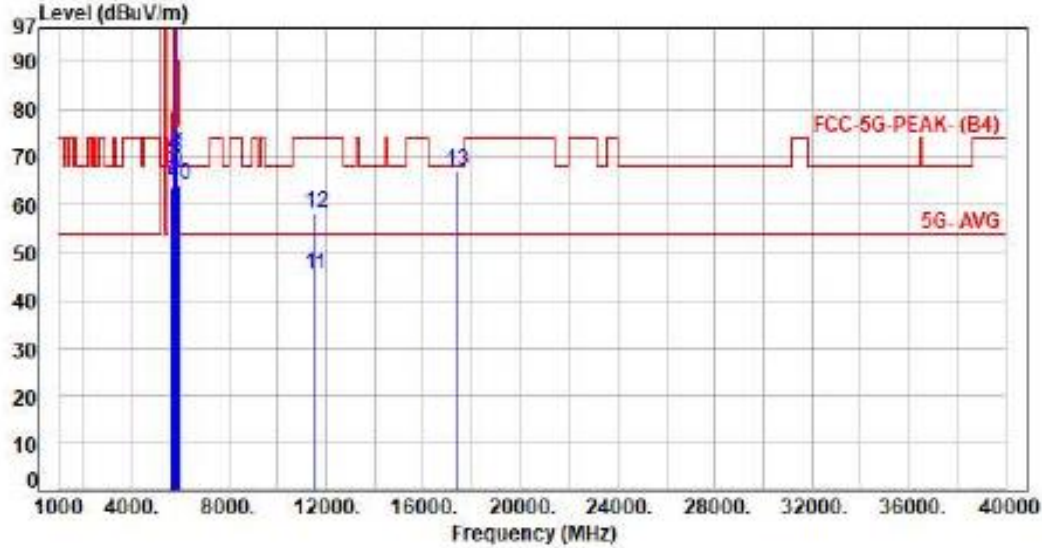


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5650.00 | 7.51 | 56.13 | 63.64 | 68.20 | -4.56 | Peak | 122 | 360 | P |
| 2 | 5700.00 | 7.43 | 57.82 | 65.25 | 105.20 | -39.95 | Peak | 122 | 360 | P |
| 3 | 5720.00 | 7.43 | 61.84 | 69.27 | 110.80 | -41.53 | Peak | 122 | 360 | P |
| 4 | 5725.00 | 7.43 | 63.02 | 70.45 | 122.20 | -51.75 | Peak | 122 | 360 | P |
| 5 | 5785.00 | 7.45 | 93.73 | 101.18 | 200.00 | -98.82 | Average | 122 | 360 | P |
| 6 | 5785.00 | 7.45 | 104.38 | 111.83 | 200.00 | -88.17 | Peak | 122 | 360 | P |
| 7 | 5850.00 | 7.47 | 63.33 | 70.80 | 122.20 | -51.40 | Peak | 122 | 360 | P |
| 8 | 5855.00 | 7.49 | 62.44 | 69.93 | 110.80 | -40.87 | Peak | 122 | 360 | P |
| 9 | 5875.00 | 7.57 | 59.05 | 66.62 | 105.20 | -38.58 | Peak | 122 | 360 | P |
| 10 | 5925.00 | 7.73 | 56.41 | 64.14 | 68.20 | -4.06 | Peak | 122 | 360 | P |
| 11 | 11570.00 | 16.76 | 28.70 | 45.46 | 54.00 | -8.54 | Average | 100 | 299 | P |
| 12 | 11570.00 | 16.76 | 41.38 | 58.14 | 74.00 | -15.86 | Peak | 100 | 299 | P |
| 13 | 17355.00 | 23.20 | 43.80 | 67.00 | 68.20 | -1.20 | Peak | 100 | 248 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH165 6Mbps
Voltage : From Aapter(AC120V/60Hz)
Pol : Vertical

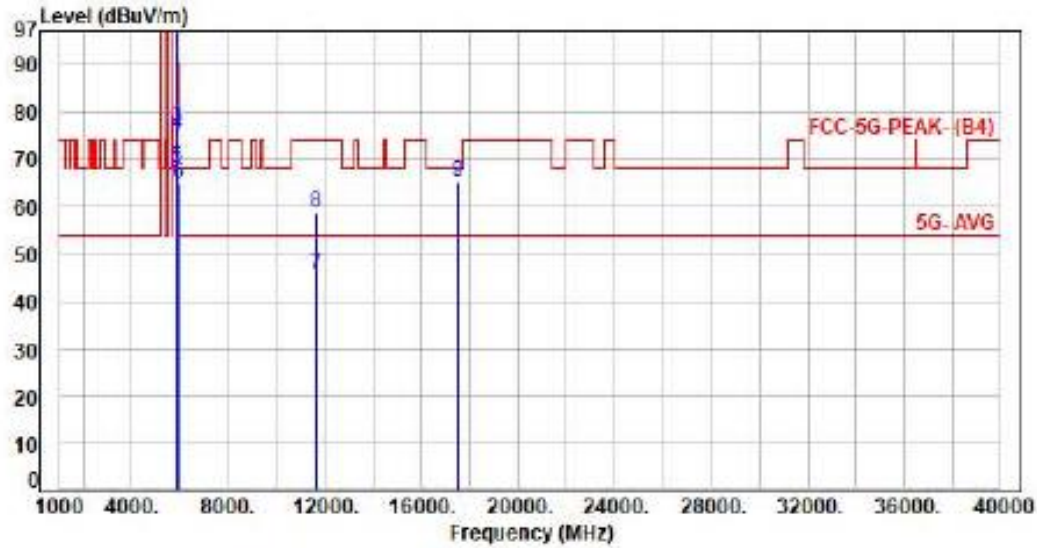


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5825.00 | 7.46 | 93.11 | 100.57 | 200.00 | -99.43 | Average | 140 | 208 | P |
| 2 | 5825.00 | 7.46 | 103.10 | 110.56 | 200.00 | -89.44 | Peak | 140 | 208 | P |
| 3 | 5850.00 | 7.47 | 69.22 | 76.69 | 122.20 | -45.51 | Peak | 140 | 208 | P |
| 4 | 5855.00 | 7.49 | 67.81 | 75.30 | 110.80 | -35.50 | Peak | 140 | 208 | P |
| 5 | 5875.00 | 7.57 | 68.77 | 68.34 | 105.20 | -36.86 | Peak | 140 | 208 | P |
| 6 | 5925.00 | 7.73 | 57.05 | 64.78 | 68.20 | -3.42 | Peak | 140 | 208 | P |
| 7 | 11650.00 | 16.91 | 28.73 | 45.64 | 54.00 | -8.36 | Average | 100 | 114 | P |
| 8 | 11650.00 | 16.91 | 41.87 | 58.78 | 74.00 | -15.22 | Peak | 100 | 114 | P |
| 9 | 17475.00 | 23.91 | 41.33 | 65.24 | 68.20 | -2.96 | Peak | 100 | 194 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

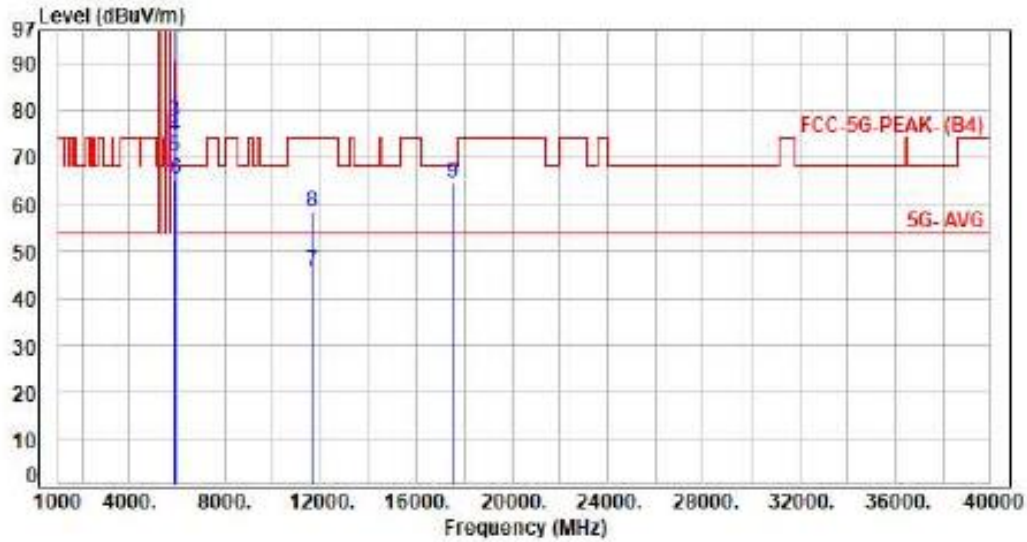


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5825.00 | 7.46 | 92.87 | 100.33 | 200.00 | -99.67 | Average | 110 | 0 | P |
| 2 | 5825.00 | 7.46 | 102.99 | 110.45 | 200.00 | -89.55 | Peak | 110 | 0 | P |
| 3 | 5850.00 | 7.47 | 70.32 | 77.79 | 122.20 | -44.41 | Peak | 110 | 0 | P |
| 4 | 5855.00 | 7.49 | 67.09 | 74.58 | 110.80 | -36.22 | Peak | 110 | 0 | P |
| 5 | 5875.00 | 7.57 | 62.64 | 70.21 | 105.20 | -34.99 | Peak | 110 | 0 | P |
| 6 | 5925.00 | 7.73 | 57.37 | 65.10 | 68.20 | -3.10 | Peak | 110 | 0 | P |
| 7 | 11650.00 | 16.91 | 28.73 | 45.64 | 54.00 | -8.36 | Average | 100 | 155 | P |
| 8 | 11650.00 | 16.91 | 41.53 | 58.44 | 74.00 | -15.56 | Peak | 100 | 155 | P |
| 9 | 17475.00 | 23.91 | 40.49 | 64.40 | 68.20 | -3.80 | Peak | 100 | 192 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

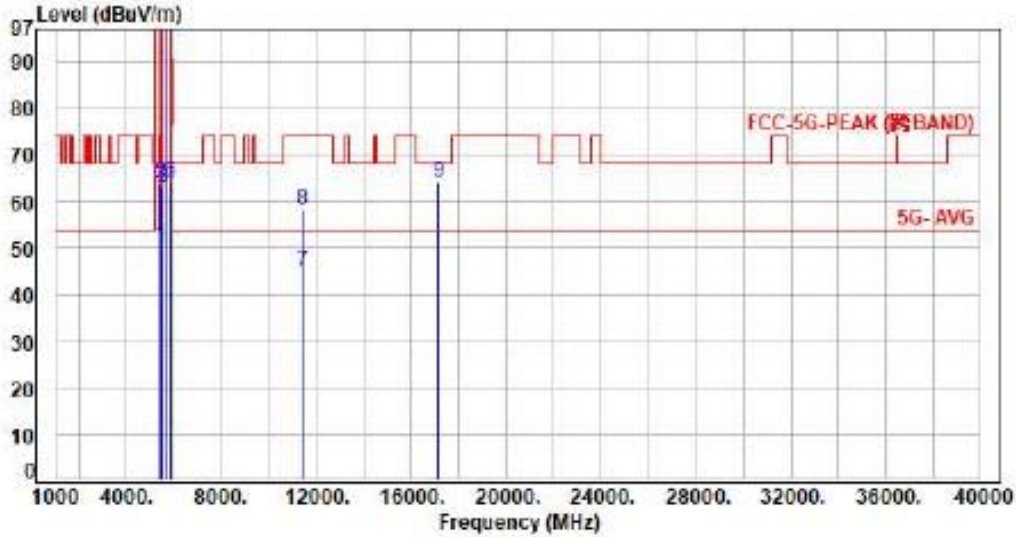


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 43.00 | 50.55 | 54.00 | -3.45 | Average | 170 | 205 | P |
| 2 | 5468.00 | 7.55 | 56.35 | 63.90 | 74.00 | -10.10 | Peak | 170 | 205 | P |
| 3 | 5470.00 | 7.58 | 55.54 | 63.12 | 68.20 | -5.08 | Peak | 170 | 205 | P |
| 4 | 5720.00 | 7.43 | 95.34 | 102.77 | 200.00 | -97.23 | Average | 170 | 205 | P |
| 5 | 5728.00 | 7.43 | 105.65 | 113.08 | 200.00 | -86.92 | Peak | 170 | 205 | P |
| 6 | 5850.00 | 7.47 | 56.84 | 64.31 | 68.20 | -3.89 | Peak | 170 | 205 | P |
| 7 | 11440.00 | 16.43 | 28.68 | 45.11 | 54.00 | -8.89 | Average | 100 | 255 | P |
| 8 | 11448.00 | 16.43 | 41.71 | 58.14 | 74.00 | -15.86 | Peak | 100 | 255 | P |
| 9 | 17160.00 | 22.17 | 42.09 | 64.26 | 68.20 | -3.94 | Peak | 100 | 119 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

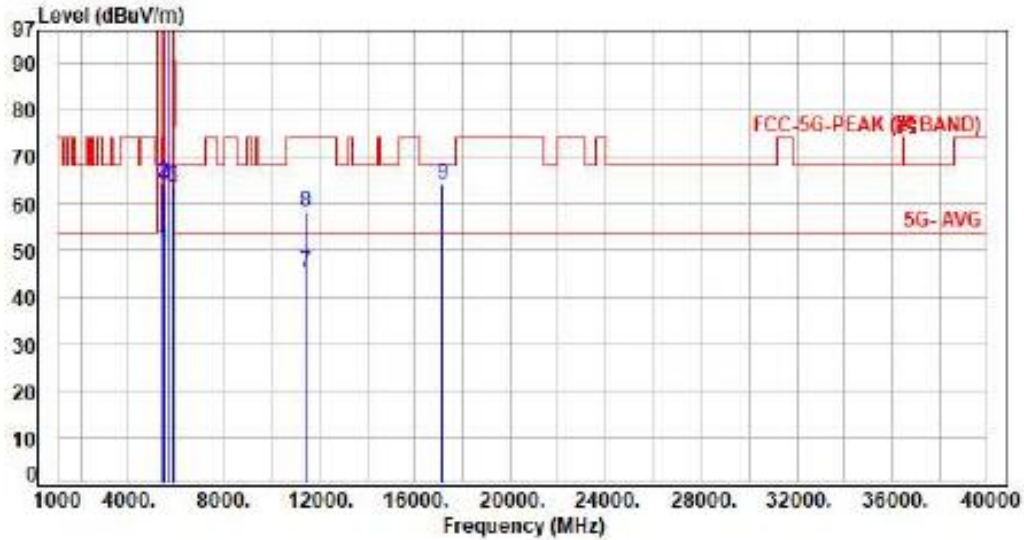


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 42.92 | 50.47 | 54.00 | -3.53 | Average | 147 | 0 | P |
| 2 | 5460.00 | 7.55 | 56.99 | 64.54 | 74.00 | -9.46 | Peak | 147 | 0 | P |
| 3 | 5470.00 | 7.58 | 56.12 | 63.70 | 68.20 | -4.50 | Peak | 147 | 0 | P |
| 4 | 5720.00 | 7.43 | 93.11 | 100.54 | 200.00 | -99.46 | Average | 147 | 0 | P |
| 5 | 5720.00 | 7.43 | 103.19 | 110.62 | 200.00 | -89.38 | Peak | 147 | 0 | P |
| 6 | 5850.00 | 7.47 | 55.97 | 63.44 | 68.20 | -4.76 | Peak | 147 | 0 | P |
| 7 | 11440.00 | 16.43 | 28.83 | 45.26 | 54.00 | -8.74 | Average | 100 | 164 | P |
| 8 | 11440.00 | 16.43 | 41.72 | 58.15 | 74.00 | -15.85 | Peak | 100 | 164 | P |
| 9 | 17160.00 | 22.17 | 42.15 | 64.32 | 68.20 | -3.88 | Peak | 100 | 221 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

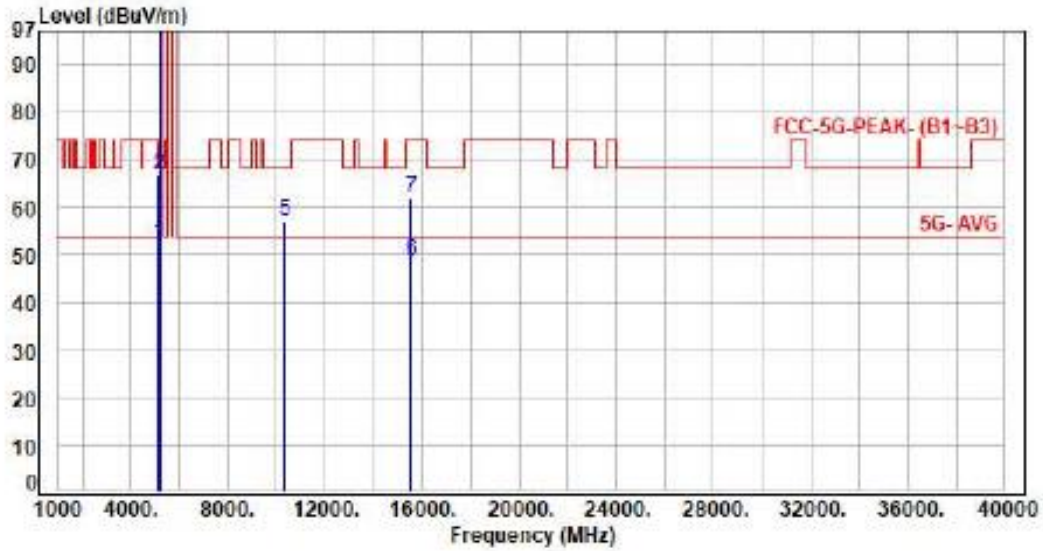


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 45.66 | 52.35 | 54.00 | -1.65 | Average | 100 | 308 | P |
| 2 | 5150.00 | 6.69 | 60.06 | 66.75 | 74.00 | -7.25 | Peak | 100 | 308 | P |
| 3 | 5180.00 | 6.79 | 92.57 | 99.36 | 200.00 | -100.64 | Average | 100 | 308 | P |
| 4 | 5180.00 | 6.79 | 106.74 | 113.53 | 200.00 | -86.47 | Peak | 100 | 308 | P |
| 5 | 10360.00 | 14.86 | 42.32 | 57.18 | 68.20 | -11.02 | Peak | 100 | 192 | P |
| 6 | 15540.00 | 18.46 | 30.29 | 48.75 | 54.00 | -5.25 | Average | 100 | 234 | P |
| 7 | 15540.00 | 18.46 | 43.36 | 61.82 | 74.00 | -12.18 | Peak | 100 | 234 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH36 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

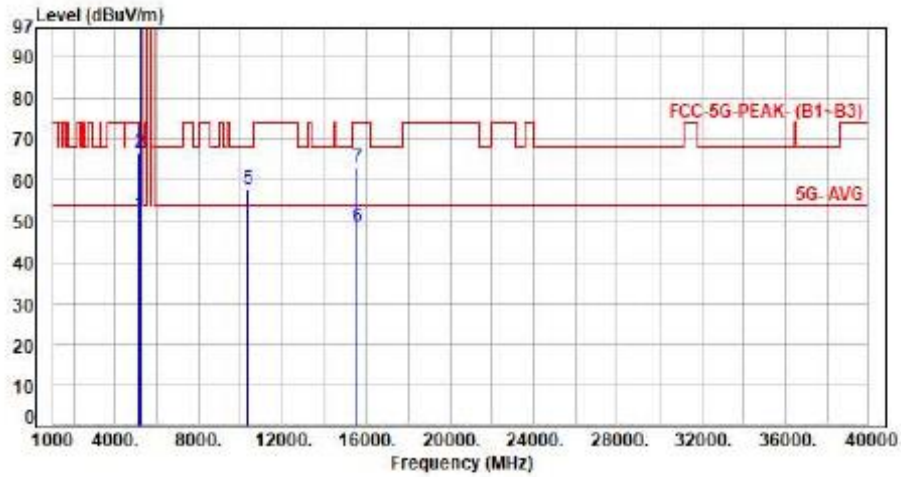


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 44.79 | 51.48 | 54.00 | -2.52 | Average | 101 | 1 | P |
| 2 | 5150.00 | 6.69 | 59.96 | 66.65 | 74.00 | -7.35 | Peak | 101 | 1 | P |
| 3 | 5180.00 | 6.79 | 88.89 | 95.68 | 200.00 | -104.32 | Average | 101 | 1 | P |
| 4 | 5180.00 | 6.79 | 102.63 | 109.42 | 200.00 | -90.58 | Peak | 101 | 1 | P |
| 5 | 10360.00 | 14.86 | 43.14 | 58.00 | 68.20 | -10.20 | Peak | 100 | 146 | P |
| 6 | 15540.00 | 18.46 | 30.25 | 48.71 | 54.00 | -5.29 | Average | 100 | 187 | P |
| 7 | 15540.00 | 18.46 | 44.56 | 63.02 | 74.00 | -10.98 | Peak | 100 | 187 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 N5S1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

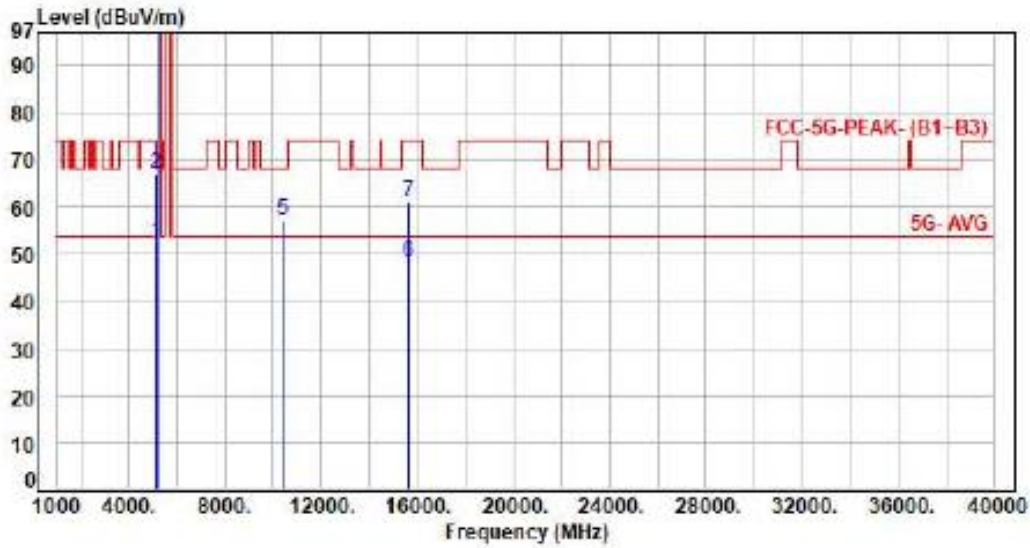


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 45.62 | 52.31 | 54.00 | -1.69 | Average | 183 | 351 | P |
| 2 | 5150.00 | 6.69 | 60.57 | 67.26 | 74.00 | -6.74 | Peak | 183 | 351 | P |
| 3 | 5200.00 | 6.86 | 94.48 | 101.34 | 200.00 | -98.66 | Average | 183 | 351 | P |
| 4 | 5200.00 | 6.86 | 107.58 | 114.44 | 200.00 | -85.56 | Peak | 183 | 351 | P |
| 5 | 10400.00 | 14.77 | 42.22 | 56.99 | 68.20 | -11.21 | Peak | 100 | 193 | P |
| 6 | 15600.00 | 18.20 | 29.97 | 48.17 | 54.00 | -5.83 | Average | 100 | 225 | P |
| 7 | 15600.00 | 18.20 | 43.09 | 61.29 | 74.00 | -12.71 | Peak | 100 | 225 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

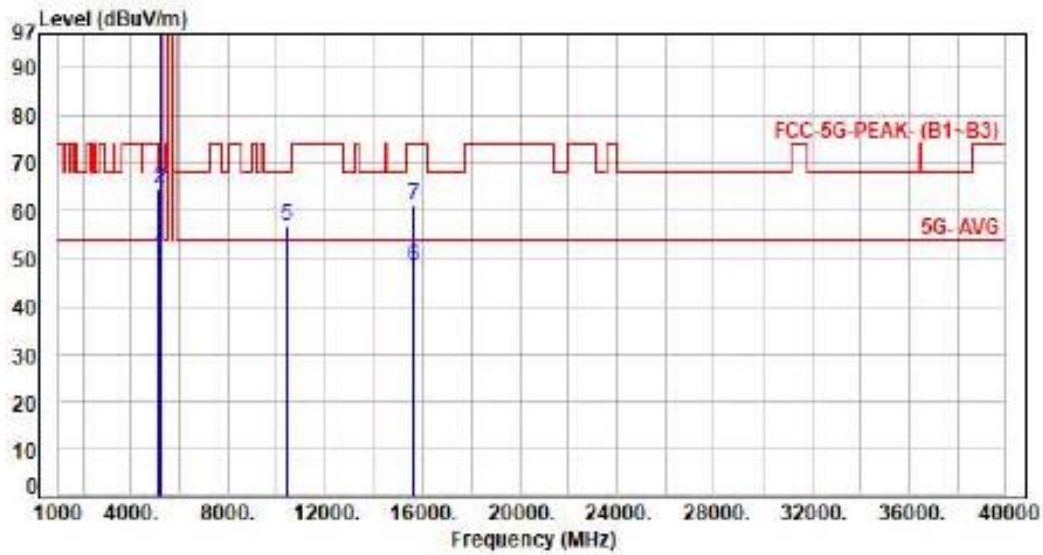


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 44.19 | 50.88 | 54.00 | -3.12 | Average | 100 | 1 | P |
| 2 | 5150.00 | 6.69 | 57.97 | 64.66 | 74.00 | -9.34 | Peak | 100 | 1 | P |
| 3 | 5200.00 | 6.86 | 88.62 | 95.48 | 200.00 | -104.52 | Average | 100 | 1 | P |
| 4 | 5200.00 | 6.86 | 102.34 | 109.20 | 200.00 | -90.80 | Peak | 100 | 1 | P |
| 5 | 10400.00 | 14.77 | 41.91 | 56.68 | 68.20 | -11.52 | Peak | 100 | 195 | P |
| 6 | 15600.00 | 18.20 | 30.01 | 48.21 | 54.00 | -5.79 | Average | 100 | 229 | P |
| 7 | 15600.00 | 18.20 | 43.05 | 61.25 | 74.00 | -12.75 | Peak | 100 | 229 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

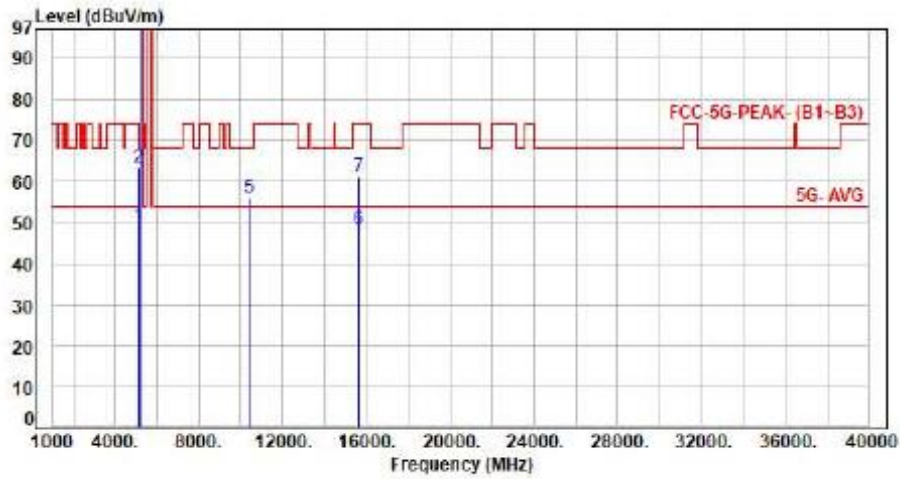


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 42.68 | 49.37 | 54.00 | -4.63 | Average | 226 | 334 | P |
| 2 | 5150.00 | 6.69 | 56.67 | 63.36 | 74.00 | -10.64 | Peak | 226 | 334 | P |
| 3 | 5240.00 | 6.91 | 93.13 | 100.04 | 200.00 | -99.96 | Average | 226 | 334 | P |
| 4 | 5240.00 | 6.91 | 106.77 | 113.68 | 200.00 | -86.32 | Peak | 226 | 334 | P |
| 5 | 10400.00 | 14.77 | 41.16 | 55.93 | 68.20 | -12.27 | Peak | 100 | 114 | P |
| 6 | 15600.00 | 18.20 | 30.08 | 48.28 | 54.00 | -5.72 | Average | 100 | 228 | P |
| 7 | 15600.00 | 18.20 | 43.12 | 61.32 | 74.00 | -12.68 | Peak | 100 | 228 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

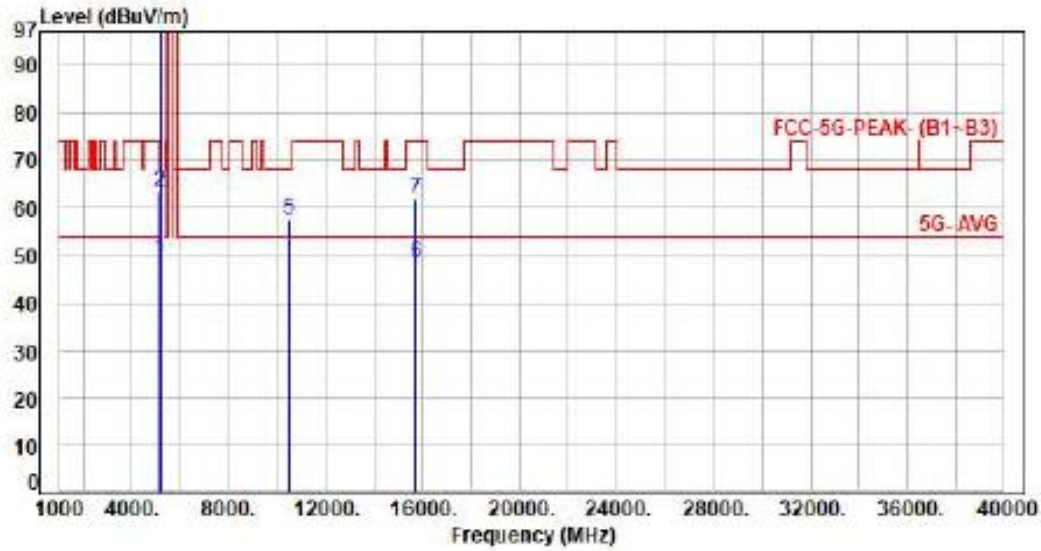


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 42.69 | 49.38 | 54.00 | -4.62 | Average | 100 | 331 | P |
| 2 | 5150.00 | 6.69 | 56.57 | 63.26 | 74.00 | -10.74 | Peak | 100 | 331 | P |
| 3 | 5240.00 | 6.91 | 88.67 | 95.58 | 200.00 | -104.42 | Average | 100 | 331 | P |
| 4 | 5240.00 | 6.91 | 102.10 | 109.01 | 200.00 | -90.99 | Peak | 100 | 331 | P |
| 5 | 10480.00 | 14.94 | 42.74 | 57.68 | 68.20 | -10.52 | Peak | 100 | 195 | P |
| 6 | 15720.00 | 17.80 | 30.54 | 48.34 | 54.00 | -5.66 | Average | 100 | 166 | P |
| 7 | 15720.00 | 17.80 | 44.26 | 62.06 | 74.00 | -11.94 | Peak | 100 | 166 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

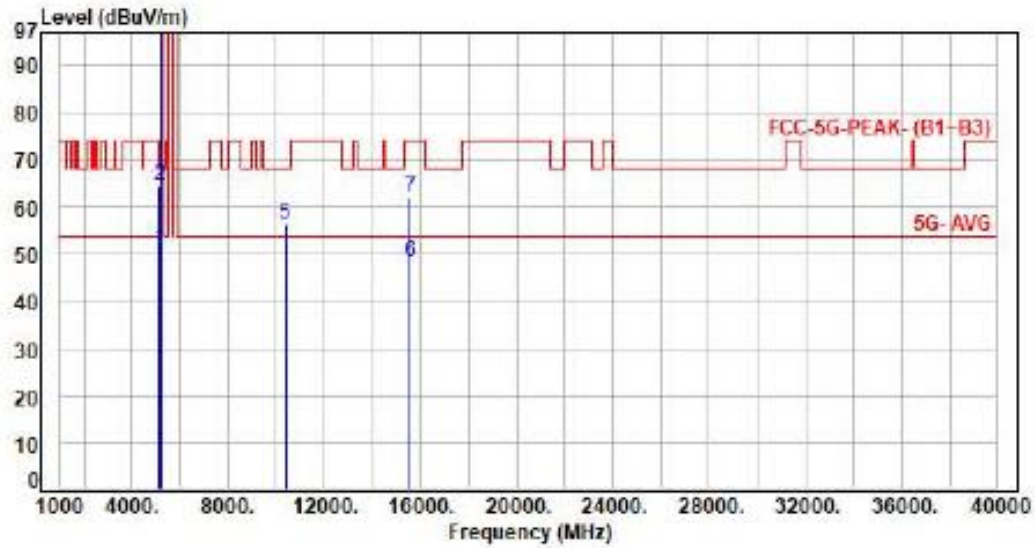


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 44.37 | 51.06 | 54.00 | -2.94 | Average | 152 | 335 | P |
| 2 | 5150.00 | 6.69 | 57.81 | 64.50 | 74.00 | -9.50 | Peak | 152 | 335 | P |
| 3 | 5190.00 | 6.82 | 89.02 | 95.84 | 200.00 | -104.16 | Average | 152 | 335 | P |
| 4 | 5190.00 | 6.82 | 103.25 | 110.07 | 200.00 | -89.93 | Peak | 152 | 335 | P |
| 5 | 10380.00 | 14.82 | 41.62 | 56.44 | 68.20 | -11.76 | Peak | 100 | 221 | P |
| 6 | 15570.00 | 18.33 | 30.17 | 48.50 | 54.00 | -5.50 | Average | 100 | 199 | P |
| 7 | 15570.00 | 18.33 | 43.51 | 61.84 | 74.00 | -12.16 | Peak | 100 | 199 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

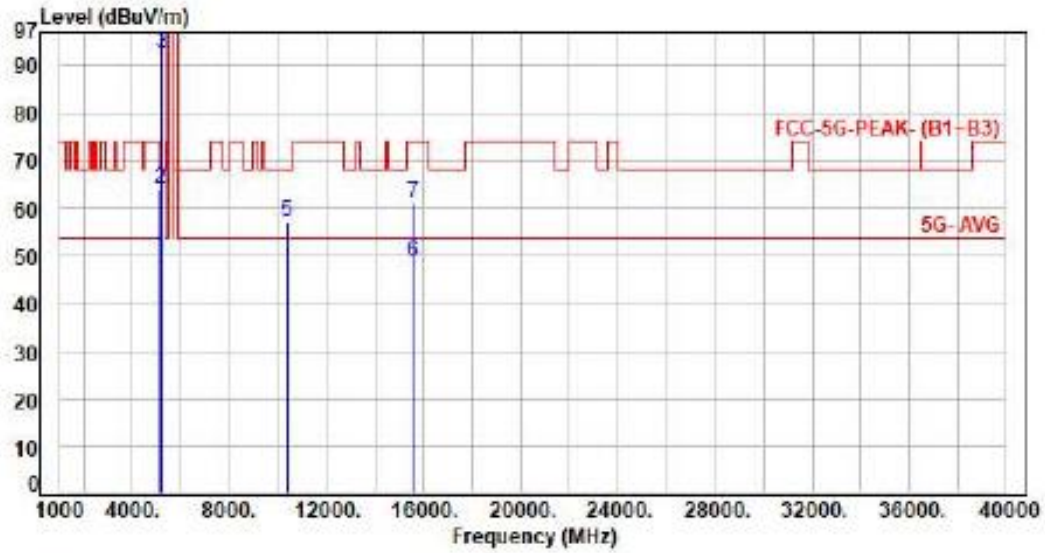


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 43.47 | 50.16 | 54.00 | -3.84 | Average | 100 | 1 | P |
| 2 | 5150.00 | 6.69 | 57.42 | 64.11 | 74.00 | -9.89 | Peak | 100 | 1 | P |
| 3 | 5190.00 | 6.82 | 85.83 | 92.65 | 200.00 | -107.35 | Average | 100 | 1 | P |
| 4 | 5190.00 | 6.82 | 97.71 | 104.53 | 200.00 | -95.47 | Peak | 100 | 1 | P |
| 5 | 10380.00 | 14.82 | 42.25 | 57.07 | 68.20 | -11.13 | Peak | 100 | 117 | P |
| 6 | 15570.00 | 18.33 | 30.28 | 48.61 | 54.00 | -5.39 | Average | 100 | 196 | P |
| 7 | 15570.00 | 18.33 | 42.79 | 61.12 | 74.00 | -12.88 | Peak | 100 | 196 | P |

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

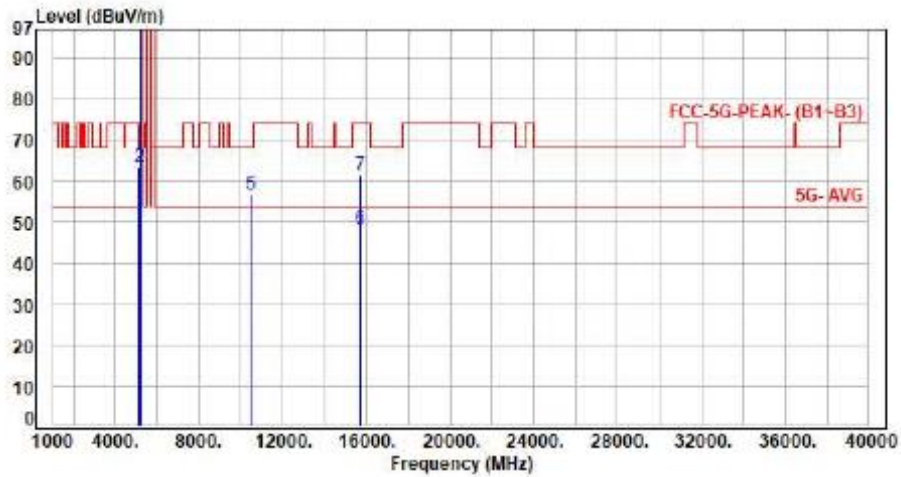


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 43.41 | 50.10 | 54.00 | -3.90 | Average | 242 | 335 | P |
| 2 | 5150.00 | 6.69 | 56.67 | 63.36 | 74.00 | -10.64 | Peak | 242 | 335 | P |
| 3 | 5230.00 | 6.90 | 91.49 | 98.39 | 200.00 | -101.61 | Average | 242 | 335 | P |
| 4 | 5230.00 | 6.90 | 105.20 | 112.10 | 200.00 | -87.90 | Peak | 242 | 335 | P |
| 5 | 10460.00 | 14.87 | 41.80 | 56.67 | 68.20 | -11.53 | Peak | 100 | 135 | P |
| 6 | 15690.00 | 17.88 | 30.40 | 48.28 | 54.00 | -5.72 | Average | 100 | 224 | P |
| 7 | 15690.00 | 17.88 | 43.84 | 61.72 | 74.00 | -12.28 | Peak | 100 | 224 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

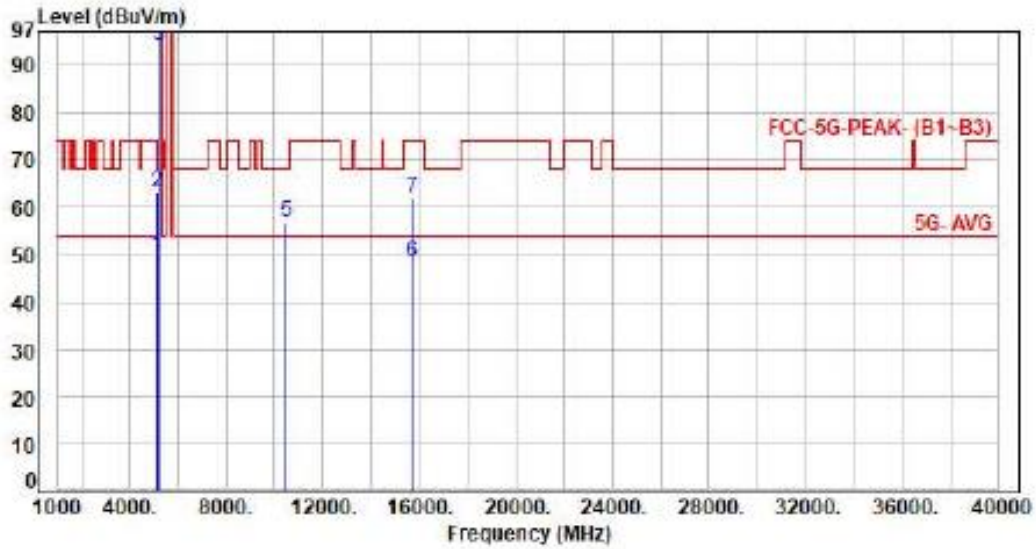


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 43.06 | 49.75 | 54.00 | -4.25 | Average | 100 | 0 | P |
| 2 | 5150.00 | 6.69 | 56.21 | 62.90 | 74.00 | -11.10 | Peak | 100 | 0 | P |
| 3 | 5230.00 | 6.90 | 87.08 | 93.98 | 200.00 | -106.02 | Average | 100 | 0 | P |
| 4 | 5230.00 | 6.90 | 101.00 | 107.90 | 200.00 | -92.10 | Peak | 100 | 0 | P |
| 5 | 10460.00 | 14.87 | 42.04 | 56.91 | 68.20 | -11.29 | Peak | 100 | 225 | P |
| 6 | 15690.00 | 17.88 | 30.50 | 48.38 | 54.00 | -5.62 | Average | 100 | 165 | P |
| 7 | 15690.00 | 17.88 | 44.23 | 62.11 | 74.00 | -11.89 | Peak | 100 | 165 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

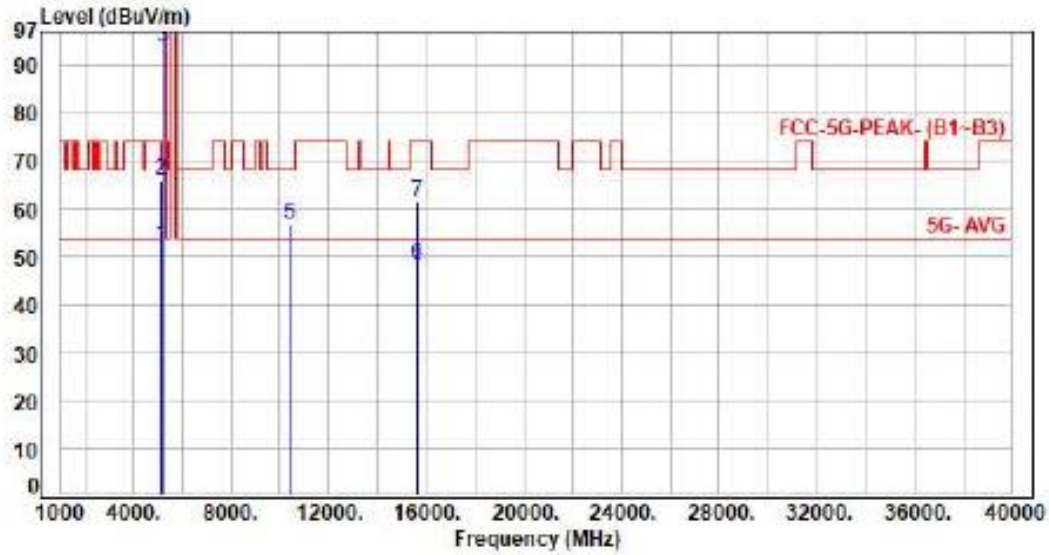


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 45.73 | 52.42 | 54.00 | -1.58 | Average | 230 | 335 | P |
| 2 | 5150.00 | 6.69 | 59.22 | 65.91 | 74.00 | -8.09 | Peak | 230 | 335 | P |
| 3 | 5210.00 | 6.87 | 86.75 | 93.62 | 200.00 | -106.38 | Average | 230 | 335 | P |
| 4 | 5210.00 | 6.87 | 100.41 | 107.28 | 200.00 | -92.72 | Peak | 230 | 335 | P |
| 5 | 10420.00 | 14.79 | 42.18 | 56.97 | 68.20 | -11.23 | Peak | 100 | 199 | P |
| 6 | 15630.00 | 18.06 | 30.15 | 48.21 | 54.00 | -5.79 | Average | 100 | 231 | P |
| 7 | 15630.00 | 18.06 | 43.64 | 61.70 | 74.00 | -12.30 | Peak | 100 | 231 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

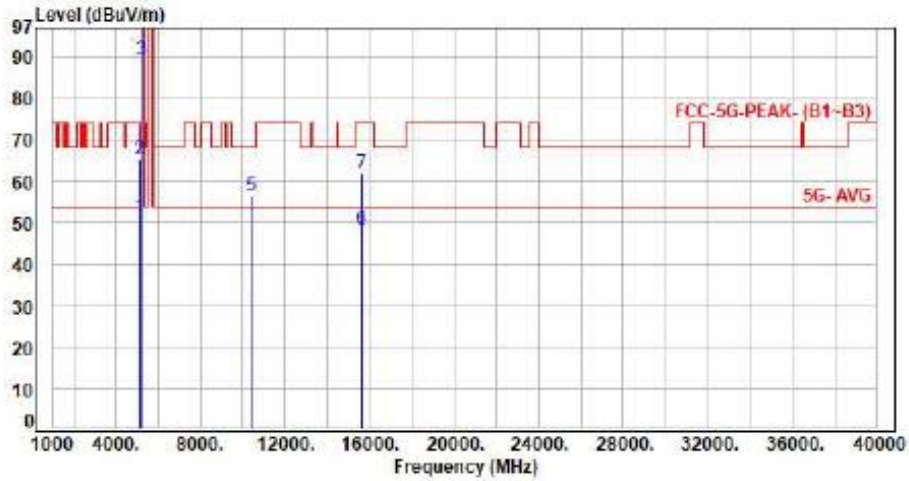


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 44.58 | 51.27 | 54.00 | -2.73 | Average | 100 | 360 | P |
| 2 | 5150.00 | 6.69 | 58.72 | 65.41 | 74.00 | -8.59 | Peak | 100 | 360 | P |
| 3 | 5210.00 | 6.87 | 82.48 | 89.35 | 200.00 | -110.65 | Average | 100 | 360 | P |
| 4 | 5210.00 | 6.87 | 96.04 | 102.91 | 200.00 | -97.09 | Peak | 100 | 360 | P |
| 5 | 10420.00 | 14.79 | 41.78 | 56.57 | 68.20 | -11.63 | Peak | 100 | 231 | P |
| 6 | 15630.00 | 18.06 | 30.23 | 48.29 | 54.00 | -5.71 | Average | 100 | 188 | P |
| 7 | 15630.00 | 18.06 | 43.77 | 61.83 | 74.00 | -12.17 | Peak | 100 | 188 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

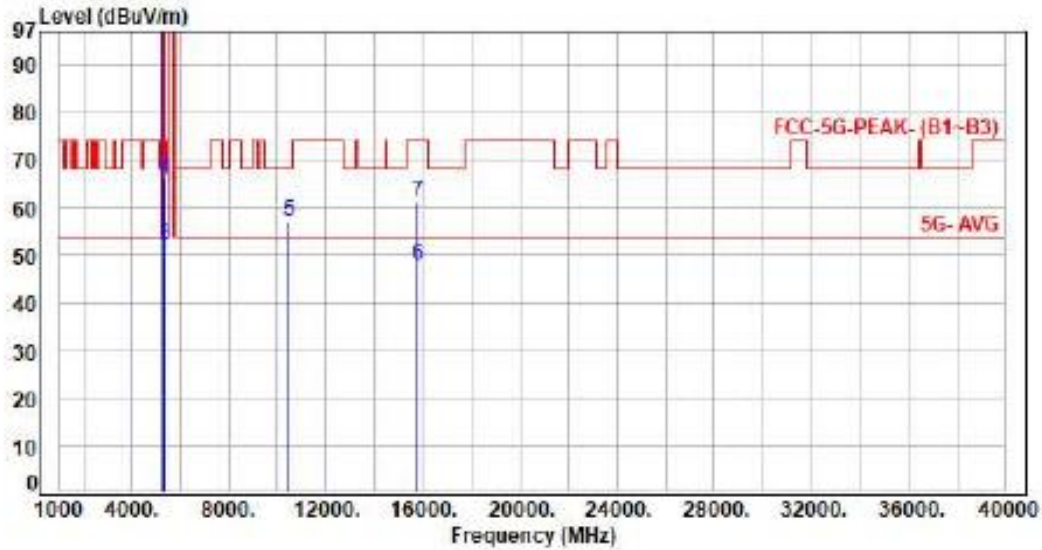


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5260.00 | 6.99 | 92.64 | 99.63 | 200.00 | -100.37 | Average | 100 | 334 | P |
| 2 | 5260.00 | 6.99 | 105.72 | 112.71 | 200.00 | -87.29 | Peak | 100 | 334 | P |
| 3 | 5350.00 | 7.27 | 44.88 | 52.15 | 54.00 | -1.85 | Average | 100 | 334 | P |
| 4 | 5350.00 | 7.27 | 58.74 | 66.01 | 74.00 | -7.99 | Peak | 100 | 334 | P |
| 5 | 10520.00 | 15.08 | 42.04 | 57.12 | 68.20 | -11.08 | Peak | 100 | 174 | P |
| 6 | 15780.00 | 17.59 | 30.53 | 48.12 | 54.00 | -5.88 | Average | 100 | 166 | P |
| 7 | 15780.00 | 17.59 | 43.60 | 61.19 | 74.00 | -12.81 | Peak | 100 | 166 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TK 11ax20 CH52 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

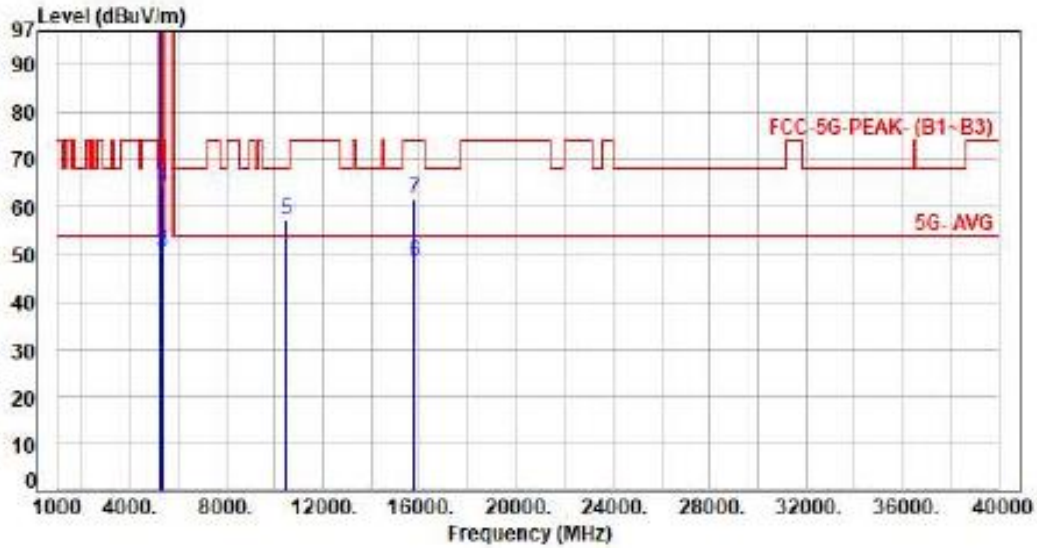


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5260.00 | 6.99 | 88.71 | 95.70 | 200.00 | -104.30 | Average | 100 | 318 | P |
| 2 | 5260.00 | 6.99 | 102.10 | 109.09 | 200.00 | -90.91 | Peak | 100 | 318 | P |
| 3 | 5350.00 | 7.27 | 43.29 | 50.56 | 54.00 | -3.44 | Average | 100 | 318 | P |
| 4 | 5350.00 | 7.27 | 56.77 | 64.04 | 74.00 | -9.96 | Peak | 100 | 318 | P |
| 5 | 10520.00 | 15.00 | 42.21 | 57.29 | 68.20 | -10.91 | Peak | 100 | 295 | P |
| 6 | 15780.00 | 17.59 | 30.56 | 48.15 | 54.00 | -5.85 | Average | 100 | 131 | P |
| 7 | 15780.00 | 17.59 | 43.97 | 61.56 | 74.00 | -12.44 | Peak | 100 | 131 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

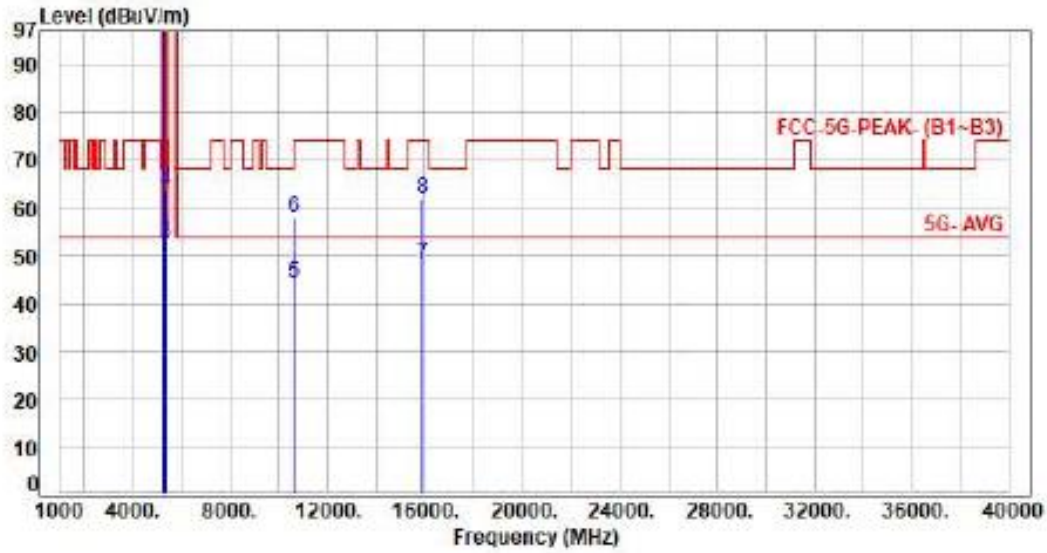


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5300.00 | 7.20 | 93.46 | 100.66 | 200.00 | -99.34 | Average | 100 | 328 | P |
| 2 | 5300.00 | 7.20 | 106.23 | 113.43 | 200.00 | -86.57 | Peak | 100 | 328 | P |
| 3 | 5350.00 | 7.27 | 45.29 | 52.56 | 54.00 | -1.44 | Average | 100 | 328 | P |
| 4 | 5350.00 | 7.27 | 56.72 | 63.99 | 74.00 | -10.01 | Peak | 100 | 328 | P |
| 5 | 10600.00 | 15.29 | 29.04 | 44.33 | 54.00 | -9.67 | Average | 100 | 163 | P |
| 6 | 10600.00 | 15.29 | 42.65 | 57.94 | 74.00 | -16.06 | Peak | 100 | 163 | P |
| 7 | 15900.00 | 17.45 | 30.88 | 48.33 | 54.00 | -5.67 | Average | 100 | 176 | P |
| 8 | 15900.00 | 17.45 | 44.45 | 61.90 | 74.00 | -12.10 | Peak | 100 | 176 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

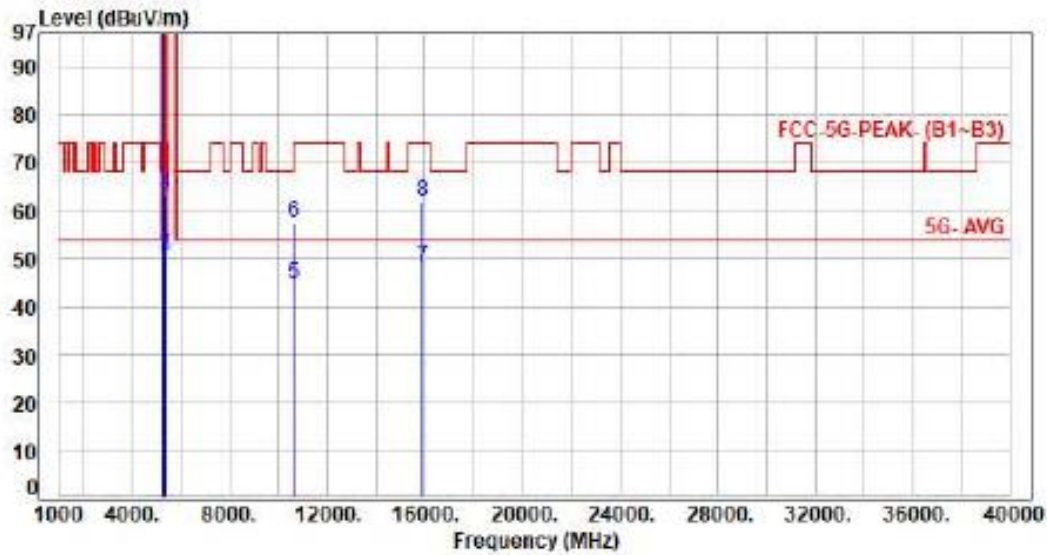


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5300.00 | 7.20 | 89.59 | 96.79 | 200.00 | -103.21 | Average | 100 | 318 | P |
| 2 | 5300.00 | 7.20 | 102.09 | 109.29 | 200.00 | -90.71 | Peak | 100 | 318 | P |
| 3 | 5350.00 | 7.27 | 43.36 | 50.63 | 54.00 | -3.37 | Average | 100 | 318 | P |
| 4 | 5350.00 | 7.27 | 56.28 | 63.55 | 74.00 | -10.45 | Peak | 100 | 318 | P |
| 5 | 10600.00 | 15.29 | 29.44 | 44.73 | 54.00 | -9.27 | Average | 100 | 226 | P |
| 6 | 10600.00 | 15.29 | 42.41 | 57.70 | 74.00 | -16.30 | Peak | 100 | 226 | P |
| 7 | 15900.00 | 17.45 | 30.91 | 48.36 | 54.00 | -5.64 | Average | 100 | 153 | P |
| 8 | 15900.00 | 17.45 | 44.62 | 62.07 | 74.00 | -11.93 | Peak | 100 | 153 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

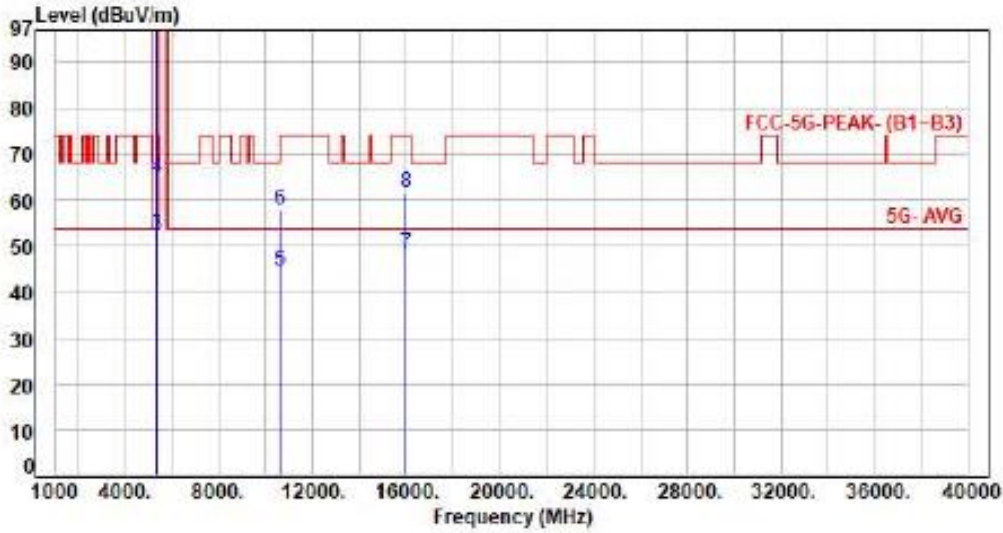


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5320.00 | 7.23 | 91.29 | 98.52 | 200.00 | -101.48 | Average | 100 | 308 | P |
| 2 | 5320.00 | 7.23 | 105.56 | 112.79 | 200.00 | -87.21 | Peak | 100 | 308 | P |
| 3 | 5350.00 | 7.27 | 44.94 | 52.21 | 54.00 | -1.79 | Average | 100 | 308 | P |
| 4 | 5350.00 | 7.27 | 57.60 | 64.87 | 74.00 | -9.13 | Peak | 100 | 308 | P |
| 5 | 10640.00 | 15.44 | 29.15 | 44.59 | 54.00 | -9.41 | Average | 100 | 113 | P |
| 6 | 10640.00 | 15.44 | 42.31 | 57.75 | 74.00 | -16.25 | Peak | 100 | 113 | P |
| 7 | 15960.00 | 17.45 | 31.00 | 48.45 | 54.00 | -5.55 | Average | 100 | 152 | P |
| 8 | 15960.00 | 17.45 | 44.32 | 61.77 | 74.00 | -12.23 | Peak | 100 | 152 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

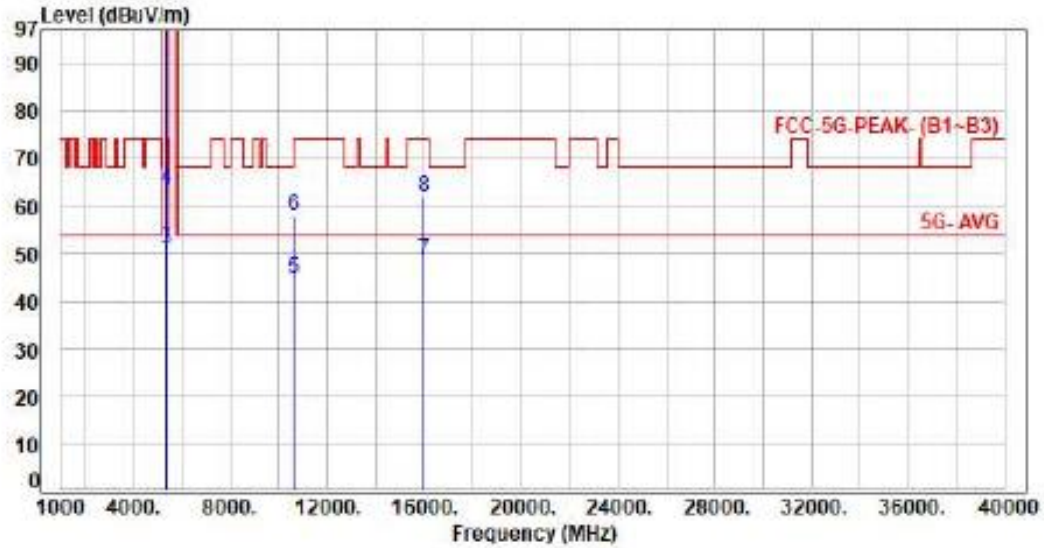


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5320.00 | 7.23 | 89.55 | 96.78 | 200.00 | -103.22 | Average | 100 | 328 | P |
| 2 | 5320.00 | 7.23 | 102.13 | 109.36 | 200.00 | -90.64 | Peak | 100 | 328 | P |
| 3 | 5350.00 | 7.27 | 43.79 | 51.06 | 54.00 | -2.94 | Average | 100 | 328 | P |
| 4 | 5350.00 | 7.27 | 56.04 | 63.31 | 74.00 | -10.69 | Peak | 100 | 328 | P |
| 5 | 10640.00 | 15.44 | 29.02 | 44.46 | 54.00 | -9.54 | Average | 100 | 232 | P |
| 6 | 10640.00 | 15.44 | 42.53 | 57.97 | 74.00 | -16.03 | Peak | 100 | 232 | P |
| 7 | 15960.00 | 17.45 | 31.08 | 48.53 | 54.00 | -5.47 | Average | 100 | 185 | P |
| 8 | 15960.00 | 17.45 | 44.52 | 61.97 | 74.00 | -12.03 | Peak | 100 | 185 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

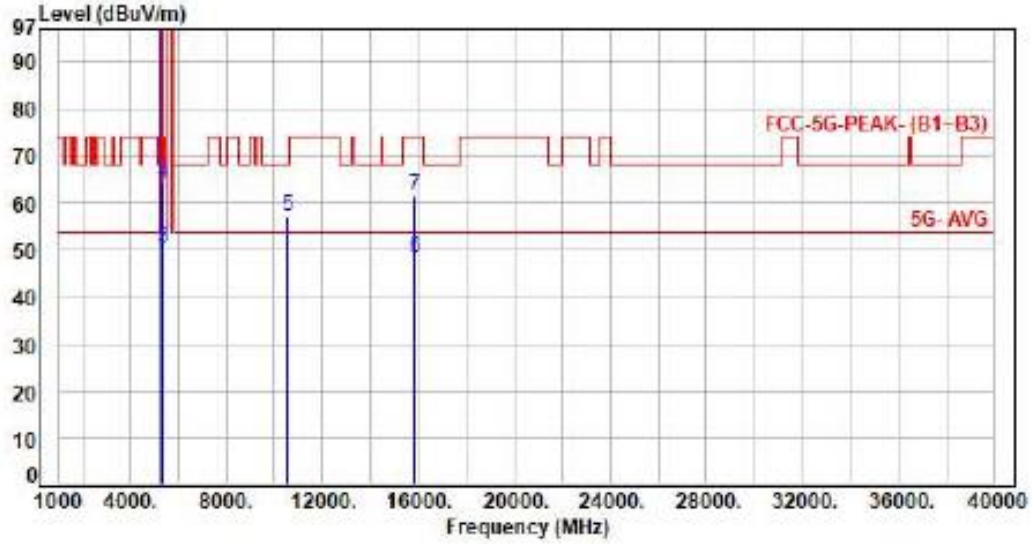


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5270.00 | 7.04 | 90.05 | 97.09 | 200.00 | -102.91 | Average | 100 | 330 | P |
| 2 | 5270.00 | 7.04 | 102.64 | 109.68 | 200.00 | -90.32 | Peak | 100 | 330 | P |
| 3 | 5350.00 | 7.27 | 43.28 | 50.55 | 54.00 | -3.45 | Average | 100 | 330 | P |
| 4 | 5350.00 | 7.27 | 56.95 | 64.22 | 74.00 | -9.78 | Peak | 100 | 330 | P |
| 5 | 10540.00 | 15.17 | 42.16 | 57.33 | 68.20 | -10.87 | Peak | 100 | 312 | P |
| 6 | 15810.00 | 17.49 | 30.88 | 48.37 | 54.00 | -5.63 | Average | 100 | 225 | P |
| 7 | 15810.00 | 17.49 | 44.07 | 61.56 | 74.00 | -12.44 | Peak | 100 | 225 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

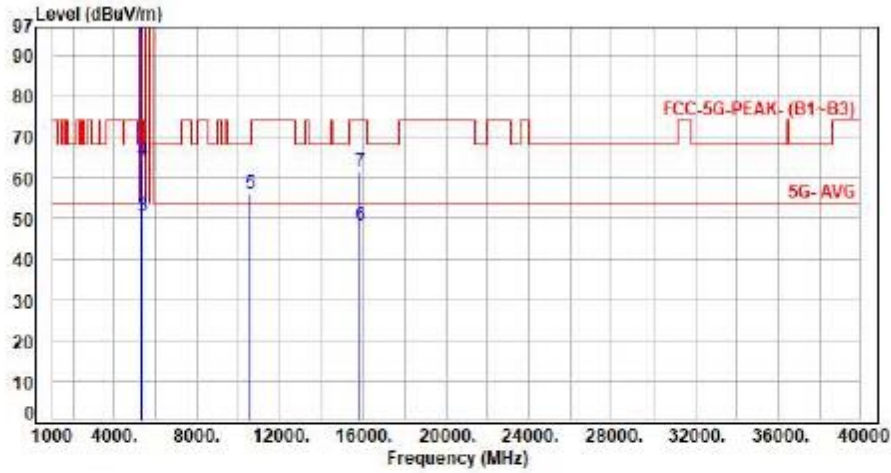


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5270.00 | 7.04 | 87.14 | 94.18 | 200.00 | -105.82 | Average | 100 | 359 | P |
| 2 | 5270.00 | 7.04 | 99.67 | 106.71 | 200.00 | -93.29 | Peak | 100 | 359 | P |
| 3 | 5350.00 | 7.27 | 43.20 | 50.47 | 54.00 | -3.53 | Average | 100 | 359 | P |
| 4 | 5350.00 | 7.27 | 56.97 | 64.24 | 74.00 | -9.76 | Peak | 100 | 359 | P |
| 5 | 10540.00 | 15.17 | 41.03 | 56.20 | 68.20 | -12.00 | Peak | 100 | 251 | P |
| 6 | 15810.00 | 17.49 | 30.91 | 48.40 | 54.00 | -5.60 | Average | 100 | 227 | P |
| 7 | 15810.00 | 17.49 | 44.10 | 61.59 | 74.00 | -12.41 | Peak | 100 | 227 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

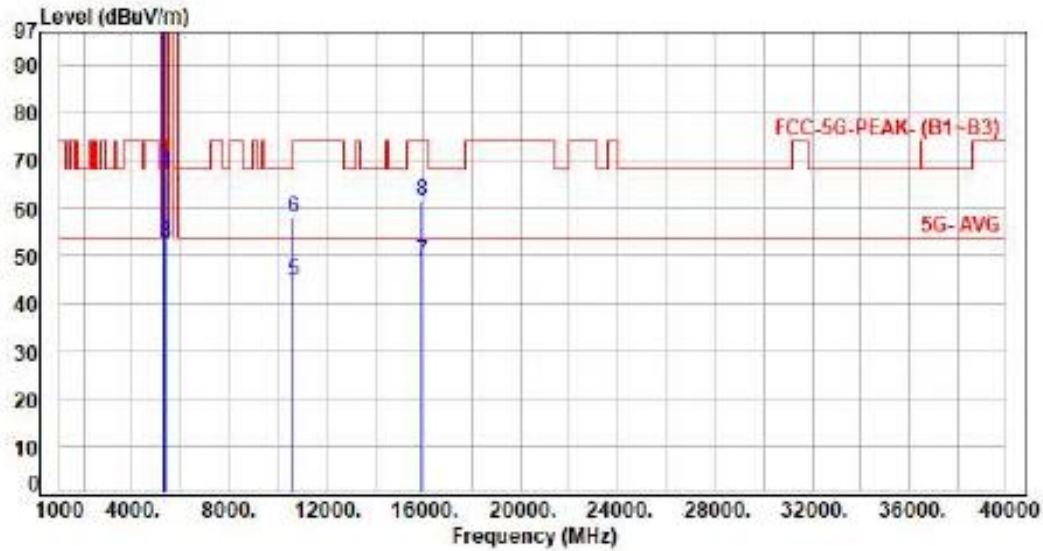


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5310.00 | 7.22 | 88.05 | 95.27 | 200.00 | -104.73 | Average | 100 | 308 | P |
| 2 | 5310.00 | 7.22 | 100.42 | 107.64 | 200.00 | -92.36 | Peak | 100 | 308 | P |
| 3 | 5350.00 | 7.27 | 45.60 | 52.87 | 54.00 | -1.13 | Average | 100 | 308 | P |
| 4 | 5350.00 | 7.27 | 60.30 | 67.57 | 74.00 | -6.43 | Peak | 100 | 308 | P |
| 5 | 10620.00 | 15.37 | 29.40 | 44.77 | 54.00 | -9.23 | Average | 100 | 221 | P |
| 6 | 10620.00 | 15.37 | 42.65 | 58.02 | 74.00 | -15.98 | Peak | 100 | 221 | P |
| 7 | 15930.00 | 17.44 | 31.08 | 48.52 | 54.00 | -5.48 | Average | 100 | 114 | P |
| 8 | 15930.00 | 17.44 | 44.32 | 61.76 | 74.00 | -12.24 | Peak | 100 | 114 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

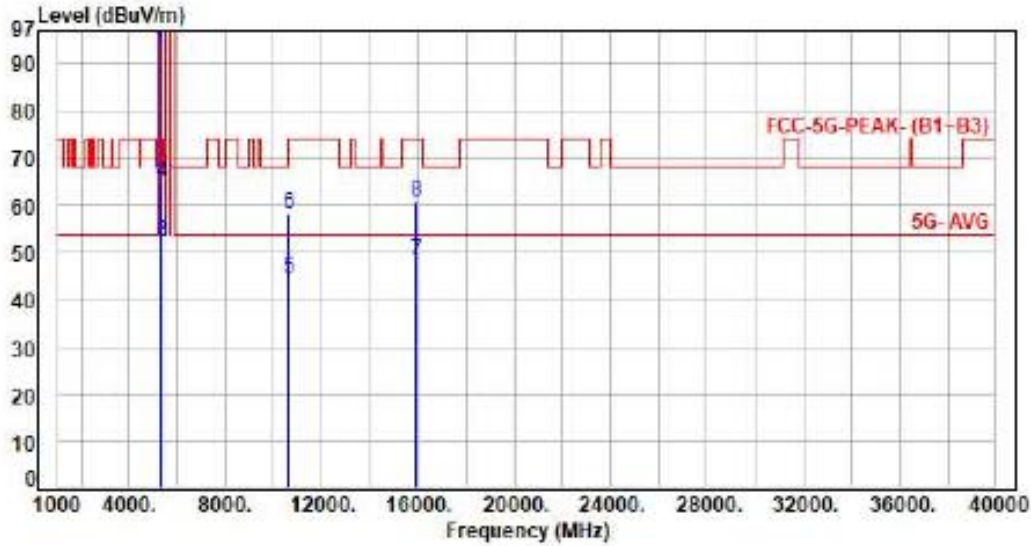


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5310.00 | 7.22 | 85.83 | 93.05 | 200.00 | -106.95 | Average | 100 | 330 | P |
| 2 | 5310.00 | 7.22 | 97.36 | 104.58 | 200.00 | -95.42 | Peak | 100 | 330 | P |
| 3 | 5350.00 | 7.27 | 44.95 | 52.22 | 54.00 | -1.78 | Average | 100 | 330 | P |
| 4 | 5350.00 | 7.27 | 57.73 | 65.00 | 74.00 | -9.00 | Peak | 100 | 330 | P |
| 5 | 10620.00 | 15.37 | 29.24 | 44.61 | 54.00 | -9.39 | Average | 100 | 118 | P |
| 6 | 10620.00 | 15.37 | 42.92 | 58.29 | 74.00 | -15.71 | Peak | 100 | 118 | P |
| 7 | 15930.00 | 17.44 | 30.99 | 48.43 | 54.00 | -5.57 | Average | 100 | 162 | P |
| 8 | 15930.00 | 17.44 | 43.56 | 61.00 | 74.00 | -13.00 | Peak | 100 | 162 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

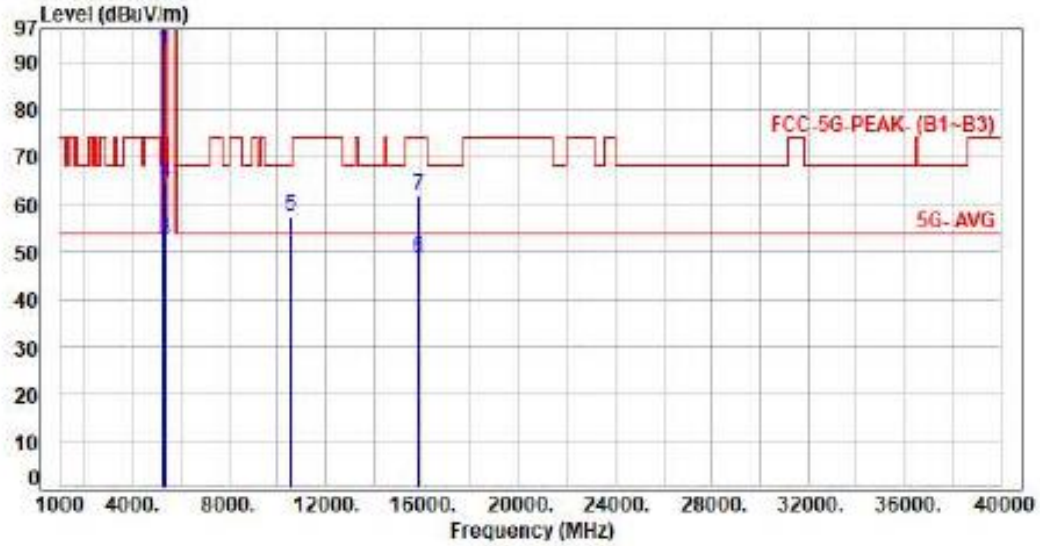


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5290.00 | 7.15 | 85.33 | 92.48 | 200.00 | -107.52 | Average | 100 | 304 | P |
| 2 | 5290.00 | 7.15 | 98.97 | 106.12 | 200.00 | -93.88 | Peak | 100 | 304 | P |
| 3 | 5350.00 | 7.27 | 45.25 | 52.52 | 54.00 | -1.48 | Average | 100 | 304 | P |
| 4 | 5350.00 | 7.27 | 57.34 | 64.61 | 74.00 | -9.39 | Peak | 100 | 304 | P |
| 5 | 10580.00 | 15.25 | 42.43 | 57.68 | 68.20 | -10.52 | Peak | 100 | 199 | P |
| 6 | 15870.00 | 17.47 | 31.26 | 48.73 | 54.00 | -5.27 | Average | 100 | 221 | P |
| 7 | 15870.00 | 17.47 | 44.57 | 62.04 | 74.00 | -11.96 | Peak | 100 | 221 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

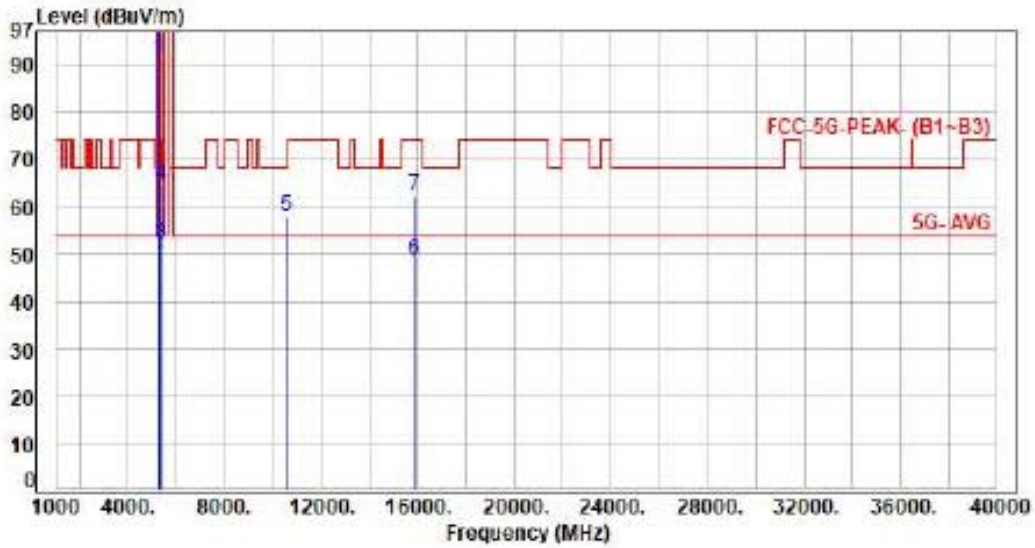


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5290.00 | 7.15 | 83.78 | 90.93 | 200.00 | -109.07 | Average | 100 | 330 | P |
| 2 | 5290.00 | 7.15 | 95.56 | 102.71 | 200.00 | -97.29 | Peak | 100 | 330 | P |
| 3 | 5350.00 | 7.27 | 44.56 | 51.83 | 54.00 | -2.17 | Average | 100 | 330 | P |
| 4 | 5350.00 | 7.27 | 57.23 | 64.50 | 74.00 | -9.50 | Peak | 100 | 330 | P |
| 5 | 10580.00 | 15.25 | 42.78 | 58.03 | 68.20 | -10.17 | Peak | 100 | 229 | P |
| 6 | 15870.00 | 17.47 | 31.26 | 48.73 | 54.00 | -5.27 | Average | 100 | 116 | P |
| 7 | 15870.00 | 17.47 | 44.77 | 62.24 | 74.00 | -11.76 | Peak | 100 | 116 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

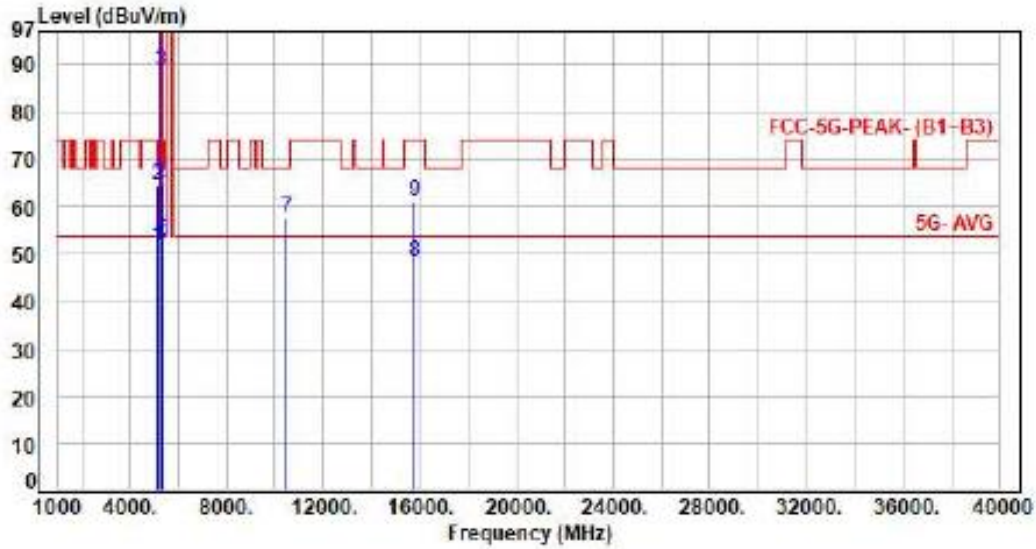


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 44.80 | 51.49 | 54.00 | -2.51 | Average | 100 | 307 | P |
| 2 | 5150.00 | 6.69 | 57.84 | 64.53 | 74.00 | -9.47 | Peak | 100 | 307 | P |
| 3 | 5250.00 | 6.92 | 81.61 | 88.53 | 200.00 | -111.47 | Average | 100 | 307 | P |
| 4 | 5250.00 | 6.92 | 92.65 | 99.57 | 200.00 | -100.43 | Peak | 100 | 307 | P |
| 5 | 5350.00 | 7.27 | 45.48 | 52.75 | 54.00 | -1.25 | Average | 100 | 307 | P |
| 6 | 5350.00 | 7.27 | 57.51 | 64.78 | 74.00 | -9.22 | Peak | 100 | 307 | P |
| 7 | 10500.00 | 15.01 | 42.42 | 57.43 | 68.20 | -10.77 | Peak | 100 | 221 | P |
| 8 | 15750.00 | 17.72 | 30.49 | 48.21 | 54.00 | -5.79 | Average | 100 | 311 | P |
| 9 | 15750.00 | 17.72 | 43.35 | 61.07 | 74.00 | -12.93 | Peak | 100 | 311 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

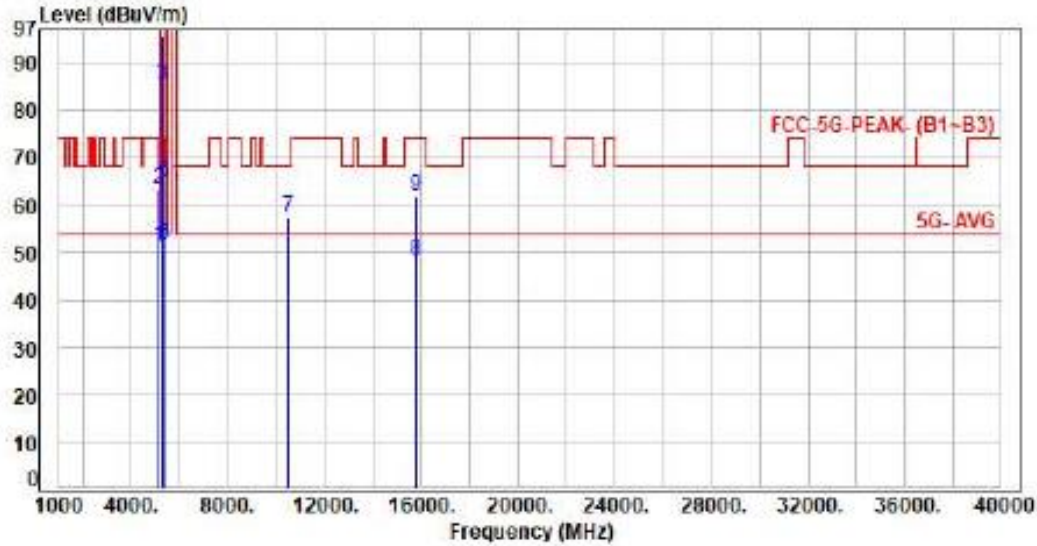


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5150.00 | 6.69 | 44.47 | 51.16 | 54.00 | -2.84 | Average | 100 | 360 | P |
| 2 | 5150.00 | 6.69 | 56.70 | 63.39 | 74.00 | -10.61 | Peak | 100 | 360 | P |
| 3 | 5250.00 | 6.92 | 78.22 | 85.14 | 200.00 | -114.86 | Average | 100 | 360 | P |
| 4 | 5150.00 | 6.92 | 88.65 | 95.57 | 200.00 | -104.43 | Peak | 100 | 360 | P |
| 5 | 5350.00 | 7.27 | 44.28 | 51.55 | 54.00 | -2.45 | Average | 100 | 360 | P |
| 6 | 5350.00 | 7.27 | 57.53 | 64.80 | 74.00 | -9.20 | Peak | 100 | 360 | P |
| 7 | 10500.00 | 15.01 | 42.39 | 57.40 | 68.20 | -10.80 | Peak | 100 | 147 | P |
| 8 | 15750.00 | 17.72 | 38.49 | 48.21 | 54.00 | -5.79 | Average | 100 | 227 | P |
| 9 | 15750.00 | 17.72 | 44.41 | 62.13 | 74.00 | -11.87 | Peak | 100 | 227 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

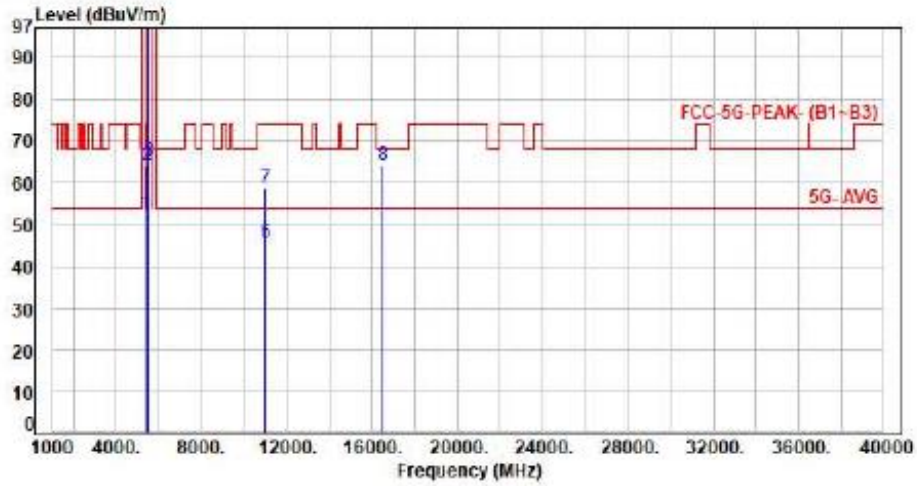


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 45.34 | 52.89 | 54.00 | -1.11 | Average | 204 | 208 | P |
| 2 | 5460.00 | 7.55 | 56.80 | 64.35 | 74.00 | -9.65 | Peak | 204 | 208 | P |
| 3 | 5470.00 | 7.58 | 57.68 | 65.26 | 68.20 | -2.94 | Peak | 204 | 208 | P |
| 4 | 5500.00 | 7.68 | 92.62 | 100.30 | 200.00 | -99.70 | Average | 204 | 208 | P |
| 5 | 5500.00 | 7.68 | 106.68 | 114.36 | 200.00 | -85.64 | Peak | 204 | 208 | P |
| 6 | 11000.00 | 16.20 | 29.36 | 45.56 | 54.00 | -8.44 | Average | 100 | 195 | P |
| 7 | 11000.00 | 16.20 | 42.39 | 58.59 | 74.00 | -15.41 | Peak | 100 | 195 | P |
| 8 | 16500.00 | 18.92 | 45.43 | 64.35 | 68.20 | -3.85 | Peak | 100 | 166 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax28 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

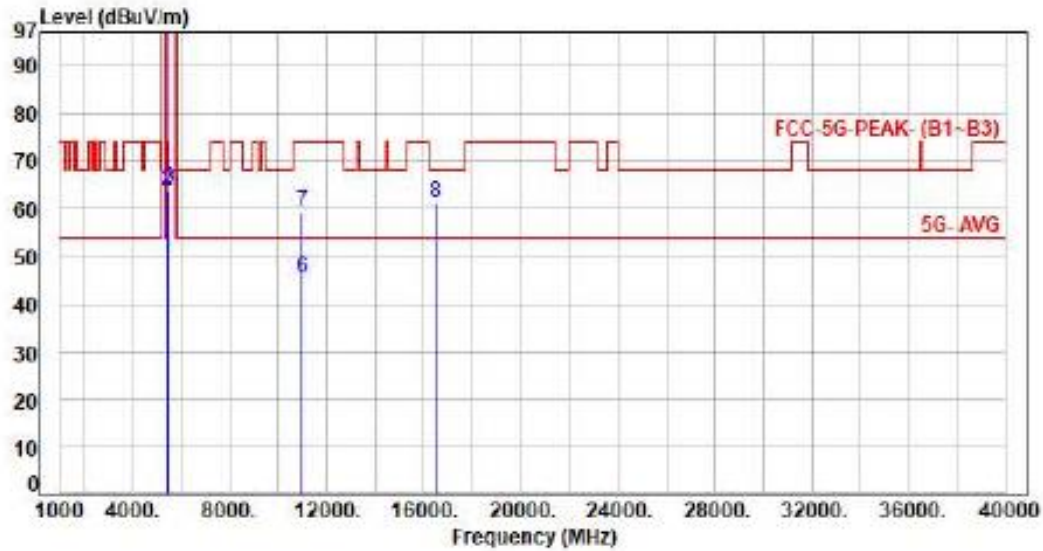

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1 | 5460.00 | 7.55 | 43.47 | 51.02 | 54.00 | -2.98 | Average | 100 | 355 | P |
| 2 | 5460.00 | 7.55 | 56.27 | 63.82 | 74.00 | -10.18 | Peak | 100 | 355 | P |
| 3 | 5470.00 | 7.58 | 56.59 | 64.17 | 68.20 | -4.03 | Peak | 100 | 355 | P |
| 4 | 5500.00 | 7.68 | 91.63 | 99.31 | 200.00 | -100.69 | Average | 100 | 355 | P |
| 5 | 5500.00 | 7.68 | 104.85 | 112.53 | 200.00 | -87.47 | Peak | 100 | 355 | P |
| 6 | 11000.00 | 16.20 | 29.28 | 45.48 | 54.00 | -8.52 | Average | 100 | 241 | P |
| 7 | 11000.00 | 16.20 | 43.25 | 59.45 | 74.00 | -14.55 | Peak | 100 | 241 | P |
| 8 | 16500.00 | 18.92 | 42.36 | 61.28 | 68.20 | -6.92 | Peak | 100 | 146 | P |

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor