




Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

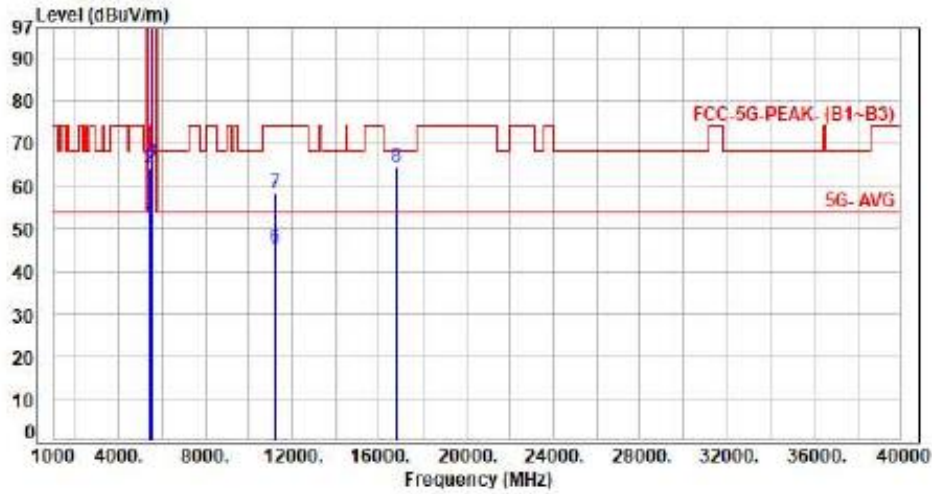


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.68	51.23	54.00	-2.77	Average	184	29	P
2	5460.00	7.55	56.70	64.25	74.00	-9.75	Peak	184	29	P
3	5470.00	7.58	57.98	65.56	68.20	-2.64	Peak	184	29	P
4	5600.00	7.51	93.02	100.53	200.00	-99.47	Average	184	29	P
5	5600.00	7.51	105.76	113.27	200.00	-86.73	Peak	184	29	P
6	11200.00	16.28	29.23	45.51	54.00	-8.49	Average	100	157	P
7	11200.00	16.28	42.16	58.44	74.00	-15.56	Peak	100	157	P
8	16800.00	20.60	44.04	64.64	68.20	-3.56	Peak	100	175	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

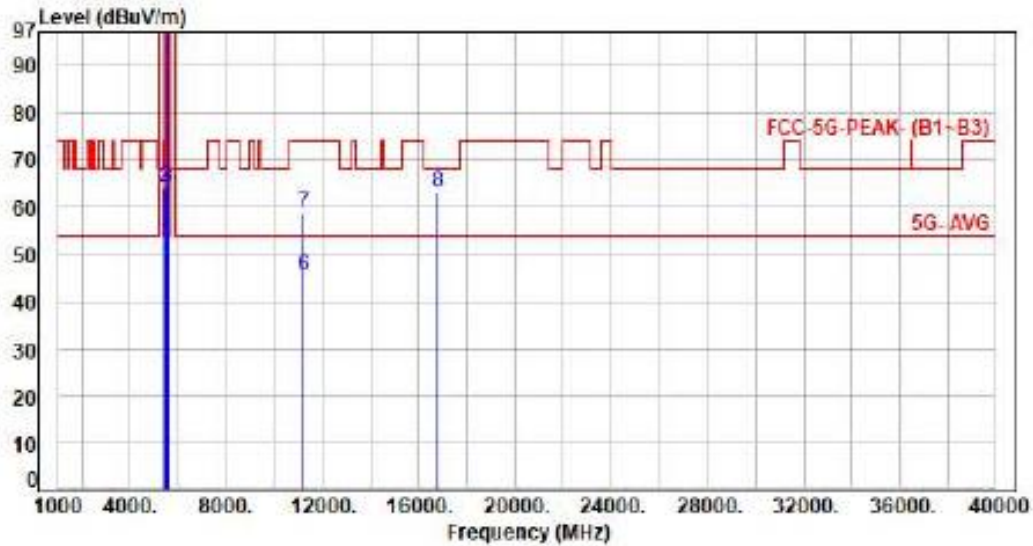


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.26	50.81	54.00	-3.19	Average	100	346	P
2	5460.00	7.55	56.46	64.01	74.00	-9.99	Peak	100	346	P
3	5470.00	7.58	56.65	64.23	68.20	-3.97	Peak	100	346	P
4	5500.00	7.51	92.83	100.34	200.00	-99.66	Average	100	346	P
5	5600.00	7.51	105.51	113.02	200.00	-86.98	Peak	100	346	P
6	11200.00	16.28	29.08	45.36	54.00	-8.64	Average	100	195	P
7	11200.00	16.28	42.38	58.66	74.00	-15.34	Peak	100	195	P
8	16800.00	20.60	42.63	63.23	68.20	-4.97	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

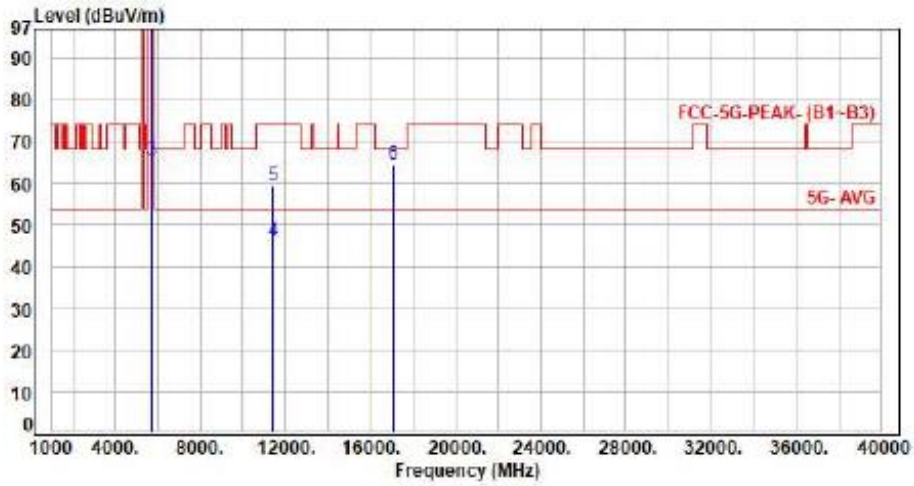


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	93.88	101.31	200.00	-98.69	Average	168	29	P
2	5700.00	7.43	106.72	114.15	200.00	-85.85	Peak	168	29	P
3	5725.00	7.43	58.21	65.64	68.20	-2.56	Peak	168	29	P
4	11400.00	16.35	29.78	46.13	54.00	-7.87	Average	100	292	P
5	11400.00	16.35	43.02	59.37	74.00	-14.63	Peak	100	292	P
6	17100.00	21.91	42.66	64.57	68.20	-3.63	Peak	100	174	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

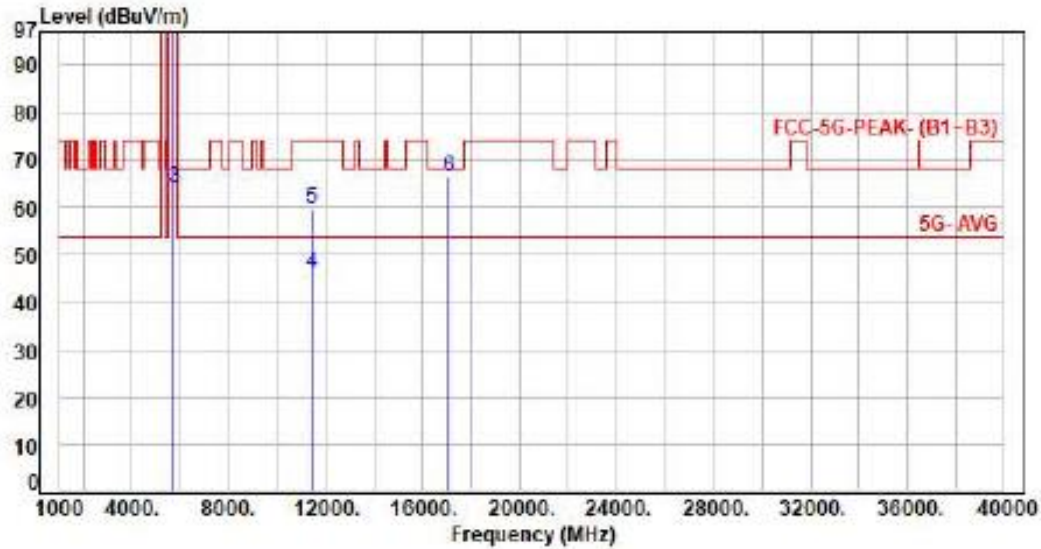


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	91.64	99.07	200.00	-100.93	Average	100	356	P
2	5700.00	7.43	103.89	111.32	200.00	-88.68	Peak	100	356	P
3	5725.00	7.43	56.82	64.25	68.20	-3.95	Peak	100	356	P
4	11400.00	16.35	29.84	46.19	54.00	-7.81	Average	100	165	P
5	11400.00	16.35	43.33	59.68	74.00	-14.32	Peak	100	165	P
6	17100.00	21.91	44.62	66.53	68.20	-1.67	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

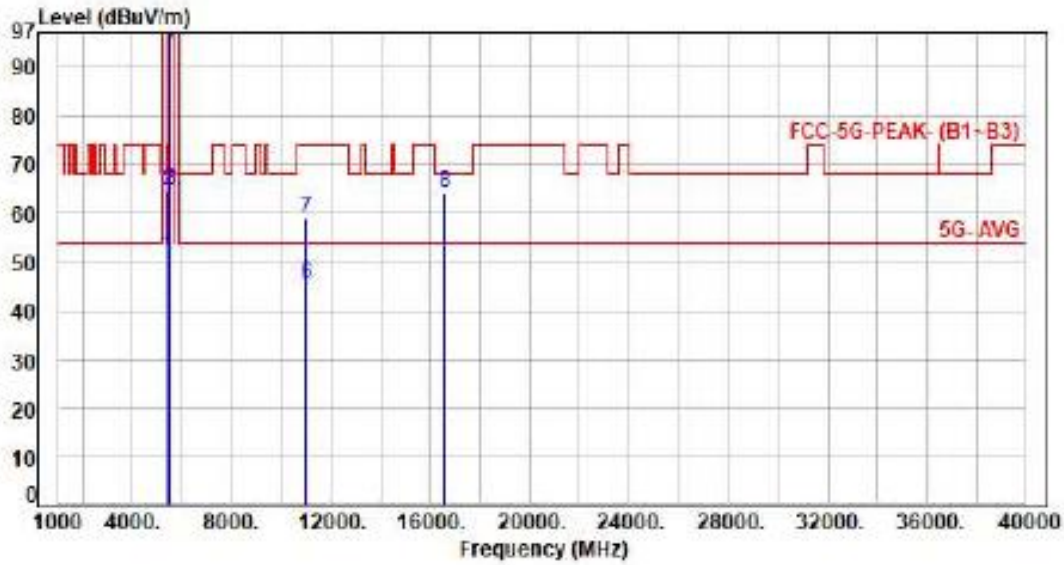


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.62	51.17	54.00	-2.83	Average	100	214	P
2	5460.00	7.55	56.92	64.47	74.00	-9.53	Peak	100	214	P
3	5470.00	7.58	57.46	65.04	68.20	-3.16	Peak	100	214	P
4	5510.00	7.66	87.01	94.67	200.00	-105.33	Average	100	214	P
5	5510.00	7.66	100.73	108.39	200.00	-91.61	Peak	100	214	P
6	11020.00	16.20	29.34	45.54	54.00	-8.46	Average	100	156	P
7	11020.00	16.20	42.96	59.16	74.00	-14.84	Peak	100	156	P
8	16530.00	19.08	45.18	64.26	68.20	-3.94	Peak	100	155	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

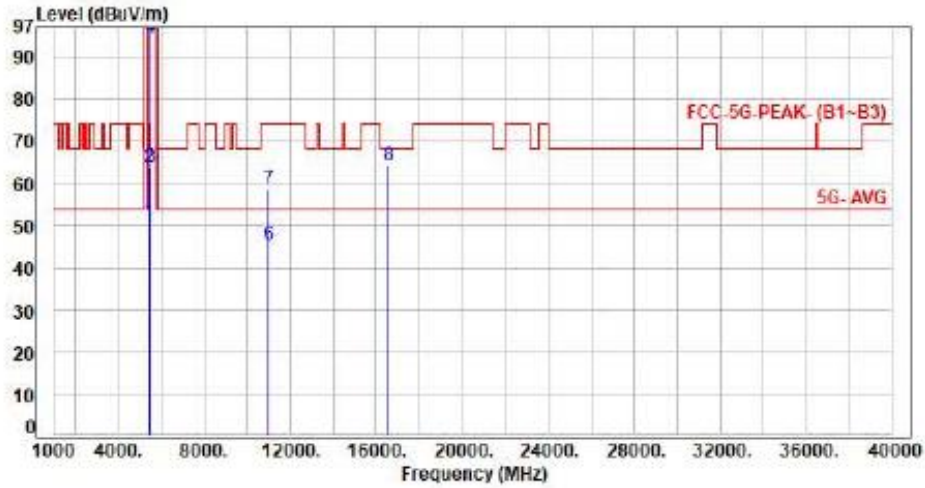


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.23	50.78	54.00	-3.22	Average	106	355	P
2	5460.00	7.55	56.22	63.77	74.00	-10.23	Peak	106	355	P
3	5470.00	7.58	56.06	63.64	68.20	-4.56	Peak	106	355	P
4	5510.00	7.66	86.74	94.40	200.00	-105.60	Average	106	355	P
5	5510.00	7.66	98.21	105.87	200.00	-94.13	Peak	106	355	P
6	11020.00	16.20	29.25	45.45	54.00	-8.55	Average	100	195	P
7	11020.00	16.20	42.45	58.65	74.00	-15.35	Peak	100	195	P
8	16530.00	19.08	45.18	64.26	68.20	-3.94	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

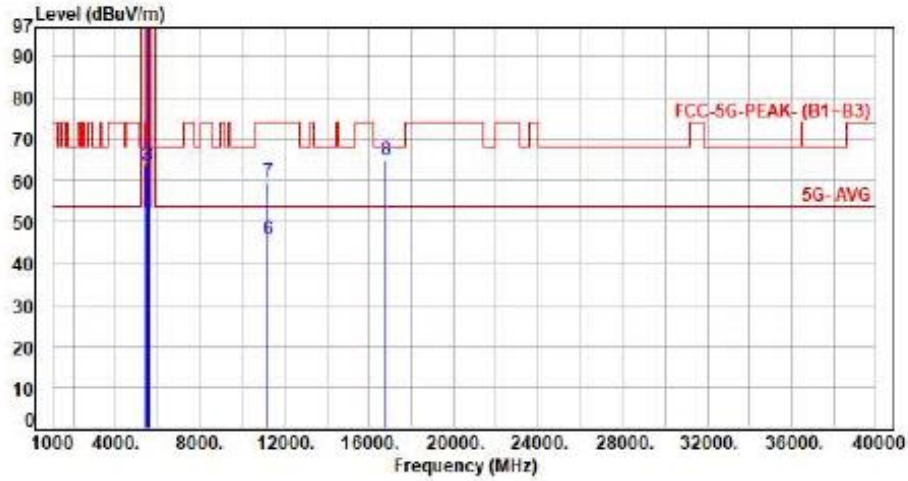


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.44	50.99	54.00	-3.01	Average	189	210	P
2	5460.00	7.55	56.33	63.88	74.00	-10.12	Peak	189	210	P
3	5470.00	7.58	56.33	63.91	68.20	-4.29	Peak	189	210	P
4	5590.00	7.53	92.01	99.54	200.00	-100.46	Average	189	210	P
5	5590.00	7.53	104.75	112.28	200.00	-87.72	Peak	189	210	P
6	11180.00	16.24	29.32	45.56	54.00	-8.44	Average	100	274	P
7	11180.00	16.24	43.48	59.72	74.00	-14.28	Peak	100	274	P
8	16770.00	20.39	44.54	64.93	68.20	-3.27	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex40 CH11B NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

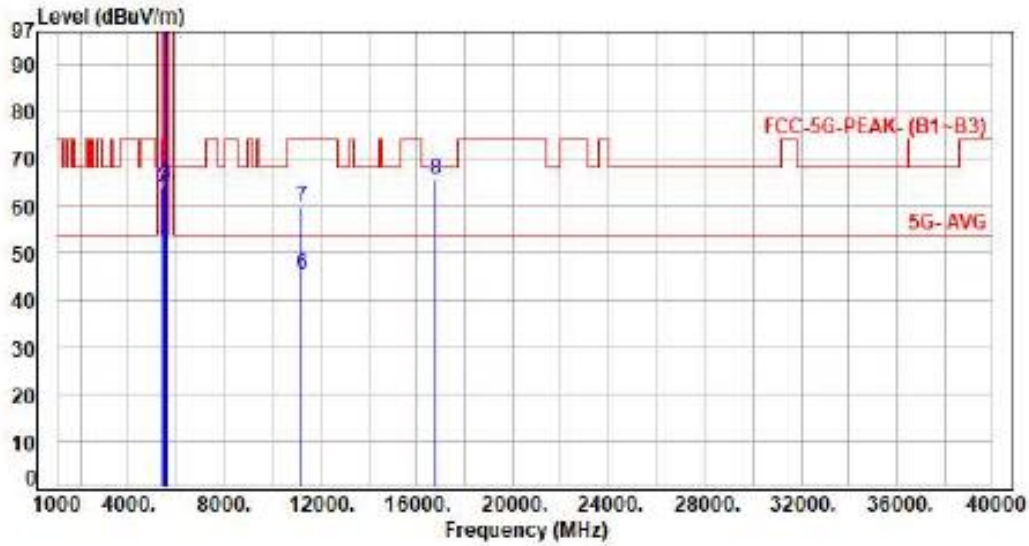


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.20	50.75	54.00	-3.25	Average	100	357	P
2	5460.00	7.55	56.36	63.91	74.00	-10.09	Peak	100	357	P
3	5470.00	7.58	56.90	64.48	68.20	-3.72	Peak	100	357	P
4	5590.00	7.53	90.49	98.02	200.00	-101.98	Average	100	357	P
5	5590.00	7.53	102.42	109.95	200.00	-90.05	Peak	100	357	P
6	11180.00	16.24	29.05	45.29	54.00	-8.71	Average	100	186	P
7	11180.00	16.24	43.35	59.59	74.00	-14.41	Peak	100	186	P
8	16770.00	20.39	45.24	65.63	68.20	-2.57	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax4B CH134 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

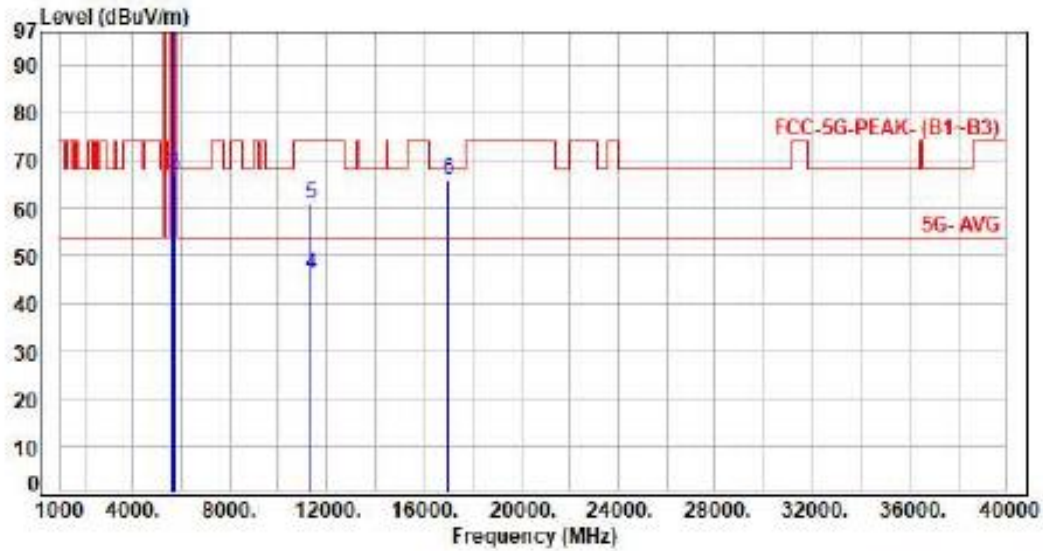


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	90.73	98.21	200.00	-101.79	Average	180	337	P
2	5670.00	7.48	103.06	110.54	200.00	-89.46	Peak	180	337	P
3	5725.00	7.43	59.56	66.99	68.20	-1.21	Peak	180	337	P
4	11340.00	16.33	29.78	46.11	54.00	-7.89	Average	100	192	P
5	11340.00	16.33	44.44	60.77	74.00	-13.23	Peak	100	192	P
6	17010.00	21.67	44.30	65.97	68.20	-2.23	Peak	100	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

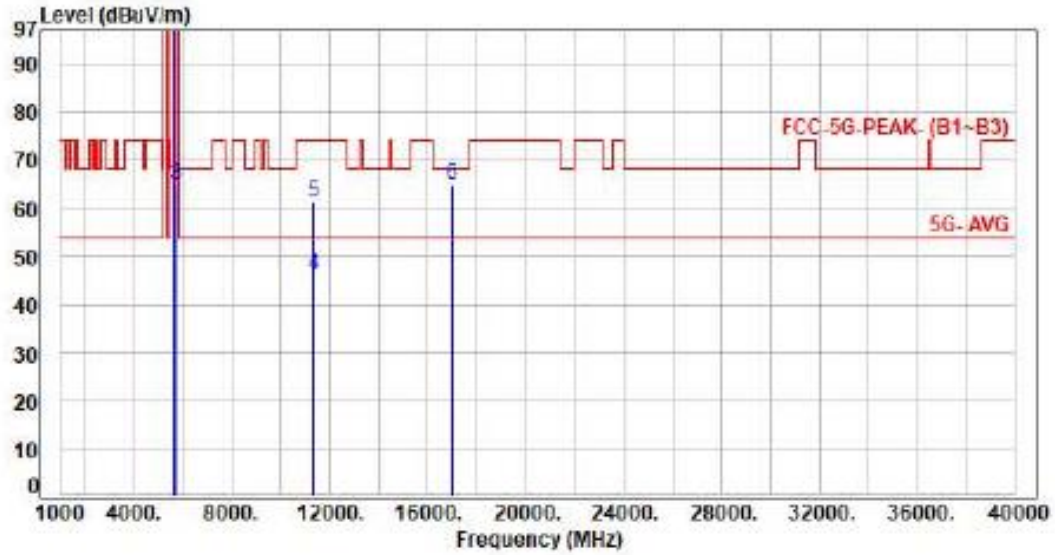


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	88.97	96.45	200.00	-103.55	Average	100	357	P
2	5670.00	7.48	101.07	108.55	200.00	-91.45	Peak	100	357	P
3	5725.00	7.43	57.51	64.94	68.20	-3.26	Peak	100	357	P
4	11340.00	16.33	29.76	46.09	54.00	-7.91	Average	100	266	P
5	11340.00	16.33	44.87	61.20	74.00	-12.80	Peak	100	266	P
6	17010.00	21.67	43.27	64.94	68.20	-3.26	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

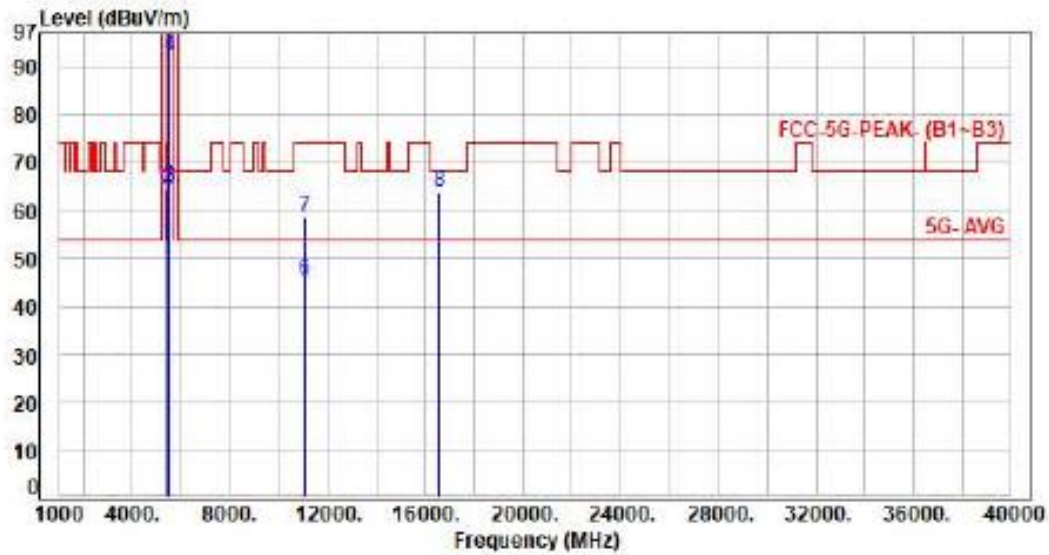


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.39	52.94	54.00	-1.06	Average	100	213	P
2	5460.00	7.55	56.91	64.46	74.00	-9.54	Peak	100	213	P
3	5470.00	7.58	57.24	64.82	68.20	-3.38	Peak	100	213	P
4	5530.00	7.63	84.70	92.33	200.00	-107.67	Average	100	213	P
5	5530.00	7.63	95.82	103.45	200.00	-96.55	Peak	100	213	P
6	11060.00	16.21	29.03	45.24	54.00	-8.76	Average	100	215	P
7	11060.00	16.21	42.46	58.67	74.00	-15.33	Peak	100	215	P
8	16590.00	19.48	44.19	63.67	68.20	-4.53	Peak	100	176	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

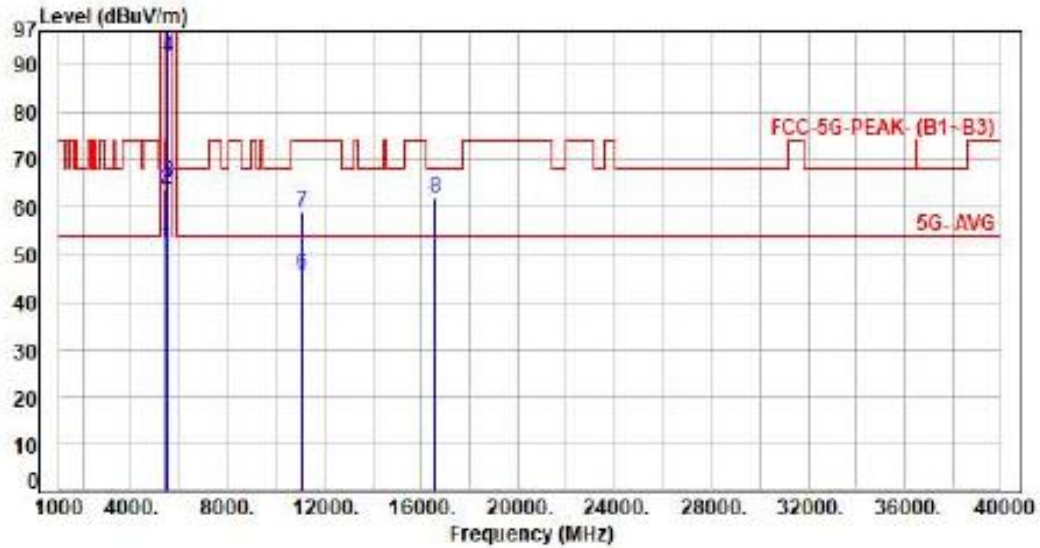


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.08	51.63	54.00	-2.37	Average	100	355	P
2	5460.00	7.55	56.32	63.87	74.00	-10.13	Peak	100	355	P
3	5470.00	7.58	57.78	65.36	68.20	-2.84	Peak	100	355	P
4	5530.00	7.63	83.73	91.36	200.00	-108.64	Average	100	355	P
5	5530.00	7.63	95.42	103.05	200.00	-96.95	Peak	100	355	P
6	11060.00	16.21	29.66	45.87	54.00	-8.13	Average	100	186	P
7	11060.00	16.21	42.93	59.14	74.00	-14.86	Peak	100	186	P
8	16590.00	19.48	42.50	61.98	68.20	-6.22	Peak	100	311	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

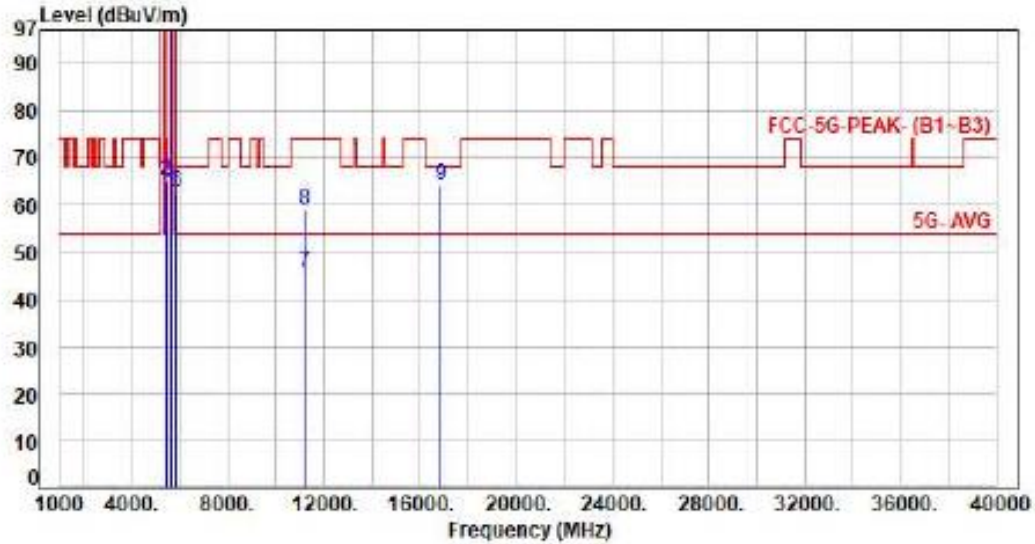


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.21	50.76	54.00	-3.24	Average	196	329	P
2	5460.00	7.55	57.84	65.39	74.00	-8.61	Peak	196	329	P
3	5470.00	7.58	57.19	64.77	68.20	-3.43	Peak	196	329	P
4	5610.00	7.51	88.71	96.22	200.00	-103.78	Average	196	329	P
5	5610.00	7.51	101.72	109.23	200.00	-90.77	Peak	196	329	P
6	5850.00	7.47	55.09	62.56	68.20	-5.64	Peak	196	329	P
7	11220.00	16.28	29.52	45.80	54.00	-8.20	Average	100	148	P
8	11220.00	16.28	42.74	59.02	74.00	-14.98	Peak	100	148	P
9	16830.00	20.70	43.52	64.22	68.20	-3.98	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH134 N5S1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

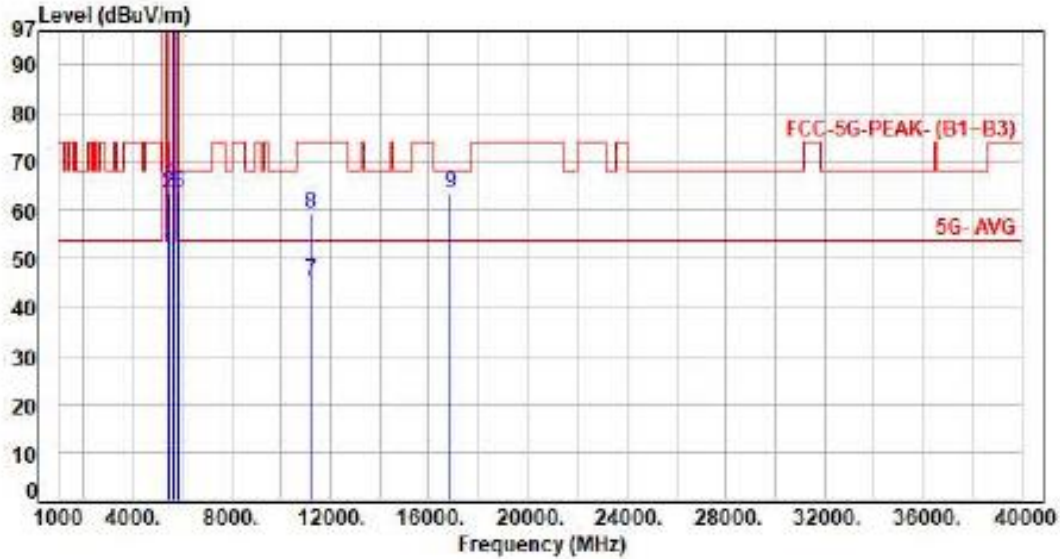


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.65	51.20	54.00	-2.80	Average	100	0	P
2	5460.00	7.55	56.05	63.60	74.00	-10.40	Peak	100	0	P
3	5470.00	7.58	57.18	64.76	68.20	-3.44	Peak	100	0	P
4	5610.00	7.51	87.57	95.08	200.00	-104.92	Average	100	0	P
5	5610.00	7.51	98.83	106.34	200.00	-93.66	Peak	100	0	P
6	5850.00	7.47	56.04	63.51	68.20	-4.69	Peak	100	0	P
7	11220.00	16.28	29.24	45.52	54.00	-8.48	Average	100	195	P
8	11220.00	16.28	43.13	59.41	74.00	-14.59	Peak	100	195	P
9	16830.00	20.70	42.68	63.38	68.20	-4.82	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

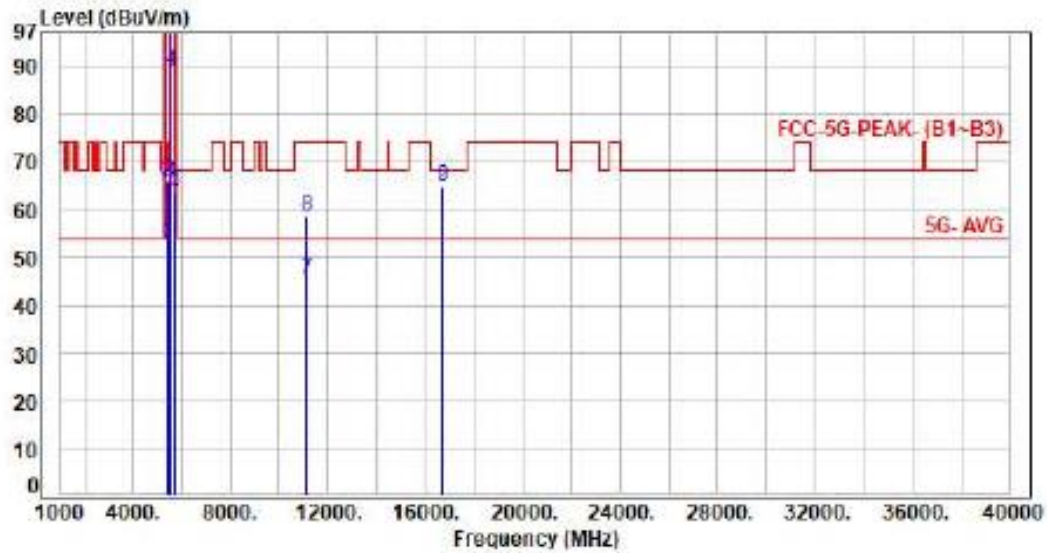


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.42	52.97	54.00	-1.03	Average	202	326	P
2	5460.00	7.55	58.57	66.12	74.00	-7.88	Peak	202	326	P
3	5470.00	7.58	58.47	66.05	68.20	-2.15	Peak	202	326	P
4	5570.00	7.56	81.23	88.79	200.00	-111.21	Average	202	326	P
5	5570.00	7.56	92.07	99.63	200.00	-100.37	Peak	202	326	P
6	5725.00	7.43	56.35	63.78	68.20	-4.42	Peak	202	326	P
7	11140.00	16.21	29.19	45.40	54.00	-8.60	Average	100	188	P
8	11140.00	16.21	42.37	58.58	74.00	-15.42	Peak	100	188	P
9	16710.00	20.10	44.87	64.97	68.20	-3.23	Peak	100	205	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

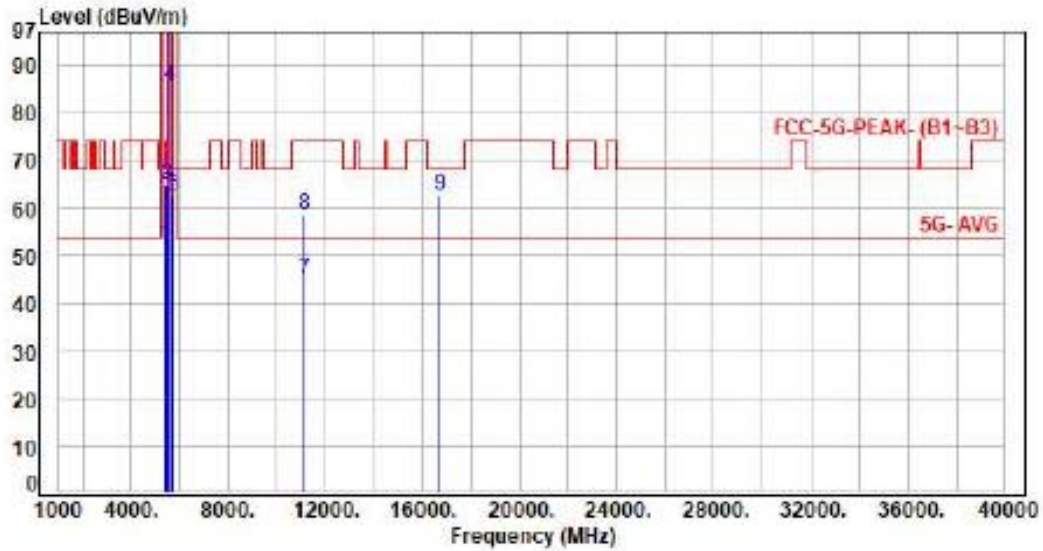


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.73	52.28	54.00	-1.72	Average	100	355	P
2	5460.00	7.55	57.37	64.92	74.00	-9.08	Peak	100	355	P
3	5470.00	7.58	57.26	64.84	68.20	-3.36	Peak	100	355	P
4	5570.00	7.56	78.04	85.60	200.00	-114.40	Average	100	355	P
5	5570.00	7.56	91.61	99.17	200.00	-100.83	Peak	100	355	P
6	5725.00	7.43	55.11	62.54	68.20	-5.66	Peak	100	355	P
7	11140.00	16.21	28.63	44.84	54.00	-9.16	Average	100	295	P
8	11140.00	16.21	42.32	58.53	74.00	-15.47	Peak	100	295	P
9	16710.00	20.10	42.66	62.76	68.20	-5.44	Peak	100	245	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

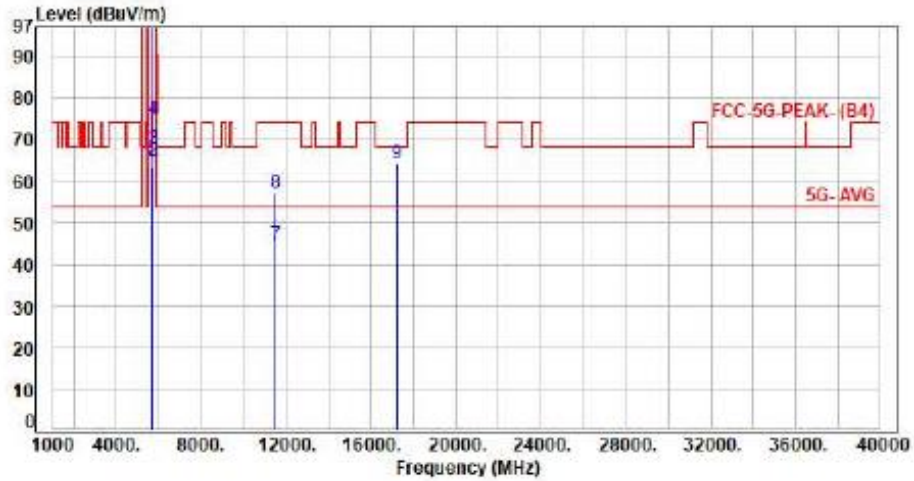


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.07	63.58	68.20	-4.62	Peak	147	199	P
2	5700.00	7.43	57.39	64.82	105.20	-40.38	Peak	147	199	P
3	5720.00	7.43	60.33	67.76	110.80	-43.04	Peak	147	199	P
4	5725.00	7.43	67.31	74.74	122.20	-47.46	Peak	147	199	P
5	5745.00	7.44	93.07	100.51	200.00	-99.49	Average	147	199	P
6	5745.00	7.44	105.69	113.13	200.00	-86.87	Peak	147	199	P
7	11490.00	16.52	28.20	44.72	54.00	-9.28	Average	100	165	P
8	11490.00	16.52	40.59	57.11	74.00	-16.89	Peak	100	165	P
9	17235.00	22.43	41.83	64.26	68.20	-3.94	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From Aapter(AC120V/60Hz)
Pol : Horizontal

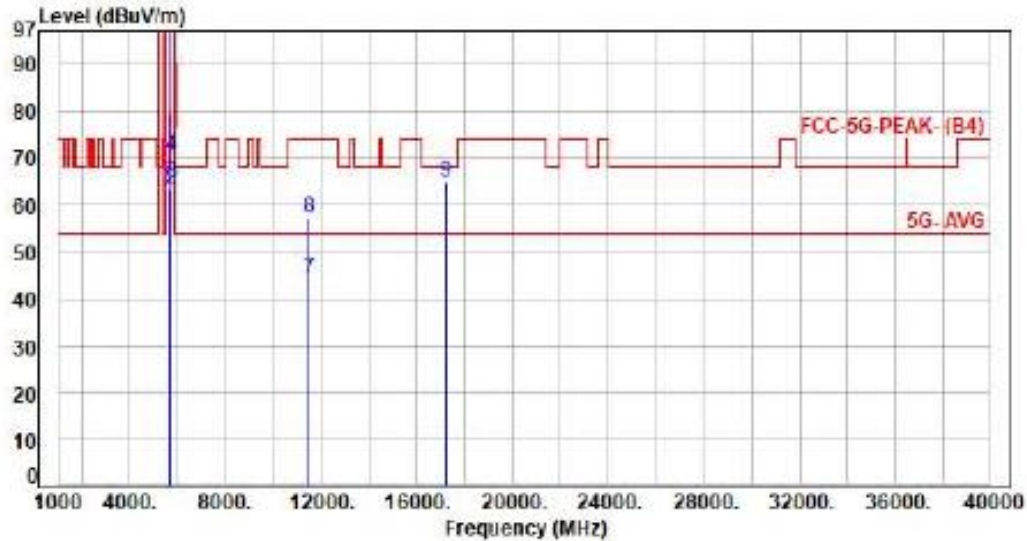


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.90	63.41	68.20	-4.79	Peak	100	360	P
2	5700.00	7.43	56.10	63.53	105.20	-41.67	Peak	100	360	P
3	5720.00	7.43	57.56	64.99	110.00	-45.01	Peak	100	360	P
4	5725.00	7.43	63.01	70.44	122.20	-51.76	Peak	100	360	P
5	5745.00	7.44	90.94	98.38	200.00	-101.62	Average	100	360	P
6	5745.00	7.44	103.91	111.35	200.00	-88.65	Peak	100	360	P
7	11490.00	16.52	27.84	44.36	54.00	-9.64	Average	100	331	P
8	11490.00	16.52	40.75	57.27	74.00	-16.73	Peak	100	331	P
9	17235.00	22.43	42.30	64.73	68.20	-3.47	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

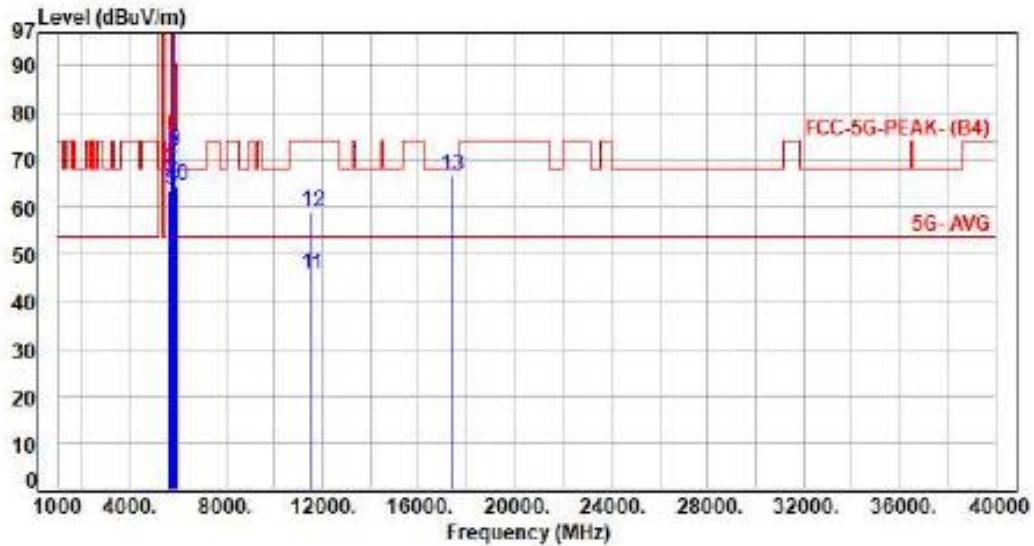


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.11	63.62	68.20	-4.58	Peak	100	200	P
2	5700.00	7.43	60.92	68.35	105.20	-36.85	Peak	100	200	P
3	5720.00	7.43	56.27	63.70	110.80	-47.10	Peak	100	200	P
4	5725.00	7.43	56.98	64.41	122.20	-57.79	Peak	100	200	P
5	5785.00	7.45	94.09	101.54	200.00	-98.46	Average	100	200	P
6	5785.00	7.45	107.05	114.50	200.00	-85.50	Peak	100	200	P
7	5850.00	7.47	63.25	70.72	122.20	-51.48	Peak	100	200	P
8	5855.00	7.49	64.41	71.90	110.80	-38.90	Peak	100	200	P
9	5875.00	7.57	57.20	64.77	105.20	-40.43	Peak	100	200	P
10	5925.00	7.73	56.64	64.37	68.20	-3.83	Peak	100	200	P
11	11570.00	16.76	29.09	45.85	54.00	-8.15	Average	100	221	P
12	11570.00	16.76	42.35	59.11	74.00	-14.89	Peak	100	221	P
13	17355.00	23.20	43.74	66.94	68.20	-1.26	Peak	100	295	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

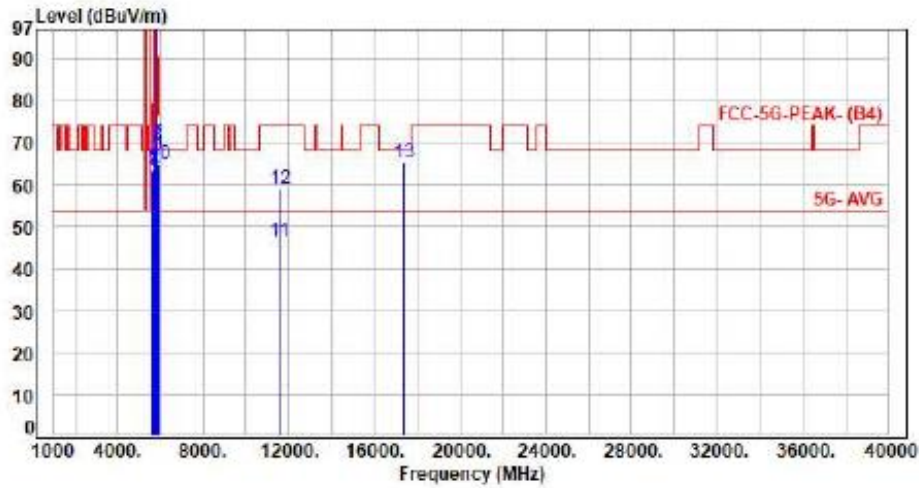


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.76	63.27	68.20	-4.93	Peak	100	360	P
2	5700.00	7.43	56.30	63.73	105.20	-41.47	Peak	100	360	P
3	5720.00	7.43	56.17	63.60	110.00	-47.20	Peak	100	360	P
4	5725.00	7.43	55.69	63.12	122.20	-59.08	Peak	100	360	P
5	5785.00	7.45	92.99	100.44	200.00	-99.56	Average	100	360	P
6	5785.00	7.45	106.52	113.97	200.00	-86.03	Peak	100	360	P
7	5850.00	7.47	62.71	70.18	122.20	-52.02	Peak	100	360	P
8	5855.00	7.49	61.94	69.43	110.00	-41.37	Peak	100	360	P
9	5875.00	7.57	59.45	67.02	105.20	-38.18	Peak	100	360	P
10	5925.00	7.73	57.16	64.89	68.20	-3.31	Peak	100	360	P
11	11570.00	16.76	29.82	46.58	54.00	-7.42	Average	100	321	P
12	11570.00	16.76	42.26	59.02	74.00	-14.98	Peak	100	321	P
13	17355.00	23.20	41.99	65.19	68.20	-3.01	Peak	100	252	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

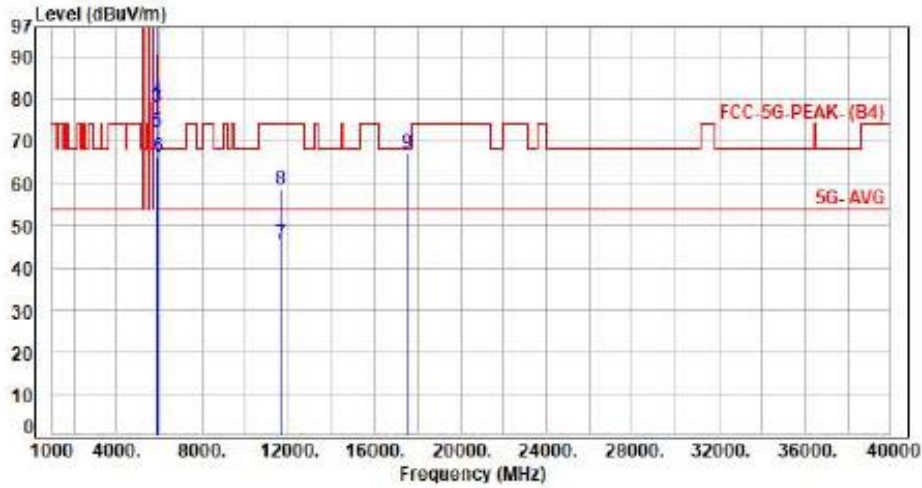


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	93.87	101.33	200.00	-98.67	Average	116	204	P
2	5825.00	7.46	107.17	114.63	200.00	-85.37	Peak	116	204	P
3	5850.00	7.47	70.64	78.11	122.20	-44.09	Peak	116	204	P
4	5855.00	7.49	72.06	79.55	110.00	-31.25	Peak	116	204	P
5	5875.00	7.57	64.57	72.14	105.20	-33.06	Peak	116	204	P
6	5925.00	7.73	58.71	66.44	68.20	-1.76	Peak	116	204	P
7	11650.00	16.91	28.97	45.88	54.00	-8.12	Average	100	165	P
8	11650.00	16.91	41.91	58.82	74.00	-15.18	Peak	100	165	P
9	17475.00	23.91	43.20	67.11	68.20	-1.09	Peak	100	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

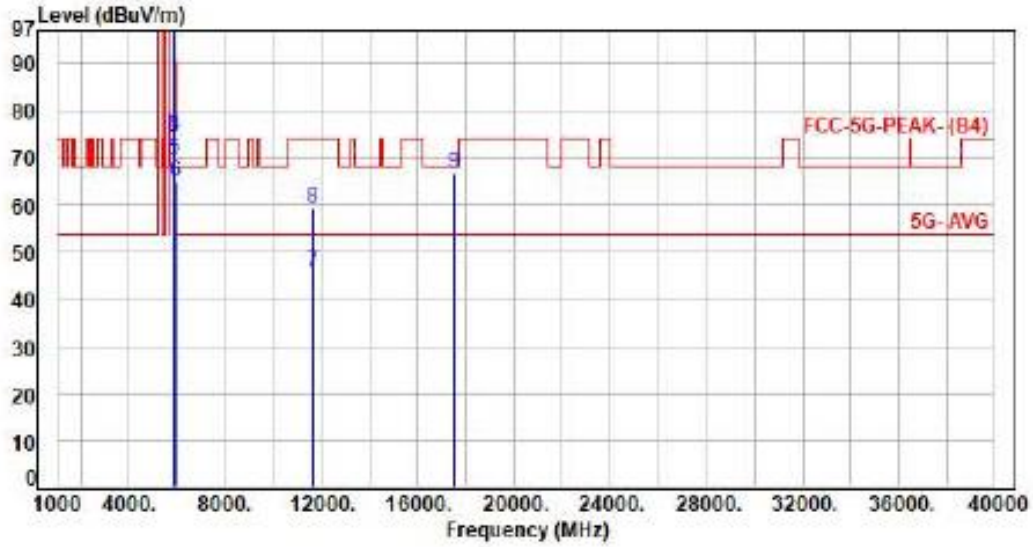


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	93.76	101.22	200.00	-98.78	Average	110	0	P
2	5825.00	7.46	105.66	113.12	200.00	-86.88	Peak	110	0	P
3	5850.00	7.47	66.98	74.45	122.20	-47.75	Peak	110	0	P
4	5855.00	7.49	67.35	74.84	110.80	-35.96	Peak	110	0	P
5	5875.00	7.57	62.27	69.84	105.20	-35.36	Peak	110	0	P
6	5925.00	7.73	57.11	64.84	68.20	-3.36	Peak	110	0	P
7	11650.00	16.91	28.73	45.64	54.00	-8.36	Average	100	192	P
8	11650.00	16.91	42.30	59.21	74.00	-14.79	Peak	100	192	P
9	17475.00	23.91	42.93	66.84	68.20	-1.36	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

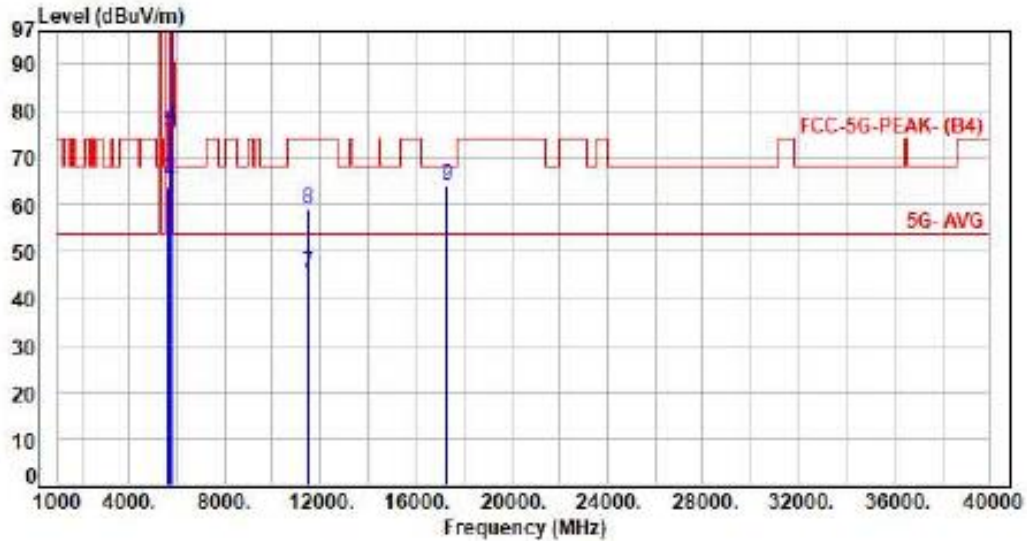


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.44	63.95	68.20	-4.25	Peak	150	201	P
2	5700.00	7.43	58.38	65.81	105.20	-39.39	Peak	150	201	P
3	5720.00	7.43	68.21	75.64	110.80	-35.16	Peak	150	201	P
4	5725.00	7.43	69.15	76.58	122.20	-45.62	Peak	150	201	P
5	5755.00	7.44	90.94	98.38	200.00	-101.62	Average	150	201	P
6	5755.00	7.44	103.98	111.42	200.00	-88.58	Peak	150	201	P
7	11510.00	16.57	28.82	45.39	54.00	-8.61	Average	100	138	P
8	11510.00	16.57	42.41	58.98	74.00	-15.02	Peak	100	138	P
9	17265.00	22.62	41.69	64.31	68.20	-3.89	Peak	100	212	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

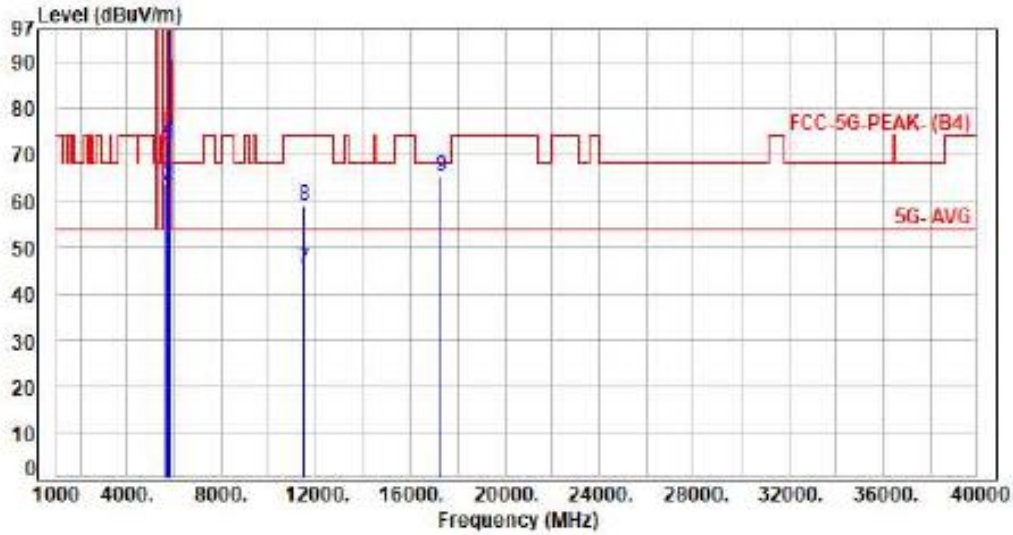


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.45	63.96	68.20	-4.24	Peak	135	360	P
2	5700.00	7.43	56.18	63.61	105.20	-41.59	Peak	135	360	P
3	5720.00	7.43	64.55	71.98	110.00	-38.02	Peak	135	360	P
4	5720.00	7.43	65.64	73.07	110.00	-37.73	Peak	135	360	P
5	5755.00	7.44	88.84	96.28	200.00	-103.72	Average	135	360	P
6	5755.00	7.44	101.69	109.13	200.00	-90.87	Peak	135	360	P
7	11510.00	16.57	28.79	45.36	54.00	-8.64	Average	100	196	P
8	11510.00	16.57	42.50	59.07	74.00	-14.93	Peak	100	196	P
9	17265.00	22.62	42.84	65.46	68.20	-2.74	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x40 CH159 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

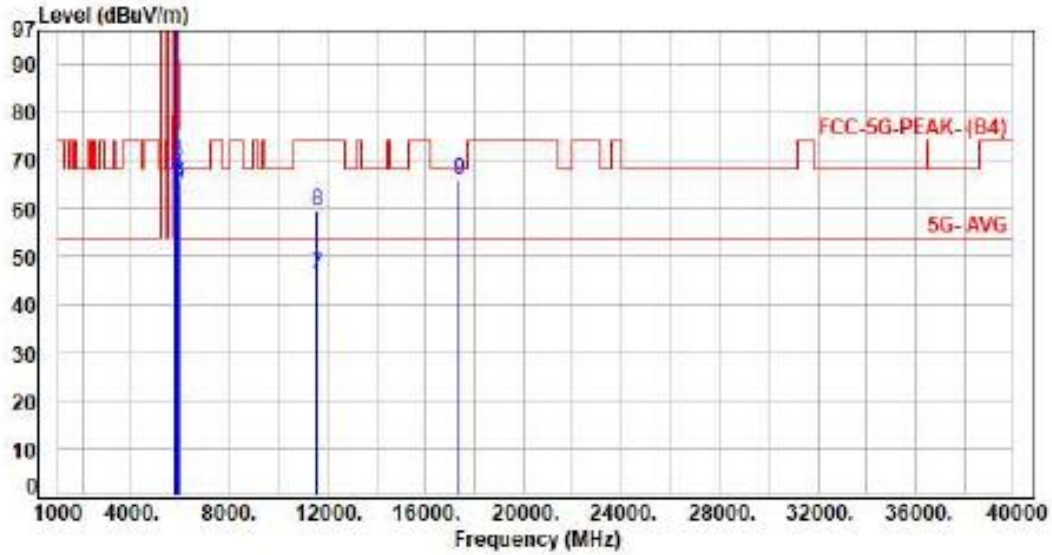


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	91.35	98.80	200.00	-101.20	Average	130	204	P
2	5795.00	7.45	103.34	110.79	200.00	-89.21	Peak	130	204	P
3	5850.00	7.47	62.29	69.76	122.20	-52.44	Peak	130	204	P
4	5855.00	7.49	59.39	66.88	110.80	-43.92	Peak	130	204	P
5	5875.00	7.57	56.68	64.25	105.20	-40.95	Peak	130	204	P
6	5925.00	7.73	57.52	65.25	68.20	-2.95	Peak	130	204	P
7	11590.00	16.80	29.32	46.12	54.00	-7.88	Average	100	338	P
8	11590.00	16.80	42.74	59.54	74.00	-14.46	Peak	100	338	P
9	17385.00	23.33	42.57	65.90	68.20	-2.30	Peak	100	206	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

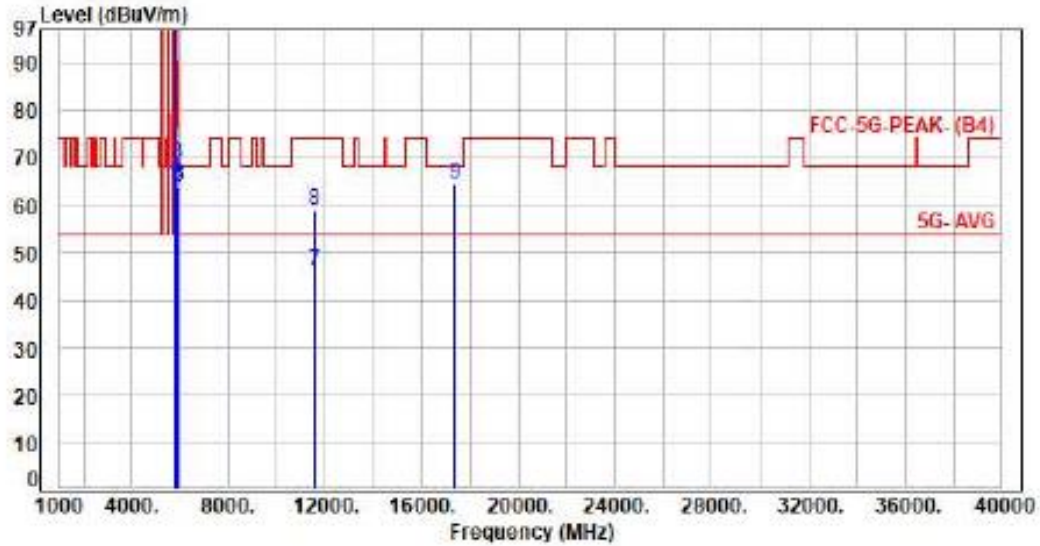


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	90.39	97.84	200.00	-102.16	Average	100	0	P
2	5795.00	7.45	102.90	110.35	200.00	-89.65	Peak	100	0	P
3	5850.00	7.47	61.41	68.88	122.20	-53.32	Peak	100	0	P
4	5855.00	7.49	58.26	65.75	110.80	-45.05	Peak	100	0	P
5	5875.00	7.57	57.07	64.64	105.20	-40.56	Peak	100	0	P
6	5925.00	7.73	55.97	63.70	68.20	-4.50	Peak	100	0	P
7	11590.00	16.80	29.16	45.96	54.00	-8.04	Average	100	146	P
8	11590.00	16.80	42.08	58.88	74.00	-15.12	Peak	100	135	P
9	17385.00	23.33	41.08	64.41	68.20	-3.79	Peak	100	292	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

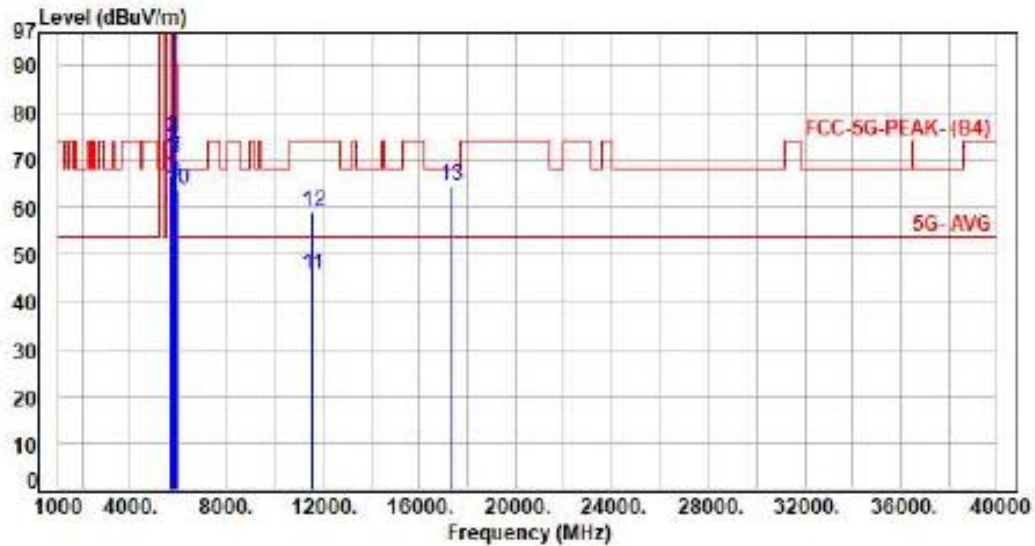


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	59.22	66.73	68.20	-1.47	Peak	172	320	P
2	5700.00	7.43	65.12	72.55	105.20	-32.65	Peak	172	320	P
3	5720.00	7.43	67.35	74.78	110.80	-36.02	Peak	172	320	P
4	5725.00	7.43	66.71	74.14	122.20	-48.06	Peak	172	320	P
5	5775.00	7.45	89.86	97.31	200.00	-102.69	Average	172	320	P
6	5775.00	7.45	101.74	109.19	200.00	-90.81	Peak	172	320	P
7	5850.00	7.47	63.08	70.55	122.20	-51.65	Peak	172	320	P
8	5855.00	7.49	63.11	70.60	110.80	-40.20	Peak	172	320	P
9	5875.00	7.57	57.87	65.44	105.20	-39.76	Peak	172	320	P
10	5925.00	7.73	56.03	63.76	68.20	-4.44	Peak	172	320	P
11	11550.00	16.72	28.95	45.67	54.00	-8.33	Average	100	131	P
12	11550.00	16.72	42.15	58.87	74.00	-15.13	Peak	100	131	P
13	17325.00	23.02	41.65	64.67	68.20	-3.53	Peak	100	158	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NS51 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

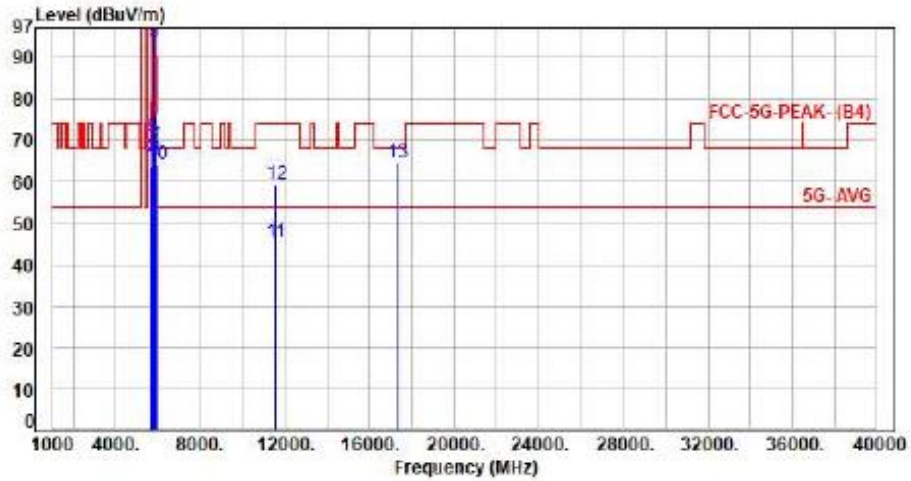


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.37	63.88	68.20	-4.32	Peak	121	0	P
2	5700.00	7.43	58.71	66.14	105.20	-39.06	Peak	121	0	P
3	5720.00	7.43	63.36	70.79	110.80	-40.01	Peak	121	0	P
4	5725.00	7.43	64.21	71.64	122.20	-50.56	Peak	121	0	P
5	5775.00	7.45	86.00	93.53	200.00	-106.47	Average	121	0	P
6	5775.00	7.45	98.36	105.81	200.00	-94.19	Peak	121	0	P
7	5850.00	7.47	61.10	68.57	122.20	-53.63	Peak	121	0	P
8	5855.00	7.49	59.66	67.15	110.80	-43.65	Peak	121	0	P
9	5875.00	7.57	57.78	65.35	105.20	-39.85	Peak	121	0	P
10	5925.00	7.73	56.49	64.22	68.20	-3.98	Peak	121	0	P
11	11550.00	16.72	28.73	45.45	54.00	-8.55	Average	100	138	P
12	11550.00	16.72	42.55	59.27	74.00	-14.73	Peak	100	138	P
13	17325.00	23.02	41.61	64.63	68.20	-3.57	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 N551 MCS0
 Voltage : From Adepter(AC120V/60Hz)
 Pol : Vertical

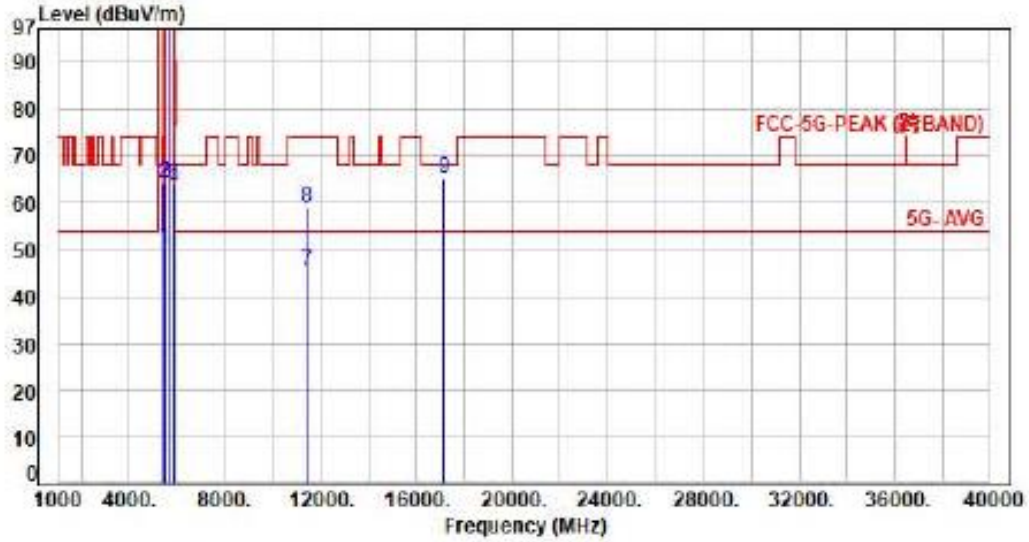


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.14	50.69	54.00	-3.31	Average	178	323	P
2	5460.00	7.55	56.59	64.14	74.00	-9.86	Peak	178	323	P
3	5470.00	7.58	56.45	64.03	68.20	-4.17	Peak	178	323	P
4	5720.00	7.43	93.10	100.53	200.00	-99.47	Average	178	323	P
5	5720.00	7.43	106.21	113.64	200.00	-86.36	Peak	178	323	P
6	5850.00	7.47	56.44	63.91	68.20	-4.29	Peak	178	323	P
7	11440.00	16.43	28.96	45.39	54.00	-8.61	Average	100	185	P
8	11440.00	16.43	42.61	59.04	74.00	-14.96	Peak	100	185	P
9	17160.00	22.17	43.20	65.37	68.20	-2.83	Peak	100	277	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

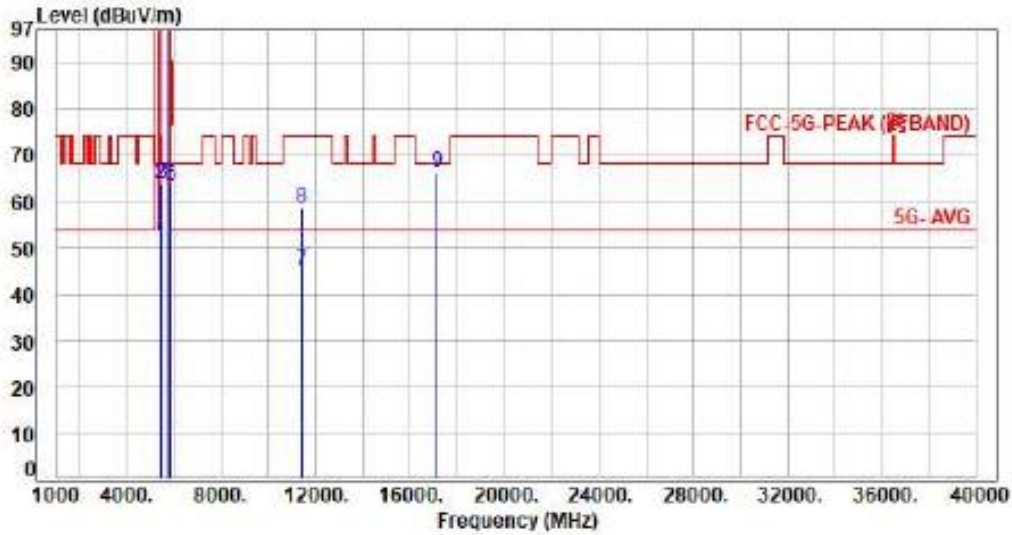


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.19	50.74	54.00	-3.26	Average	100	0	P
2	5460.00	7.55	56.24	63.79	74.00	-10.21	Peak	100	0	P
3	5470.00	7.58	56.20	63.78	68.20	-4.42	Peak	100	0	P
4	5720.00	7.43	90.93	98.36	200.00	-101.64	Average	100	0	P
5	5720.00	7.43	102.19	109.62	200.00	-90.38	Peak	100	0	P
6	5850.00	7.47	55.95	63.42	68.20	-4.78	Peak	100	0	P
7	11440.00	16.43	28.74	45.17	54.00	-8.83	Average	100	180	P
8	11440.00	16.43	42.16	58.59	74.00	-15.41	Peak	100	180	P
9	17160.00	22.17	44.20	66.37	68.20	-1.83	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH142 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

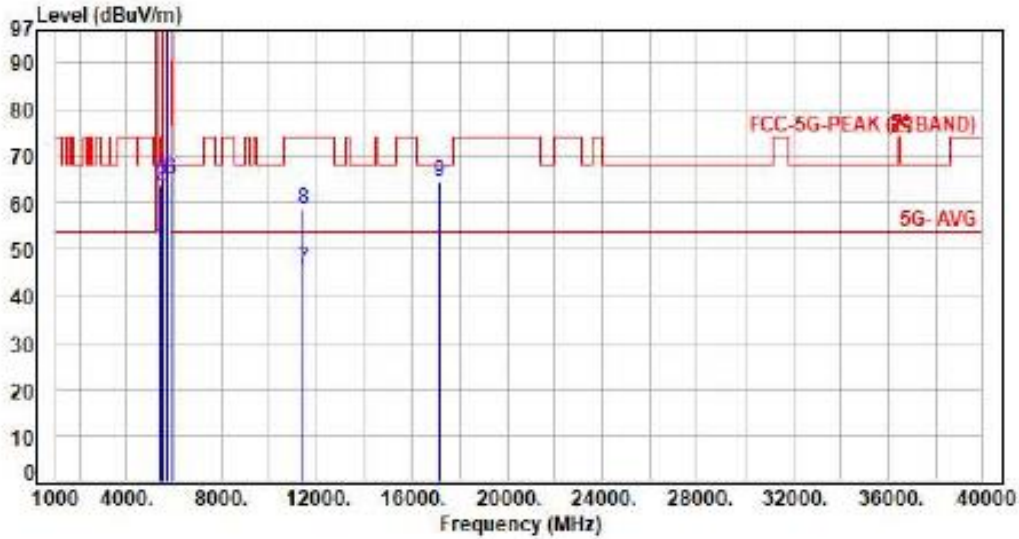


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.07	50.62	54.00	-3.38	Average	188	31	P
2	5460.00	7.55	56.35	63.90	74.00	-10.10	Peak	188	31	P
3	5470.00	7.58	57.23	64.81	68.20	-3.39	Peak	188	31	P
4	5710.00	7.43	91.41	98.84	200.00	-101.16	Average	188	31	P
5	5710.00	7.43	103.40	110.83	200.00	-89.17	Peak	188	31	P
6	5850.00	7.47	57.59	65.06	68.20	-3.14	Peak	188	31	P
7	11420.00	16.39	29.47	45.86	54.00	-8.14	Average	100	192	P
8	11420.00	16.39	42.40	58.79	74.00	-15.21	Peak	100	192	P
9	17130.00	22.05	42.66	64.71	68.20	-3.49	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH142 NSS1 MCS0
Voltage : From Aapter(AC120V/60Hz)
Pol : Horizontal

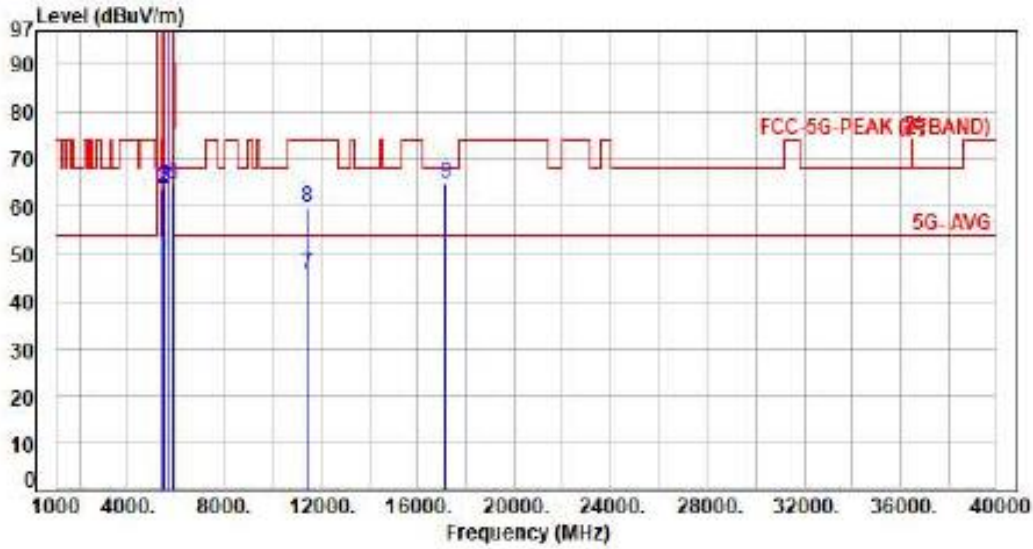


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.14	50.69	54.00	-3.31	Average	100	355	P
2	5460.00	7.55	56.12	63.67	74.00	-10.33	Peak	100	355	P
3	5470.00	7.58	56.42	64.00	68.20	-4.20	Peak	100	355	P
4	5710.00	7.43	89.81	97.24	200.00	-102.76	Average	100	355	P
5	5710.00	7.43	101.72	109.15	200.00	-90.85	Peak	100	355	P
6	5850.00	7.47	56.91	64.38	68.20	-3.82	Peak	100	355	P
7	11420.00	16.39	29.46	45.85	54.00	-8.15	Average	100	146	P
8	11420.00	16.39	43.51	59.90	74.00	-14.10	Peak	100	146	P
9	17130.00	22.05	43.01	65.06	68.20	-3.14	Peak	100	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH138 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

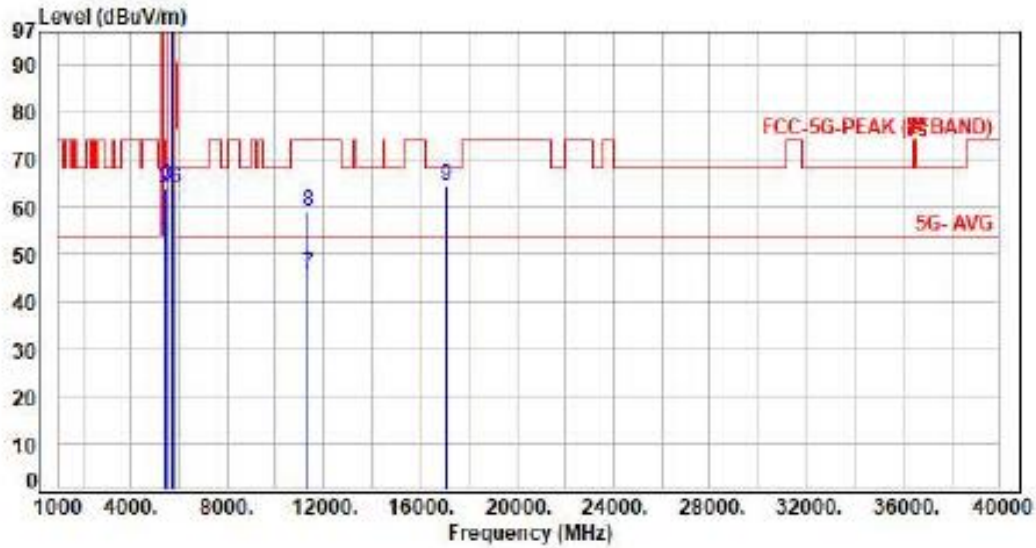


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.89	52.64	54.00	-1.36	Average	182	30	P
2	5460.00	7.55	56.43	63.98	74.00	-10.02	Peak	182	30	P
3	5470.00	7.58	56.83	64.41	68.20	-3.79	Peak	182	30	P
4	5690.00	7.44	90.15	97.59	200.00	-102.41	Average	182	30	P
5	5690.00	7.44	102.95	110.39	200.00	-89.61	Peak	182	30	P
6	5850.00	7.47	56.19	63.66	68.20	-4.54	Peak	182	30	P
7	11380.00	16.36	29.51	45.87	54.00	-8.13	Average	100	216	P
8	11380.00	16.36	42.79	59.15	74.00	-14.85	Peak	100	216	P
9	17070.00	21.83	42.64	64.47	68.20	-3.73	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

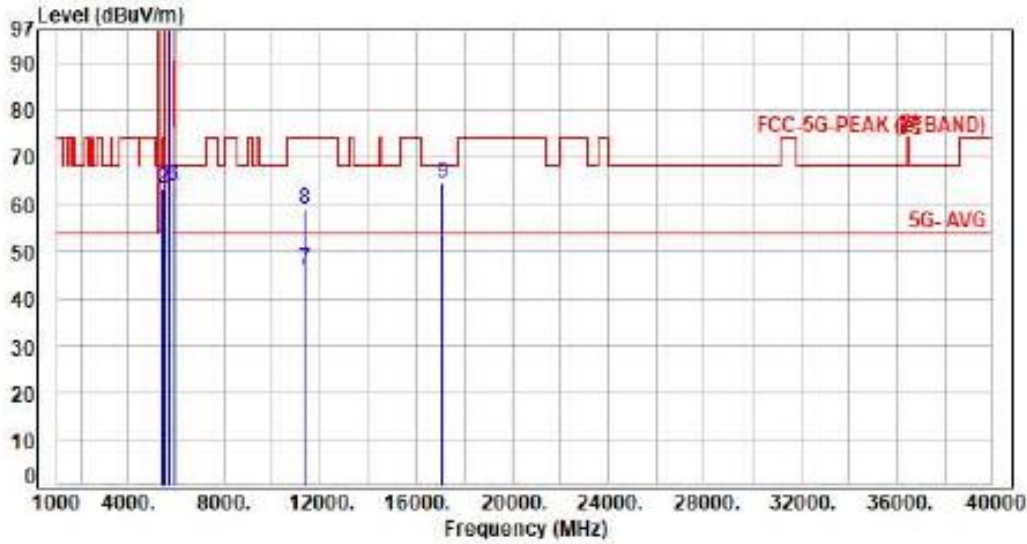

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.18	50.73	54.00	-3.27	Average	223	348	P
2	5460.00	7.55	55.70	63.25	74.00	-10.75	Peak	223	348	P
3	5470.00	7.58	55.91	63.49	68.20	-4.71	Peak	223	348	P
4	5690.00	7.44	88.49	95.93	200.00	-104.07	Average	223	348	P
5	5690.00	7.44	101.06	108.50	200.00	-91.50	Peak	223	348	P
6	5850.00	7.47	56.41	63.88	68.20	-4.32	Peak	223	348	P
7	11380.00	16.36	29.76	46.12	54.00	-7.88	Average	100	195	P
8	11380.00	16.36	42.65	59.01	74.00	-14.99	Peak	100	195	P
9	17070.00	21.83	42.61	64.44	68.20	-3.76	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

SISO

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	2.11	2.12	99.53%

MIMO


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	5.372	5.376	99.93%
802.11ax HE40	4.828	4.832	99.92%
802.11ax HE80	2.566	2.575	99.65%
802.11ax HE160	2.224	2.230	99.73%

7.5. Measurement Methods


26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




SISO
Modulation Type: 802.11a

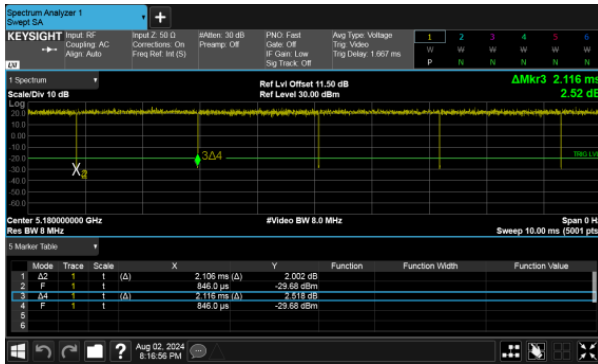

MIMO
Modulation Type: 802.11ax20

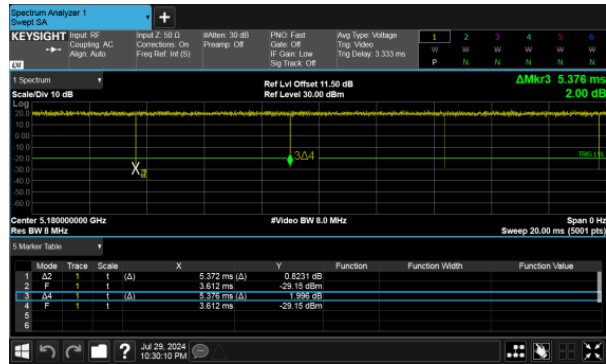


Modulation Type: 802.11ax40

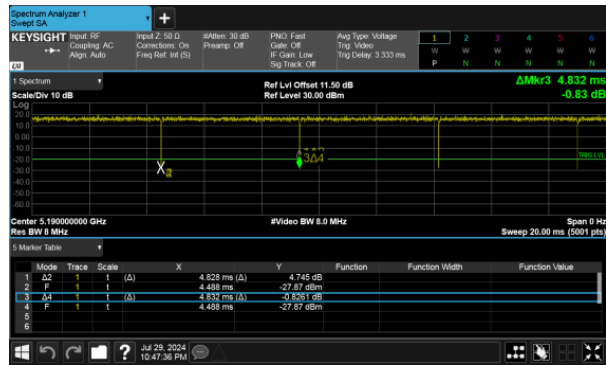




MIMO

Modulation Type: 802.11ax80

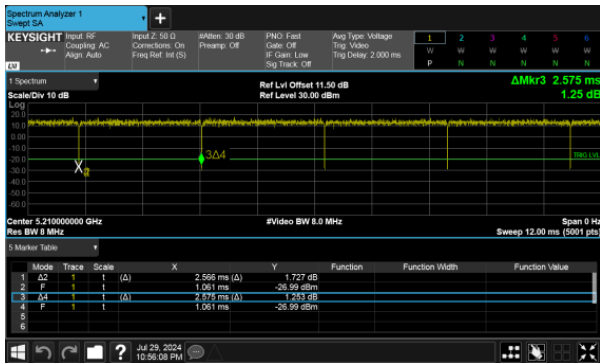

Modulation Type: 802.11ax160

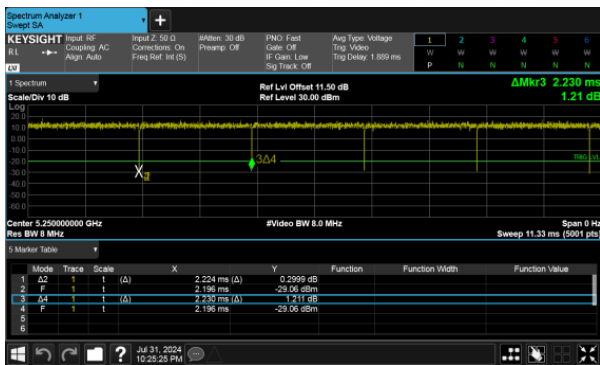



8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout





8.4. Test Result and Data

SISO ANT B

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
			ANT B	
11a	149	5745	15.12	0.50
11a	157	5785	15.12	0.50
11a	165	5825	15.07	0.50

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth (MHz)
			ANT B
11a	149	5745	16.34
11a	157	5785	21.46
11a	165	5825	20.49

UNII Emission Bandwidth Result (Extends across 5725MHz band)

Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
			ANT B	ANT B
11a	6 Mbps	5720	3.21	4.13



MIMO

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)
			ANT A	ANT B	
11ax HE20	149	5745	15.85	16.84	0.50
11ax HE20	157	5785	17.53	16.34	0.50
11ax HE20	165	5825	16.85	16.50	0.50
11ax HE40	151	5755	35.91	35.28	0.50
11ax HE40	159	5795	36.16	35.37	0.50
11ax HE80	155	5775	72.49	71.27	0.50

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth (MHz)	
			ANT A	ANT B
11ax HE20	149	5745	18.89	18.87
11ax HE20	157	5785	19.58	18.92
11ax HE20	165	5825	18.94	18.88
11ax HE40	151	5755	37.82	37.71
11ax HE40	159	5795	37.83	37.82
11ax HE80	155	5775	76.70	76.76

UNII Emission Bandwidth Result (Extends across 5725MHz band)

Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			ANT A	ANT B	ANT A	ANT B
11a	6 Mbps	5720	3.18	3.16	4.61	4.21
11ax HE20	NSS1-MCS0	5720	4.54	4.57	4.94	4.83
11ax HE40	NSS1-MCS0	5710	4.07	4.04	5.79	6.08
11ax HE80	NSS1-MCS0	5690	4.01	4.03	6.12	5.71