




Test Mode : 2TX 11n40 CH03 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

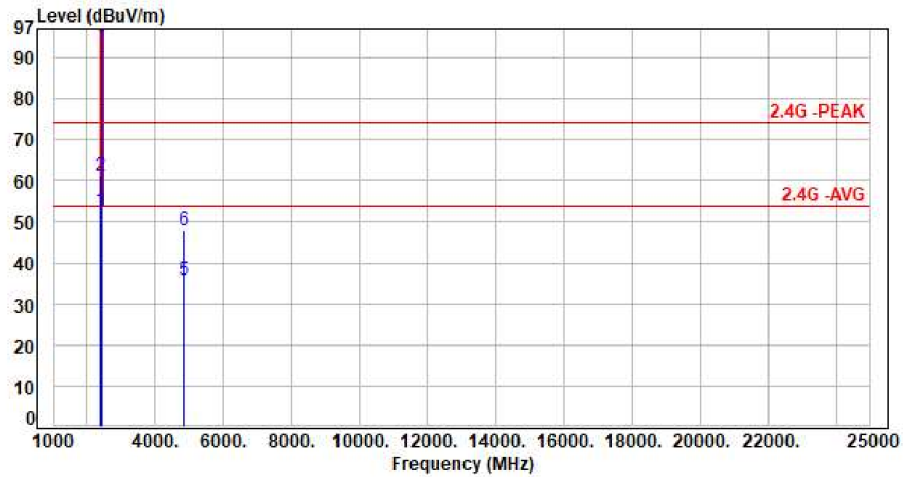


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	55.14	52.81	54.00	-1.19	Average	132	82	P
2	2390.00	-2.33	63.50	61.17	74.00	-12.83	Peak	132	82	P
3	2422.00	-2.19	97.21	95.02	200.00	-104.98	Average	132	82	P
4	2422.00	-2.19	106.43	104.24	200.00	-95.76	Peak	132	82	P
5	4844.00	6.14	29.74	35.88	54.00	-18.12	Average	100	225	P
6	4844.00	6.14	41.83	47.97	74.00	-26.03	Peak	100	225	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n40 CH03 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

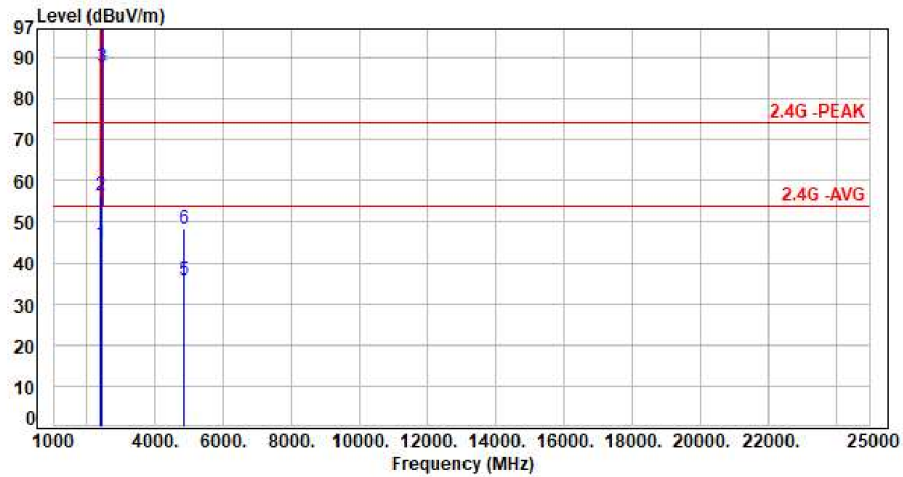


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	47.12	44.79	54.00	-9.21	Average	100	291	P
2	2390.00	-2.33	58.82	56.49	74.00	-17.51	Peak	100	291	P
3	2422.00	-2.19	90.00	87.81	200.00	-112.19	Average	100	291	P
4	2422.00	-2.19	99.33	97.14	200.00	-102.86	Peak	100	291	P
5	4844.00	6.14	29.49	35.63	54.00	-18.37	Average	100	152	P
6	4844.00	6.14	42.06	48.20	74.00	-25.80	Peak	100	152	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n40 CH06 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

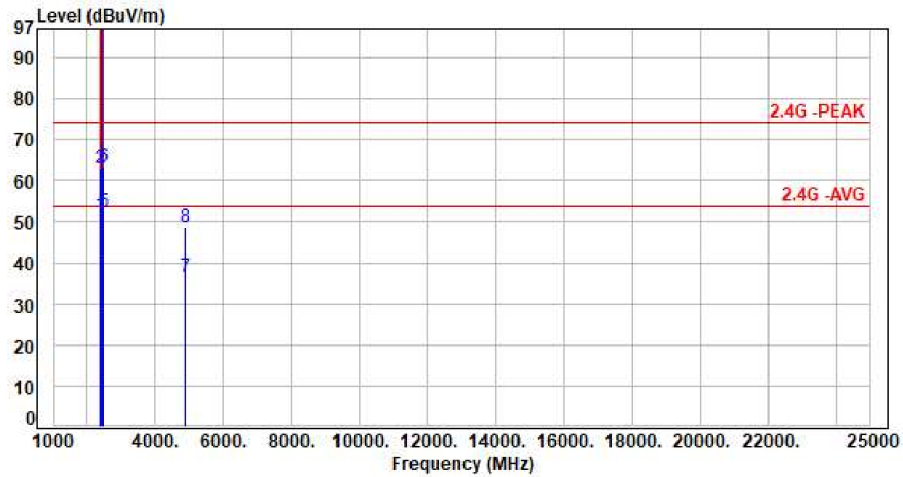


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	54.13	51.80	54.00	-2.20	Average	100	73	P
2	2390.00	-2.33	65.57	63.24	74.00	-10.76	Peak	100	73	P
3	2437.00	-2.17	108.24	106.07	200.00	-93.93	Average	100	73	P
4	2437.00	-2.17	117.63	115.46	200.00	-84.54	Peak	100	73	P
5	2483.50	-2.01	54.55	52.54	54.00	-1.46	Average	100	73	P
6	2483.50	-2.01	65.32	63.31	74.00	-10.69	Peak	100	73	P
7	4874.00	6.23	30.10	36.33	54.00	-17.67	Average	100	228	P
8	4874.00	6.23	42.38	48.61	74.00	-25.39	Peak	100	228	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n40 CH06 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

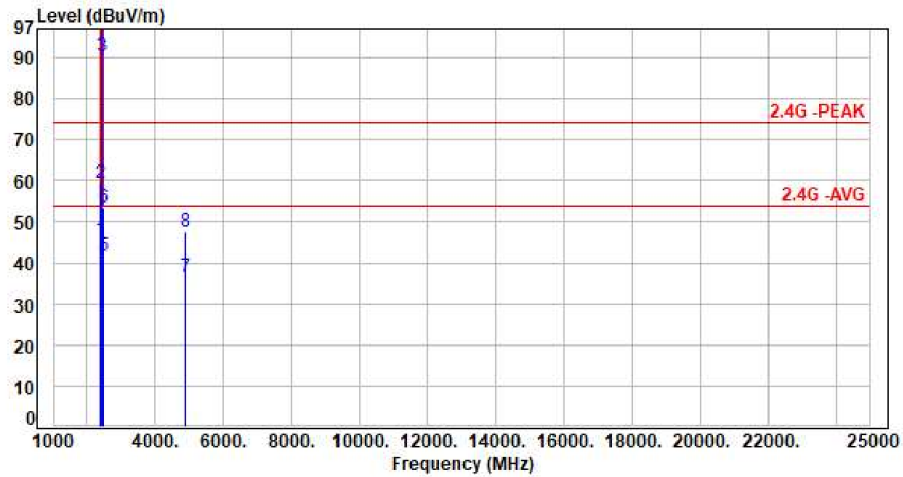


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	48.10	45.77	54.00	-8.23	Average	100	240	P
2	2390.00	-2.33	61.82	59.49	74.00	-14.51	Peak	100	240	P
3	2437.00	-2.17	92.50	90.33	200.00	-109.67	Average	100	240	P
4	2437.00	-2.17	101.60	99.43	200.00	-100.57	Peak	100	240	P
5	2483.50	-2.01	43.74	41.73	54.00	-12.27	Average	100	240	P
6	2483.50	-2.01	55.50	53.49	74.00	-20.51	Peak	100	240	P
7	4874.00	6.23	30.13	36.36	54.00	-17.64	Average	100	259	P
8	4874.00	6.23	41.28	47.51	74.00	-26.49	Peak	100	259	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n40 CH09 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

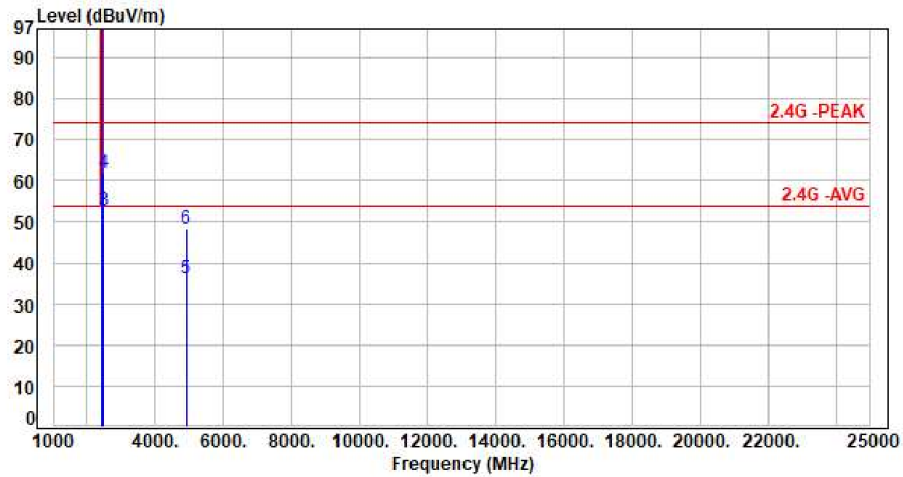


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.13	97.73	95.60	200.00	-104.40	Average	100	81	P
2	2452.00	-2.13	107.46	105.33	200.00	-94.67	Peak	100	81	P
3	2483.50	-2.01	54.59	52.58	54.00	-1.42	Average	100	81	P
4	2483.50	-2.01	63.90	61.89	74.00	-12.11	Peak	100	81	P
5	4904.00	6.34	29.86	36.20	54.00	-17.80	Average	100	156	P
6	4904.00	6.34	42.13	48.47	74.00	-25.53	Peak	100	156	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11n40 CH09 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

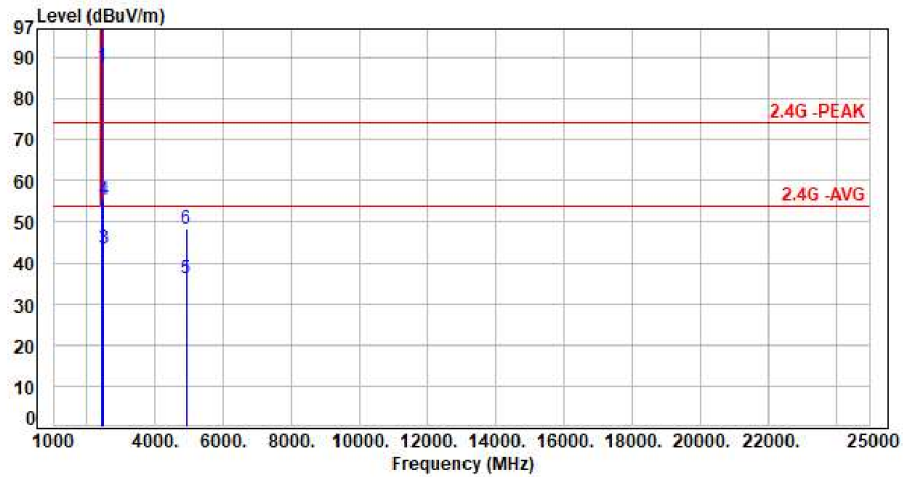

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-2.13	89.78	87.65	200.00	-112.35	Average	100	240	P
2	2452.00	-2.13	99.38	97.25	200.00	-102.75	Peak	100	240	P
3	2483.50	-2.01	45.50	43.49	54.00	-10.51	Average	100	240	P
4	2483.50	-2.01	57.23	55.22	74.00	-18.78	Peak	100	240	P
5	4904.00	6.34	29.75	36.09	54.00	-17.91	Average	100	187	P
6	4904.00	6.34	41.88	48.22	74.00	-25.78	Peak	100	187	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



### 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz





## 7. Test of Conducted Spurious Emission

### 7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 7.3 Test Setup Layout

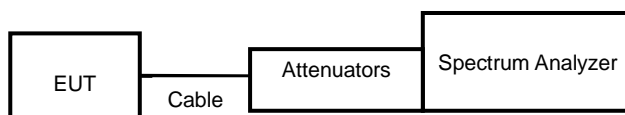

### 7.4 Test Result and Data

Note: Test plots refers to the following pages.











ANT A




Modulation Type: 802.11b, CH 01

Modulation Type: 802.11b, CH 06

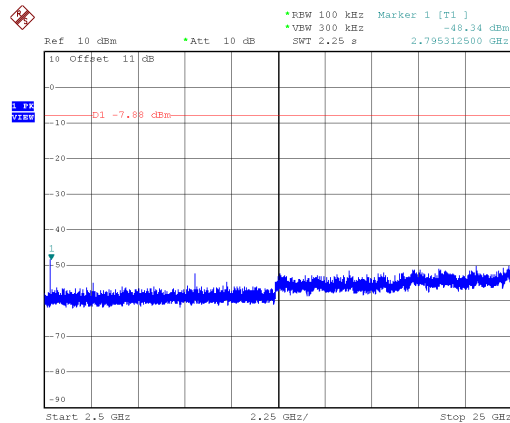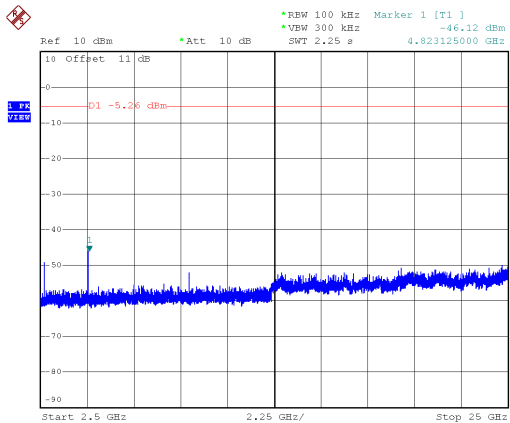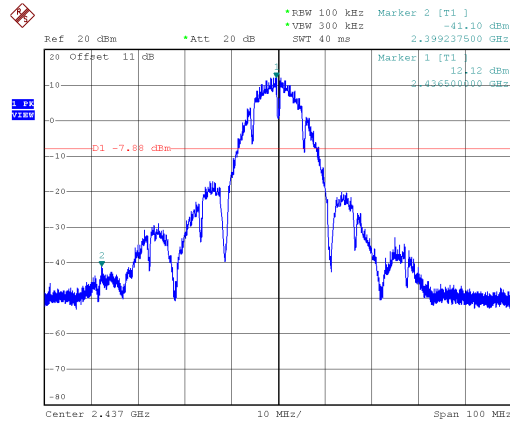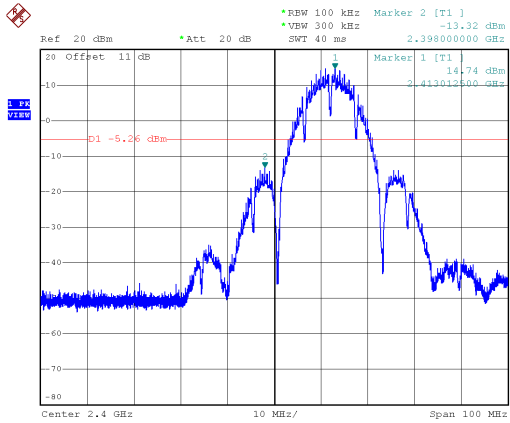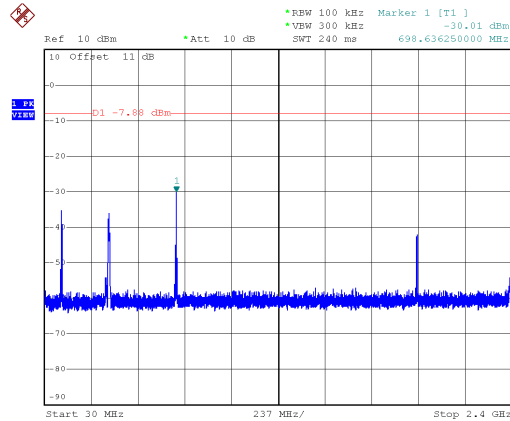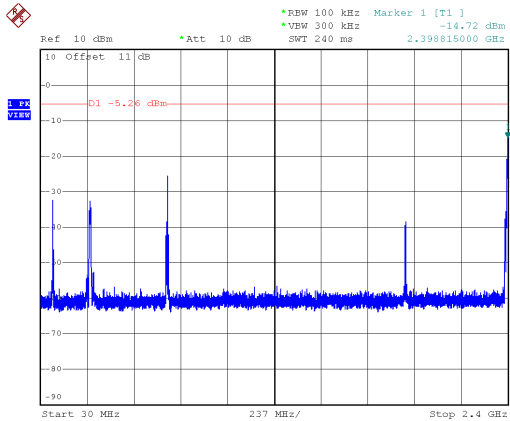




Modulation Type: 802.11b, CH 11



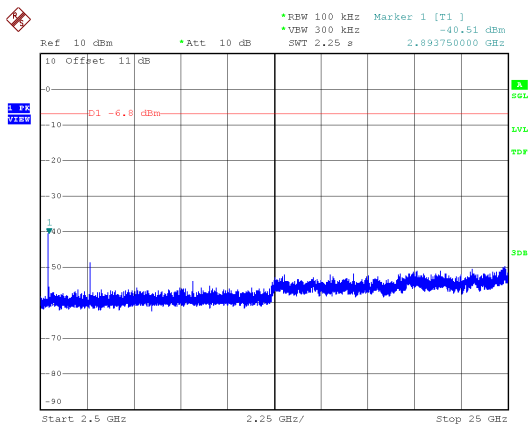
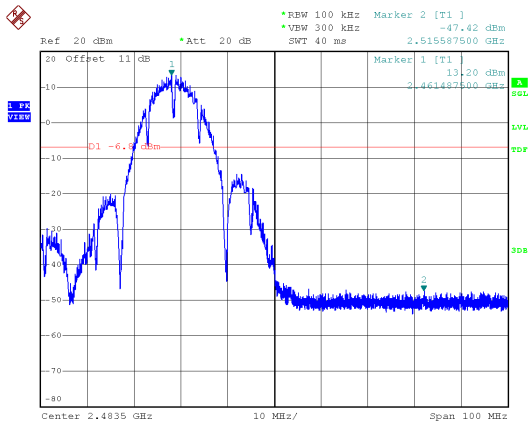
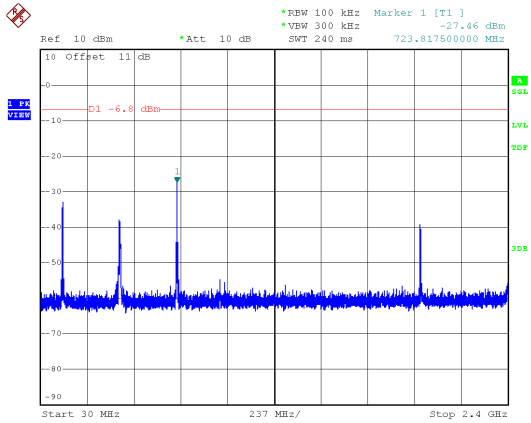




Modulation Type: 802.11g, CH01



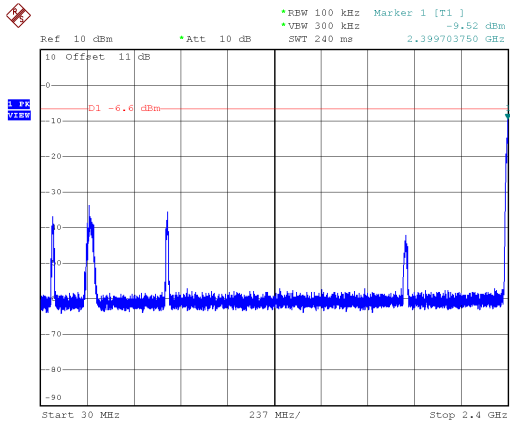


Modulation Type: 802.11g, CH06

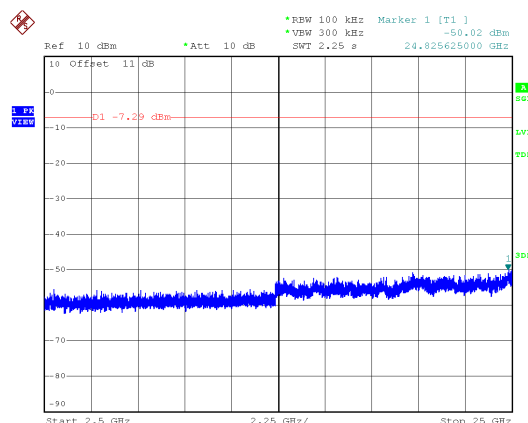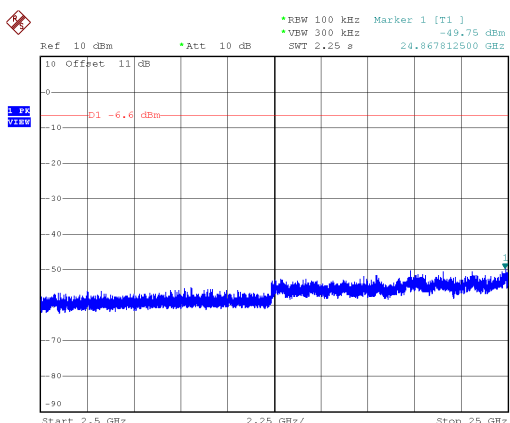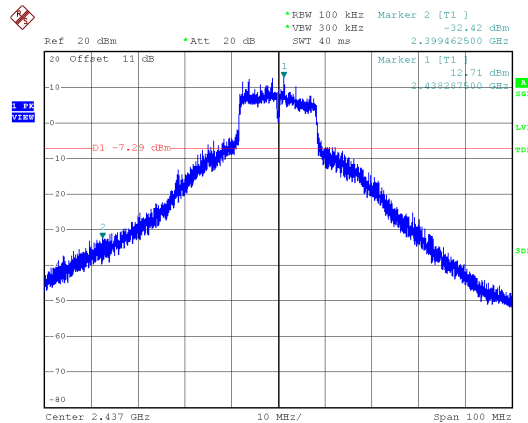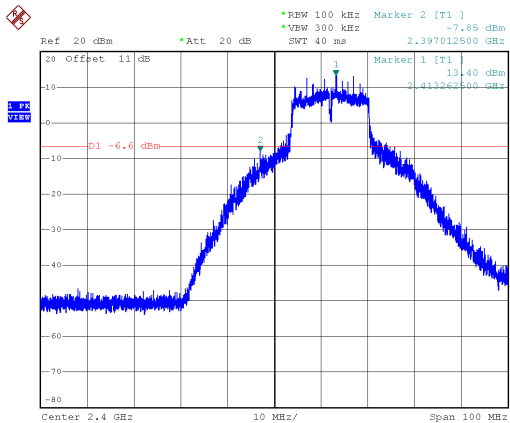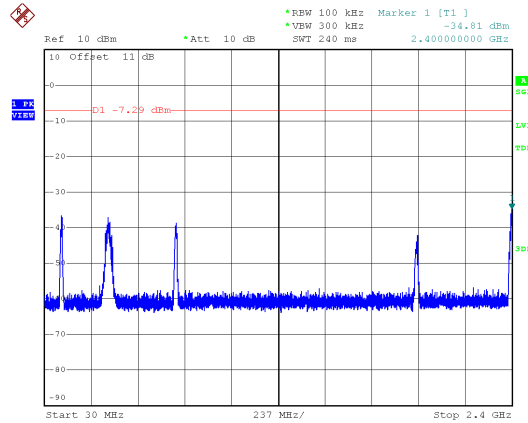



Modulation Type: 802.11g, CH11




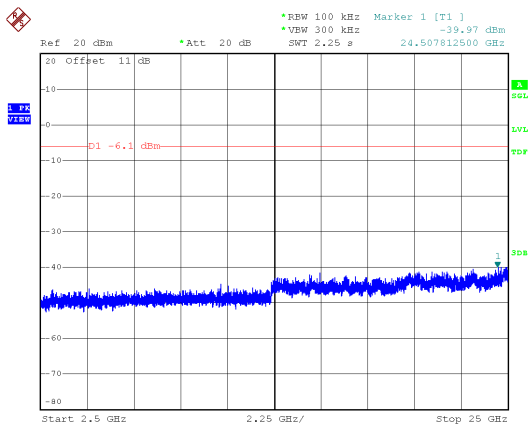
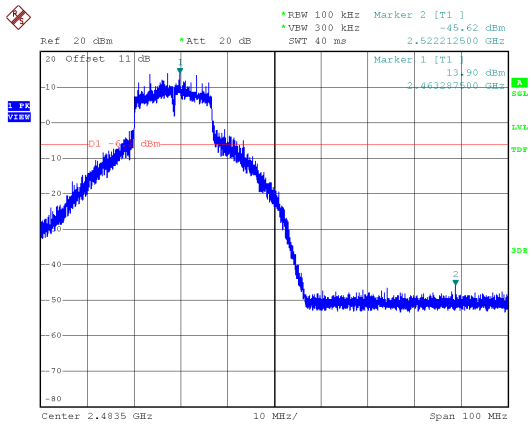
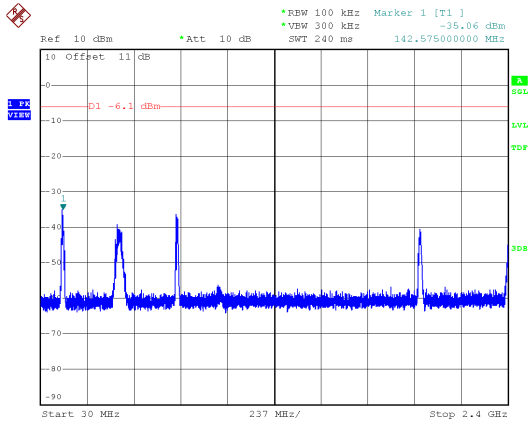




ANT B




Modulation Type: 802.11b, CH 01

Modulation Type: 802.11b, CH 06

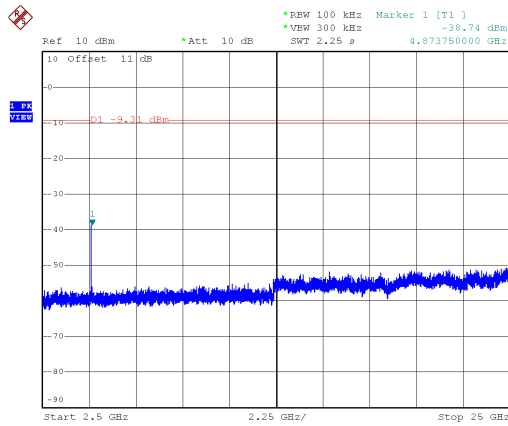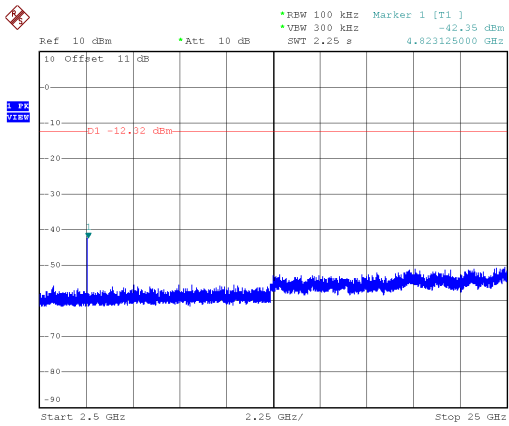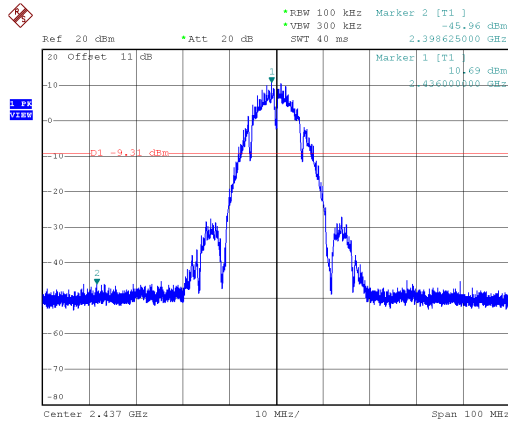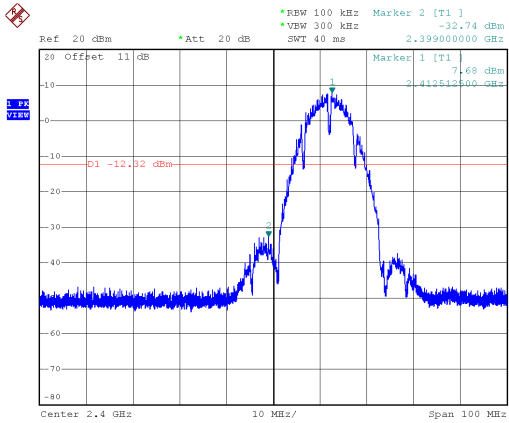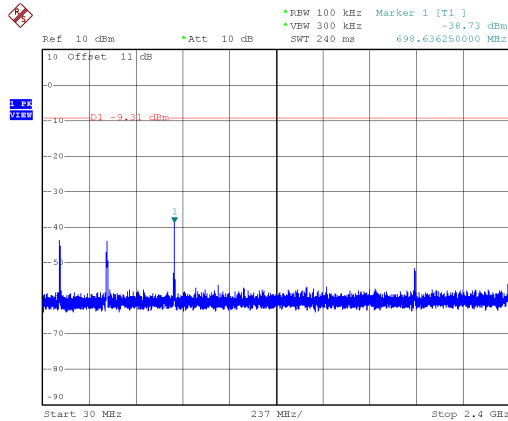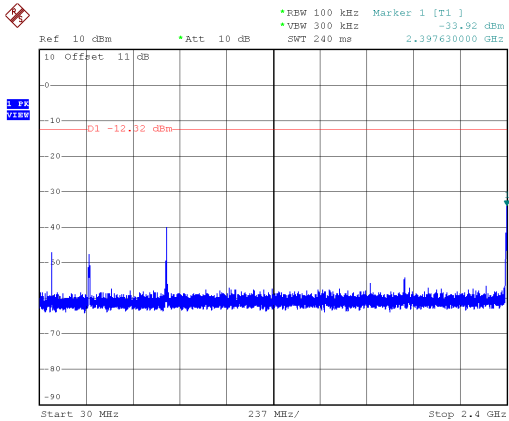




Modulation Type: 802.11b, CH 11



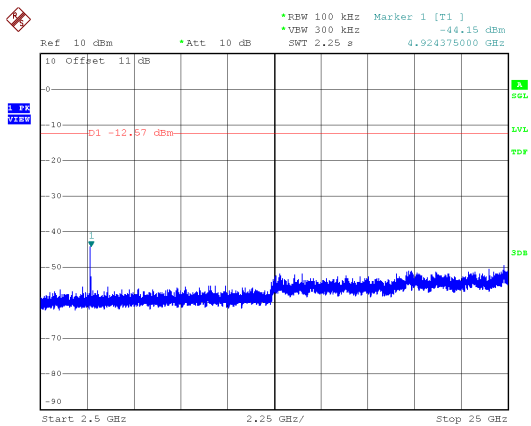
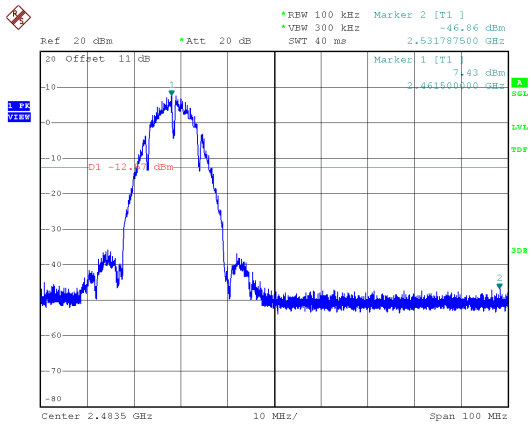
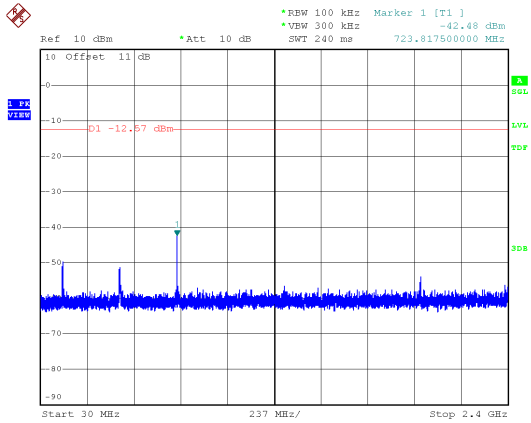




Modulation Type: 802.11g, CH01

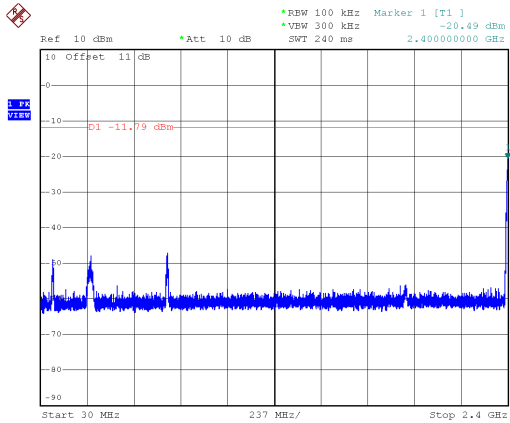




Modulation Type: 802.11g, CH06

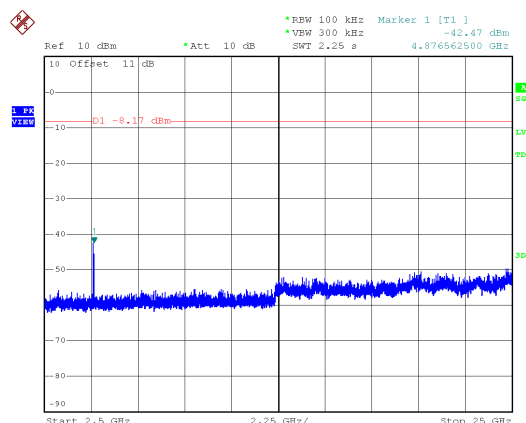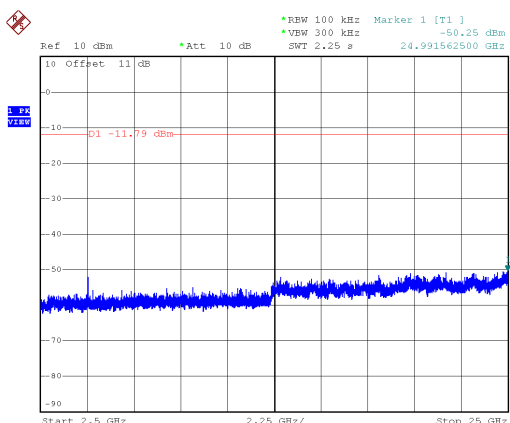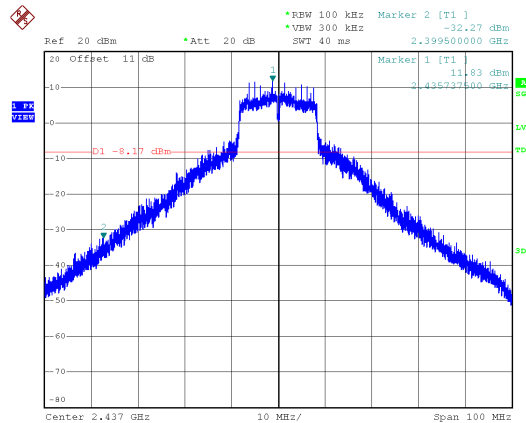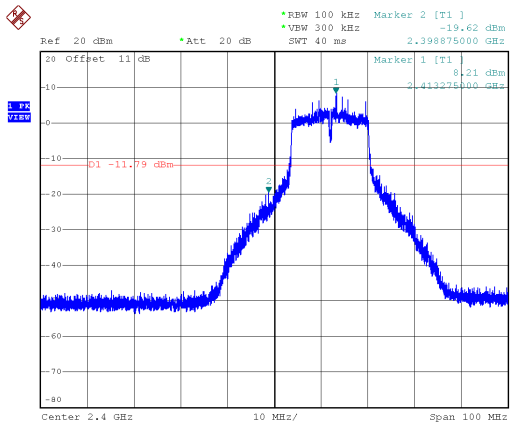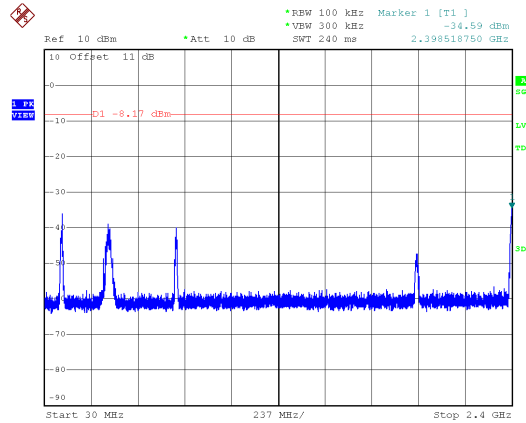






Modulation Type: 802.11g, CH11

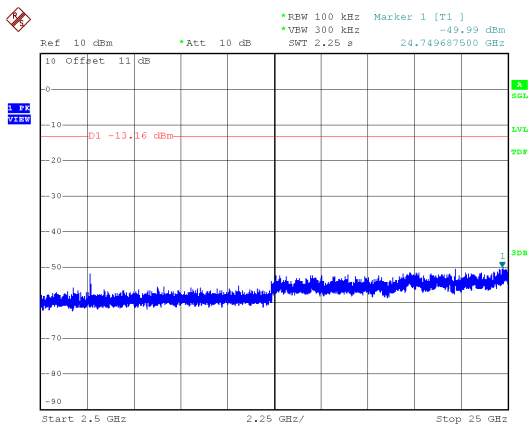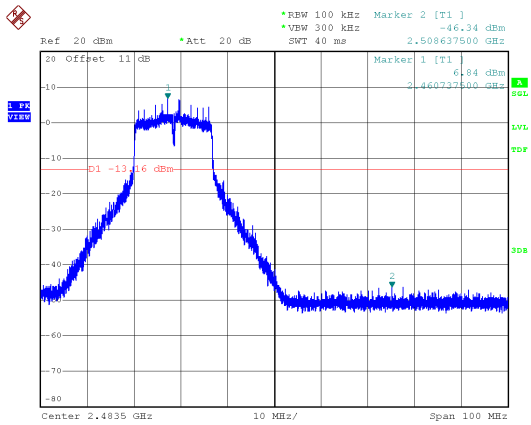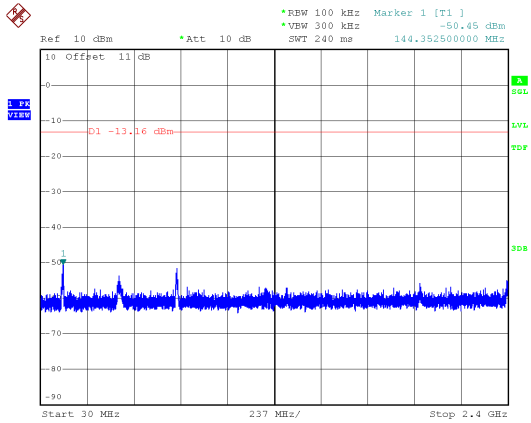








ANT A

Modulation Type: 802.11n HT20, CH01



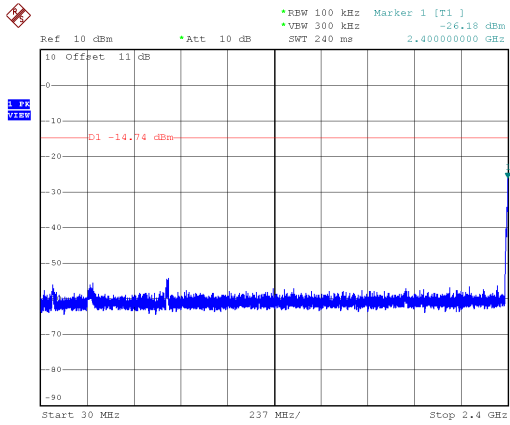


Modulation Type: 802.11n HT20, CH06

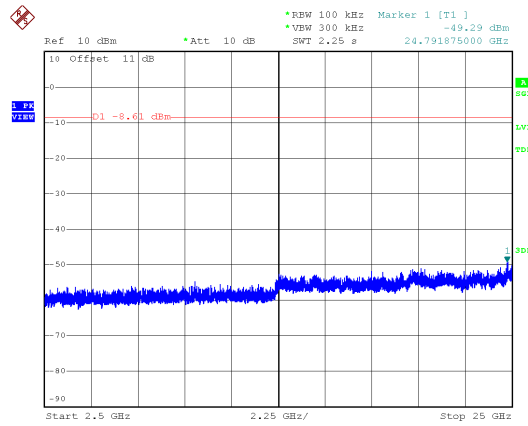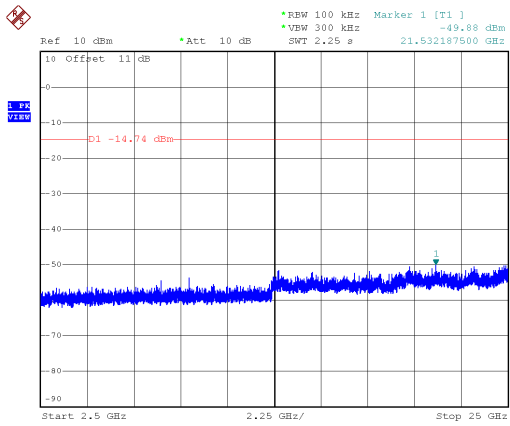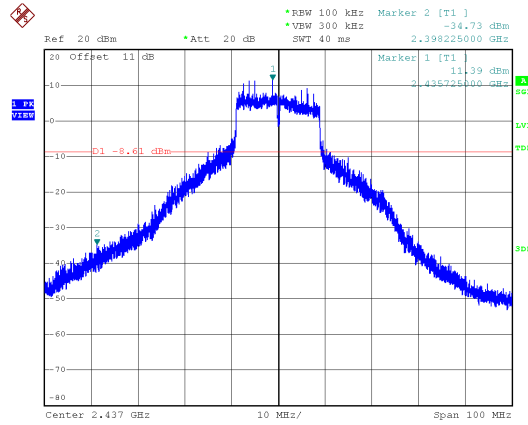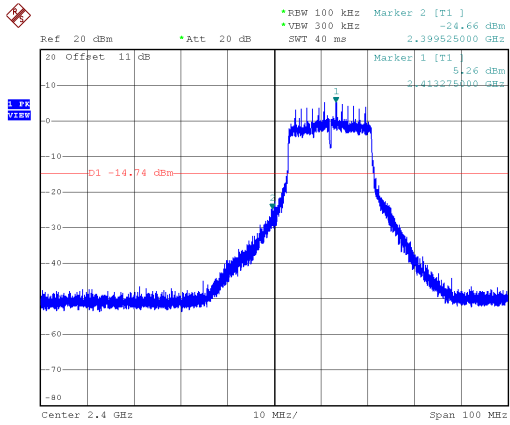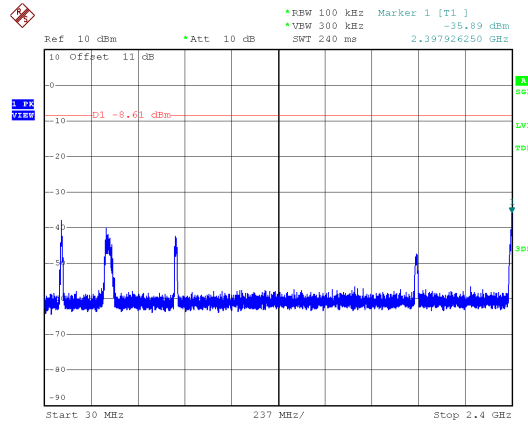




Modulation Type: 802.11n HT20, CH11

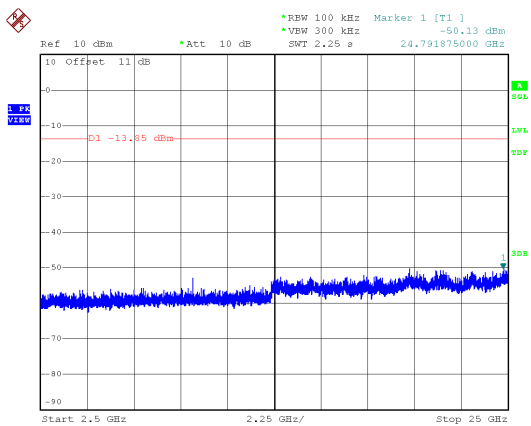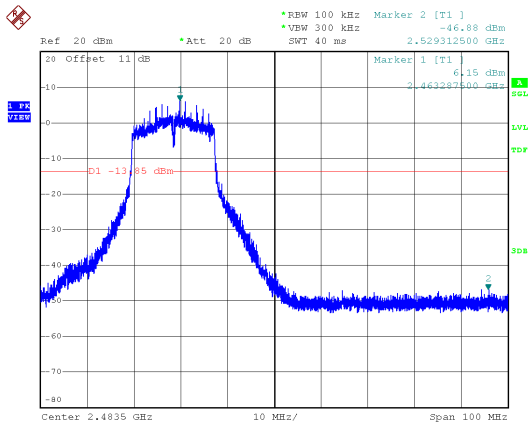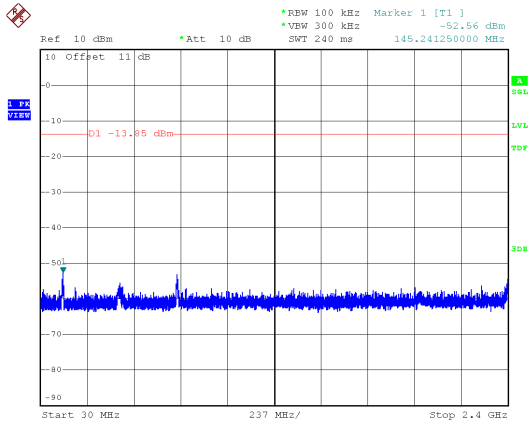








Modulation Type: 802.11n HT40, CH03

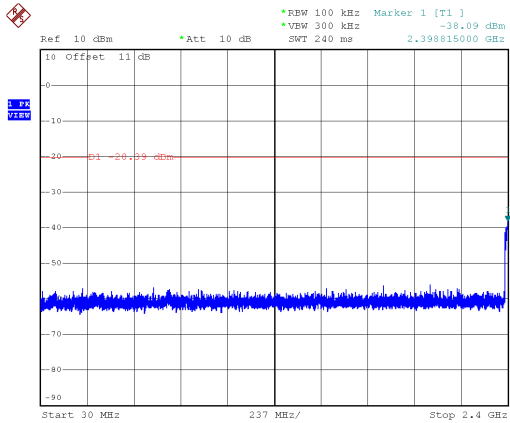

Modulation Type: 802.11n HT40, CH06



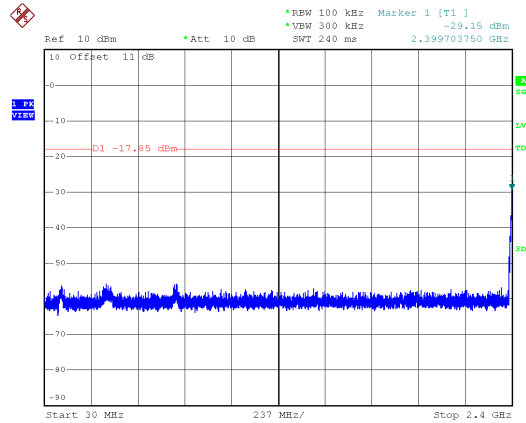


19

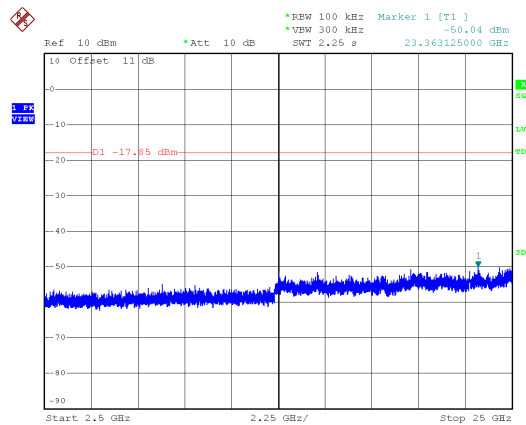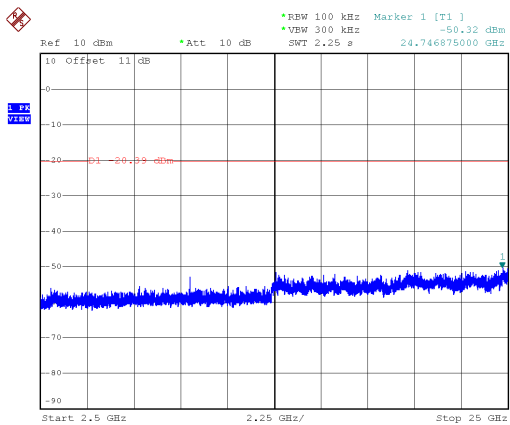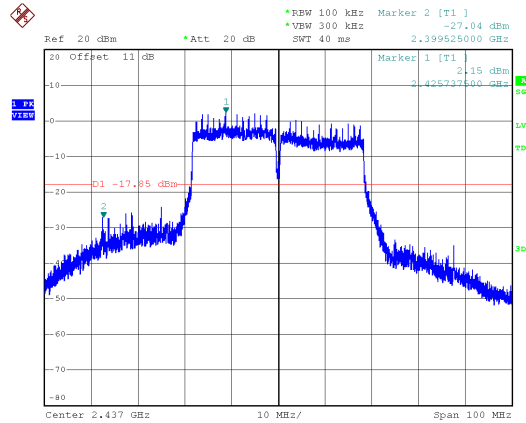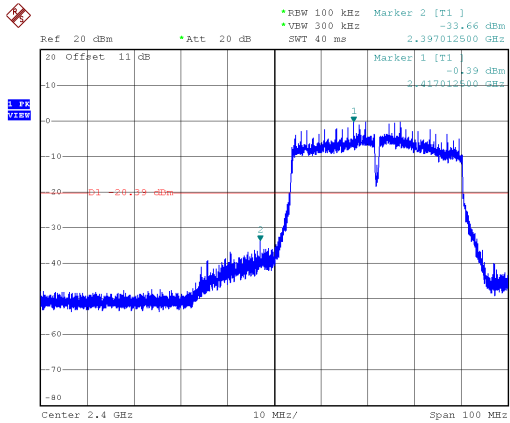




Modulation Type: 802.11n HT40, CH09

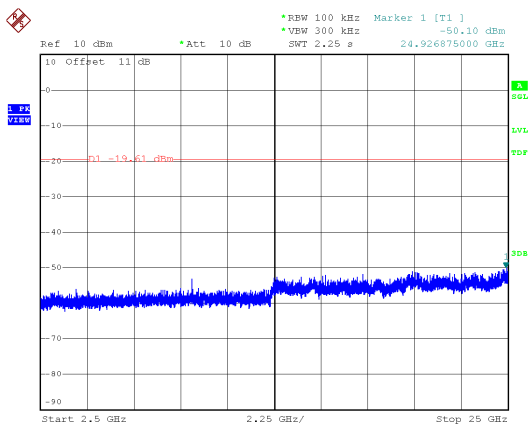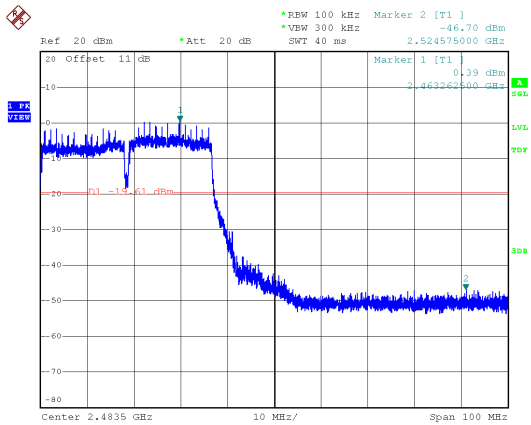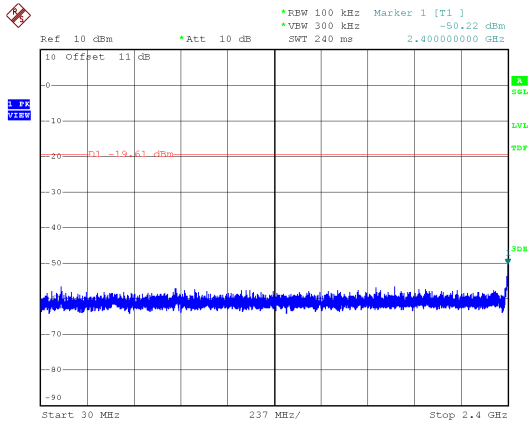








ANT B

Modulation Type: 802.11n HT20, CH01



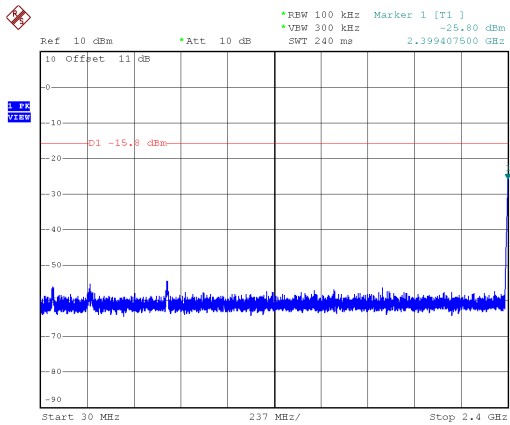


Modulation Type: 802.11n HT20, CH06

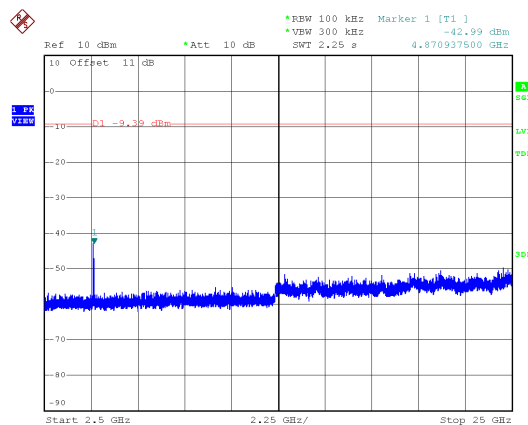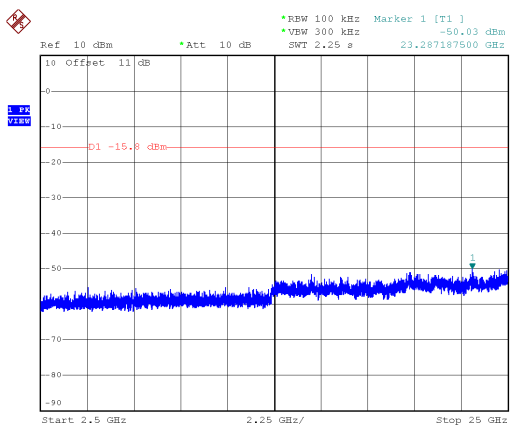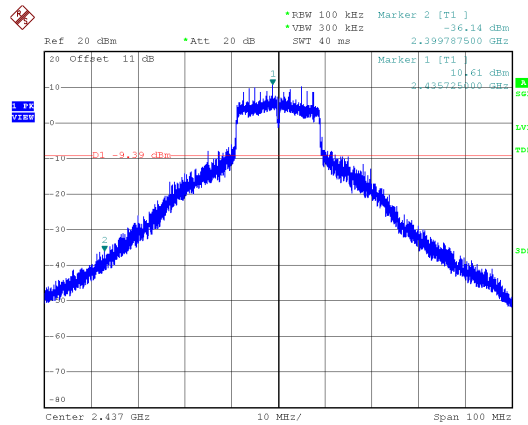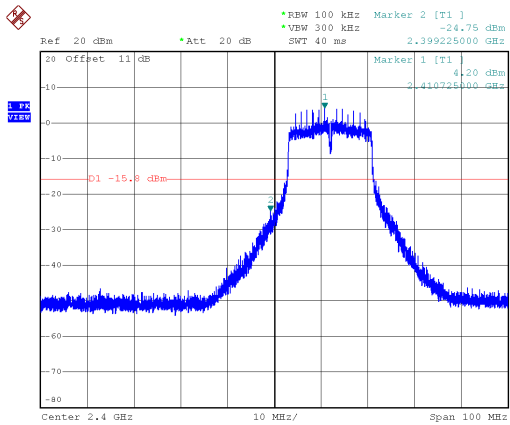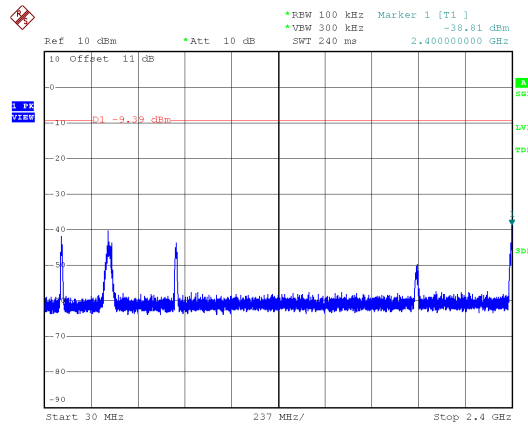




Modulation Type: 802.11n HT20, CH11

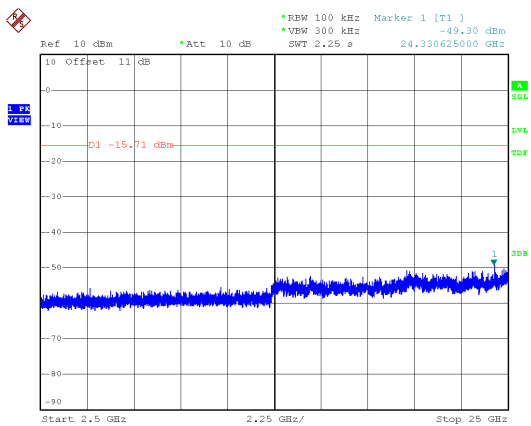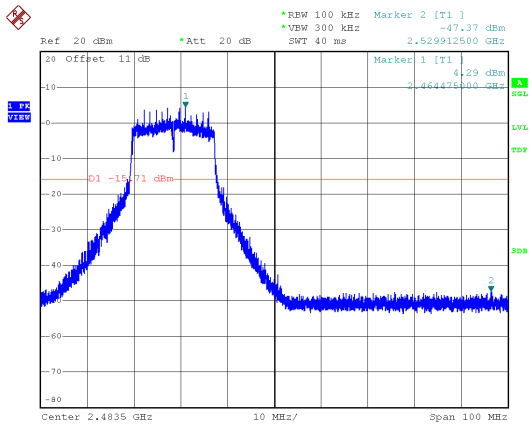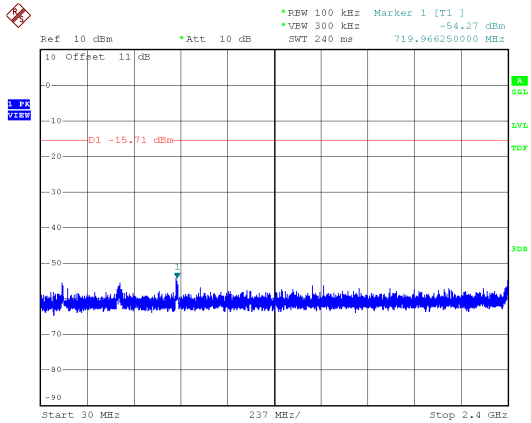










Modulation Type: 802.11n HT40, CH03

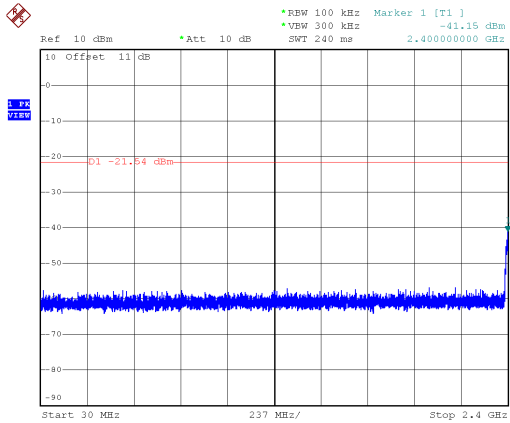

Modulation Type: 802.11n HT40, CH06



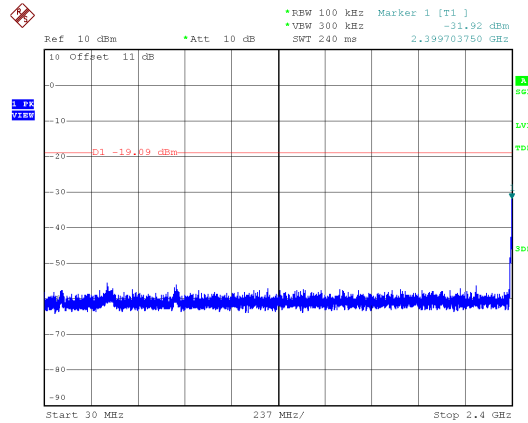


58

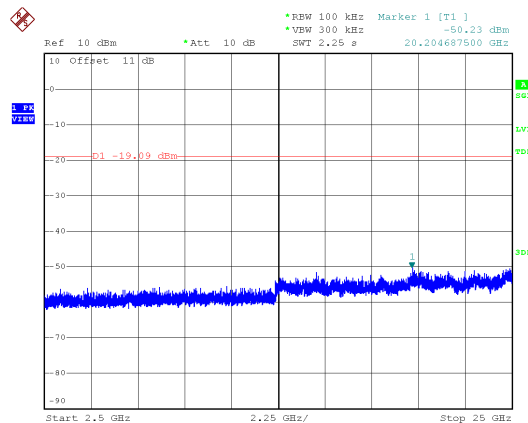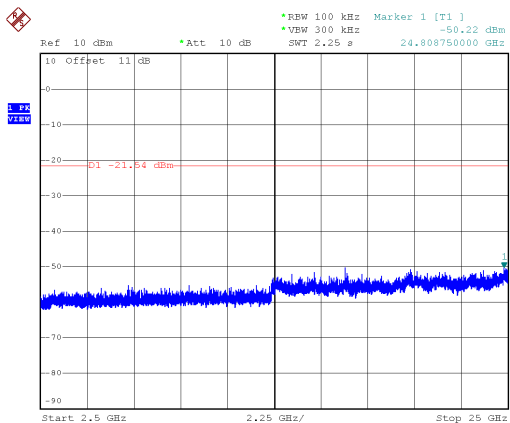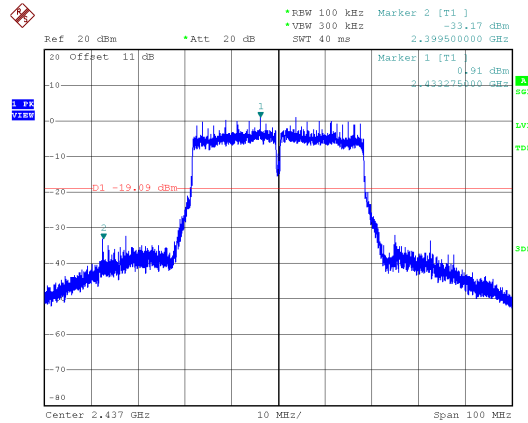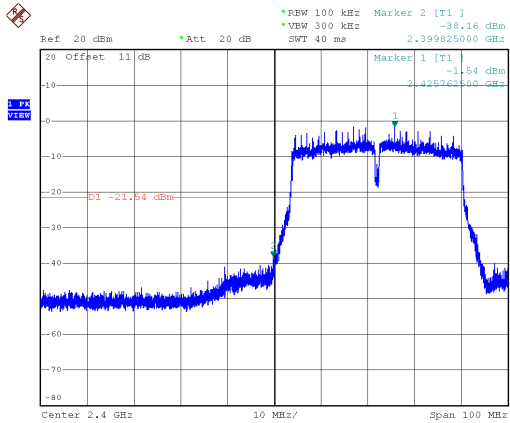



Modulation Type: 802.11n HT40, CH09

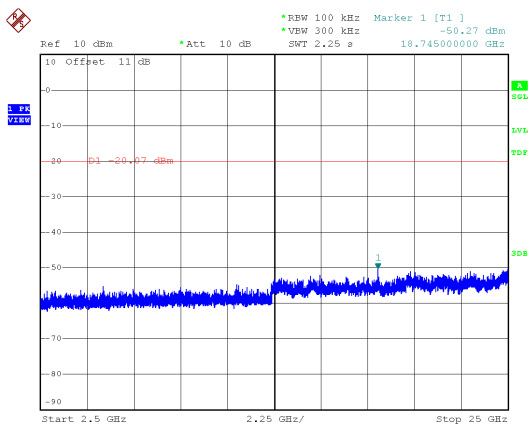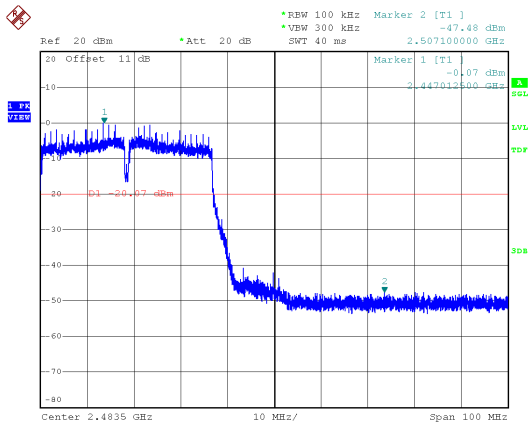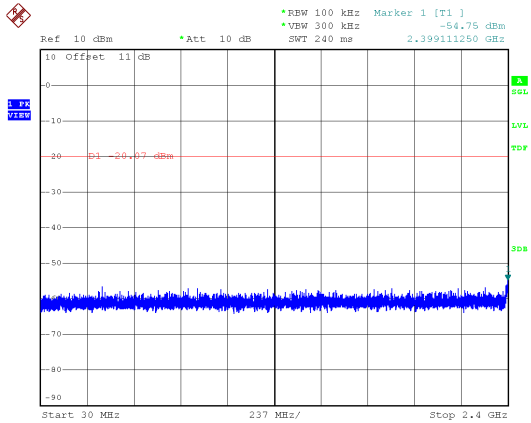



### 8. On Time, Duty Cycle and Measurement methods


#### 8.1 Test Limit

None; for reporting purposes only.

#### 8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6  
Zero-Span Spectrum Analyzer Method.

#### 8.3 Test Setup Layout

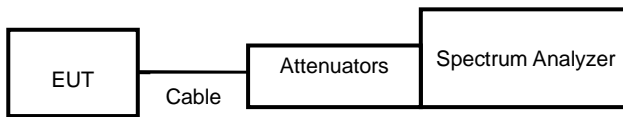

#### 8.4 Test Result and Data

ANT A

Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
11b,1M	12.45	12.55	99.20%
11g,6M	2.07	2.11	98.44%

ANT B


Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
11b,1M	12.45	12.55	99.20%
11g,6M	2.07	2.10	98.54%

MIMO ANT


Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
11n HT20	1.93	1.97	97.92%
11n HT40	0.95	1.01	94.87%




ANT A  
Modulation Type: 802.11b(1Mbps)

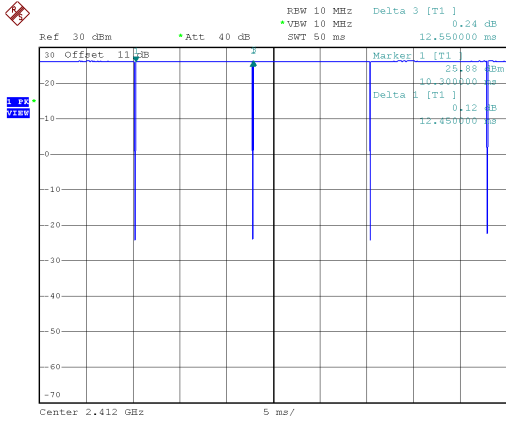


ANT B  
Modulation Type: 802.11b(1Mbps)

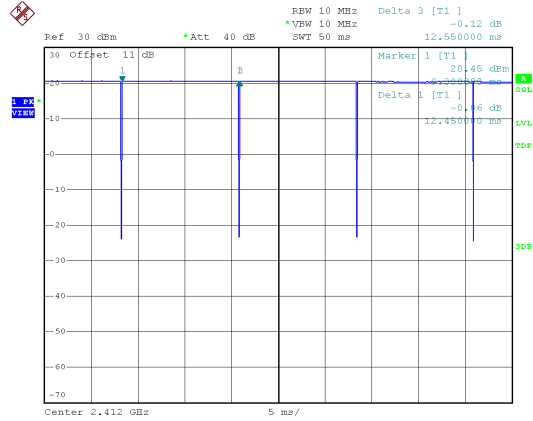

Modulation Type: 802.11g(6Mbps)

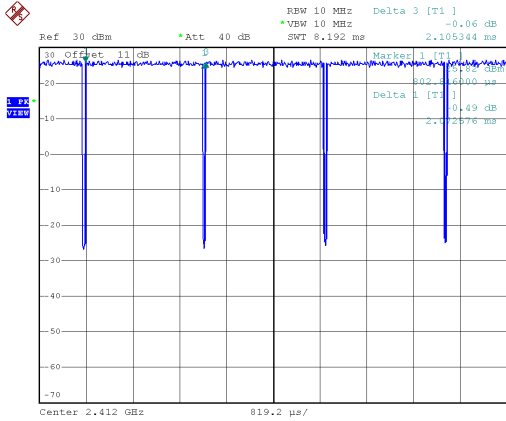


Modulation Type: 802.11g(6Mbps)

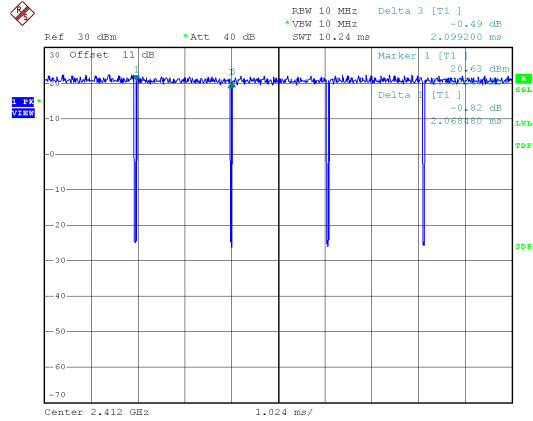




MIMO ANT  
Modulation Type: 802.11n HT20(6.5Mbps)

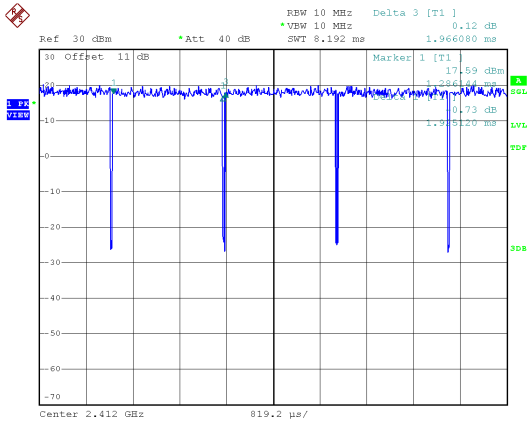

Modulation Type: 802.11n HT40(13.5Mbps)

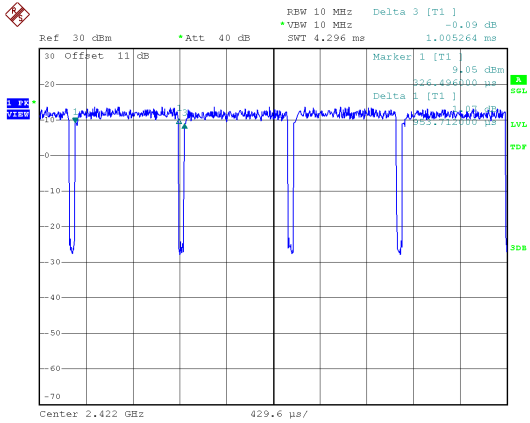



## 9. 6dB Bandwidth Measurement Data

### 9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

### 9.3 Test Setup Layout

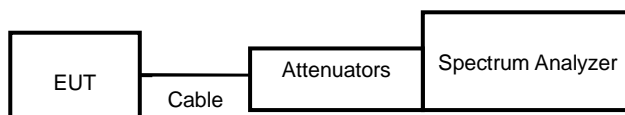



9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT A		
11b	1	2412	10.05		0.5
	6	2437	9.09		0.5
	11	2462	10.05		0.5
11g	1	2412	15.30		0.5
	6	2437	15.72		0.5
	11	2462	15.12		0.5


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT B		
11b	1	2412	8.07		0.5
	6	2437	8.10		0.5
	11	2462	8.07		0.5
11g	1	2412	15.09		0.5
	6	2437	15.12		0.5
	11	2462	15.33		0.5

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT A	ANT B	
11n HT20	1	2412	16.26	15.15	0.5
	6	2437	16.35	16.65	0.5
	11	2462	15.06	15.93	0.5
11n HT40	3	2422	35.16	35.70	0.5
	6	2437	35.76	35.70	0.5
	9	2452	35.40	35.70	0.5







ANT A  
Modulation Type: 802.11b  
CH01

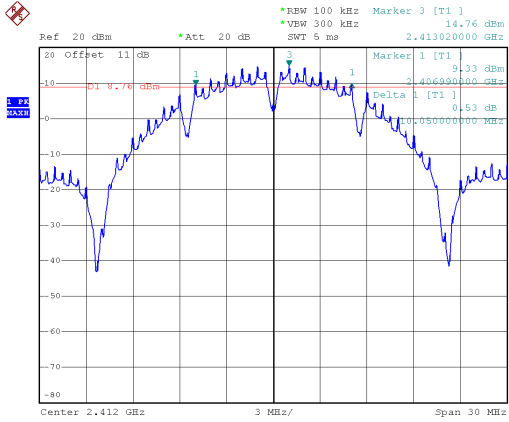


Modulation Type: 802.11g  
CH01

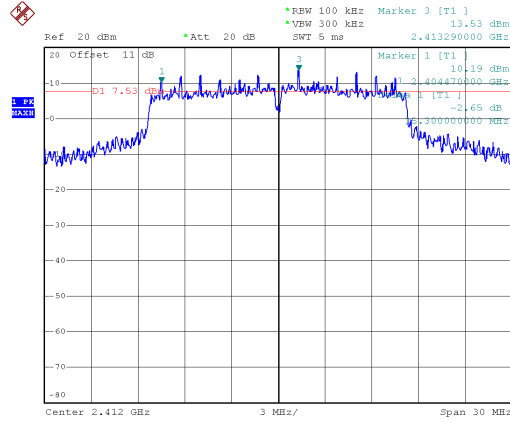


CH06

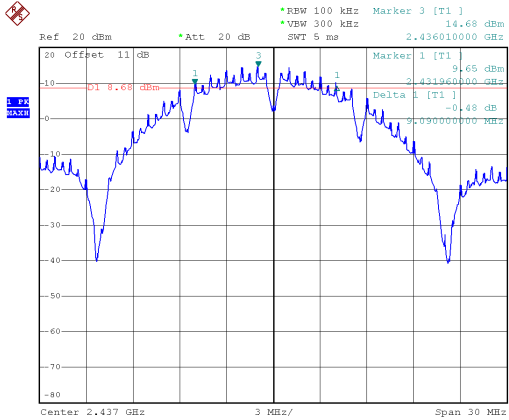


CH06

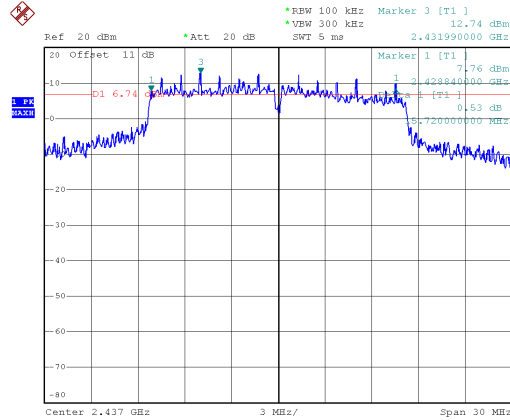

CH11

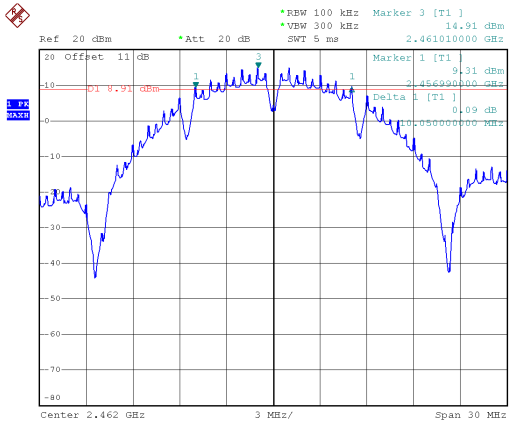


CH11

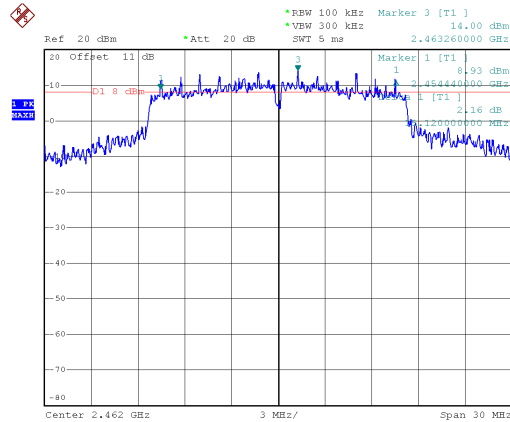





ANT B  
Modulation Type: 802.11b  
CH01

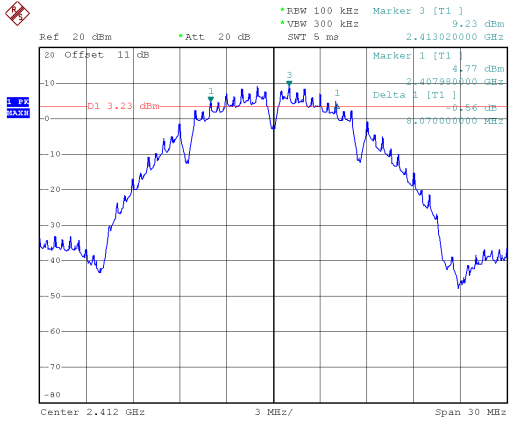


Modulation Type: 802.11g  
CH01

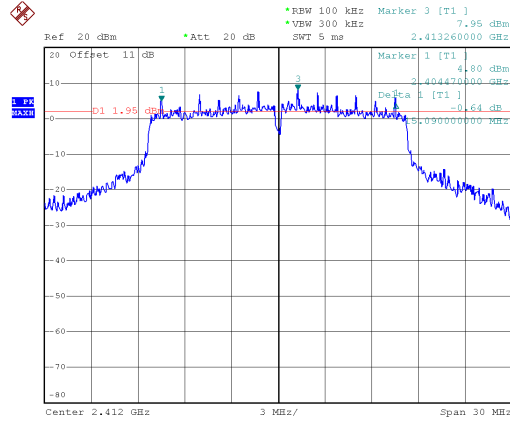


CH06

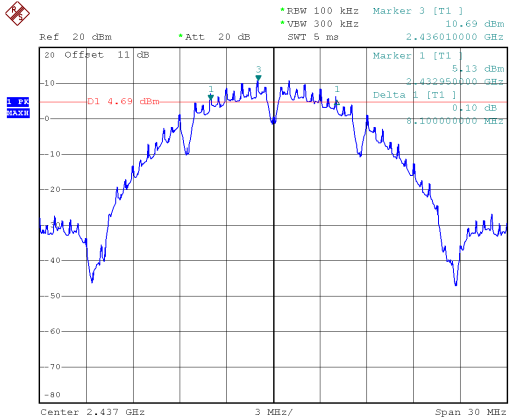


CH06

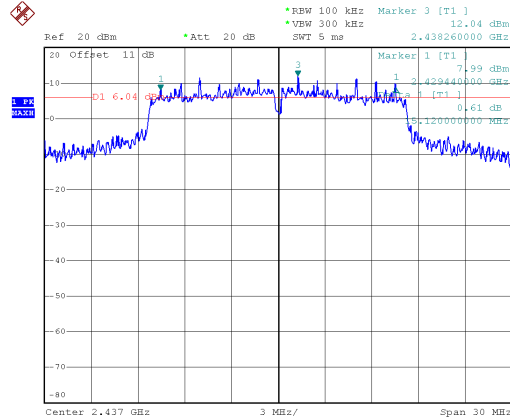

CH11

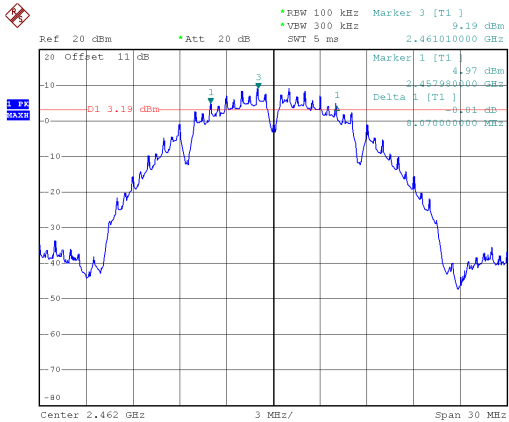


CH11

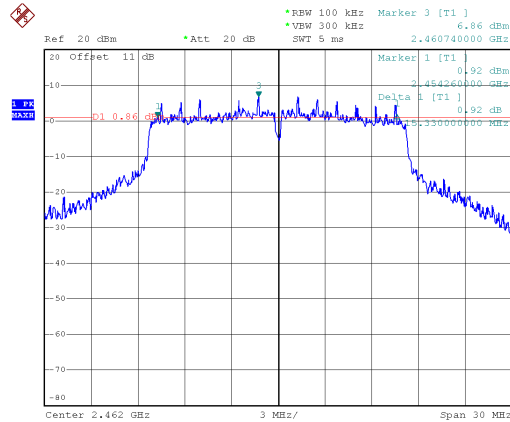





ANT A  
Modulation Type: 802.11n HT20  
CH01

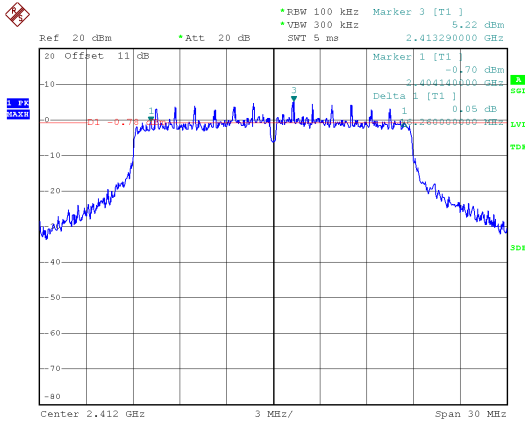


Modulation Type: 802.11n HT40  
CH03

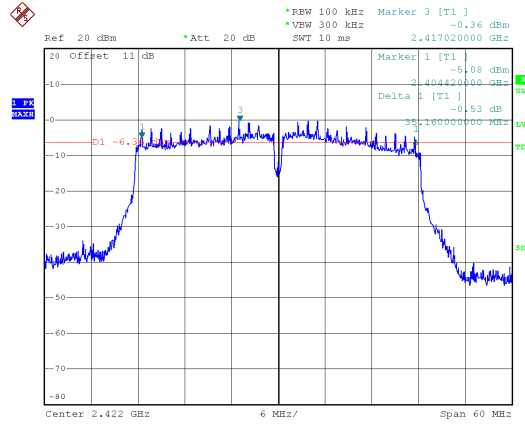


CH06

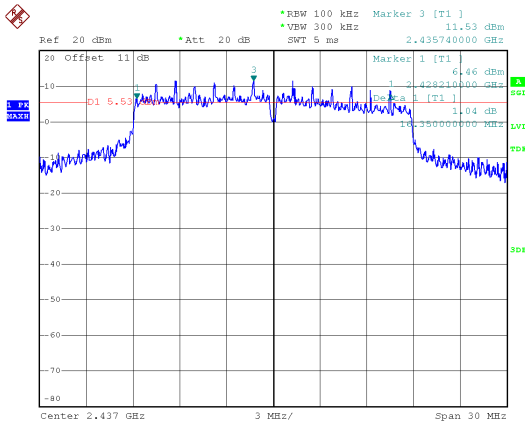


CH06

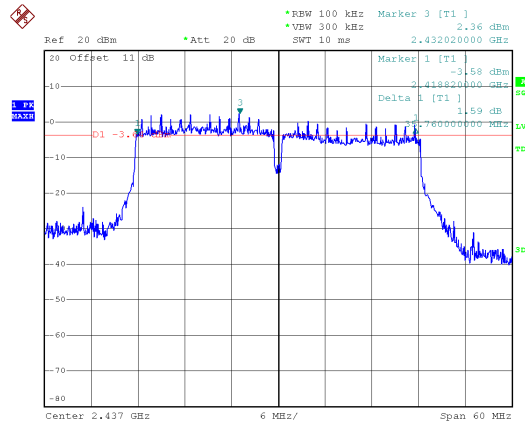

CH11

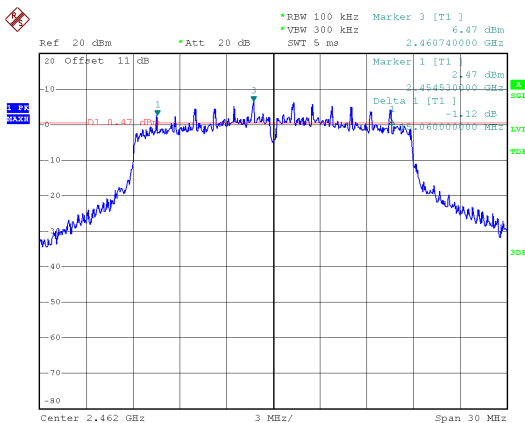


CH09

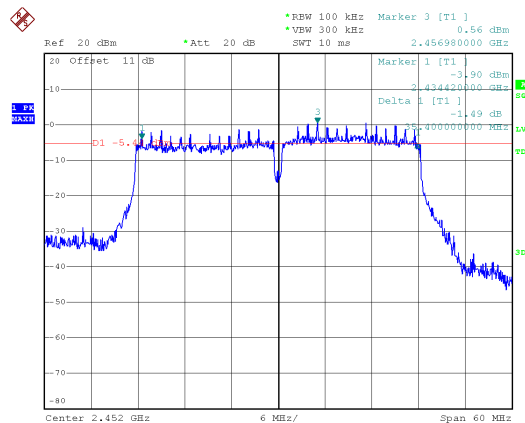





ANT B  
Modulation Type: 802.11n HT20  
CH01

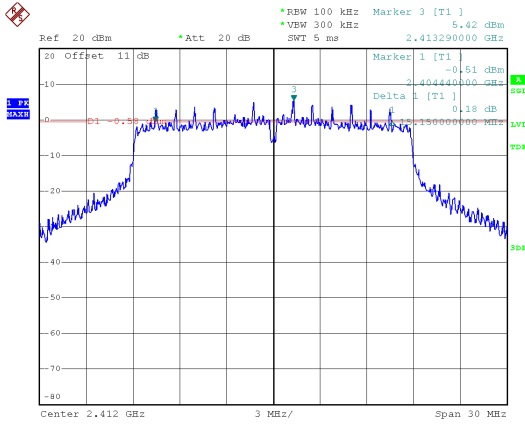


Modulation Type: 802.11n HT40  
CH03

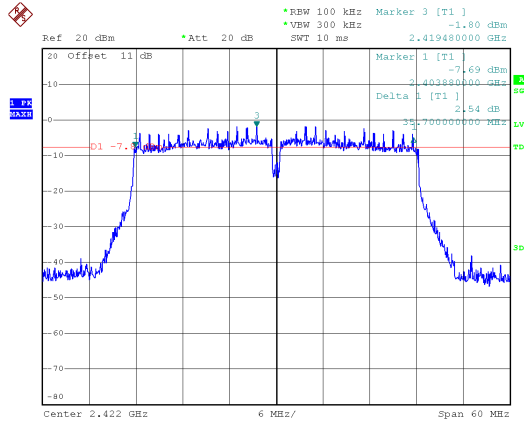


CH06

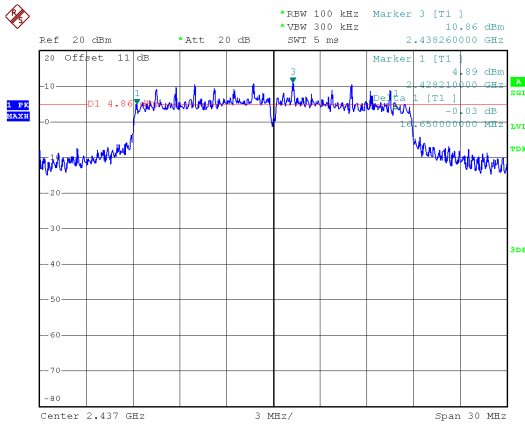


CH06

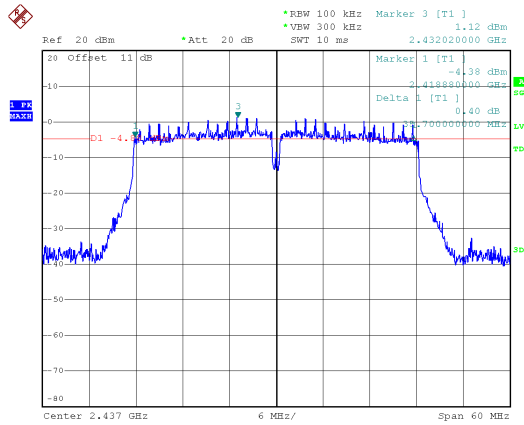

CH11

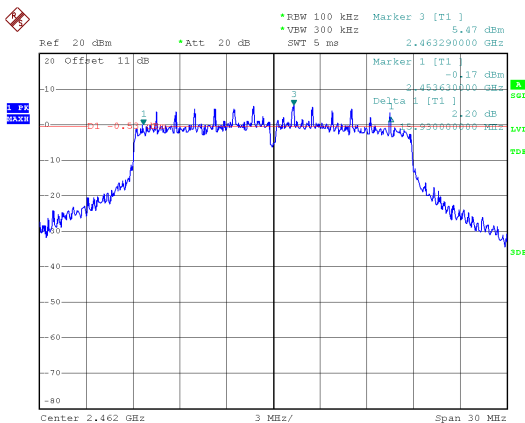

CH09

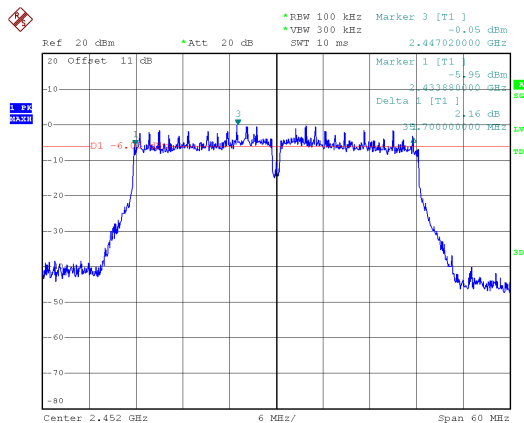



## 10. Maximum Peak and Average Output Power

### 10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### 10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 10.3 Test Setup Layout

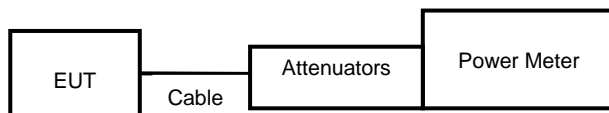



10.4 Test Result and Data

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted (peak) output power (dBm)		Total PK power (dBm)	Total PK power (mW)	Power Limit (dBm)
				ANT A				
23	11b	1	2412	25.09		25.09	322.849	30.00
23		6	2437	24.85		24.85	305.492	30.00
23		11	2462	25.24		25.24	334.195	30.00
23	11g	1	2412	25.63		25.63	365.595	30.00
23		6	2437	25.36		25.36	343.558	30.00
24		11	2462	26.55		26.55	451.856	30.00

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted (peak) output power (dBm)		Total PK power (dBm)	Total PK power (mW)	Power Limit (dBm)
				ANT B				
17	11b	1	2412	19.85		19.85	96.605	30.00
19		6	2437	20.93		20.93	123.880	30.00
17		11	2462	19.36		19.36	86.298	30.00
18	11g	1	2412	21.78		21.78	150.661	30.00
23		6	2437	25.26		25.26	335.738	30.00
17		11	2462	20.62		20.62	115.345	30.00

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted (peak) output power (dBm)		Total PK power (dBm)	Total PK power (mW)	Power Limit (dBm)
				ANT A	ANT B			
15	11n HT20	1	2412	19.67	19.41	22.55	179.980	30.00
22		6	2437	24.69	23.61	27.19	524.057	30.00
16		11	2462	21.03	19.52	23.35	216.302	30.00
12	11n HT40	3	2422	18.71	17.98	21.37	137.108	30.00
15		6	2437	21.74	20.19	24.04	253.751	30.00
13		9	2452	20.32	18.87	22.67	184.737	30.00



Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted (average) output power (dBm)		Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT A				
23	11b	1	2412	23.59		23.59	228.560	NA
23		6	2437	23.31		23.31	214.289	NA
23		11	2462	23.55		23.55	226.464	NA
23	11g	1	2412	22.94		22.94	196.789	NA
23		6	2437	22.61		22.61	182.390	NA
24		11	2462	23.82		23.82	240.991	NA

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted (average) output power (dBm)		Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT B				
17	11b	1	2412	17.59		17.59	57.412	NA
19		6	2437	18.87		18.87	77.090	NA
17		11	2462	17.21		17.21	52.602	NA
18	11g	1	2412	17.64		17.64	58.076	NA
23		6	2437	22.97		22.97	198.153	NA
17		11	2462	16.50		16.50	44.668	NA

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted (average) output power (dBm)		Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT A	ANT B			
15	11n HT20	1	2412	14.87	14.57	17.73	59.332	NA
22		6	2437	21.45	20.74	24.12	258.214	NA
16		11	2462	15.83	14.99	18.44	69.833	NA
12	11n HT40	3	2422	12.82	11.74	15.32	34.071	NA
15		6	2437	15.32	14.49	17.94	62.160	NA
13		9	2452	13.48	12.72	16.13	40.991	NA

Note: Average power is for reference only.





## 11. Power Spectral Density

### 11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### 11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

### 11.3 Test Setup Layout

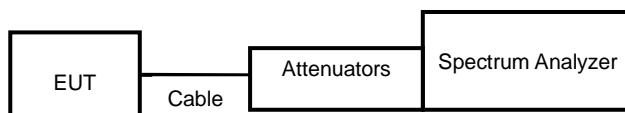



**11.4 Test Result and Data**


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A					
11b	1	2412	-2.97		-2.97	0.00	-2.97	8.00
	6	2437	-3.54		-3.54	0.00	-3.54	8.00
	11	2462	-3.02		-3.02	0.00	-3.02	8.00
11g	1	2412	-4.73		-4.73	0.00	-4.73	8.00
	6	2437	-4.87		-4.87	0.00	-4.87	8.00
	11	2462	-3.54		-3.54	0.00	-3.54	8.00

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT B					
11b	1	2412	-7.95		-7.95	0.00	-7.95	8.00
	6	2437	-6.97		-6.97	0.00	-6.97	8.00
	11	2462	-8.17		-8.17	0.00	-8.17	8.00
11g	1	2412	-10.09		-10.09	0.00	-10.09	8.00
	6	2437	-5.22		-5.22	0.00	-5.22	8.00
	11	2462	-10.93		-10.93	0.00	-10.93	8.00


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A	ANT B				
11n HT20	1	2412	-12.37	-12.75	-9.55	0.00	-9.55	7.46
	6	2437	5.76	-6.84	5.99	0.00	5.99	7.46
	11	2462	-11.1	-12.59	-8.77	0.00	-8.77	7.46
11n HT40	3	2422	-17.06	-18.04	-14.51	0.00	-14.51	7.46
	6	2437	-14.29	-15.13	-11.68	0.00	-11.68	7.46
	9	2452	-16.59	-17.07	-13.81	0.00	-13.81	7.46




ANT A  
Modulation Type: 802.11b  
CH01

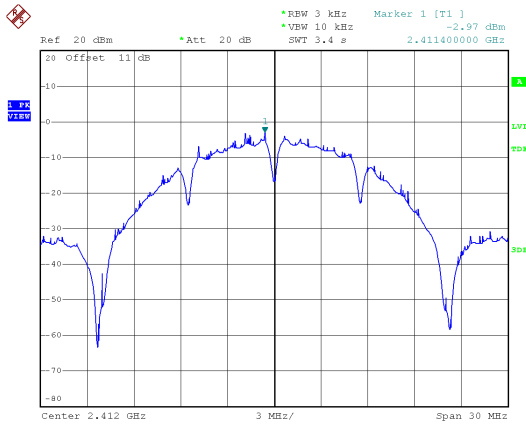


Modulation Type: 802.11g  
CH01

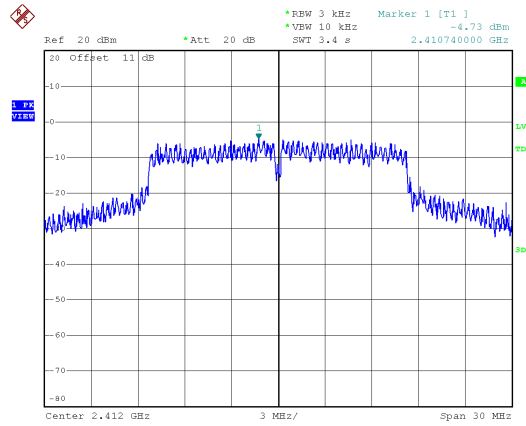


CH06

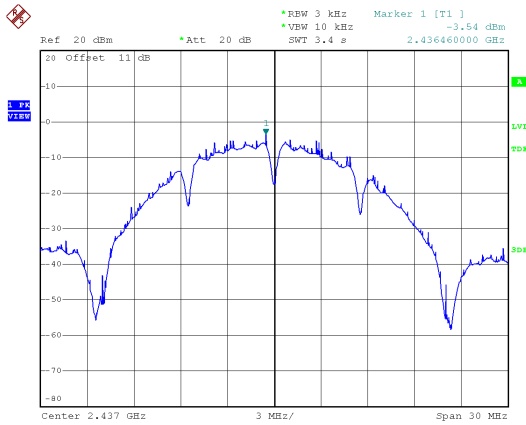


CH06

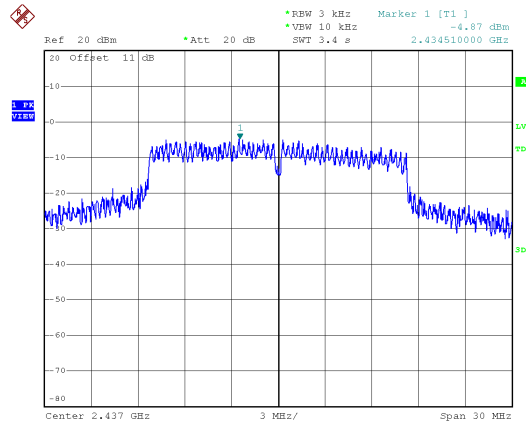

CH11

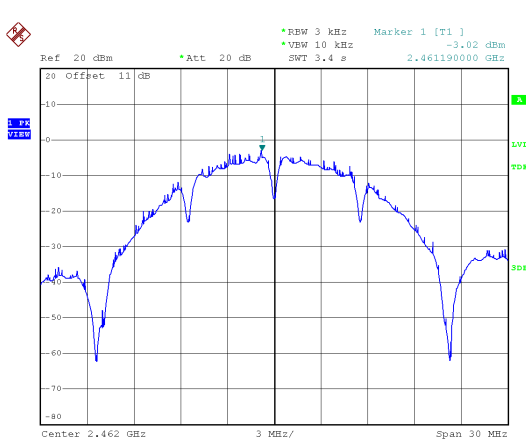


CH11

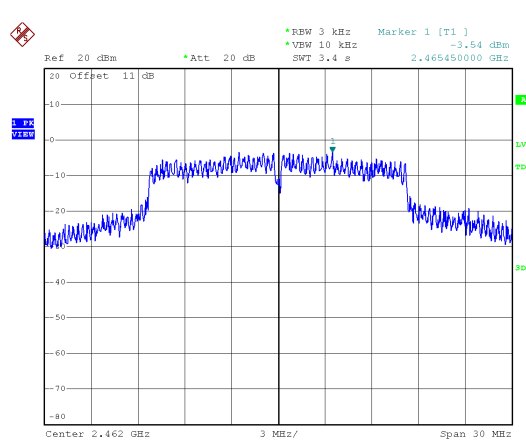





ANT B  
Modulation Type: 802.11b  
CH01

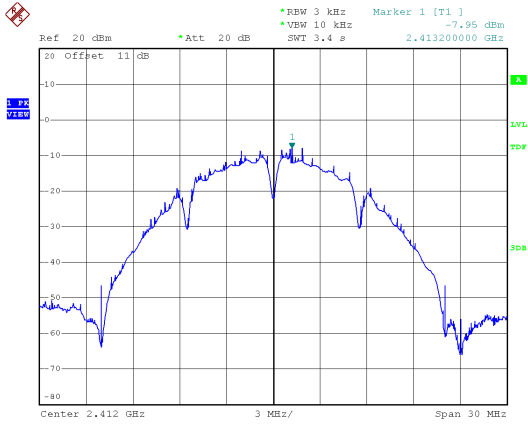


Modulation Type: 802.11g  
CH01

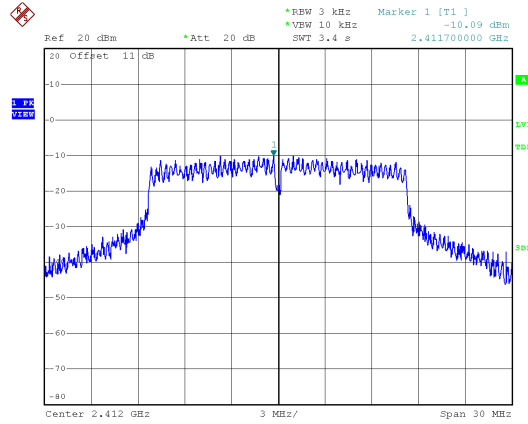


CH06

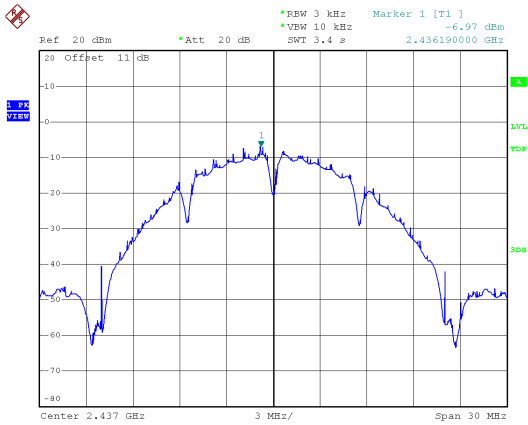


CH06

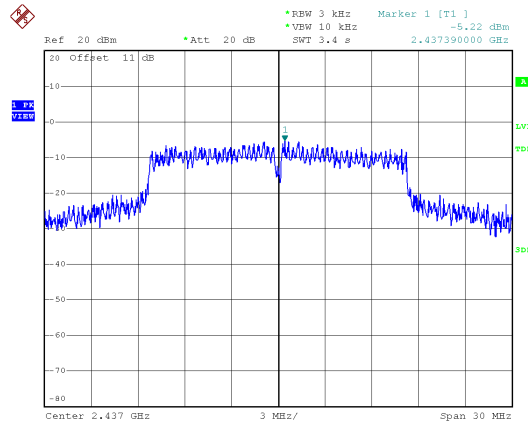

CH11

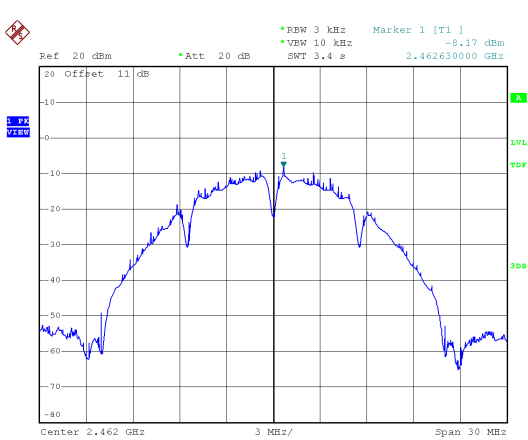


CH11

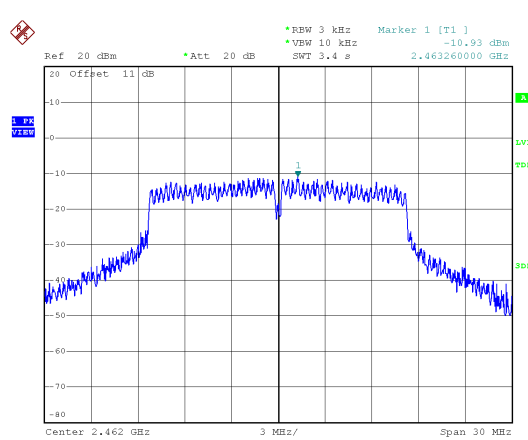





ANT A  
Modulation Type: 802.11n HT20  
CH01

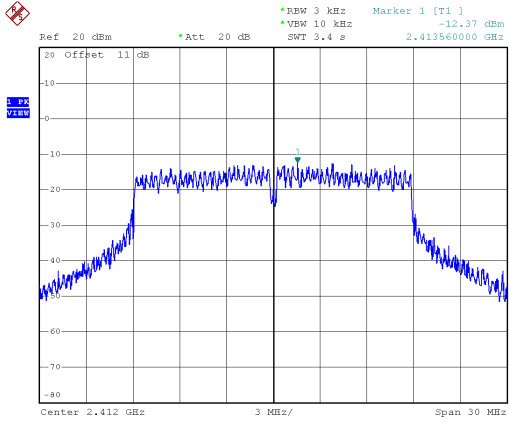


Modulation Type: 802.11n HT40  
CH03

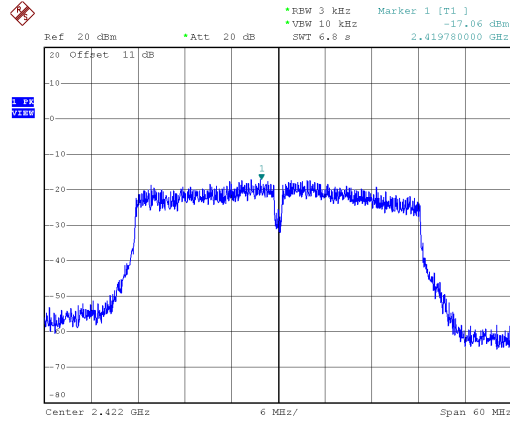


CH06

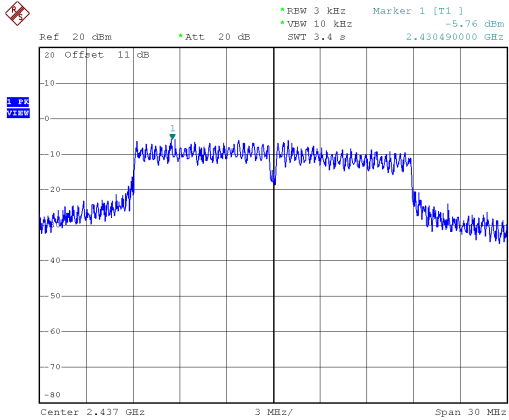


CH06

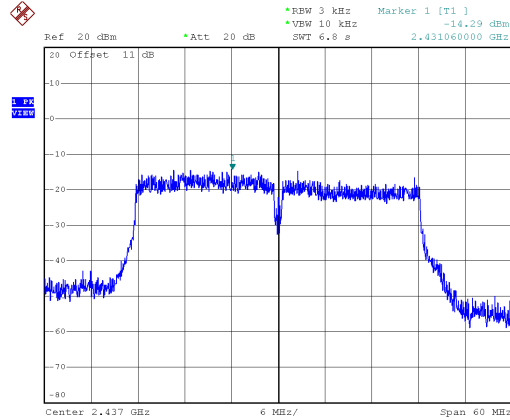

CH11

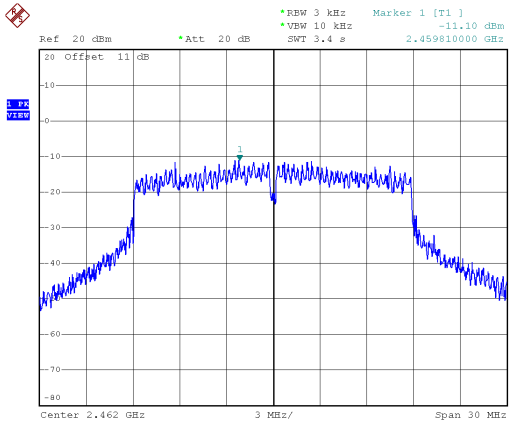


CH09

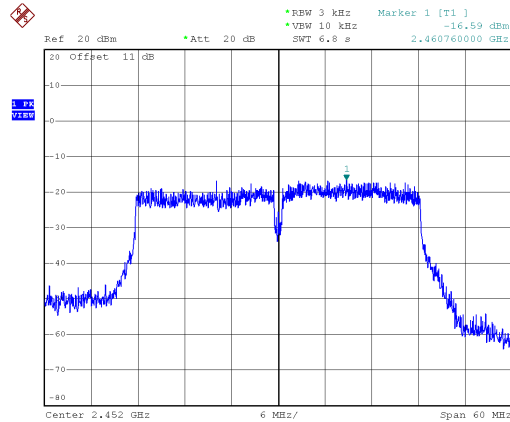





ANT B  
Modulation Type: 802.11n HT20  
CH01

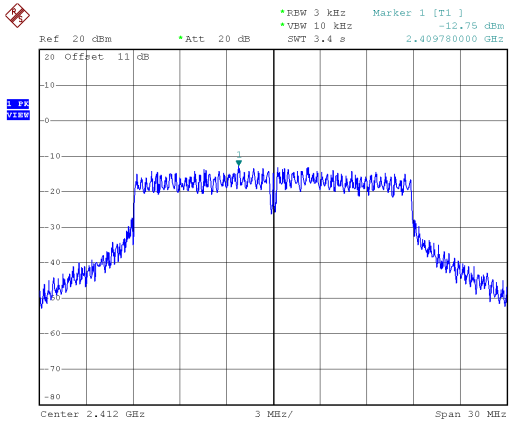


Modulation Type: 802.11n HT40  
CH03

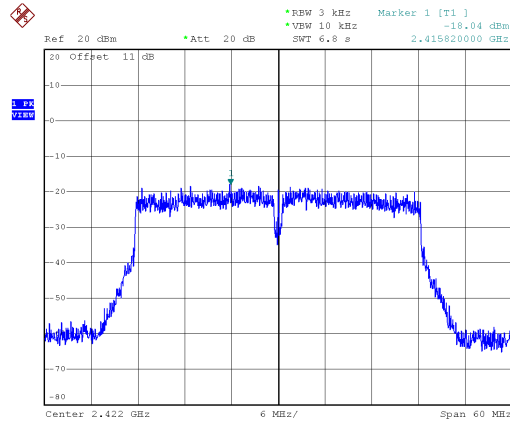


CH06

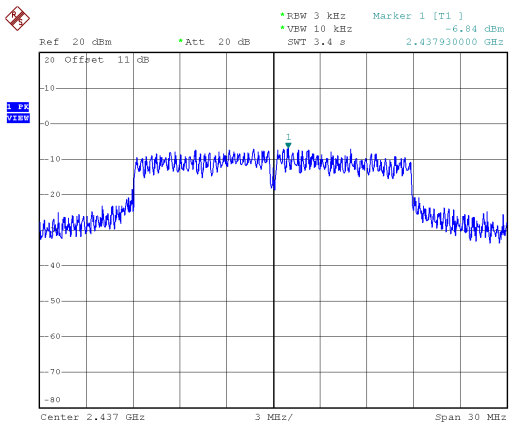

CH06

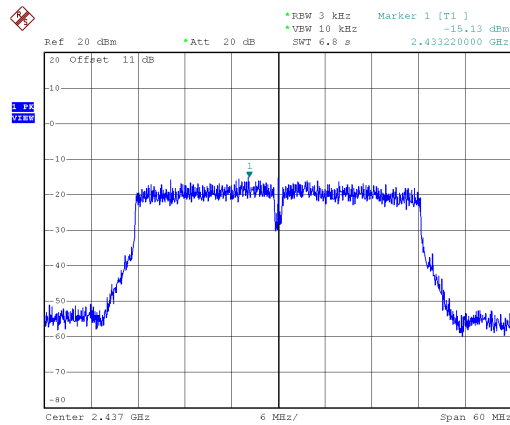

CH11

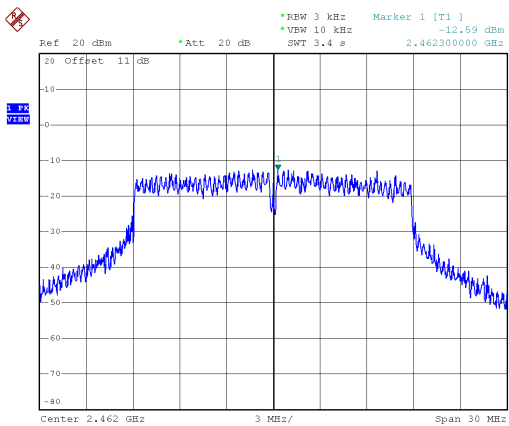

CH09

