




Test Mode : 2TX 11ac40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

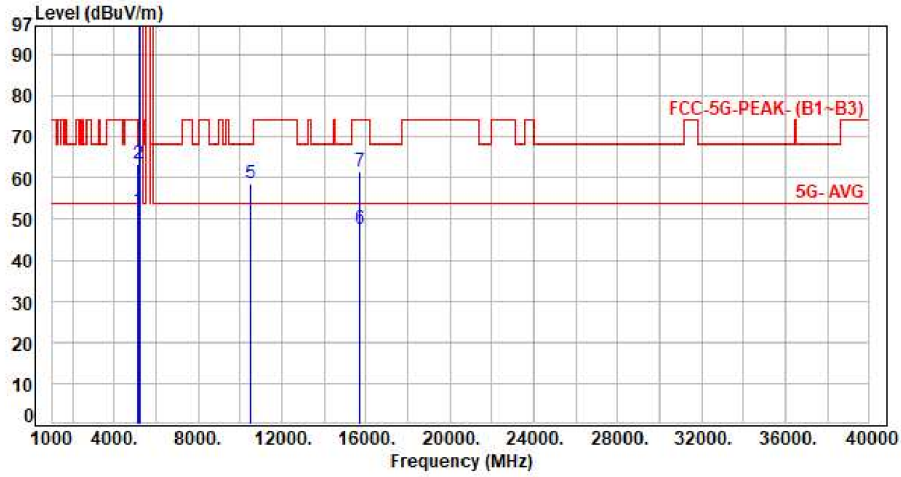


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.38	52.07	54.00	-1.93	Average	280	38	P
2	5150.00	6.69	56.91	63.60	74.00	-10.40	Peak	280	38	P
3	5230.00	6.90	94.85	101.75	200.00	-98.25	Average	280	38	P
4	5230.00	6.90	104.43	111.33	200.00	-88.67	Peak	280	38	P
5	10460.00	14.87	43.77	58.64	68.20	-9.56	Peak	100	255	P
6	15690.00	17.88	29.71	47.59	54.00	-6.41	Average	100	87	P
7	15690.00	17.88	43.57	61.45	74.00	-12.55	Peak	100	87	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

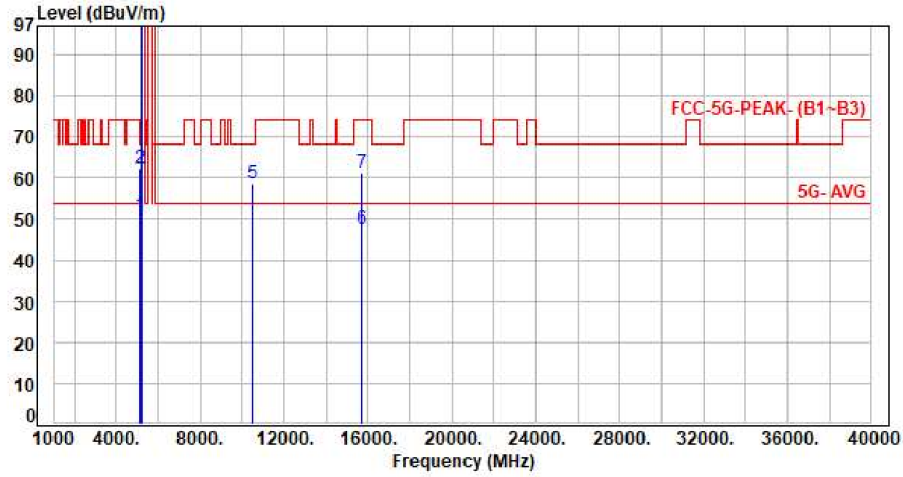


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.12	50.81	54.00	-3.19	Average	116	193	P
2	5150.00	6.69	55.71	62.40	74.00	-11.60	Peak	116	193	P
3	5230.00	6.90	91.08	97.98	200.00	-102.02	Average	116	193	P
4	5230.00	6.90	100.79	107.69	200.00	-92.31	Peak	116	193	P
5	10460.00	14.87	43.64	58.51	68.20	-9.69	Peak	100	142	P
6	15690.00	17.88	29.53	47.41	54.00	-6.59	Average	100	228	P
7	15690.00	17.88	43.38	61.26	74.00	-12.74	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

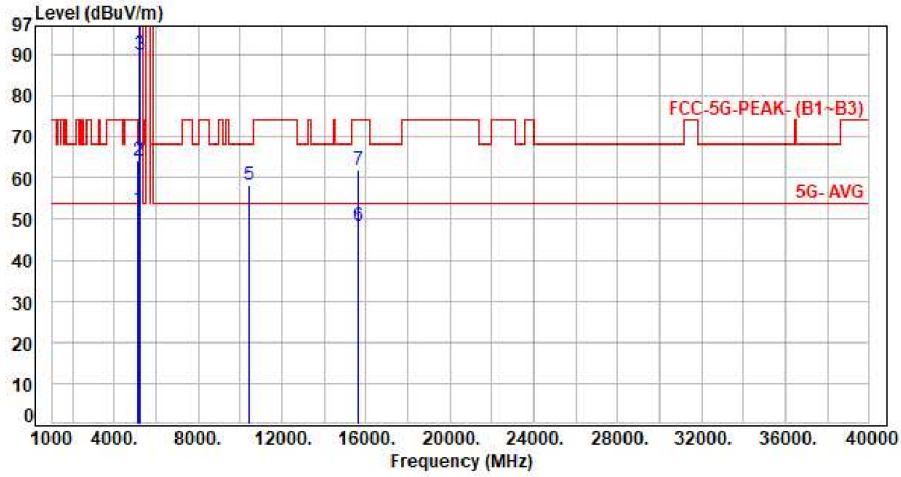


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.65	52.34	54.00	-1.66	Average	248	39	P
2	5150.00	6.69	57.58	64.27	74.00	-9.73	Peak	248	39	P
3	5210.00	6.87	83.08	89.95	200.00	-110.05	Average	248	39	P
4	5210.00	6.87	91.76	98.63	200.00	-101.37	Peak	248	39	P
5	10420.00	14.79	43.48	58.27	68.20	-9.93	Peak	100	251	P
6	15630.00	18.06	30.18	48.24	54.00	-5.76	Average	100	86	P
7	15630.00	18.06	43.82	61.88	74.00	-12.12	Peak	100	86	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

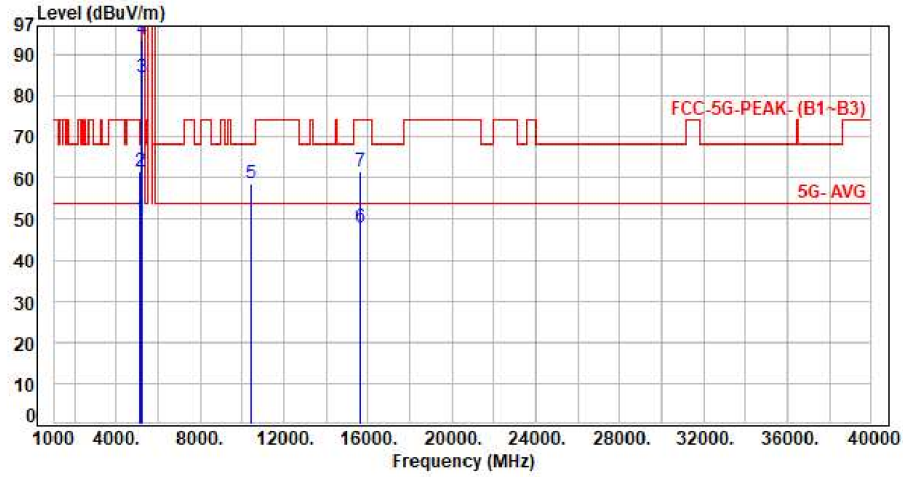


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.47	50.16	54.00	-3.84	Average	100	197	P
2	5150.00	6.69	54.72	61.41	74.00	-12.59	Peak	100	197	P
3	5210.00	6.87	77.48	84.35	200.00	-115.65	Average	100	197	P
4	5210.00	6.87	86.68	93.55	200.00	-106.45	Peak	100	197	P
5	10420.00	14.79	43.89	58.68	68.20	-9.52	Peak	100	147	P
6	15630.00	18.06	30.05	48.11	54.00	-5.89	Average	100	224	P
7	15630.00	18.06	43.55	61.61	74.00	-12.39	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

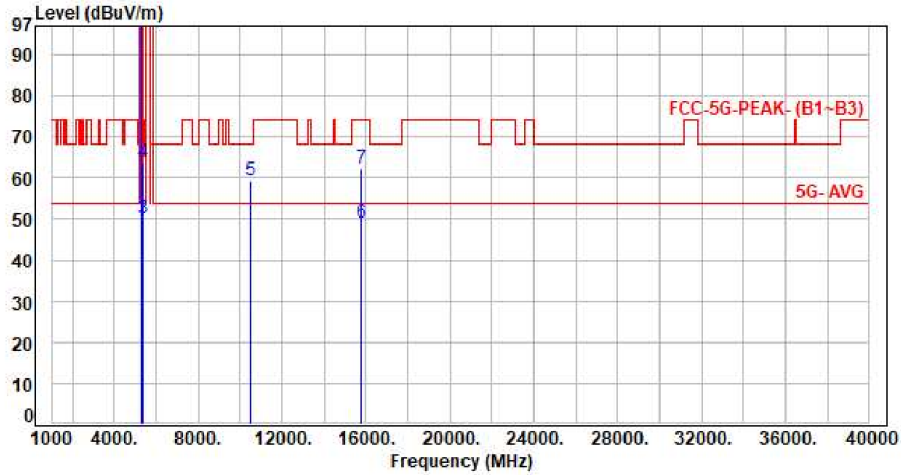


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	98.01	105.00	200.00	-95.00	Average	150	41	P
2	5260.00	6.99	108.50	115.49	200.00	-84.51	Peak	150	41	P
3	5350.00	7.27	42.76	50.03	54.00	-3.97	Average	150	41	P
4	5350.00	7.27	56.58	63.85	74.00	-10.15	Peak	150	41	P
5	10520.00	15.08	44.20	59.28	68.20	-8.92	Peak	100	159	P
6	15780.00	17.59	31.44	49.03	54.00	-4.97	Average	100	144	P
7	15780.00	17.59	44.80	62.39	74.00	-11.61	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

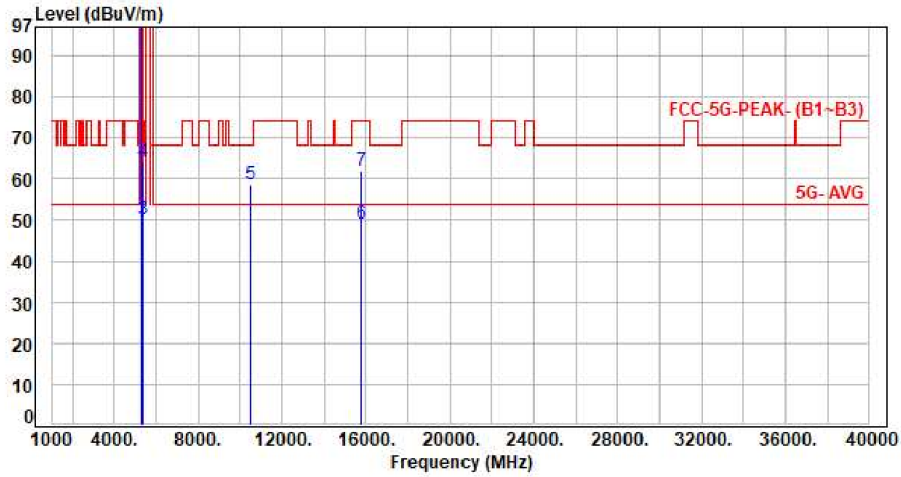


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	95.42	102.41	200.00	-97.59	Average	133	195	P
2	5260.00	6.99	105.41	112.40	200.00	-87.60	Peak	133	195	P
3	5350.00	7.27	42.84	50.11	54.00	-3.89	Average	133	195	P
4	5350.00	7.27	56.79	64.06	74.00	-9.94	Peak	133	195	P
5	10520.00	15.08	43.70	58.78	68.20	-9.42	Peak	100	188	P
6	15780.00	17.59	31.32	48.91	54.00	-5.09	Average	100	151	P
7	15780.00	17.59	44.19	61.78	74.00	-12.22	Peak	100	151	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

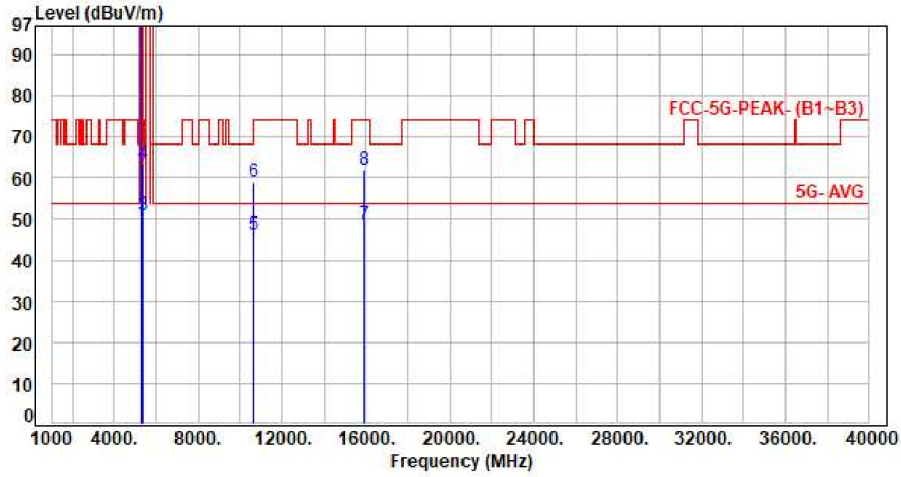


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	99.11	106.31	200.00	-93.69	Average	222	41	P
2	5300.00	7.20	109.44	116.64	200.00	-83.36	Peak	222	41	P
3	5350.00	7.27	43.62	50.89	54.00	-3.11	Average	222	41	P
4	5350.00	7.27	56.27	63.54	74.00	-10.46	Peak	222	41	P
5	10600.00	15.29	30.64	45.93	54.00	-8.07	Average	100	192	P
6	10600.00	15.29	43.75	59.04	74.00	-14.96	Peak	100	192	P
7	15900.00	17.45	31.35	48.80	54.00	-5.20	Average	100	217	P
8	15900.00	17.45	44.42	61.87	74.00	-12.13	Peak	100	217	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

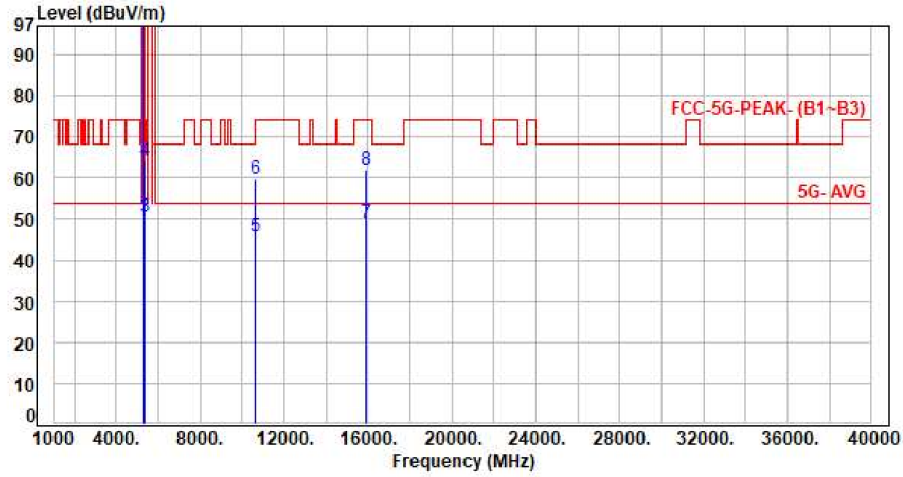


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	92.88	100.08	200.00	-99.92	Average	244	216	P
2	5300.00	7.20	102.29	109.49	200.00	-90.51	Peak	244	216	P
3	5350.00	7.27	43.28	50.55	54.00	-3.45	Average	244	216	P
4	5350.00	7.27	56.92	64.19	74.00	-9.81	Peak	244	216	P
5	10600.00	15.29	30.52	45.81	54.00	-8.19	Average	100	131	P
6	10600.00	15.29	44.52	59.81	74.00	-14.19	Peak	100	131	P
7	15900.00	17.45	31.58	49.03	54.00	-4.97	Average	100	164	P
8	15900.00	17.45	44.43	61.88	74.00	-12.12	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

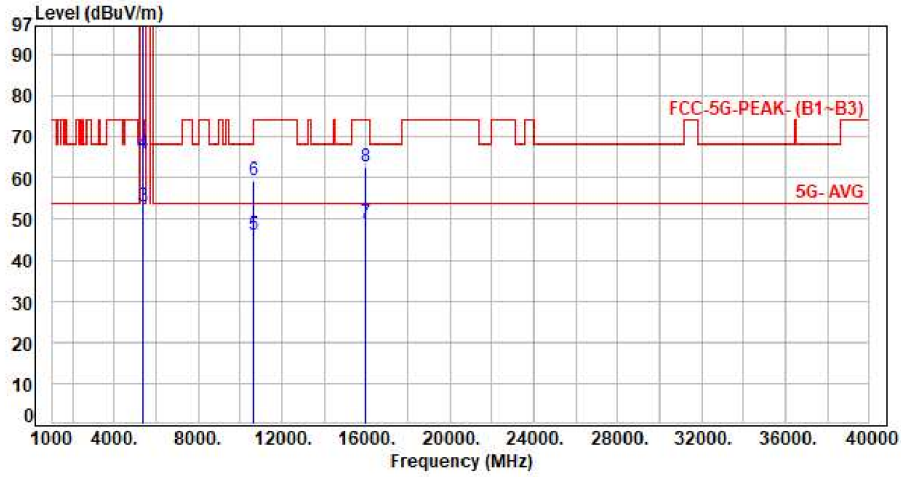


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	98.07	105.30	200.00	-94.70	Average	222	40	P
2	5320.00	7.23	108.11	115.34	200.00	-84.66	Peak	222	40	P
3	5350.00	7.27	45.72	52.99	54.00	-1.01	Average	222	40	P
4	5350.00	7.27	58.82	66.09	74.00	-7.91	Peak	222	40	P
5	10640.00	15.44	30.66	46.10	54.00	-7.90	Average	100	137	P
6	10640.00	15.44	43.95	59.39	74.00	-14.61	Peak	100	137	P
7	15960.00	17.45	31.68	49.13	54.00	-4.87	Average	100	117	P
8	15960.00	17.45	45.31	62.76	74.00	-11.24	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

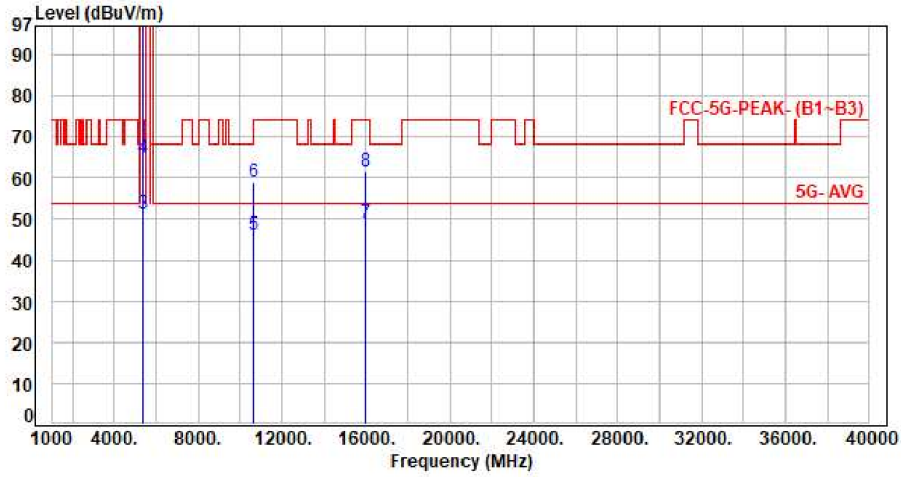


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	92.63	99.86	200.00	-100.14	Average	133	195	P
2	5320.00	7.23	102.38	109.61	200.00	-90.39	Peak	133	195	P
3	5350.00	7.27	44.17	51.44	54.00	-2.56	Average	133	195	P
4	5350.00	7.27	57.79	65.06	74.00	-8.94	Peak	133	195	P
5	10640.00	15.44	30.57	46.01	54.00	-7.99	Average	100	174	P
6	10640.00	15.44	43.49	58.93	74.00	-15.07	Peak	100	174	P
7	15960.00	17.45	31.75	49.20	54.00	-4.80	Average	100	157	P
8	15960.00	17.45	44.21	61.66	74.00	-12.34	Peak	100	157	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH56 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

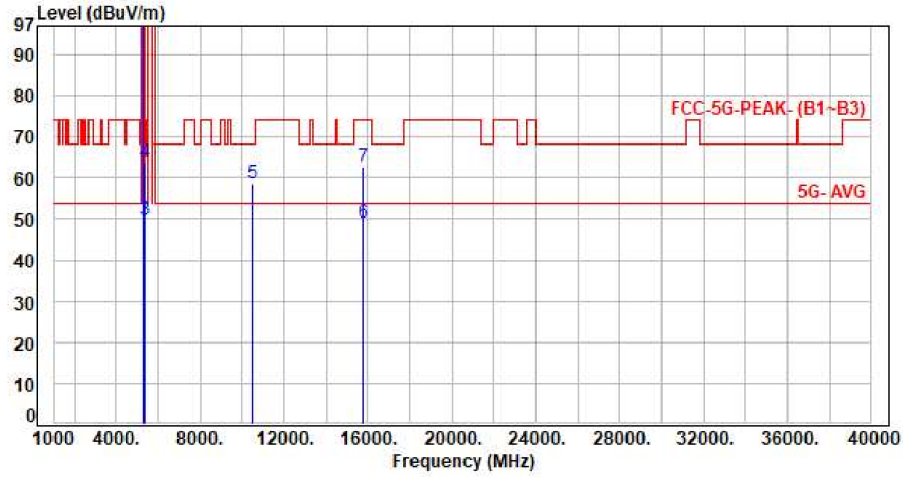


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	98.75	105.74	200.00	-94.26	Average	160	42	P
2	5260.00	6.99	109.57	116.56	200.00	-83.44	Peak	160	42	P
3	5350.00	7.27	42.55	49.82	54.00	-4.18	Average	160	42	P
4	5350.00	7.27	56.56	63.83	74.00	-10.17	Peak	160	42	P
5	10520.00	15.08	43.73	58.81	68.20	-9.39	Peak	100	131	P
6	15780.00	17.59	31.38	48.97	54.00	-5.03	Average	100	185	P
7	15780.00	17.59	45.14	62.73	74.00	-11.27	Peak	100	185	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH56 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

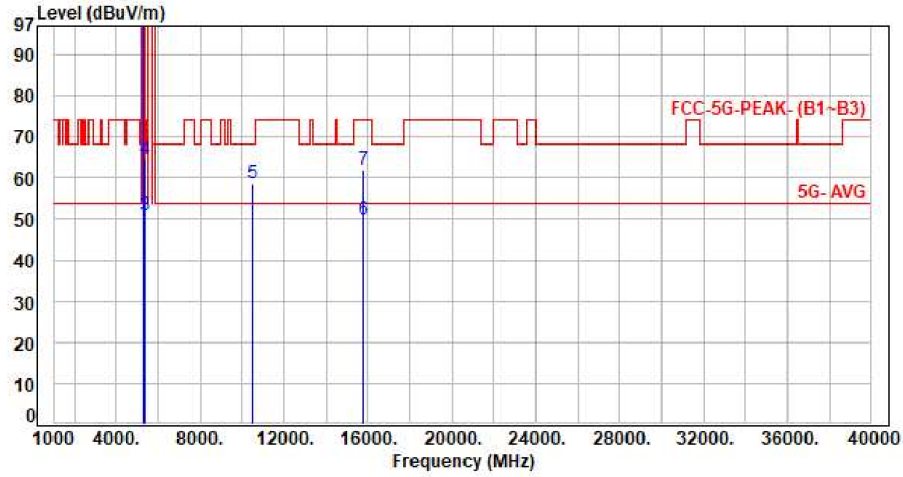


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	94.97	101.96	200.00	-98.04	Average	137	194	P
2	5260.00	6.99	105.75	112.74	200.00	-87.26	Peak	137	194	P
3	5350.00	7.27	43.49	50.76	54.00	-3.24	Average	137	194	P
4	5350.00	7.27	57.23	64.50	74.00	-9.50	Peak	137	194	P
5	10520.00	15.08	43.49	58.57	68.20	-9.63	Peak	100	291	P
6	15780.00	17.59	32.12	49.71	54.00	-4.29	Average	100	189	P
7	15780.00	17.59	44.41	62.00	74.00	-12.00	Peak	100	189	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

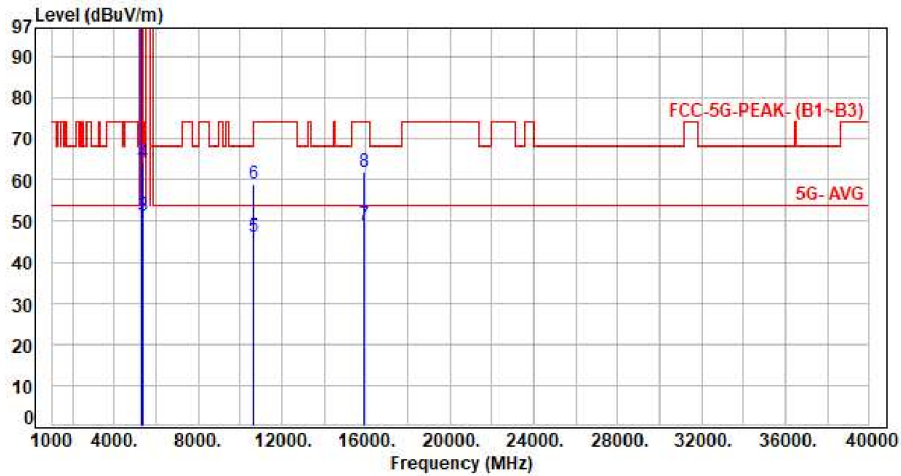


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	98.99	106.19	200.00	-93.81	Average	214	41	P
2	5300.00	7.20	109.07	116.27	200.00	-83.73	Peak	214	41	P
3	5350.00	7.27	44.03	51.30	54.00	-2.70	Average	214	41	P
4	5350.00	7.27	56.73	64.00	74.00	-10.00	Peak	214	41	P
5	10600.00	15.29	30.68	45.97	54.00	-8.03	Average	100	185	P
6	10600.00	15.29	43.74	59.03	74.00	-14.97	Peak	100	185	P
7	15900.00	17.45	31.56	49.01	54.00	-4.99	Average	100	213	P
8	15900.00	17.45	44.70	62.15	74.00	-11.85	Peak	100	213	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

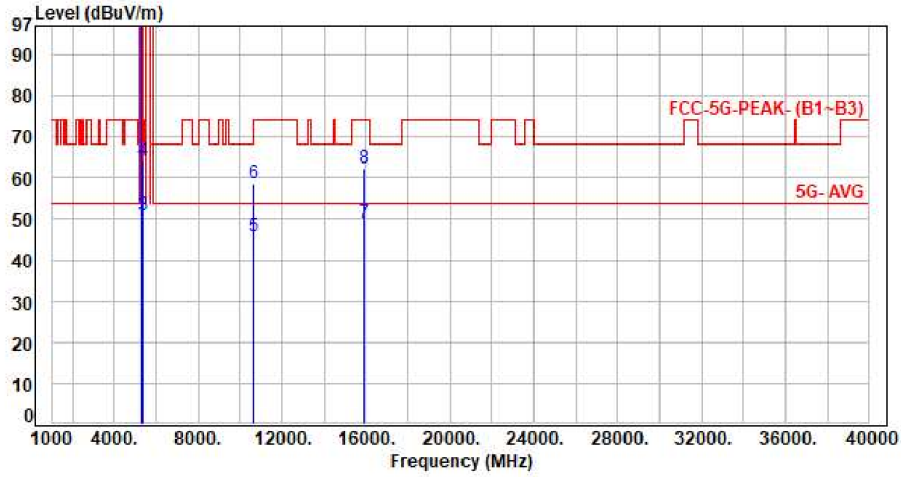


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	93.44	100.64	200.00	-99.36	Average	269	193	P
2	5300.00	7.20	103.94	111.14	200.00	-88.86	Peak	269	193	P
3	5350.00	7.27	43.46	50.73	54.00	-3.27	Average	269	193	P
4	5350.00	7.27	56.73	64.00	74.00	-10.00	Peak	269	193	P
5	10600.00	15.29	30.51	45.80	54.00	-8.20	Average	100	194	P
6	10600.00	15.29	43.52	58.81	74.00	-15.19	Peak	100	194	P
7	15900.00	17.45	31.60	49.05	54.00	-4.95	Average	100	116	P
8	15900.00	17.45	44.71	62.16	74.00	-11.84	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

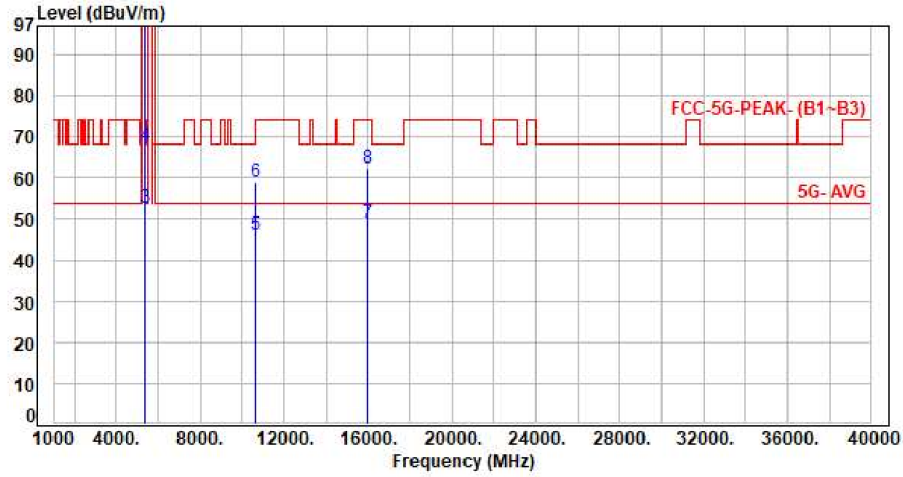


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	97.70	104.93	200.00	-95.07	Average	246	104	P
2	5320.00	7.23	107.07	114.30	200.00	-85.70	Peak	246	104	P
3	5350.00	7.27	45.52	52.79	54.00	-1.21	Average	246	104	P
4	5350.00	7.27	60.70	67.97	74.00	-6.03	Peak	246	104	P
5	10640.00	15.44	30.72	46.16	54.00	-7.84	Average	100	121	P
6	10640.00	15.44	43.40	58.84	74.00	-15.16	Peak	100	121	P
7	15960.00	17.45	31.67	49.12	54.00	-4.88	Average	100	175	P
8	15960.00	17.45	44.90	62.35	74.00	-11.65	Peak	100	175	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

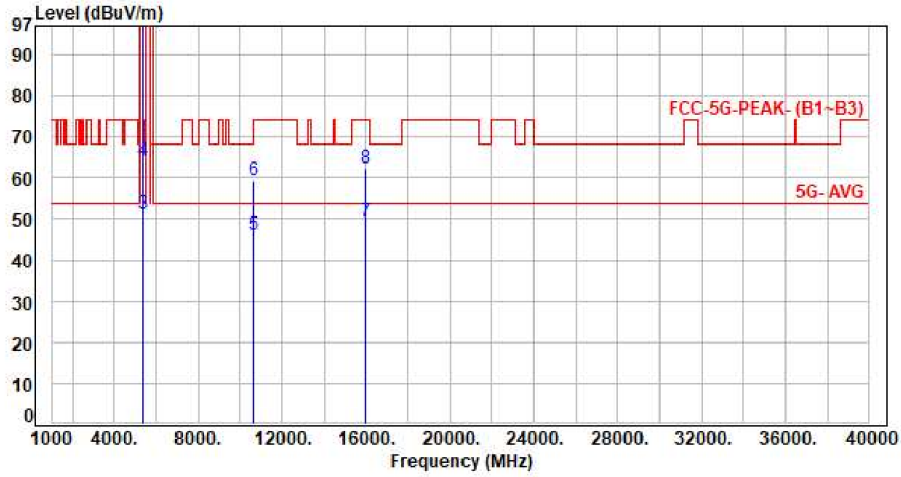

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	91.55	98.78	200.00	-101.22	Average	261	195	P
2	5320.00	7.23	101.66	108.89	200.00	-91.11	Peak	261	195	P
3	5350.00	7.27	43.91	51.18	54.00	-2.82	Average	261	195	P
4	5350.00	7.27	56.85	64.12	74.00	-9.88	Peak	261	195	P
5	10640.00	15.44	30.54	45.98	54.00	-8.02	Average	100	176	P
6	10640.00	15.44	43.91	59.35	74.00	-14.65	Peak	100	176	P
7	15960.00	17.45	31.86	49.31	54.00	-4.69	Average	100	167	P
8	15960.00	17.45	44.83	62.28	74.00	-11.72	Peak	100	167	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor