




Test Mode : 2TX 11ac40 CH54 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

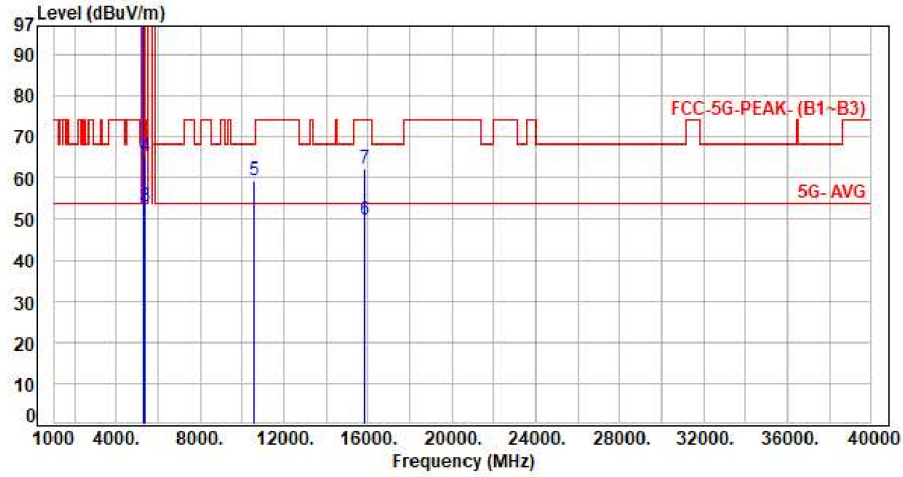


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5270.00         | 7.04        | 96.72          | 103.76         | 200.00         | -96.24      | Average  | 227         | 43            | P   |
| 2   | 5270.00         | 7.04        | 106.41         | 113.45         | 200.00         | -86.55      | Peak     | 227         | 43            | P   |
| 3   | 5350.00         | 7.27        | 45.67          | 52.94          | 54.00          | -1.06       | Average  | 227         | 43            | P   |
| 4   | 5350.00         | 7.27        | 57.84          | 65.11          | 74.00          | -8.89       | Peak     | 227         | 43            | P   |
| 5   | 10540.00        | 15.17       | 44.37          | 59.54          | 68.20          | -8.66       | Peak     | 100         | 122           | P   |
| 6   | 15810.00        | 17.49       | 32.35          | 49.84          | 54.00          | -4.16       | Average  | 100         | 153           | P   |
| 7   | 15810.00        | 17.49       | 44.93          | 62.42          | 74.00          | -11.58      | Peak     | 100         | 153           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH54 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

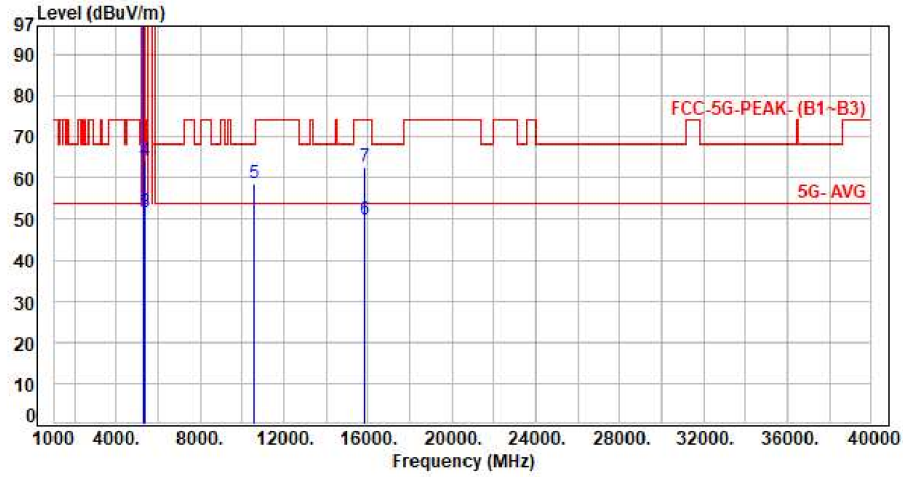


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5270.00         | 7.04        | 91.09          | 98.13          | 200.00         | -101.87     | Average  | 378         | 171           | P   |
| 2   | 5270.00         | 7.04        | 100.55         | 107.59         | 200.00         | -92.41      | Peak     | 378         | 171           | P   |
| 3   | 5350.00         | 7.27        | 44.19          | 51.46          | 54.00          | -2.54       | Average  | 378         | 171           | P   |
| 4   | 5350.00         | 7.27        | 56.79          | 64.06          | 74.00          | -9.94       | Peak     | 378         | 171           | P   |
| 5   | 10540.00        | 15.17       | 43.36          | 58.53          | 68.20          | -9.67       | Peak     | 100         | 221           | P   |
| 6   | 15810.00        | 17.49       | 32.36          | 49.85          | 54.00          | -4.15       | Average  | 100         | 165           | P   |
| 7   | 15810.00        | 17.49       | 45.16          | 62.65          | 74.00          | -11.35      | Peak     | 100         | 165           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH62 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

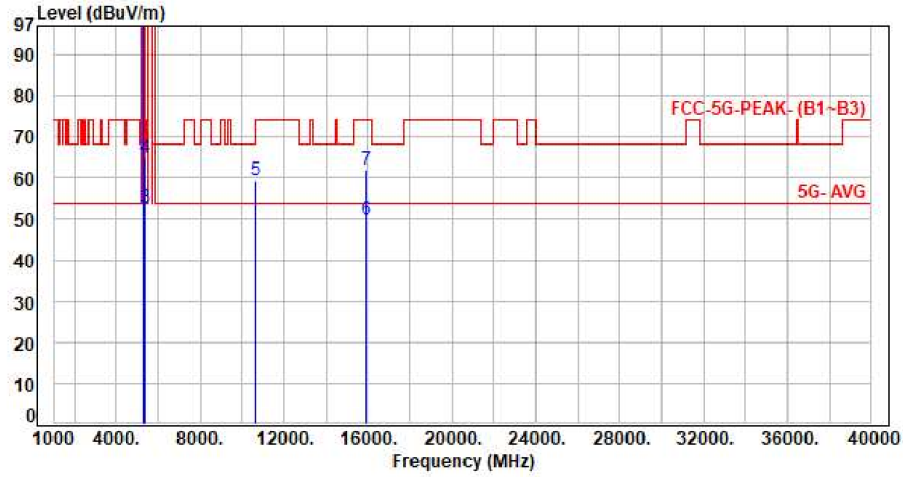


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5310.00         | 7.22        | 88.65          | 95.87          | 200.00         | -104.13     | Average  | 264         | 97            | P   |
| 2   | 5310.00         | 7.22        | 98.62          | 105.84         | 200.00         | -94.16      | Peak     | 264         | 97            | P   |
| 3   | 5350.00         | 7.27        | 45.33          | 52.60          | 54.00          | -1.40       | Average  | 264         | 97            | P   |
| 4   | 5350.00         | 7.27        | 57.58          | 64.85          | 74.00          | -9.15       | Peak     | 264         | 97            | P   |
| 5   | 10620.00        | 15.37       | 44.06          | 59.43          | 74.00          | -14.57      | Peak     | 100         | 195           | P   |
| 6   | 15930.00        | 17.44       | 32.37          | 49.81          | 54.00          | -4.19       | Average  | 100         | 194           | P   |
| 7   | 15930.00        | 17.44       | 44.68          | 62.12          | 74.00          | -11.88      | Peak     | 100         | 194           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH62 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

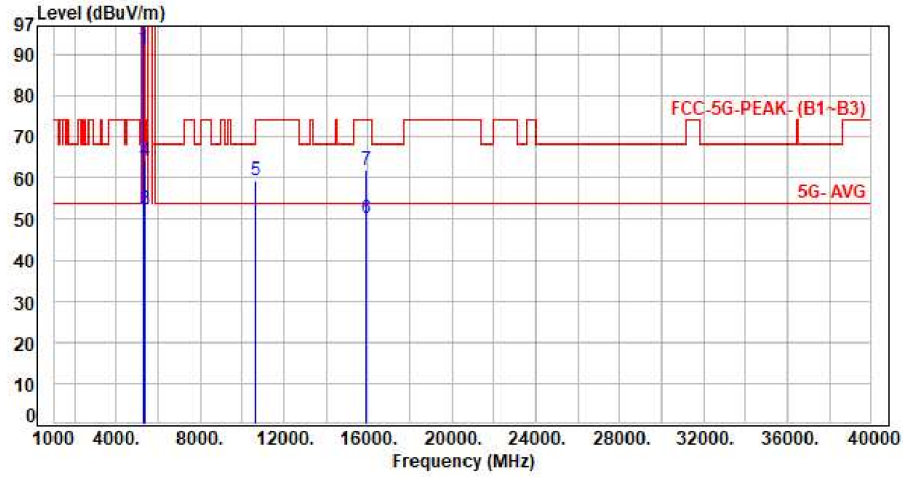


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5310.00         | 7.22        | 84.13          | 91.35          | 200.00         | -108.65     | Average  | 111         | 173           | P   |
| 2   | 5310.00         | 7.22        | 93.05          | 100.27         | 200.00         | -99.73      | Peak     | 111         | 173           | P   |
| 3   | 5350.00         | 7.27        | 45.20          | 52.47          | 54.00          | -1.53       | Average  | 111         | 173           | P   |
| 4   | 5350.00         | 7.27        | 57.07          | 64.34          | 74.00          | -9.66       | Peak     | 111         | 173           | P   |
| 5   | 10620.00        | 15.37       | 43.94          | 59.31          | 74.00          | -14.69      | Peak     | 100         | 139           | P   |
| 6   | 15930.00        | 17.44       | 32.74          | 50.18          | 54.00          | -3.82       | Average  | 100         | 227           | P   |
| 7   | 15930.00        | 17.44       | 44.43          | 61.87          | 74.00          | -12.13      | Peak     | 100         | 227           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH58 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

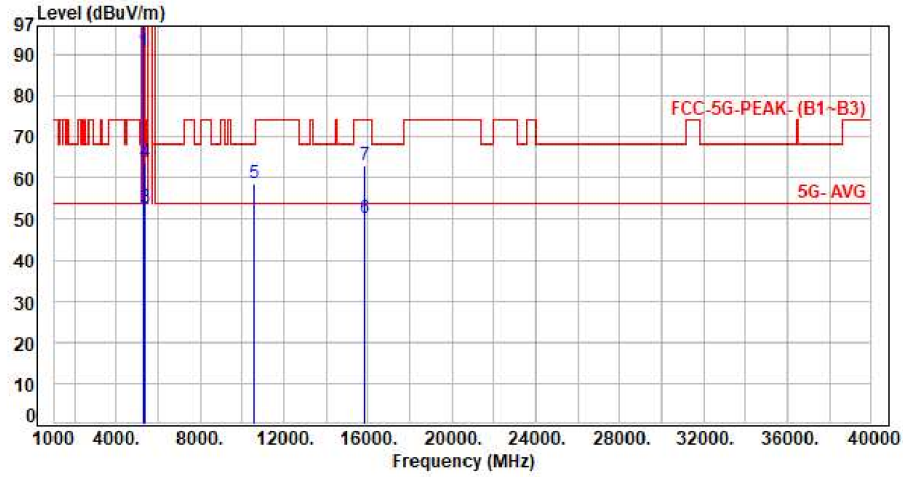


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5290.00         | 7.15        | 83.70          | 90.85          | 200.00         | -109.15     | Average  | 219         | 41            | P   |
| 2   | 5290.00         | 7.15        | 92.71          | 99.86          | 200.00         | -100.14     | Peak     | 219         | 41            | P   |
| 3   | 5350.00         | 7.27        | 45.62          | 52.89          | 54.00          | -1.11       | Average  | 219         | 41            | P   |
| 4   | 5350.00         | 7.27        | 56.62          | 63.89          | 74.00          | -10.11      | Peak     | 219         | 41            | P   |
| 5   | 10580.00        | 15.25       | 43.52          | 58.77          | 68.20          | -9.43       | Peak     | 100         | 138           | P   |
| 6   | 15870.00        | 17.47       | 32.82          | 50.29          | 54.00          | -3.71       | Average  | 100         | 188           | P   |
| 7   | 15870.00        | 17.47       | 45.46          | 62.93          | 74.00          | -11.07      | Peak     | 100         | 188           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH58 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

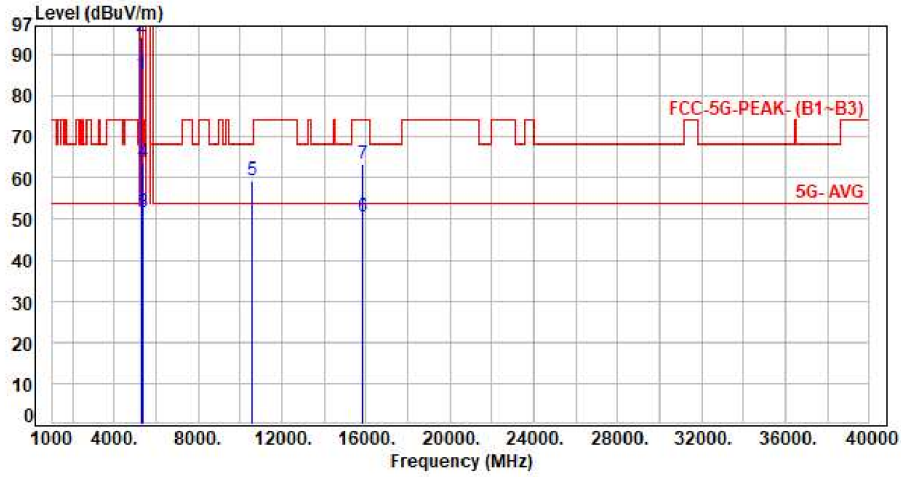


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5290.00         | 7.15        | 78.03          | 85.18          | 200.00         | -114.82     | Average  | 133         | 194           | P   |
| 2   | 5290.00         | 7.15        | 87.17          | 94.32          | 200.00         | -105.68     | Peak     | 133         | 194           | P   |
| 3   | 5350.00         | 7.27        | 44.52          | 51.79          | 54.00          | -2.21       | Average  | 133         | 194           | P   |
| 4   | 5350.00         | 7.27        | 56.46          | 63.73          | 74.00          | -10.27      | Peak     | 133         | 194           | P   |
| 5   | 10580.00        | 15.25       | 44.09          | 59.34          | 68.20          | -8.86       | Peak     | 100         | 176           | P   |
| 6   | 15870.00        | 17.47       | 32.96          | 50.43          | 54.00          | -3.57       | Average  | 100         | 161           | P   |
| 7   | 15870.00        | 17.47       | 45.94          | 63.41          | 74.00          | -10.59      | Peak     | 100         | 161           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

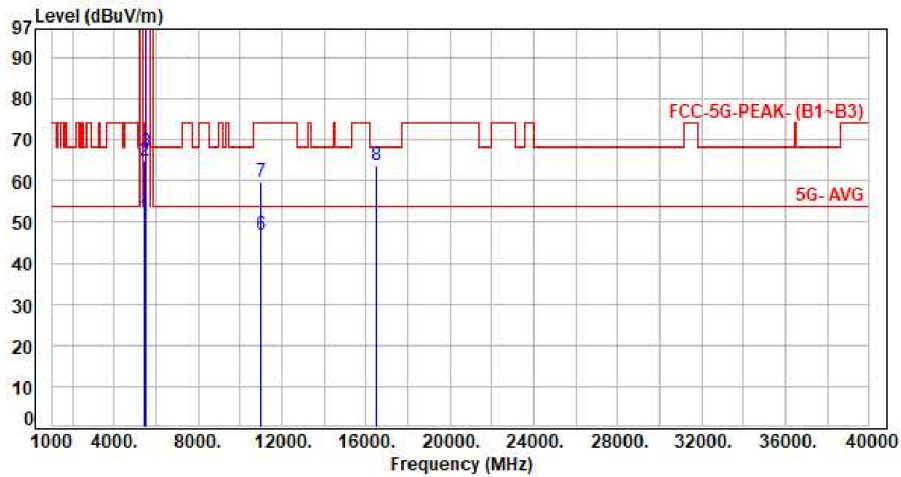


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.87          | 51.42          | 54.00          | -2.58       | Average  | 188         | 36            | P   |
| 2   | 5460.00         | 7.55        | 57.39          | 64.94          | 74.00          | -9.06       | Peak     | 188         | 36            | P   |
| 3   | 5470.00         | 7.58        | 59.41          | 66.99          | 68.20          | -1.21       | Peak     | 188         | 36            | P   |
| 4   | 5500.00         | 7.68        | 97.08          | 104.76         | 200.00         | -95.24      | Average  | 188         | 36            | P   |
| 5   | 5500.00         | 7.68        | 107.22         | 114.90         | 200.00         | -85.10      | Peak     | 188         | 36            | P   |
| 6   | 11000.00        | 16.20       | 30.77          | 46.97          | 54.00          | -7.03       | Average  | 100         | 151           | P   |
| 7   | 11000.00        | 16.20       | 43.41          | 59.61          | 74.00          | -14.39      | Peak     | 100         | 151           | P   |
| 8   | 16500.00        | 18.92       | 44.74          | 63.66          | 68.20          | -4.54       | Peak     | 100         | 161           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

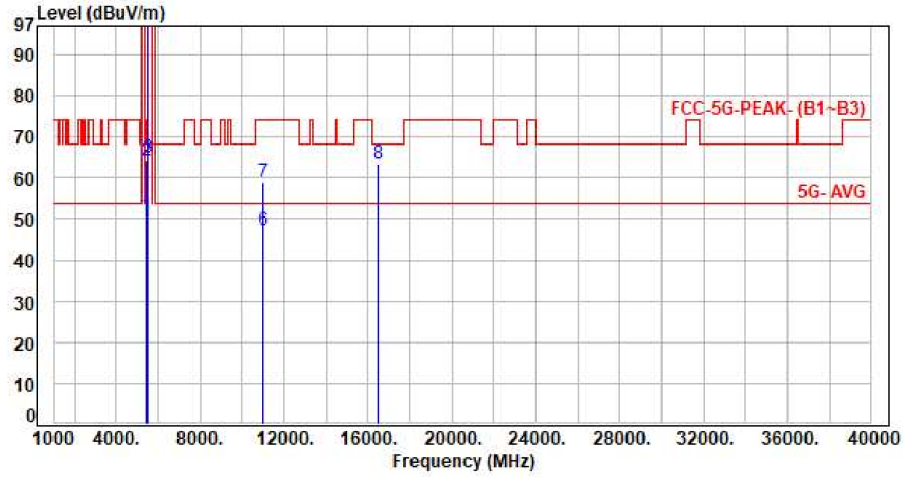


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.24          | 50.79          | 54.00          | -3.21       | Average  | 273         | 148           | P   |
| 2   | 5460.00         | 7.55        | 56.77          | 64.32          | 74.00          | -9.68       | Peak     | 273         | 148           | P   |
| 3   | 5470.00         | 7.58        | 57.19          | 64.77          | 68.20          | -3.43       | Peak     | 273         | 148           | P   |
| 4   | 5500.00         | 7.68        | 89.07          | 96.75          | 200.00         | -103.25     | Average  | 273         | 148           | P   |
| 5   | 5500.00         | 7.68        | 98.60          | 106.28         | 200.00         | -93.72      | Peak     | 273         | 148           | P   |
| 6   | 11000.00        | 16.20       | 30.95          | 47.15          | 54.00          | -6.85       | Average  | 100         | 147           | P   |
| 7   | 11000.00        | 16.20       | 42.88          | 59.08          | 74.00          | -14.92      | Peak     | 100         | 147           | P   |
| 8   | 16500.00        | 18.92       | 44.38          | 63.30          | 68.20          | -4.90       | Peak     | 100         | 251           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor





Test Mode : 2TX 11a CH120 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

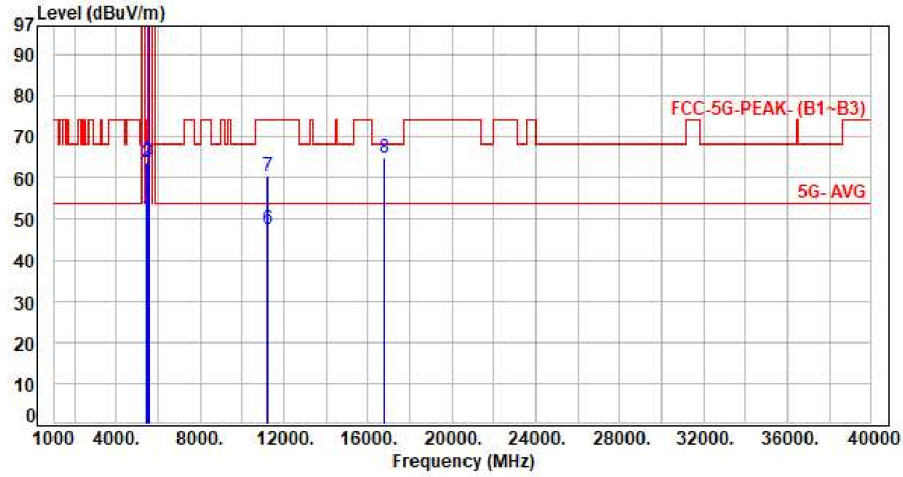


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.12          | 50.67          | 54.00          | -3.33       | Average  | 209         | 50            | P   |
| 2   | 5460.00         | 7.55        | 56.21          | 63.76          | 74.00          | -10.24      | Peak     | 209         | 50            | P   |
| 3   | 5470.00         | 7.58        | 56.55          | 64.13          | 68.20          | -4.07       | Peak     | 209         | 50            | P   |
| 4   | 5600.00         | 7.51        | 98.83          | 106.34         | 200.00         | -93.66      | Average  | 209         | 50            | P   |
| 5   | 5600.00         | 7.51        | 108.06         | 115.57         | 200.00         | -84.43      | Peak     | 209         | 50            | P   |
| 6   | 11200.00        | 16.28       | 31.25          | 47.53          | 54.00          | -6.47       | Average  | 100         | 195           | P   |
| 7   | 11200.00        | 16.28       | 44.06          | 60.34          | 74.00          | -13.66      | Peak     | 100         | 195           | P   |
| 8   | 16800.00        | 20.60       | 44.31          | 64.91          | 68.20          | -3.29       | Peak     | 100         | 214           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

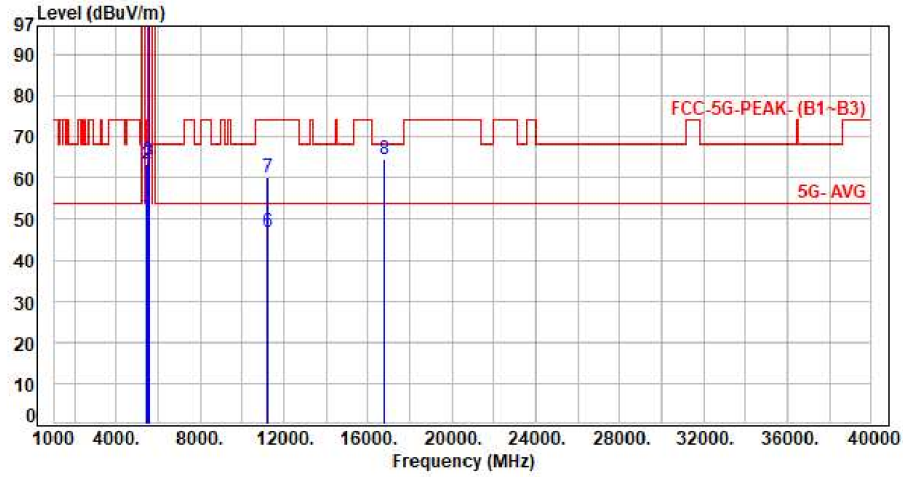


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.29          | 50.84          | 54.00          | -3.16       | Average  | 100         | 205           | P   |
| 2   | 5460.00         | 7.55        | 55.97          | 63.52          | 74.00          | -10.48      | Peak     | 100         | 205           | P   |
| 3   | 5470.00         | 7.58        | 56.50          | 64.08          | 68.20          | -4.12       | Peak     | 100         | 205           | P   |
| 4   | 5600.00         | 7.51        | 90.99          | 98.50          | 200.00         | -101.50     | Average  | 100         | 205           | P   |
| 5   | 5600.00         | 7.51        | 101.93         | 109.44         | 200.00         | -90.56      | Peak     | 100         | 205           | P   |
| 6   | 11200.00        | 16.28       | 30.42          | 46.70          | 54.00          | -7.30       | Average  | 100         | 104           | P   |
| 7   | 11200.00        | 16.28       | 43.67          | 59.95          | 74.00          | -14.05      | Peak     | 100         | 104           | P   |
| 8   | 16800.00        | 20.60       | 43.95          | 64.55          | 68.20          | -3.65       | Peak     | 100         | 192           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

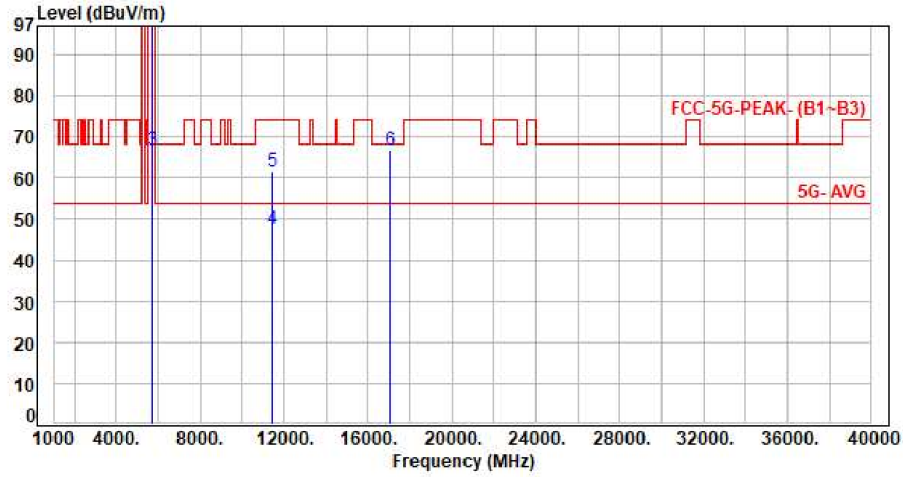


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 7.43        | 95.09          | 102.52         | 200.00         | -97.48      | Average  | 211         | 45            | P   |
| 2   | 5700.00         | 7.43        | 105.38         | 112.81         | 200.00         | -87.19      | Peak     | 211         | 45            | P   |
| 3   | 5725.00         | 7.43        | 59.38          | 66.81          | 68.20          | -1.39       | Peak     | 211         | 45            | P   |
| 4   | 11400.00        | 16.35       | 31.08          | 47.43          | 54.00          | -6.57       | Average  | 100         | 210           | P   |
| 5   | 11400.00        | 16.35       | 45.10          | 61.45          | 74.00          | -12.55      | Peak     | 100         | 210           | P   |
| 6   | 17100.00        | 21.91       | 44.89          | 66.80          | 68.20          | -1.40       | Peak     | 100         | 161           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

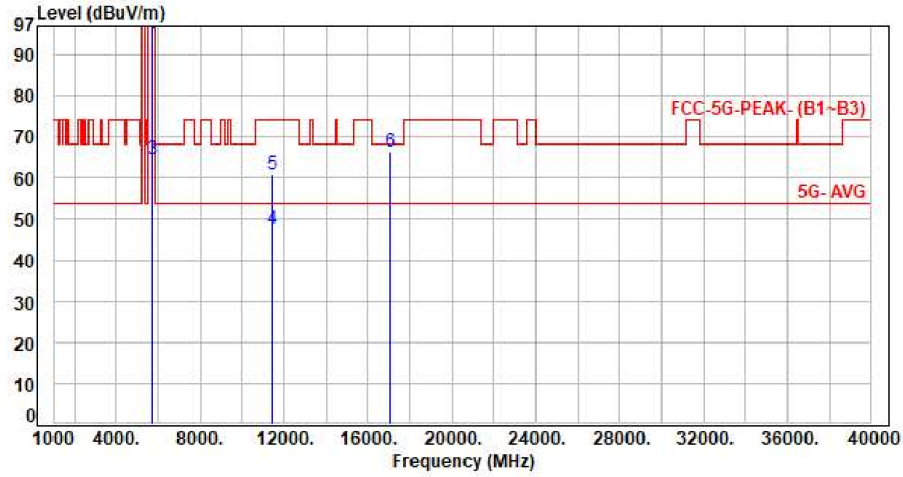


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.00         | 7.43        | 87.61          | 95.04          | 200.00         | -104.96     | Average  | 100         | 208           | P   |
| 2   | 5700.00         | 7.43        | 97.93          | 105.36         | 200.00         | -94.64      | Peak     | 100         | 208           | P   |
| 3   | 5725.00         | 7.43        | 57.10          | 64.53          | 68.20          | -3.67       | Peak     | 100         | 208           | P   |
| 4   | 11400.00        | 16.35       | 31.36          | 47.71          | 54.00          | -6.29       | Average  | 100         | 175           | P   |
| 5   | 11400.00        | 16.35       | 44.61          | 60.96          | 74.00          | -13.04      | Peak     | 100         | 175           | P   |
| 6   | 17100.00        | 21.91       | 44.55          | 66.46          | 68.20          | -1.74       | Peak     | 100         | 135           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH100 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

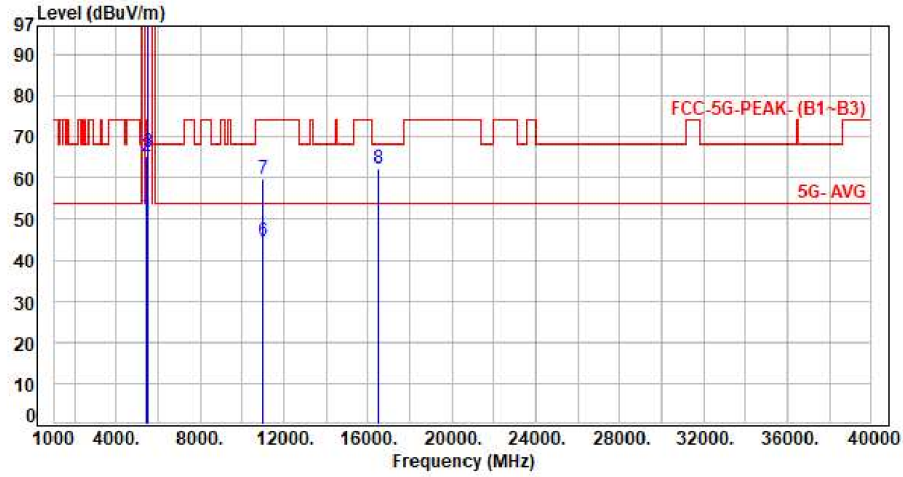


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.43          | 50.98          | 54.00          | -3.02       | Average  | 197         | 36            | P   |
| 2   | 5460.00         | 7.55        | 57.75          | 65.30          | 74.00          | -8.70       | Peak     | 197         | 36            | P   |
| 3   | 5470.00         | 7.58        | 58.98          | 66.56          | 68.20          | -1.64       | Peak     | 197         | 36            | P   |
| 4   | 5500.00         | 7.68        | 101.02         | 108.70         | 200.00         | -91.30      | Average  | 197         | 36            | P   |
| 5   | 5500.00         | 7.68        | 111.27         | 118.95         | 200.00         | -81.05      | Peak     | 197         | 36            | P   |
| 6   | 11000.00        | 16.20       | 28.57          | 44.77          | 54.00          | -9.23       | Average  | 100         | 254           | P   |
| 7   | 11000.00        | 16.20       | 43.60          | 59.80          | 74.00          | -14.20      | Peak     | 100         | 254           | P   |
| 8   | 16500.00        | 18.92       | 43.58          | 62.50          | 68.20          | -5.70       | Peak     | 100         | 85            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH100 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Horizontal

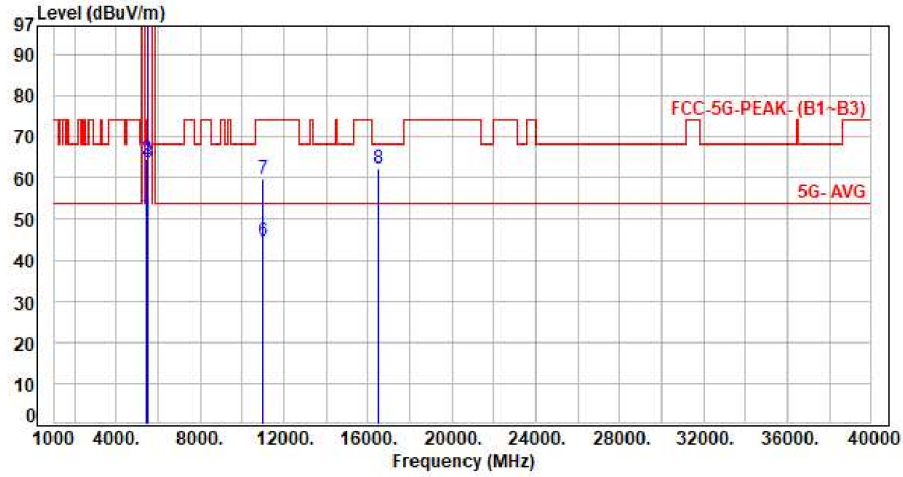


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.45          | 51.00          | 54.00          | -3.00       | Average  | 280         | 196           | P   |
| 2   | 5460.00         | 7.55        | 57.09          | 64.64          | 74.00          | -9.36       | Peak     | 280         | 196           | P   |
| 3   | 5470.00         | 7.58        | 56.32          | 63.90          | 68.20          | -4.30       | Peak     | 280         | 196           | P   |
| 4   | 5500.00         | 7.68        | 98.36          | 106.04         | 200.00         | -93.96      | Average  | 280         | 196           | P   |
| 5   | 5500.00         | 7.68        | 88.35          | 96.03          | 200.00         | -103.97     | Peak     | 280         | 196           | P   |
| 6   | 11000.00        | 16.20       | 28.36          | 44.56          | 54.00          | -9.44       | Average  | 100         | 146           | P   |
| 7   | 11000.00        | 16.20       | 43.56          | 59.76          | 74.00          | -14.24      | Peak     | 100         | 146           | P   |
| 8   | 16500.00        | 18.92       | 43.29          | 62.21          | 68.20          | -5.99       | Peak     | 100         | 223           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH120 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

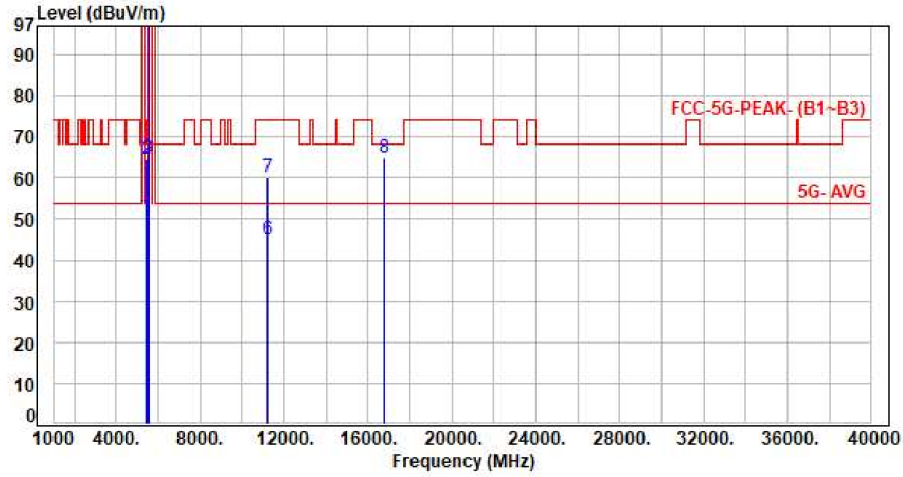


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.28          | 50.83          | 54.00          | -3.17       | Average  | 292         | 43            | P   |
| 2   | 5460.00         | 7.55        | 56.90          | 64.45          | 74.00          | -9.55       | Peak     | 292         | 43            | P   |
| 3   | 5470.00         | 7.58        | 57.45          | 65.03          | 68.20          | -3.17       | Peak     | 292         | 43            | P   |
| 4   | 5600.00         | 7.51        | 98.49          | 106.00         | 200.00         | -94.00      | Average  | 292         | 43            | P   |
| 5   | 5600.00         | 7.51        | 108.53         | 116.04         | 200.00         | -83.96      | Peak     | 292         | 43            | P   |
| 6   | 11200.00        | 16.28       | 28.66          | 44.94          | 54.00          | -9.06       | Average  | 100         | 253           | P   |
| 7   | 11200.00        | 16.28       | 43.84          | 60.12          | 74.00          | -13.88      | Peak     | 100         | 253           | P   |
| 8   | 16800.00        | 20.60       | 44.16          | 64.76          | 68.20          | -3.44       | Peak     | 100         | 86            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH120 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

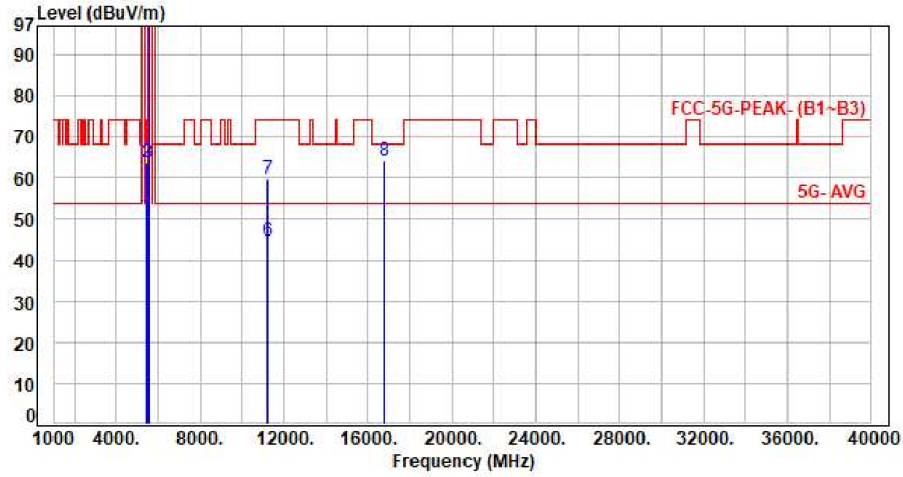

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.55        | 43.31          | 50.86          | 54.00          | -3.14       | Average  | 147         | 200           | P   |
| 2   | 5460.00         | 7.55        | 56.07          | 63.62          | 74.00          | -10.38      | Peak     | 147         | 200           | P   |
| 3   | 5470.00         | 7.58        | 56.26          | 63.84          | 68.20          | -4.36       | Peak     | 147         | 200           | P   |
| 4   | 5600.00         | 7.51        | 92.15          | 99.66          | 200.00         | -100.34     | Average  | 147         | 200           | P   |
| 5   | 5600.00         | 7.51        | 102.49         | 110.00         | 200.00         | -90.00      | Peak     | 147         | 200           | P   |
| 6   | 11200.00        | 16.28       | 28.46          | 44.74          | 54.00          | -9.26       | Average  | 100         | 144           | P   |
| 7   | 11200.00        | 16.28       | 43.35          | 59.63          | 74.00          | -14.37      | Peak     | 100         | 144           | P   |
| 8   | 16800.00        | 20.60       | 43.52          | 64.12          | 68.20          | -4.08       | Peak     | 100         | 218           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor