




Test Mode : 2TX 11ac20 CH140 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

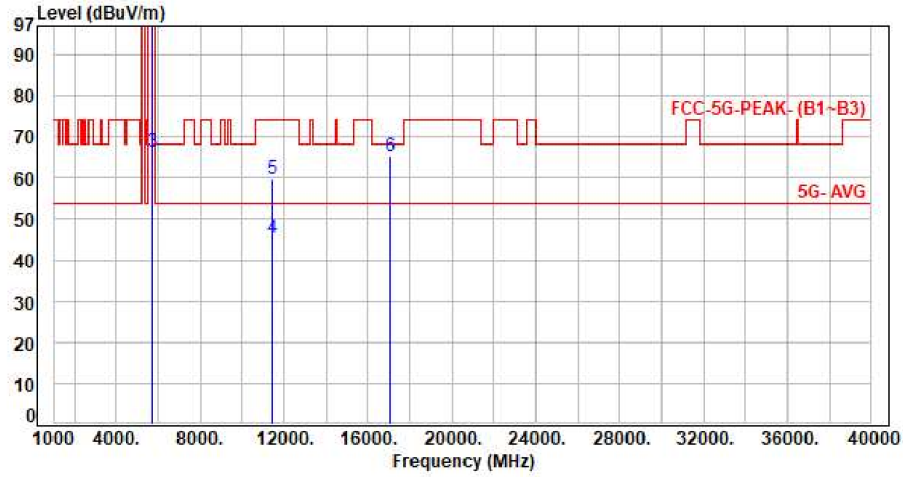


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	93.44	100.87	200.00	-99.13	Average	177	34	P
2	5700.00	7.43	104.90	112.33	200.00	-87.67	Peak	177	34	P
3	5725.00	7.43	59.02	66.45	68.20	-1.75	Peak	177	34	P
4	11400.00	16.35	28.86	45.21	54.00	-8.79	Average	100	255	P
5	11400.00	16.35	43.46	59.81	74.00	-14.19	Peak	100	255	P
6	17100.00	21.91	43.52	65.43	68.20	-2.77	Peak	100	82	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac20 CH140 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

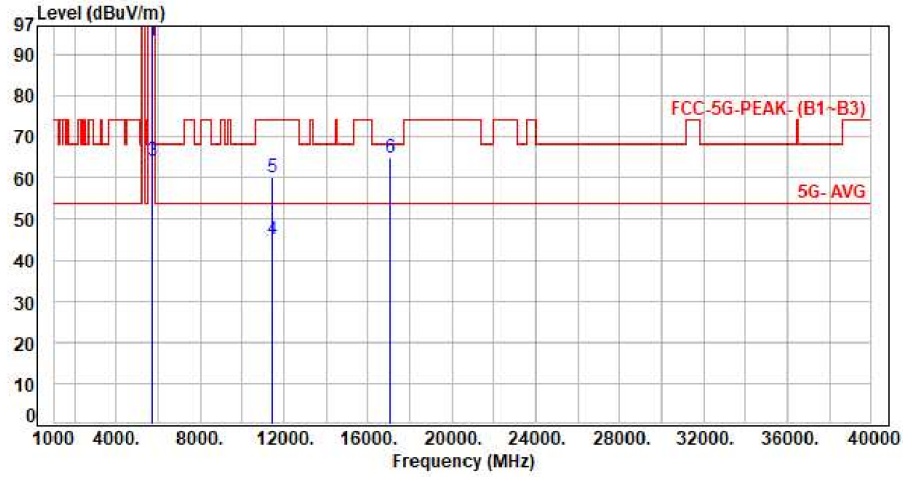


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	85.88	93.31	200.00	-106.69	Average	119	209	P
2	5700.00	7.43	96.84	104.27	200.00	-95.73	Peak	119	209	P
3	5725.00	7.43	56.91	64.34	68.20	-3.86	Peak	119	209	P
4	11400.00	16.35	28.58	44.93	54.00	-9.07	Average	100	142	P
5	11400.00	16.35	43.79	60.14	74.00	-13.86	Peak	100	142	P
6	17100.00	21.91	43.14	65.05	68.20	-3.15	Peak	100	226	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

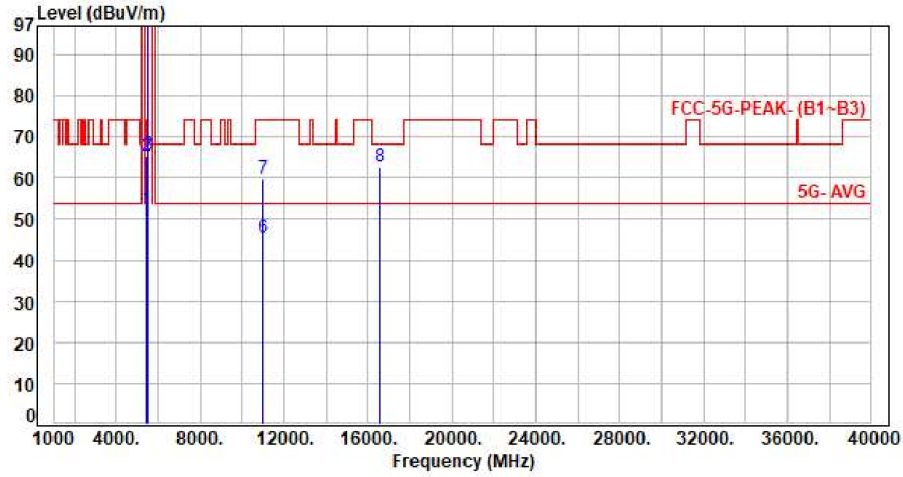


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.89	52.44	54.00	-1.56	Average	233	32	P
2	5460.00	7.55	57.70	65.25	74.00	-8.75	Peak	233	32	P
3	5470.00	7.58	57.95	65.53	68.20	-2.67	Peak	233	32	P
4	5510.00	7.66	88.65	96.31	200.00	-103.69	Average	233	32	P
5	5510.00	7.66	97.86	105.52	200.00	-94.48	Peak	233	32	P
6	11020.00	16.20	29.34	45.54	54.00	-8.46	Average	100	259	P
7	11020.00	16.20	43.58	59.78	74.00	-14.22	Peak	100	259	P
8	16530.00	19.08	43.76	62.84	68.20	-5.36	Peak	100	88	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH102 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

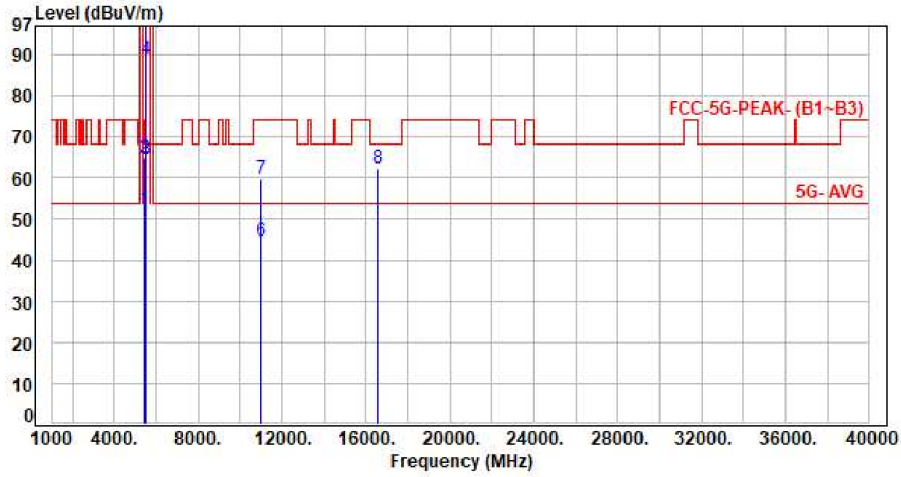


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.68	52.23	54.00	-1.77	Average	112	177	P
2	5460.00	7.55	57.21	64.76	74.00	-9.24	Peak	112	177	P
3	5470.00	7.58	57.14	64.72	68.20	-3.48	Peak	112	177	P
4	5510.00	7.66	81.13	88.79	200.00	-111.21	Average	112	177	P
5	5510.00	7.66	90.15	97.81	200.00	-102.19	Peak	112	177	P
6	11020.00	16.20	28.39	44.59	54.00	-9.41	Average	100	142	P
7	11020.00	16.20	43.66	59.86	74.00	-14.14	Peak	100	142	P
8	16530.00	19.08	43.28	62.36	68.20	-5.84	Peak	100	220	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

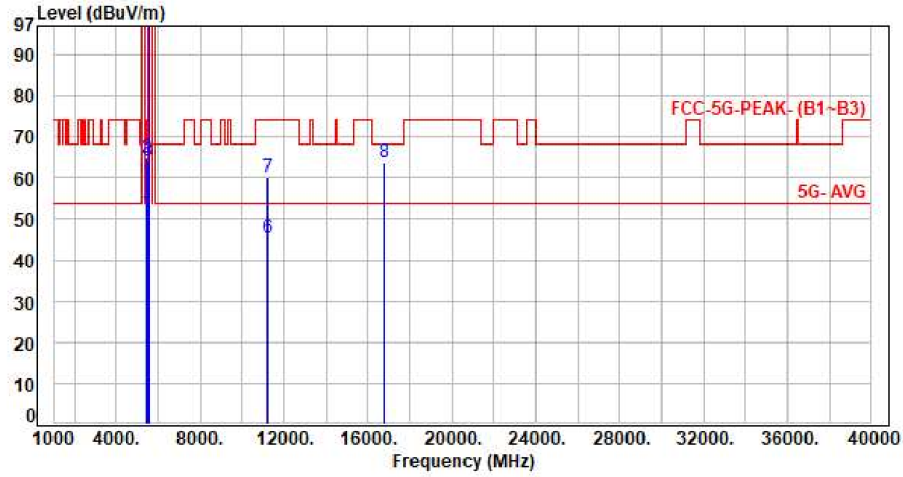


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.00	51.55	54.00	-2.45	Average	238	32	P
2	5460.00	7.55	57.24	64.79	74.00	-9.21	Peak	238	32	P
3	5470.00	7.58	56.42	64.00	68.20	-4.20	Peak	238	32	P
4	5590.00	7.53	95.83	103.36	200.00	-96.64	Average	238	32	P
5	5590.00	7.53	105.32	112.85	200.00	-87.15	Peak	238	32	P
6	11180.00	16.24	29.28	45.52	54.00	-8.48	Average	100	258	P
7	11180.00	16.24	43.72	59.96	74.00	-14.04	Peak	100	258	P
8	16770.00	20.39	43.40	63.79	68.20	-4.41	Peak	100	85	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH118 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

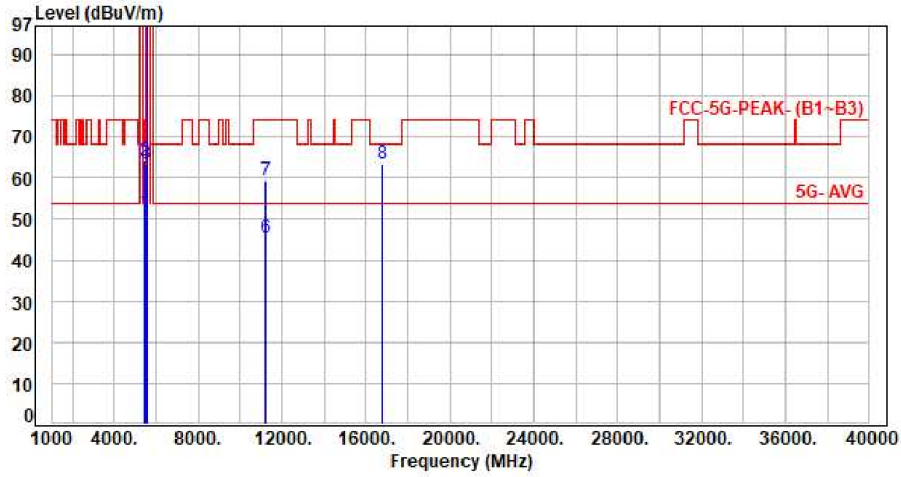


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.90	51.45	54.00	-2.55	Average	153	203	P
2	5460.00	7.55	56.69	64.24	74.00	-9.76	Peak	153	203	P
3	5470.00	7.58	55.95	63.53	68.20	-4.67	Peak	153	203	P
4	5590.00	7.53	88.85	96.38	200.00	-103.62	Average	153	203	P
5	5590.00	7.53	98.91	106.44	200.00	-93.56	Peak	153	203	P
6	11180.00	16.24	29.31	45.55	54.00	-8.45	Average	100	144	P
7	11180.00	16.24	43.18	59.42	74.00	-14.58	Peak	100	144	P
8	16770.00	20.39	43.01	63.40	68.20	-4.80	Peak	100	223	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

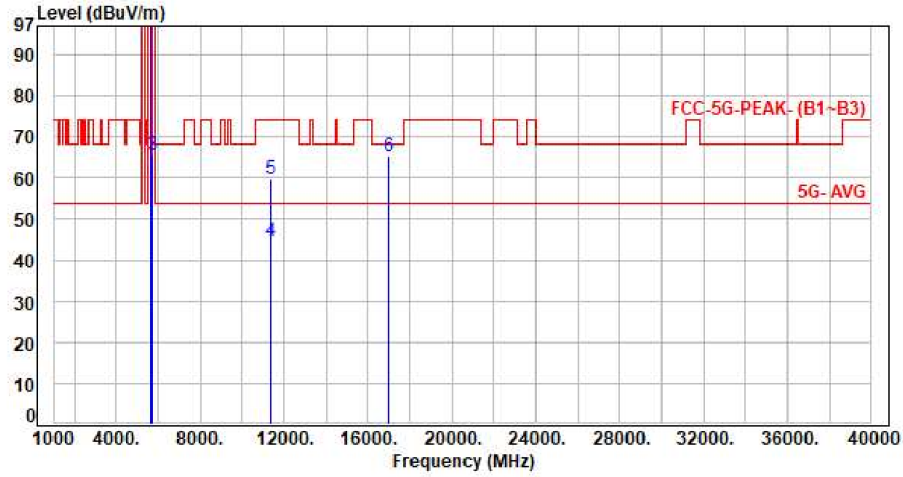


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	91.19	98.67	200.00	-101.33	Average	240	30	P
2	5670.00	7.48	100.33	107.81	200.00	-92.19	Peak	240	30	P
3	5725.00	7.43	58.32	65.75	68.20	-2.45	Peak	240	30	P
4	11340.00	16.33	28.48	44.81	54.00	-9.19	Average	100	252	P
5	11340.00	16.33	43.53	59.86	74.00	-14.14	Peak	100	252	P
6	17010.00	21.67	43.79	65.46	68.20	-2.74	Peak	100	86	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac40 CH134 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

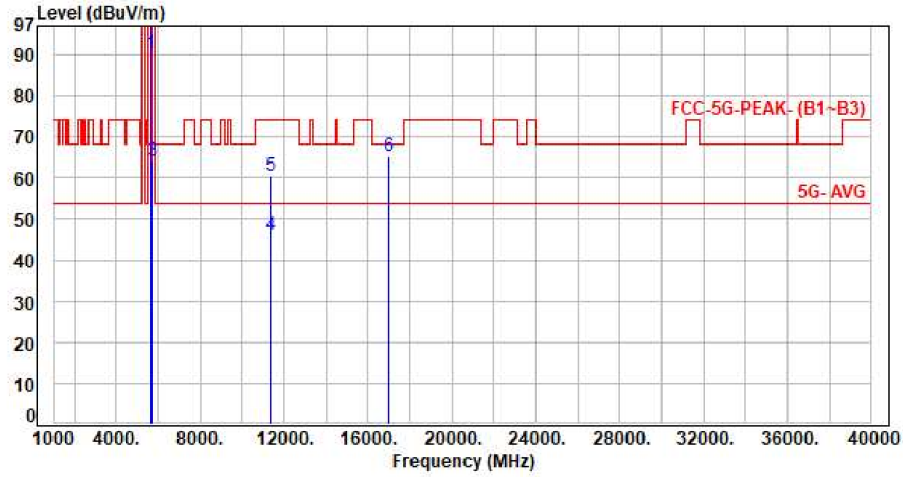


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	83.01	90.49	200.00	-109.51	Average	100	209	P
2	5670.00	7.48	92.91	100.39	200.00	-99.61	Peak	100	209	P
3	5725.00	7.43	56.57	64.00	68.20	-4.20	Peak	100	209	P
4	11340.00	16.33	29.71	46.04	54.00	-7.96	Average	100	141	P
5	11340.00	16.33	44.21	60.54	74.00	-13.46	Peak	100	141	P
6	17010.00	21.67	43.73	65.40	68.20	-2.80	Peak	100	223	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor





Test Mode : 2TX 11ac80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

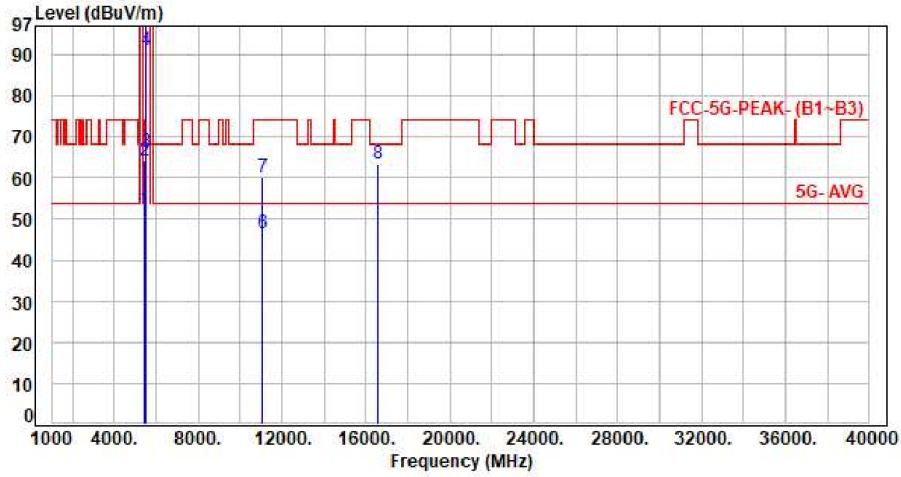


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.93	52.48	54.00	-1.52	Average	196	36	P
2	5460.00	7.55	56.76	64.31	74.00	-9.69	Peak	196	36	P
3	5470.00	7.58	58.78	66.36	68.20	-1.84	Peak	196	36	P
4	5530.00	7.63	83.40	91.03	200.00	-108.97	Average	196	36	P
5	5530.00	7.63	92.99	100.62	200.00	-99.38	Peak	196	36	P
6	11060.00	16.21	30.27	46.48	54.00	-7.52	Average	100	254	P
7	11060.00	16.21	43.79	60.00	74.00	-14.00	Peak	100	254	P
8	16590.00	19.48	43.82	63.30	68.20	-4.90	Peak	100	88	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

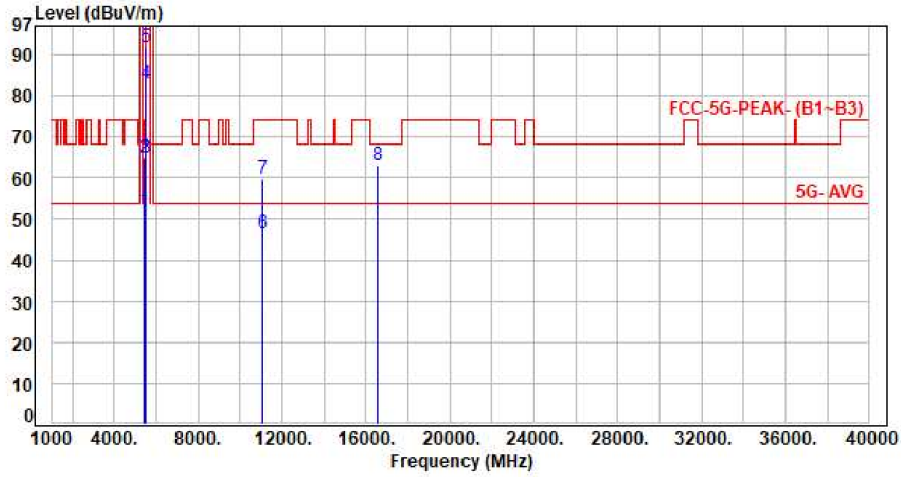


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.40	51.95	54.00	-2.05	Average	148	200	P
2	5460.00	7.55	57.28	64.83	74.00	-9.17	Peak	148	200	P
3	5470.00	7.58	57.49	65.07	68.20	-3.13	Peak	148	200	P
4	5530.00	7.63	75.22	82.85	200.00	-117.15	Average	148	200	P
5	5530.00	7.63	84.28	91.91	200.00	-108.09	Peak	148	200	P
6	11060.00	16.21	30.17	46.38	54.00	-7.62	Average	100	147	P
7	11060.00	16.21	43.59	59.80	74.00	-14.20	Peak	100	147	P
8	16590.00	19.48	43.64	63.12	68.20	-5.08	Peak	100	218	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

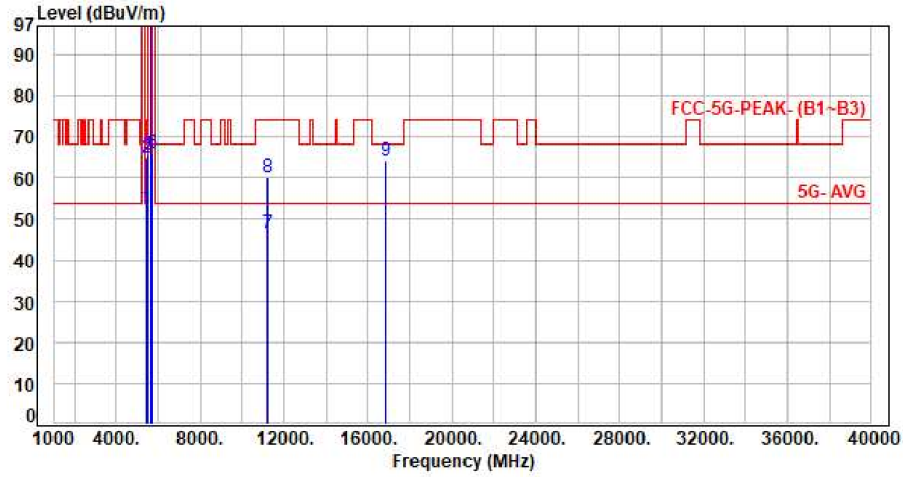


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.10	52.65	54.00	-1.35	Average	211	33	P
2	5460.00	7.55	57.49	65.04	74.00	-8.96	Peak	211	33	P
3	5470.00	7.58	58.19	65.77	68.20	-2.43	Peak	211	33	P
4	5610.00	7.51	92.34	99.85	200.00	-100.15	Average	211	33	P
5	5610.00	7.51	101.79	109.30	200.00	-90.70	Peak	211	33	P
6	5725.00	7.43	58.63	66.06	68.20	-2.14	Peak	211	33	P
7	11220.00	16.28	30.18	46.46	54.00	-7.54	Average	100	254	P
8	11220.00	16.28	43.84	60.12	74.00	-13.88	Peak	100	254	P
9	16830.00	20.70	43.53	64.23	68.20	-3.97	Peak	100	83	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ac80 CH122 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

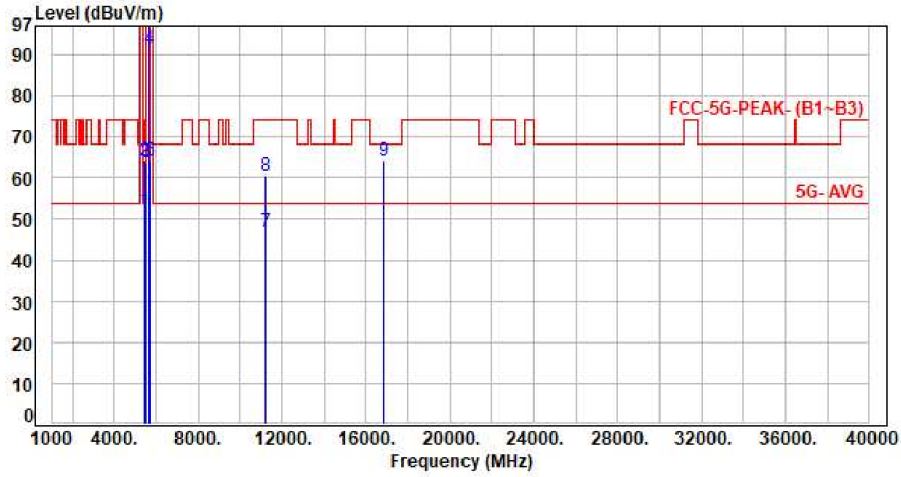


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.35	51.90	54.00	-2.10	Average	124	180	P
2	5460.00	7.55	56.63	64.18	74.00	-9.82	Peak	124	180	P
3	5470.00	7.58	56.21	63.79	68.20	-4.41	Peak	124	180	P
4	5610.00	7.51	84.02	91.53	200.00	-108.47	Average	124	180	P
5	5610.00	7.51	93.23	100.74	200.00	-99.26	Peak	124	180	P
6	5725.00	7.43	56.69	64.12	68.20	-4.08	Peak	124	180	P
7	11220.00	16.28	30.38	46.66	54.00	-7.34	Average	100	148	P
8	11220.00	16.28	44.27	60.55	74.00	-13.45	Peak	100	148	P
9	16830.00	20.70	43.52	64.22	68.20	-3.98	Peak	100	225	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

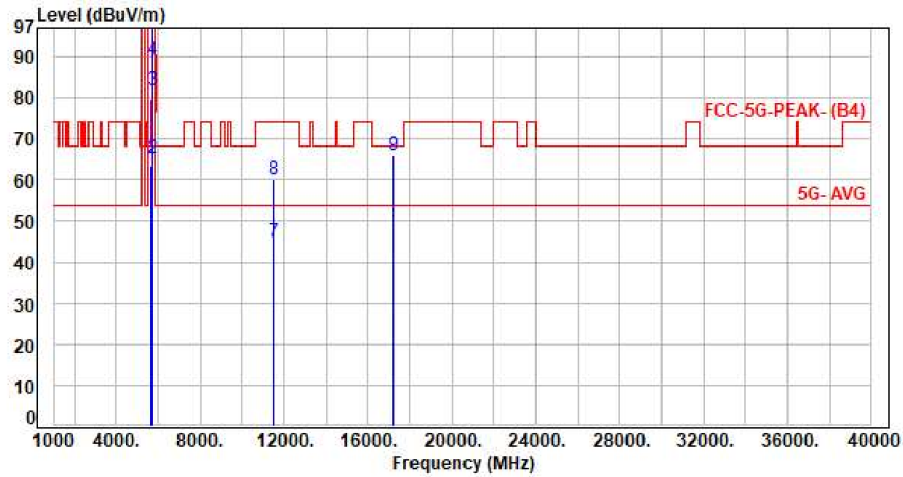


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.04	63.55	68.20	-4.65	Peak	262	37	P
2	5700.00	7.43	57.70	65.13	105.20	-40.07	Peak	262	37	P
3	5720.00	7.43	74.30	81.73	110.80	-29.07	Peak	262	37	P
4	5725.00	7.43	81.97	89.40	122.20	-32.80	Peak	262	37	P
5	5745.00	7.44	98.14	105.58	200.00	-94.42	Average	262	37	P
6	5745.00	7.44	109.05	116.49	200.00	-83.51	Peak	262	37	P
7	11490.00	16.52	28.39	44.91	54.00	-9.09	Average	100	254	P
8	11490.00	16.52	43.55	60.07	74.00	-13.93	Peak	100	254	P
9	17235.00	22.43	43.48	65.91	68.20	-2.29	Peak	100	88	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

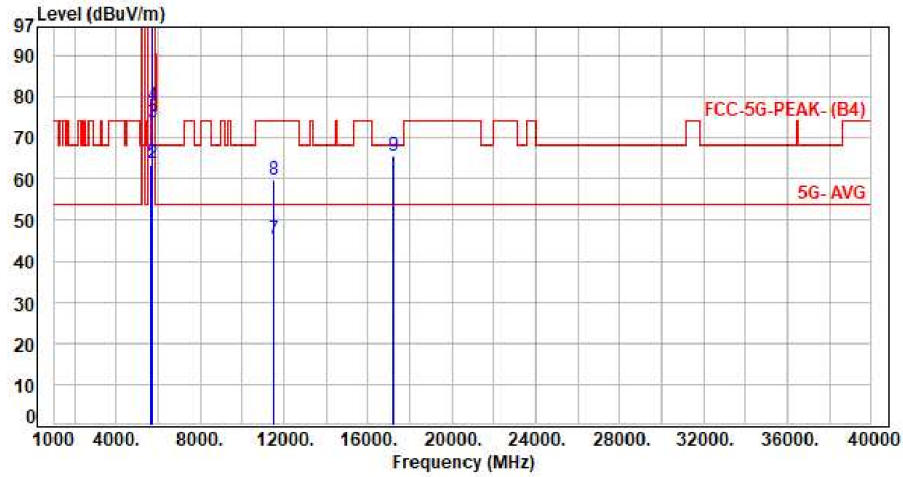


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.84	63.35	68.20	-4.85	Peak	100	209	P
2	5700.00	7.43	56.34	63.77	105.20	-41.43	Peak	100	209	P
3	5720.00	7.43	66.27	73.70	110.80	-37.10	Peak	100	209	P
4	5725.00	7.43	70.21	77.64	122.20	-44.56	Peak	100	209	P
5	5745.00	7.44	89.90	97.34	200.00	-102.66	Average	100	209	P
6	5745.00	7.44	100.61	108.05	200.00	-91.95	Peak	100	209	P
7	11490.00	16.52	28.72	45.24	54.00	-8.76	Average	100	147	P
8	11490.00	16.52	43.40	59.92	74.00	-14.08	Peak	100	147	P
9	17235.00	22.43	43.25	65.68	68.20	-2.52	Peak	100	227	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

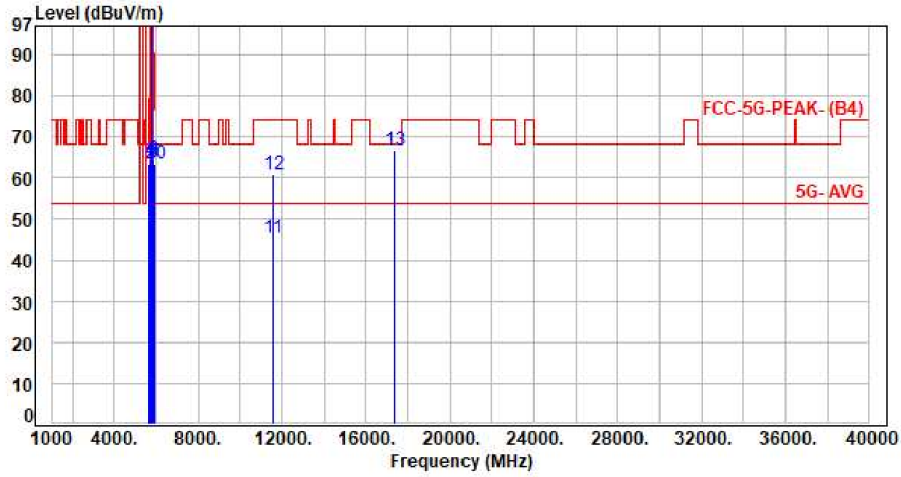


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.78	63.29	68.20	-4.91	Peak	232	39	P
2	5700.00	7.43	55.86	63.29	105.20	-41.91	Peak	232	39	P
3	5720.00	7.43	56.16	63.59	110.80	-47.21	Peak	232	39	P
4	5725.00	7.43	56.57	64.00	122.20	-58.20	Peak	232	39	P
5	5785.00	7.45	98.91	106.36	200.00	-93.64	Average	232	39	P
6	5785.00	7.45	110.11	117.56	200.00	-82.44	Peak	232	39	P
7	5850.00	7.47	56.44	63.91	122.20	-58.29	Peak	232	39	P
8	5855.00	7.49	56.25	63.74	110.80	-47.06	Peak	232	39	P
9	5875.00	7.57	56.88	64.45	105.20	-40.75	Peak	232	39	P
10	5925.00	7.73	55.67	63.40	68.20	-4.80	Peak	232	39	P
11	11570.00	16.76	28.59	45.35	54.00	-8.65	Average	100	254	P
12	11570.00	16.76	44.25	61.01	74.00	-12.99	Peak	100	254	P
13	17355.00	23.20	43.39	66.59	68.20	-1.61	Peak	100	85	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

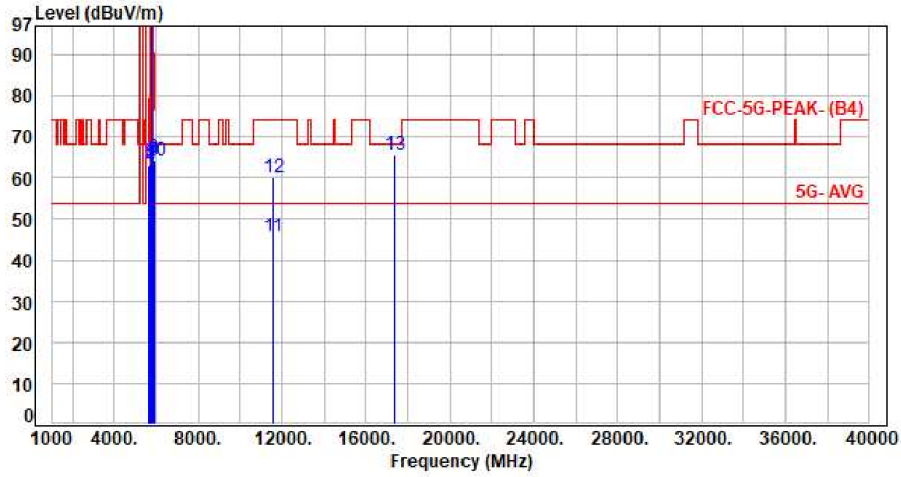

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.63	63.14	68.20	-5.06	Peak	216	212	P
2	5700.00	7.43	56.18	63.61	105.20	-41.59	Peak	216	212	P
3	5720.00	7.43	55.90	63.33	110.80	-47.47	Peak	216	212	P
4	5725.00	7.43	56.01	63.44	122.20	-58.76	Peak	216	212	P
5	5785.00	7.45	90.68	98.13	200.00	-101.87	Average	216	212	P
6	5785.00	7.45	101.27	108.72	200.00	-91.28	Peak	216	212	P
7	5850.00	7.47	56.55	64.02	122.20	-58.18	Peak	216	212	P
8	5855.00	7.49	57.54	65.03	110.80	-45.77	Peak	216	212	P
9	5875.00	7.57	56.51	64.08	105.20	-41.12	Peak	216	212	P
10	5925.00	7.73	56.30	64.03	68.20	-4.17	Peak	216	212	P
11	11570.00	16.76	28.85	45.61	54.00	-8.39	Average	100	144	P
12	11570.00	16.76	43.49	60.25	74.00	-13.75	Peak	100	144	P
13	17355.00	23.20	42.29	65.49	68.20	-2.71	Peak	100	224	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor