



FCC 47 CFR PART 15 Subpart C

TEST REPORT

For

2 way RF Docking Station

Model Number: DSS1005/01; IPX9200

Trade Name: Philips

Issued to

**Philips Electronics Singapore Pte. Ltd.
BU Peripheral & Accessories - LoB Home Control, 620A Lorong 1,
Toa Payoh, TP1 Building, Level 2, Singapore 319762**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED	8
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 15.249 REQUIREMENTS	13
7.1 BAND EDGES MEASUREMENT	13
7.2 SPURIOUS EMISSION	19
7.3 POWERLINE CONDUCTED EMISSIONS	33
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	36



1. TEST RESULT CERTIFICATION

Applicant: Philips Electronics Singapore Pte. Ltd.
BU Peripheral & Accessories - LoB Home Control, 620A Lorong 1,
Toa Payoh, TP1 Building, Level 2, Singapore 319762

Equipment Under Test: 2 way RF Docking Station

Trade Name: Philips

Model Number: DSS1005/01; IPX9200

Date of Test: September 5 ~ 25, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.107, 15.109, 15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Robert Huang
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Julia Wei
Senior Specialist
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	2 way RF Docking Station		
Trade Name	Philips		
Model Number	DSS1005/01; IPX9200		
Model Discrepancy	<p>1. All the model numbers are identical just for marketing purpose only.</p> <p>2. The EUT have two types for sale:</p> <ul style="list-style-type: none">● Type 1 with Blue LED and type 2 with White LED.● Type 2 use different software and additional of one resistor which act as a jumper to switch the software.		
EUT Power Rating	12VDC		
Power Adapter Manufacturer	Airline	Model	EUDF+15120-1250
Power Adapter Power Rating	I/P: 100-240VAC, 50/60Hz, 0.5A O/P: 12VDC, 1.25A		
Frequency Range	2400 ~ 2483.5MHz		
Field Strength	94.23dBuV/m (Max)		
Modulation Technique	DSSS		
Number of Channels	4Channels: 2405, 2425, 2455, 2475MHz		
Antenna Gain	-1.0dBi		
Antenna Designation	PCB Antenna		

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This test report is intended for FCC ID: RCSDSS1005 to comply with Section 15.107 & 15.109 (FCC Part 15, Subpart B) and Section 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT type 1 and type 2 were verified and Type 1 was reported as the worst case.

DSS1005/01 had been tested under operating condition except radiated spurious emission below 1GHz and powerline conducted emission below 30MHz, which were in normal link mode only.

Channel Low (2405MHz), Channel Mid (2425MHz) and Channel High (2475MHz) were chosen for the final testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSP30	100112	10/14/2008
Spectrum Analyzer	R&S	FSEB	825829/011	10/11/2008
Pre-Amplifier	Anritsu	MH648A	M89145	07/25/2009
Pre-Amplifier	Agilent	8449B	3008A01738	03/28/2009
Bilog Antenna	FRANKONIA	BTA-M	030003M	N.C.R
Horn Antenna	EMCO	3115	00022257	12/16/2008
Antenna Tower	HD	AS620E	N/A	N.C.R
Controller	HD	HD100	N/A	N.C.R
Turn Table	HD	DT-K312	N/A	N.C.R
Test S/W	LabVIEW 6.1 (Wugu Chamber EMI Teat V1_4.5.3)			

Remark: The measurement uncertainty is less than $\pm 2.0065\text{dB}$ (30MHz ~ 1GHz), $\pm 3.0958\text{dB}$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilnet	E4411B	MY41440314	N.C.R
Spectrum Analyzer	R&S	FSP30	100112	10/14/2008
EMI Test Receiver	R&S	ESVS30	828488/004	03/20/2009
Pre-Amplifier	Mini-Circuits	ZKL-2R5	83153007374	04/02/2009
Pre-Amplifier	Agilent	8449B	3008A01738	03/28/2009
Bilog Antenna	Sunol Sciences	JB1	A031905	10/03/2009
Horn Antenna	EMCO	3115	00022250	05/08/2009
Loop Antenna	EMCO	6502	2356	05/28/2010
Turn Table	Chance Most	CM-T003-1	T807-6	N.C.R
Antenna Tower	Chance Most	CM-A003-1	A807-6	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	CCS	N/A	N/A	05/09/2009
Test S/W	LabVIEW 6.1 (CCS OATS EMI SW V2.6)			

Remark: The measurement uncertainty is less than +/- 4.0235dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Conducted Emission Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	845552/030	04/08/2009
LISN	R&S	ENV216	100074	12/03/2008
LISN	FCC	FCC-LISN-50/ 250-16-2-07	06013	10/16/2008
Test S/W	LabVIEW 6.1 (CCS Conduction Test SW Version_01)			

Remark: The measurement uncertainty is less than +/- 1.7806dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☐ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.





All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

The test facilities used to perform Electromagnetic compatibility tests are registered or accredited by the organizations listed in the following table which includes the recognized scope specifically.

This accredited organization maintains A2LA accreditation to ISO/IEC 17025 for the specific test listed in A2LA Certificate # 0824-01.

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 ACCREDITED No. 0824-01
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2541/2316/725/1868 C-402/747/912
Taiwan	TAF	EN 300 328-1, EN 300 328-2, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 2324C-3, IC 2324C-5) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	Canada IC 2324C-3 IC 2324C-5 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

For Conducted and Radiated Measurement

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

****No any support equipment during the test.**

For Powerline Measurement

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	IPOD	Apple	A1136	9C70965YV9K	FCC DoC	N/A	Unshielded, 1.8m
2.	Earphone (For IPOD)	Apple	N/A	N/A	FCC DoC	Unshielded, 1.8m	N/A
3.	LCD Monitor	SHARP	LC-13B2UA	210424897	FCC DoC	N/A	Unshielded, 1.8m
4.	LCD Monitor	DELL	2408WFB	CN-0NN792-74261-849 -15GS	FCC DoC	N/A	Unshielded, 1.8m

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. FCC PART 15.249 REQUIREMENTS

7.1 BAND EDGES MEASUREMENT


LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

TEST CONFIGURATION

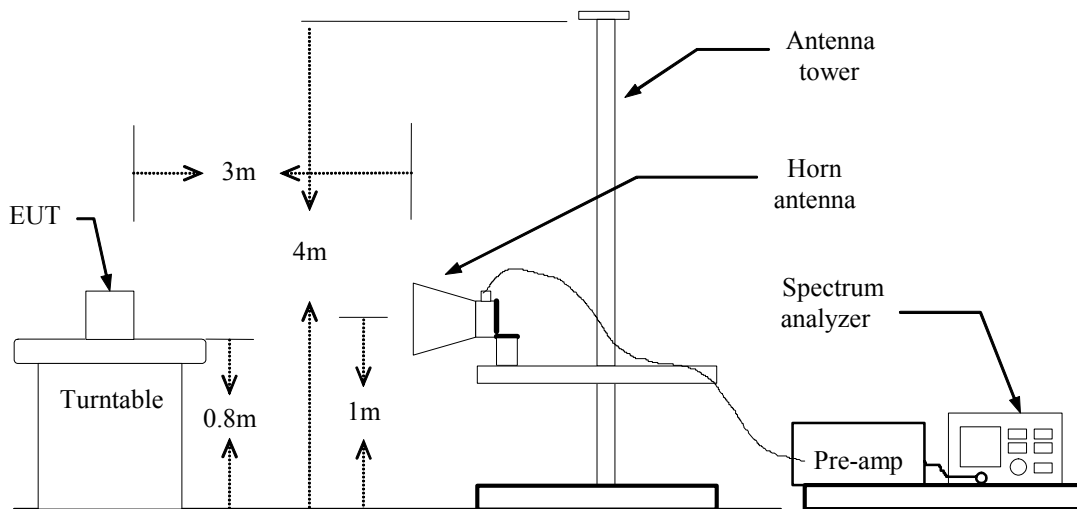

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.




TEST RESULTS

Band Edges (CH Low)

Detector mode: Peak


Polarity: Vertical

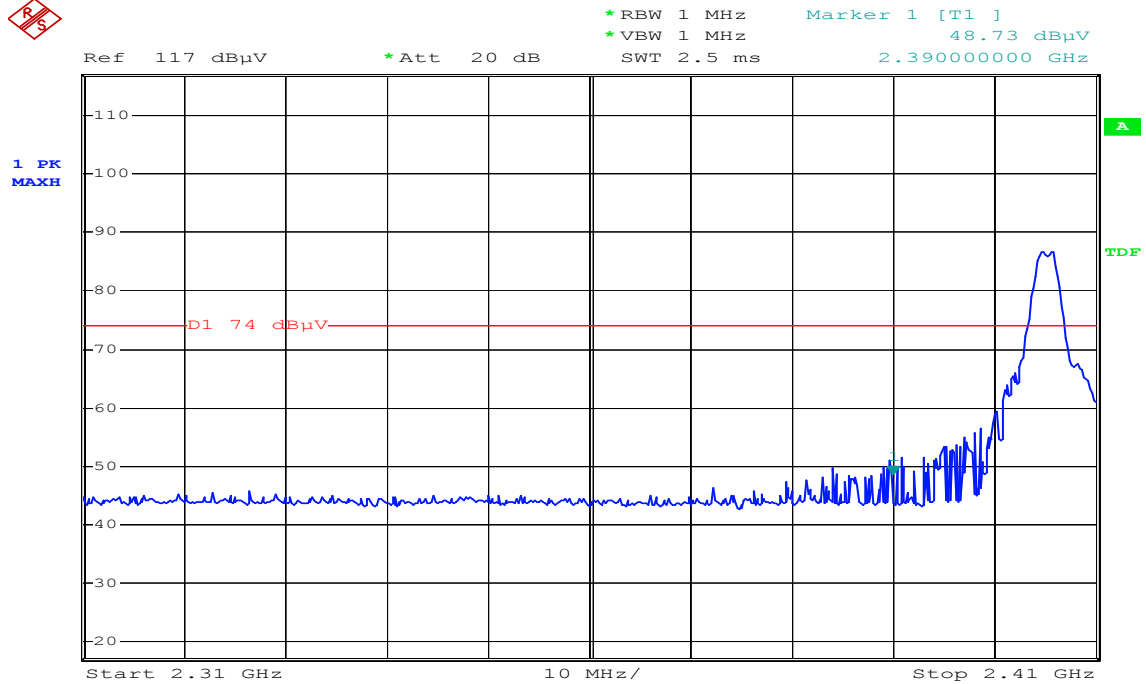

Date: 10.SEP.2008 09:17:09

Detector mode: Average

Polarity: Vertical

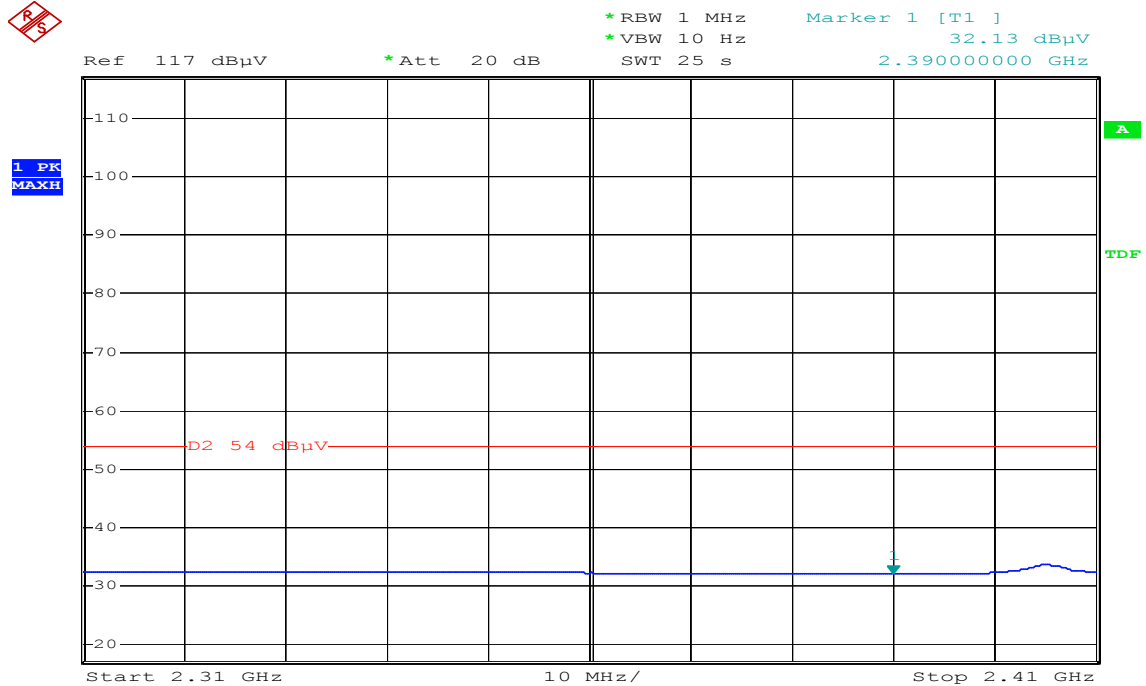


Date: 10.SEP.2008 09:21:22



Detector mode: Peak


Polarity: Horizontal

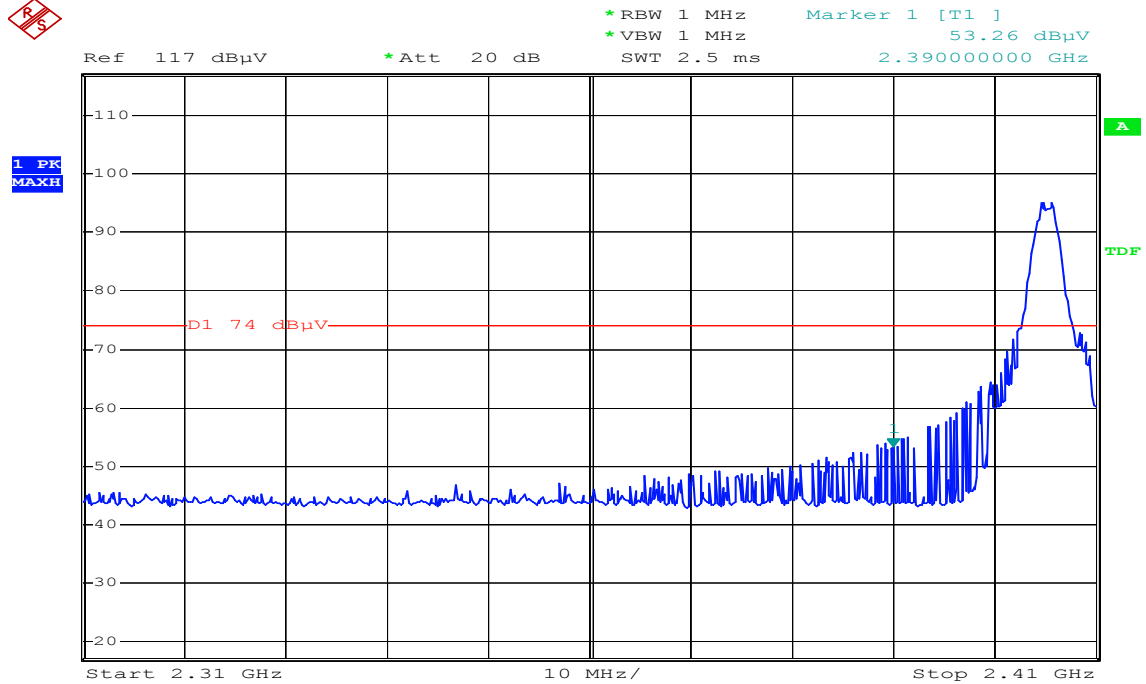

Date: 10.SEP.2008 09:25:39

Detector mode: Average

Polarity: Horizontal

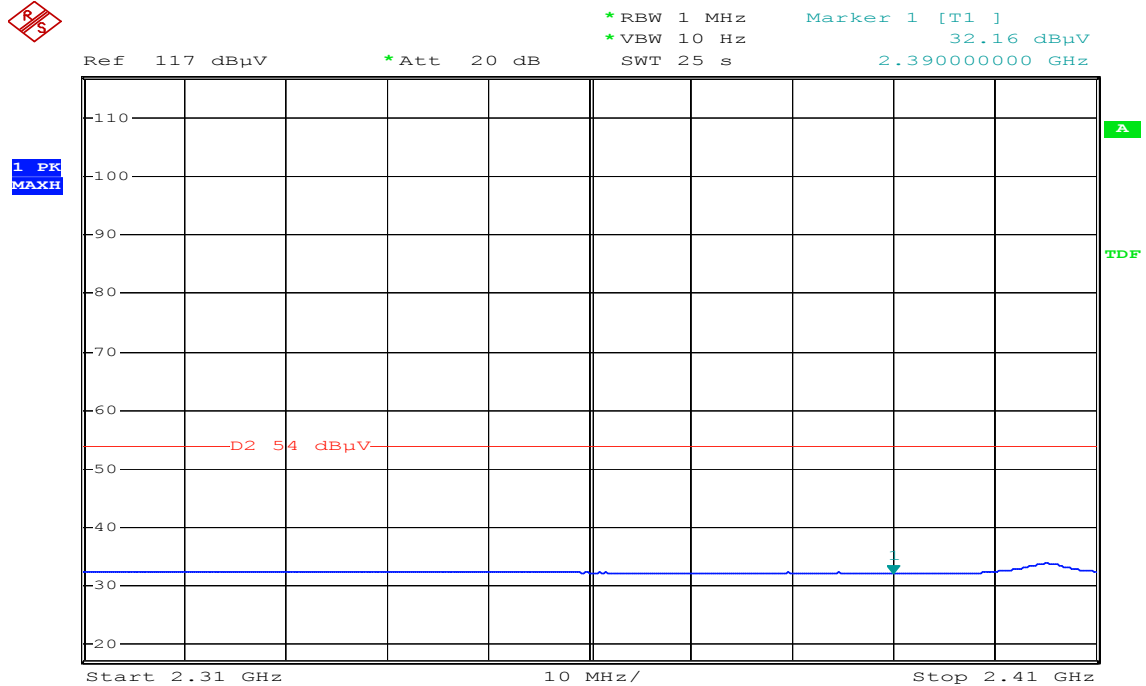


Date: 10.SEP.2008 09:27:41



Band Edges (CH High)

Detector mode: Peak


Polarity: Vertical

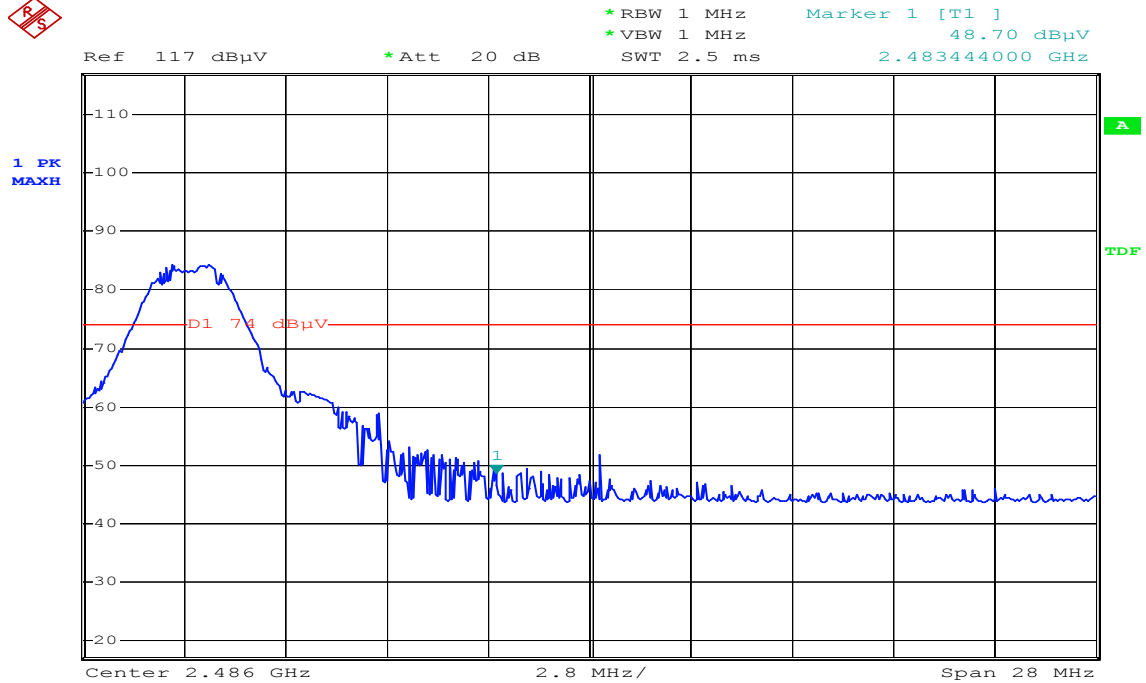

Date: 10.SEP.2008 10:00:39

Detector mode: Average

Polarity: Vertical

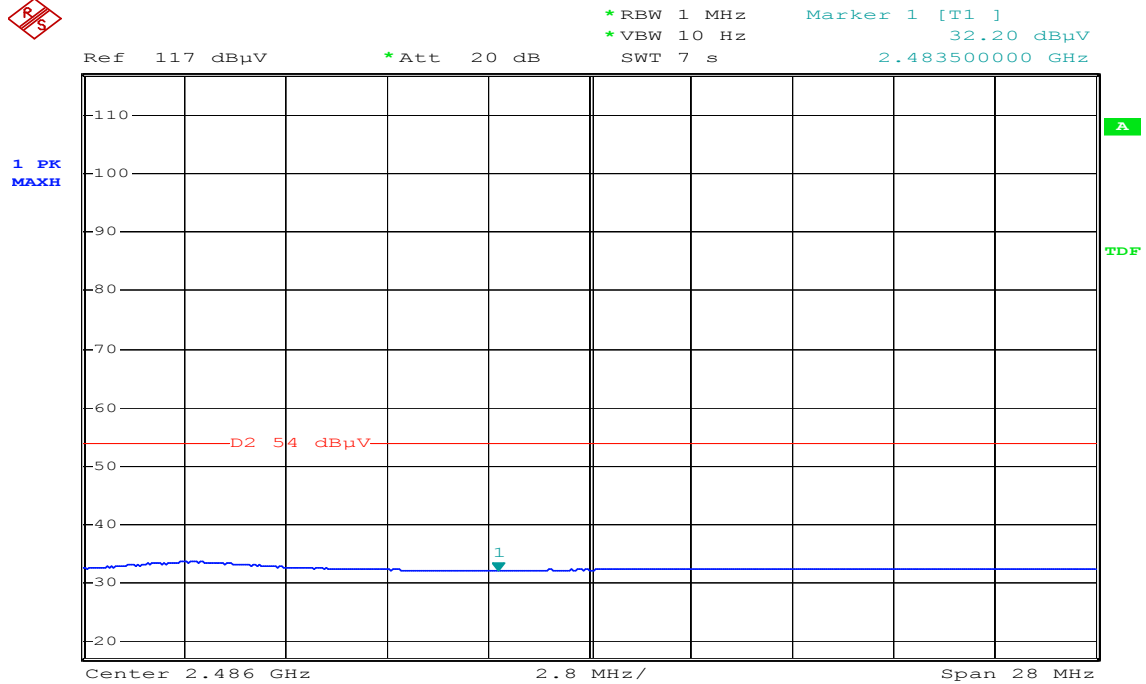


Date: 10.SEP.2008 10:01:55



Detector mode: Peak


Polarity: Horizontal

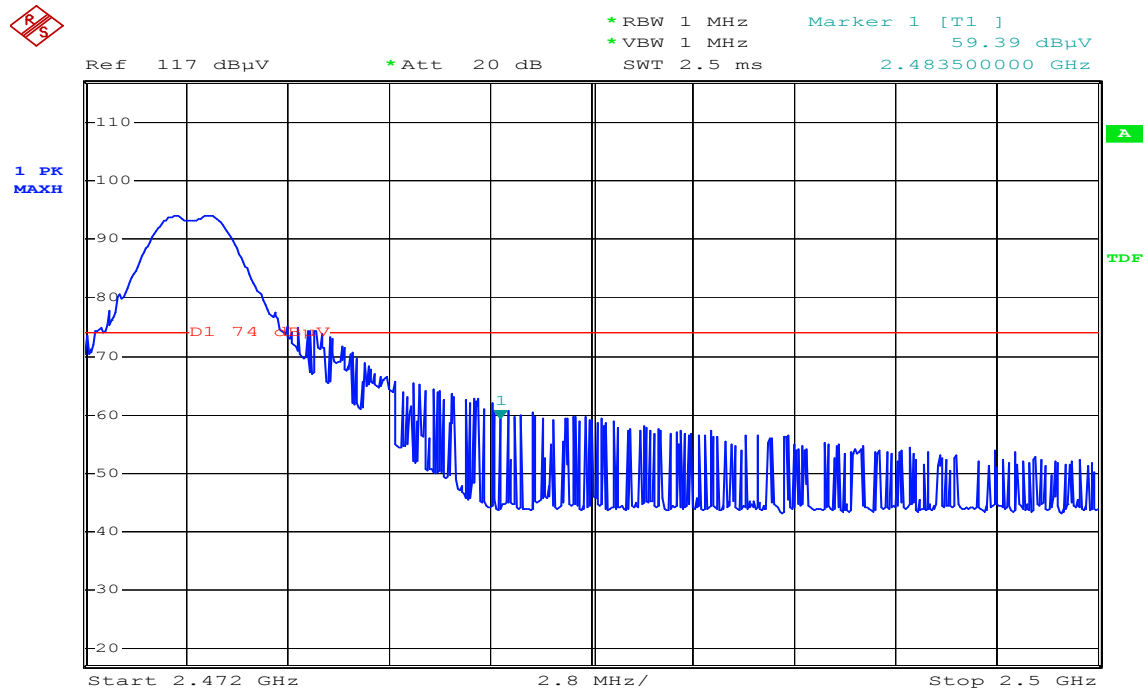

Date: 10.SEP.2008 09:53:59

Detector mode: Average

Polarity: Horizontal

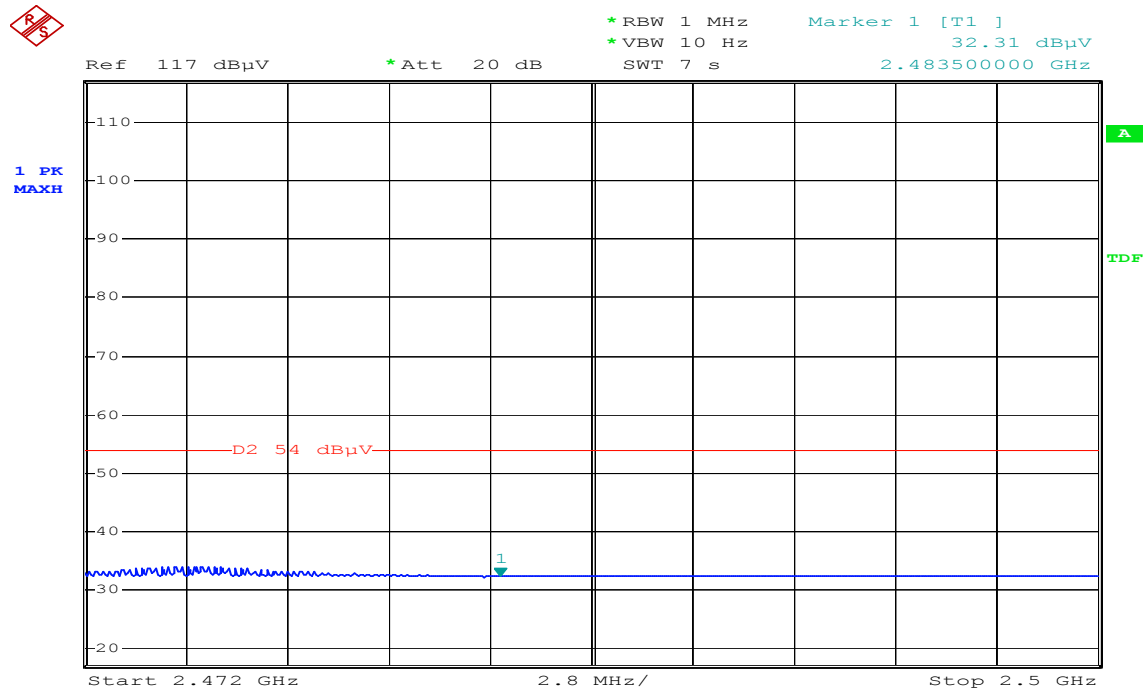

Date: 10.SEP.2008 09:54:39



7.2 SPURIOUS EMISSION

LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (µV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

TEST CONFIGURATION

Below 1 GHz

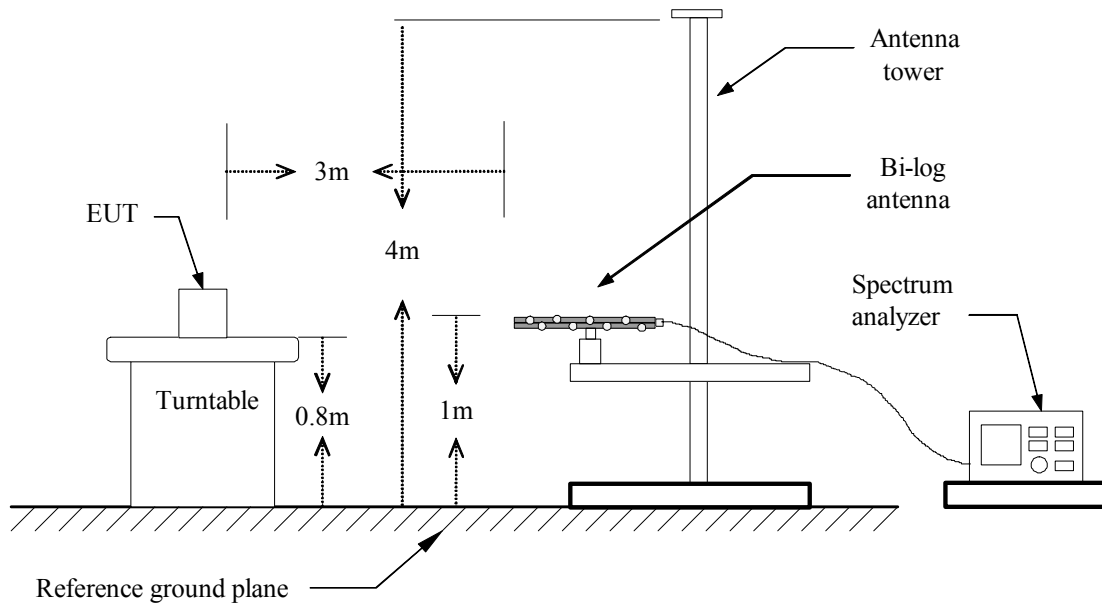

Above 1 GHz

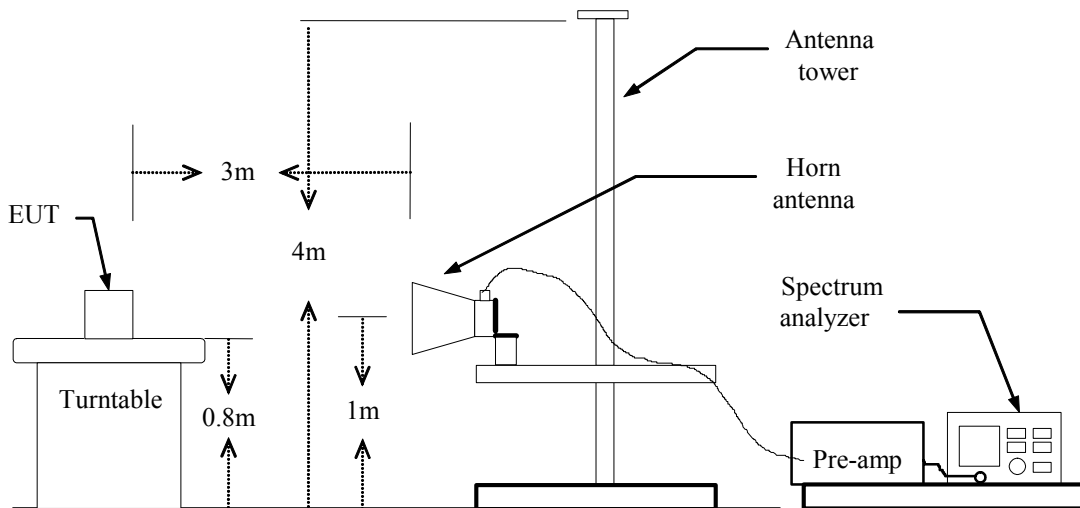



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link**Test Date:** Sep. 25, 2008**Temperature:** 22°C**Tested by:** Alonso Lu**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
51.30	V	11.40	14.01	25.41	40.00	-14.59	Q.P.
167.80	V	18.42	10.71	29.13	43.50	-14.37	Q.P.
214.30	V	13.44	12.93	26.37	43.50	-17.13	Q.P.
249.20	V	19.74	14.15	33.89	46.00	-12.11	Q.P.
518.90	V	13.76	20.26	34.02	46.00	-11.98	Q.P.
821.50	V	10.64	24.50	35.14	46.00	-10.86	Q.P.
158.10	H	20.38	10.22	30.60	43.50	-12.90	Q.P.
220.10	H	18.57	13.16	31.73	46.00	-14.27	Q.P.
328.80	H	17.64	16.22	33.86	46.00	-12.14	Q.P.
431.60	H	16.46	18.33	34.79	46.00	-11.21	Q.P.
546.00	H	13.52	20.86	34.38	46.00	-11.62	Q.P.
674.10	H	10.42	22.51	32.93	46.00	-13.07	Q.P.

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz.*
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.*
- 3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.*

**Above 1 GHz****Operation Mode:** Tx / CH Low**Test Date:** Sep. 10, 2008**Temperature:** 22°C**Tested by:** Alonso Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2405.00	V	89.14	37.90	-4.62	84.52	33.28	113.97	93.97	-29.45	Peak
4850.00	V	43.70	---	1.96	45.66	---	74.00	54.00	-8.34	Peak
N/A										
2405.00	H	98.23	37.98	-4.62	93.61	33.36	113.97	93.97	-20.36	Peak
1816.00	H	48.47	---	-6.58	41.89	---	74.00	54.00	-12.11	Peak
2672.00	H	49.15	---	-3.61	45.54	---	74.00	54.00	-8.46	Peak
4850.00	H	46.94	---	1.96	48.90	---	74.00	54.00	-5.10	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / CH Mid**Test Date:** Sep. 10, 2008**Temperature:** 22°C**Tested by:** Alonso Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2425.00	V	87.49	38.00	-4.56	82.93	33.44	113.97	93.97	-31.04	Peak
2156.00	V	49.55	---	-5.18	44.37	---	74.00	54.00	-9.63	Peak
4850.00	V	43.97	---	1.96	45.93	---	74.00	54.00	-8.07	Peak
6140.00	V	42.63	---	4.27	46.90	---	74.00	54.00	-7.10	Peak
N/A										
2425.00	H	97.14	38.50	-4.56	92.58	33.94	113.97	93.97	-21.39	Peak
4850.00	H	46.95	---	1.96	48.91	---	74.00	54.00	-5.09	Peak
6150.00	H	42.19	---	4.28	46.47	---	74.00	54.00	-7.53	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Tx / CH High**Test Date:** Sep. 10, 2008**Temperature:** 22°C**Tested by:** Alonso Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2475.00	V	89.91	37.92	-4.45	85.46	33.47	113.97	93.97	-28.51	Peak
2152.00	V	48.92	---	-5.19	43.73	---	74.00	54.00	-10.27	Peak
4950.00	V	45.73	---	2.25	47.98	---	74.00	54.00	-6.02	Peak
N/A										
2475.00	H	98.68	38.19	-4.45	94.23	33.74	113.97	93.97	-19.74	Peak
4950.00	H	48.65	---	2.25	50.90	---	74.00	54.00	-3.10	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** Rx**Test Date:** Sep. 5, 2008**Temperature:** 22°C**Tested by:** Alonso Lu**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1616.00	V	44.02	---	-7.73	36.30	---	74.00	54.00	-17.70	Peak
1928.00	V	43.70	---	-5.94	37.76	---	74.00	54.00	-16.24	Peak
2216.00	V	42.52	---	-5.04	37.48	---	74.00	54.00	-16.52	Peak
2428.00	V	42.87	---	-4.56	38.31	---	74.00	54.00	-15.69	Peak
2636.00	V	42.73	---	-3.77	38.96	---	74.00	54.00	-15.04	Peak
2824.00	V	41.77	---	-2.91	38.86	---	74.00	54.00	-15.14	Peak
4850.00	V	42.63	---	1.96	44.59	---	74.00	54.00	-9.41	Peak
1860.00	H	43.32	---	-6.33	36.99	---	74.00	54.00	-17.01	Peak
1932.00	H	42.78	---	-5.92	36.86	---	74.00	54.00	-17.14	Peak
2216.00	H	42.95	---	-5.04	37.91	---	74.00	54.00	-16.09	Peak
2528.00	H	42.96	---	-4.27	38.69	---	74.00	54.00	-15.31	Peak
2560.00	H	42.45	---	-4.12	38.33	---	74.00	54.00	-15.67	Peak
2840.00	H	42.20	---	-2.84	39.37	---	74.00	54.00	-14.63	Peak
4850.00	H	45.71	---	1.96	47.67	---	74.00	54.00	-6.33	Peak
9870.00	H	42.69	---	8.08	50.78	---	74.00	54.00	-3.22	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.




TEST PLOTS

CH Low

Detector mode: Peak


Polarity: Vertical

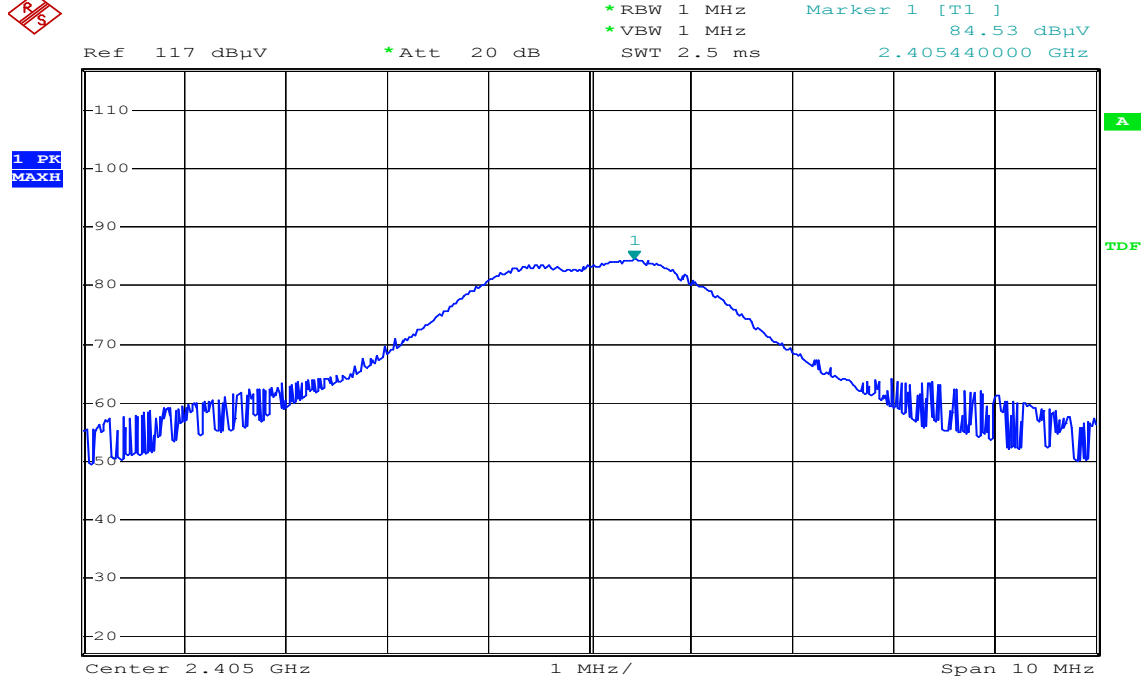

Date: 10.SEP.2008 10:32:26

Detector mode: Average

Polarity: Vertical

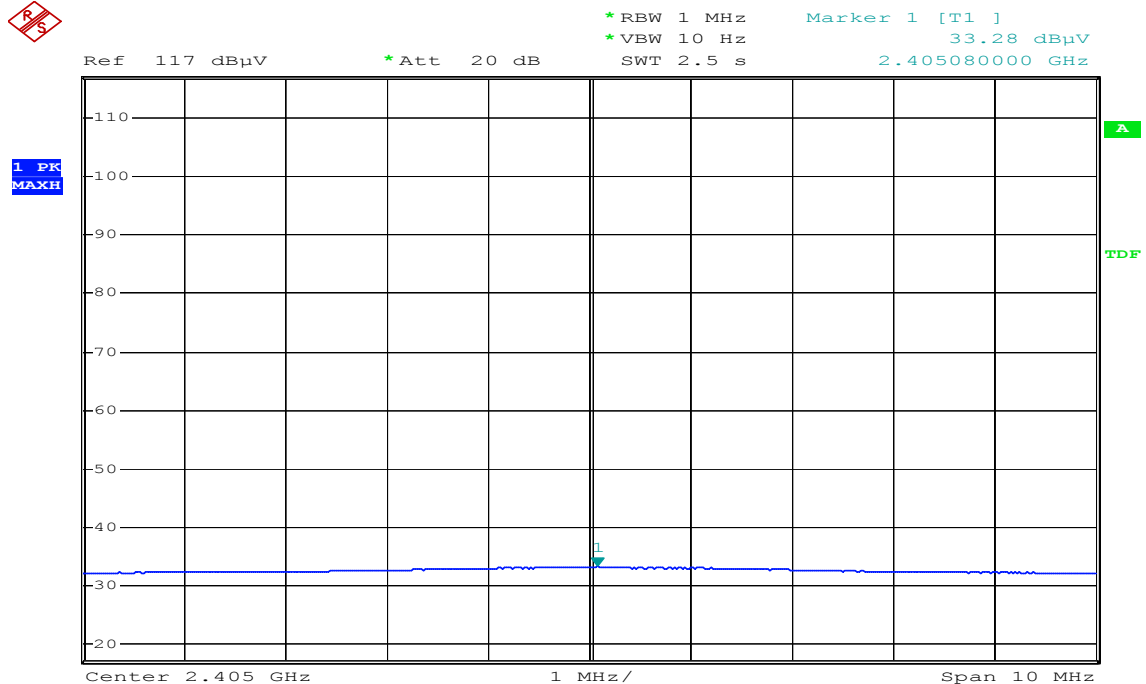


Date: 10.SEP.2008 10:34:03



Detector mode: Peak


Polarity: Horizontal

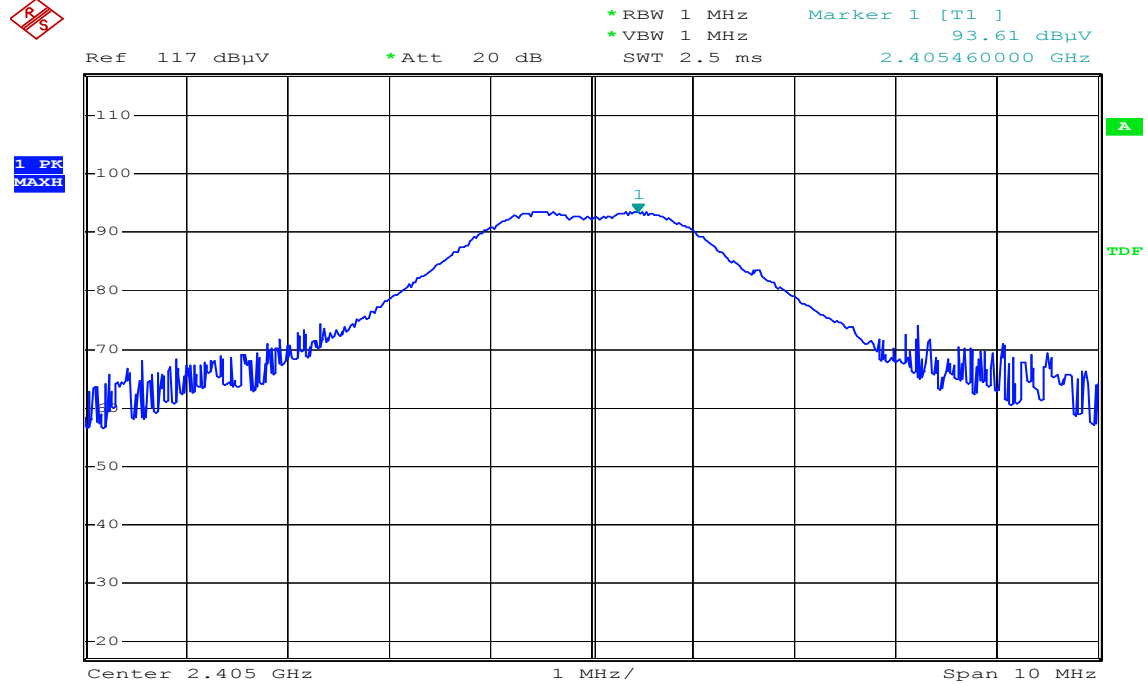

Date: 10.SEP.2008 10:38:34

Detector mode: Average

Polarity: Horizontal

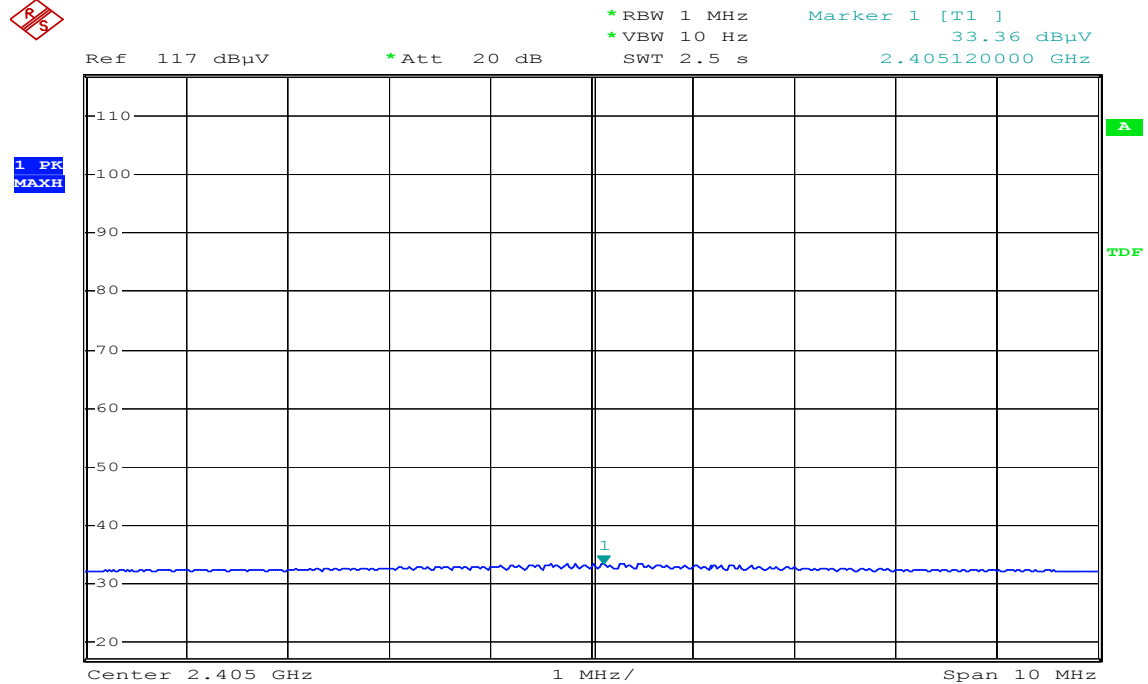


Date: 10.SEP.2008 10:39:14



CH Mid

Detector mode: Peak


Polarity: Vertical

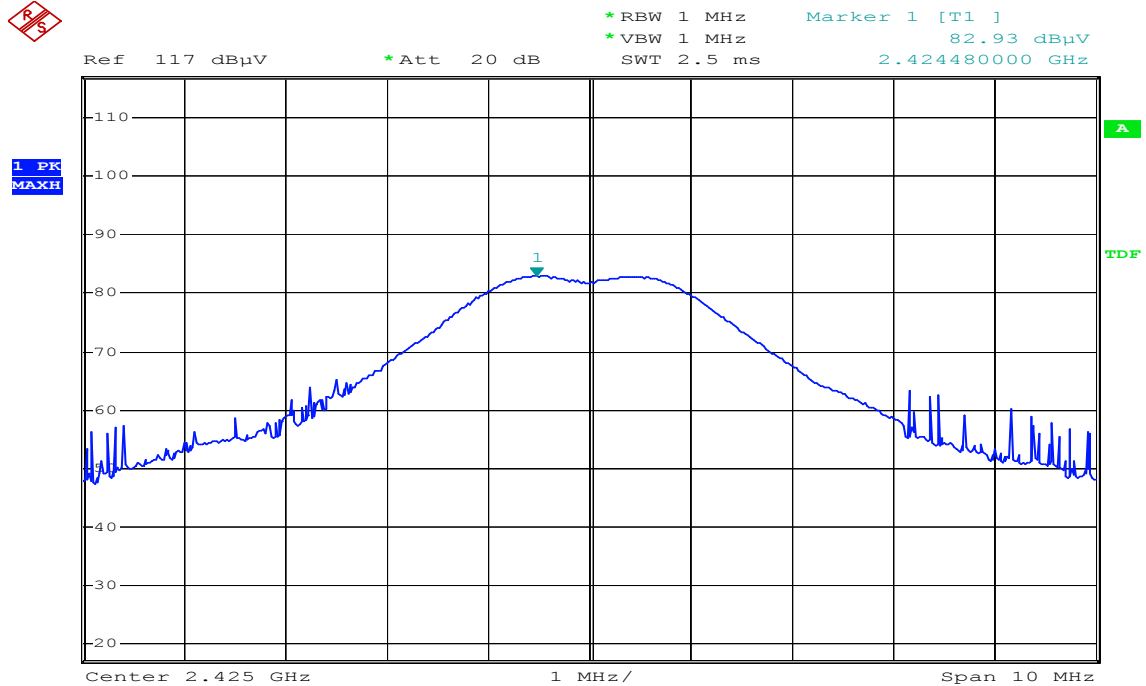

Date: 10.SEP.2008 10:24:55

Detector mode: Average

Polarity: Vertical

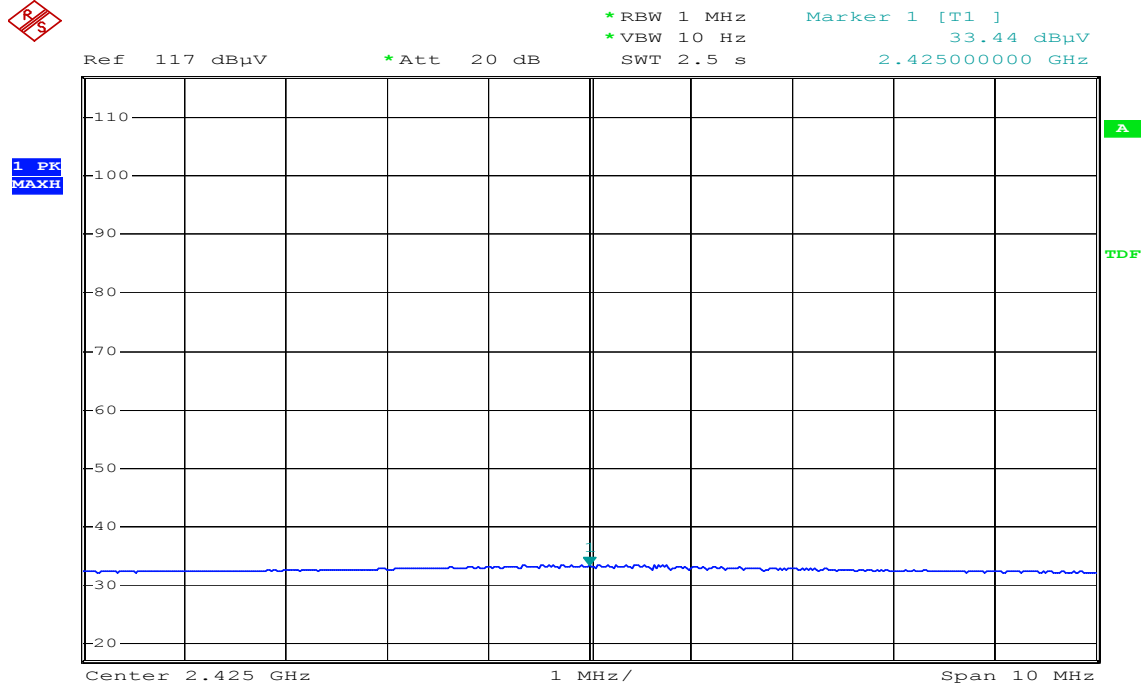


Date: 10.SEP.2008 10:25:44



Detector mode: Peak


Polarity: Horizontal

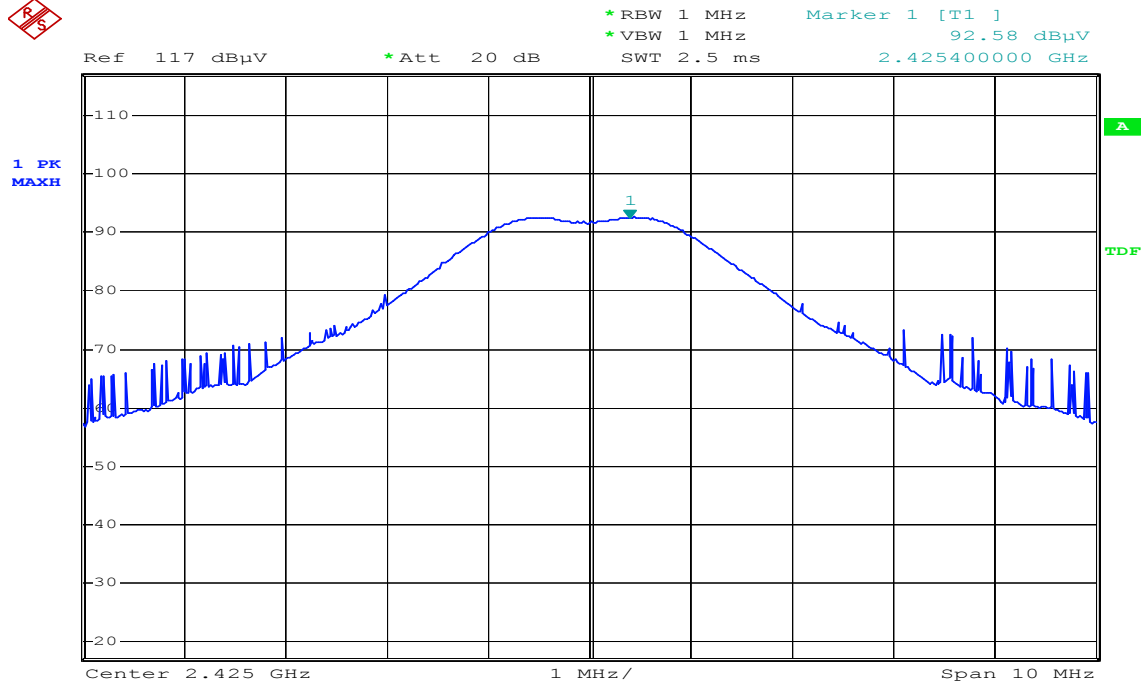

Date: 10.SEP.2008 10:22:16

Detector mode: Average

Polarity: Horizontal

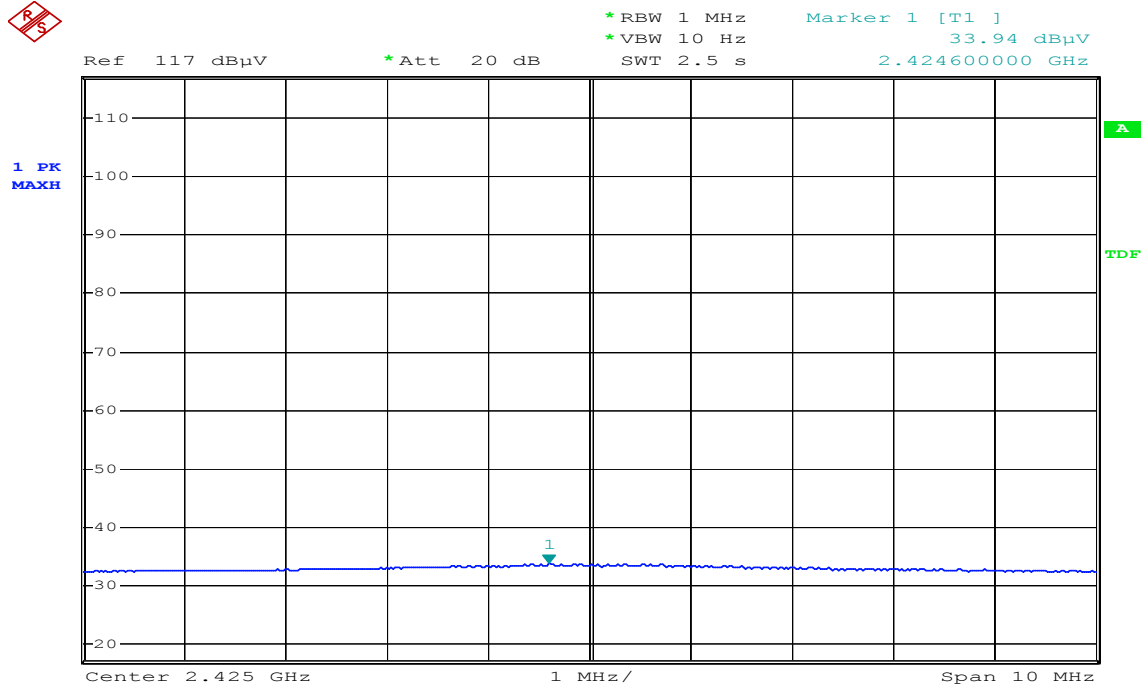


Date: 10.SEP.2008 10:23:05



CH High

Detector mode: Peak


Polarity: Vertical

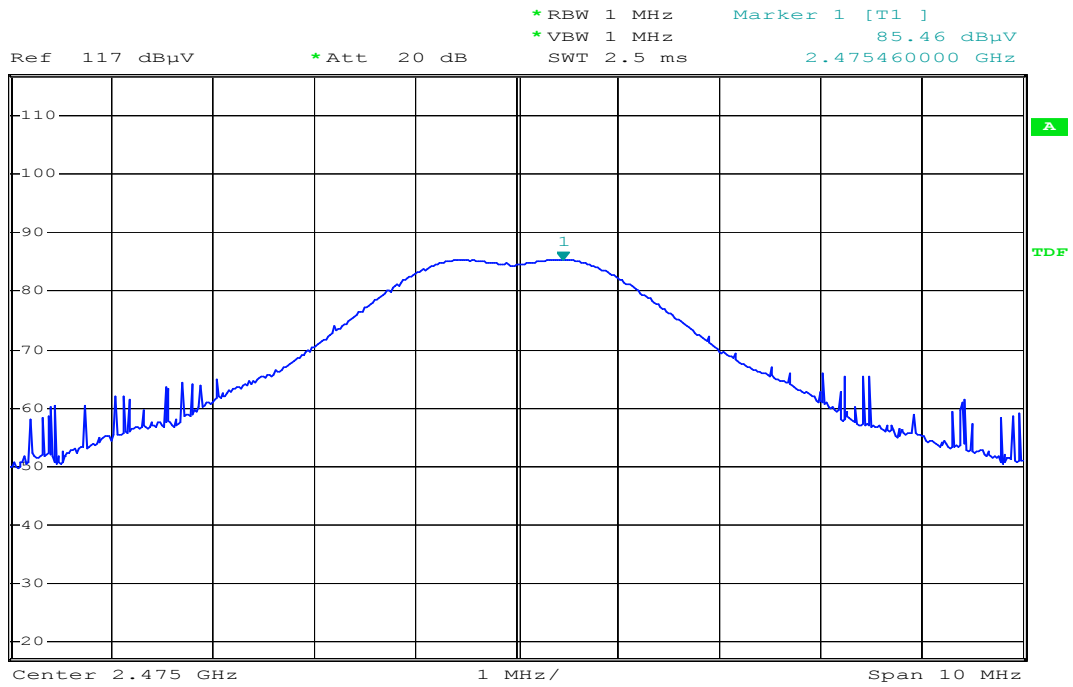

Date: 10.SEP.2008 10:13:30

Detector mode: Average

Polarity: Vertical

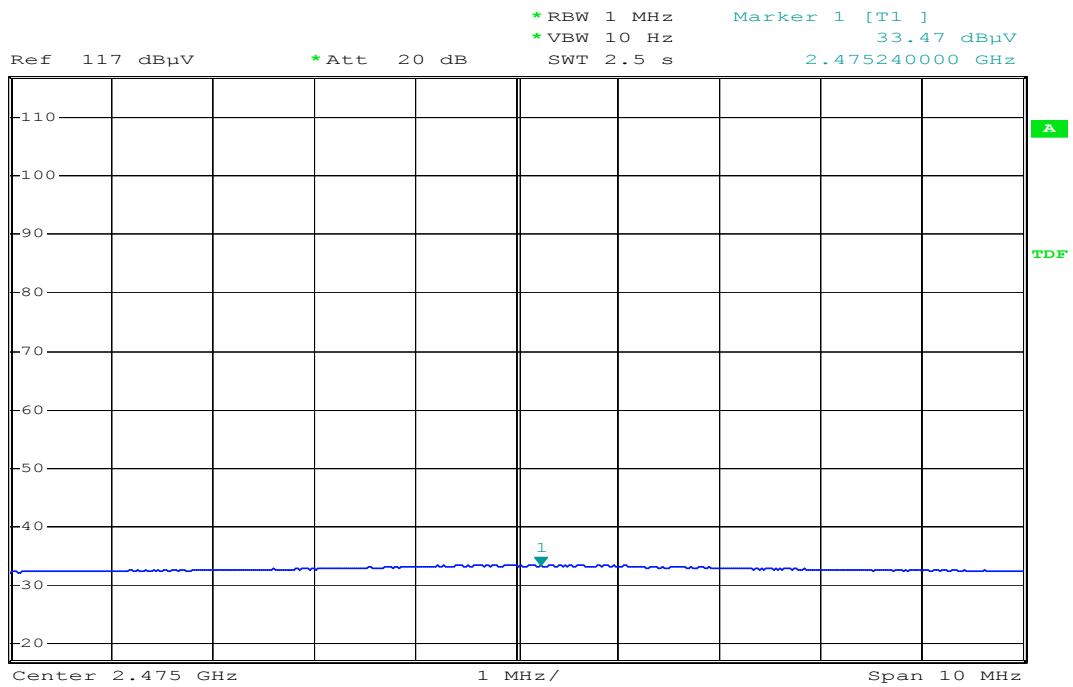


Date: 10.SEP.2008 10:14:30



Detector mode: Peak


Polarity: Horizontal

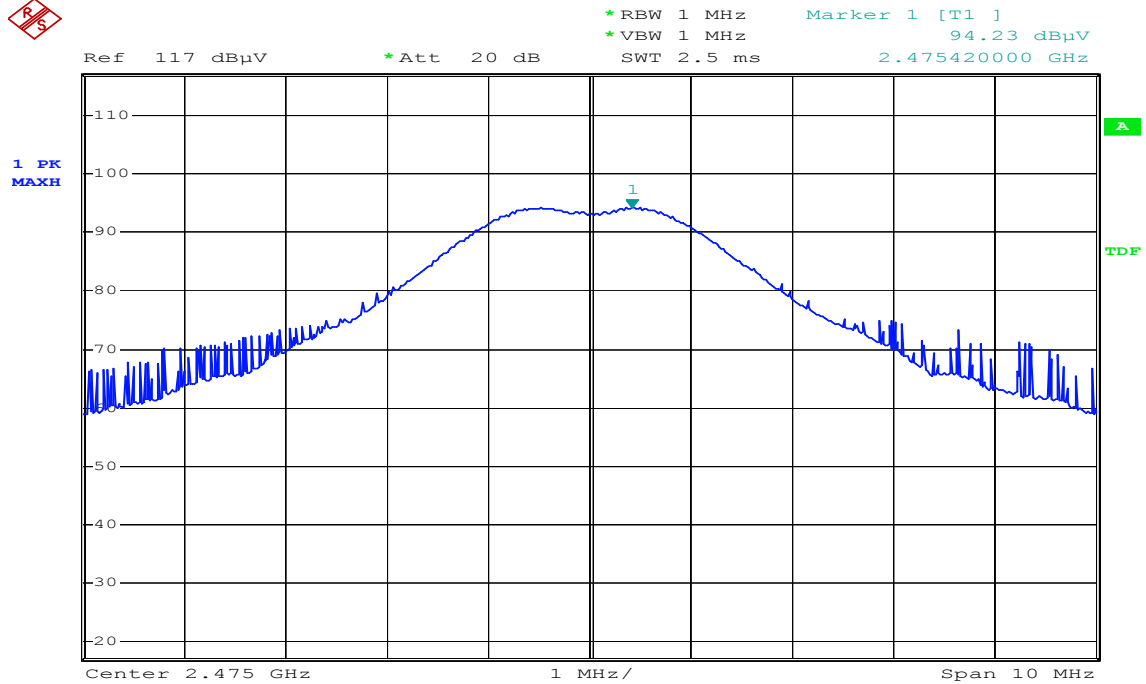

Date: 10.SEP.2008 10:17:32

Detector mode: Average

Polarity: Horizontal

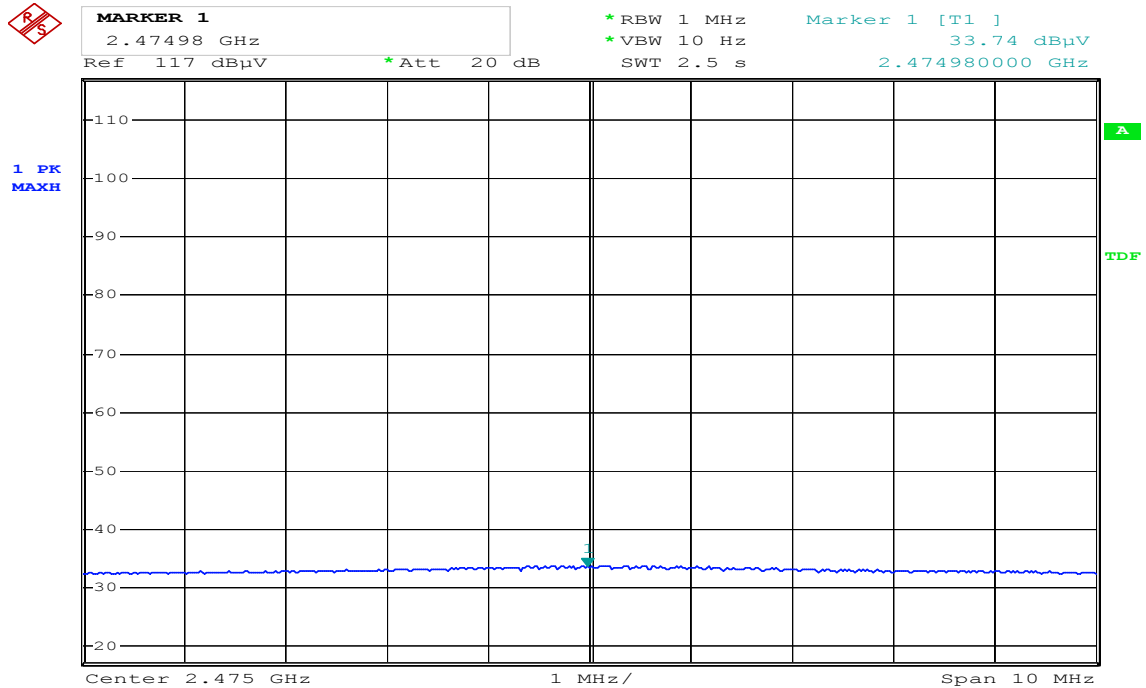

Date: 10.SEP.2008 10:18:33



7.3 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA

Operation Mode: Normal Link **Test Date:** Sep. 24, 2008
Temperature: 25°C **Tested by:** Nan Tsai
Humidity: 57% RH

Freq. (MHz)	QP Reading	AV Reading	Corr. factor	QP Result	AV Result	QP Limit	AV Limit	QP Margin	AV Margin	Note
0.4078	36.00	23.60	9.70	45.70	33.30	57.69	47.69	-11.99	-14.39	L1
0.6813	34.19	25.59	9.61	43.80	35.20	56.00	46.00	-12.20	-10.80	L1
0.8883	34.89	23.49	9.61	44.50	33.10	56.00	46.00	-11.50	-12.90	L1
1.0914	34.78	22.28	9.62	44.40	31.90	56.00	46.00	-11.60	-14.10	L1
1.9117	33.89	25.59	9.71	43.60	35.30	56.00	46.00	-12.40	-10.70	L1
4.3688	33.02	21.02	9.78	42.80	30.80	56.00	46.00	-13.20	-15.20	L1
0.4117	30.42	15.62	9.68	40.10	25.30	57.61	47.61	-17.51	-22.31	L2
0.6148	29.71	15.21	9.59	39.30	24.80	56.00	46.00	-16.70	-21.20	L2
1.0914	28.19	18.09	9.61	37.80	27.70	56.00	46.00	-18.20	-18.30	L2
2.1148	30.79	14.69	9.71	40.50	24.40	56.00	46.00	-15.50	-21.60	L2
3.2086	30.08	14.48	9.72	39.80	24.20	56.00	46.00	-16.20	-21.80	L2
4.5055	30.91	17.71	9.79	40.70	27.50	56.00	46.00	-15.30	-18.50	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



TEST PLOTS

Conducted emissions (Line 1)

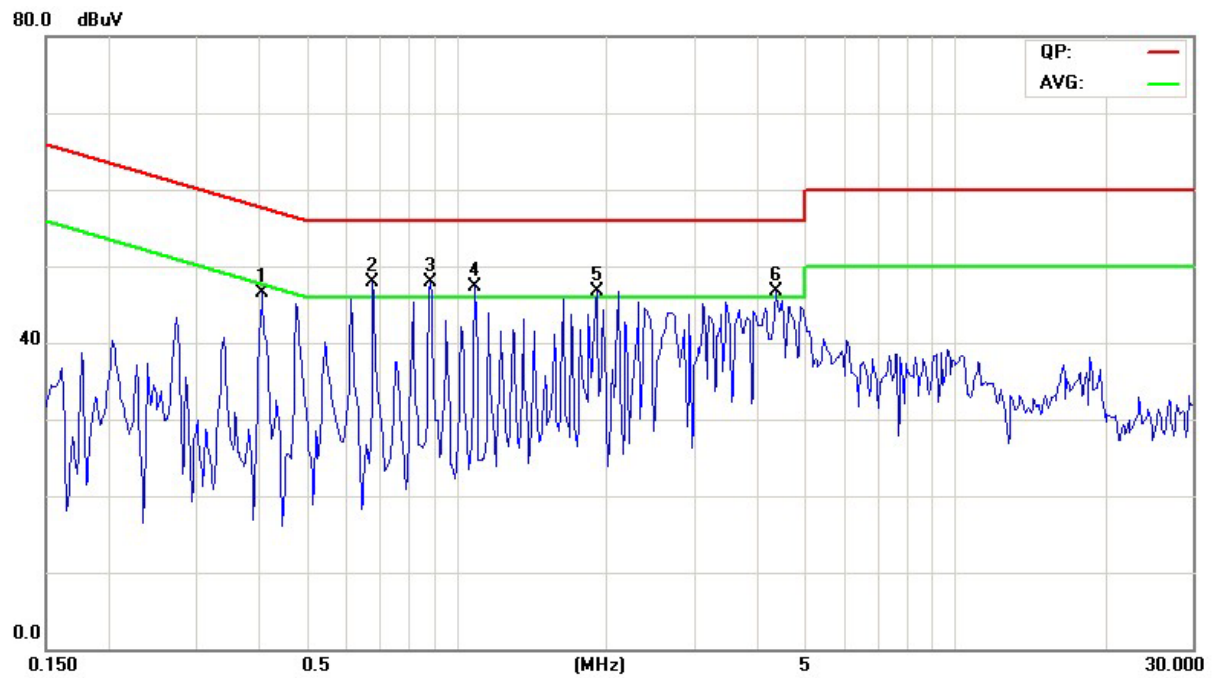

Conducted emissions (Line 2)

