


## **BLOCK DIAGRAM OF THE REMOTE**

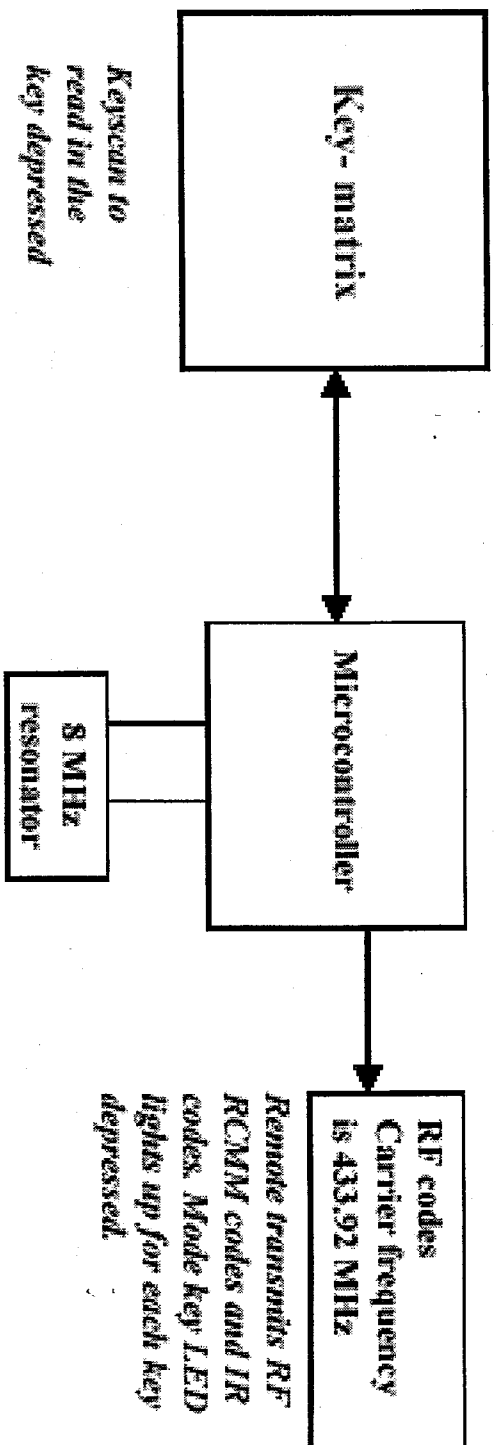

The RF codes are generated using a 433.92 MHz SAW resonator which is present in the RF module.