



FCC 47 CFR PART 15 Subpart C

TEST REPORT

For

Bluetooth Infrared Remote Control

Model Number: RC2292801/01B

Trade Name: lenovo

Issued to

**Philips Electronics Singapore Pte. Ltd.,
Category Peripherals & Control, Philips Consumer Lifestyle,
620A Lorong 1, Toa Payoh, Building TP1, Level 2, Singapore 319762.**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,
Taoyuan Shien, (338) Taiwan, R.O.C.**

TEL: 886-3-324-0332

FAX: 886-3-324-5235

<http://www.ccsemc.com.tw>

service@tw.ccsemc.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION.....	4
3. TEST METHODOLOGY.....	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES.....	6
4. INSTRUMENT CALIBRATION	7
4.1 MEASURING INSTRUMENT CALIBRATION.....	7
4.2 MEASUREMENT EQUIPMENT USED	7
5. FACILITIES AND ACCREDITATIONS.....	9
5.1 FACILITIES.....	9
5.2 EQUIPMENT.....	9
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	10
6. SETUP OF EQUIPMENT UNDER TEST.....	11
6.1 SETUP CONFIGURATION OF EUT	11
6.2 SUPPORT EQUIPMENT.....	11
7. FCC PART 15.249 REQUIREMENTS.....	12
7.1 20dB BANDWIDTH.....	12
7.2 BAND EDGES MEASUREMENT	15
7.3 SPURIOUS EMISSION.....	20
7.4 POWERLINE CONDUCTED EMISSIONS	34
8. APPENDIX 1 PHOTOGRAPHS OF TEST SETUP.....	37



1. TEST RESULT CERTIFICATION

Applicant:

Philips Electronics Singapore Pte. Ltd.
Category Peripherals & Control, Philips Consumer Lifestyle,
620A Lorong 1, Toa Payoh, Building TP1, Level 2,
Singapore 319762.

Equipment Under Test: Bluetooth Infrared Remote Control

Trade Name: lenovo

Model: RC2292801/01B

Date of Test: May 31 ~ October 24, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.107, 15.109, 15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Robert Huang
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Julia Wei
Senior Specialist
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Bluetooth Infrared Remote Control
Trade Name	Lenovo
Model Number	RC2292801/01B
Serial Number	3139 228 53991
Model Discrepancy	The EUT have two types for sale: Type 1 with audio port and type 2 without audio port.
EUT Power Rating	3.7VDC from Battery
Operating Frequency Range	2402 ~ 2480MHz
Output Power	104.79dBuV/m (Max)
Modulation Technique	FSK
Number of Channels	79Channels
Antenna Gain	0.5dBi
Antenna Designation	SMT Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.

This test report is intended for **FCC ID:RCSRC229** to comply with Section 15.107 & 15.109 (FCC Part 15, Subpart B) and Section 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT type 1 and type 2 were verified and Type 1 was reported as the worst case. RC2292801/01B had been tested under operating condition except radiated spurious emission below 1GHz and powerline conducted emission below 30MHz, which were in normal link mode only.

Channel Low (2402MHz), Channel Mid (2441MHz) and Channel High (2480MHz) were chosen for the final testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSP30	100112	10/16/2009
Spectrum Analyzer	R&S	FSEB	825829/011	10/11/2009
Pre-Amplifier	Anritsu	MH648A	M89145	07/25/2009
Pre-Amplifier	Agilent	8449B	3008A01738	03/28/2009
Bilog Antenna	FRANKONIA	BTA-M	030003M	N.C.R
Horn Antenna	EMCO	3115	00022257	12/16/2008
Antenna Tower	HD	AS620E	N/A	N.C.R
Controller	HD	HD100	N/A	N.C.R
Turn Table	HD	DT-K312	N/A	N.C.R
Controller	HD	HD100	N/A	N.C.R
Turn Table	HD	DT-K312	N/A	N.C.R
Test S/W	LabVIEW 6.1 (Wugu Chamber EMI Teat V1_4.5.3)			

Remark: The measurement uncertainty is less than $\pm 2.0065\text{dB}$ (30MHz ~ 1GHz), $\pm 3.0958\text{dB}$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilnet	E4411B	MY41440314	N.C.R
Spectrum Analyzer	R&S	FSP30	100112	10/14/2009
EMI Test Receiver	R&S	ESVS30	828488/004	03/20/2009
Pre-Amplifier	Mini-Circuits	ZKL-2R5	83153007374	04/02/2009
Pre-Amplifier	Agilent	8449B	3008A01738	03/28/2009
Bilog Antenna	Sunol Sciences	JB1	A031905	10/03/2009
Horn Antenna	EMCO	3115	00022250	05/08/2009
Loop Antenna	EMCO	6502	2356	05/28/2010
Turn Table	Chance Most	CM-T003-1	T807-6	N.C.R
Antenna Tower	Chance Most	CM-A003-1	A807-6	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	CCS	N/A	N/A	05/09/2009
Test S/W	LabVIEW 6.1 (CCS OATS EMI SW V2.6)			

Remark: The measurement uncertainty is less than +/- 4.0235dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	SCHAFFNER	SCR 3501	410	12/16/2008
LISN	R&S	ESH3-Z5	848773/014	10/27/2009
LISN	FCC	FCC-LISN-50/2 50-16-2-07	06012	11/20/2008
Test S/W	LabVIEW 6.1 (CCS Conduction Test SW Version_01)			

Remark: The measurement uncertainty is less than +/- 1.7806dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☐ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT





Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 No. 0824-01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-321/325
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

For Conducted and Radiated Measurement

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

****No any support equipment during the test.**

For Powerline Measurement

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	HP	COMPAQ NC 4010	CNU441F8LV	FCC DoC	USB Cable: Unshielded, 1.8m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	BlueCON U2	N/A	C51-A5022XX	N/A	RKIC51-A05022-XX	N/A	N/A
3	Monitor	SAMSUNG	959NF	AQ19H2RT7061 39P	FCC DoC	D-SUB Cable: Unshielded, 1.8m with two cores	Unshielded, 1.8m
4	Earphone	CJC	CJC-5258MV	0507106323	FCC DoC	N/A	Unshielded, 1.8m

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.249 REQUIREMENTS

7.1 20dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10kHz, VBW = 30kHz, Span = 2.5MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


TEST RESULTS

No non-compliance noted




Test Plot

20dB Bandwidth (CH Low)

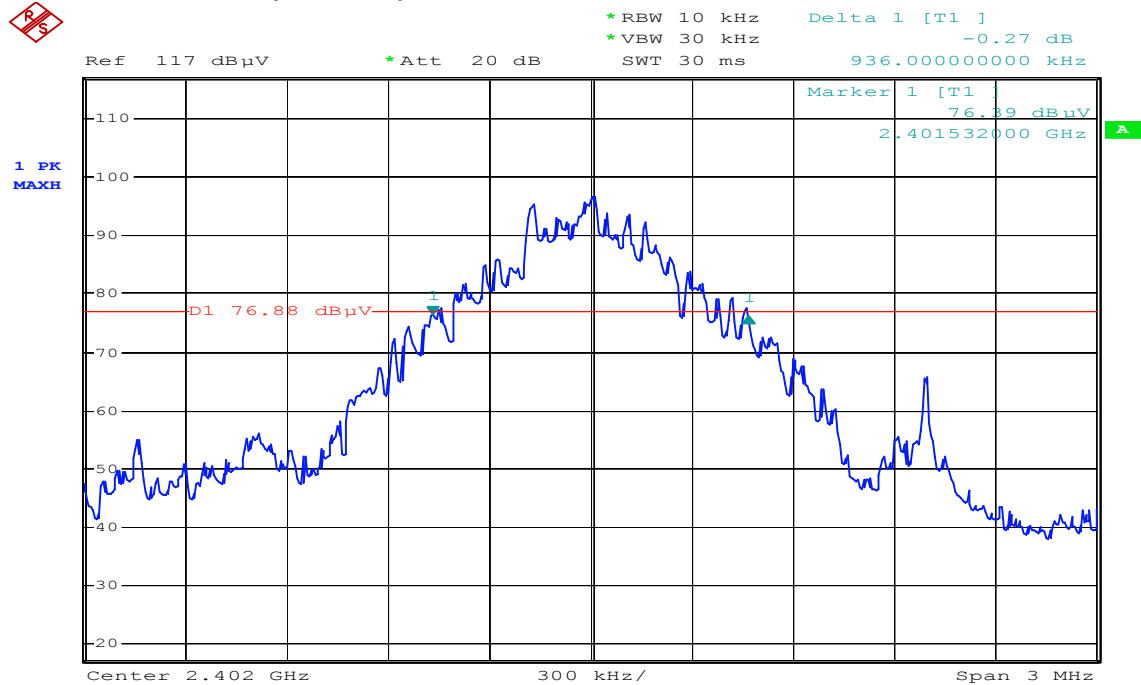

Date: 24.OCT.2008 20:20:37


20dB Bandwidth (CH Mid)

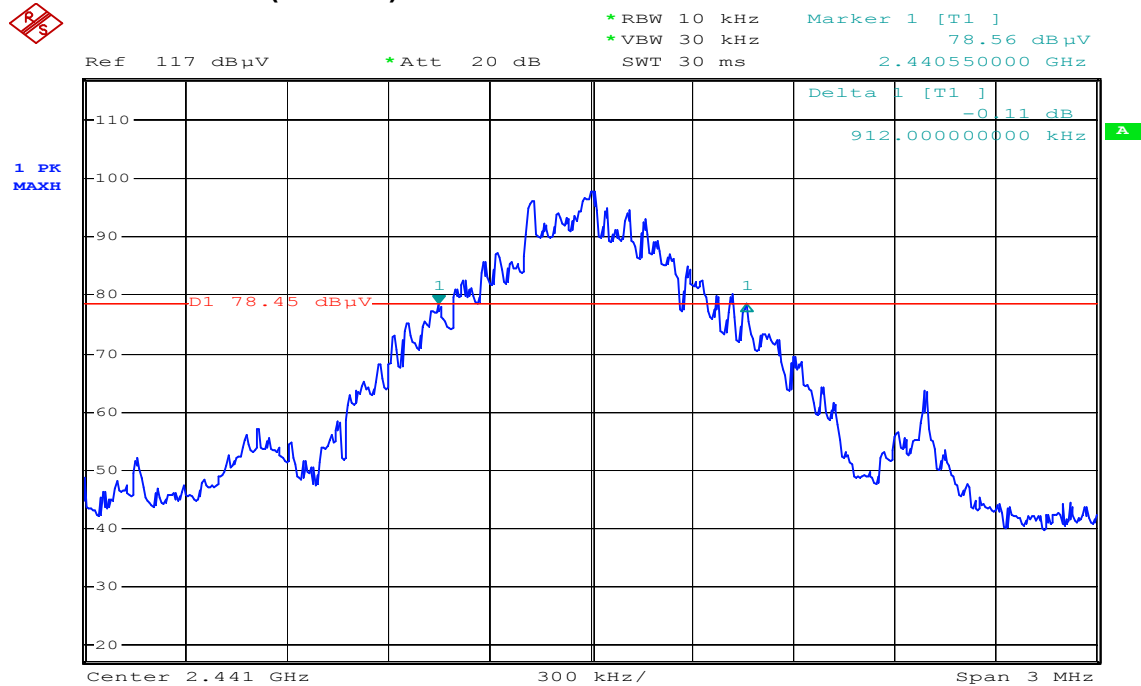

Date: 24.OCT.2008 20:24:48



20dB Bandwidth (CH High)

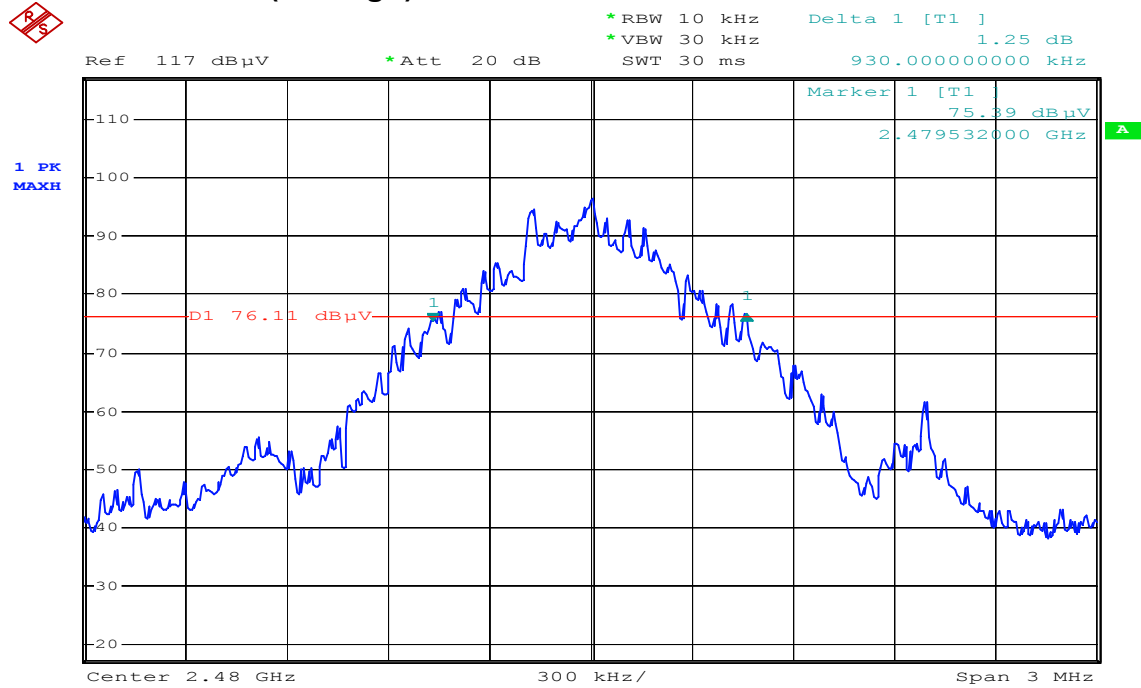

Date: 24.OCT.2008 20:43:03

7.2 BAND EDGES MEASUREMENT


LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

TEST CONFIGURATION

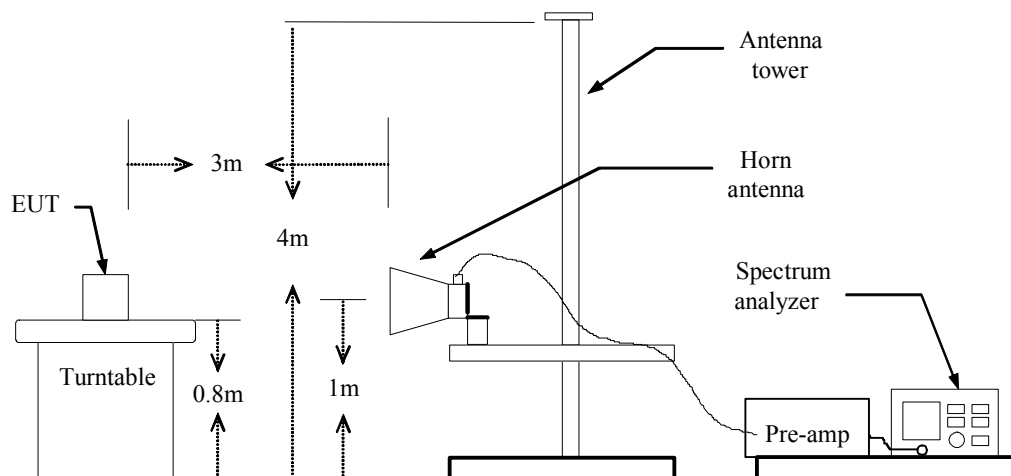

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.




TEST RESULTS

Band Edges (CH Low)

Detector mode: Peak


Polarity: Vertical

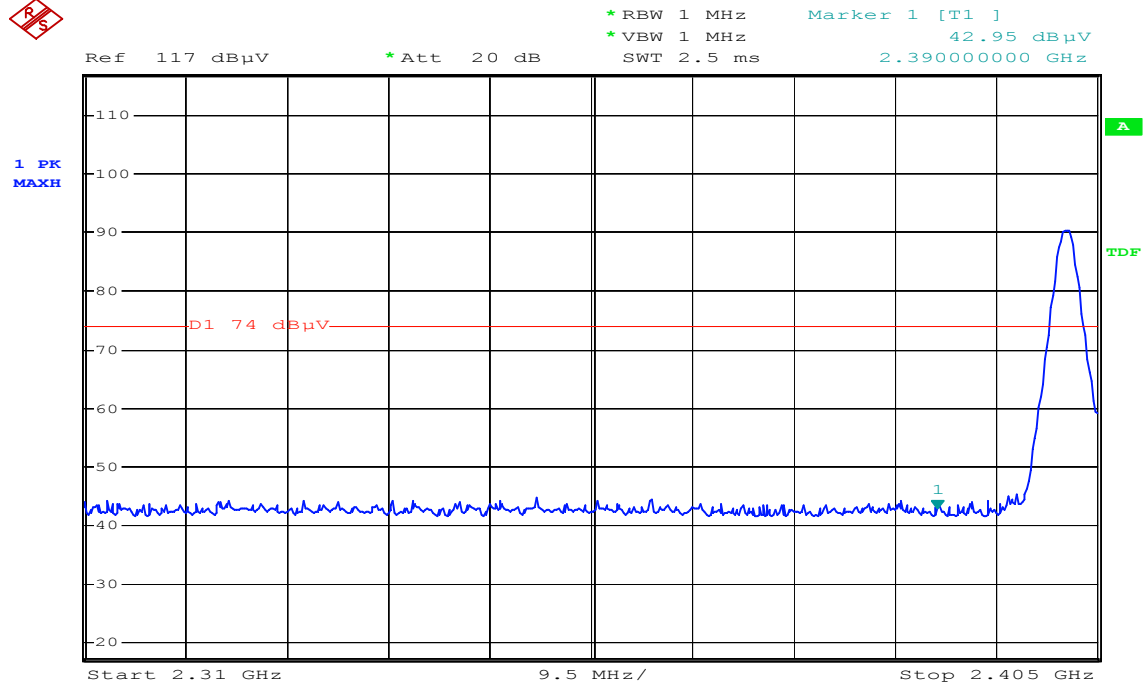

Date: 24.OCT.2008 10:53:14

Detector mode: Average

Polarity: Vertical

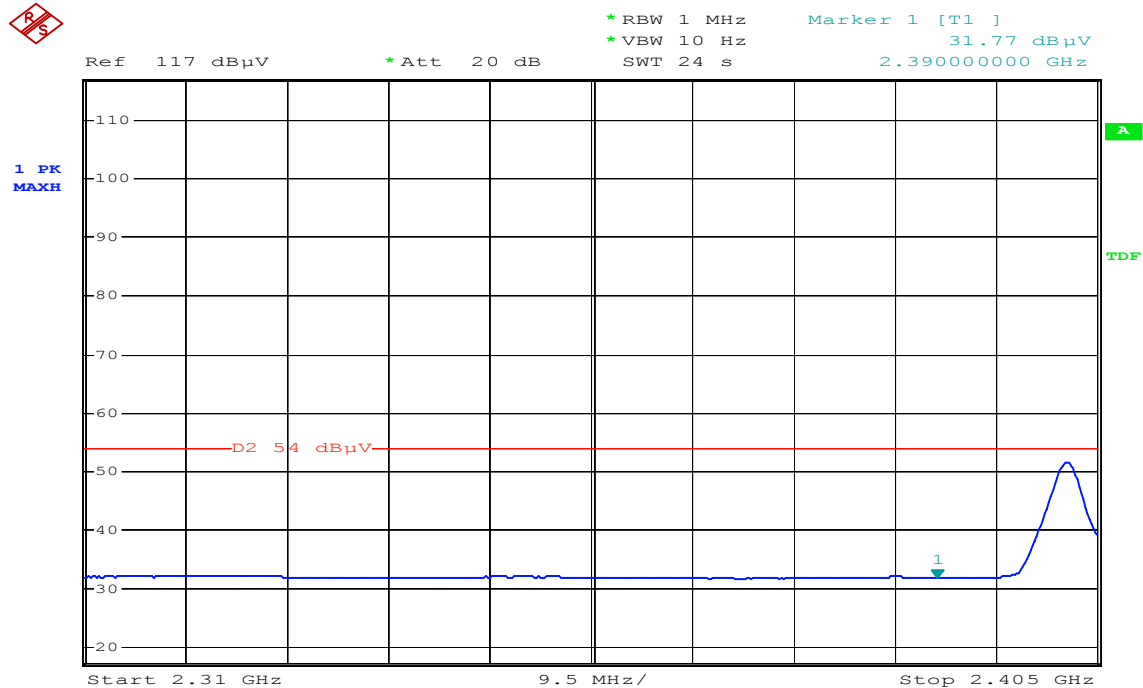


Date: 24.OCT.2008 10:54:00



Detector mode: Peak


Polarity: Horizontal

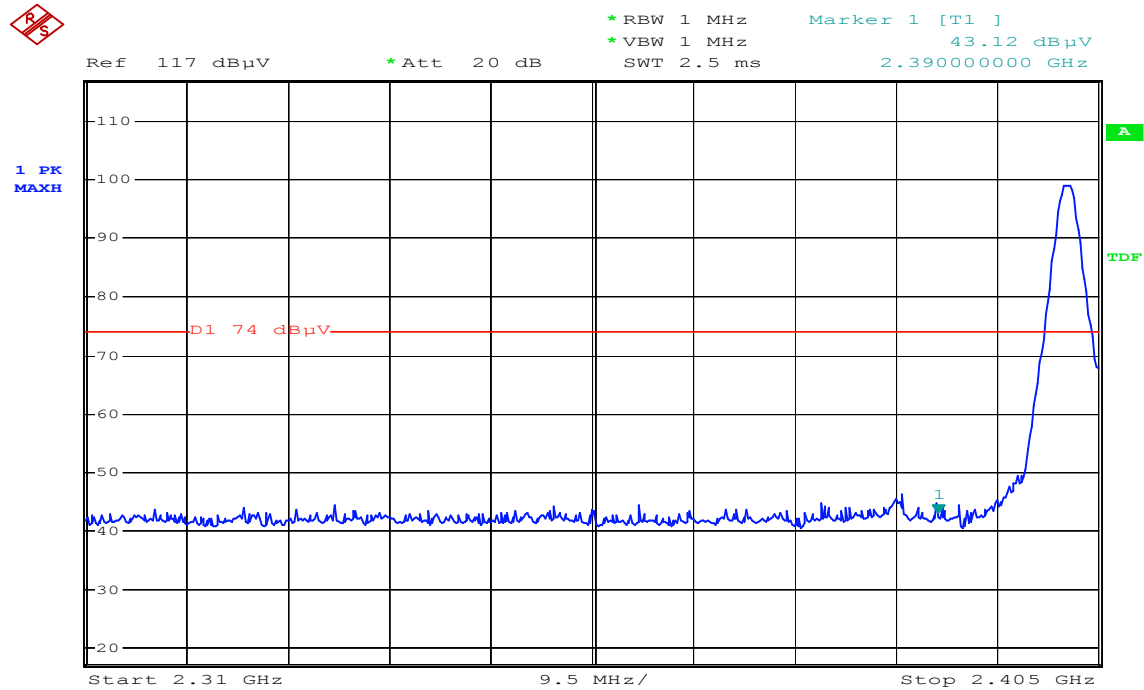

Date: 24.OCT.2008 10:55:33

Detector mode: Average

Polarity: Horizontal

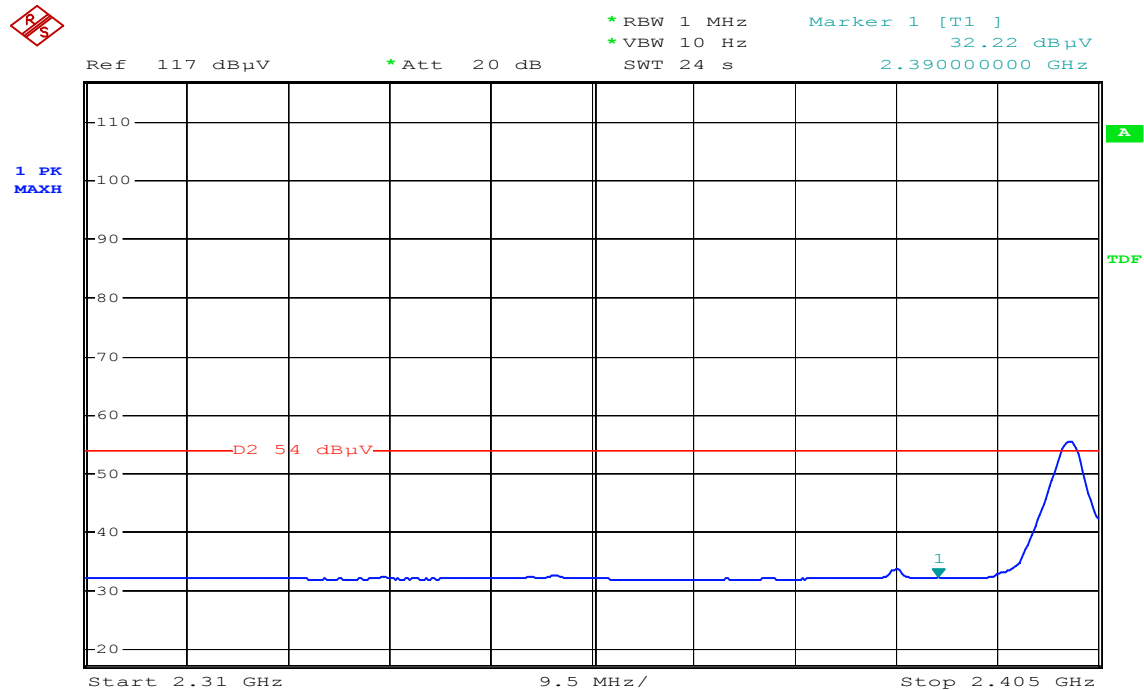


Date: 24.OCT.2008 10:56:19



Band Edges (CH High)

Detector mode: Peak


Polarity: Vertical

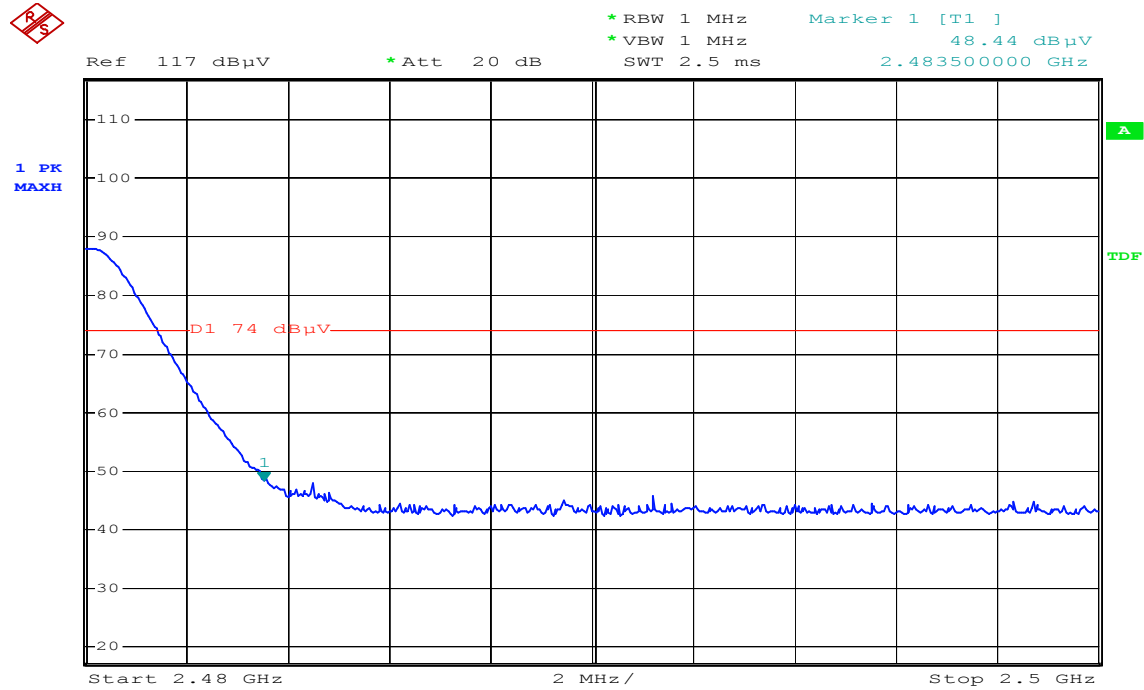

Date: 24.OCT.2008 11:02:52

Detector mode: Average

Polarity: Vertical

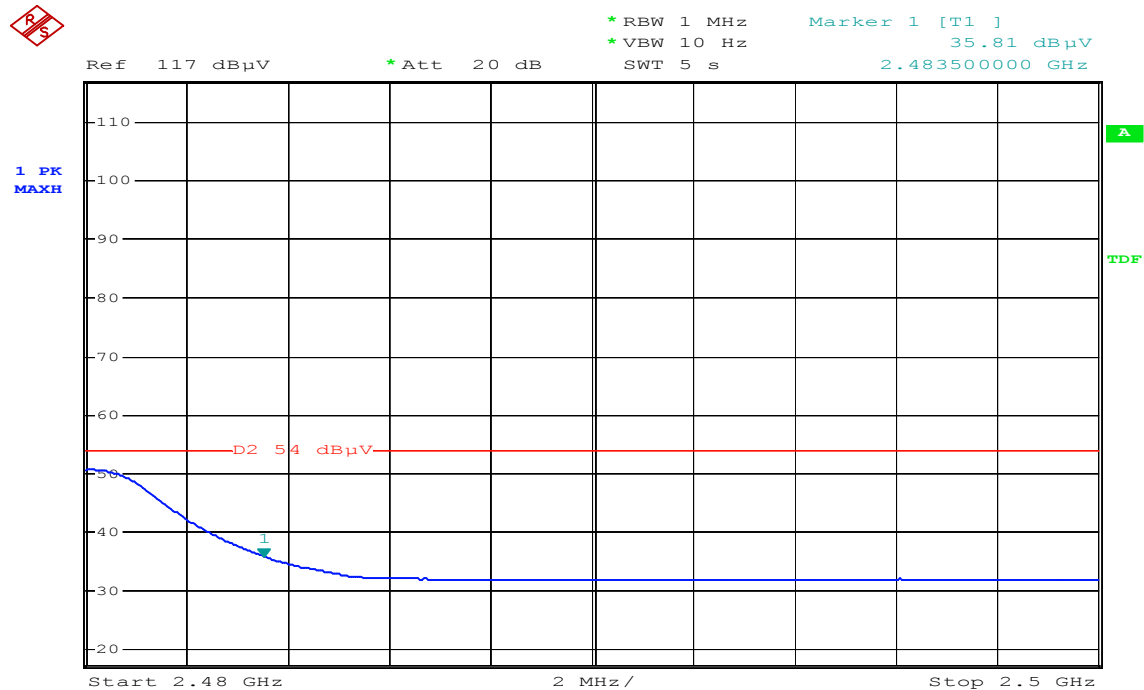


Date: 24.OCT.2008 11:03:44



Detector mode: Peak


Polarity: Horizontal

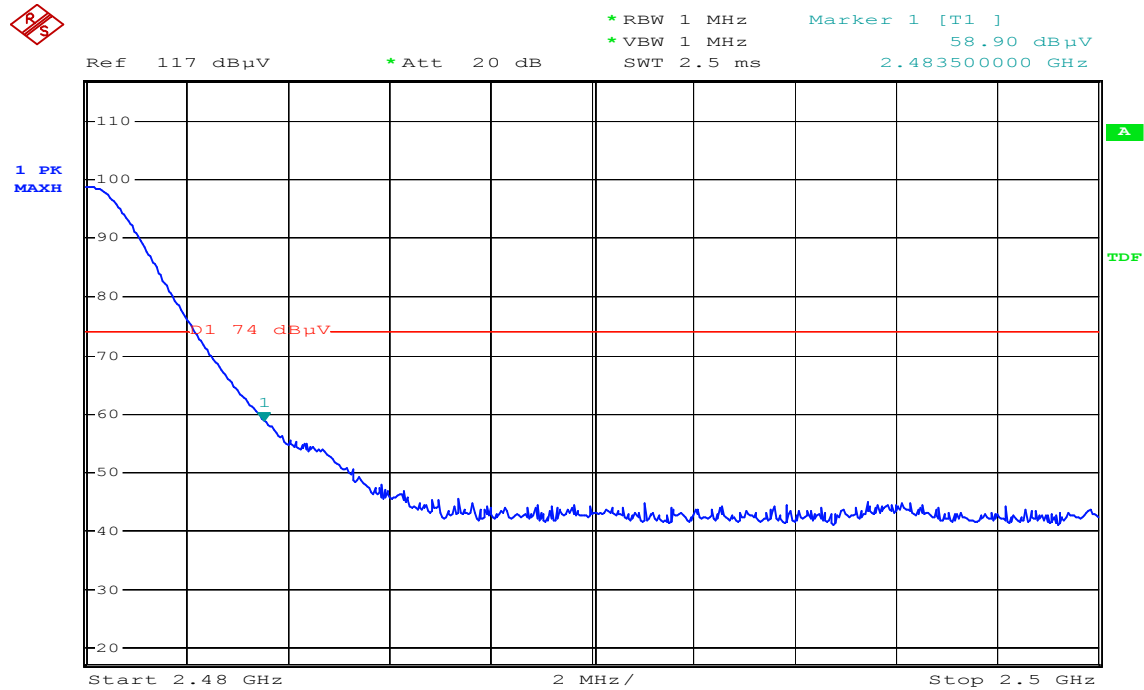

Date: 24.OCT.2008 11:00:49

Detector mode: Average

Polarity: Horizontal

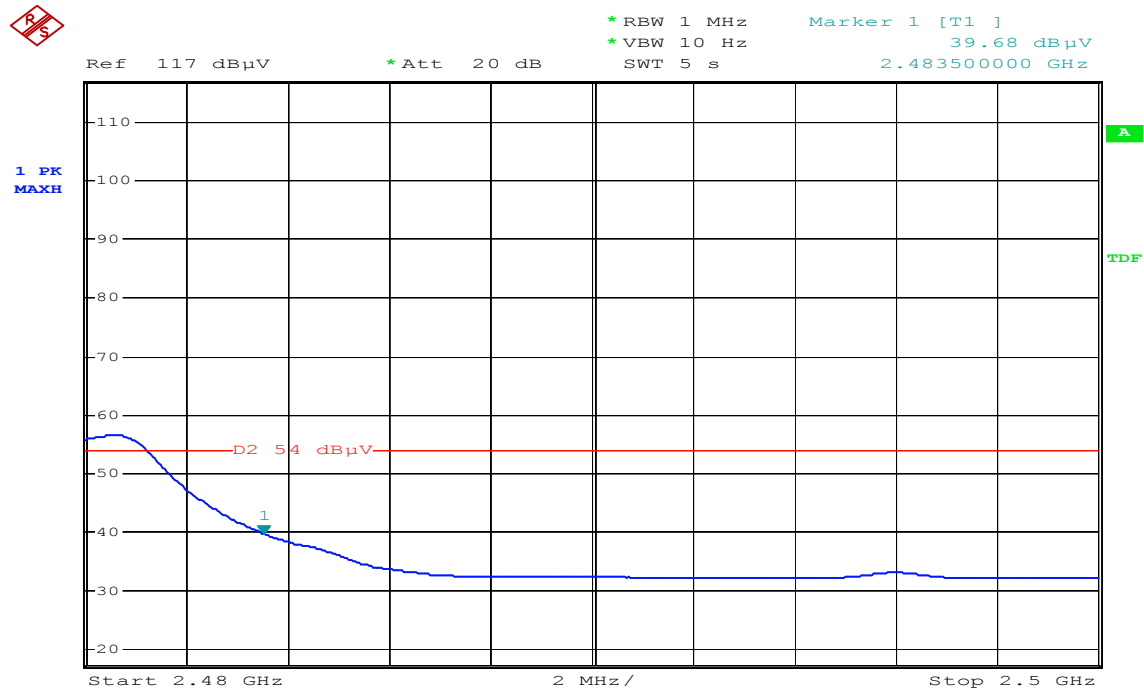

Date: 24.OCT.2008 11:01:11



7.3 SPURIOUS EMISSION

LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

TEST CONFIGURATION

Below 1 GHz

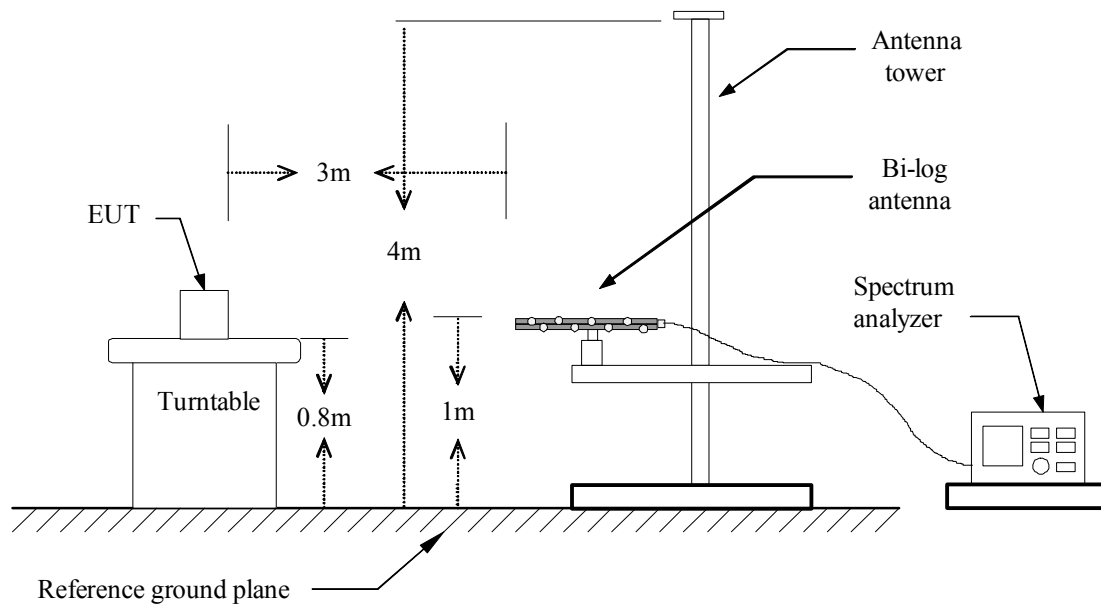

Above 1 GHz

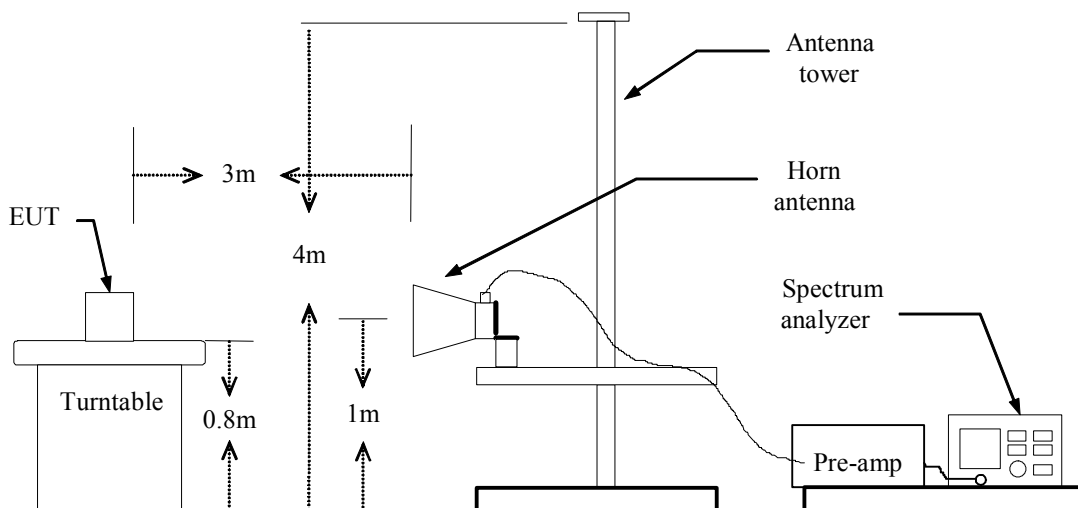



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** Oct. 24, 2008**Temperature:** 26°C**Tested by:** Ming Wu**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
34.8500	V	41.18	-15.25	25.93	40.00	-14.07	Peak
53.0382	V	33.81	-14.81	19.00	40.00	-21.00	Peak
61.5250	V	33.86	-15.06	18.80	40.00	-21.20	Peak
83.3500	V	34.91	-17.95	16.96	40.00	-23.04	Peak
107.8877	V	35.63	-15.70	19.93	43.50	-23.57	Peak
170.6500	V	34.49	-13.13	21.36	43.50	-22.14	Peak
277.3500	V	35.96	-12.38	23.58	46.00	-22.42	Peak
32.4250	H	31.98	-15.28	16.70	40.00	-23.30	Peak
40.0644	H	31.29	-14.61	16.68	40.00	-23.32	Peak
49.4000	H	31.33	-14.78	16.55	40.00	-23.45	Peak
59.9639	H	31.65	-14.80	16.85	40.00	-23.15	Peak
127.0000	H	32.34	-13.98	18.36	43.50	-25.14	Peak
146.4000	H	32.24	-12.81	19.43	43.50	-24.07	Peak
287.0500	H	33.54	-12.05	21.49	46.00	-24.51	Peak
384.0500	H	32.25	-9.99	22.26	46.00	-23.74	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown ☐ --- "in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** Tx / CH Low**Test Date:** Oct. 24, 2008**Temperature:** 20°C**Tested by:** Alonso Lu**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2402.00	V	99.12	59.67	-4.62	94.50	55.05	113.97	93.97	-19.47	Peak
1600.00	V	53.69	---	-7.82	45.87	---	74.00	54.00	-8.13	Peak
2708.00	V	47.84	---	-3.44	44.40	---	74.00	54.00	-9.60	Peak
4010.00	V	43.63	---	1.22	44.85	---	74.00	54.00	-9.15	Peak
5430.00	V	42.35	---	3.23	45.59	---	74.00	54.00	-8.41	Peak
N/A										
2402.00	H	106.88	63.36	-4.62	102.26	58.74	113.97	93.97	-11.71	Peak
1600.00	H	56.18	---	-7.82	48.36	---	74.00	54.00	-5.64	Peak
5030.00	H	41.84	---	2.46	44.30	---	74.00	54.00	-9.70	Peak
7460.00	H	42.70	---	7.02	49.72	---	74.00	54.00	-4.28	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: Tx / CH Mid

Test Date: Oct. 24, 2008

Temperature: 20°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2441.00	V	99.27	60.05	-4.54	94.73	55.51	113.97	93.97	-19.24	Peak
1628.00	V	52.70	---	-7.66	45.04	---	74.00	54.00	-8.96	Peak
N/A										
2441.00	H	109.33	64.87	-4.54	104.79	60.33	113.97	93.97	-9.18	Peak
1628.00	H	55.13	---	-7.66	47.47	---	74.00	54.00	-6.53	Peak
6370.00	H	42.45	---	4.33	46.78	---	74.00	54.00	-7.22	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown ☐ "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with ☐ "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: Tx / CH High

Test Date: Oct. 24, 2008

Temperature: 20°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2480.00	V	95.34	58.50	-4.45	90.89	54.05	113.97	93.97	-23.08	Peak
1656.00	V	52.13	---	-7.50	44.63	---	74.00	54.00	-9.37	Peak
5130.00	V	42.64	---	2.65	45.29	---	74.00	54.00	-8.71	Peak
N/A										
2480.00	H	106.38	64.08	-4.45	101.93	59.63	113.97	93.97	-12.04	Peak
1656.00	H	54.15	---	-7.50	46.65	---	74.00	54.00	-7.35	Peak
2724.00	H	48.66	---	-3.37	45.29	---	74.00	54.00	-8.71	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown "N/A" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: Rx

Test Date: Oct. 23, 2008

Temperature: 20°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Result		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1628.00	V	48.85	---	-7.66	41.19	---	74.00	54.00	-12.81	Peak
3820.00	V	43.53	---	0.56	44.09	---	74.00	54.00	-9.91	Peak
N/A										
1088.00	H	47.15	---	-10.29	36.86	---	74.00	54.00	-17.14	Peak
1628.00	H	53.88	---	-7.66	46.22	---	74.00	54.00	-7.78	Peak
5390.00	H	42.25	---	3.16	45.41	---	74.00	54.00	-8.59	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown ☐ "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with ☐ "N/A" no emission measured remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.




TEST PLOTS

CH Low

Detector mode: Peak


Polarity: Vertical

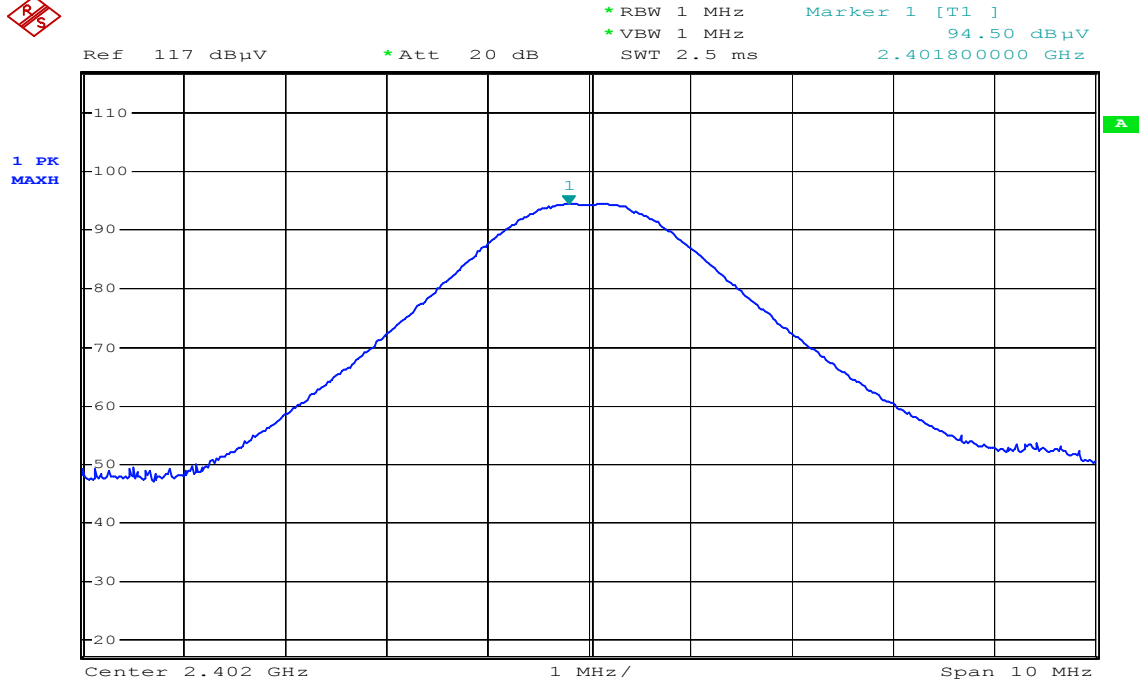

Date: 24.OCT.2008 10:46:28

Detector mode: Average

Polarity: Vertical

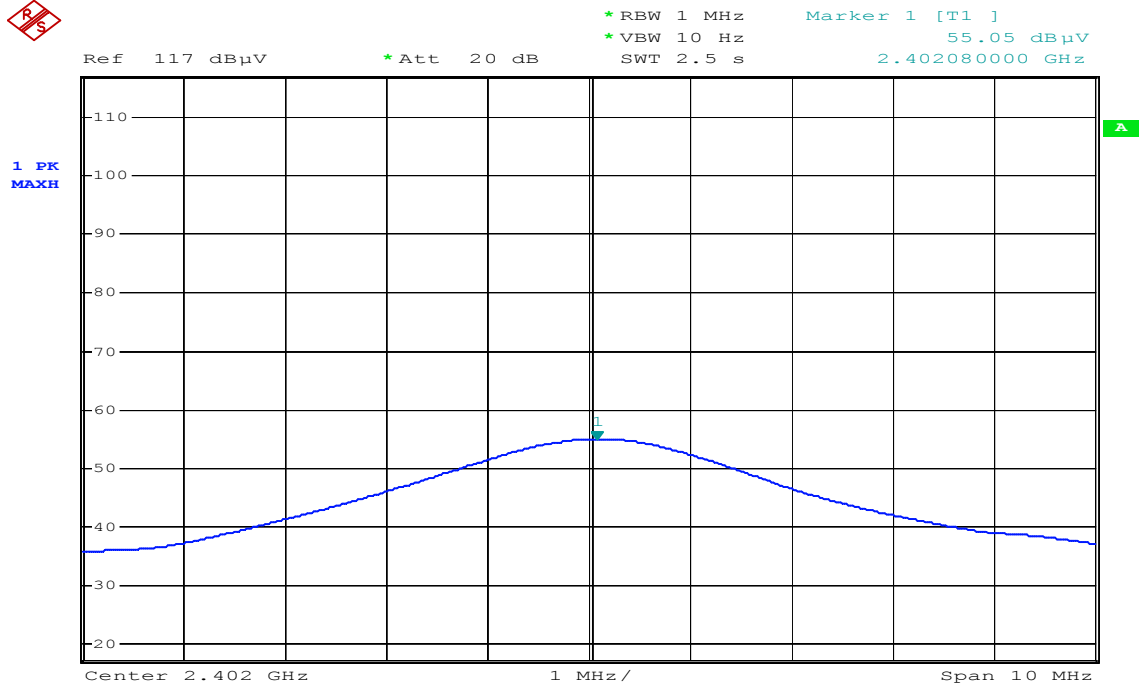


Date: 24.OCT.2008 10:46:56



Detector mode: Peak


Polarity: Horizontal

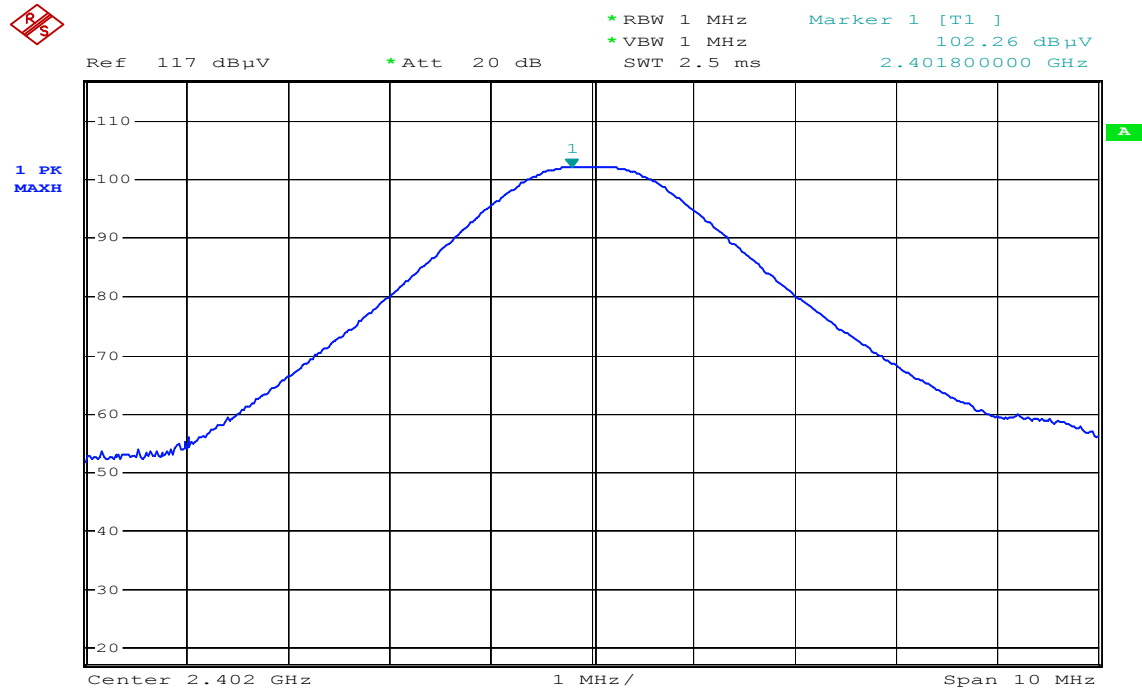

Date: 24.OCT.2008 10:43:12

Detector mode: Average

Polarity: Horizontal

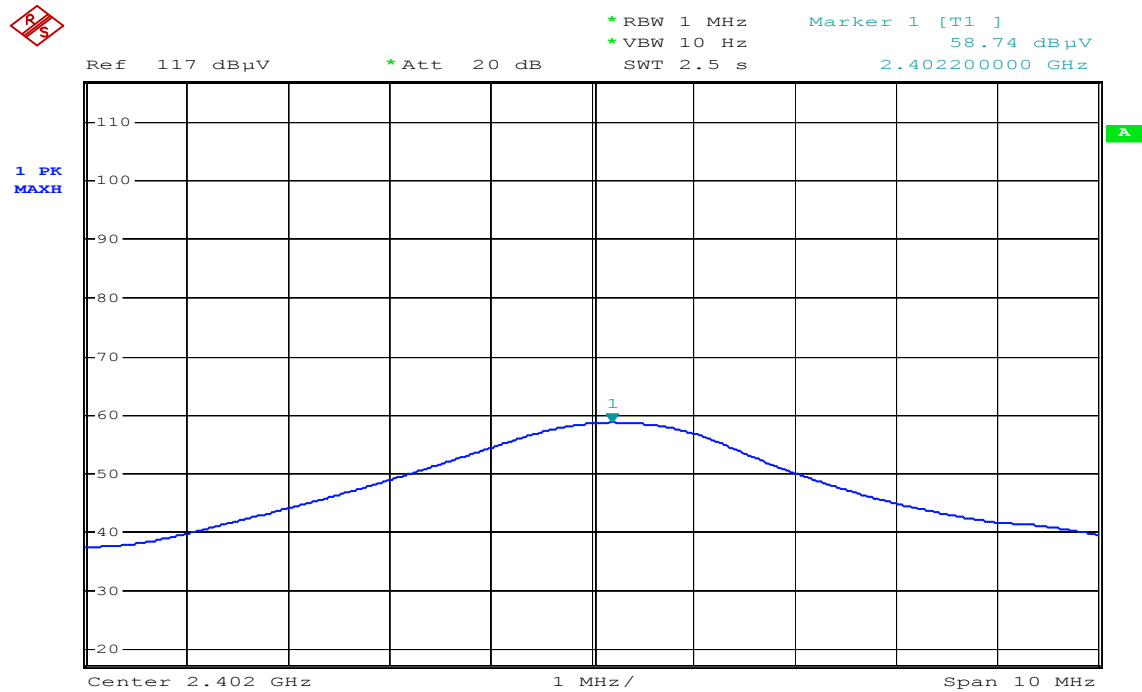

Date: 24.OCT.2008 10:43:44




CH Mid

Detector mode: Peak

Polarity: Vertical



Ref 117 dBμV * Att 20 dB * RBW 1 MHz Marker 1 [T1]
* VBW 1 MHz 94.73 dBμV
SWT 2.5 ms 2.440780000 GHz

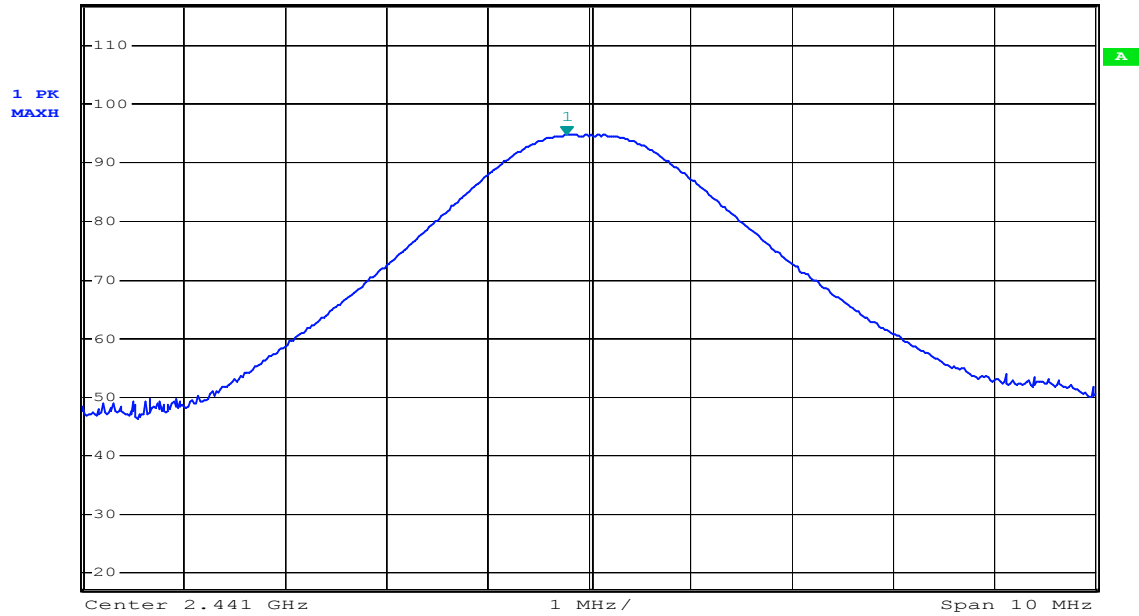


Date: 24.OCT.2008 12:34:07

Detector mode: Average

Polarity: Vertical



Ref 117 dBμV * Att 20 dB * RBW 1 MHz Marker 1 [T1]
* VBW 10 Hz 55.51 dBμV
SWT 2.5 s 2.441060000 GHz

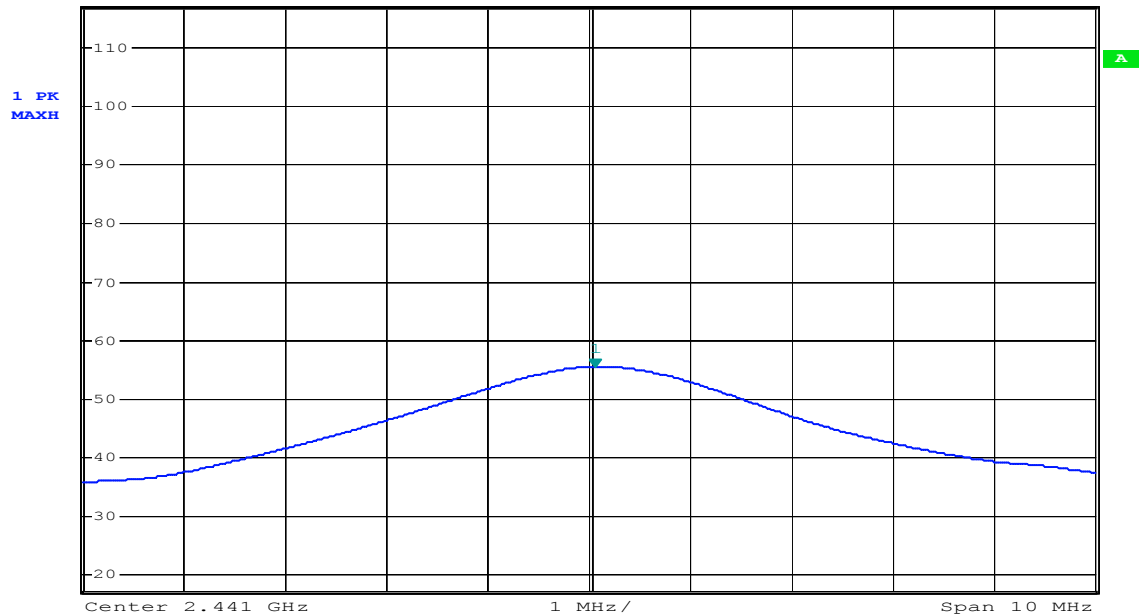


Date: 24.OCT.2008 12:34:33



Detector mode: Peak


Polarity: Horizontal

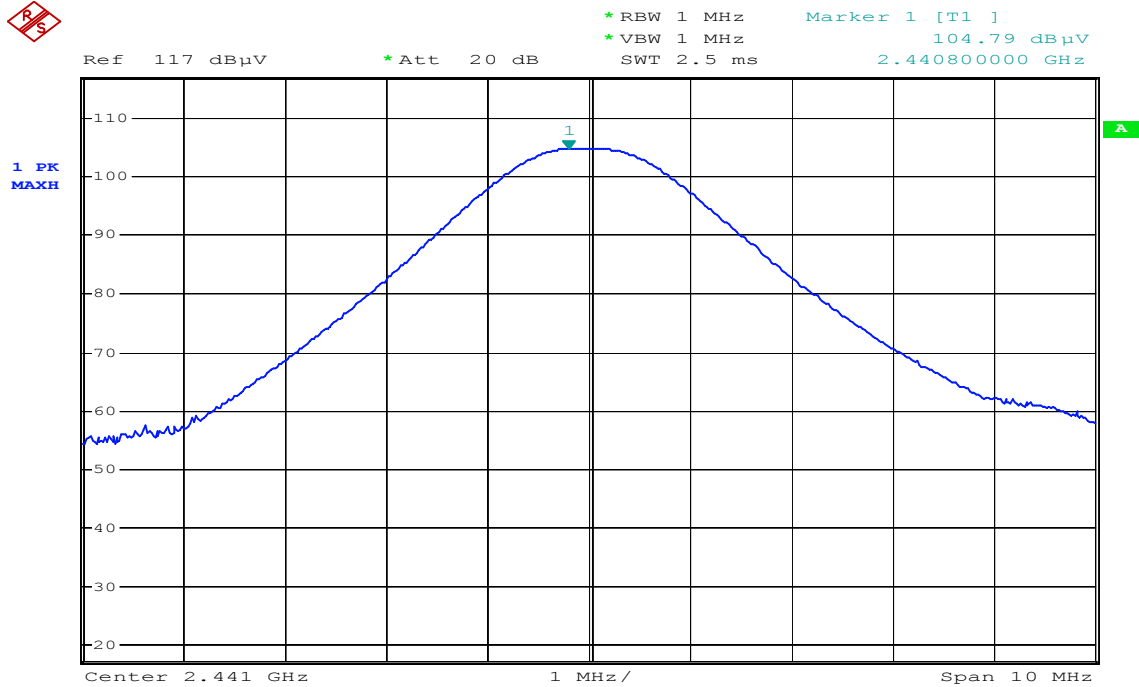

Date: 24.OCT.2008 12:31:42

Detector mode: Average

Polarity: Horizontal

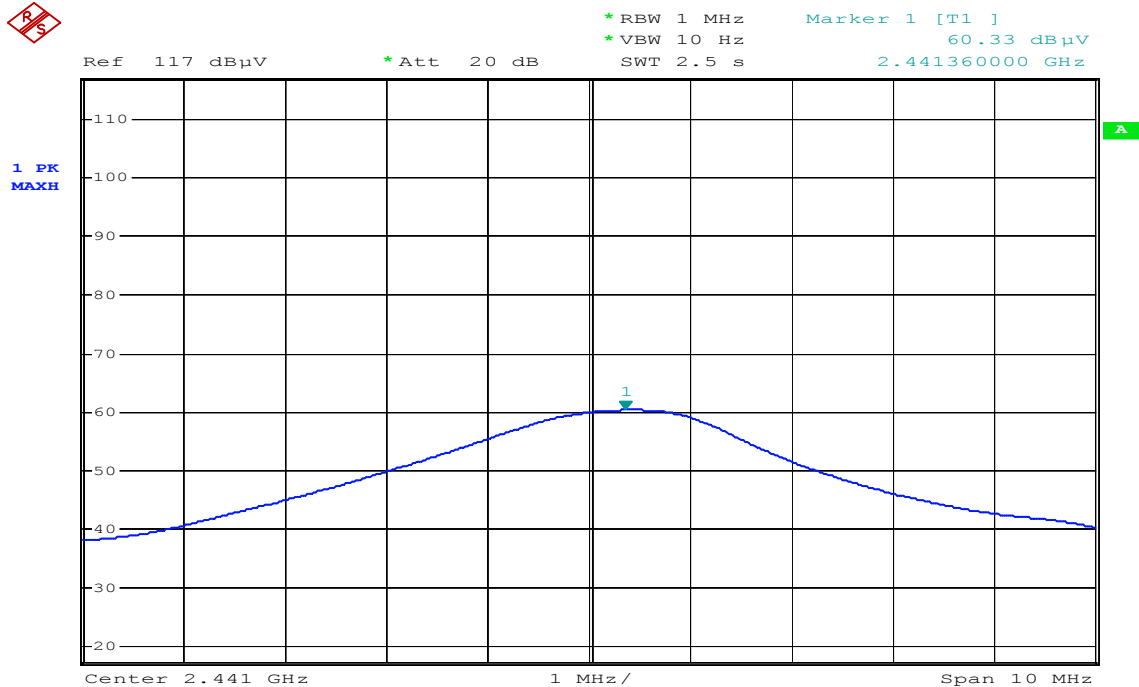

Date: 24.OCT.2008 12:32:03




CH High

Detector mode: Peak

Polarity: Vertical



Ref 117 dBμV * Att 20 dB * RBW 1 MHz Marker 1 [T1]
* VBW 1 MHz 90.89 dBμV
SWT 2.5 ms 2.479800000 GHz

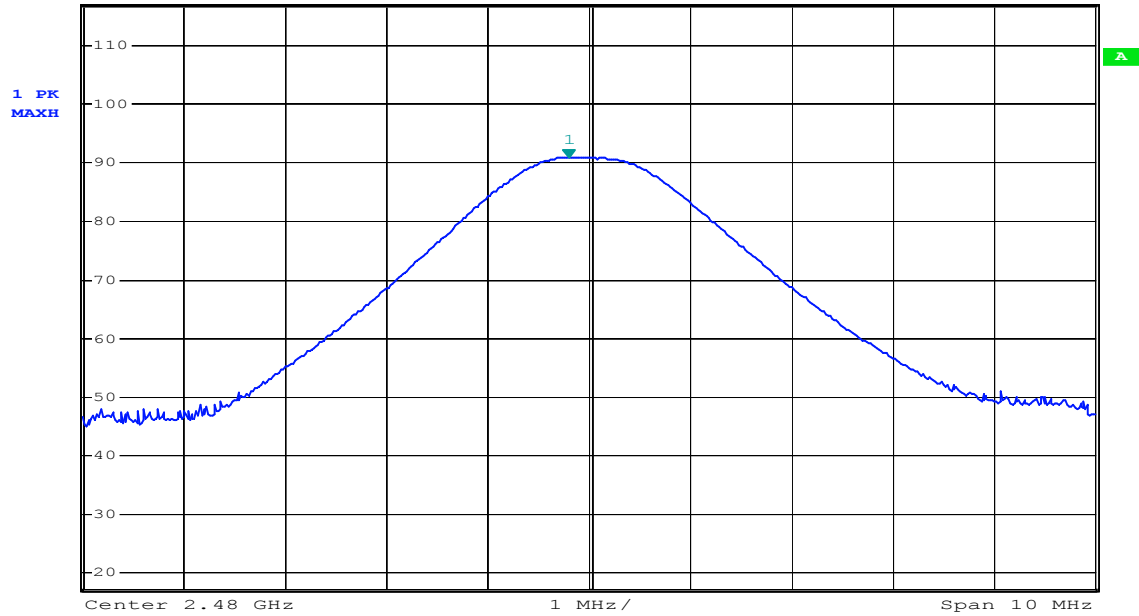


Date: 24.OCT.2008 11:05:38

Detector mode: Average

Polarity: Vertical



Ref 117 dBμV * Att 20 dB * RBW 1 MHz Marker 1 [T1]
* VBW 10 Hz 54.05 dBμV
SWT 2.5 s 2.480160000 GHz

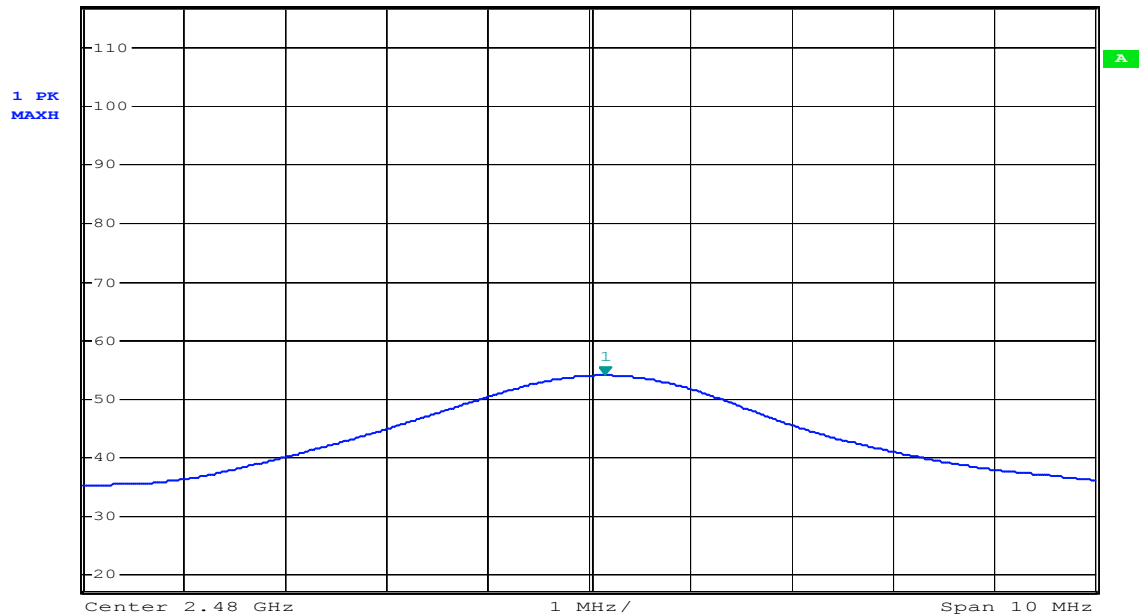


Date: 24.OCT.2008 11:06:04



Detector mode: Peak


Polarity: Horizontal

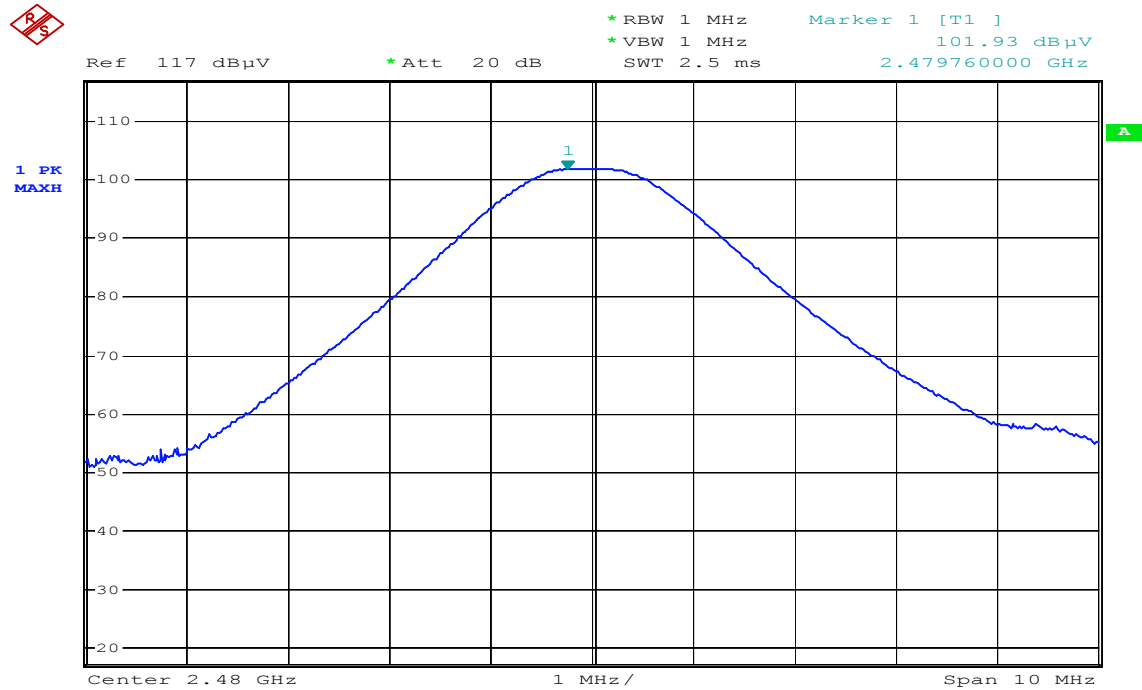

Date: 24.OCT.2008 11:06:56

Detector mode: Average

Polarity: Horizontal

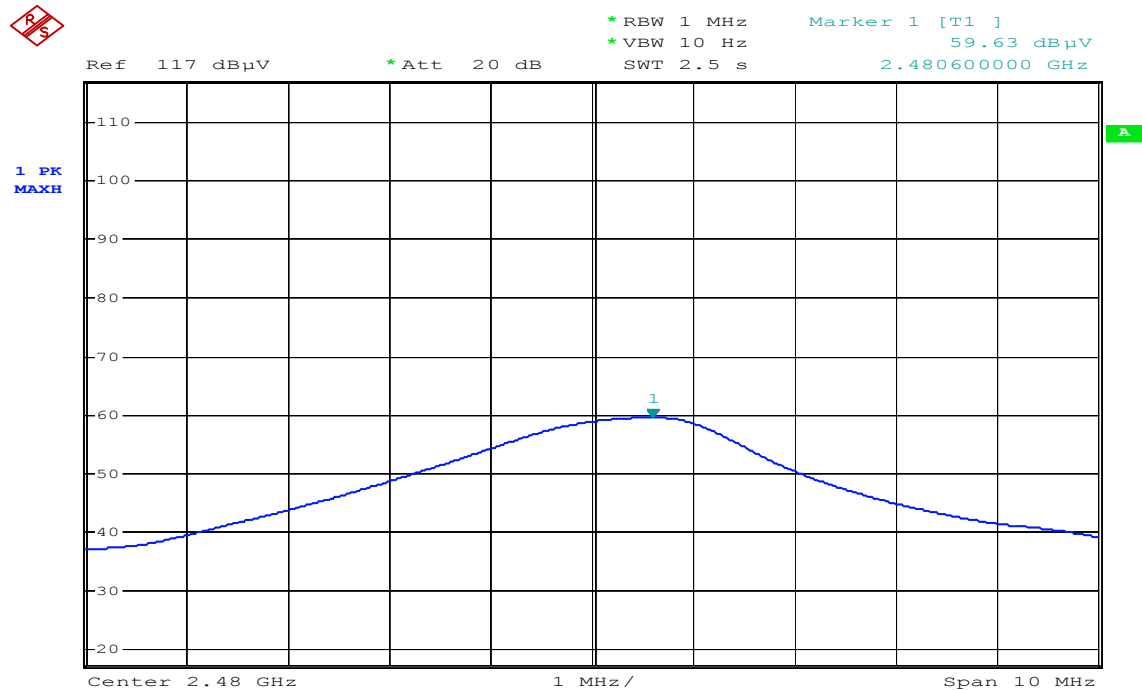

Date: 24.OCT.2008 11:07:21



7.4 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA

TEST DATA

Operation Mode: Charging and Normal Link **Test Date:** May 31, 2008
Temperature: 28°C **Tested by:** Alonso Lu
Humidity: 54% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.18	45.59	38.11	0.20	45.79	38.31	64.49	54.49	-18.70	-16.18	L1
0.30	35.56	31.13	0.20	35.76	31.33	60.24	50.24	-24.48	-18.91	L1
0.42	31.85	28.70	0.18	32.03	28.88	57.45	47.45	-25.42	-18.57	L1
0.54	28.19	23.74	0.10	28.29	23.84	56.00	46.00	-27.71	-22.16	L1
0.83	26.82	22.93	0.10	26.92	23.03	56.00	46.00	-29.08	-22.97	L1
13.01	31.38	25.99	1.14	32.52	27.13	60.00	50.00	-27.48	-22.87	L1
0.18	46.56	38.08	0.20	46.76	38.28	64.49	54.49	-17.73	-16.21	L2
0.24	39.99	34.52	0.20	40.19	34.72	62.10	52.10	-21.91	-17.38	L2
0.30	34.55	29.72	0.20	34.75	29.92	60.24	50.24	-25.49	-20.32	L2
0.54	26.86	22.46	0.10	26.96	22.56	56.00	46.00	-29.04	-23.44	L2
3.81	26.22	17.38	0.20	26.42	17.58	56.00	46.00	-29.58	-28.42	L2
13.01	31.40	26.04	0.98	32.38	27.02	60.00	50.00	-27.62	-22.98	L2


Remark:

- 1. The measuring frequencies range between 0.15 MHz and 30 MHz.*
- 2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.*
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.*
- 4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*



Test Plot

Conducted emissions (Line 1)

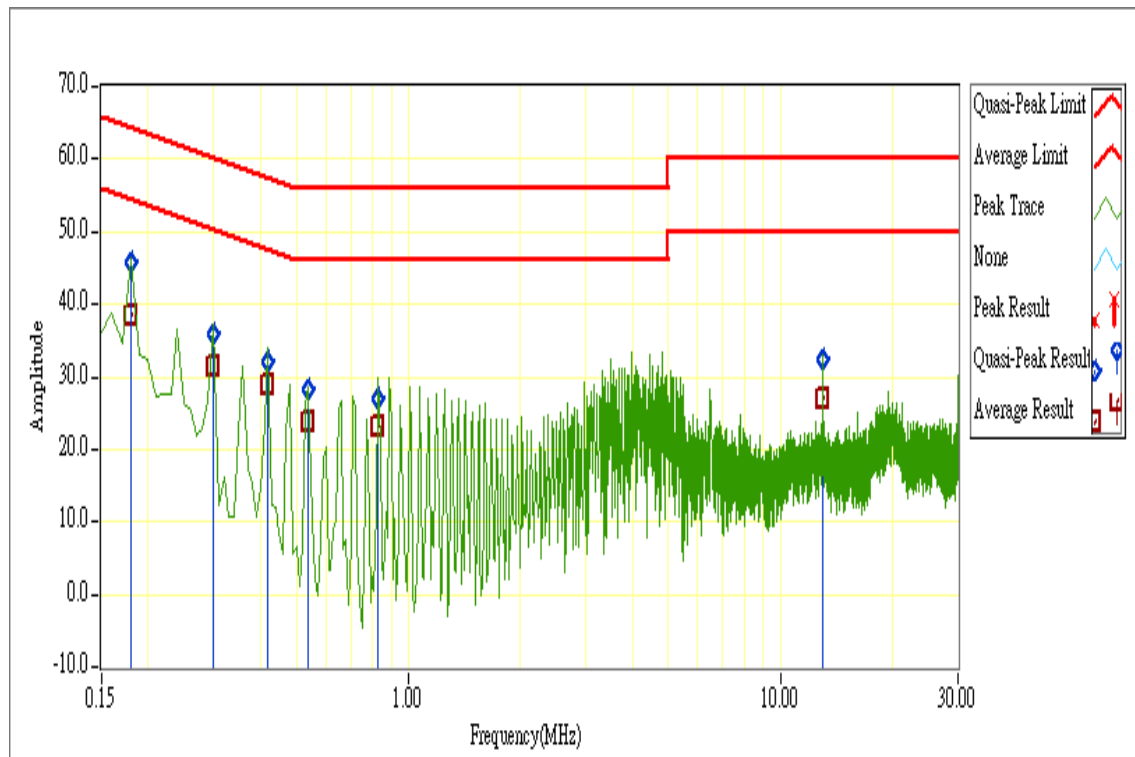

Conducted emissions (Line 2)

