

Test Report No. 7191025682-EEC12/03
dated 22 Feb 2012



PSB Singapore

Note: This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

Choose certainty.
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH
47 CFR FCC Parts 15B & C : 2011
OF A
VIERA Touch Pad Controller
[Model : RC2991101]
[FCC ID : RCSRC2991101]

TEST FACILITIES

TÜV SÜD PSB Pte Ltd,
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

TÜV SÜD PSB Pte Ltd,
Electrical & Electronics Centre (EEC), Product Services,
13 International Business Park #01-01, Singapore 609932

FCC REG. NO.

160581 (3m and 10m Semi-Anechoic Chamber, International Business Park)

IND. CANADA REG. NO.

2932N-1 (10m Semi-Anechoic Chamber, International Business Park)

PREPARED FOR

Philips Electronics Singapore Pte Ltd
Philips Consumer Lifestyle (Category Peripherals & Control)
620A Lorong 1 Toa Payoh
TP1 Building Level 2
Singapore 319762

Tel : +65 6882 3321

Tel : +65 6882 3321

QUOTATION NUMBER

219144021

JOB NUMBER

7191025682

TEST PERIOD

02 Feb 2012 – 22 Feb 2012

PREPARED BY

Quek Keng Huat
Associate Engineer

APPROVED BY

Lim Cher Hwee
Assistant Vice President



Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221



Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: testing@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

LA-2007-0380-A
LA-2007-0381-F
LA-2007-0382-B
LA-2007-0383-G
LA-2007-0384-G
LA-2007-0385-E
LA-2007-0386-C
LA-2010-0464-D

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
3 Science Park Drive, #04-01/05
The Franklin, Singapore 118223
TUV®

TABLE OF CONTENTS

TEST SUMMARY	3
PRODUCT DESCRIPTION	5
SUPPORTING EQUIPMENT DESCRIPTION.....	6
EUT OPERATING CONDITIONS.....	7
RADIATED EMISSION TEST.....	8
CARRIER FREQUENCY SEPARATION TEST	13
SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST	17
NUMBER OF HOPPING FREQUENCIES TEST	21
AVERAGE FREQUENCY DWELL TIME TEST.....	25
MAXIMUM PEAK POWER TEST	29
RF CONDUCTED SPURIOUS EMISSIONS TEST	31
BAND EDGE COMPLIANCE (CONDUCTED) TEST.....	36
BAND EDGE COMPLIANCE (RADIATED) TEST	39
PEAK POWER SPECTRAL DENSITY TEST.....	44
ANNEX A EUT PHOTOGRAPHS / DIAGRAMS	49
ANNEX B USER MANUAL TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	57
ANNEX C FCC LABEL & POSITION.....	58

TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15: 2011		
15.107(a), 15.207	Conducted Emissions	Not Applicable *See Note 6
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.247(a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247(a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247(b)(1)	Maximum Peak Power	Pass
15.247(d)	RF Conducted Spurious Emissions	Pass
15.247(d)	Band Edge Compliance (Conducted)	Pass
15.247(d)	Band Edge Compliance (Radiated)	Pass
15.247(e)	Peak Power Spectral Density	Pass
1.1310	Maximum Permissible Exposure (MPE)	See Note 8

TEST SUMMARY

Notes

1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
0	2.402GHz
39	2.441GHz
78	2.480GHz

2. The measurements in section 15.247(d) were done based on conducted methods except Band Edge Compliance (Radiated) test.
3. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI C63.4: 2003.
5. The maximum measured RF power of the Equipment Under Test is 3.802dBm.
6. The Equipment Under Test (EUT) is a battery operated device and contains no provision for public utility connections.
7. The EUT was tested using fully charged batteries with DC voltage of +3.20V.
8. The EUT is a handheld device with measured RF power of 3.802dBm, as such, neither MPE nor Specific Absorption Rate (SAR) test is not applicable.

Modifications

No modifications were made.

PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is a VIERA Touch Pad Controller .
Manufacturer	: Philips Electronics Singapore Pte Ltd Philips Consumer Lifestyle (Category Peripherals & Control) 620A Lorong 1 Toa Payoh TP1 Building Level 2 Singapore 319762
Model Number	: RC2991101
FCC ID	: RCSRC2991101
Serial Number	: 3139 228 11111
Microprocessor	: Broadcom
Operating / Transmitting Frequency	: 2.402GHz to 2.480GHz
Clock / Oscillator Frequency	: 24MHz
Modulation	: Gaussian Frequency Shift Keying (GFSK)
Antenna Gain	: -4.0dBi
Port / Connectors	: Nil
Rated Input Power	: +3.2Vdc Alkaline Battery
Accessories	: Nil



SUPPORTING EQUIPMENT DESCRIPTION

The EUT was tested as a stand-alone unit without any supporting equipment.



EUT OPERATING CONDITIONS

47 CFR FCC Part 15
<ol style="list-style-type: none">1. Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)2. Spectrum Bandwidth (20dB Bandwidth Measurement)3. Maximum Peak Power4. RF Conducted Spurious Emissions5. Peak Power Spectral Density6. Band Edge Compliance (Conducted)7. Band Edge Compliance (Radiated)
The EUT was exercised by operating in maximum continuous transmission with frequency hopping off, i.e transmitting at lower, middle and upper channels respectively at one time.
47 CFR FCC Part 15
<ol style="list-style-type: none">1. Carrier Frequency Separation2. Number of Hopping Frequencies3. Average Frequency Dwell Time
The EUT was exercised by operating in maximum continuous transmission with frequency hopping on.

RADIATED EMISSION TEST

47 CFR FCC Part 15.205 Restricted Bands

MHz			MHz			MHz			GHz		
0.090	-	0.110	16.42	-	16.423	399.9	-	410	4.5	-	5.15
0.495	-	0.505	16.69475	-	16.69525	608	-	614	5.35	-	5.46
2.1735	-	2.1905	16.80425	-	16.80475	960	-	1240	7.25	-	7.75
4.125	-	4.128	25.5	-	25.67	1300	-	1427	8.025	-	8.5
4.17725	-	4.17775	37.5	-	38.25	1435	-	1626.5	9.0	-	9.2
4.20725	-	4.20775	73	-	74.6	1645.5	-	1646.5	9.3	-	9.5
6.215	-	6.218	74.8	-	75.2	1660	-	1710	10.6	-	12.7
6.26775	-	6.26825	108	-	121.94	1718.8	-	1722.2	13.25	-	13.4
6.31175	-	6.31225	123	-	138	2200	-	2300	14.47	-	14.5
8.291	-	8.294	149.9	-	150.05	2310	-	2390	15.35	-	16.2
8.362	-	8.366	156.52475	-	156.52525	2483.5	-	2500	17.7	-	21.4
8.37625	-	8.38675	156.7	-	156.9	2690	-	2900	22.01	-	23.12
8.41425	-	8.41475	162.0125	-	167.17	3260	-	3267	23.6	-	24.0
12.29	-	12.293	167.72	-	173.2	3332	-	3339	31.2	-	31.8
12.51975	-	12.52025	240	-	285	3345.8	-	3358	36.43	-	36.5
12.57675	-	12.57725	322	-	335.4	3600	-	4400	Above 38.6		
13.36	-	13.41									

47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m) @ 3m
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0*

* Above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.


47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Rohde & Schwarz EMI Test Receiver (20Hz – 26.5GHz)	ESMI	849182/003 848926/007	16 Aug 2012
TDK RF Solutions Hybrid Log Periodic Antenna (30MHz-3GHz)	HLP-3003C	130238	19 Mar 2012
TDK RF Solution Horn Antenna (1GHz-18GHz)	HRN-0118	130256	15 Mar 2012
Sonoma Preamplifier (9kHz – 1GHz)	310N	270640	03 Jan 2013
Toyo MicroWave Preamplifier (1GHz - 18GHz)	TPA0188-36	1005	24 Jun 2012
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	19 Apr 2012
Toyo Preamplifier (26.5GHz-40GHz)	HAP26-40W	00000005	19 Apr 2012
Micro-Tronics Bluetooth Notch Filter (Stopband 2.4 - 2.5GHz)	BRM50701	017	13 Aug 2012

RADIATED EMISSION TEST



Radiated Emissions Test Setup (Front View)

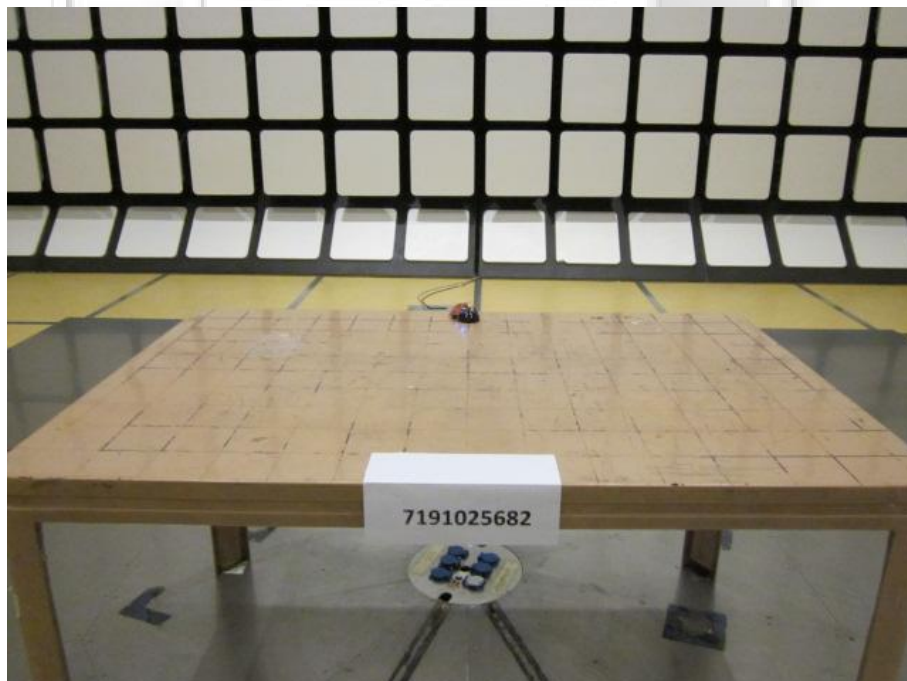

Radiated Emissions Test Setup (Rear View)

RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Operating Mode	Continuous Transmit	Temperature	24°C
Test Input Power	+3.2Vdc	Relative Humidity	58%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Jason Lai

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
34.8340	6.1	40.0	33.9	202	255	V	0
47.9930	10.0	40.0	30.0	107	272	V	0
97.1680	17.9	43.5	25.6	402	359	H	0
455.9960	25.3	46.0	20.7	107	79	V	0
743.9840	20.4	46.0	25.6	100	233	H	0
791.9930	22.8	46.0	23.2	100	322	H	0

Spurious Emissions above 1GHz – 26GHz

Freq (MHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
2240.8930	24.9	74.0	49.1	23.5	54.0	30.5	203	342	V	0
2380.8520	23.3	74.0	50.7	22.5	54.0	31.5	182	290	V	0
2916.0220	26.3	74.0	47.7	25.8	54.0	28.2	101	297	V	0
4540.1720	32.2	74.0	41.8	31.1	54.0	22.9	101	134	V	0
5574.1990	38.7	74.0	35.3	38.3	54.0	15.7	101	120	V	0
5974.7610	42.7	74.0	31.3	42.0	54.0	12.0	203	278	V	0

Spurious Emissions above 1GHz – 26GHz

Freq (MHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
2227.9660	24.8	74.0	49.2	23.6	54.0	30.4	101	203	V	39
2893.8180	26.4	74.0	47.6	25.5	54.0	28.5	204	12	V	39
4555.2820	32.0	74.0	42.0	31.2	54.0	22.8	101	43	V	39
5235.2410	34.1	74.0	39.9	33.3	54.0	20.7	179	168	V	39
5595.5020	38.3	74.0	35.7	37.4	54.0	16.6	205	242	V	39
5983.1760	42.9	74.0	31.1	42.1	54.0	11.9	179	218	V	39

Spurious Emissions above 1GHz – 26GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
2904.6400	26.3	74.0	47.7	25.8	54.0	28.2	204	79	V	78
3123.6190	26.8	74.0	47.2	26.1	54.0	27.9	178	232	V	78
4539.9710	32.1	74.0	41.9	31.7	54.0	22.3	204	112	V	78
5238.2680	34.1	74.0	39.9	33.5	54.0	20.5	177	318	V	78
5598.8680	38.3	74.0	35.7	37.8	54.0	16.2	101	202	H	78
5982.4140	42.9	74.0	31.1	42.0	54.0	12.0	204	335	V	78

RADIATED EMISSION TEST

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. The Equipment Under Test (EUT) was found to be in the worst case condition when it was orientated in a horizontal position.
3. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
4. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
5. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 1MHz
6. The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
7. The channel in the table refers to the transmit channel of the EUT.
8. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is $\pm 4.0\text{dB}$.

c

CARRIER FREQUENCY SEPARATION TEST

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Limits

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, the EUT may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW (21dBm).

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.400GHz and 2.405GHz.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
 - a. 2.4385GHz to 2.4435GHz
 - b. 2.477GHz to 2.482GHz

CARRIER FREQUENCY SEPARATION TEST



Carrier Frequency Separation Test Setup



47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Results

Operating Mode	Continuous Transmit	Temperature	22°C
Test Input Power	+3.2Vdc	Relative Humidity	55%
Attached Plots	1 – 4	Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein

Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.000
38 and 39 (2.440GHz and 2.441GHz)	1.000
39 and 40 (2.441GHz and 2.442GHz)	1.000
77 and 78 (2.479GHz and 2.480GHz)	1.000


CARRIER FREQUENCY SEPARATION TEST

Carrier Frequency Separation Plots

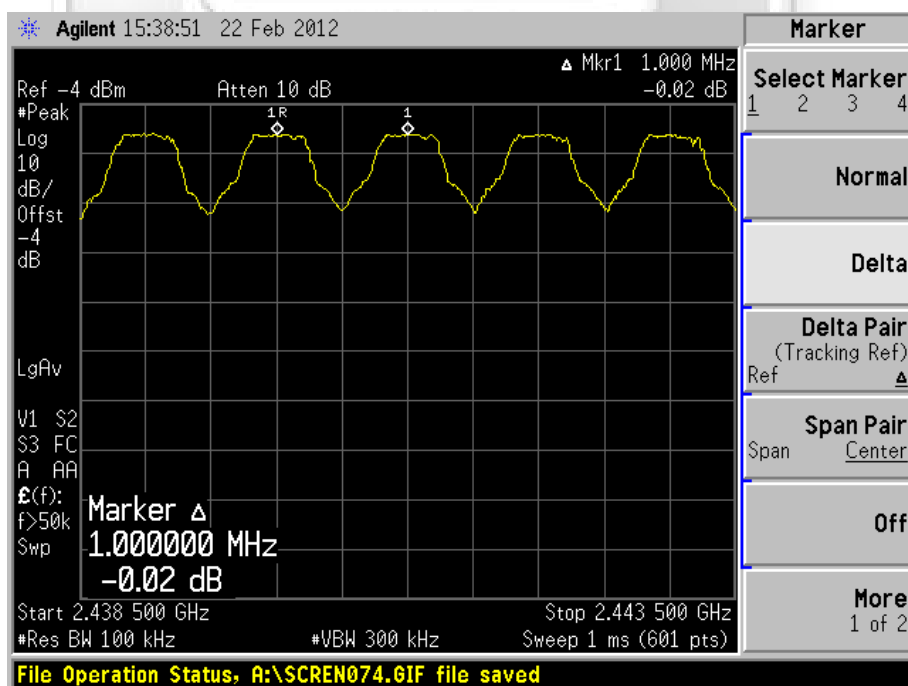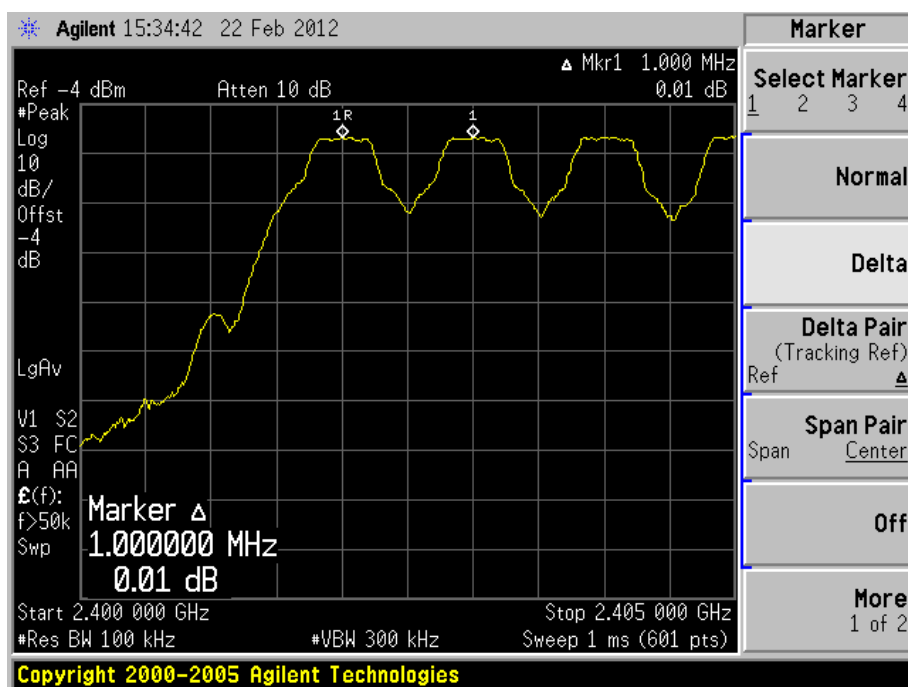


CARRIER FREQUENCY SEPARATION TEST

Carrier Frequency Separation Plots

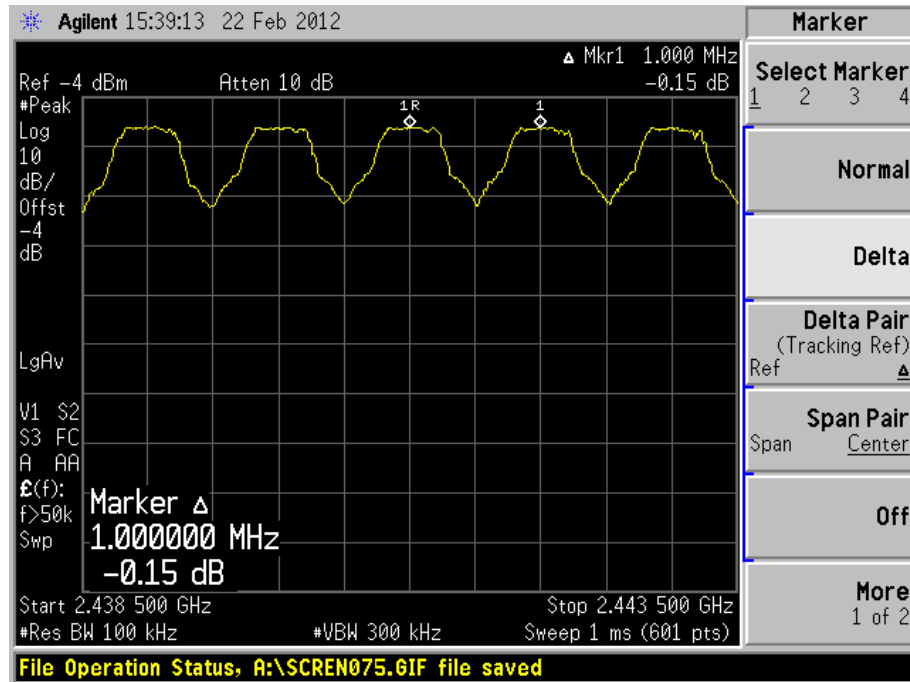

Plot 3 - Channels 39 and 40 Separation

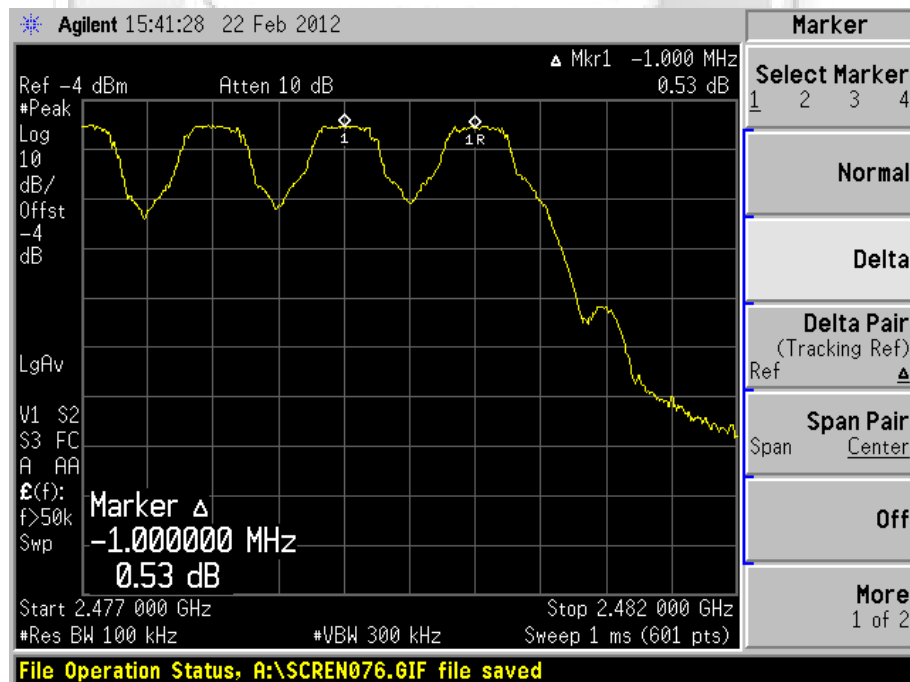

Plot 4 - Channels 77 and 78 Separation

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Limits

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 30kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.
1. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST



Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup


47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Results

Operating Mode	Continuous Transmit	Temperature	22°C
Test Input Power	+3.2Vdc	Relative Humidity	55%
Attached Plots	5 – 7	Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein


Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0	2.402	0.992
39	2.441	0.950
78	2.480	0.958

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (20dB Bandwidth Measurement) Plots

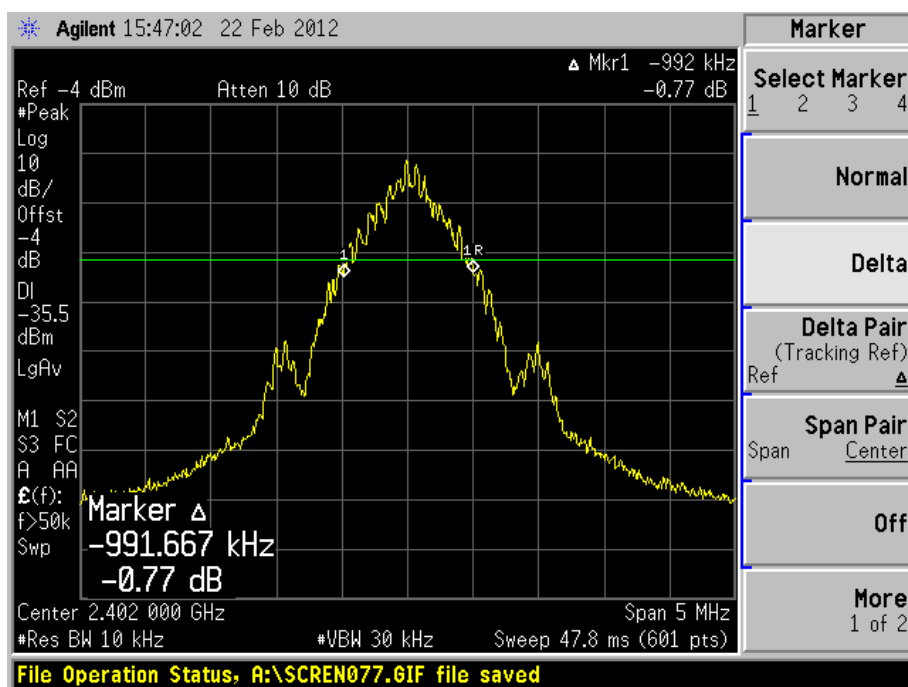


Plot 5 – Channel 0 (lower ch)

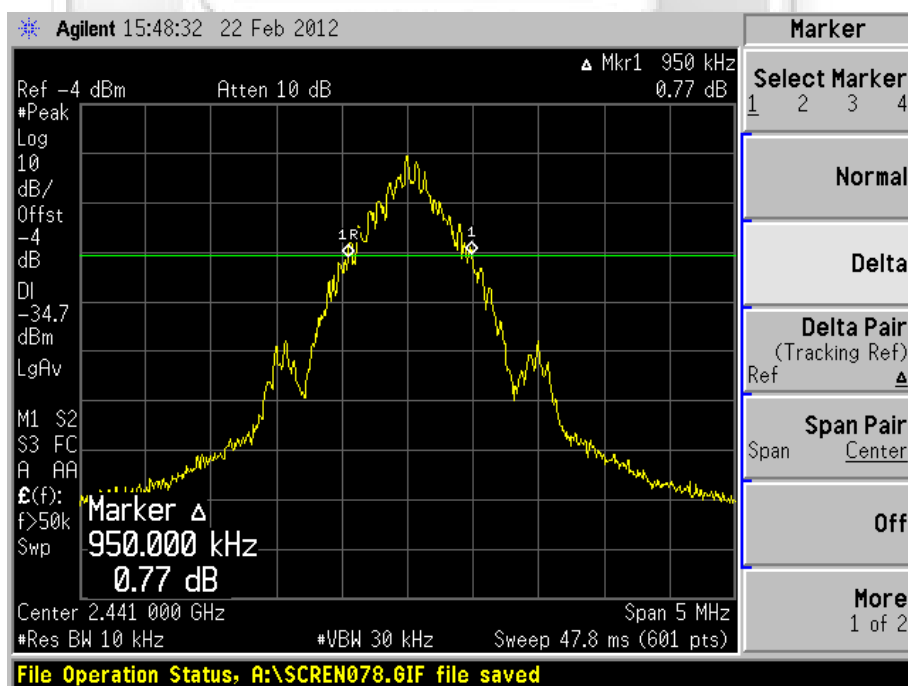

Plot 6 – Channel 39 (mid ch)

SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST

Spectrum Bandwidth (20dB Bandwidth Measurement) Plots

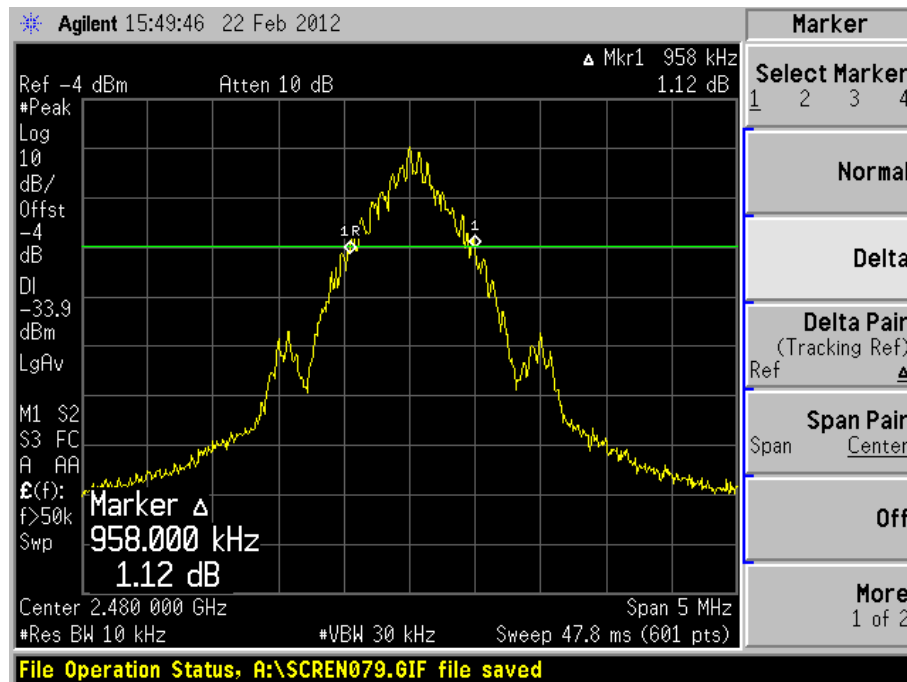

Plot 7 – Channel 78 (upper ch)

NUMBER OF HOPPING FREQUENCIES TEST

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Limits

The EUT shows compliance to the requirements of this section, which states the EUT shall use at least 15 channels.

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.390GHz and 2.420GHz.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
 - a. 2.420GHz to 2.441GHz
 - b. 2.440GHz to 2.461GHz
 - c. 2.460GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.

NUMBER OF HOPPING FREQUENCIES TEST



Number of Hopping Frequencies Test Setup



47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Results

Operating Mode	Continuous Transmit	Temperature	22°C
Test Input Power	+3.2Vdc	Relative Humidity	55%
Attached Plots	8 – 11	Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein

The EUT was found to have 79 hopping frequencies. Please refer to the attached plots.


NUMBER OF HOPPING FREQUENCIES TEST

Number Of Hopping Frequencies Plots

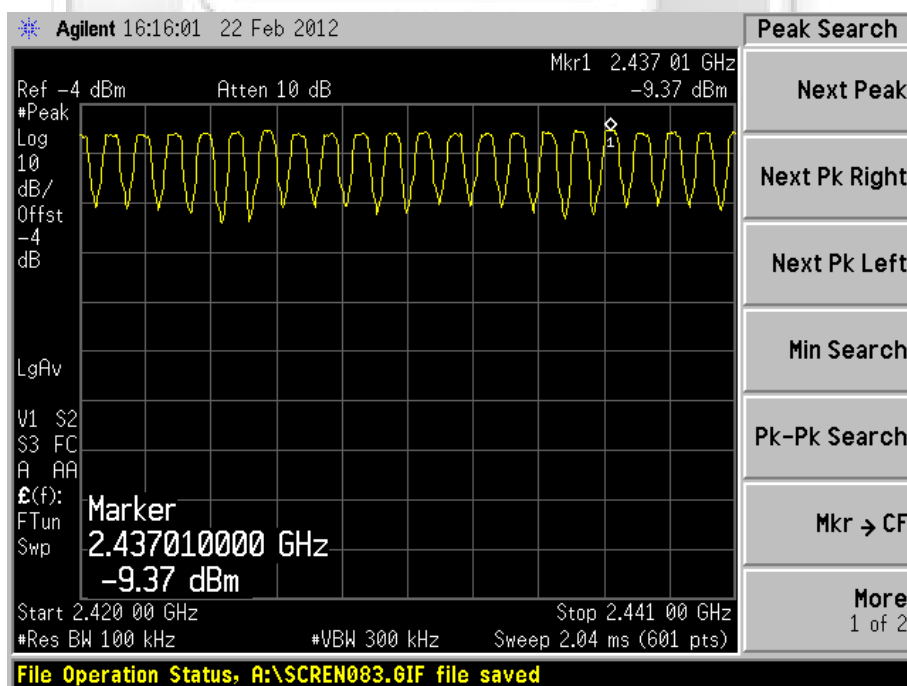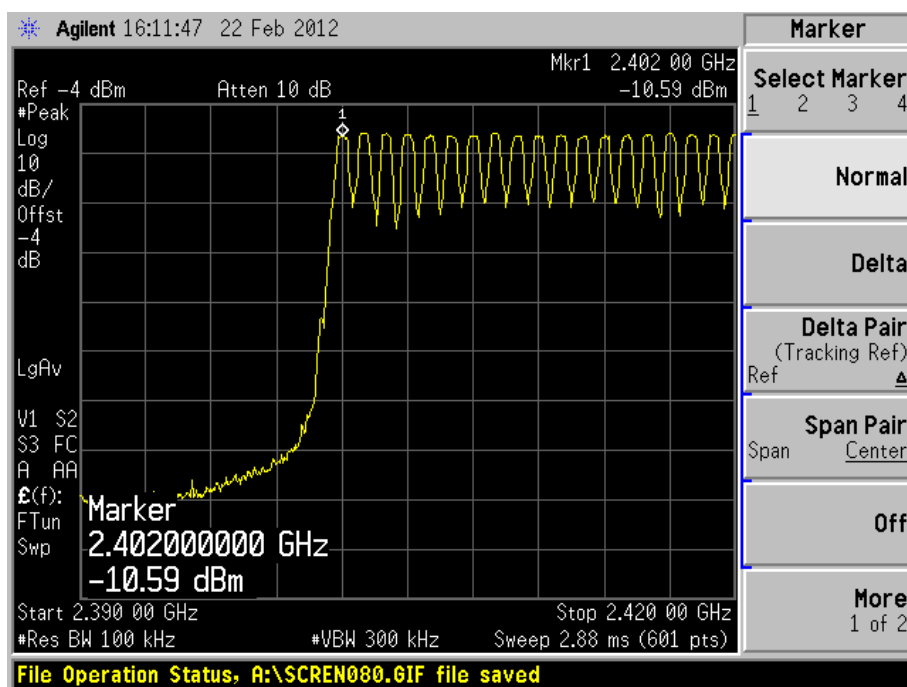


NUMBER OF HOPPING FREQUENCIES TEST

Number Of Hopping Frequencies Plots

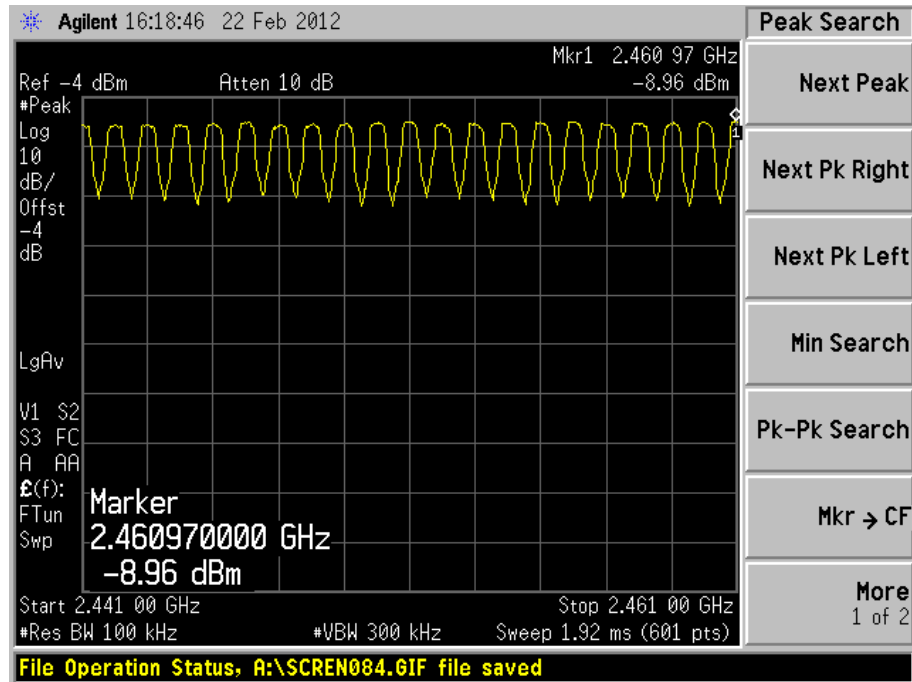

Plot 10 - Channels 39 to 59

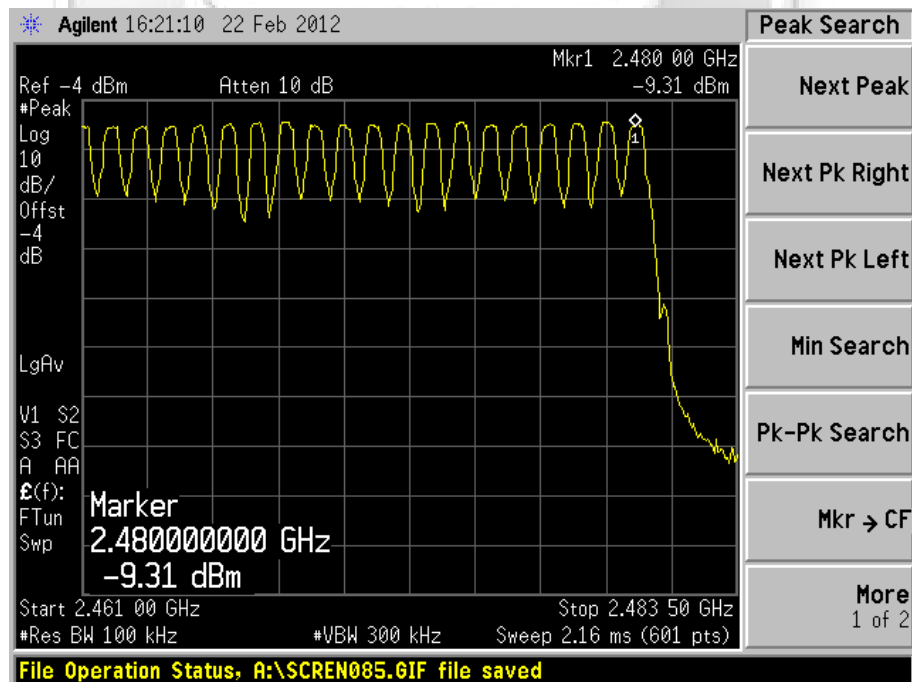

Plot 11 - Channels 59 to 78

AVERAGE FREQUENCY DWELL TIME TEST

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Limits

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed based on general expression as shown below:
$$\text{Average Frequency Dwell Time} = \left[\text{measured time slot length} \times \text{hopping rate} / \text{number of hopping channels} \right] \times \left[0.4 \times \text{number of hopping channels} \right]$$
5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz and 2.480GHz respectively.

AVERAGE FREQUENCY DWELL TIME TEST



Average Frequency Dwell Time Test Setup

47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Results

Test Input Power	+3.2Vdc	Temperature	22°C
Attached Plots	12 – 14	Relative Humidity	55%
Hopping Rate	1600 hops / s	Atmospheric Pressure	1030mbar
Number of Hopping Channels	79 channels	Tested By	Kyaw Soe Hein


Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)
0	2.402	0.0015	0.0006	1.0
39	2.441	0.0016	0.0006	1.0
78	2.480	0.0024	0.0010	1.0

Notes


1. The EUT operates based on 1-slot transmission and 1-slot reception basis. As such, there are [1600 / (1 + 1)] transmissions per second and the time occupancy per channel is [measured time slot length / 2].
2. Average Frequency Dwell Time = [measured time slot length / 2 x hopping rate / 2 / number of hopping channels] x [0.4 x number of hopping channels]

AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots

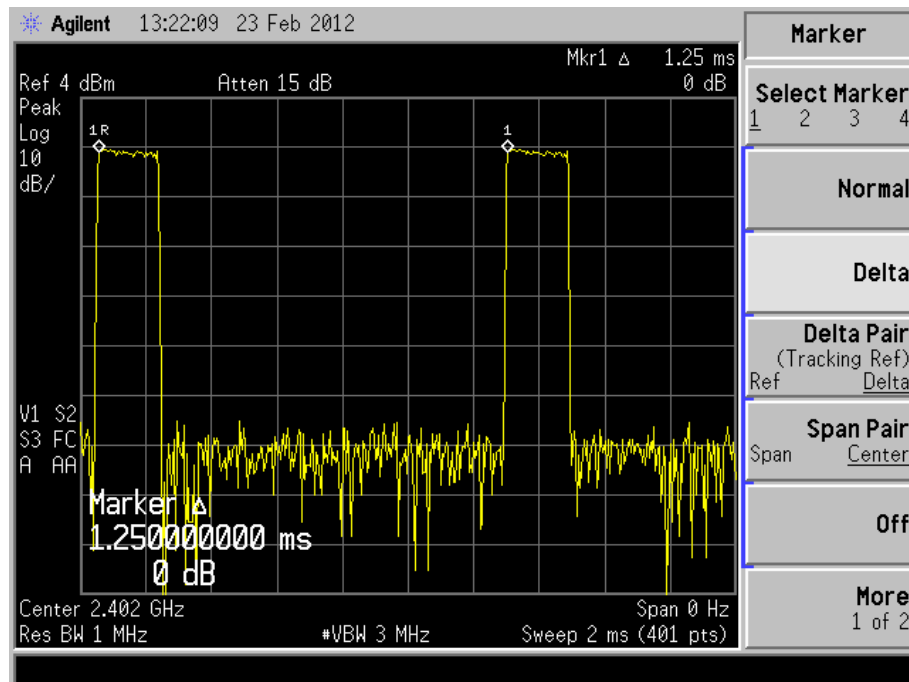


Plot 12 – Channel 0 (lower ch)

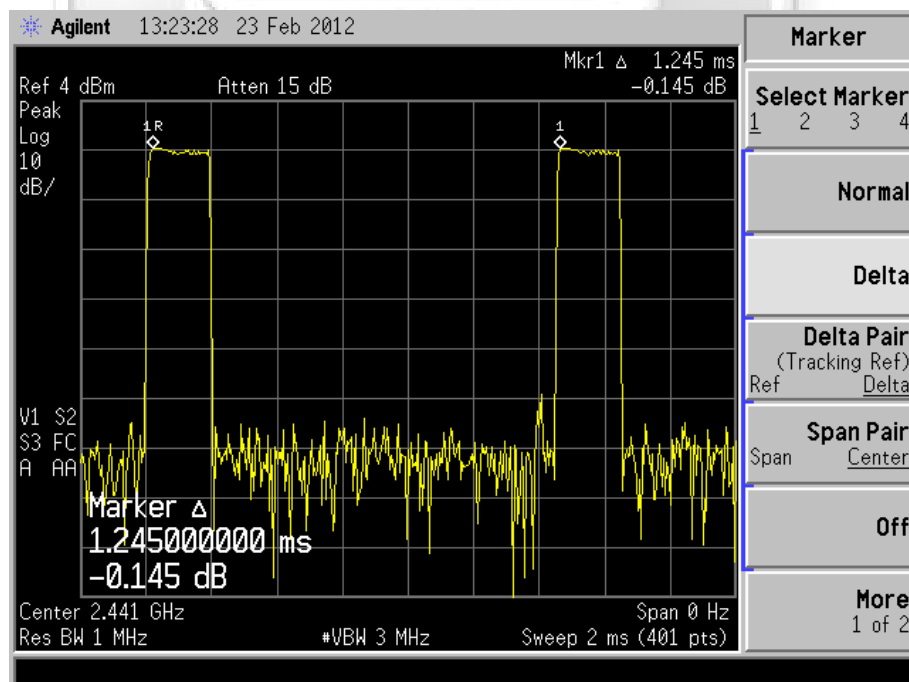

Plot 13 – Channel 39 (mid ch)

AVERAGE FREQUENCY DWELL TIME TEST

Average Frequency Dwell Time Plots

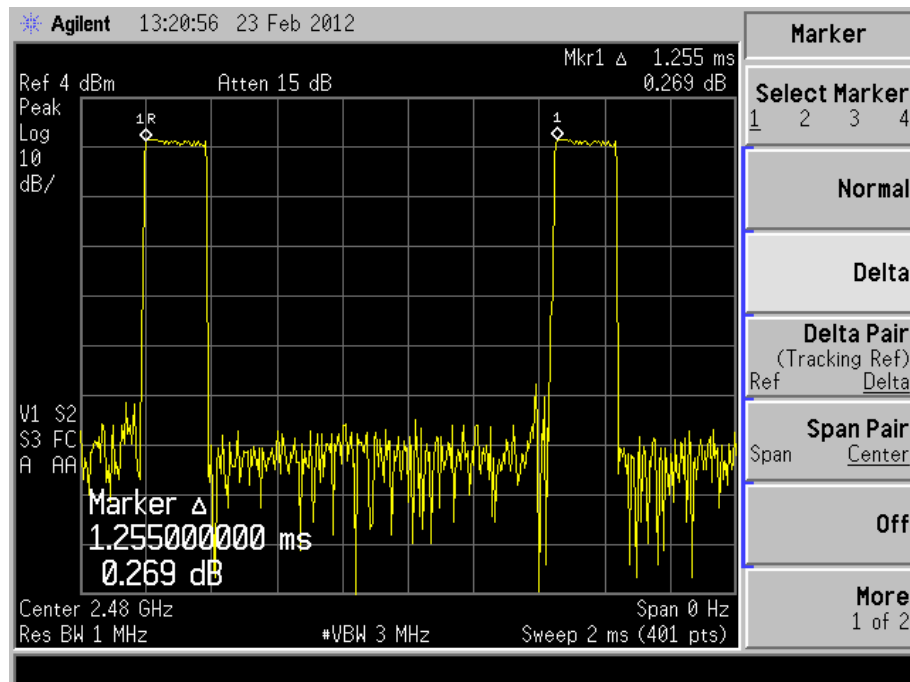

Plot 14 – Channel 78 (upper ch)

MAXIMUM PEAK POWER TEST

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Limits

The EUT shows compliance to the requirements of this section, which states the EUT employing at least 75 non-overlapping hopping channels shall not exceed 1W (30dBm). For the EUT employs other frequency hopping systems, the peak power shall not greater than 0.125W (21dBm).

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Boonton RF Power Meter	4532	72901	24 Mar 2012
Boonton Power Sensor	56218-S/1	1417	24 Mar 2012
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the power meter via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The Equivalent Isotropic Radiated Power (EIRP) of the EUT was computed by adding its antenna gain to the measured maximum peak power.
4. The steps 2 to 3 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

MAXIMUM PEAK POWER TEST



Maximum Peak Power Test Setup

47 CFR FCC Part 15.247(b)(1) Maximum Peak Power Results

Test Input Power	+3.2Vdc	Temperature	22°C
Antenna Gain	-4.0 dBi	Relative Humidity	55%
		Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Maximum EIRP (W)	Limit (W)
0	2.402	0.0015	0.0006	1.0
39	2.441	0.0016	0.0006	1.0
78	2.480	0.0024	0.0010	1.0

RF CONDUCTED SPURIOUS EMISSIONS TEST

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

47 CFR FCC Part 15.247(d) RF Conducted Spurious Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

RF CONDUCTED SPURIOUS EMISSIONS TEST



RF Conducted Spurious Emissions Test Setup



47 CFR FCC Part 15.247(d) RF Conducted Spurious Emissions Results

Operating Mode	Continuous Transmit	Temperature	22°C
Test Input Power	+3.2Vdc	Relative Humidity	55%
Attached Plots	15 – 20	Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein

All spurious signals found were below the specified limit. Please refer to the attached plots.


RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots

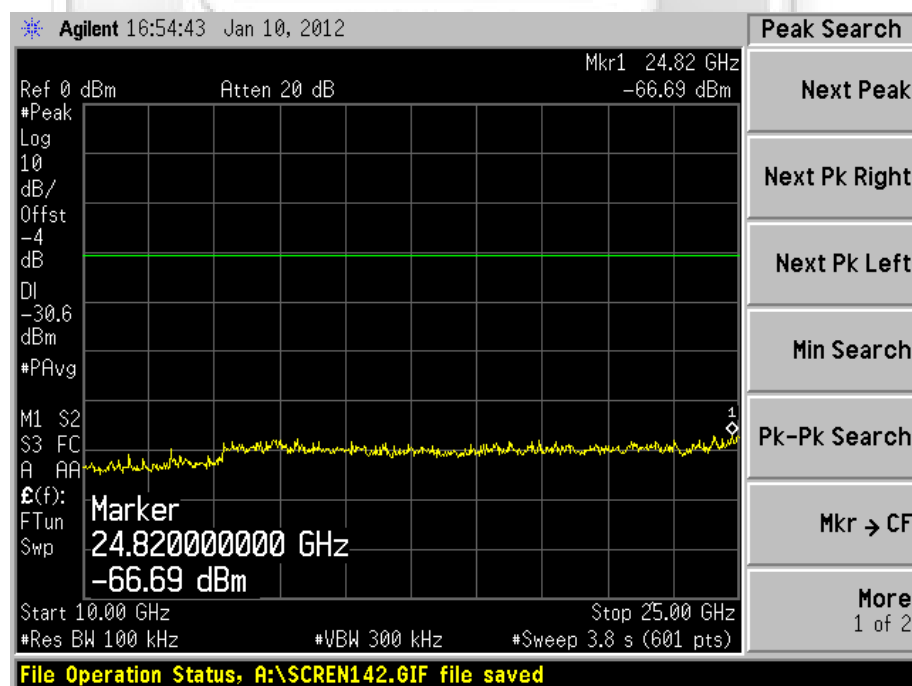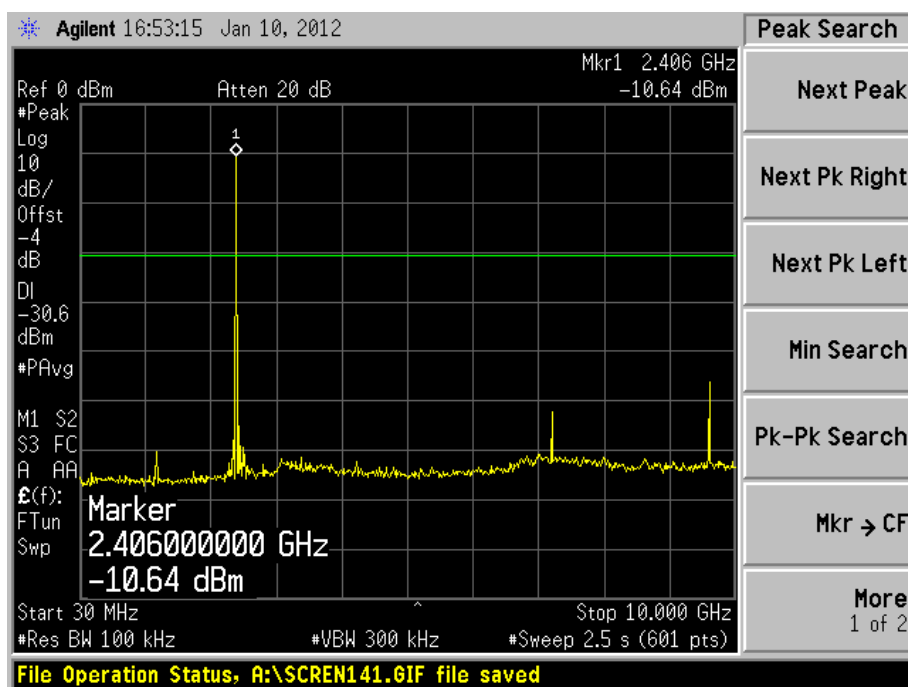


RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots

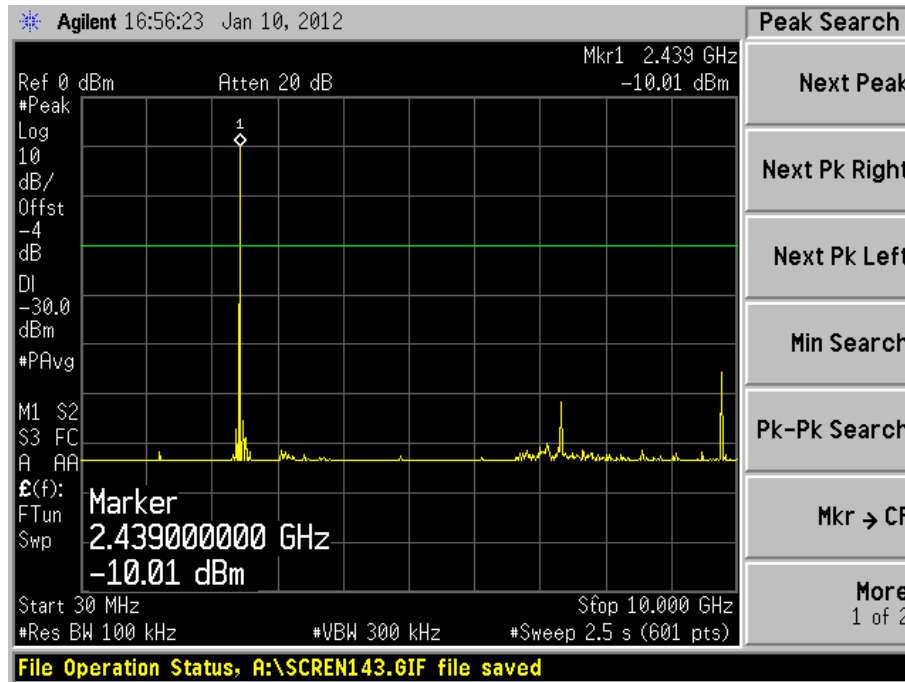


Plot 17 – Channel 39 (mid ch)

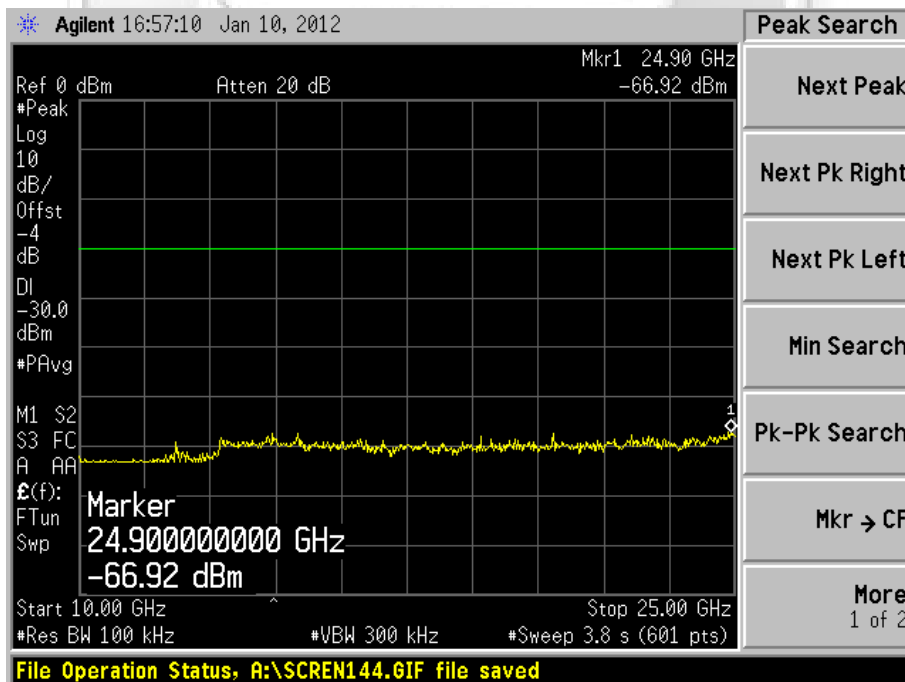


Plot 18 – Channel 39 (mid ch)

RF CONDUCTED SPURIOUS EMISSIONS TEST

RF Conducted Spurious Emissions Plots

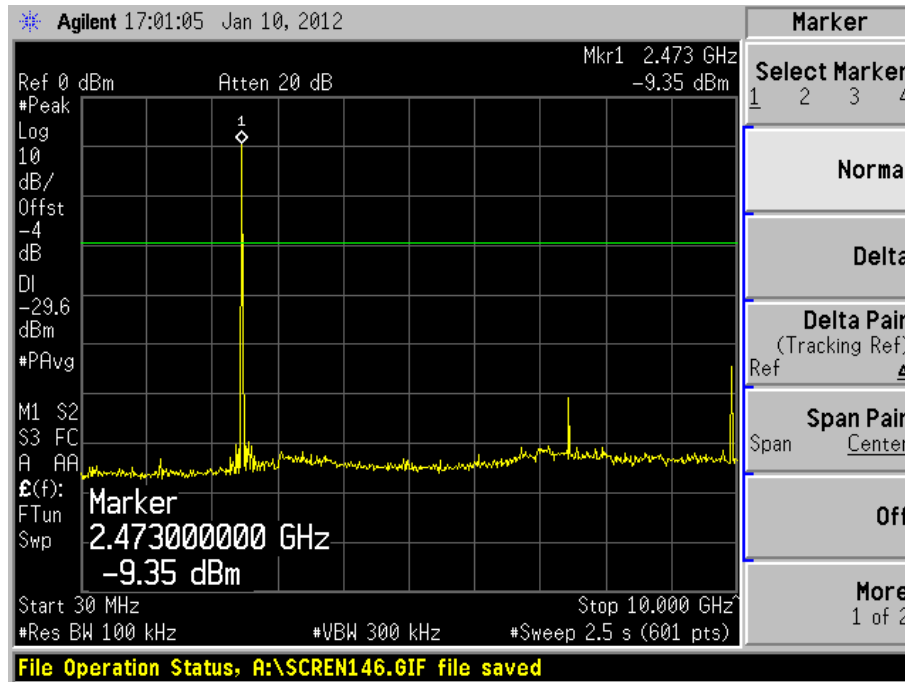

Plot 19 – Channel 78 (upper ch)

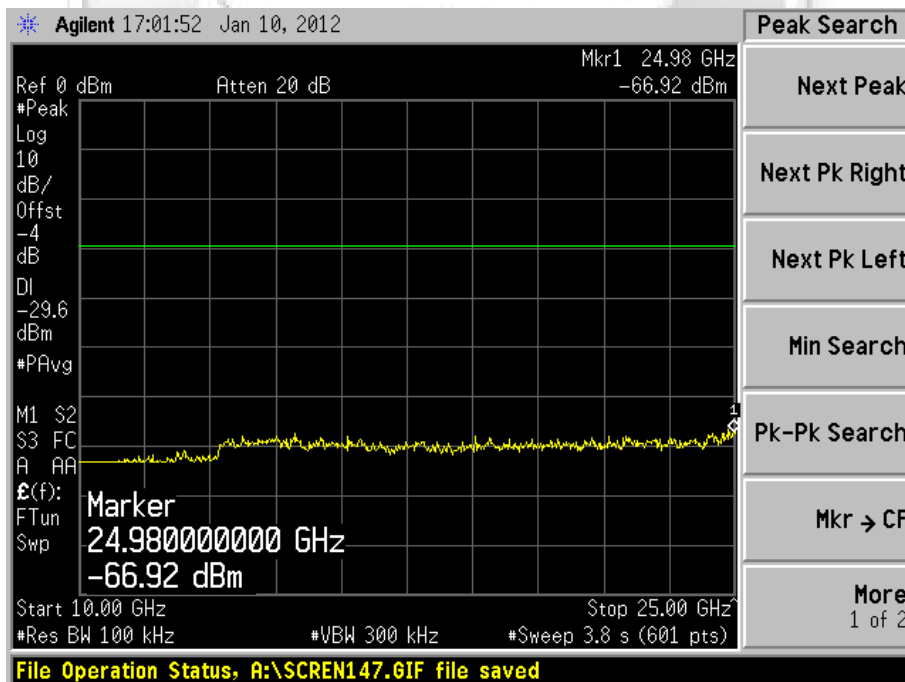

Plot 20 – Channel 78 (upper ch)

BAND EDGE COMPLIANCE (CONDUCTED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

BAND EDGE COMPLIANCE (CONDUCTED) TEST



Band Edge Compliance (Conducted) Test Setup


47 CFR FCC Part 15.247(d) Band Edge Compliance (Conducted) Results

Operating Mode	Continuous Transmit	Temperature	22°C
Test Input Power	+3.2Vdc	Relative Humidity	55%
Attached Plots	21 – 22	Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein


No significant signal was found and they were below the specified limit.

BAND EDGE COMPLIANCE (CONDUCTED) TEST

Band Edge Compliance (Conducted) Plots

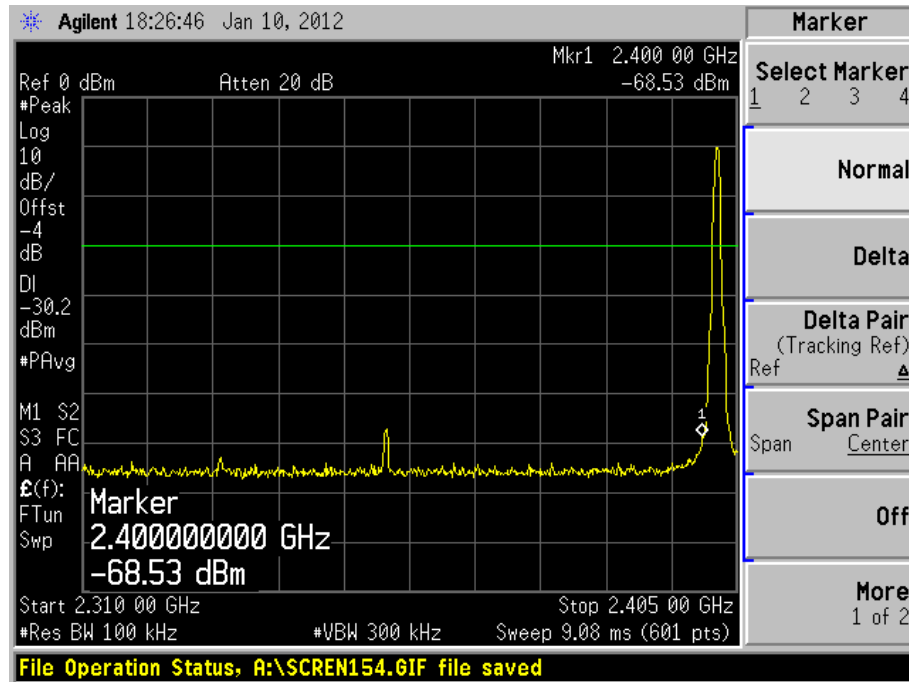

Plot 21 – Lower Band Edge at 2.4000GHz

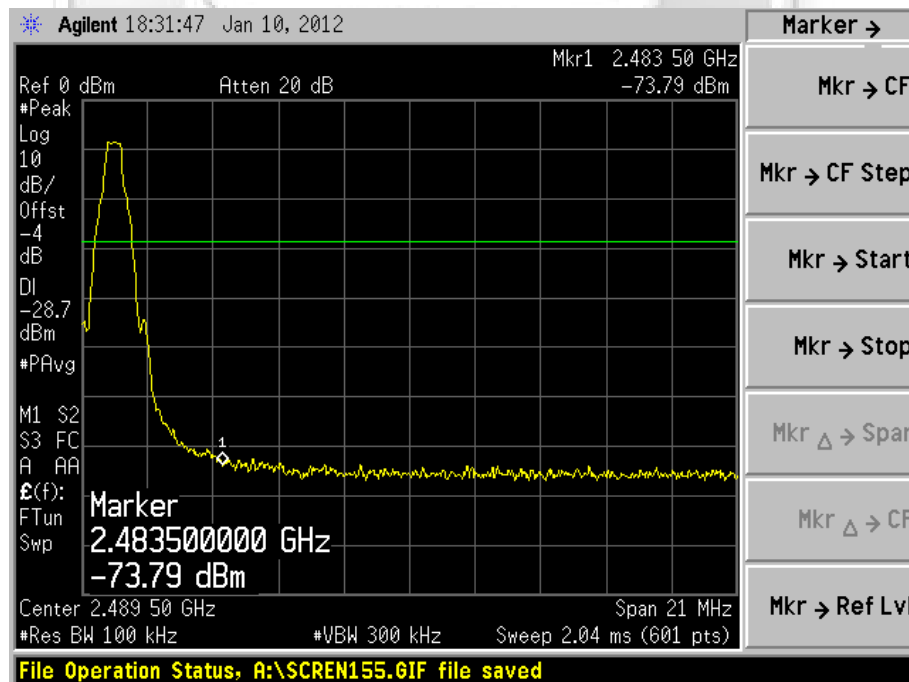

Plot 22 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Rohde & Schwarz EMI Test Receiver (20Hz – 26.5GHz)	ESMI	849182/003 848926/007	16 Aug 2012
TDK RF Solutions Hybrid Log Periodic Antenna (30MHz-3GHz)	HLP-3003C	130238	19 Mar 2012
TDK RF Solution Horn Antenna (1GHz-18GHz)	HRN-0118	130256	15 Mar 2012
Sonoma Preamplifier (9kHz – 1GHz)	310N	270640	03 Jan 2013
Toyo MicroWave Preamplifier (1GHz - 18GHz)	TPA0188-36	1005	24 Jun 2012
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	19 Apr 2012
Toyo Preamplifier (26.5GHz-40GHz)	HAP26-40W	00000005	19 Apr 2012


47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:
 - a. Peak Plot:
RBW = VBW = 1MHz
 - b. Average Plot
RBW = 1MHz, VBW = 10Hz
4. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

BAND EDGE COMPLIANCE (RADIATED) TEST

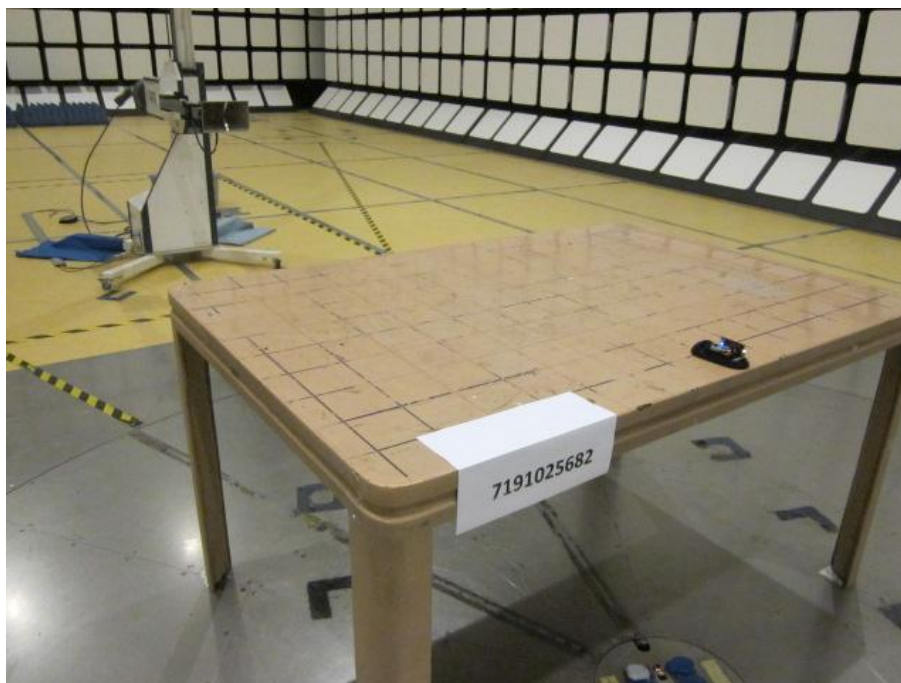

Band Edge Compliance (Radiated) Test Setup


47 CFR FCC Part 15.247(d) Band Edge Compliance (Radiated) Results

Test Input Power	+3.2Vdc	Temperature	22°C
Attached Plots	23 – 28	Relative Humidity	55%
		Atmospheric Pressure	1030mbar
		Tested By	Jason Lai


No significant signal was found and they were below the specified limit.

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

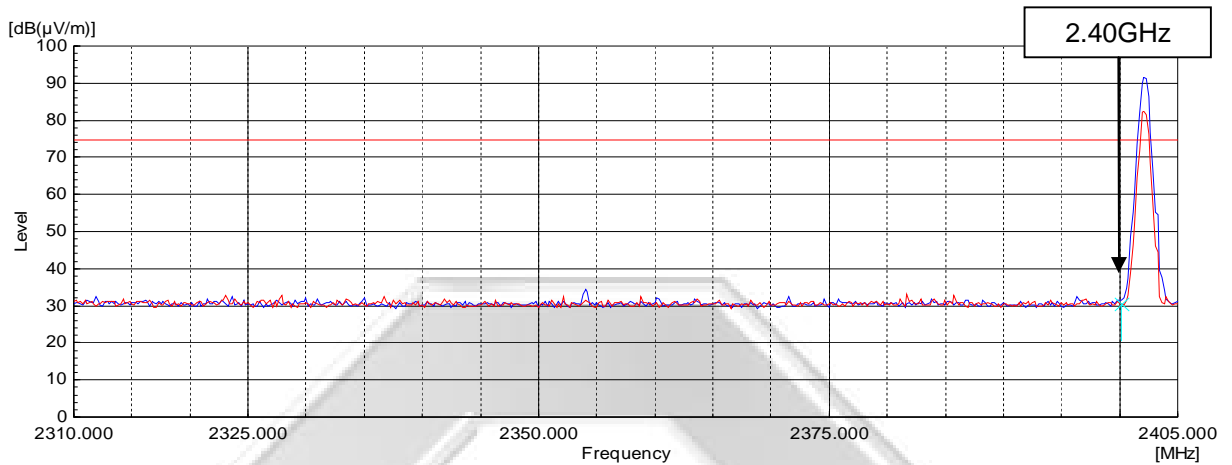


Plot 23 – Lower Band Edge at 2.4000GHz

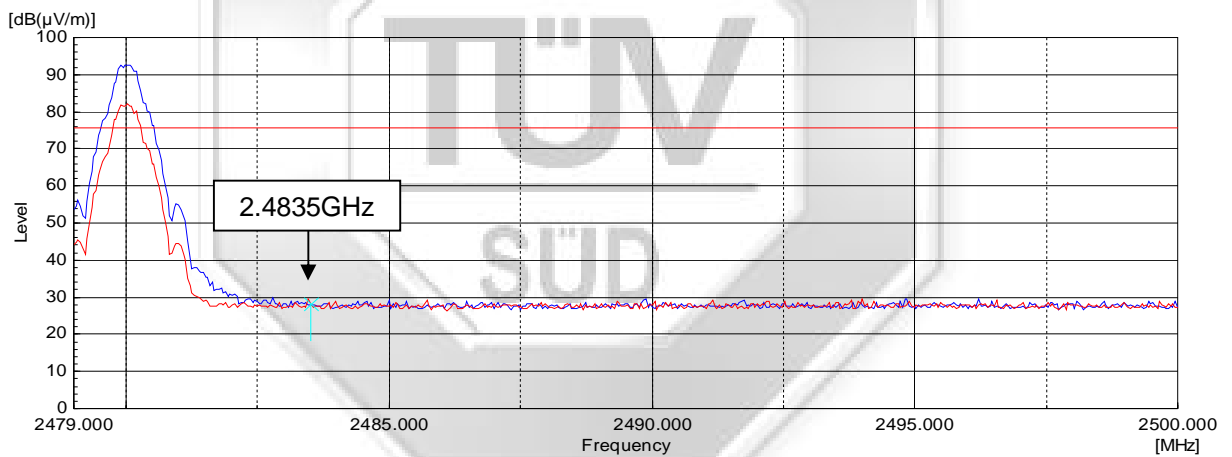


Plot 24 – Upper Band Edge at 2.4835GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band)

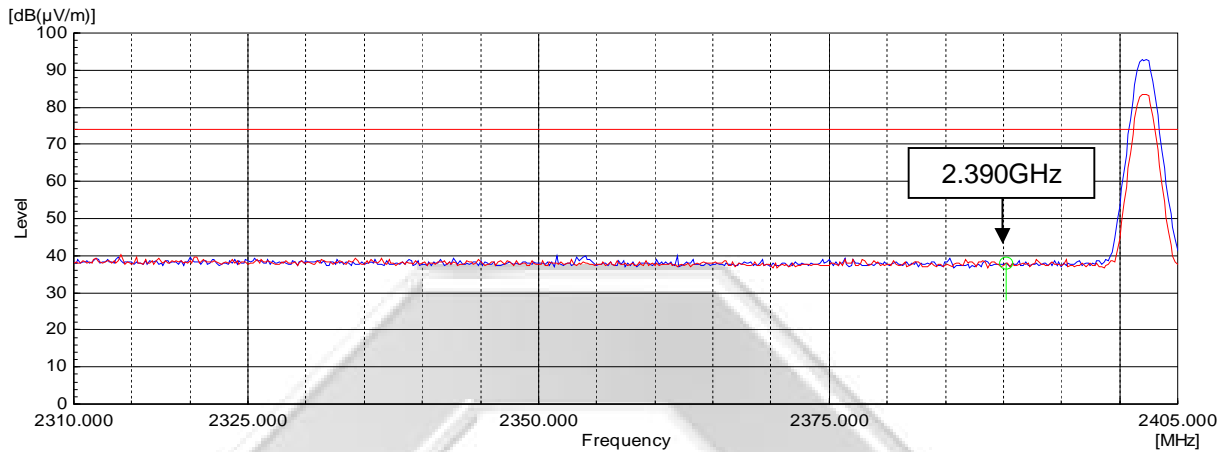


Plot 25 – Peak Plot at Lower Band Edge at 2.4000GHz

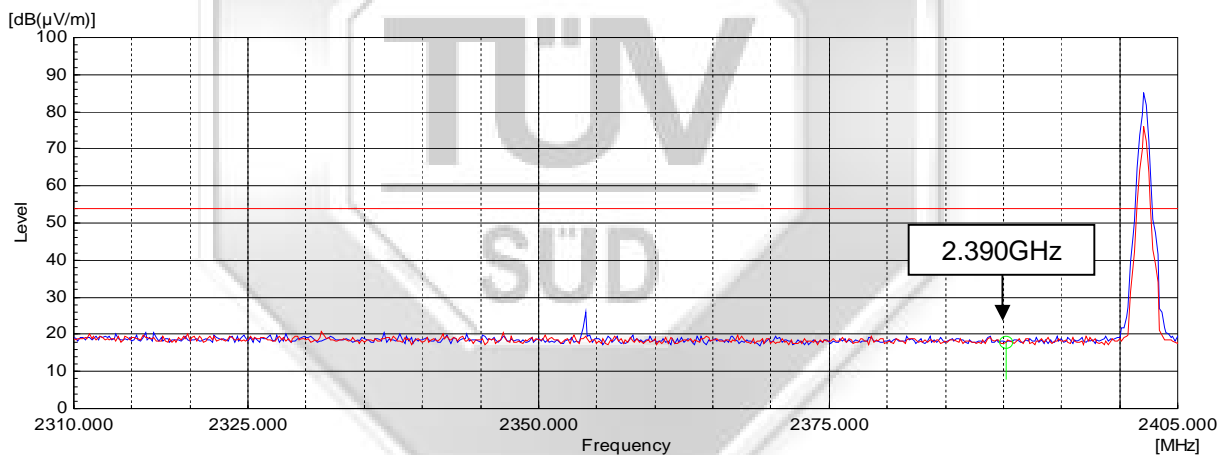


Plot 26 – Average Plot at Lower Band Edge at 2.4000GHz

BAND EDGE COMPLIANCE (RADIATED) TEST

Band Edge Compliance (Radiated) Plots (Restricted Band)

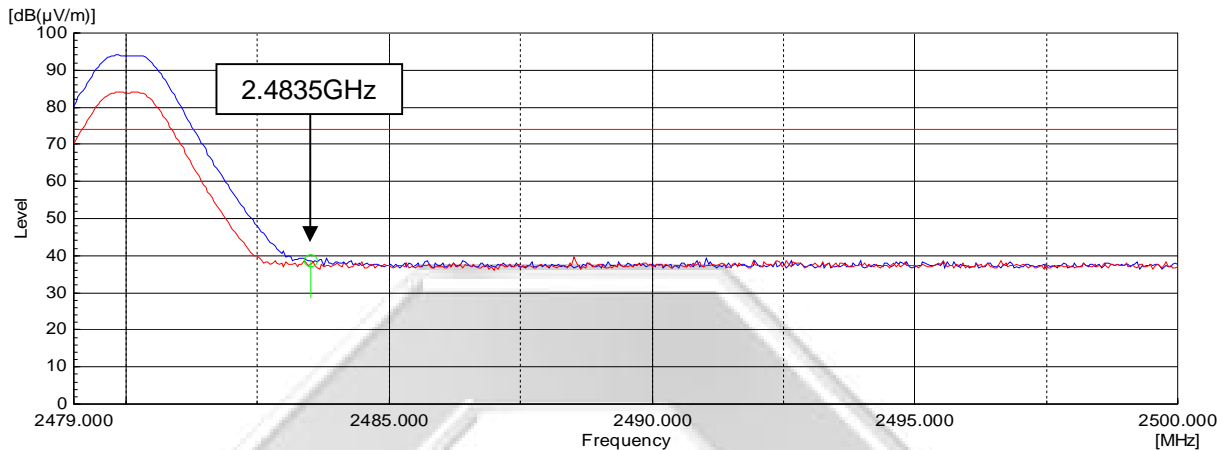

Plot 27 – Peak Plot at Upper Band Edge at 2.4835GHz

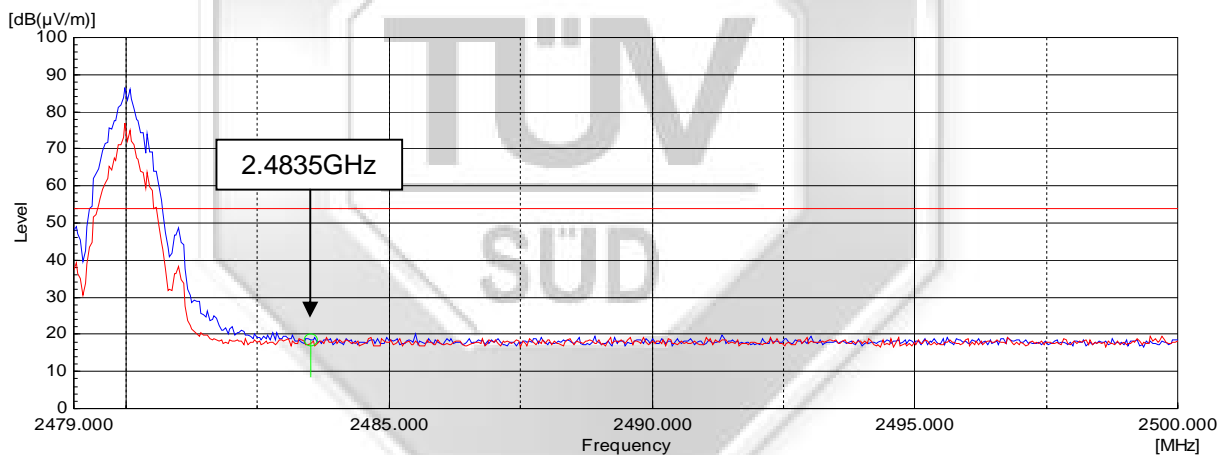

Plot 28 – Average Plot at Upper Band Edge at 2.4835GHz

PEAK POWER SPECTRAL DENSITY TEST

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Limits

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Instrumentation

Instrument	Model	S/No	Cal Due Date
Agilent DC Power Supply	E3602A	MY40000448	Output Monitor
Agilent Spectrum Analyzer	E4440A	MY45304764	10 Jun 2012

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

47 CFR FCC Part 15.247(e) Peak Power Spectral Density Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at Channel 0 (2.402GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

PEAK POWER SPECTRAL DENSITY TEST



Peak Power Spectral Density Test Setup


47 CFR FCC Part 15.247(e) Peak Power Spectral Density Results

Test Input Power	3.2Vdc	Temperature	23°C
Attached Plots	29 – 31	Relative Humidity	55%
		Atmospheric Pressure	1030mbar
		Tested By	Kyaw Soe Hein


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0	2.402	0.0065	6.3
39	2.441	0.0078	6.3
78	2.480	0.0097	6.3

PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots

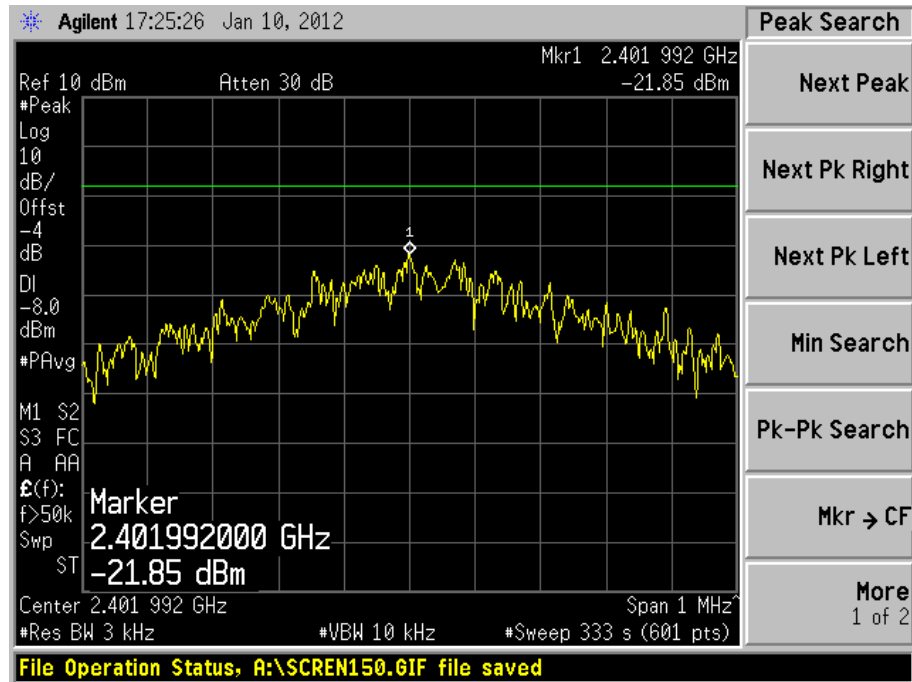


Plot 29 – Channel 0 (lower ch)

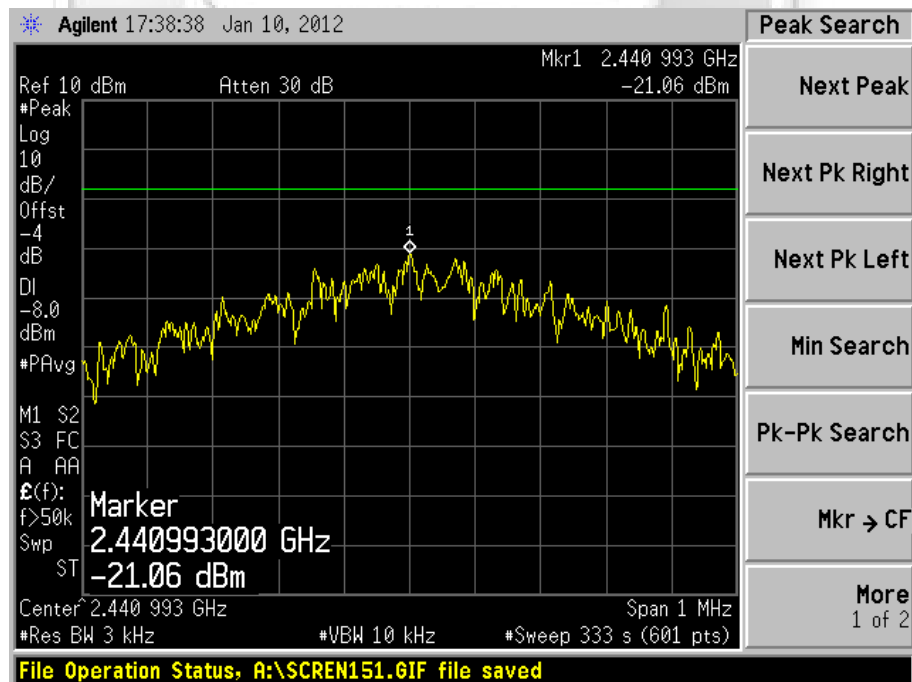

Plot 30 – Channel 39 (mid ch)

PEAK POWER SPECTRAL DENSITY TEST

Peak Power Spectral Density Plots

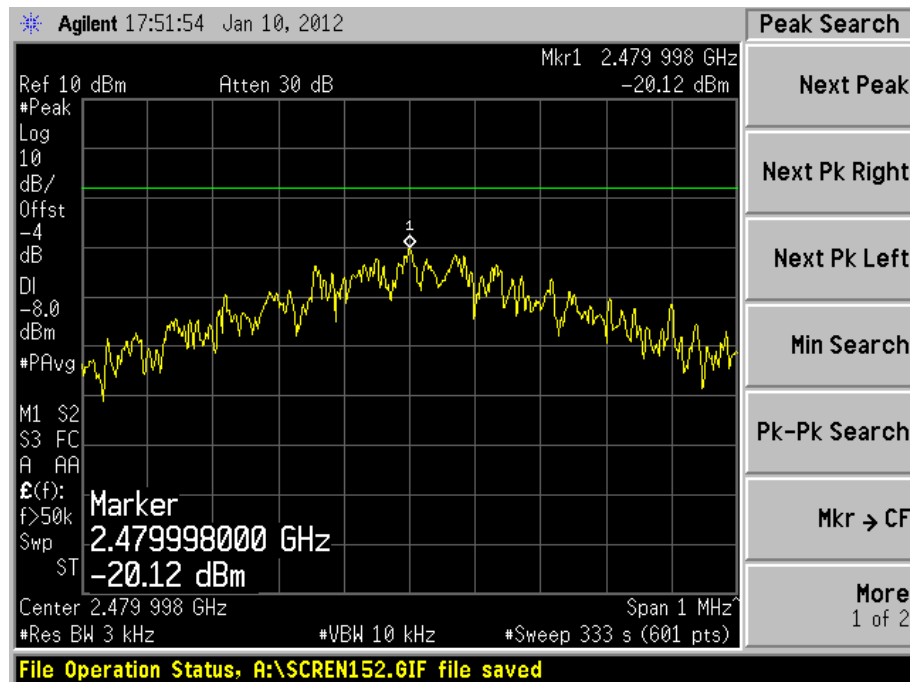

Plot 31 – Channel 78 (upper ch)




Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011



ANNEX A EUT PHOTOGRAPHS / DIAGRAMS

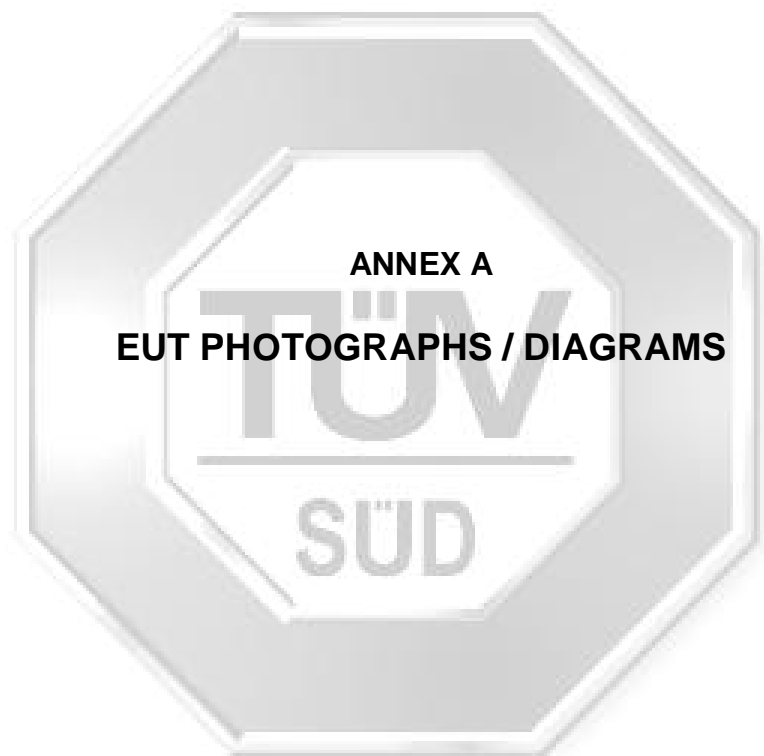

ANNEX A
EUT PHOTOGRAPHS / DIAGRAMS

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS



Front View



Rear View

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS



EUT Top Housing Internal View

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS



Main-Board PCB Trace Side

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS


EUT PHOTOGRAPHS

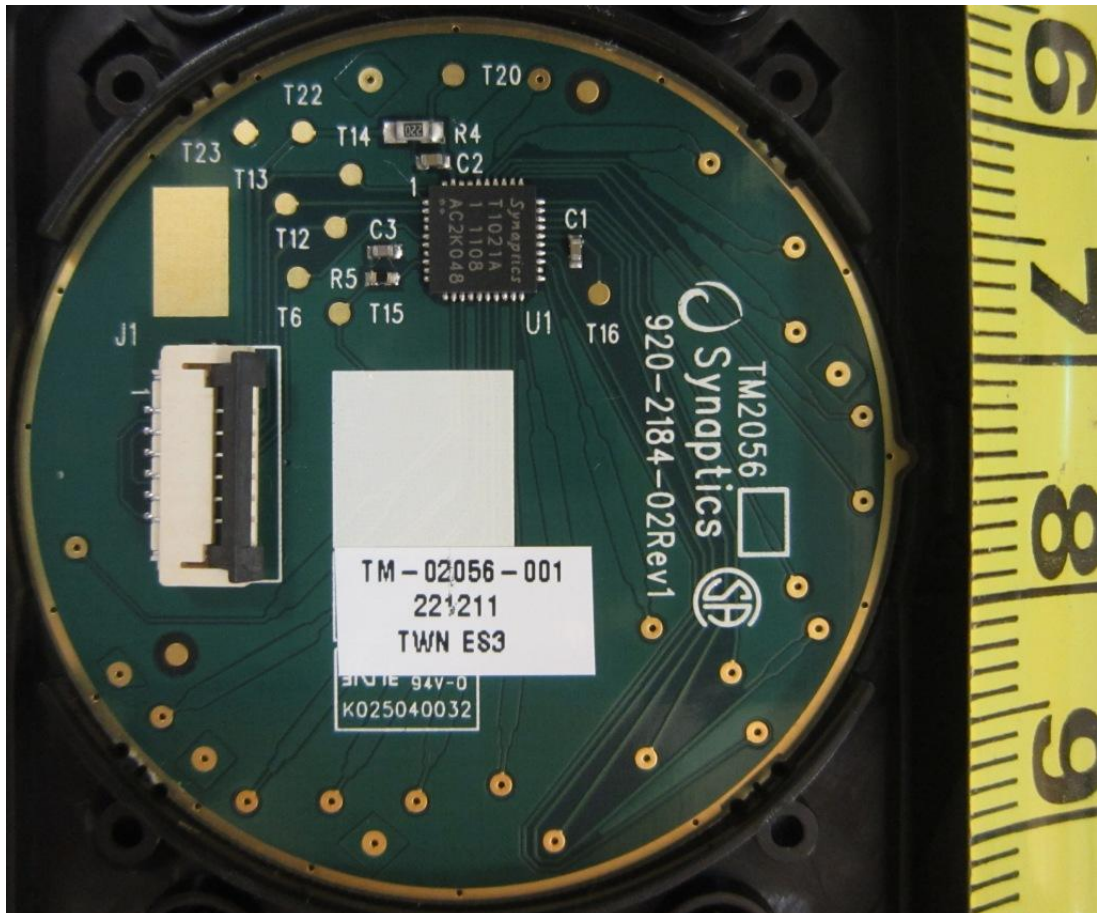

Sub-Board PCB Component Side

ANNEX A EUT PHOTOGRAPHS / DIAGRAMS

EUT PHOTOGRAPHS

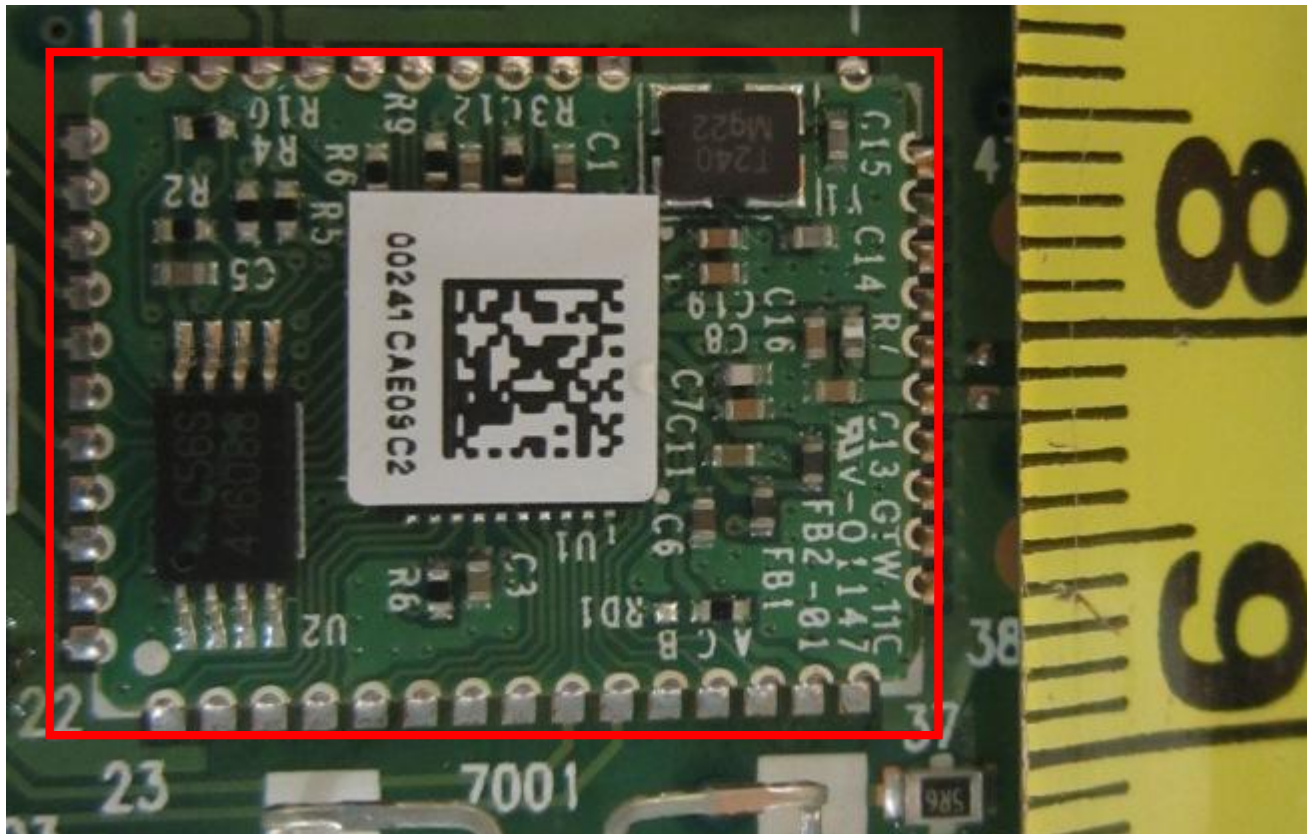

RF Module Circuit with RF Shield Removed

ANNEX B USER MANUAL TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS



ANNEX C FCC LABEL & POSITION




ANNEX C FCC LABEL & POSITION

Labeling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.



Sample Label

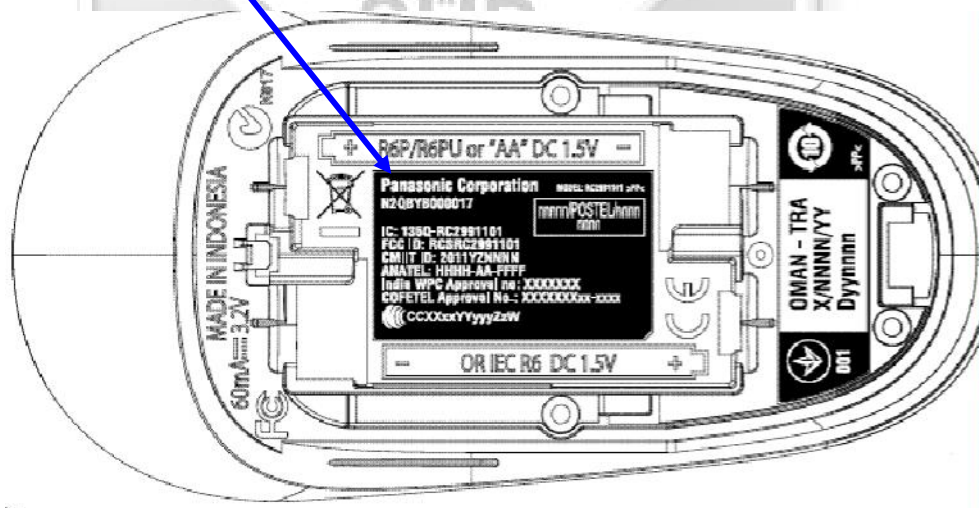

Physical Location of FCC Label on EUT