

# Testing Report

Customer Name: Shenzhen I-Link Technology CO.,LTD .


Product Name: BLUETOOTH 5.0 TRANSMITTER AND RECEIVER  
2 IN 1 ADAPTER

Sample Model: /

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2022.9.29

Engineer: <i>Jeremy</i>	Date: <i>2022.9.26</i>
Auditor: <i>Eason</i>	Date: <i>2022.9.29</i>
Approver: <i>Aaron</i>	Date: <i>2022.9.29</i>



## Version

Version No.	Date	Description	Formulate	Approval
A0	2022.9.27	For the first time, formulate	Jeremy	Eason
A1	2022.9.29	Add the antenna size diagram	Jeremy	Eason

## Contents

1.General Information .....	3
1.1 General information of testing institutions .....	3
1.2 Testing principle .....	3
1.3 Test equipment .....	4
1.4 Test environment .....	4
1.5 Statement .....	4
2.Sample Information .....	5
2.1 Client information .....	5
2.2 Description of EUT(S) .....	5
2.3 EUT appearance .....	6
2.4 DUT setup photo of free space OTA testing .....	6
3.Test Results .....	7
3.1 Test standard .....	7
3.2 Test uncertainty .....	7
3.3 Test data .....	8
3.3.1 Typical free space efficiency and gain .....	8
3.3.2 Typical free space radiation pattern .....	8
(The following is blank) .....	9


# 1.General Information

## 1.1 General information of testing institutions

<b>Name</b>	Shenzhen RFI-LAB Communication Technology Co., Ltd.
<b>Address</b>	10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ
<b>Tel</b>	13798473001
<b>E-mail</b>	lait@tech-now.com
<b>Equipment</b>	All the equipment used in the report is fixed in 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ

## 1.2 Testing principle

### Multi-Probe OTA Measurement System

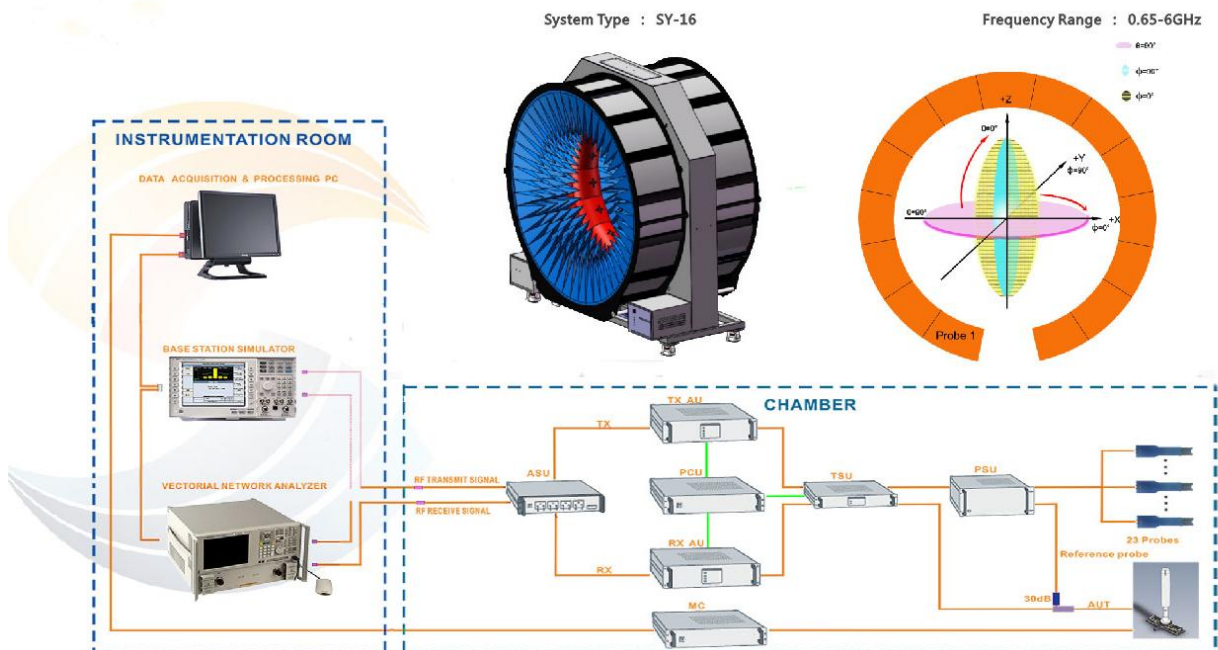

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
16 probe microwave chamber	3*3*2.5	RFI-LAB-RF-A00	SUNYIELD	2021.3.15	2023.3.14
Network Analyzer	E5071C	RFI-LAB-RF-A02	Agilent	2022.5.13	2023.5.12

### 1.4 Test environment

Temperature	24.5°C
Humidity	59%RH
Pressure	100.19kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information


### 2.1 Client information

<b>Name</b>	Shenzhen I-Link Technology CO.,LTD .
<b>Address</b>	Floor B2,Block 1,Yongqi Technopark,Yintian Industrial park,Xixiang Town,Baoan district,Shenzhen,P.R.China
<b>Contacts</b>	/
<b>Tel</b>	/
<b>E-mail</b>	/

### 2.2 Description of EUT(S)

<b>Product Name</b>	BLUETOOTH 5.0 TRANSMITTER AND RECEIVER 2 IN 1 ADAPTER
<b>Sample Model</b>	/
<b>Size</b>	/
<b>Serial No.</b>	/
<b>Test Item</b>	Antenna gain; Efficiency; Radiation pattern
<b>Frequency Range</b>	2400MHz-2500MHz
<b>Received Date</b>	2022.9.26
<b>Test Date</b>	2022.9.27
<b>Remark</b>	The length of the RF cable is 60 mm

### 2.3 EUT appearance

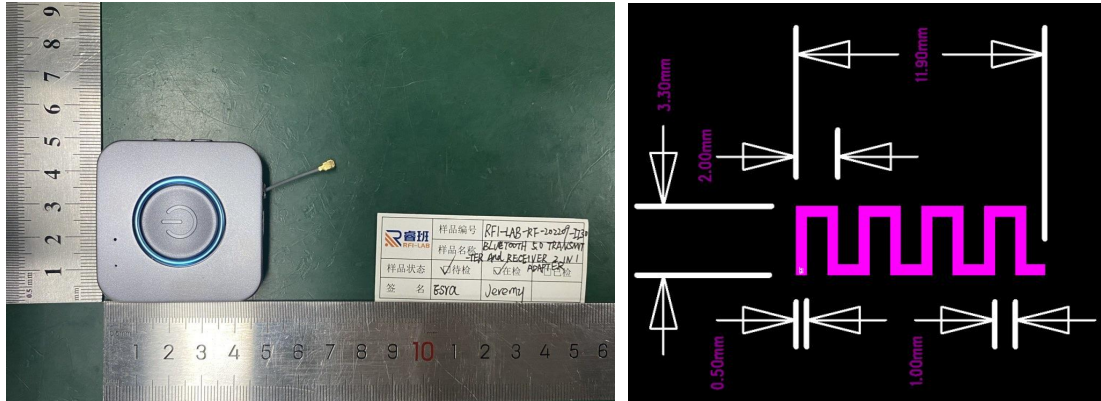


### 2.4 DUT setup photo of free space OTA testing

Front view



Planform

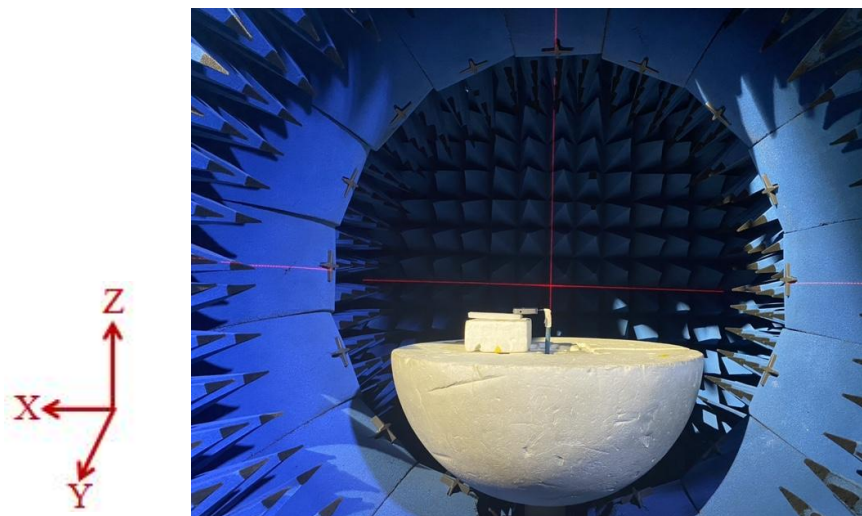

## 3. Test Results

### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	Antenna gain	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Radiation pattern		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		

### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
Antenna gain	$\pm 1\text{dB}$
Radiation efficiency	$\pm 10\%$

### 3.3 Test data


#### 3.3.1 Typical free space efficiency and gain

Frequency/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain/dBi	2.33	2.53	2.63	2.86	2.9	3.23	3.32	3.35	3.45	3.54	3.41
Efficiency/%	41.13	42.88	44.45	46.15	47.10	50.29	51.14	52.41	53.74	55.50	55.12

#### 3.3.2 Typical free space radiation pattern


(1) X-Z Plane:

**V Phi=0**

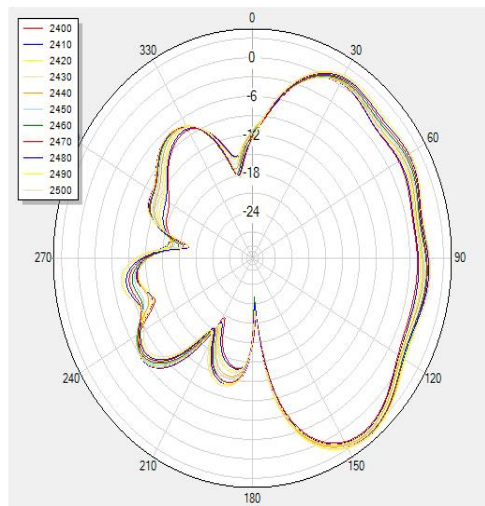

(2) Y-Z Plane:


**V Phi=90**

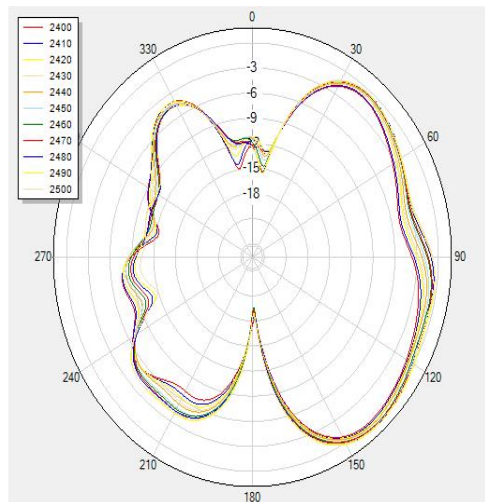




(3) X-Y Plane:

H Theta=90

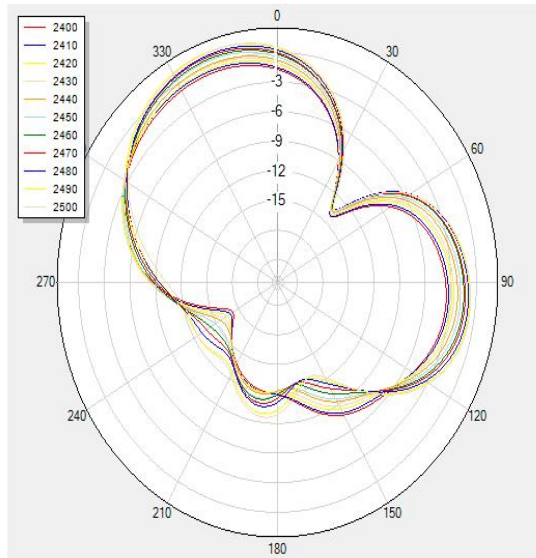

(4) Typical Free Space 3D Radiation Pattern at 2.45GHz:

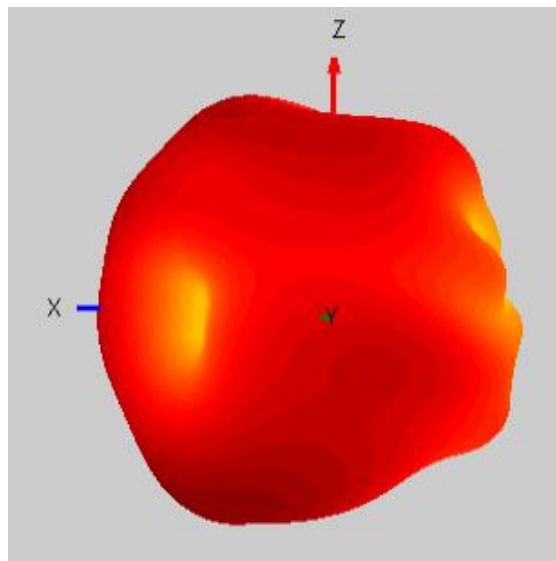

-----  
End

(The following is blank)