

Wi-Fi 2.4GHz Band

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2412.7$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 7/16/2015
- Probe: EX3DV4 - SN3554; ConvF(6.1, 6.1, 6.1); Calibrated: 10/1/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM 34-1; Type: SAM V4.0; Serial: TP-1150

Edge3/802.11b/CH1/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.96 mW/g


Edge3/802.11b/CH1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 36.2 V/m; Power Drift = -0.175 dB

Peak SAR (extrapolated) = 6.80 W/kg

SAR(1 g) = 2.11 mW/g; SAR(10 g) = 0.670 mW/g

Maximum value of SAR (measured) = 4.10 mW/g

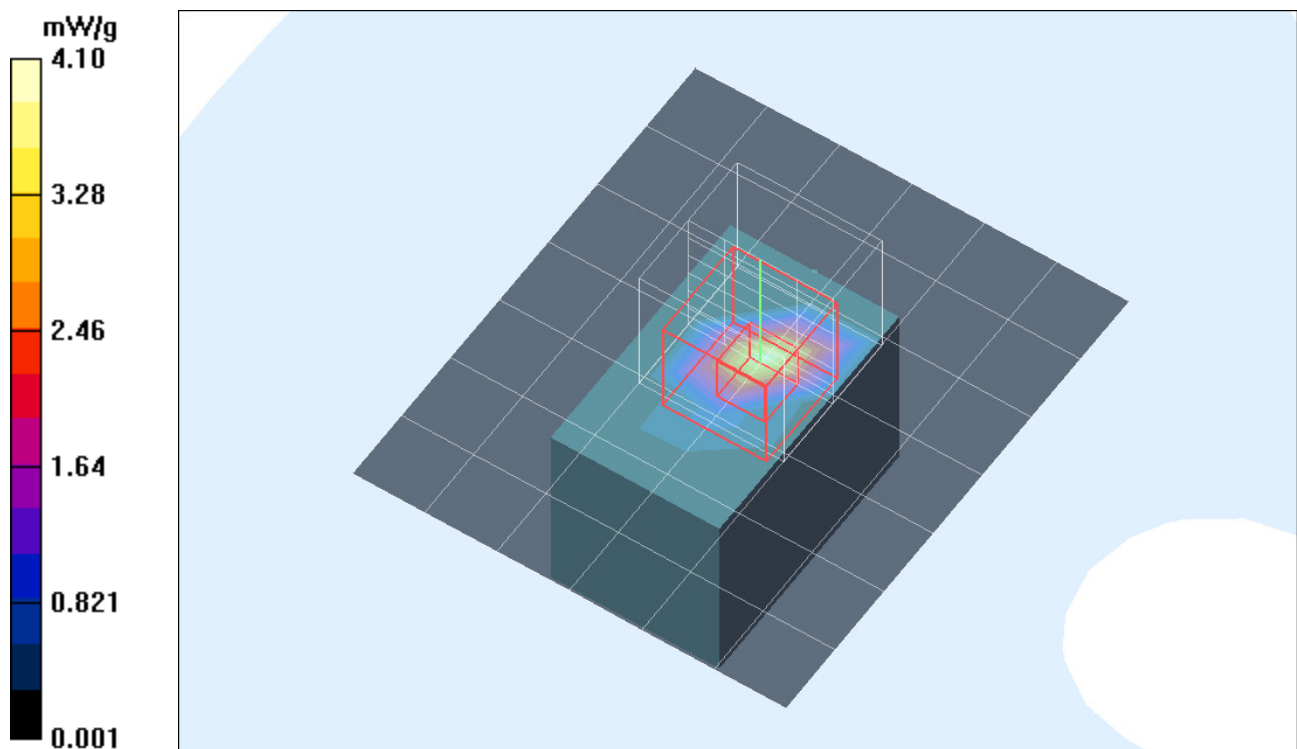

WiFi 2.4G 802.11b CH1

Frequency: 2412 MHz; Duty Cycle: 1:1

Edge3/802.11b/CH1/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 4.01 mW/g