



4.4.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	CCK	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.42	30	PASS
6	2437	16.14	30	PASS
11	2462	15.39	30	PASS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.12	30	PASS
6	2437	16.09	30	PASS
11	2462	15.68	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	CCK	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.66	8	PASS
6	2437	-9.44	8	PASS
11	2462	-8.82	8	PASS




CH1

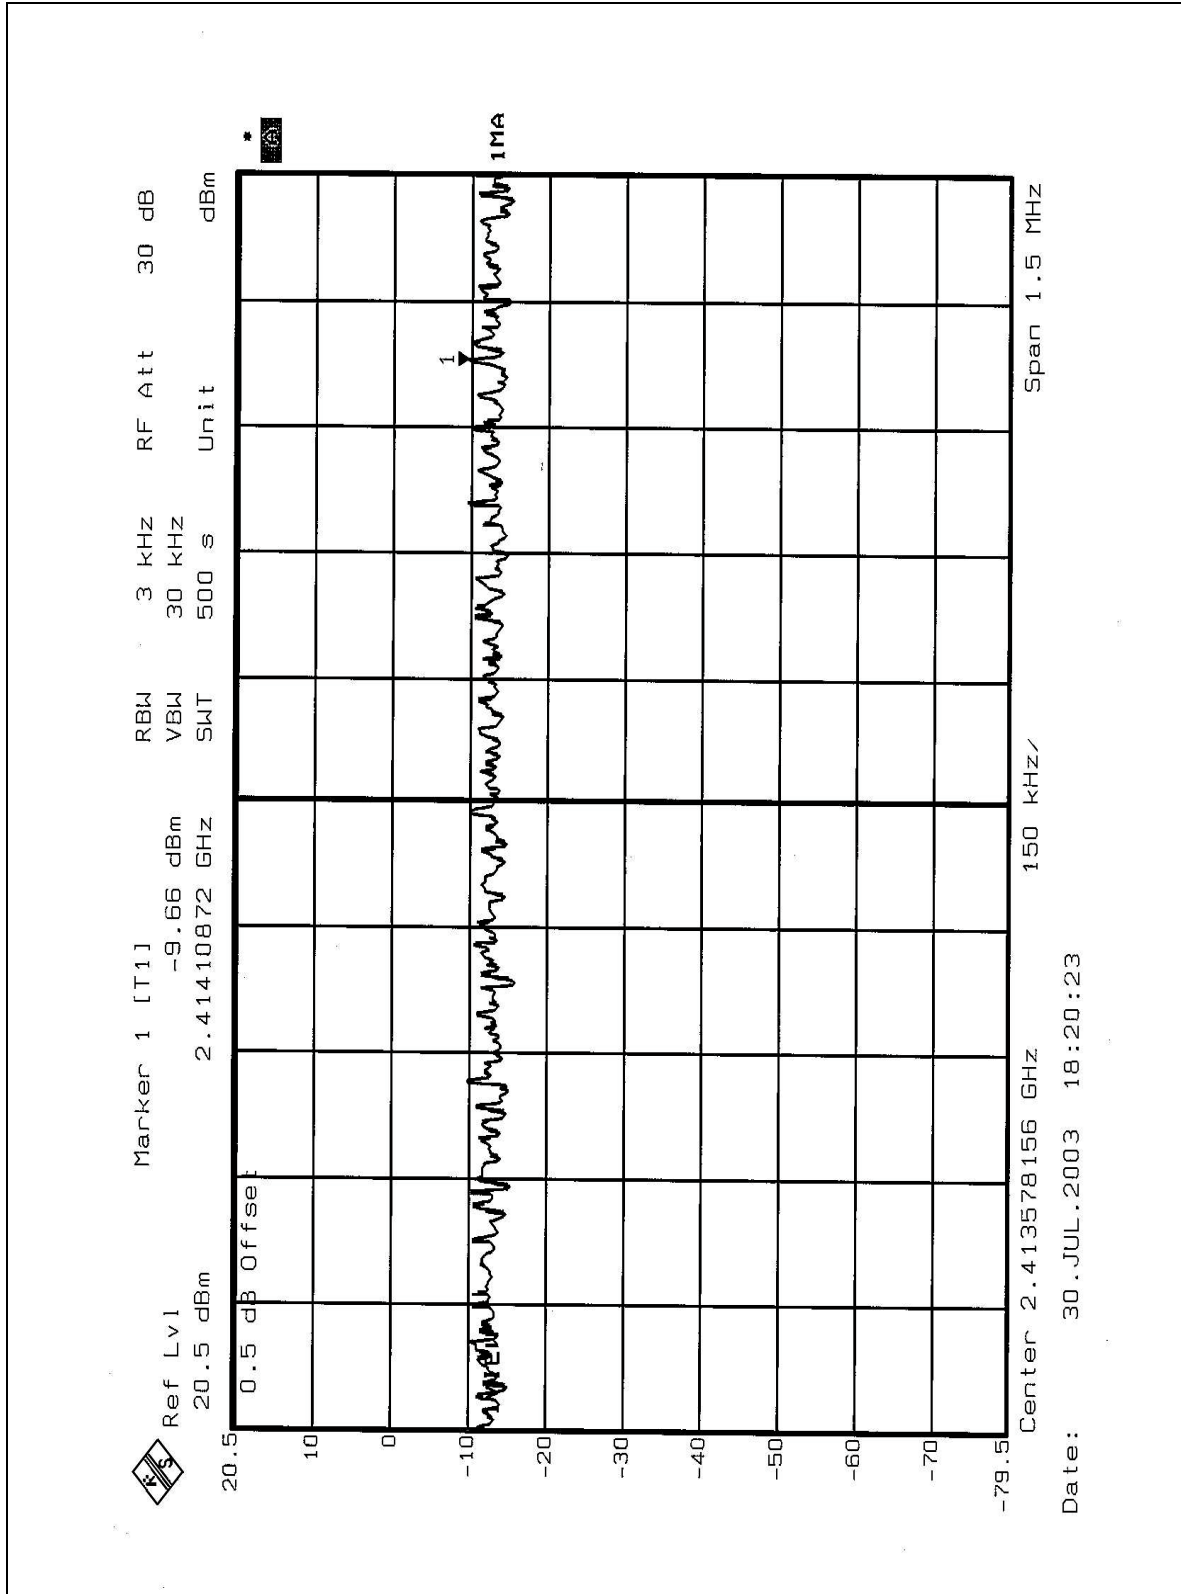




CH6

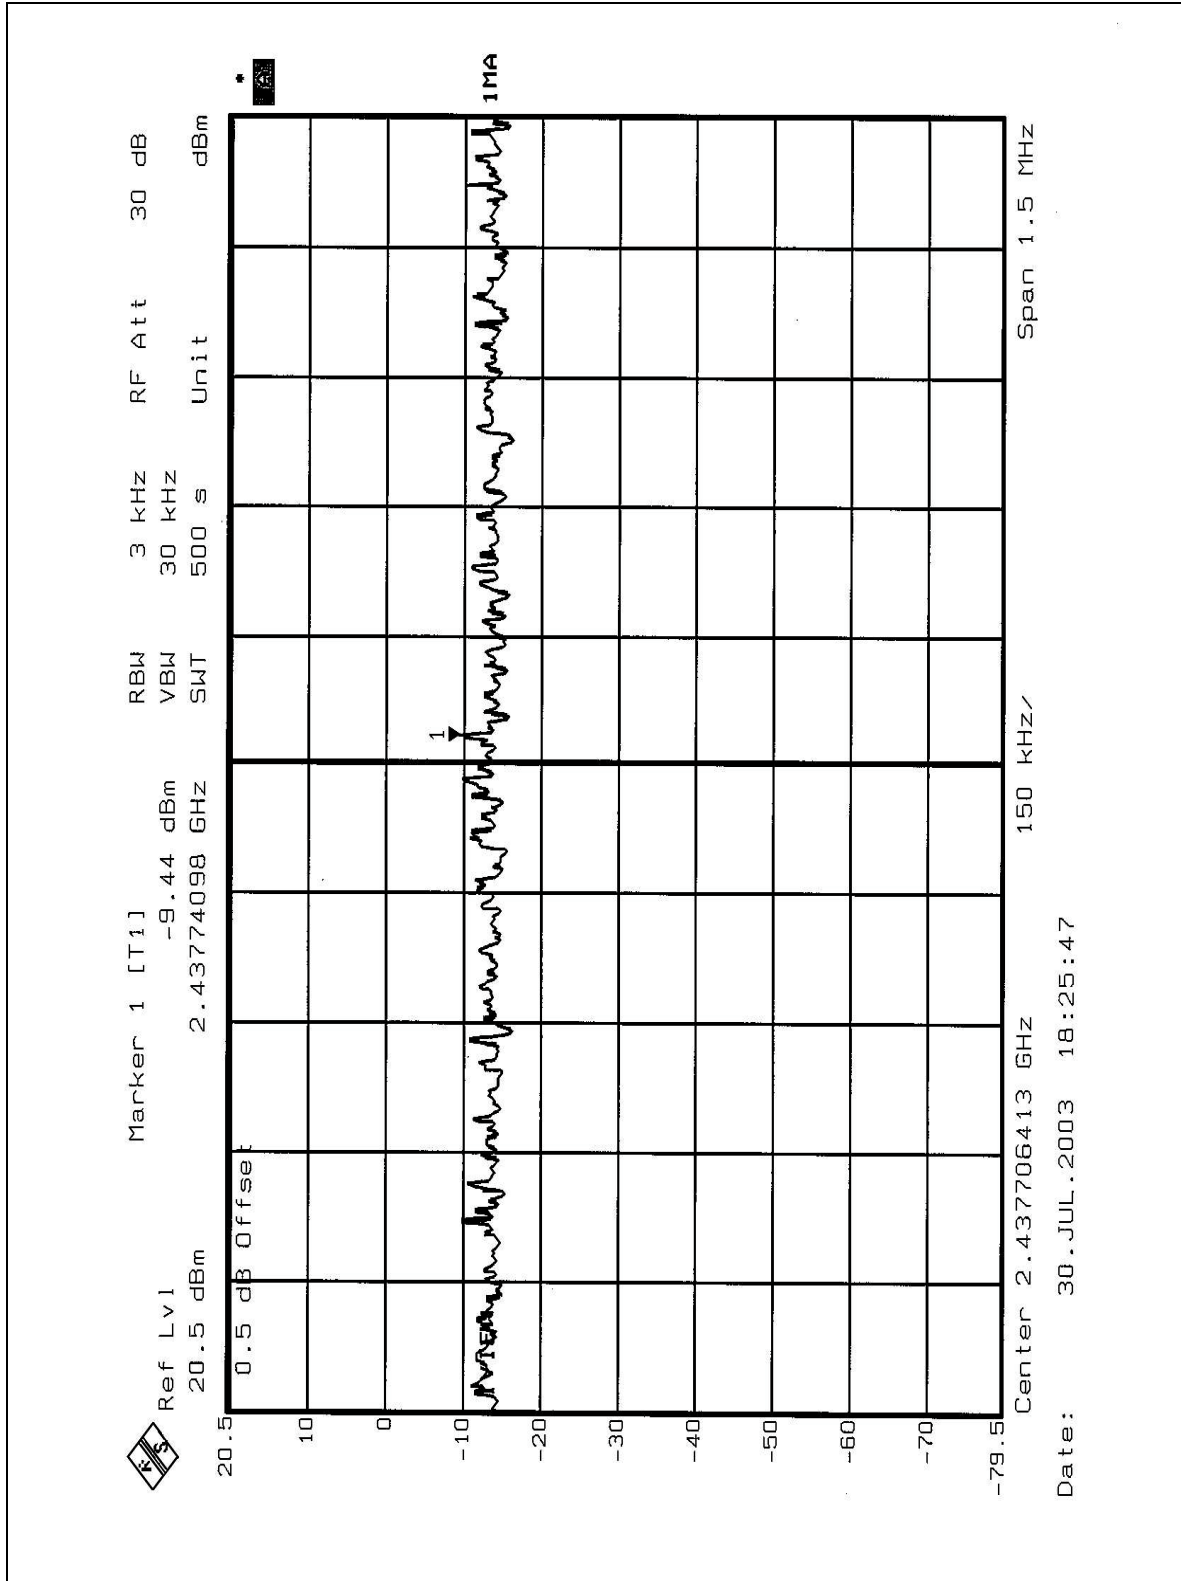



CH11

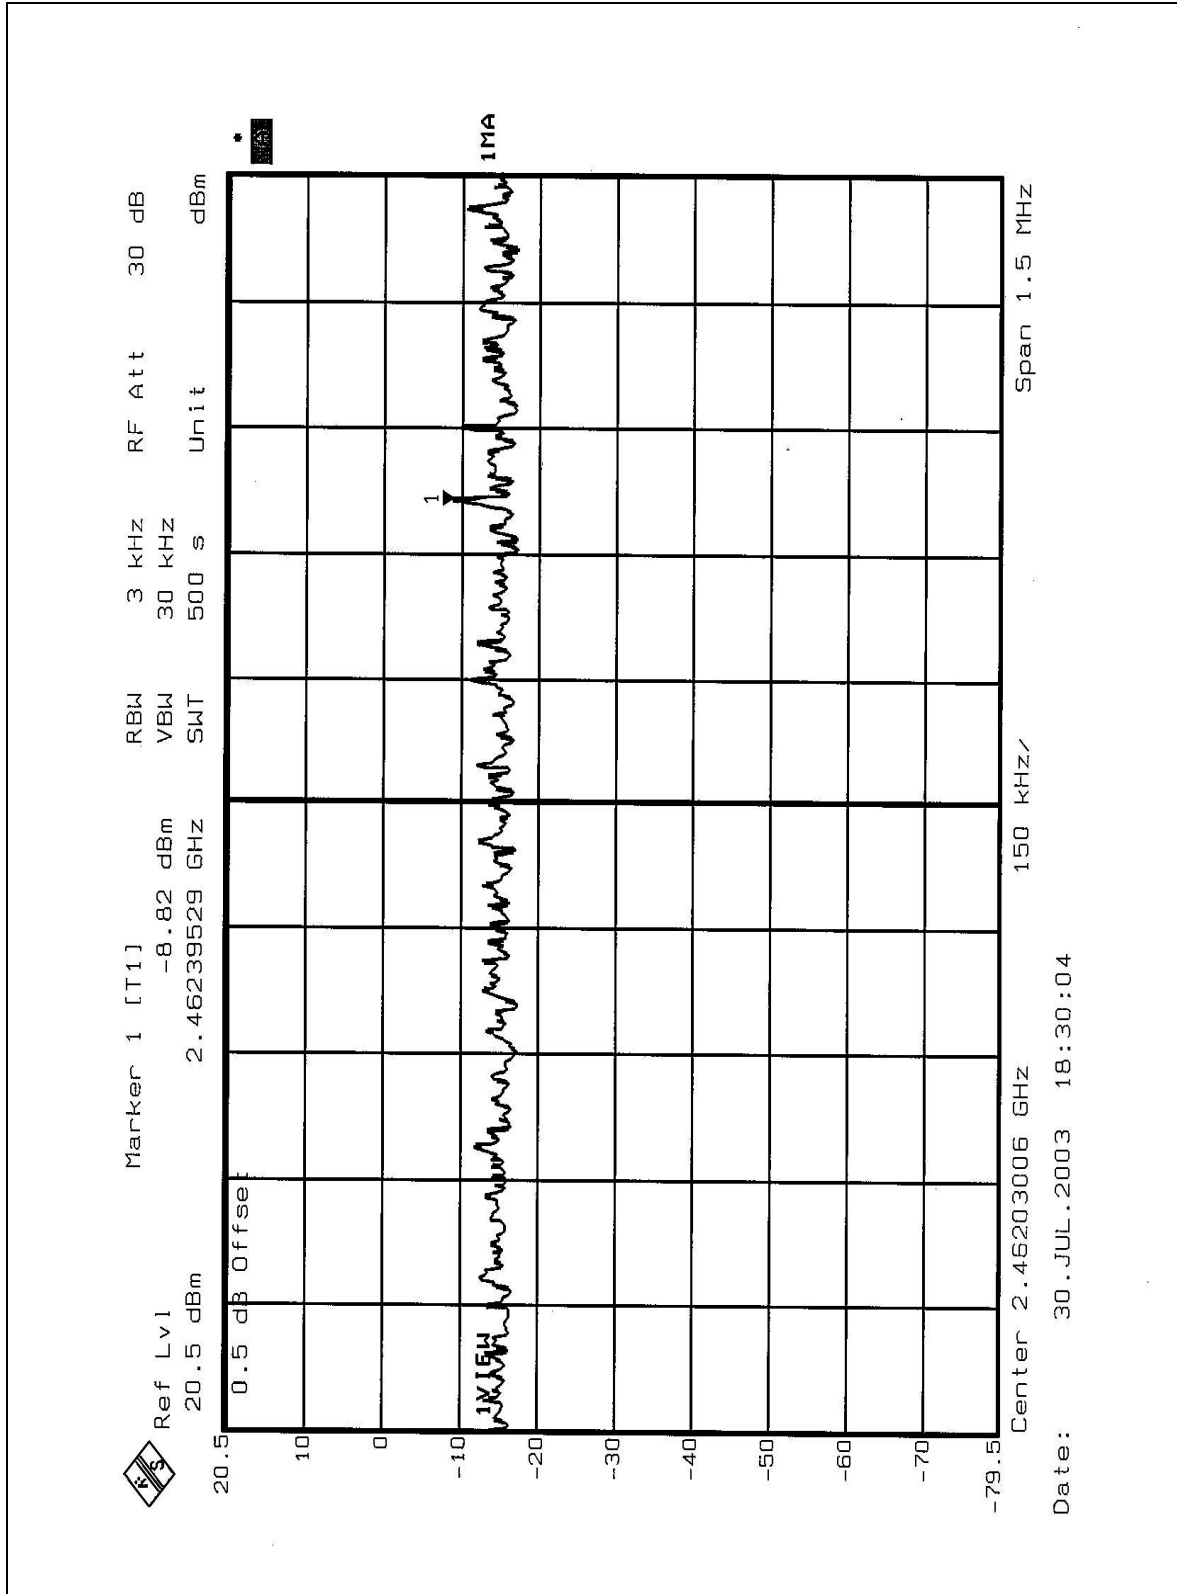




EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.72	8	PASS
6	2437	-15.64	8	PASS
11	2462	-14.84	8	PASS




CH1

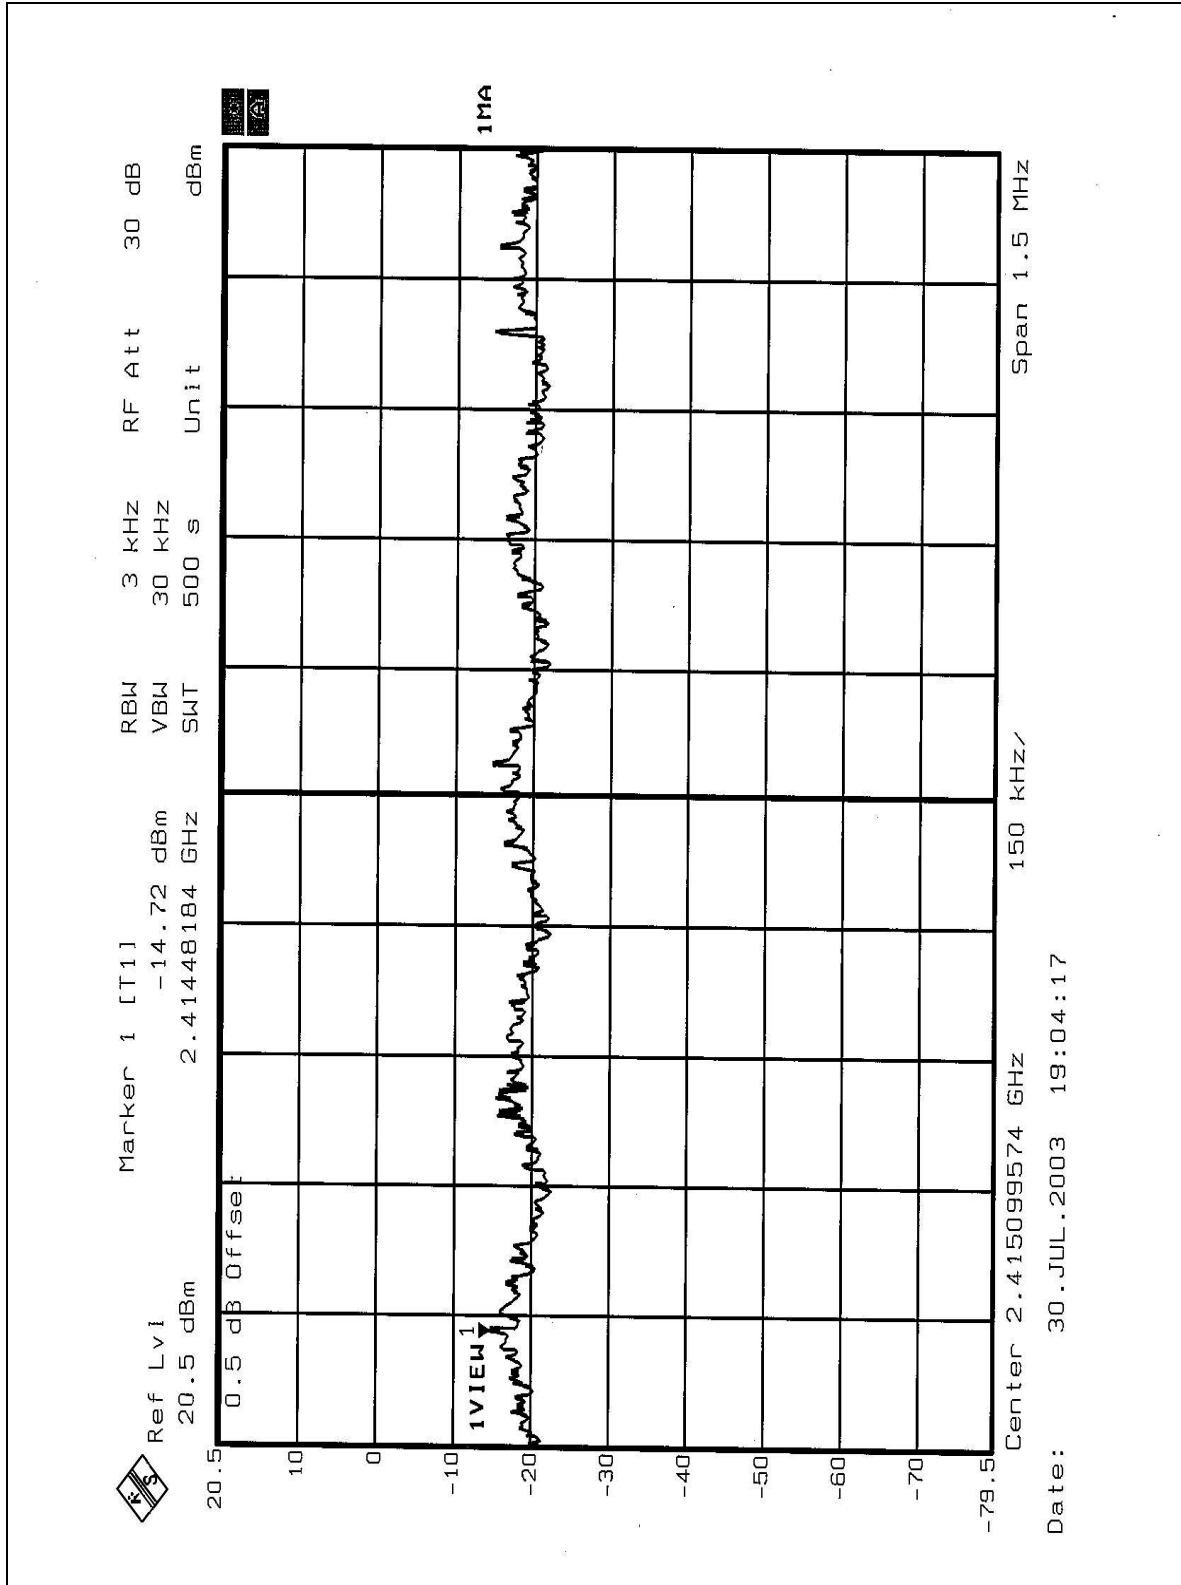




CH6

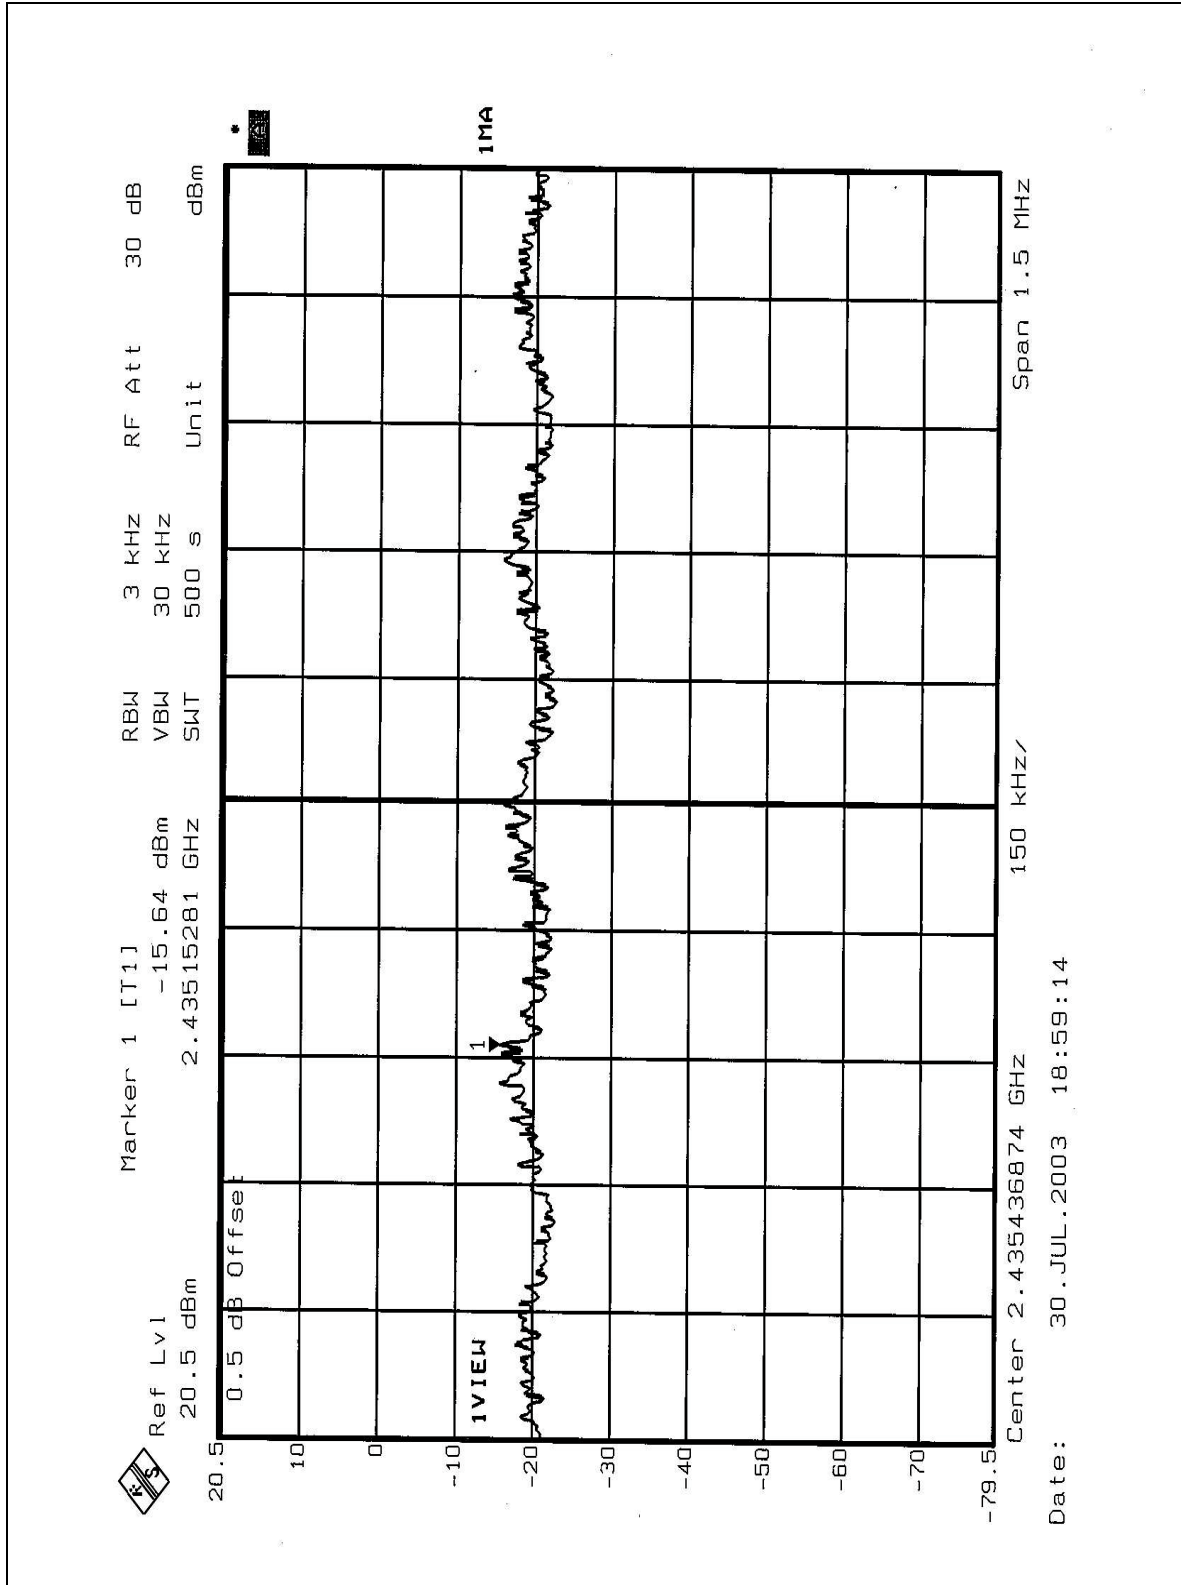



CH11

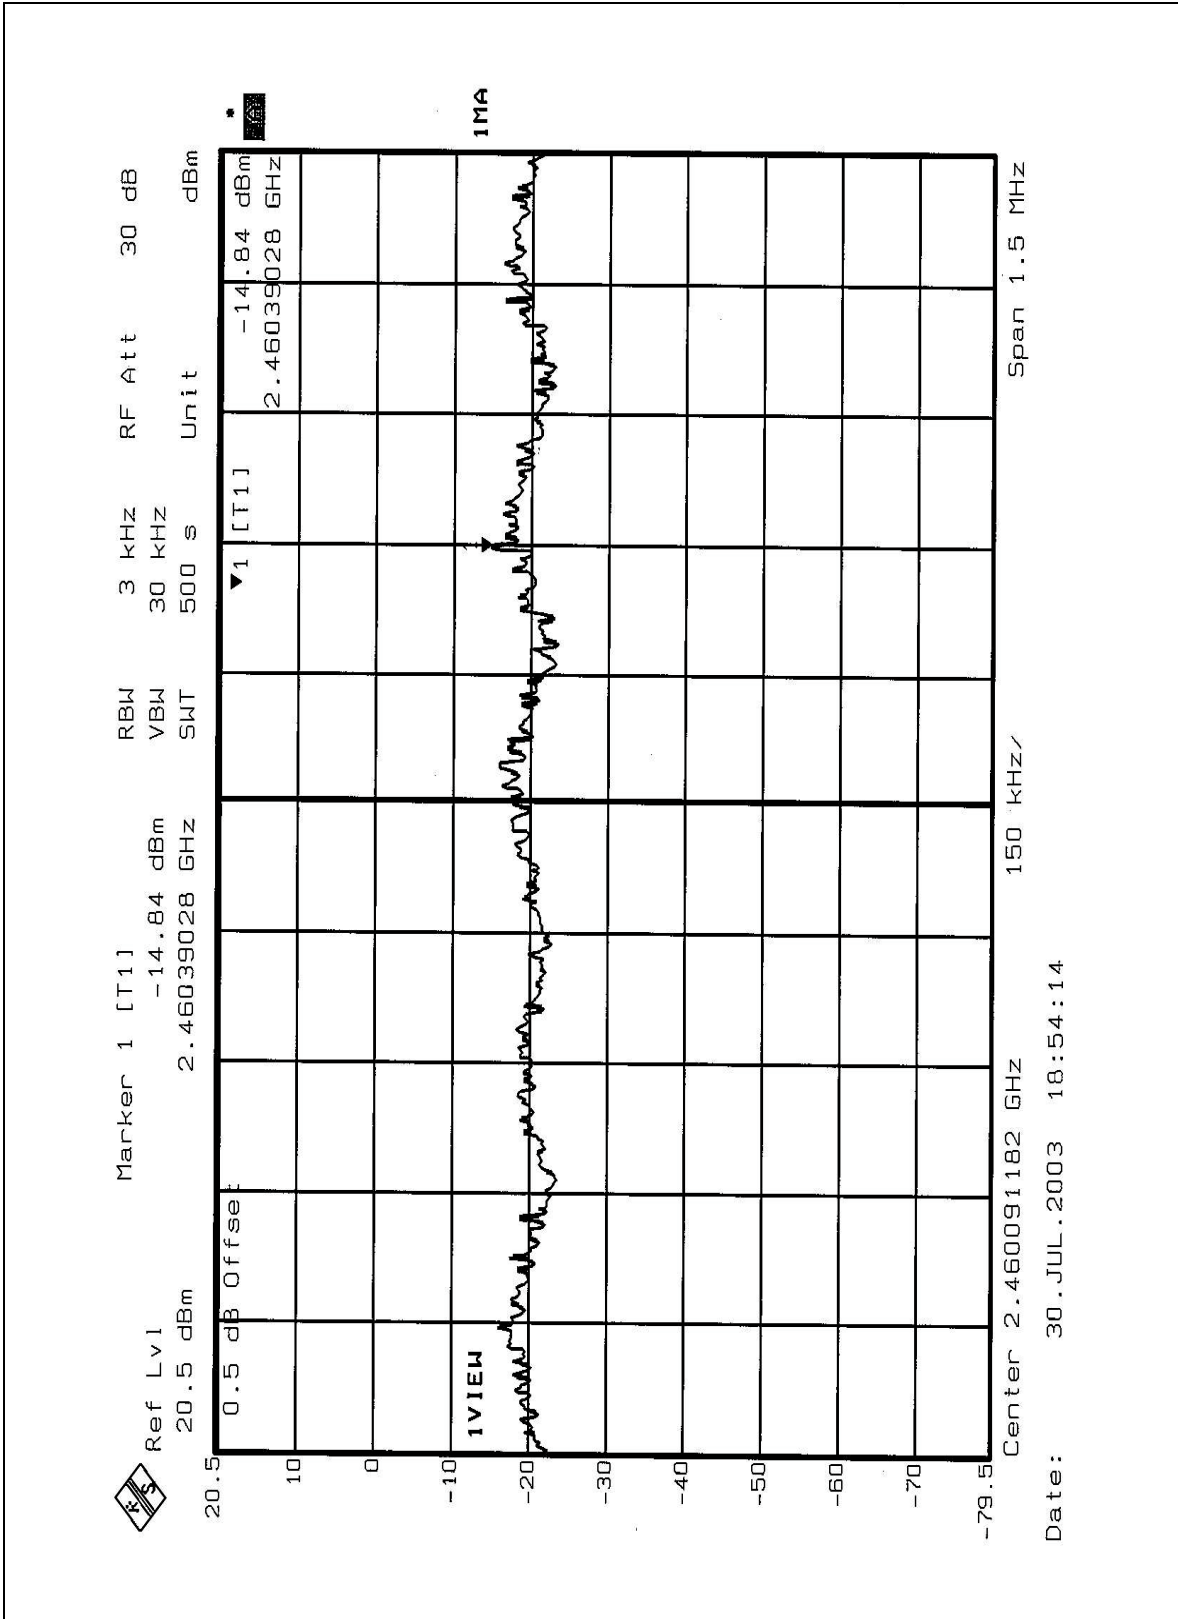



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6


4.6.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE1: The band edge emission plot on the following 1-2 shows 46.8dB / 48.79dB delta between carrier maximum power and local maximum emission in restrict band (2.3681GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (page 27) with CCK mode is 100.6dBuV/m, so the maximum field strength in restrict band is $100.6 - 46.8 = 53.80$ dBuV/m which is under 54dBuV/m limit.


NOTE2: The band edge emission plot on the following 3-4 shows 38.04dB / 41.67dB delta between carrier maximum power and local maximum emission in restrict band (2.3679GHz / 2.4837GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (page 30) with OFDM mode is 91.1dBuV/m, so the maximum field strength in restrict band is $91.1 - 38.04 = 53.06$ dBuV/m which is under 54dBuV/m limit.

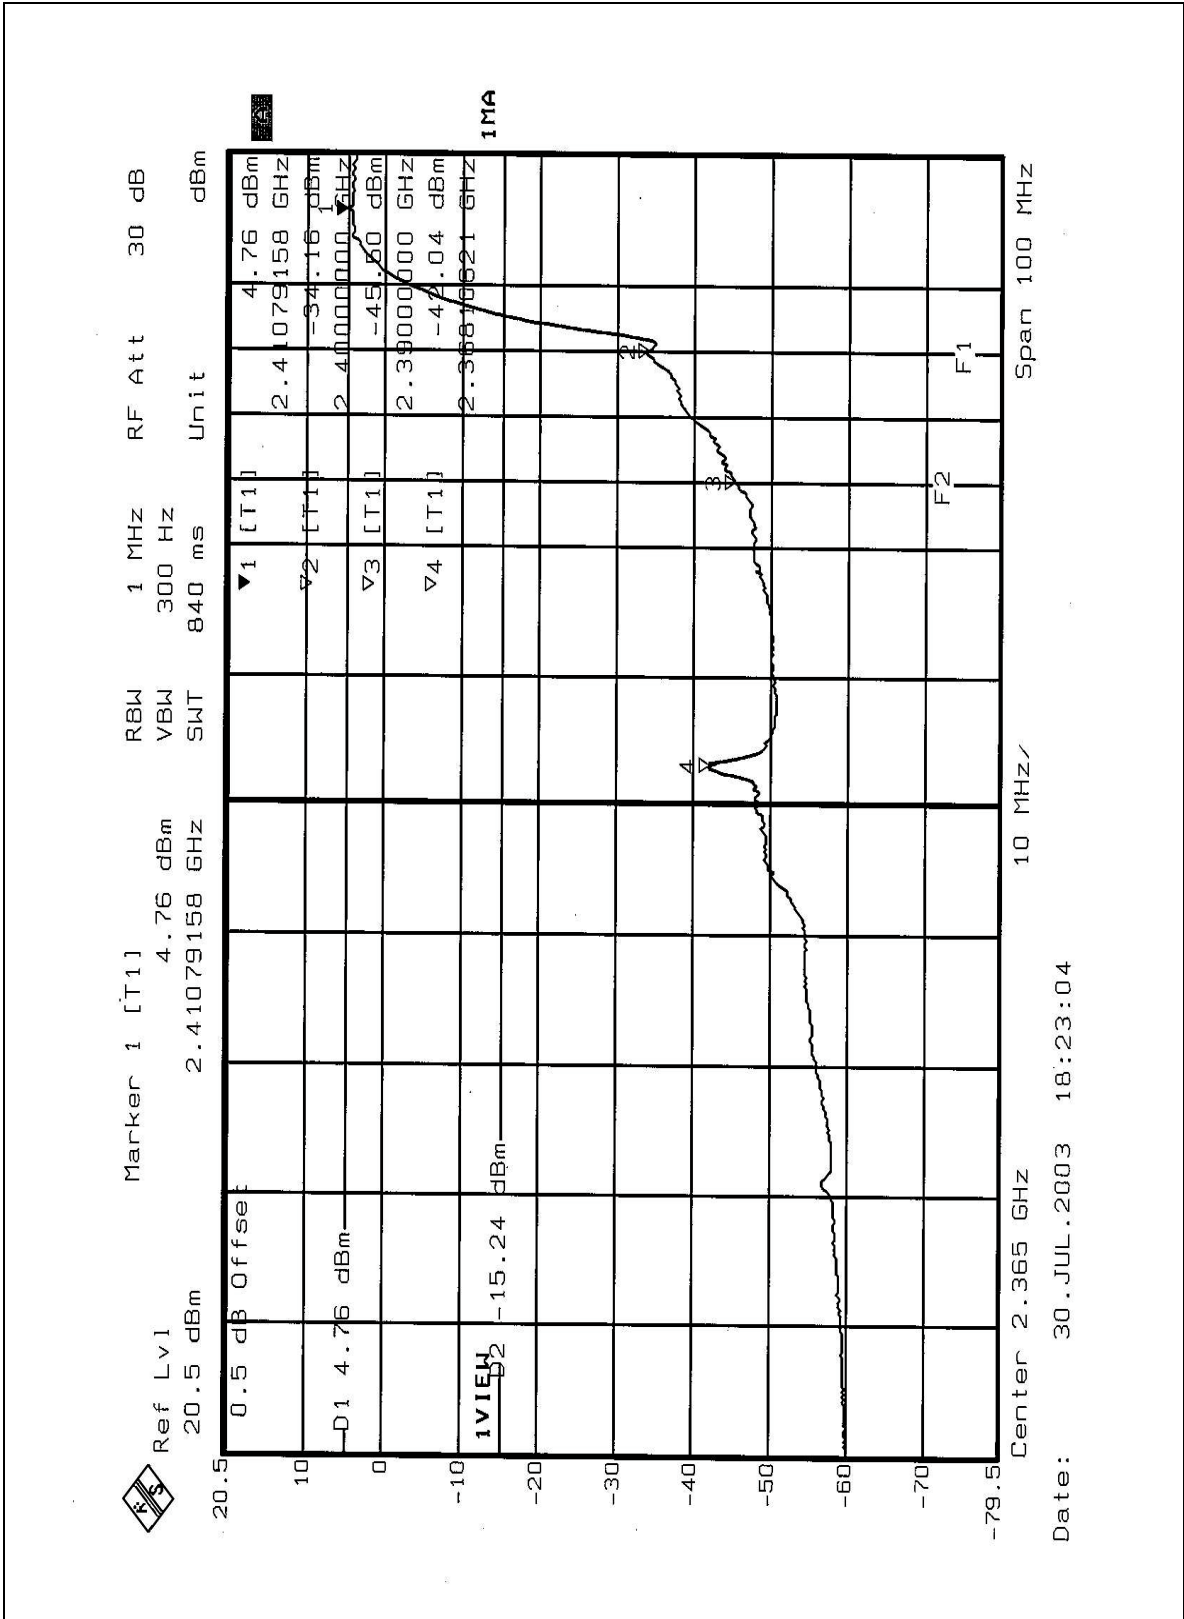


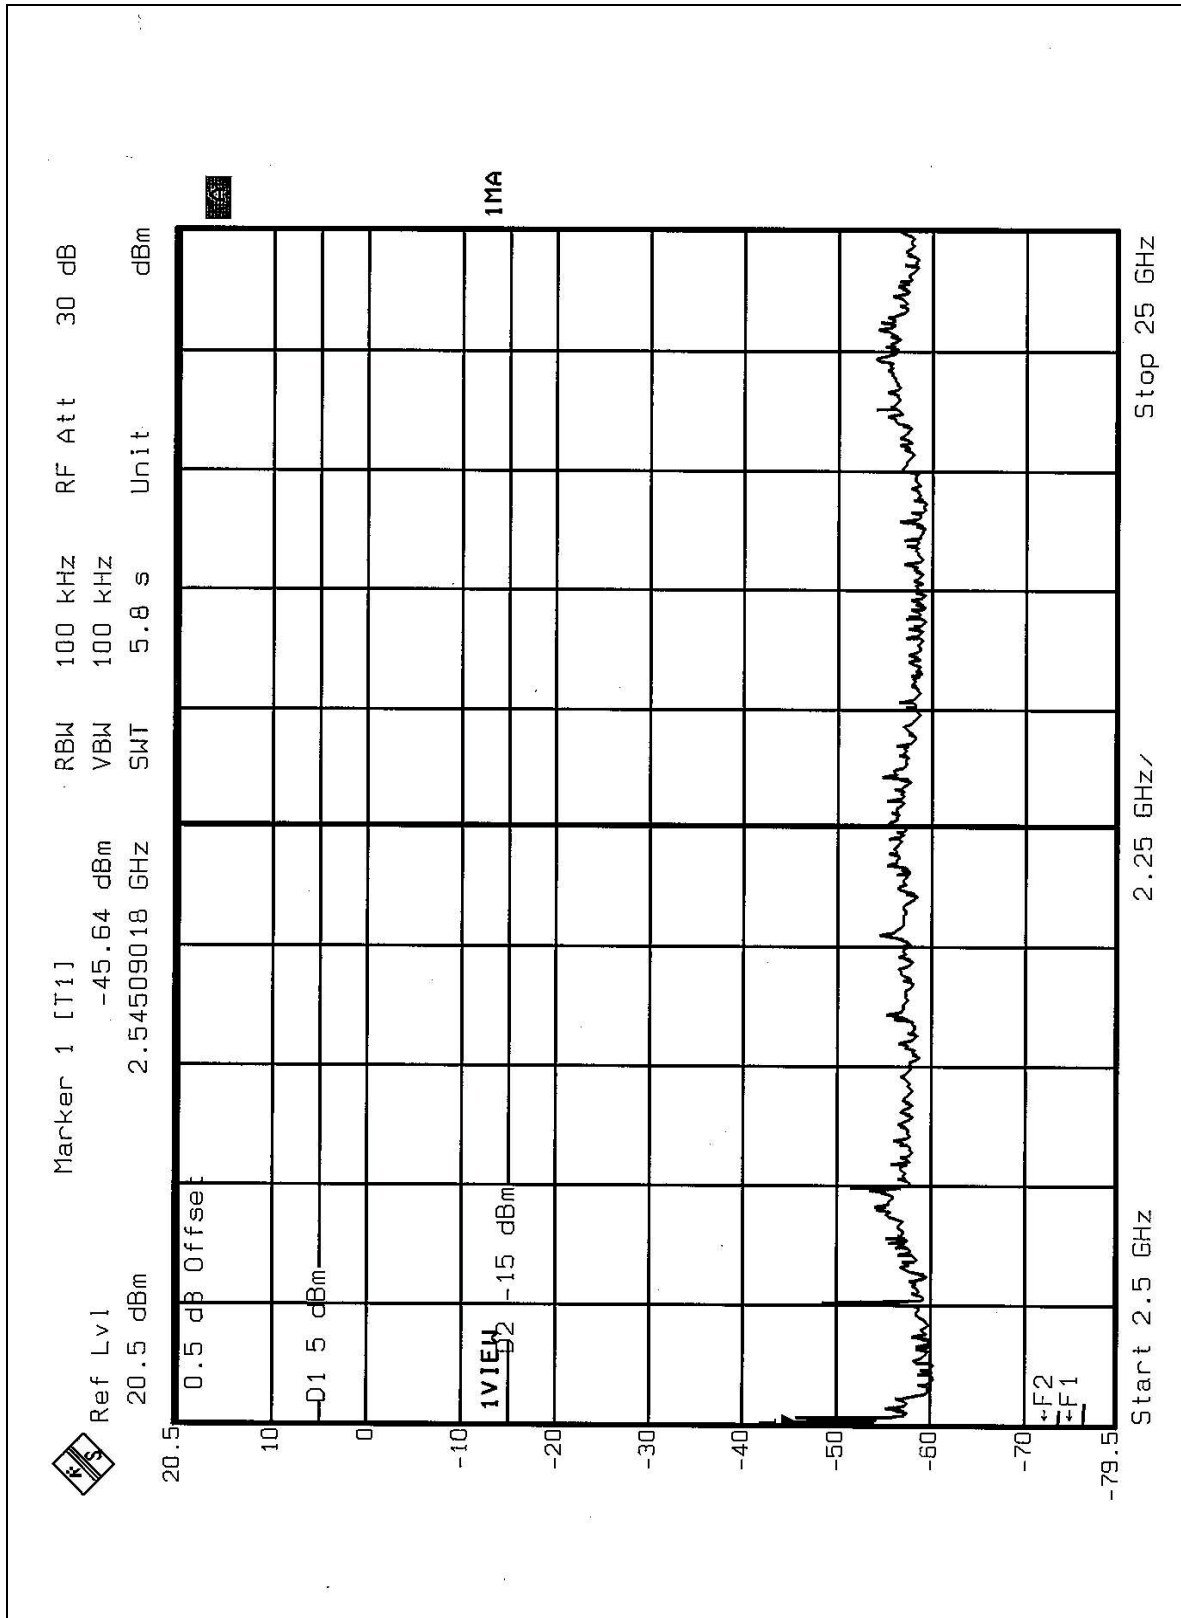


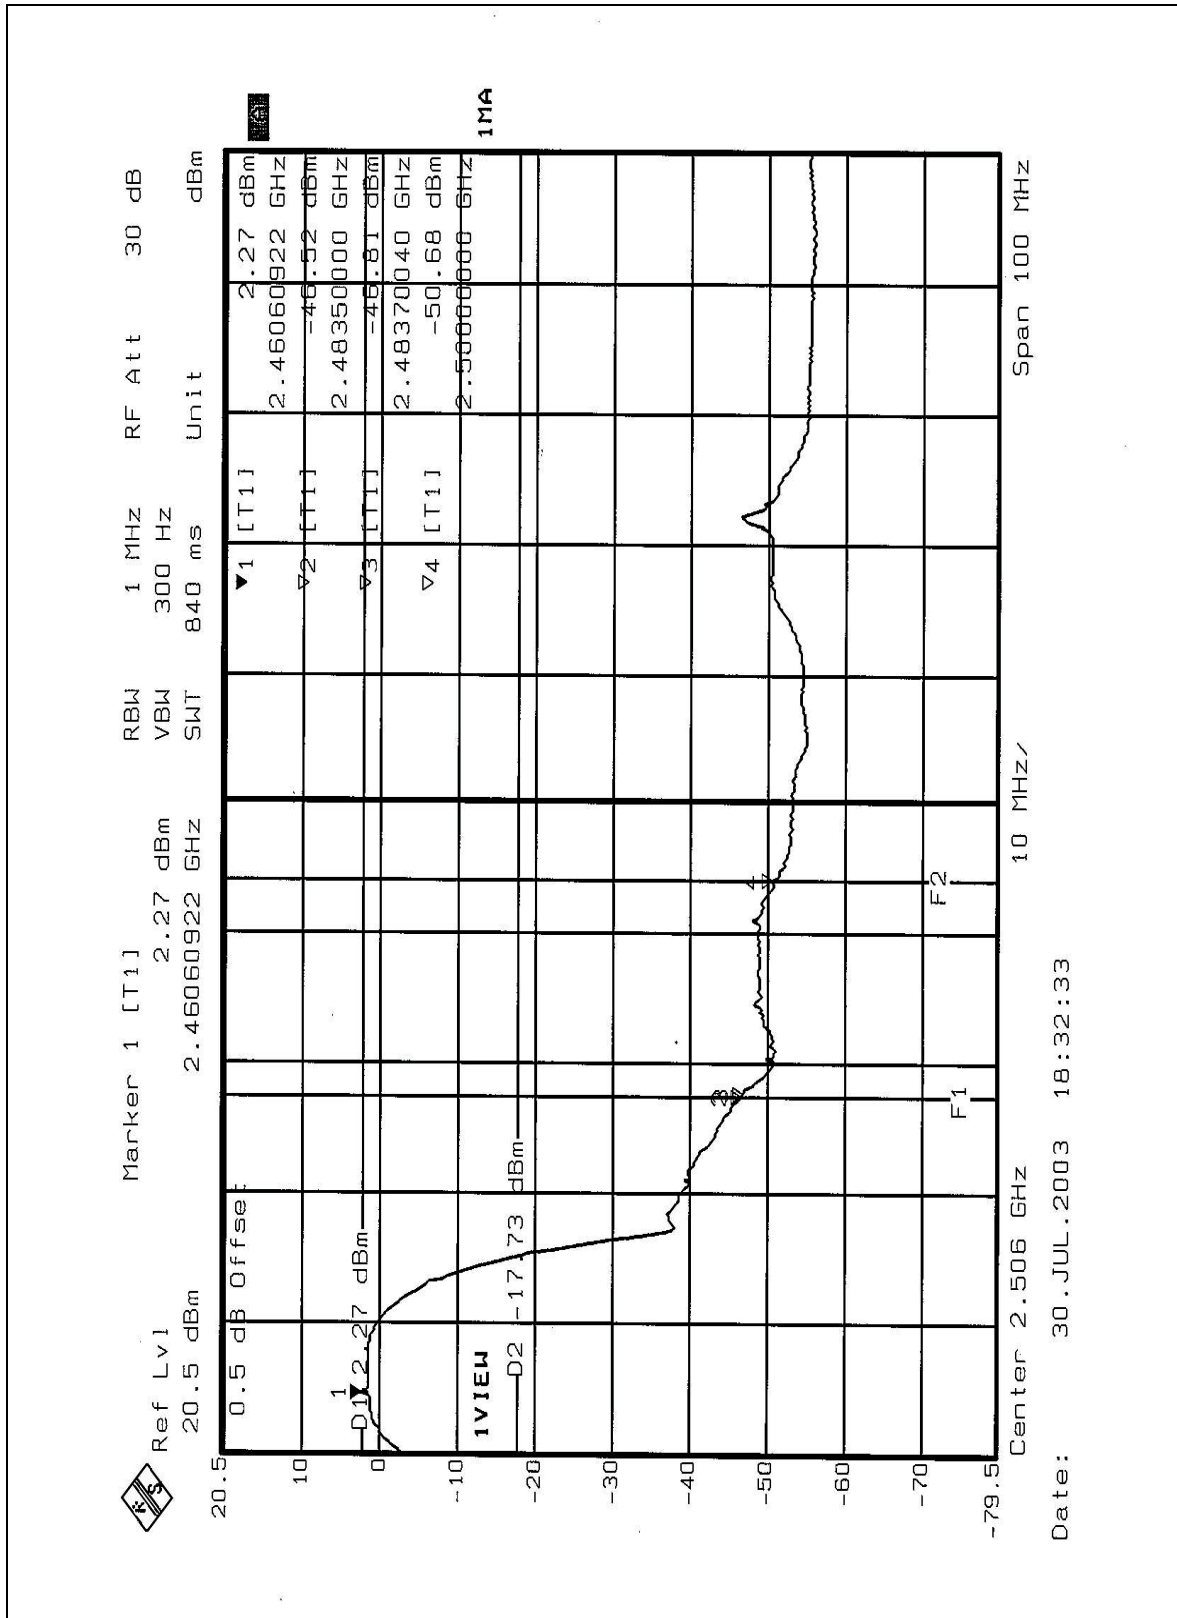


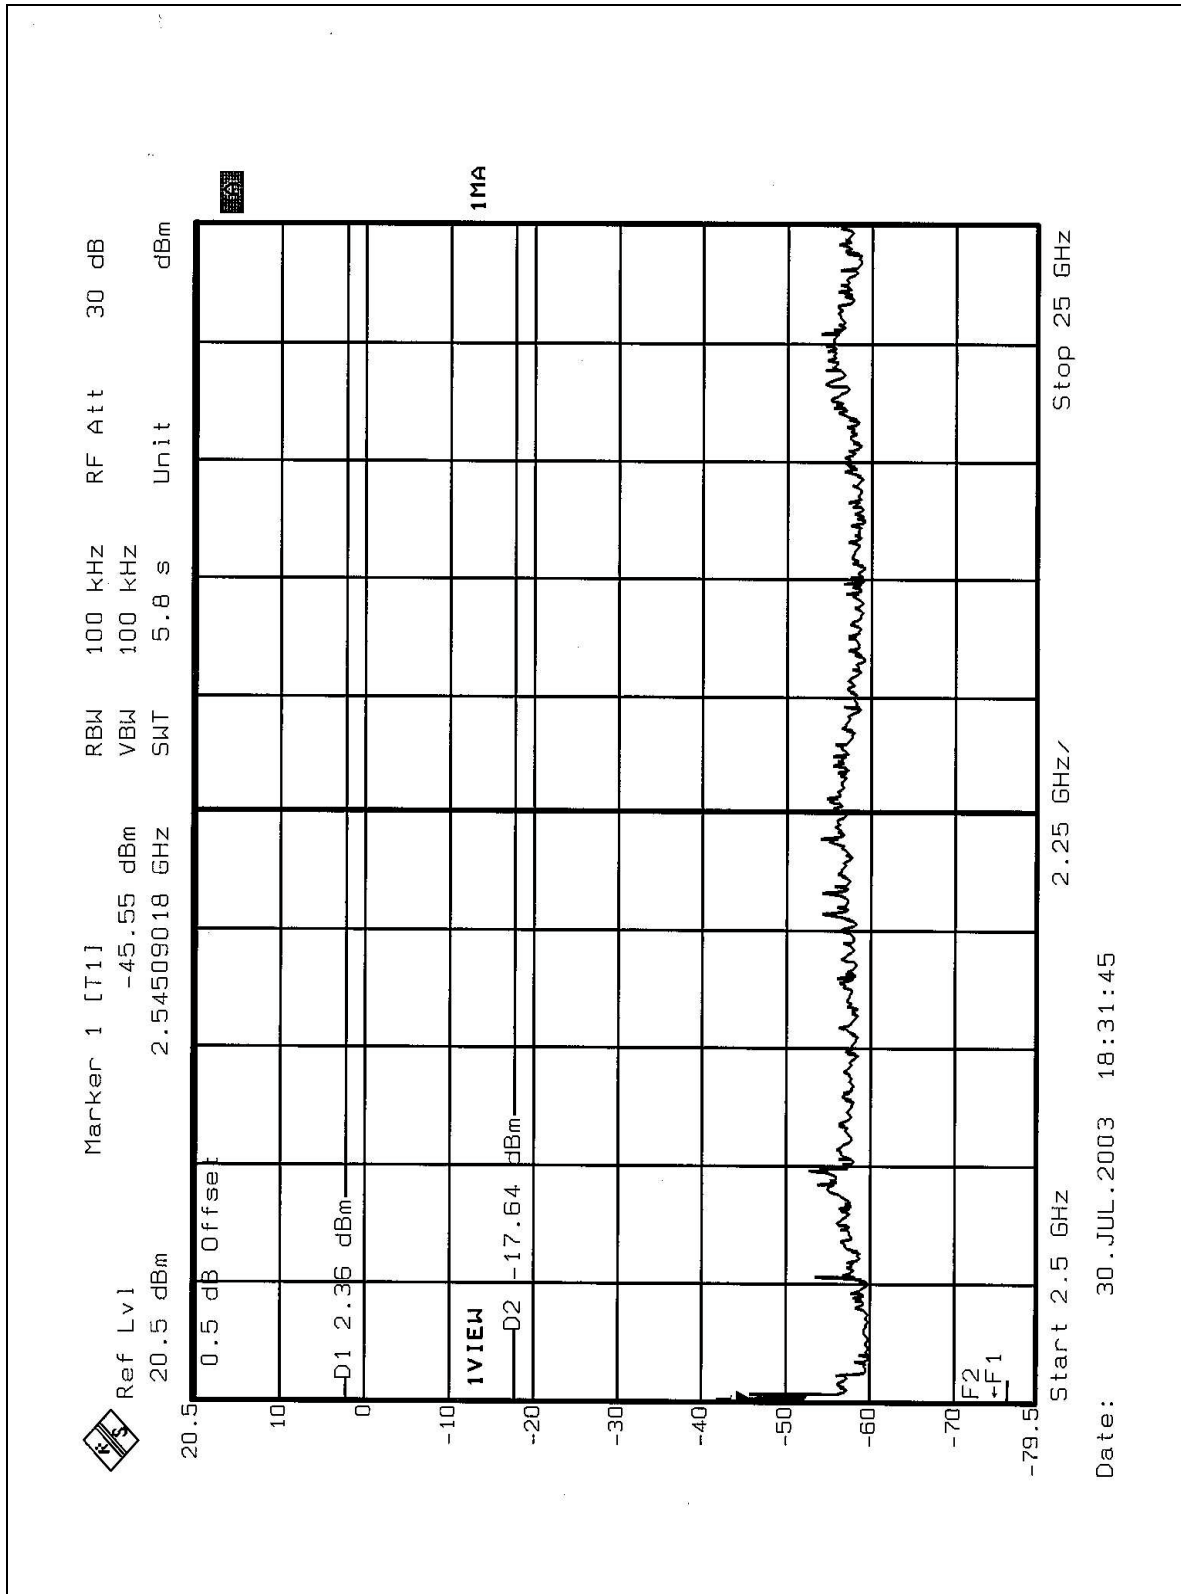

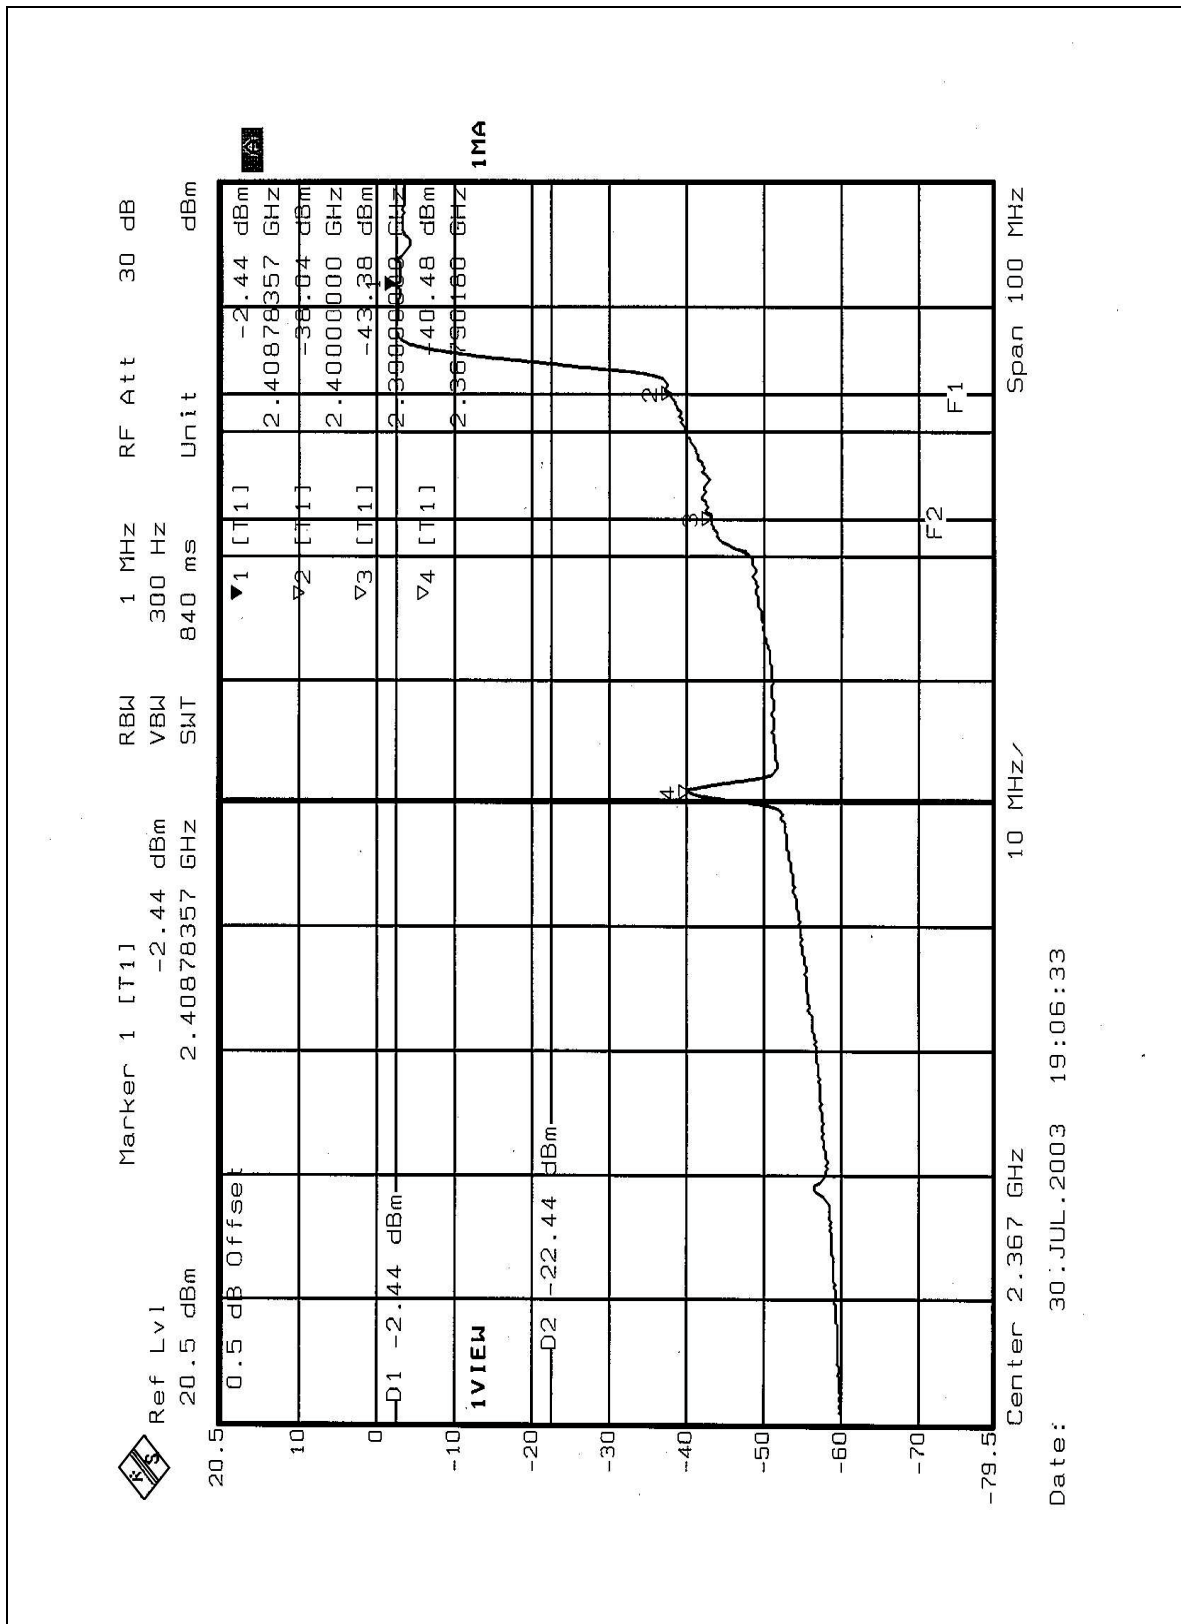

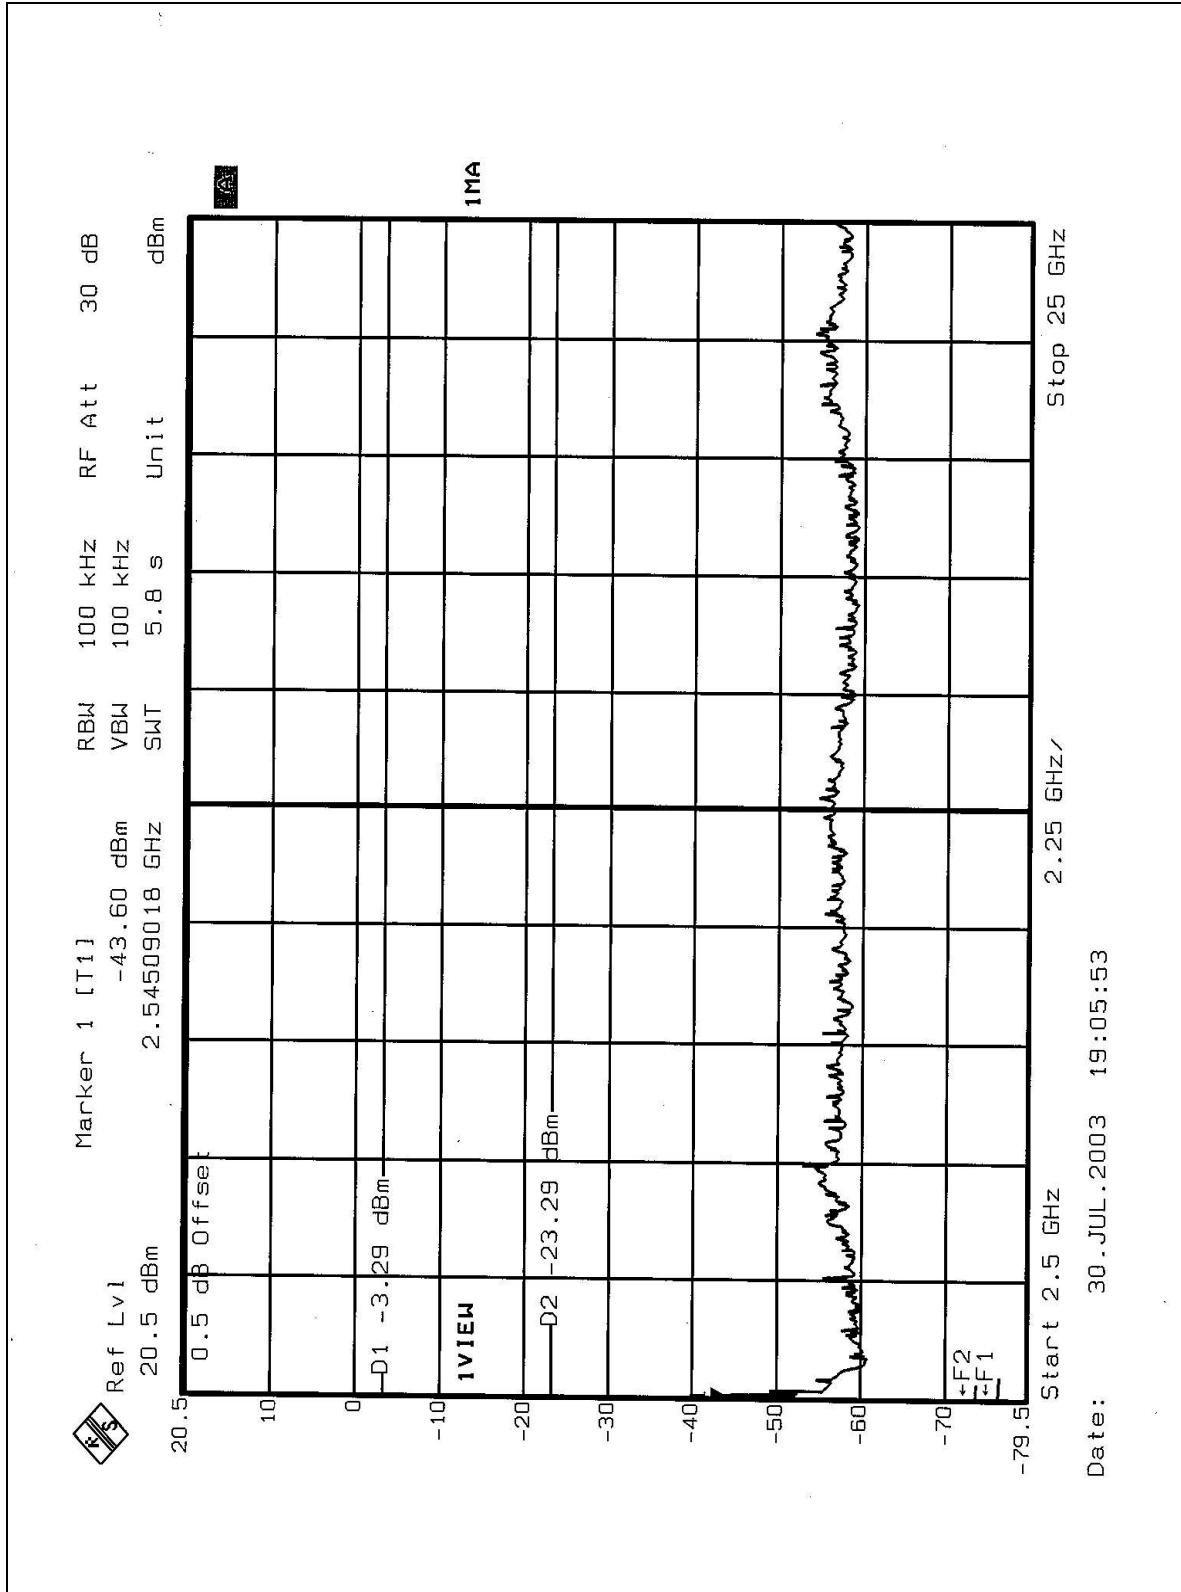

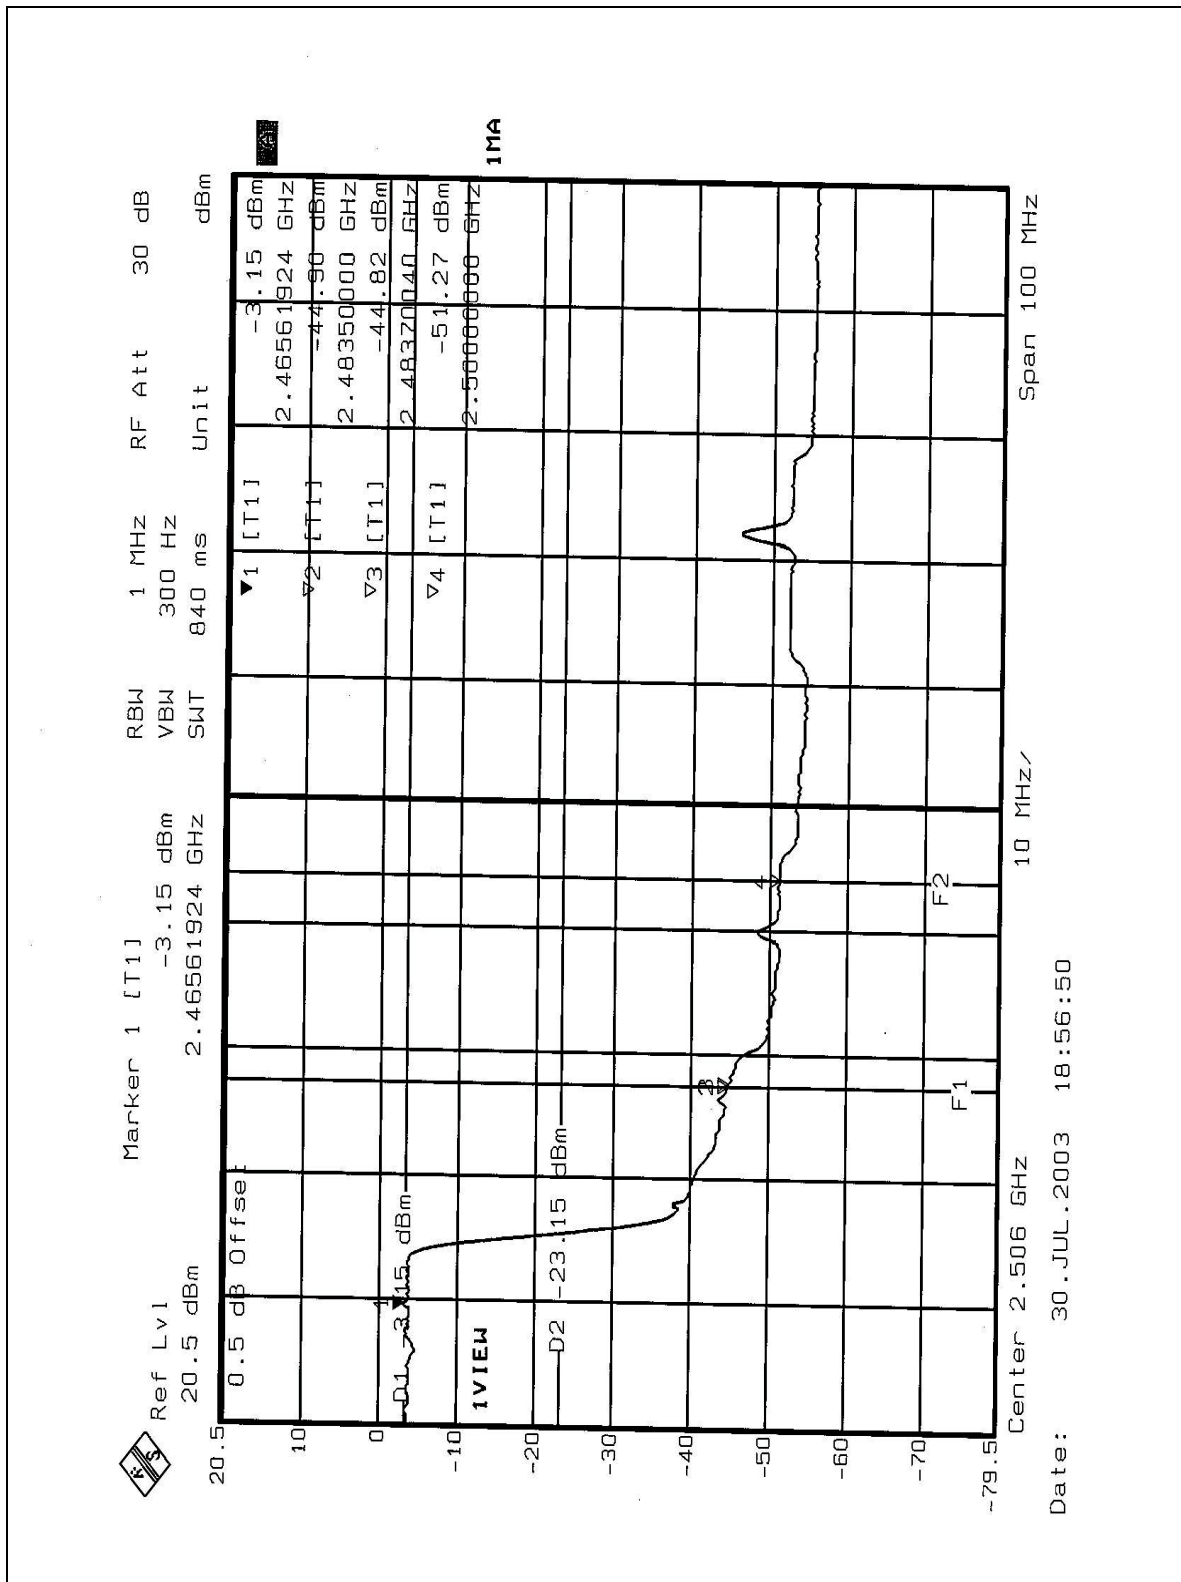

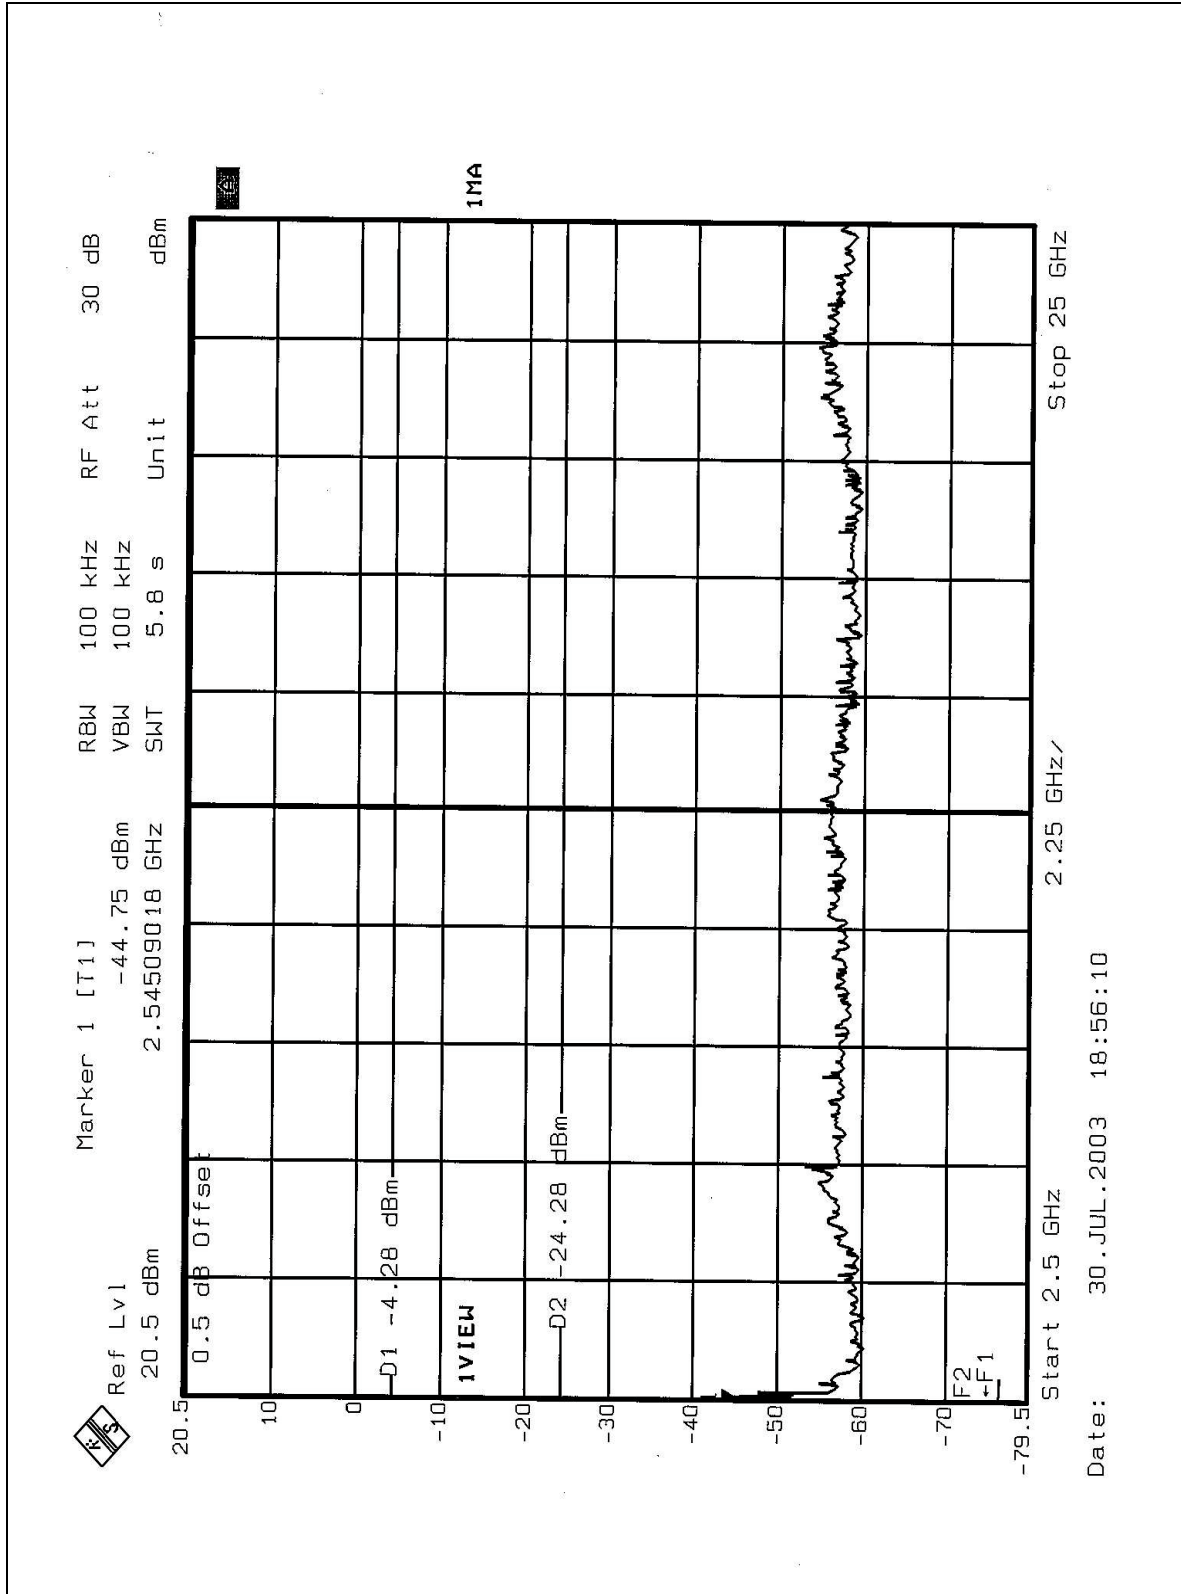



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna without antenna connector. The maximum Gain of the antenna is 4dBi



5. TEST TYPES AND RESULTS (FOR PART 802.11a)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May. 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

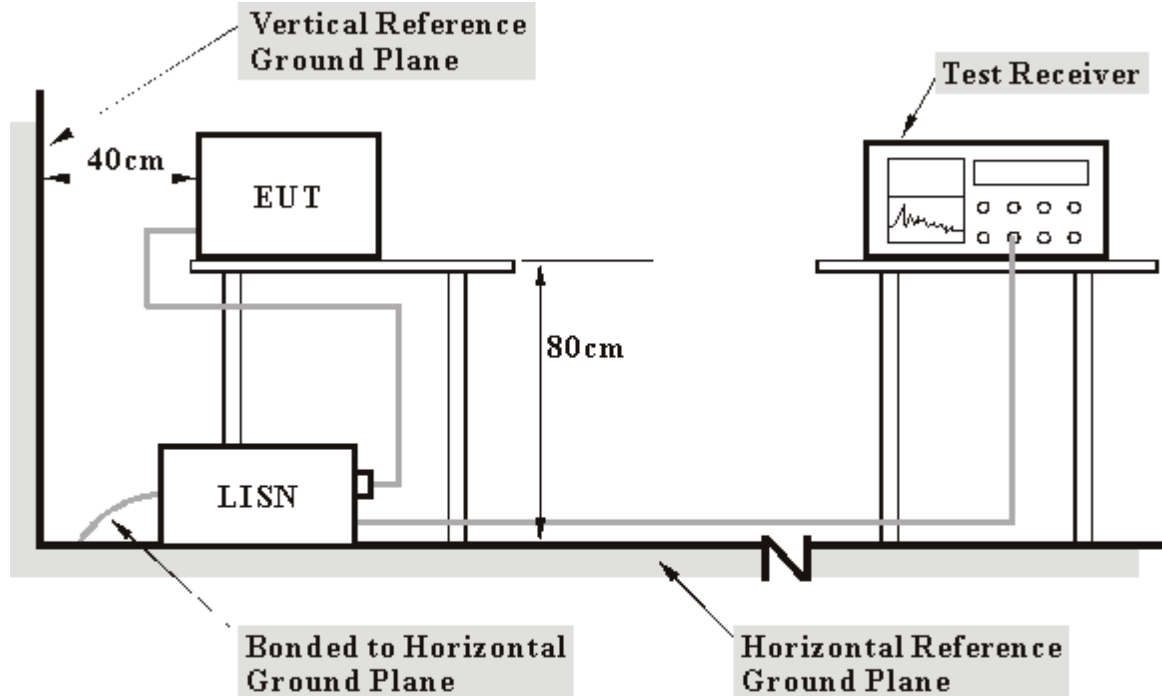

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6




5.1.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
INPUT POWER (SYSTEM)	120Vac, 60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	PHASE	Line (L)
TESTED BY	Steven Lu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.181	0.06	47.04	-	47.10	-	64.43
2	0.298	0.06	42.81	-	42.87	-	60.29	50.29	-17.42	-
3	0.494	0.08	40.22	-	40.30	-	56.10	46.10	-15.81	-
4	0.619	0.10	32.82	-	32.92	-	56.00	46.00	-23.08	-
5	5.434	0.27	27.16	-	27.43	-	60.00	50.00	-32.57	-
6	28.840	0.89	19.27	-	20.16	-	60.00	50.00	-39.84	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

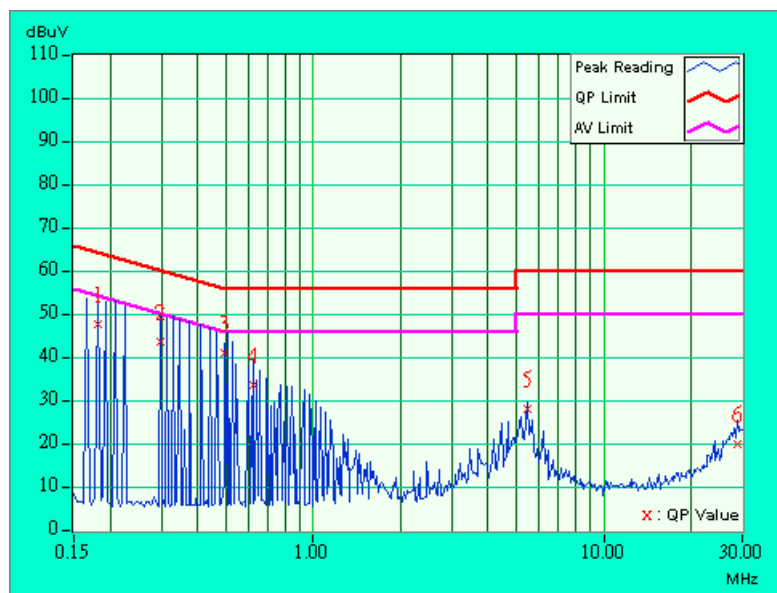




EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
INPUT POWER (SYSTEM)	120Vac, 60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28deg. C, 65%RH, 991 hPa	PHASE	Neutral (N)
TESTED BY	Steven Lu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.197	0.05	46.13	-	46.18	-	63.74
2	0.349	0.05	41.83	-	41.88	-	58.98	48.98	-17.10	-
3	0.495	0.07	39.74	-	39.81	-	56.09	46.09	-16.28	-
4	0.834	0.13	24.03	-	24.16	-	56.00	46.00	-31.84	-
5	5.434	0.25	27.03	-	27.28	-	60.00	50.00	-32.72	-
6	24.141	0.69	22.32	-	23.01	-	60.00	50.00	-36.99	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

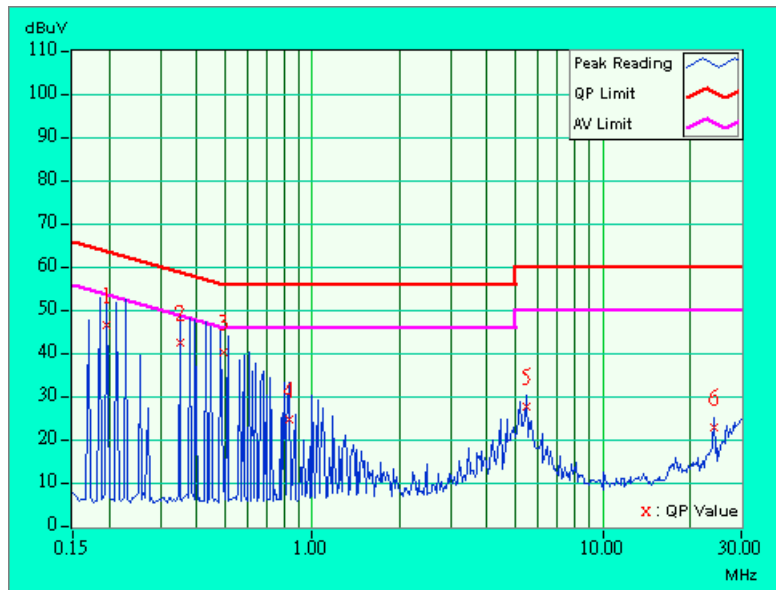



5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	73.3
5250~5350	-27	73.3
5725~5825	-27 *note 1	73.3
	-17 *note 2	83.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



5.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May. 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiated_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05. 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05. 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



5.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

5.2.5 DEVIATION FROM TEST STANDARD

No deviation

5.2.6 TEST SETUP

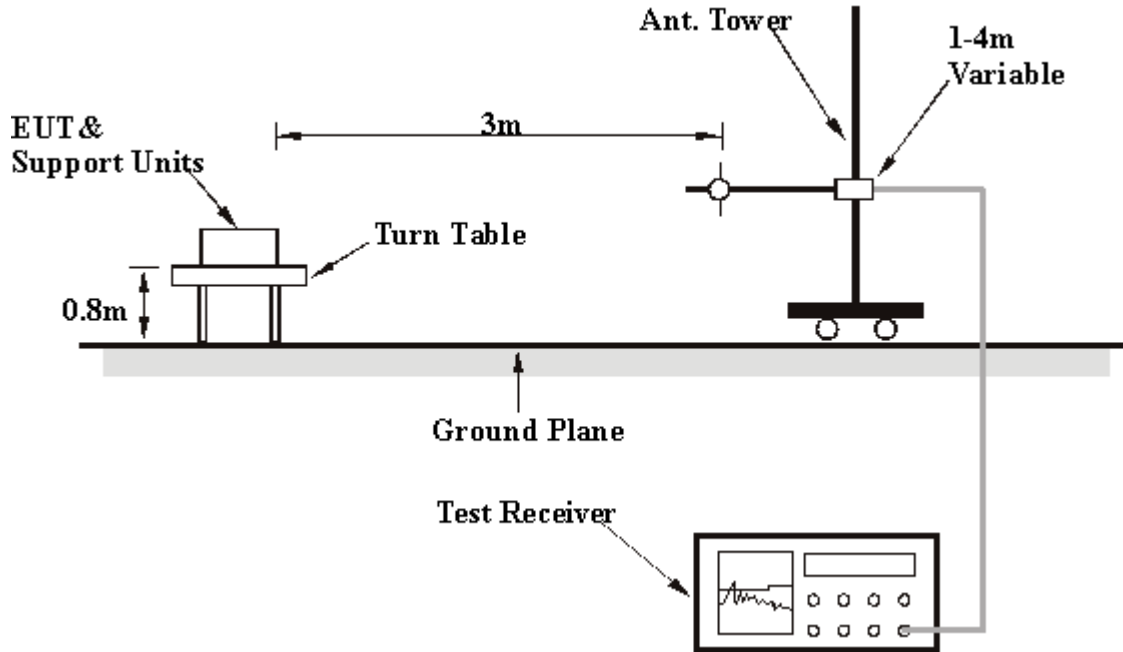

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6



5.2.8 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	29.4 QP	43.50	-14.10	1.00 H	195	16.30	13.20
2	175.00	29.8 QP	43.50	-13.70	1.00 H	101	19.10	10.60
3	192.01	30.9 QP	43.50	-12.60	1.00 H	48	20.10	10.80
4	200.01	28.0 QP	43.50	-15.50	1.00 H	117	17.00	11.00
5	225.00	30.2 QP	46.00	-15.80	1.00 H	225	16.90	13.30
6	250.02	38.4 QP	46.00	-7.60	1.00 H	79	22.80	15.60
7	275.01	38.3 QP	46.00	-7.70	1.00 H	165	21.90	16.40
8	288.00	32.7 QP	46.00	-13.30	1.00 H	114	16.00	16.60
9	300.01	34.7 QP	46.00	-11.30	1.00 H	131	17.90	16.80
10	320.00	35.5 QP	46.00	-10.50	1.00 H	73	18.30	17.10
11	352.01	32.4 QP	46.00	-13.60	1.00 H	235	14.70	17.70
12	375.00	35.2 QP	46.00	-10.80	1.00 H	121	16.80	18.40
13	400.00	30.7 QP	46.00	-15.30	1.00 H	40	11.60	19.10
14	495.00	39.5 QP	46.00	-6.50	1.00 H	165	18.40	21.10
15	500.03	33.5 QP	46.00	-12.50	1.00 H	214	12.30	21.20
16	512.01	36.2 QP	46.00	-9.80	1.00 H	108	15.00	21.20
17	693.00	31.6 QP	46.00	-14.40	1.00 H	84	8.60	23.00
18	791.99	33.0 QP	46.00	-13.00	1.00 H	102	8.20	24.80
19	800.01	33.2 QP	46.00	-12.80	1.00 H	187	8.30	24.90
20	891.00	33.7 QP	46.00	-12.30	1.00 H	182	8.50	25.20
21	989.99	36.0 QP	54.00	-18.00	1.00 H	135	10.80	25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
FREQUENCY RANGE	Below 1000MHz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	37.8 QP	43.50	-5.70	1.12 V	45	24.60	13.20
2	150.00	33.4 QP	43.50	-10.10	1.00 V	136	21.90	11.50
3	175.00	36.3 QP	43.50	-7.20	1.00 V	38	25.60	10.60
4	200.00	29.2 QP	43.50	-14.30	1.00 V	100	18.20	11.00
5	225.00	37.6 QP	46.00	-8.40	1.00 V	92	24.30	13.30
6	250.01	38.9 QP	46.00	-7.10	1.00 V	0	23.30	15.60
7	275.01	33.4 QP	46.00	-12.60	1.00 V	185	16.90	16.40
8	288.00	37.3 QP	46.00	-8.70	1.00 V	185	20.70	16.60
9	297.00	30.2 QP	46.00	-15.80	1.00 V	203	13.40	16.70
10	300.00	30.4 QP	46.00	-15.60	1.00 V	94	13.60	16.80
11	320.00	42.1 QP	46.00	-3.90	1.00 V	82	25.00	17.10
12	375.01	36.0 QP	46.00	-10.00	1.00 V	91	17.60	18.40
13	384.00	39.0 QP	46.00	-7.00	1.00 V	110	20.30	18.70
14	396.00	28.4 QP	46.00	-17.60	1.00 V	172	9.40	19.00
15	416.01	35.9 QP	46.00	-10.10	1.00 V	152	16.60	19.30
16	450.00	31.4 QP	46.00	-14.60	1.00 V	73	11.70	19.80
17	495.00	44.1 QP	46.00	-1.90	1.00 V	209	23.10	21.10
18	500.00	37.4 QP	46.00	-8.60	1.00 V	74	16.20	21.20
19	519.74	34.7 QP	46.00	-11.30	1.00 V	229	13.60	21.20
20	576.00	41.7 QP	46.00	-4.30	1.00 V	124	19.80	21.90
21	608.00	37.3 QP	46.00	-8.70	1.00 V	94	14.60	22.70
22	608.00	37.8 QP	46.00	-8.20	1.00 V	175	15.10	22.70
23	640.01	35.3 QP	46.00	-10.70	1.00 V	99	12.50	22.80
24	671.99	37.0 QP	46.00	-9.00	1.00 V	59	14.10	22.90
25	693.01	35.1 QP	46.00	-10.90	1.00 V	153	12.10	23.00
26	792.01	39.4 QP	46.00	-6.60	1.00 V	81	14.70	24.80
27	891.01	33.7 QP	46.00	-12.30	1.00 V	166	8.50	25.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
		CHANNEL	1
FREQUENCY RANGE	1~40GHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4144.00	43.3 PK	74.00	-30.70	1.21 H	84	9.80	33.50
2	*5180.00	97.8 PK			1.41 H	39	61.60	36.20
2	*5180.00	86.8 AV			1.41 H	39	50.50	36.20
3	10360.00	55.5 PK	73.30	-17.80	1.33 H	33	11.00	44.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4144.00	43.0 PK	74.00	-31.00	1.24 V	21	9.50	33.50
2	#5150.00	58.0 PK	73.30	-15.30	1.40 V	194	21.80	36.20
2	#5150.00	48.0 AV	73.30	-25.30	1.40 V	194	11.80	36.20
3	*5180.00	107.3 PK			1.40 V	194	71.00	36.20
3	*5180.00	97.6 AV			1.40 V	194	61.40	36.20
4	10360.00	54.8 PK	73.30	-18.50	1.50 V	21	10.30	44.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
		CHANNEL	4
FREQUENCY RANGE	1~40GHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4192.00	42.8 PK	74.00	-31.20	1.31 H	52	9.30	33.50
2	*5240.00	100.3 PK			1.55 H	151	64.00	36.30
2	*5240.00	91.0 AV			1.55 H	151	54.70	36.30
3	10480.00	57.7 PK	73.30	-15.60	1.30 H	34	13.00	44.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4192.00	43.7 PK	74.00	-30.30	1.37 V	245	10.10	33.50
2	*5240.00	108.5 PK			1.06 V	60	72.20	36.30
2	*5240.00	97.8 AV			1.06 V	60	61.50	36.30
3	10480.00	55.3 PK	73.30	-18.00	1.22 V	74	10.60	44.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
		CHANNEL	5
FREQUENCY RANGE	1~40GHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4208.00	43.0 PK	74.00	-31.00	1.35 H	34	9.40	33.60
2	*5260.00	98.2 PK			1.75 H	201	61.80	36.40
2	*5260.00	87.8 AV			1.75 H	201	51.40	36.40
3	10520.00	58.3 PK	73.30	-15.00	1.12 H	41	13.50	44.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4208.00	43.3 PK	74.00	-30.70	1.36 V	59	9.70	33.60
2	*5260.00	108.8 PK			1.52 V	194	72.40	36.40
2	*5260.00	98.9 AV			1.52 V	194	62.50	36.40
3	10520.00	60.3 PK	73.30	-13.00	1.12 V	352	15.50	44.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
		CHANNEL	8
FREQUENCY RANGE	1~40GHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4255.00	44.0 PK	74.00	-30.00	1.31 H	251	10.40	33.60
2	*5320.00	96.3 PK			1.42 H	240	59.90	36.40
2	*5320.00	85.9 AV			1.42 H	240	49.40	36.40
3	#10640.00	55.4 PK	74.00	-18.60	1.51 H	47	10.30	45.10
3	#10640.00	44.7 AV	54.00	-9.30	1.51 H	47	-0.40	45.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4256.00	45.7 PK	74.00	-28.30	1.15 V	320	12.10	33.60
2	*5320.00	104.4 PK			1.25 V	222	68.00	36.40
2	*5320.00	93.7 AV			1.25 V	222	57.30	36.40
3	#5350.00	54.0 PK	74.00	-20.00	1.25 V	222	17.50	36.50
3	#5350.00	46.0 AV	54.00	-8.00	1.25 V	222	9.50	36.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
		CHANNEL	9
FREQUENCY RANGE	1~40GHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4596.00	43.2 PK	74.00	-30.80	1.30 H	55	8.90	34.30
2	5715.00	59.1 PK	73.30	-14.20	1.41 H	160	22.00	37.10
3	5725.00	67.1 PK	83.30	-16.20	1.41 H	160	30.00	37.10
4	*5745.00	93.6 PK			1.41 H	160	56.50	37.10
4	*5745.00	84.9 AV			1.41 H	160	47.80	37.10
5	#11490.00	56.6 PK	74.00	-17.40	1.31 H	224	10.90	45.80
6	#11490.00	45.8 AV	54.00	-8.20	1.31 H	224	0.00	45.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4596.00	45.0 PK	74.00	-29.00	1.25 V	217	10.70	34.30
2	5715.00	62.5 PK	73.30	-10.80	1.12 V	32	25.40	37.10
3	5725.00	74.8 PK	83.30	-8.50	1.23 V	62	37.70	37.10
4	*5745.00	108.9 PK			1.65 V	85	71.80	37.10
4	*5745.00	96.8 AV			1.65 V	85	59.70	37.10
5	#11490.00	56.3 PK	74.00	-17.70	1.23 V	62	10.50	45.80
5	#11490.00	45.5 AV	54.00	-8.50	1.23 V	62	-0.20	45.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
		CHANNEL	12
FREQUENCY RANGE	1~40GHz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60Hz
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4644.00	43.9 PK	74.00	-30.10	1.23 H	235	9.40	34.50
2	*5805.00	100.2 PK			1.87 H	26	63.00	37.20
2	*5805.00	90.7 AV			1.87 H	26	53.50	37.20
3	5825.00	66.3 PK	83.30	-17.00	1.87 H	26	29.00	37.30
4	5835.00	57.3 PK	73.30	-16.00	1.87 H	26	20.00	37.30
5	#11611.00	55.9 PK	74.00	-18.10	1.54 H	214	10.20	45.60
5	#11611.00	45.4 AV	54.00	-8.60	1.54 H	214	-0.30	45.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4644.00	44.2 PK	74.00	-29.80	1.08 V	144	9.70	34.50
2	*5805.00	106.0 PK			1.18 V	165	68.80	37.20
2	*5805.00	95.4 AV			1.18 V	165	58.20	37.20
3	5825.00	72.3 PK	83.30	-11.00	1.18 V	165	35.00	37.30
4	5835.00	58.3 PK	73.30	-15.00	1.18 V	165	21.00	37.30
5	#11611.00	56.2 PK	74.00	-17.80	1.50 V	231	10.50	45.60
5	#11611.00	45.2 AV	54.00	-8.80	1.50 V	231	-0.50	45.60

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



5.3 PEAK TRANSMIT POWER MEASUREMENT

5.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35 GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825 GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

Note: Where B is the 26dB emission bandwidth in MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug, 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




5.3.3 TEST PROCEDURE

4. The transmitter output was connected to the spectrum analyzer.
5. Set span to encompass the entire emission bandwidth of the signal.
6. Set RBW to 1MHz, VBW to 300kHz.
7. Using the spectrum analyzer's channel power measurement function to measure the output power.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



5.3.7 TEST RESULTS

EUT	802.11a+802.11g Dual Band Wireless Access Point	MODEL	AM-5010-11-ag
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Ansen Lei		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5180	8.26	17.00	30.86	PASS
4	5240	14.52	17.00	31.34	PASS
5	5260	16.25	24.00	30.62	PASS
8	5320	14.93	24.00	29.42	PASS
9	5745	17.82	30.00	34.31	PASS
12	5805	16.41	30.00	32.71	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.



CHANNEL 1

