

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**PS2 WIRELESS CONTROLLER**

**FCC ID: RDDCYG70899192H**

**MODEL No.: G7089**

**BRAND NAME: N/A**

**REPORT NO: TR05070022**

**ISSUE DATE: September 5, 2005**

*Prepared for*

**INTEC INC.  
5255 NW 159<sup>TH</sup> STREET MIAMI, FL 33014**

*Prepared by*

**SHENZHEN HUATONGWEI INTERNATIONAL  
INSPECTION CO., LTD**

*d.b.a.*

**SHENZHEN HUATONGWEI INTERNATIONAL INSPECTION CO., LTD  
HUATONGWEI BUILDING, KEJI RD. 12 S., HIGH-TECH PARK,  
NANSHAN DISTRICT, SHENZHEN,  
GUANGDONG , P.R.CHINA**

**TEL: 86-755-26748099**

**FAX: 86-755-26748089**

**VERIFICATION OF COMPLIANCE**

Applicant:	INTEC INC. 5255 NW 159 <sup>TH</sup> STREET MIAMI, FL 33014
Manufacturer	SHENZHEN CHUYAR ELECTRONICS CO., LTD BLDG 3, BAOZHOU IND. ESTATE 117 JIUWEI RD. BAO'AN, SHENZHEN
Product Description:	PS2 WIRELESS CONTROLLER
Brand Name:	N/A
Model Number:	G7092; G7089; G7091
Serial Number:	N/A
File Number:	SQE05070022
Date of Test:	July 25, 2005 ~ September 5, 2005

**We hereby certify that:**

The above equipment was tested by SHENZHEN HUA TONG WEI INTERNATIONAL INSPECTION CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

***Reviewed By***



---

***Jimmy Li / Technical Manager***  
**SHENZHEN HUA TONG WEI**  
**INTERNATIONAL INSPECTION CO., LTD**

## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION.....</b>	<b>4</b>
1.1	Product Description.....	4
1.2	Related Submittal(s) / Grant (s).....	4
1.3	Test Methodology.....	4
1.4	Test Facility.....	4
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
2.1	Configuration of Tested System.....	5
<b>3.</b>	<b>Summary of Test Result.....</b>	<b>7</b>
<b>4.</b>	<b>DESCRIPTION OF TEST MODES .....</b>	<b>7</b>
<b>5.</b>	<b>PARAMETERS FOR GAME PAD .....</b>	<b>8</b>
5.1	Conduction Emission.....	8
5.2	Hopping Channels .....	10
5.3	Channel Separation.....	12
5.4	20 dB Bandwidth .....	13
5.5	Operation Frequency.....	14
5.6	Peak Output Power.....	15
5.7	Spurious Emission at Transmitting Mode .....	18
5.8	Band Edge .....	20
5.9	Spurious Emission at Receiving Mode .....	22
5.10	Dwell Time .....	24
<b>6.</b>	<b>PARAMETERS FOR HOST .....</b>	<b>25</b>
6.1	Conduction Emission.....	25
6.2	Hopping Channels .....	26
6.3	Channel Separation.....	27
6.4	20 dB Bandwidth .....	28
6.5	Operation Frequency.....	29
6.6	Peak Output Power.....	30
6.7	Spurious Emission at Transmitting Mode .....	31
6.8	Band Edge .....	32
6.9	Spurious Emission at Receiving Mode .....	34
6.10	Dwell Time .....	35
<b>APPENDIX 1</b>		
<b>PHOTOGRAPHS OF SET UP.....</b>		<b>36</b>
<b>APPENDIX 2</b>		
<b>PHOTOGRAPHS OF EUT.....</b>		<b>40</b>

# 1 GENERAL INFORMATION

## 1.1 Product Description

The EUT is an short range, lower power, wireless controller designed as an “Input Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical descriptions of EUT is described as following:

A). Operation Frequency: Form 2402.784MHz - 2479.680MHz  
total 91 channels with 864 KHz channel separation

B). Modulation: FHSS

C). Antenna Designation: Non-User Replaceable (Integrated in the PCB)

D). Power Supply: 3 V DC by battery.

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: RDDCYG70899192H filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.4 Test Facility

The fully anechoic chamber test site and conducted measurement facility used to collect the radiated data is located on the address of SHENZHEN HUA TONG WEI INTERNATIONAL INSPECTION CO., LTD Huatongwei Building, Keji Rd. 12 S., High-tech Park, Nanshan District, Shenzhen, Guangdong, P.R.China

The fully anechoic chamber Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements.

## 1.5 Special Accessories

Not available for this EUT intended for grant.


## 1.6 Equipment Modifications

Not available for this EUT intended for grant.


## 2 System Test Configuration

### 2.1 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System For Gamepad**



**Fig. 2-2 Configuration of Tested System For Host**

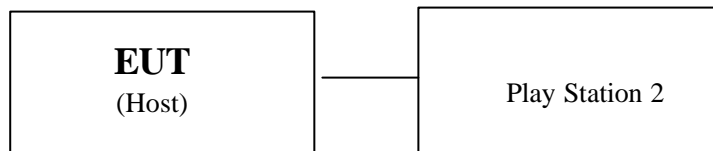

**Fig. 2-3 Configuration of Tested System For Normal Operation**

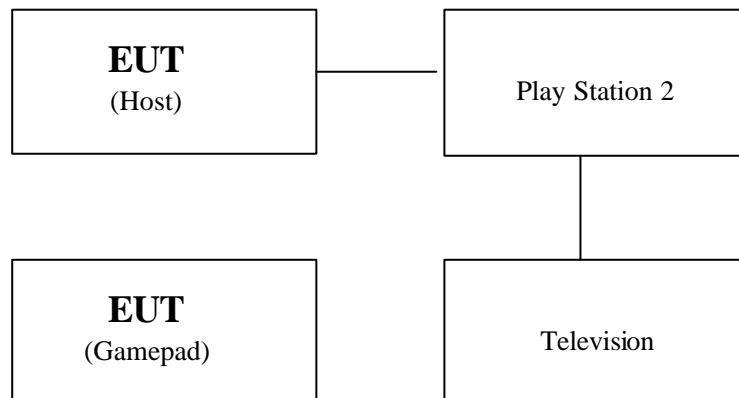


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	PS2 Wireless Controller	N/A	G7089	RDDCYG70899192H	N/A	<b>EUT</b>
	Play Station 2	Sony	SCPH-50004	N/A	FC4421082	
	Television	KONKA	T1476A	N/A	N/A	
	Adapter	DN-Li	YL41-3000600A	N/A	N/A	

### 3 Summary Of Test Results

FCC Rules	Description Of Test	EUT	Result
§ 15.247	Conduction Emission	Game Pad / Host	Compliant
§ 15.247	Hopping Channels	Game Pad / Host	Compliant
§ 15.247	Channel Separation	Game Pad / Host	Compliant
§ 15.247	20 dB Bandwidth	Game Pad / Host	Compliant
§ 15.247	Operation Frequency	Game Pad / Host	Compliant
§ 15.247	Peak Output Power	Game Pad / Host	Compliant
§ 15.247	Spurious Emission	Game Pad / Host	Compliant
§ 15.247	Band Edge	Game Pad / Host	Compliant
§ 15.247	Dwell Time	Game Pad / Host	Compliant

### 4 Description of test modes

#### 4.1 Game pad

##### 4.1.1 Continuous Transmitting Mode

1. The EUT (Game pad) has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
2. The EUT stays in continuous transmitting mode on the operation frequency being set.

##### 4.1.2 Continuous Receiving Mode

1. The EUT (Game pad) has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
2. The EUT stays in continuous receiving mode on the operation frequency being set.

#### 4.2 Host

##### 4.2.1 Continuous Transmitting Mode for Host

1. The EUT (Host) has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
2. The EUT stays in continuous transmitting mode on the operation frequency being set.

##### 4.2.2 Continuous Transmitting Mode for Host

1. The EUT (Host) has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
2. The EUT stays in continuous receiving mode on the operation frequency being set.

#### 4.3 System

##### 4.3.1 Normal Operation for Game pad and Host

1. The EUT (Game pad and Host) has been set to normal operating condition.
2. The EUT stays in normal operation mode using the FHSS method.

##### 4.3.2 Normal Operation for Game pad and Host

1. The EUT (Game pad and Host) has been set to normal operating condition.
2. The EUT stays in normal operation mode using the FHSS method.


## 5 Parameters For Game Pad

### 5.1 Conduction Emissions

#### 5.1.1 Measurement Procedure:

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC3V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### 5.1.2 Test SET-UP (Block Diagram of Configuration)

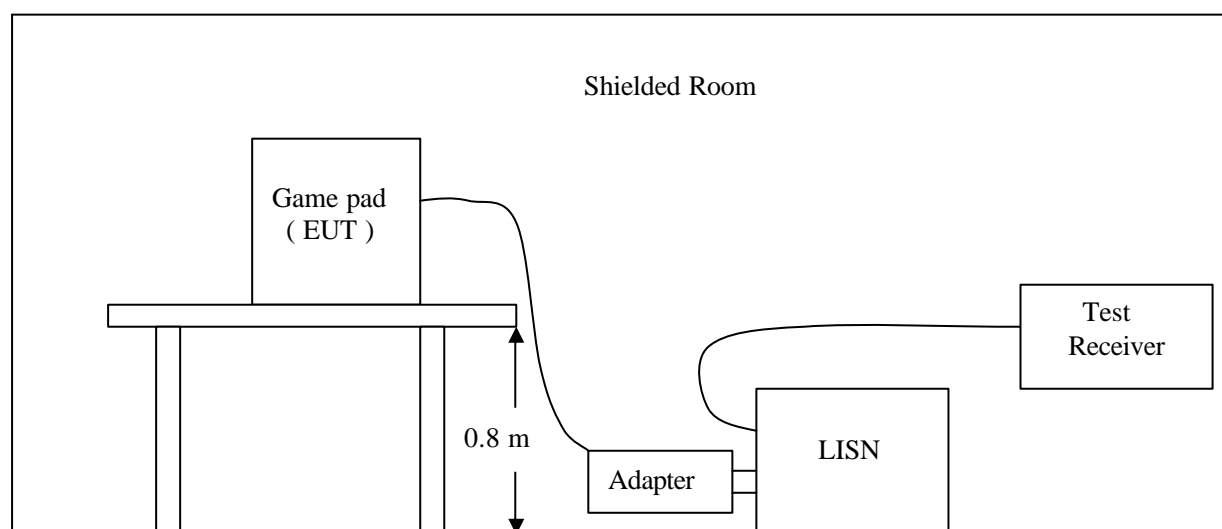

#### 5.1.3 Measurement Equipment Used:

Conducted Emission Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS30	100038	2004/11	2005/11
ARTIFICIAL MAINS	ROHDE & SCHWARZ	ESH2-Z5	100028	2004/11	2005/11
PULSE LIMITER	ROHDE & SCHWARZ	ESHSZ2	100044	2004/11	2005/11
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	N/A	N/A



## 5.1.4 Limits And Measurement Result:

Limits and Measurement Result Of Hopping Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.207 Conducted Emission Limit	See as the chart below	PASS

(The chart below shows the highest readings taken from the final data)

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.405	41.38	---	---	58.76	48.76	---	-7.38	L1
0.457	41.26	---	---	57.12	47.12	---	-5.86	L1
0.586	40.45	---	---	56.00	46.00	---	-5.55	L1
0.710	44.21	---	---	56.00	46.00	---	-1.79	L1
0.950	41.76	---	---	56.00	46.00	---	-4.24	L1
1.116	40.45	---	---	56.00	46.00	---	-5.55	L1
0.619	42.30	---	---	56.00	46.00	---	-3.70	L2
0.695	41.54	---	---	56.00	46.00	---	-4.46	L2
0.978	40.96	---	---	56.00	46.00	---	-5.04	L2
1.426	38.13	---	---	56.00	46.00	---	-7.87	L2
2.017	37.42	---	---	56.00	46.00	---	-8.58	L2
2.811	36.35	---	---	56.00	46.00	---	-9.65	L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

**\*\*NOTE:** “---” denotes the peak emission level was or more than 2dB below the Average limit, so no re-check anymore.


## 5.2 Hopping Channels

### 5.2.1 Measurement Procedure:


1. The EUT was placed on a turntable which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set SPA Start Frequency = 2.4 GHz, Stop Frequency= 2.4835 GHz, RBW= 10 KHz, VBW= 10 KHz.
4. Set SPA Trace 1 Max hold, then View.

### 5.2.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

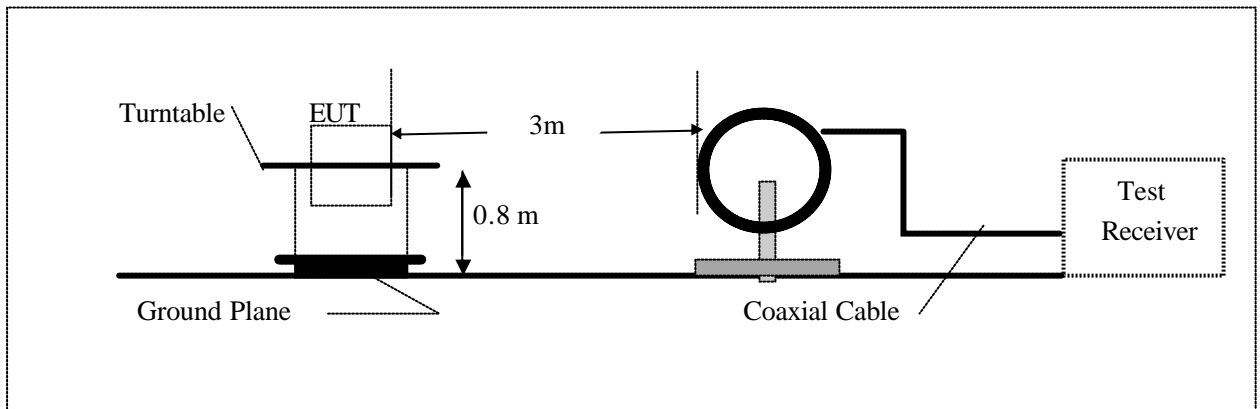

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

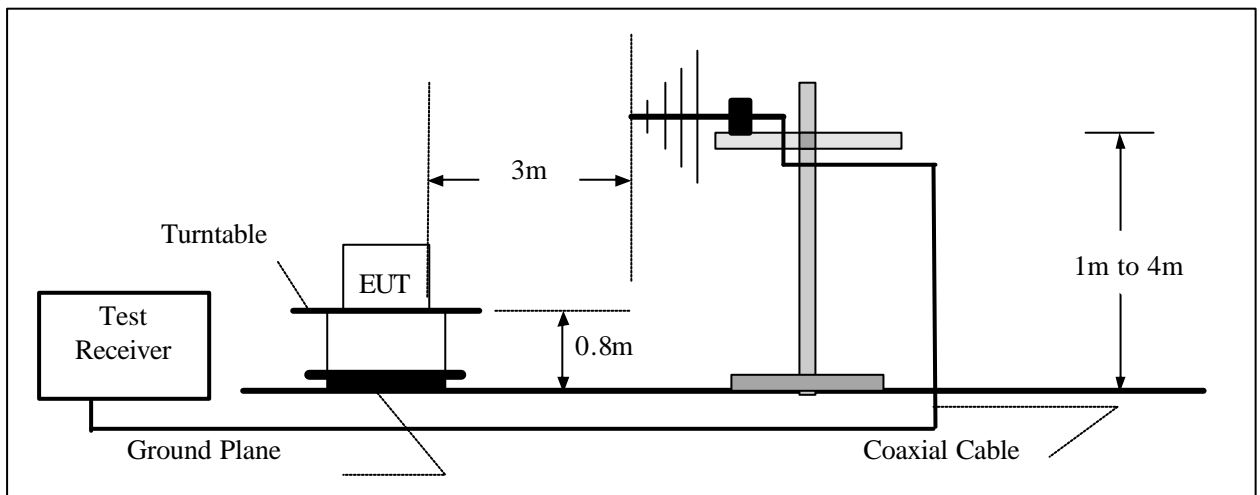

(C) Radiated Emission Test Set-Up, Frequency Above 1000MHz

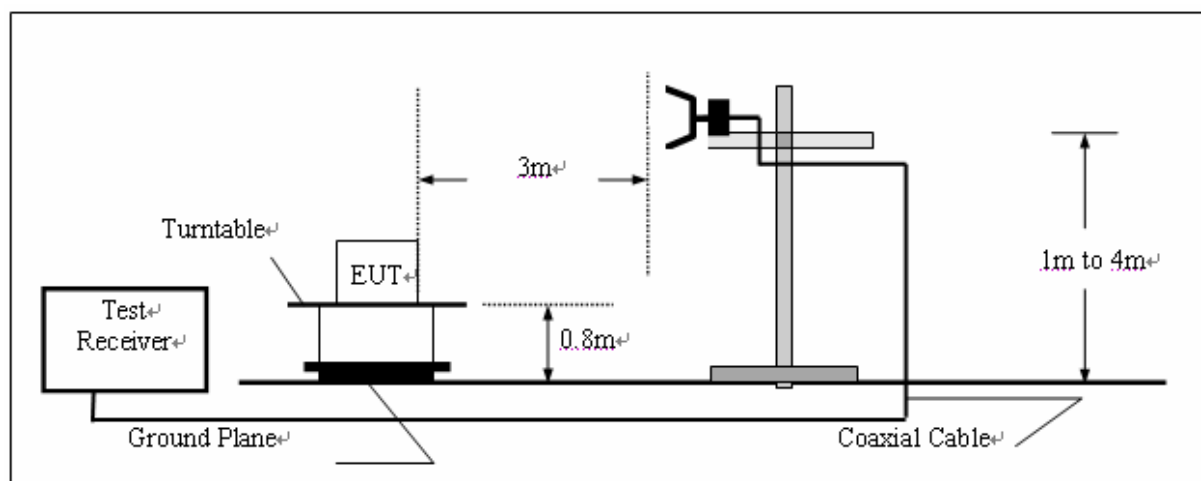

### 5.2.3 Measurement Equipment Used:

3/5 Anechoic Chamber Radiation Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2004/11	2005/11
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2004/11	2005/11
RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	N/A	N/A
TURNTABLE	ETS	2088	2149	N/A	N/A
ANTENNA MAST	ETS	2075	2346	N/A	N/A
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	NA	N/A	N/A

### 5.2.4 Limits And Measurement Result:

Limits and Measurement Result Of Hopping Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) At least 75 hopping Frequencies	Total 91 Channel	PASS

### 5.3 Channel Separation

#### 5.3.1 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set SPA Span= 5 MHz, RBW= 10 KHz, VBW= 10 KHz  
VBW= 10 KHz.
4. Set SPA Trace 1 Max hold, then View.

#### 5.3.2 Test SET-UP (Block Diagram of Configuration)

The same as described in Section 5.2.2

#### 5.3.3 Measurement Equipment Used:

The same as described in Section 5.2.3

#### 5.3.4 Limits And Measurement Result:

Limits and Measurement Result Of Channel Separation		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1) At least 25 KHz or 20 dB bandwidth of the hopping Channel, whichever is greater.	873 KHz	PASS

## 5.4 20 dB Bandwidth

### 5.4.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as continuous transmitting mode
3. Set SPA Center Frequency = Operation Frequency, RBW, VBW= 10 KHz, Span =5 MHz.
4. Set SPA Trace 1 Max hold, then View.

### 5.4.2 Test SET-UP (Block Diagram of Configuration)

The Same as described in Section 5.2.2

### 5.4.3 Measurement Equipment Used:

The same as described in Section 5.2.3

### 5.4.4 Limits And Measurement Results:

Limits and Measurement Result Of 20 dB Bandwidth For The Top Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The maximum 20 dB bandwidth of the hopping channel is 1 MHz	782 KHz	PASS

Limits and Measurement Result Of 20 dB Bandwidth For The Middle Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The maximum 20 dB bandwidth of the hopping channel is 1 MHz	779 KHz	PASS

Limits and Measurement Result Of 20 dB Bandwidth For The Bottom Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The maximum 20 dB bandwidth of the hopping channel is 1 MHz	780 KHz	PASS

## 5.5 Operation Frequency

### 5.5.1 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Continuous Transmitting Mode.
3. Set SPA Center Frequency = Bottom Channel for Fl measurement ( Top Channel for Ft measurement, RBW= 10 KHz, VBW= 10 KHz, Span= 5 MHz
4. Set SPA Trace 1 Max hold, then View.

### 5.5.2 Test SET-UP (Block Diagram of Configuration)

The same as described in Section 5.2.2

### 5.5.3 Measurement Equipment Used:

The same as described in Section 5.2.3

### 5.5.4 Limits And Measurement Result:

Limits and Measurement Result Of Operation Frequency		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 The operation frequencies shall lie wholly within 2.4 GHz to 2.4835 GHz	Fl=2.40215 GHz Ft=2.47952 GHz	PASS

### Notes:

Fl means the lowest band edge frequency of the bottom channel; Ft means the highest band edge frequency of the top channel



## 5.6 Peak Output Power

### 5.6.1 Measurement Procedure:

- 1 On a test site, the EUT shall be placed on a turntable
- 2 The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3 The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4 The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5 The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6 The transmitter shall then be rotated through 360 ° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7 The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8 The maximum signal level detected by the measuring receiver shall be noted.
- 9 Replace the antenna with a proper Antenna (substitution antenna).
- 10 The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 11 The substitution antenna shall be connected to a calibrated signal generator.
- 12 If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13 The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 14 The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 15 The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16 The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.
- 17 The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna .

## 5.6.2 Test SET-UP (Block Diagram of Configuration)

## Substitution Method (Radiated Emission)

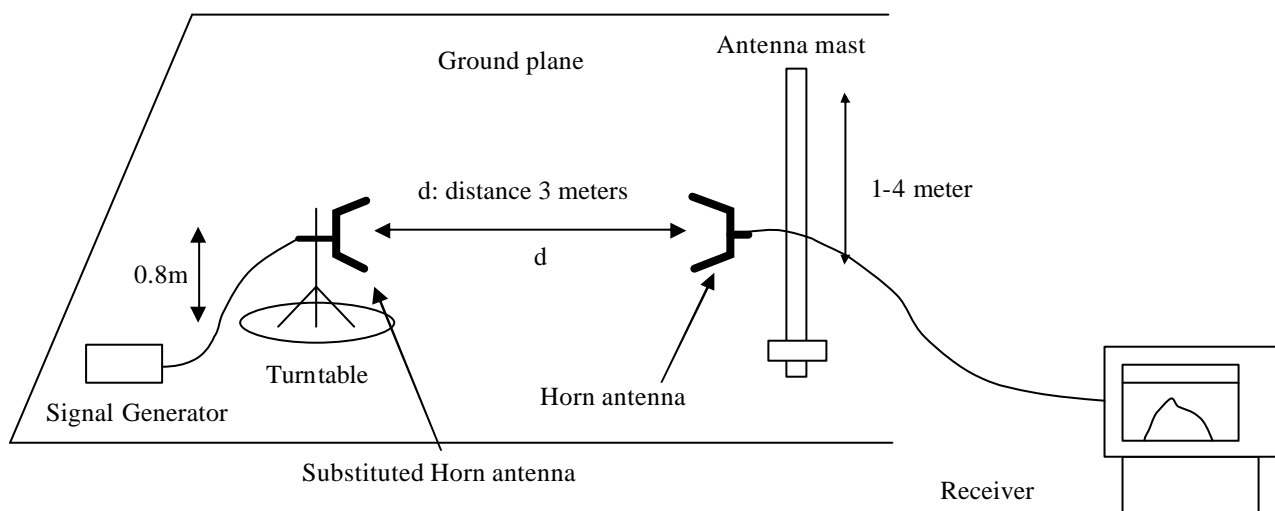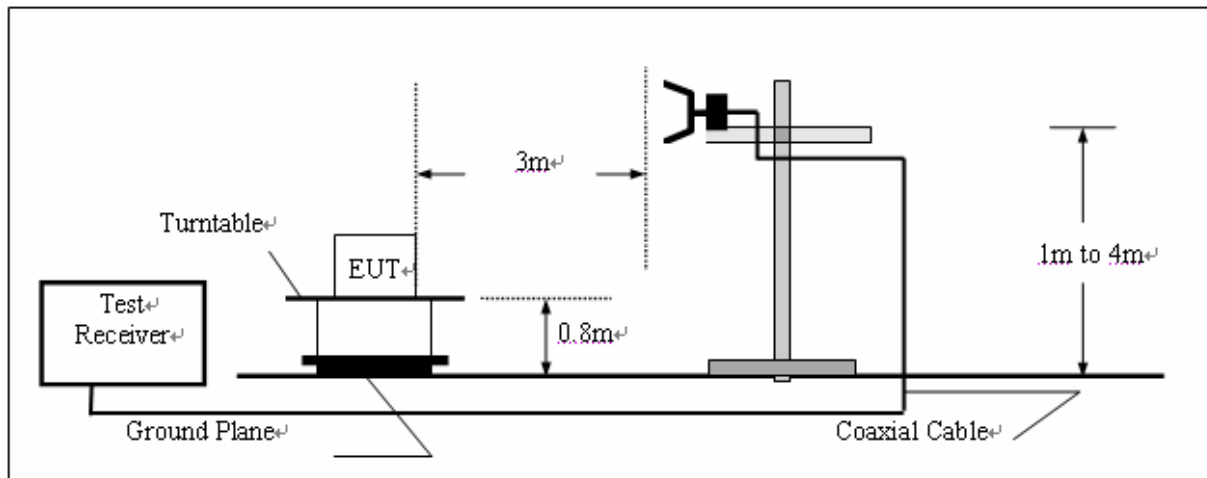



## 5.6.3 Measurement Equipment Used:

3/5 Anechoic Chamber Radiation Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2004/11	2005/11
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2004/11	2005/11
RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	N/A	N/A
TURNTABLE	ETS	2088	2149	N/A	N/A
ANTENNA MAST	ETS	2075	2346	N/A	N/A
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	NA	N/A	N/A

## 5.6.4 Limits And Measurement Result:

Limits and Measurement Result Of Peak Output Power		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (b)(1) The maximum peak output power is 1 W ( 30 dBm )	Pt= 10.96 dBm	PASS
	Pm=10.53 dBm	PASS
	Pl=10.17 dBm	PASS



## 5.7 Spurious Emission At Transmitting mode

### 5.7.1 Measurement Procedure:

The same as described in section 5.6.1

### 5.7.2 Test SET-UP (Block Diagram of Configuration)

Substitution method (Radiation Emission below 1 GHz)

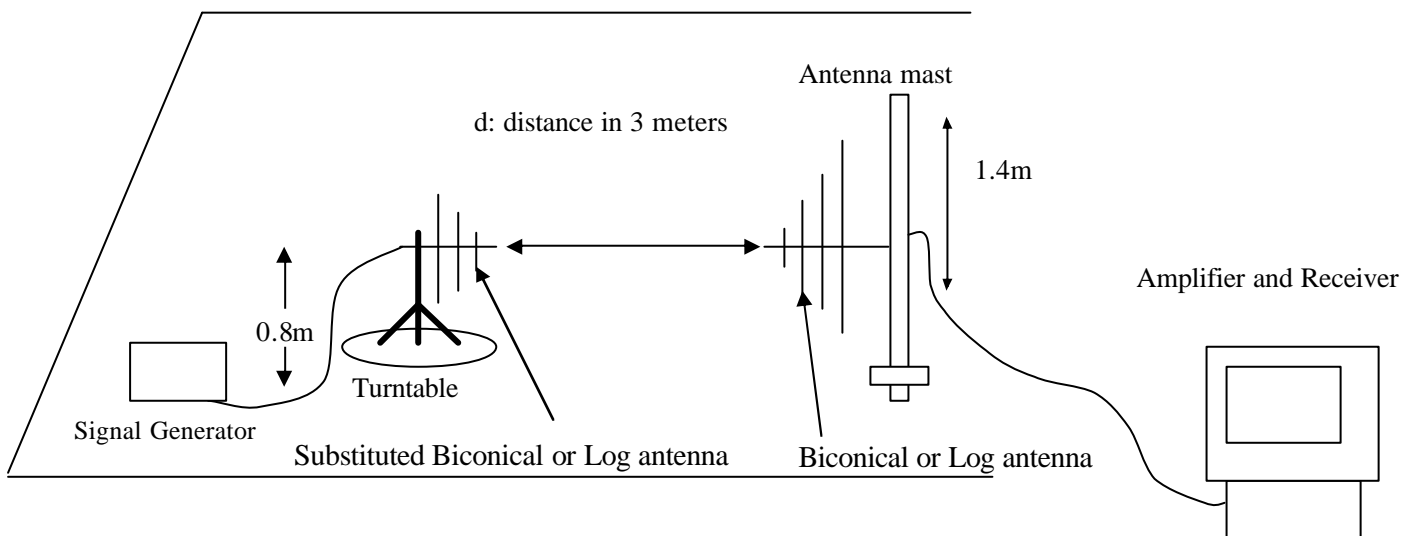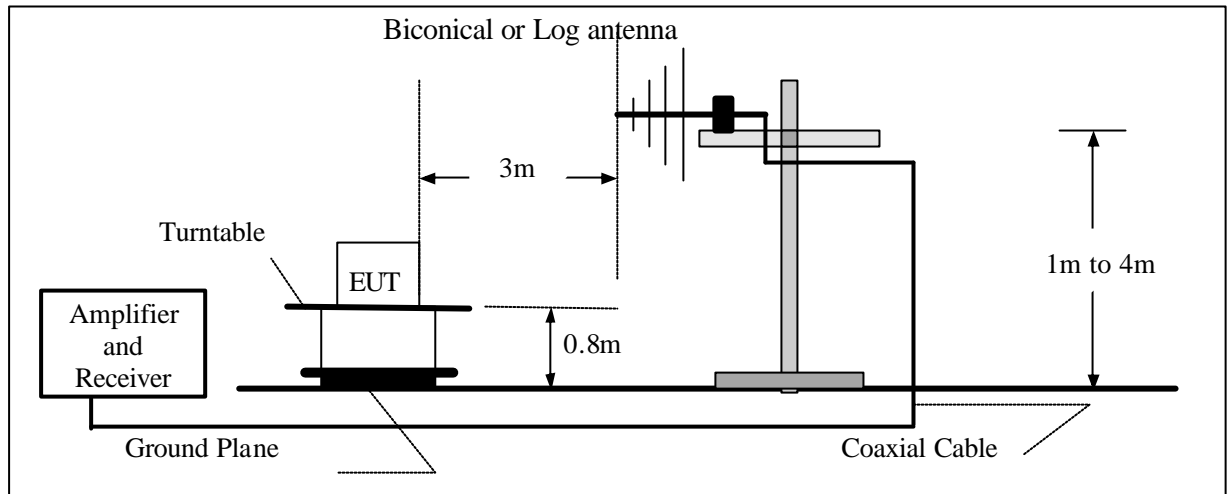

Substitution method (Radiation Emission Above 1 GHz)

The same as described in section 5.6.2

## 5.7.3 Measurement Equipment Used:

3/5 Anechoic Chamber Radiation Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2004/11	2005/11
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2004/11	2005/11
RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	N/A	N/A
TURNTABLE	ETS	2088	2149	N/A	N/A
ANTENNA MAST	ETS	2075	2346	N/A	N/A
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	NA	N/A	N/A

## 5.7.4 Limits And Measurement Result:

Limits and Measurement Result Of Spurious Emission		
Applicable Limits	Measurement Result	
	Test Data	Criteria
<p>Per 15.247 (c)</p> <p>In any 100 KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.</p> <p>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)</p>	See as the chart Below	PASS

Frequency (MHz)	Reading level (dBuV)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
4958.16	46.28	V	-27.7	3.9	6.3	-25.3	-9.04	-16.26
4958.16	37.61	H	-35.9	3.9	6.3	-33.5	-9.04	-24.46
Others	--	V	--					
Others	--	H	--					

Remark:

- (1) Corrected Power (dBm) = SG O/P-Cable + Ant Gain
- (2) Measuring frequencies from 30 MHz to the 25 GHz.
- (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**5.8 BAND EDGE****5.8.1 Measurement Procedure:**

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Continuous Transmitting Mode.
3. Set SPA Center Frequency = Bottom Channel for lowest frequency band edge ( Top Channel for highest frequency band edge ) RBW= 10 KHz, VBW= 10 KHz, Span= 5 MHz
4. Set SPA Trace 1 Max hold, then View.

**5.8.2 Test SET-UP (Block Diagram of Configuration)**



The same as described in section 5.2.2

**5.8.3 Measurement Equipment Used:**

The same as described in section 5.2.3

**5.8.4 Limits And Measurement Result:**

<b>Limits and Measurement Result Of Band Edge</b>		
<b>Applicable Limits</b>	<b>Measurement Result</b>	
	<b>Test Data</b>	<b>Criteria</b>
Per 15.247 (c) In any 100 KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100 KHz bandwidth within the band that contains the highest level of the desired power.	See the test plots attached below	PASS

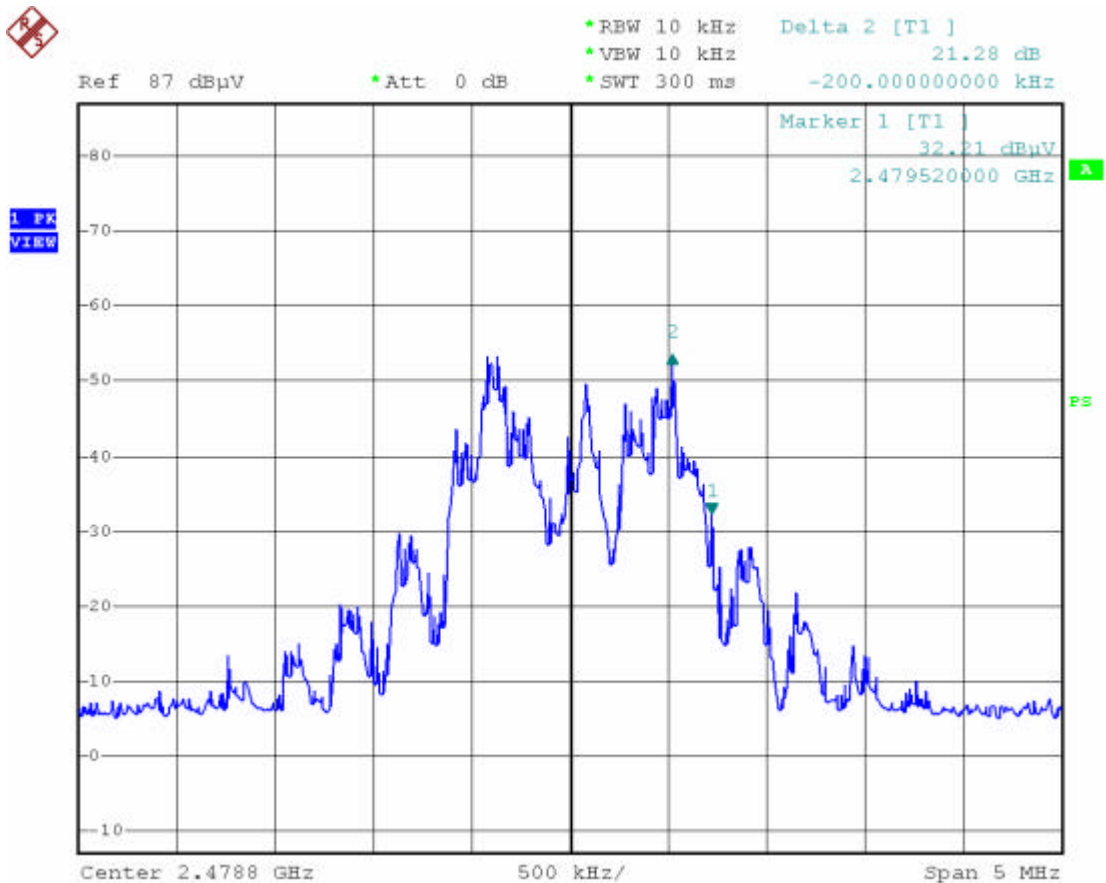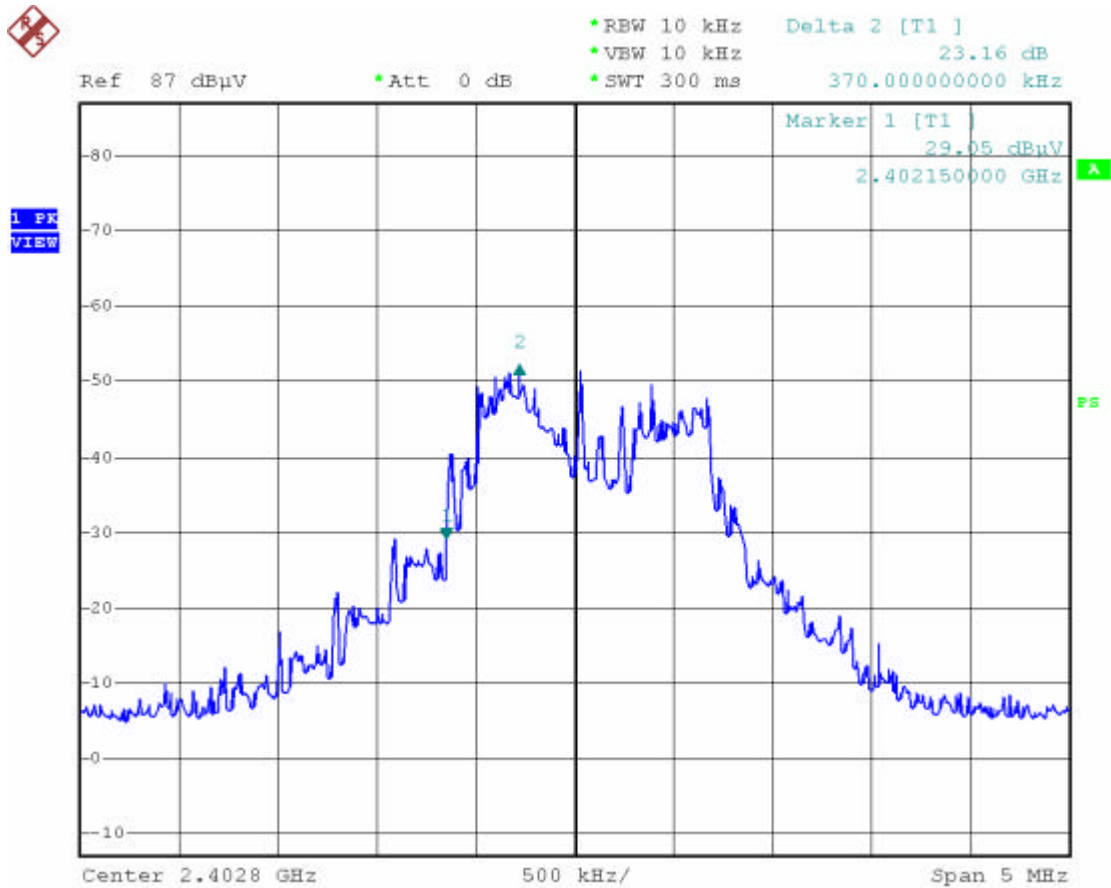

## 5.9 Spurious Emission At Receiving Mode

### 5.9.1 Measurement Procedure:

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC3V from the adapter, and the adapter received AC120V/60Hz power through the outlet socket under the turntable. All support equipments received AC 120V/60Hz power from socket under the turntable, if any.
- 5 The antenna was placed at 10 meter away from the EUT as stated in CISPR 22. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6 The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

### 5.9.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.2.2

### 5.9.3 Measurement Equipment Used:

3/5 Anechoic Chamber Radiation Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2004/11	2005/11
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2004/11	2005/11
RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	N/A	N/A
TURNTABLE	ETS	2088	2149	N/A	N/A
ANTENNA MAST	ETS	2075	2346	N/A	N/A
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	NA	N/A	N/A

### 5.9.4 Limits And Measurement Result:

Limits and Measurement Result Of Spurious Emission		
Applicable Limits	Measurement Result	
	Test Data	Criteria
§ 15.209 shall apply	See as the chart below	PASS

Operation Mode: Receiving Mode

Temperature : 25

Humidity : 59 %

Test Date : August 10, 2005

Test By: Jimmy Zhang

Pol: Vertical &amp; Horizontal

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margir (dB)
Below 1 GHz	V	Peak	---				At least 20
Below 1 GHz	H	Peak	---				dB down
Above 1 GHz	V	Peak	---				than the
Above 1 GHz	H	Peak	---				Limit

## Remark :

- (1) Measuring frequencies from 25 MHz to the 25 GHz.
- (2) Datum of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 120KHz and 1 MHz for above 1 GHz

**5.10 Dwell Time****5.10.1 Measurement Procedure:**

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set SPA Span= 0 Hz, RBW= 1 MHz, VBW= 1 MHz
4. Set SPA Trace 1 Max hold, then View.

**5.10.2 Test SET-UP (Block Diagram of Configuration)**

The same as described in Section 5.2.2

**5.10.3 Measurement Equipment Used:**

The same as described in Section 5.2.3

**5.10.4 Limits And Measurement Result:**

Limits and Measurement Result Of Dwell Time		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The average time of occupancy on any frequency shall not be greater than 0.4 seconds	324 ms	PASS

**Notes:**

The Dwell Time(Td) for each channel is 3.419709 ms and the Reap Time(Tr) for each channel is 384 ms. So the total Occupation Time(To) for each channel during 0.4 s × total number of the channels (Nc)' observation time is calculated by the following formula:

$$T_o = T_d * (400 * N_c) / T_r = 3.419709 * (400 * 91) / 384 = 324 \text{ ms}$$



## 6 Parameters For Host

### 6.1 Conducted Emissions

#### 6.1.1 Measurement Procedure:

The same as described in section 5.1.1

#### 6.1.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.1.2

#### 6.1.3 Measurement Equipment Used:

#### 6.1.4 Limits And Measurement Result:

Limits and Measurement Result Of Hopping Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.207 Conducted Emission Limit	See as the chart below	PASS

(The chart below shows the highest readings taken from the final data)

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.190	46.74			64.84	54.84		-8.10	L1
0.257	49.38			62.93	52.93		-3.55	L1
0.322	43.26			61.08	51.08		-7.82	L1
0.642	40.83			56.00	46.00		-5.17	L1
17.063	42.34			60.00	50.00		-7.66	L1
19.895	43.53			60.00	50.00		-6.47	L1
0.190	45.87			64.84	54.84		-8.97	L2
0.261	48.91			62.83	52.83		-3.92	L2
0.322	42.43			61.08	51.08		-8.65	L2
0.383	39.89			59.34	49.34		-9.45	L2
16.615	40.45			60.00	50.00		-9.55	L2
19.903	42.76			60.00	50.00		-7.24	L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

**\*\*NOTE:** “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

## 6.2 Hopping Channels

### 6.2.1 Measurement Procedure:

The same as described in section 5.2.1

### 6.2.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.2.2

### 6.2.3 Measurement Equipment Used:

The same as described in section 5.2.3

### 6.2.4 Limits And Measurement Result:

Limits and Measurement Result Of Hopping Channel		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) At least 75 hopping Frequencies	91	PASS

## 6.3 Channel Separation

### 6.3.1 Measurement Procedure:

The same as described in section 5.3.1

### 6.3.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.3.2

### 6.3.3 Measurement Equipment Used:

The same as described in section 5.3.3

### 6.3.4 Limits And Measurement Result:

Limits and Measurement Result Of Channel Separation		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1) At least 25 KHz or 20 dB bandwidth of the hopping Channel, whichever is greater.	880 KHz	PASS

**6.4 20 dB Bandwidth****6.4.1 Measurement Procedure**

The same as described in section 5.4.1

**6.4.2 Test SET-UP (Block Diagram of Configuration)**

The same as described in section 5.4.2

**6.4.3 Measurement Equipment Used:**

The same as described in section 5.4.3

**6.4.4 Limits And Measurement Results:**

<b>Limits and Measurement Result Of 20 dB Bandwidth For The Top Channel</b>		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The maximum 20 dB bandwidth of the hopping channel is 1 MHz	785 KHz	PASS

<b>Limits and Measurement Result Of 20 dB Bandwidth For The Middle Channel</b>		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The maximum 20 dB bandwidth of the hopping channel is 1 MHz	781 KHz	PASS

<b>Limits and Measurement Result Of 20 dB Bandwidth For The Bottom Channel</b>		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (a)(1)( ) The maximum 20 dB bandwidth of the hopping channel is 1 MHz	782 KHz	PASS

## 6.5 Operation Frequency

### 6.5.1 Measurement Procedure:

The same as described in section 5.5.1

### 6.5.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.5.2

### 6.5.3 Measurement Equipment Used:

The same as described in section 5.5.3

### 6.5.4 Limits And Measurement Result:

Limits and Measurement Result Of Operation Frequency		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 The operation frequencies shall lie wholly within 2.4 GHz to 2.4835 GHz	F <sub>l</sub> =2.40215 GHz	PASS
	F <sub>t</sub> =2.47952 GHz	PASS

## 6.6 Peak Output Power

### 6.6.1 Measurement Procedure:

The same as described in section 5.6.1

### 6.6.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.6.2

### 6.6.3 Measurement Equipment Used:

The same as described in section 5.6.3

### 6.6.4 Limits And Measurement Result:

Limits and Measurement Result Of Peak Output Power		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 (b)(1) The maximum peak output power is 1 W	Pt= 10.38 dBm	PASS
	Pm=10.07 dBm	PASS
	Pl=10.13 dBm	PASS

## 6.7 Spurious Emission At Transmitting mode

### 6.7.1 Measurement Procedure:

The same as described in section 5.7.1

### 6.7.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.7.2

### 6.7.3 Measurement Equipment Used:

The same as described in section 5.7.3

### 6.7.4 Limits And Measurement Result:

Limits and Measurement Result Of Spurious Emission		
Applicable Limits	Measurement Result	
	Test Data	Criteria
<p>Per 15.247 (c) In any 100 KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.</p> <p>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)</p>	See as the chart below	PASS

Frequency (MHz)	Reading level (dBUV)	Antenna Polarization	SG. (dBm)	Cable loss (dB)	Ant.Gain (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
4958.16	46.62	V	-26.6	3.9	6.3	-24.2	-9.62	-14.58
4958.16	37.69	H	-35.9	3.9	6.3	-33.5	-9.62	-23.88
Others	--	V	--					
Others	--	H	--					

Remark:

- (1) Corrected Power (dBm) = SG O/P-Cable + Ant Gain
- (2) Measuring frequencies from 30 MHz to the 25 GHz.
- (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**6.8 BAND EDGE****6.8.1 Measurement Procedure:**

The same as described in section 5.8.1

**6.8.2 Test SET-UP (Block Diagram of Configuration)**

The same as described in section 5.8.2

**6.8.3 Measurement Equipment Used:**

The same as described in section 5.8.3

**6.8.4 Limits And Measurement Result:**

<b>Limits and Measurement Result Of Band Edge</b>		
<b>Applicable Limits</b>	<b>Measurement Result</b>	
	<b>Test Data</b>	<b>Criteria</b>
Per 15.247 (c) In any 100 KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	See the test plot attached below	PASS






\*RBW 10 kHz Delta 2 [T1 ]  
\*VBW 10 kHz 23.16 dB  
\*SWT 300 ms 370.00000000 kHz

Ref 87 dBμV

\*Att 0 dB

1 PK  
VIEW

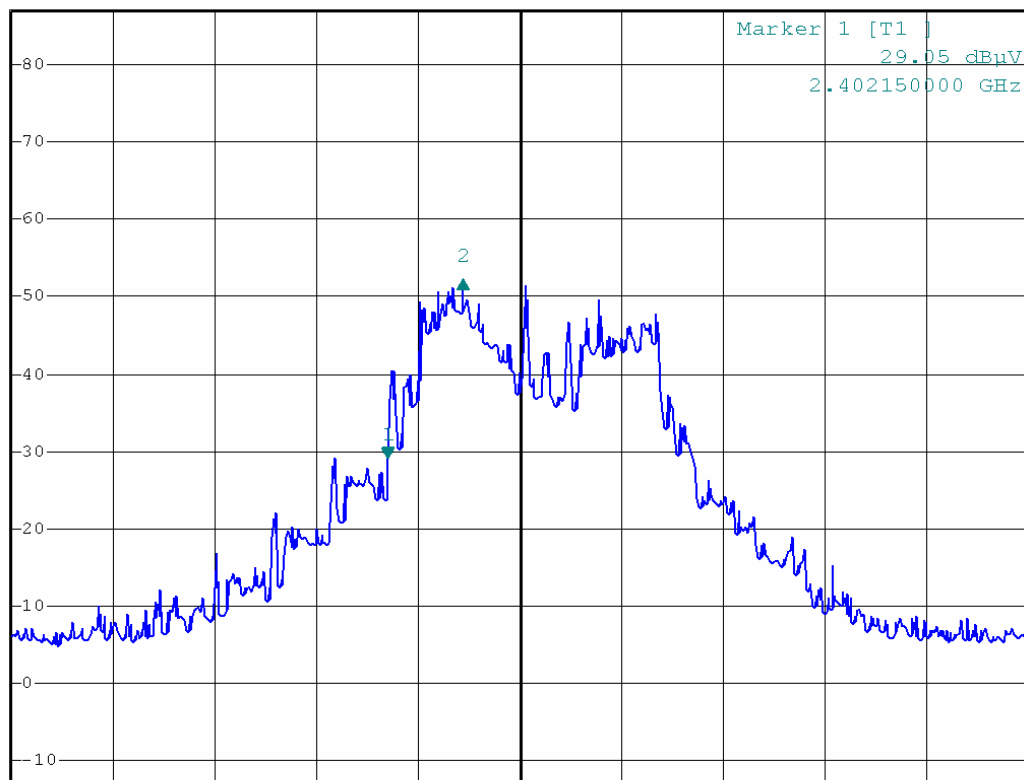

Center 2.4028 GHz

500 kHz/

Span 5 MHz




\*RBW 10 kHz Delta 2 [T1 ]  
\*VBW 10 kHz 21.28 dB  
\*SWT 300 ms -200.00000000 kHz

Ref 87 dBμV

\*Att 0 dB

1 PK  
VIEW

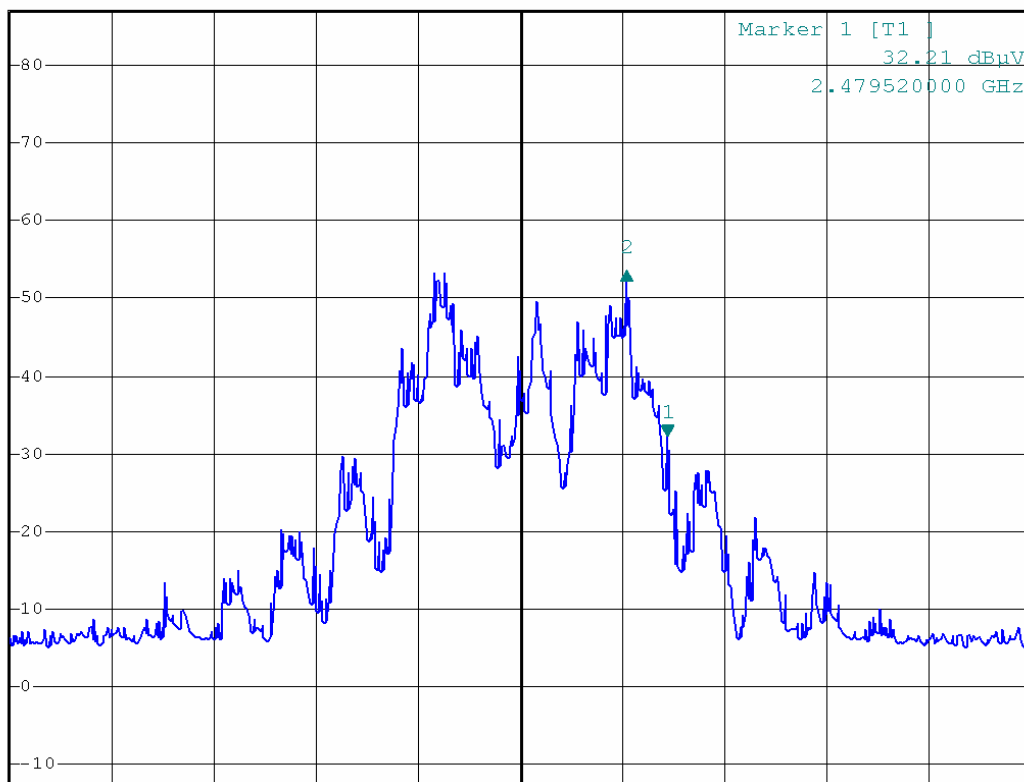

Center 2.4788 GHz

500 kHz/

Span 5 MHz

## 6.9 Spurious Emission At Receiving Mode

### 6.9.1 Measurement Procedure:

The same as described in section 5.9.1

### 6.9.2 Test SET-UP (Block Diagram of Configuration)

The same as described in section 5.9.2

### 6.9.3 Measurement Equipment Used:

The same as described in section 5.9.3

### 6.9.4 Limits And Measurement Result:

Limits and Measurement Result Of Spurious Emission		
Applicable Limits	Measurement Result	
	Test Data	Criteria
§ 15.209 shall apply	See as the chart below	PASS

Operation Mode: Receiving Mode

Temperature : 25

Humidity : 59 %

Test Date : August 10, 2005

Test By: Jimmy Zhang

Pol: Vertical & Horizontal

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margir (dB)
Below 1 GHz	V	Peak	---				At least 20
Below 1 GHz	H	Peak	---				dB down
Above 1 GHz	V	Peak	---				the
Above 1 GHz	H	Peak	---				Limit

#### Remark :

- (1) Measuring frequencies from 25 MHz to the 25 GHz.
- (2) Datas of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 120KHz and 1 MHz for frequencies above 1 GHz

**6.10 Dwell Time****6.10.1 Measurement Procedure:**

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set SPA Span= 0 Hz, RBW= 1 MHz, VBW= 1 MHz
4. Set SPA Trace 1 Max hold, then View.

**6.10.2 Test SET-UP (Block Diagram of Configuration)**

The same as described in Section 5.2.2

**6.10.3 Measurement Equipment Used:**

The same as described in Section 5.2.3

**6.10.4 Limits And Measurement Result:**

<b>Limits and Measurement Result Of Dwell Time</b>		
<b>Applicable Limits</b>	<b>Measurement Result</b>	
	<b>Test Data</b>	<b>Criteria</b>
Per 15.247 (a)(1)( ) The average time of occupancy on any frequency shall not be greater than 0.4 seconds	325 ms	PASS

**Note:**

As the test plots shown below, the Dwell Time(Td) for each channel is 3.432475 ms and the Reap Time(Tr) for each channel is 384 ms. So the total Occupation Time(To) for each channel during 0.4 s × total number of the channels (Nc)' observation time is calculated by the following formula:

$$To = Td * (400 * Nc) / Tr = 3.432475 * (400 * 91) / 384 = 325.37 \text{ ms}$$



# **APPENDIX 1**



## **PHOTOGRAPHS OF SET UP**

## Conducted Emission Setup Photos



## Radiated Emission Setup Photos

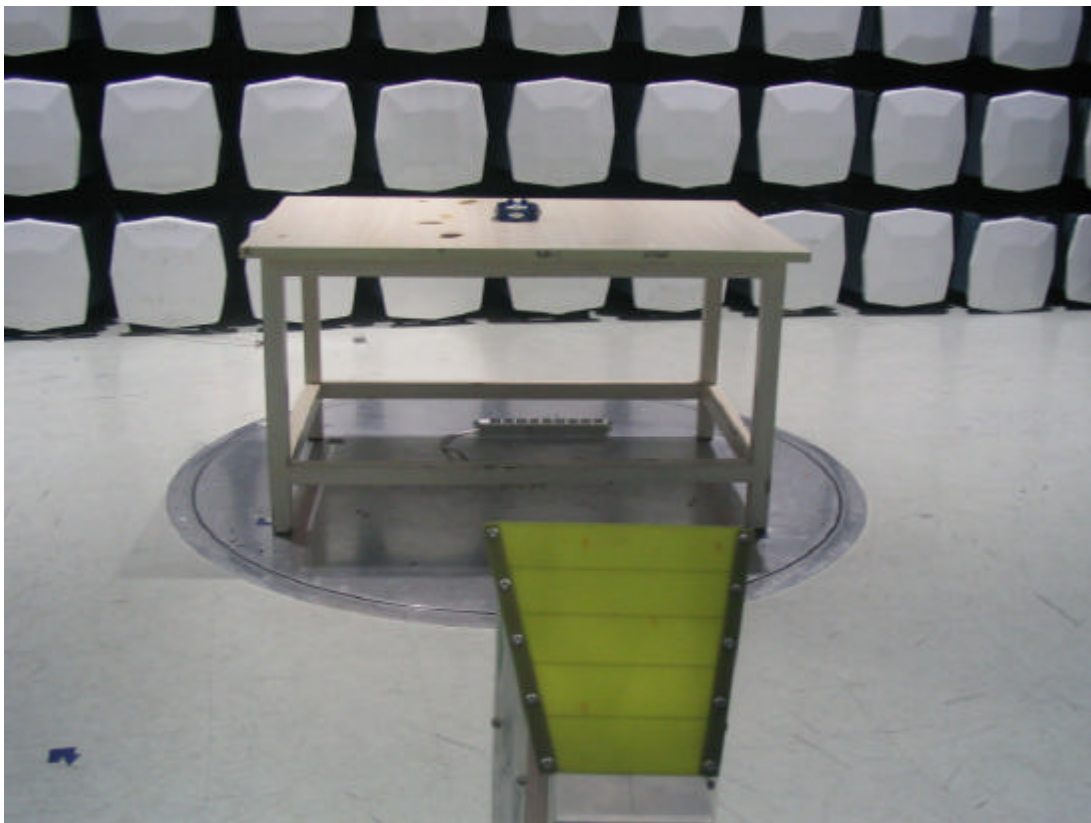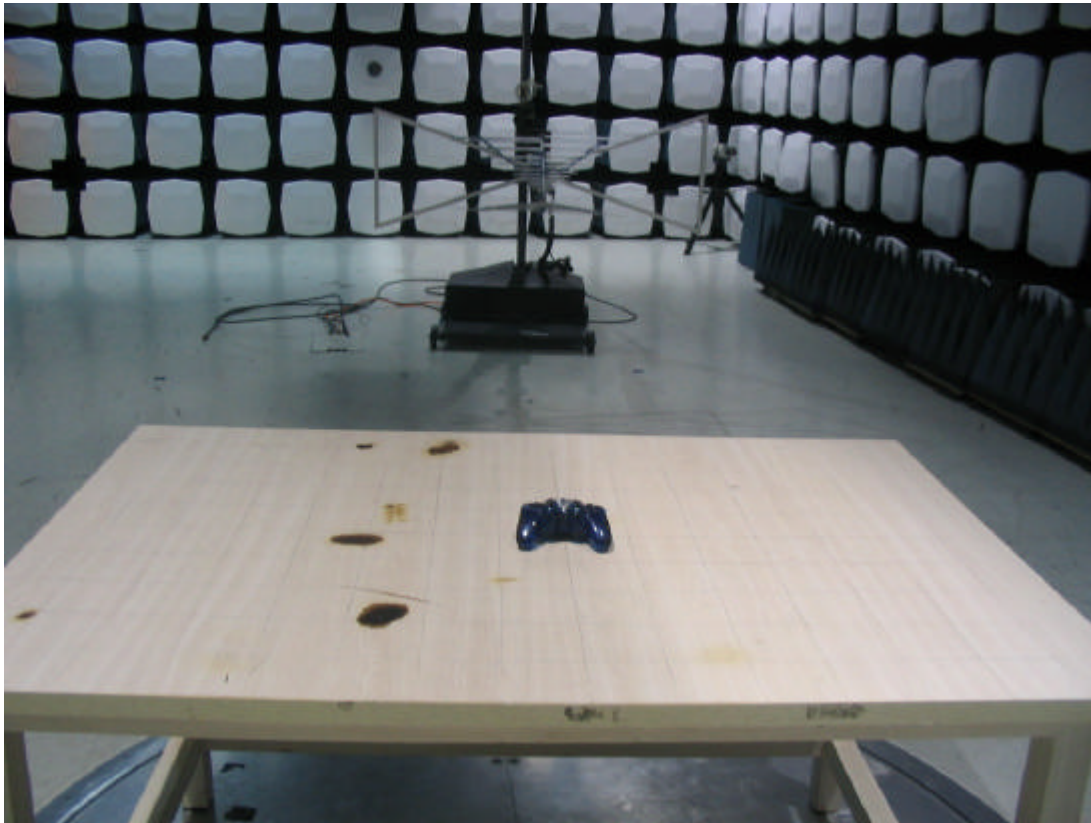

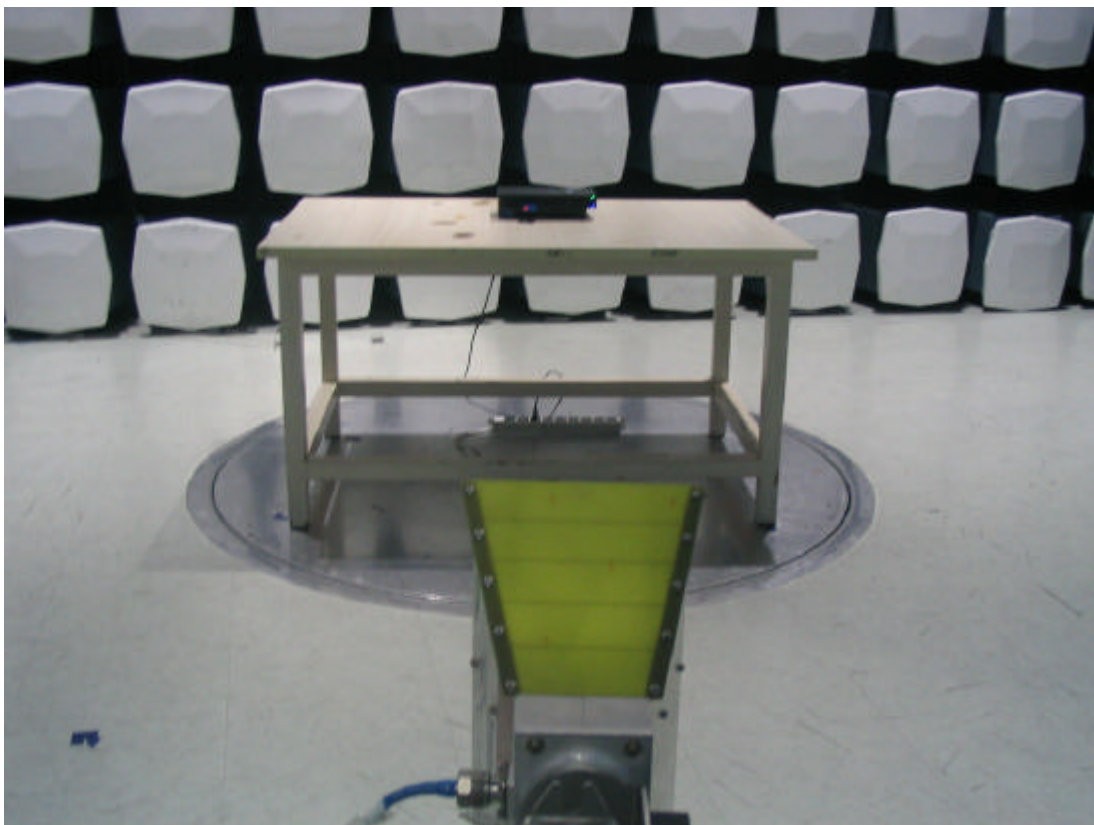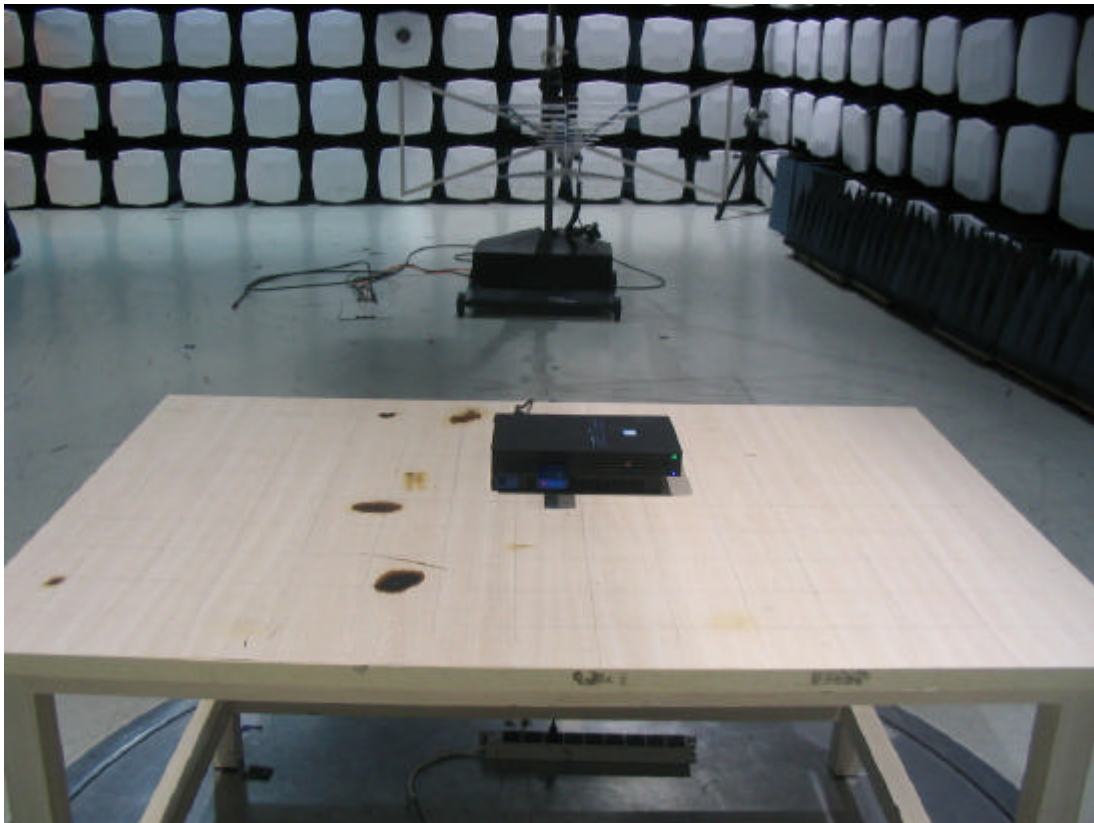

## **APPENDIX 2**

### **PHOTOGRAPHS OF EUT**



*Top View of Game Pad*



*Bottom View of Game Pad*



*Front View of Game Pad*



*Back View of Game Pad*



*Left View of Game Pad*




*Right View of Game Pad*



*Top View of Host*



*Bottom View of Host*

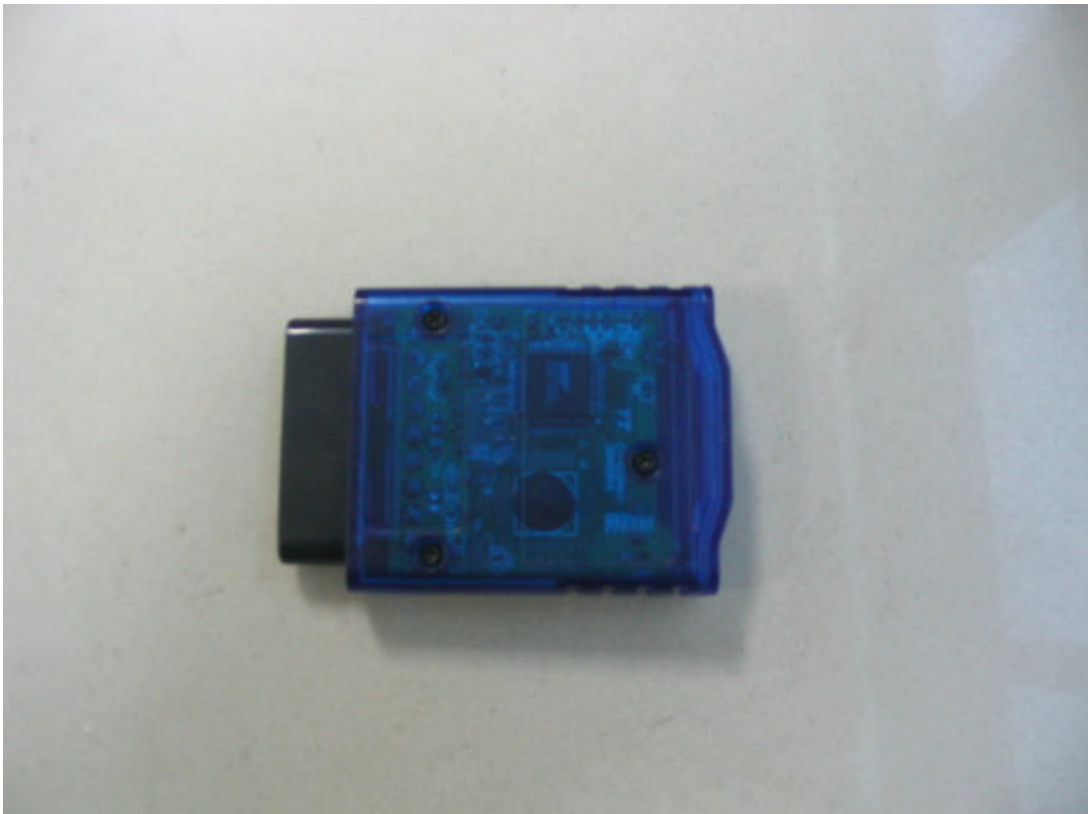



***Front View of Host***



***Back View of Host***



*Left View of Host*




*Right View of Host*



### *Internal of Game Pad-1*




### *Internal of Game Pad-2*

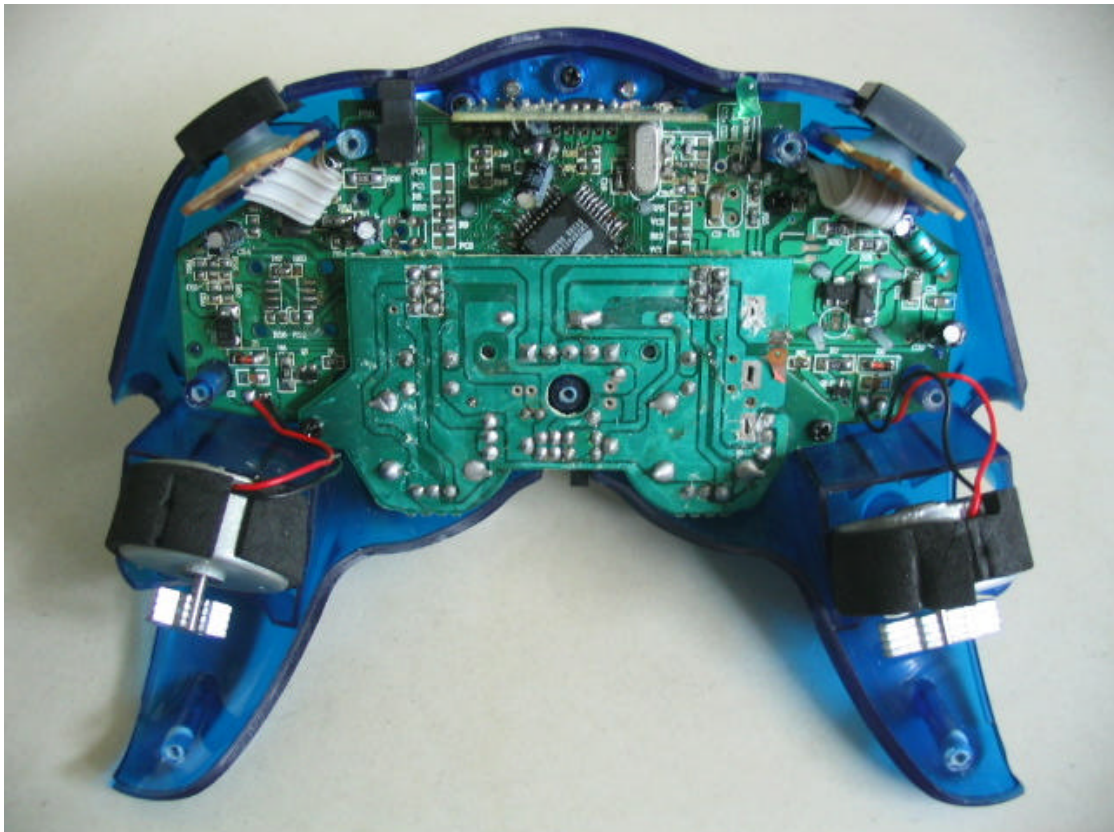




*Internal of Game Pad-3*

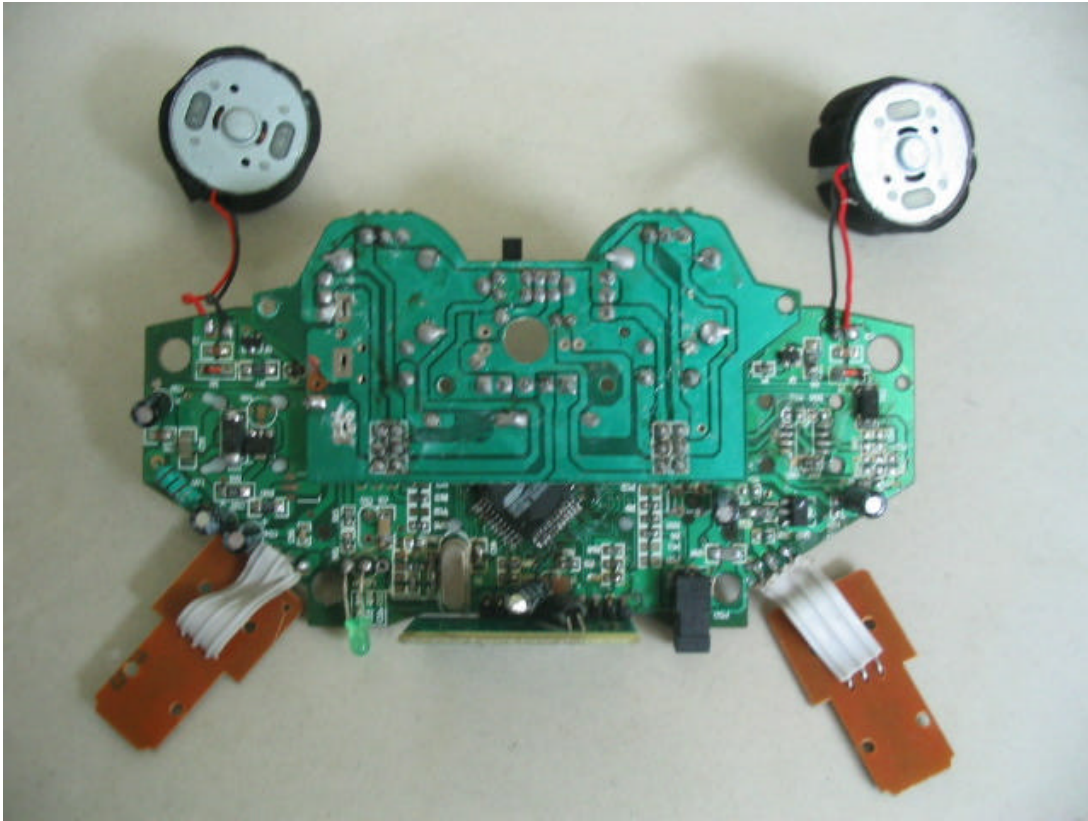

*Internal of Host-1*

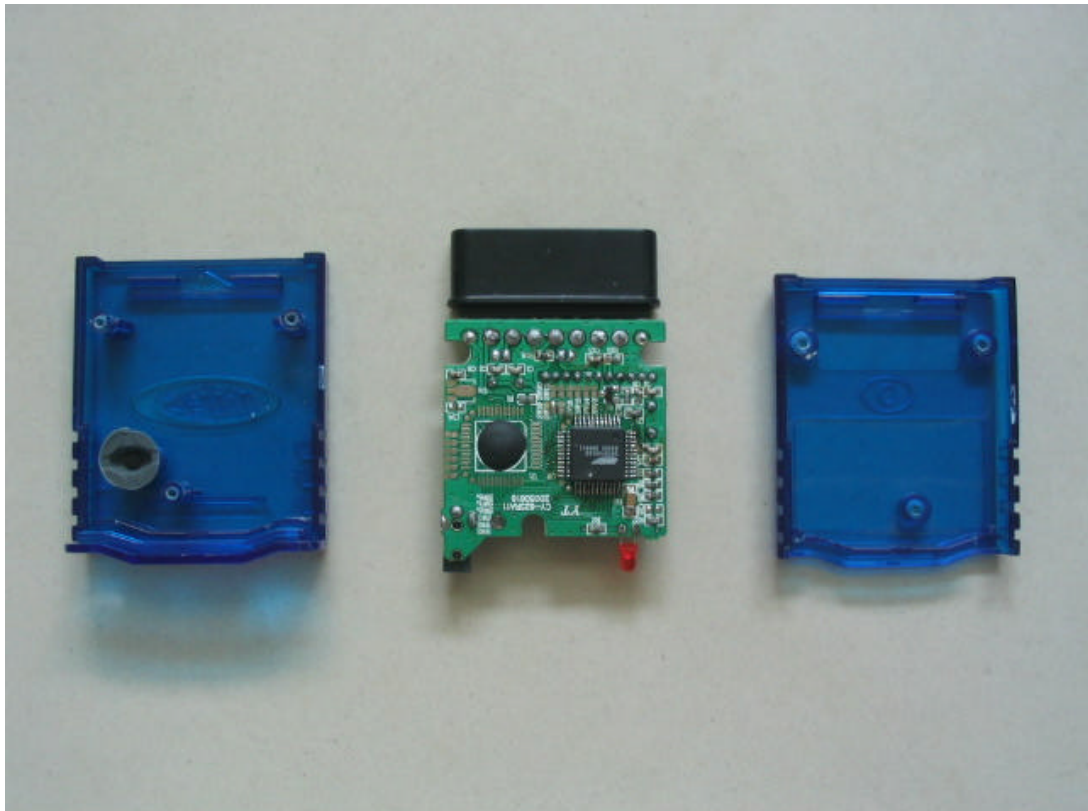



*Internal of Host-2*



*Internal of Host-3*

