

TEST REPORT

Product Name : TWS Bluetooth earphones
Brand Mark : N/A
Model No. : In2016R
FCC ID : RDR-IN2016R
Report Number : BLA-EMC-202004-A0401
Date of Sample Receipt : 2020/4/1
Date of Test : 2020/4/1 to 2020/4/22
Date of Issue : 2020/4/22
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Dongguan Hele Electronics Co.,Ltd

Dalingya Industrial Zone, Daojiao Town, Dongguan City, Guangdong, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

TEL: +86-755-28682673

FAX: +86-755-28682673

Compiled by:

Jason

Review by:

Sweet. Liang

Approved by:

Jmen li

Date:

2020/4/22



REPORT REVISE RECORD

Version No.	Date	Description
00	2020/4/22	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
	RADIATED SPURIOUS EMISSIONS	14
	LIMITS.....	14
	BLOCK DIAGRAM OF TEST SETUP.....	15
	PROCEDURE	15
	TEST DATA	17
	DWELL TIME.....	22
	LIMITS.....	22
	BLOCK DIAGRAM OF TEST SETUP.....	22
	TEST DATA	23
	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	24
	LIMITS.....	24
	BLOCK DIAGRAM OF TEST SETUP.....	24
	PROCEDURE	24
	TEST DATA	26
	ANTENNA REQUIREMENT.....	28
	CONCLUSION.....	28
	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	29
	LIMITS.....	29
	BLOCK DIAGRAM OF TEST SETUP.....	30
	PROCEDURE	30

TEST DATA	32
CONDUCTED SPURIOUS EMISSIONS	33
LIMITS.....	33
BLOCK DIAGRAM OF TEST SETUP.....	34
TEST DATA	34
CONDUCTED BAND EDGES MEASUREMENT	35
LIMITS.....	35
BLOCK DIAGRAM OF TEST SETUP.....	35
TEST DATA	36
HOPPING CHANNEL NUMBER.....	37
LIMITS.....	37
BLOCK DIAGRAM OF TEST SETUP.....	37
TEST DATA	37
CARRIER FREQUENCIES SEPARATION	38
LIMITS.....	38
BLOCK DIAGRAM OF TEST SETUP.....	38
TEST DATA	38
20DB BANDWIDTH	39
BLOCK DIAGRAM OF TEST SETUP.....	39
TEST DATA	39
CONDUCTED PEAK OUTPUT POWER	40
LIMITS.....	40
BLOCK DIAGRAM OF TEST SETUP.....	40
TEST DATA	41
10 APPENDIX.....	42
10.1 APPENDIX: 20DBEMISSION BANDWIDTH.....	42
<i>Test Result</i>	42
<i>Test Graphs</i>	43
10.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER	48
<i>Test Result</i>	48
<i>Test Graphs</i>	49
10.3 APPENDIX: CARRIER FREQUENCY SEPARATION	54

<i>Test Result</i>	54
<i>Test Graphs</i>	55
10.4 APPENDIX: TIME OF OCCUPANCY.....	57
<i>Test Result</i>	57
<i>Test Graphs</i>	58
10.5 APPENDIX: NUMBER OF HOPPING CHANNELS.....	61
<i>Test Result</i>	61
<i>Test Graphs</i>	62
10.6 APPENDIX: BAND EDGE MEASUREMENTS.....	64
<i>Test Result</i>	64
<i>Test Graphs</i>	65
10.7 APPENDIX: CONDUCTED SPURIOUS EMISSION.....	71
<i>Test Result</i>	71
<i>Test Graphs</i>	72
APPENDIX A: PHOTOGRAPHS OF TEST SETUP.....	86
APPENDIX B: PHOTOGRAPHS OF EUT.....	88

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass

Remark: The above tests are all tested with Right ear headphones

2 GENERAL INFORMATION

Applicant	Dongguan Hele Electronics Co.,Ltd
Address	Dalingya Industrial Zone,Daojiao Town,Dongguan City,Guangdong,China
Manufacturer	Dongguan Hele Electronics Co.,Ltd
Address	Dalingya Industrial Zone,Daojiao Town,Dongguan City,Guangdong,China
Factory	Dongguan Hele Electronics Co.,Ltd
Address	Dalingya Industrial Zone,Daojiao Town,Dongguan City,Guangdong,China
Product Name	TWS Bluetooth earphones
Test Model No.	In2016R

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V5.0
Software Version	V5.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, p/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	Chip Antenna
Antenna Gain:	2.5dBi

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping or no hopping mode)
Remark: Full battery is used during all test except ac conducted emission, DH1, DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned only worse case is reported. Non hopping mode is worse case of Radiated emission test.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission	±4.34dB
Radiated Emission	±4.24dB
Radiated Emission	±4.68dB
AC Power Line Conducted Emission	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	5/7/2019	5/6/2020
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2020
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Dwell Time					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Shield room	SKET	833	N/A	6/10/2018	6/9/2021
Receiver	R&S	ESPI3	101082	5/7/2019	5/7/2020
LISN	R&S	ENV216	3560.6550.15	7/4/2019	7/3/2020
LISN	安泰信	AT166-2	AKK1806000003	12/18/2019	12/17/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	5/7/2019	5/6/2020
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2020
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020

Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Hopping Channel Number

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Carrier Frequencies Separation

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of 20dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (above 1GHz);TX mode (Below 1GHz)
Test Mode (Final Test)	TX mode (above 1GHz);TX mode (Below 1GHz)
Tester	Eason
Temperature	23℃
Humidity	56%

LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BLOCK DIAGRAM OF TEST SETUP

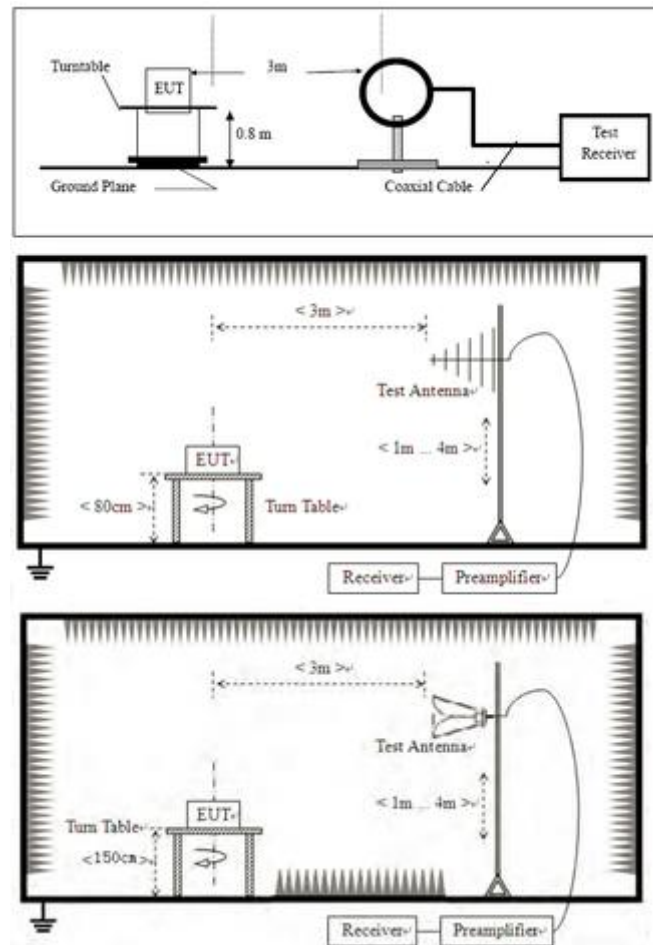

PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified

and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

TEST DATA

[TestMode: TX mode (Below 1GHz)]; [Polarity: Horizontal]
Power: AC120V/60Hz

Radiated Emission Measurement

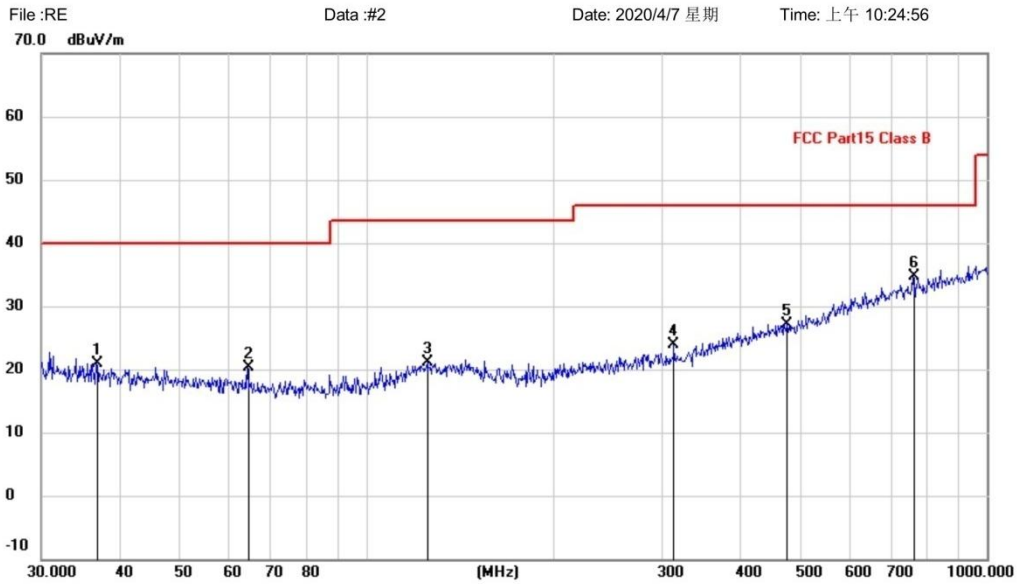

Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 Class B Power: Humidity: %
EUT: TWS Bluetooth earphones Distance: 3m
M/N: In2016
Mode: BT mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		36.7662	-2.58	23.58	21.00	40.00	-19.00	QP		
2		64.4331	-2.10	22.40	20.30	40.00	-19.70	QP		
3		125.4457	-1.75	22.85	21.10	43.50	-22.40	QP		
4		313.2760	-0.30	24.22	23.92	46.00	-22.08	QP		
5		477.1694	-1.34	28.54	27.20	46.00	-18.80	QP		
6	*	760.7036	0.98	33.68	34.66	46.00	-11.34	QP		

*:Maximum data x:Over limit !:over margin


<Reference Only

Test Result: Pass

[TestMode: TX mode (Below 1GHz)]; [Polarity: Vertical]

Power: AC120V/60Hz

Radiated Emission Measurement

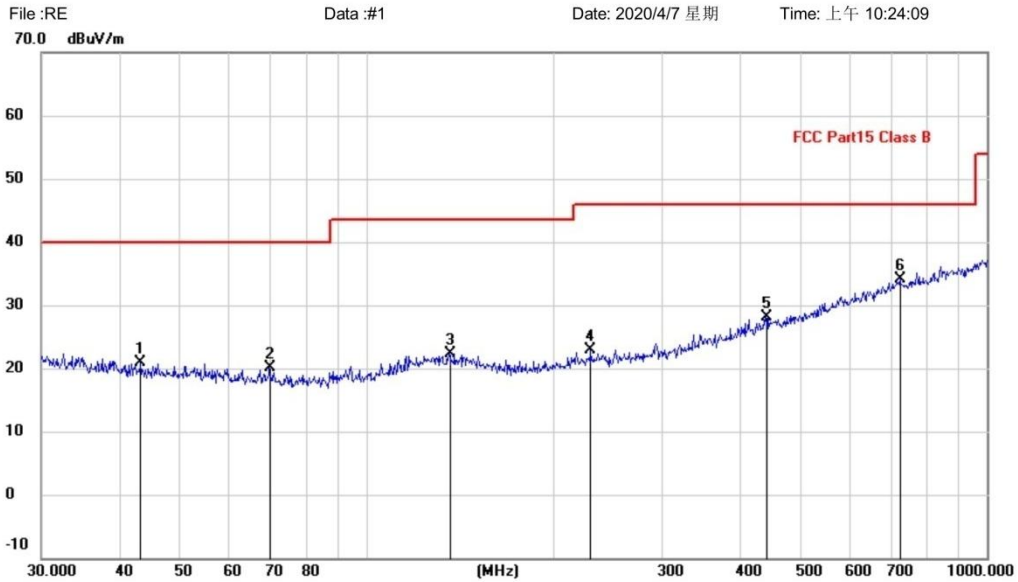

Site Polarization: **Vertical** Temperature:
 Limit: FCC Part15 Class B Power: Humidity: %
 EUT: TWS Bluetooth earphones Distance: 3m
 M/N: In2016
 Mode: BT mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		43.3534	-3.46	24.36	20.90	40.00	-19.10	QP	
2		69.8450	-1.17	21.21	20.04	40.00	-19.96	QP	
3		135.9822	-0.93	23.18	22.25	43.50	-21.25	QP	
4		230.0985	0.57	22.31	22.88	46.00	-23.12	QP	
5		440.1963	0.16	27.86	28.02	46.00	-17.98	QP	
6	*	724.2611	1.06	33.11	34.17	46.00	-11.83	QP	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Test Mode: 8DPSK (above 1GHz)]

Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

Test channel:lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	53.67	2.38	56.05	74	-17.95	Vertical
7206.00	50.26	2.17	52.43	74	-21.57	Vertical
9608.00	47.71	2.06	49.77	74	-24.23	Vertical
12010.00	*			74		Vertical
14412.00	*			74		Vertical
4804.00	49.96	2.38	52.34	74	-21.66	Horizontal
7206.00	48.27	2.17	50.44	74	-23.56	Horizontal
9608.00	47.03	2.06	49.09	74	-24.91	Horizontal
12010.00	*			74		Horizontal
14412.00	*			74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	47.49	2.38	49.87	54	-4.13	Vertical
7206.00	42.36	2.17	44.53	54	-9.47	Vertical
9608.00	38.85	2.06	40.91	54	-13.09	Vertical
12010.00	*			54		Vertical
14412.00	*			54		Vertical
4804.00	35.65	2.38	38.03	54	-15.97	Horizontal
7206.00	36.07	2.17	38.24	54	-15.76	Horizontal
9608.00	36.12	2.06	38.18	54	-15.82	Horizontal
12010.00	*			54		Horizontal
14412.00	*			54		Horizontal

Test channel:Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	47.2	0.17	47.37	74	-26.63	Vertical

7323.00	47.26	1.43	48.69	74	-25.31	Vertical
9764.00	46.69	1.26	47.95	74	-26.05	Vertical
12205.00	*			74		Vertical
14646.00	*			74		Vertical
4882.00	52.11	0.17	52.28	74	-21.72	Horizontal
7323.00	48.35	1.43	49.78	74	-24.22	Horizontal
9764.00	47.72	1.26	48.98	74	-25.02	Horizontal
12205.00	*			74		Horizontal
14646.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	34.46	0.17	34.63	54	-19.37	Vertical
7323.00	34.29	1.43	35.72	54	-18.28	Vertical
9764.00	33.72	1.26	34.98	54	-19.02	Vertical
12205.00	*			54		Vertical
14646.00	*			54		Vertical
4882.00	35.26	0.17	35.43	54	-18.57	Horizontal
7323.00	34.43	1.43	35.86	54	-18.14	Horizontal
9764.00	33.67	1.26	34.93	54	-19.07	Horizontal
12205.00	*			54		Horizontal
14646.00	*			54		Horizontal
Test channel: Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	46.3	1.04	47.34	74	-26.66	Vertical
7440.00	45.56	2.59	48.15	74	-25.85	Vertical
9920.00	45.33	2.74	48.07	74	-25.93	Vertical
12400.00	*			74		Vertical
14880.00	*			74		Vertical
4960.00	50.43	1.04	51.47	74	-22.53	Horizontal
7440.00	48.37	2.59	50.96	74	-23.04	Horizontal
9920.00	47.63	2.74	50.37	74	-23.63	Horizontal
12400.00	*			74		Horizontal
14880.00	*			74		Horizontal

Average value:						
Frequency (MHz)	Read Level (dBUV)	Correct factor	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
4960.00	34.43	1.04	35.47	54	-18.53	Vertical
7440.00	33.75	2.59	36.34	54	-17.66	Vertical
9920.00	32.69	2.74	35.43	54	-18.57	Vertical
12400.00	*			54		Vertical
14880.00	*			54		Vertical
4960.00	35.26	1.04	36.3	54	-17.7	Horizontal
7440.00	34.55	2.59	37.14	54	-16.86	Horizontal
9920.00	33.81	2.74	36.55	54	-17.45	Horizontal
12400.00	*			54		Horizontal
14880.00	*			54		Horizontal
Test Result: Pass						

Blue Asia


DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

BLOCK DIAGRAM OF TEST SETUP

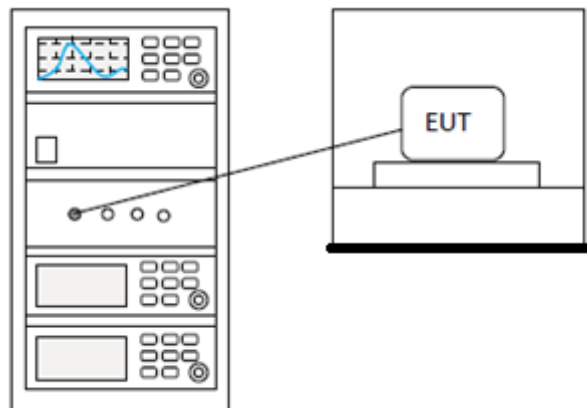

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	58%

LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

BLOCK DIAGRAM OF TEST SETUP

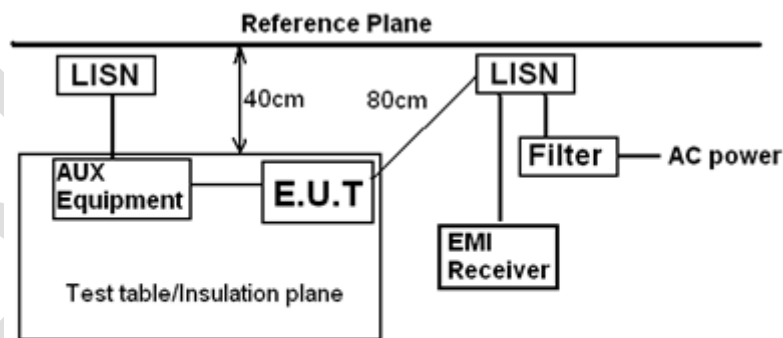

Remark
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50?H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power

cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

TEST DATA

[TestMode: TX]; [Line: Line]
Power: AC120V/60Hz

Conducted Emission Measurement

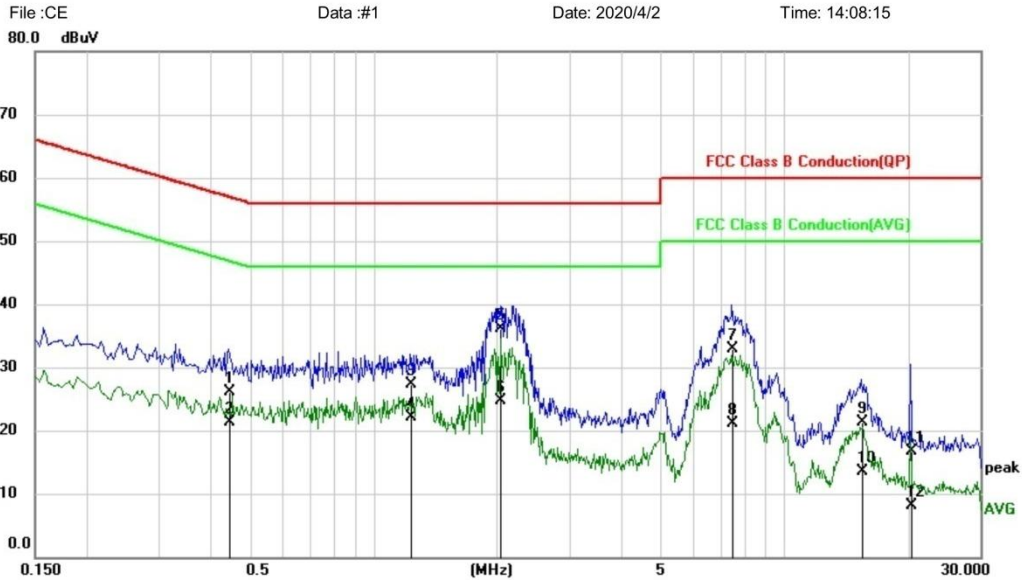

Site: _____ Phase: **L1** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: 60 %
 EUT: TWS Bluetooth earphones
 M/N: In2016
 Mode: BT mode
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4460	16.40	9.69	26.09	56.95	-30.86	QP	
2		0.4460	11.68	9.69	21.37	46.95	-25.58	AVG	
3		1.2340	17.42	9.81	27.23	56.00	-28.77	QP	
4		1.2340	12.20	9.81	22.01	46.00	-23.99	AVG	
5	*	2.0340	26.24	9.82	36.06	56.00	-19.94	QP	
6		2.0340	14.94	9.82	24.76	46.00	-21.24	AVG	
7		7.4820	23.01	9.87	32.88	60.00	-27.12	QP	
8		7.4820	11.30	9.87	21.17	50.00	-28.83	AVG	
9		15.4060	11.31	9.97	21.28	60.00	-38.72	QP	
10		15.4060	3.59	9.97	13.56	50.00	-36.44	AVG	
11		20.3260	6.62	10.03	16.65	60.00	-43.35	QP	
12		20.3260	-2.00	10.03	8.03	50.00	-41.97	AVG	

*:Maximum data x:Over limit !:over margin


<Reference Only

Test Result: Pass

[TestMode: TX]; [Line: Nutral]

Power: AC120V/60Hz

Conducted Emission Measurement

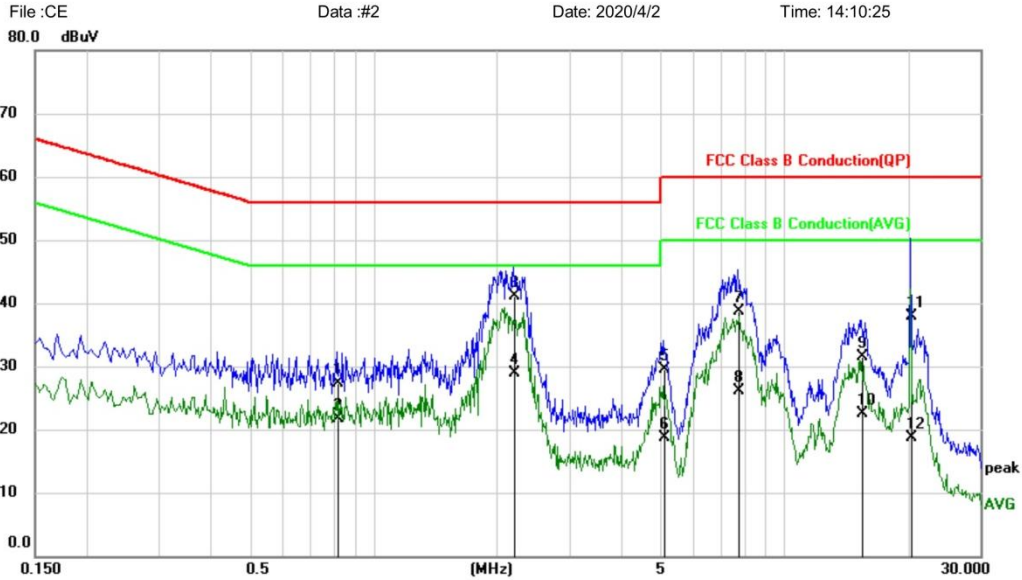

Site: _____ Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: 60 %
 EUT: TWS Bluetooth earphones
 M/N: In2016
 Mode: BT mode
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.8139	17.54	9.74	27.28	56.00	-28.72	QP	
2		0.8139	11.87	9.74	21.61	46.00	-24.39	AVG	
3	*	2.1900	31.29	9.86	41.15	56.00	-14.85	QP	
4		2.1900	19.11	9.86	28.97	46.00	-17.03	AVG	
5		5.0939	19.69	9.91	29.60	60.00	-30.40	QP	
6		5.0939	8.82	9.91	18.73	50.00	-31.27	AVG	
7		7.7100	28.92	9.86	38.78	60.00	-21.22	QP	
8		7.7100	16.17	9.86	26.03	50.00	-23.97	AVG	
9		15.4260	21.42	10.01	31.43	60.00	-28.57	QP	
10		15.4260	12.42	10.01	22.43	50.00	-27.57	AVG	
11		20.3300	27.91	10.08	37.99	60.00	-22.01	QP	
12		20.3300	8.68	10.08	18.76	50.00	-31.24	AVG	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.5dBi.

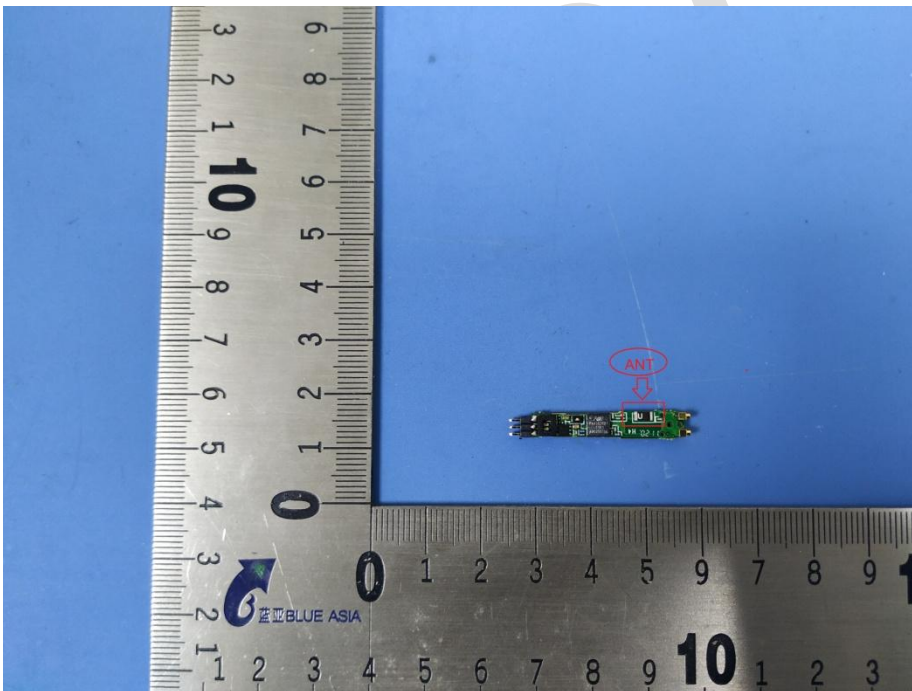

RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	23°C
Humidity	55%

LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BLOCK DIAGRAM OF TEST SETUP

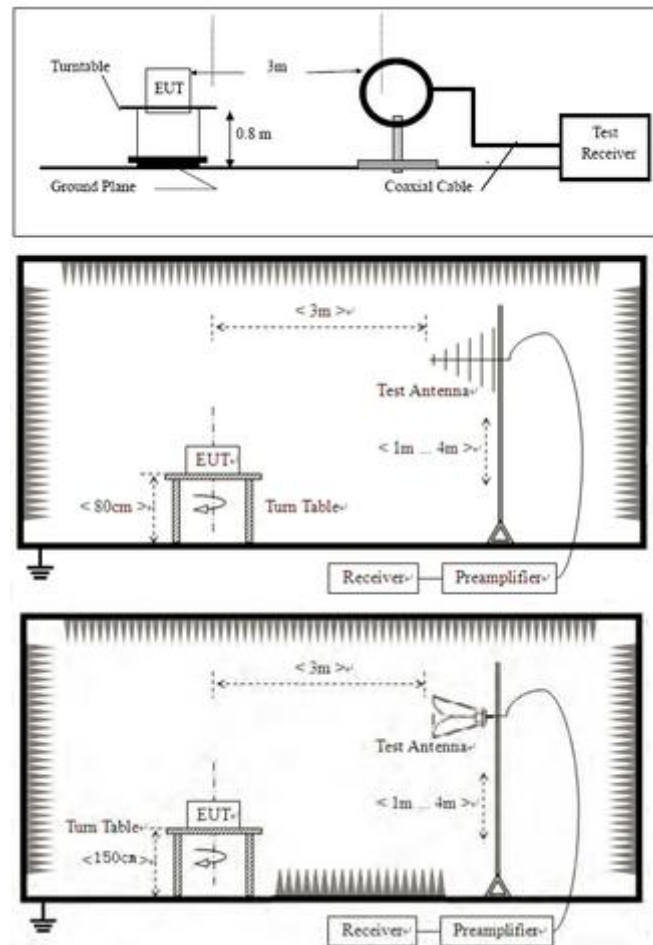

PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified

and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

TEST DATA

[TestMode: 8DPSK]						
Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.						
Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	46.33	-4.2	42.13	74	-31.87	Horizontal
2390	47.5	-3.88	43.62	74	-30.38	Horizontal
2310	49.63	-4.49	45.14	74	-28.86	Vertical
2390	50.7	-4.21	46.49	74	-27.51	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	33.88	-4.2	29.68	54	-24.32	Horizontal
2390	34.8	-3.88	30.92	54	-23.08	Horizontal
2310	36.53	-4.49	32.04	54	-21.96	Vertical
2390	38.99	-4.21	34.78	54	-19.22	Vertical
Test channel:Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	55.37	-3.39	51.98	74	-22.02	Horizontal
2500	47.64	-3.3	44.34	74	-29.66	Horizontal
2483.5	52.45	-3.78	48.67	74	-25.33	Vertical
2500	52.37	-3.7	48.67	74	-25.33	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	42.13	-3.39	38.74	54	-15.26	Horizontal
2500	35.34	-3.3	32.04	54	-21.96	Horizontal
2483.5	40.2	-3.78	36.42	54	-17.58	Vertical

2500	38.46	-3.7	34.76	54	-19.24	Vertical
Test Result: Pass						


CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

BLOCK DIAGRAM OF TEST SETUP

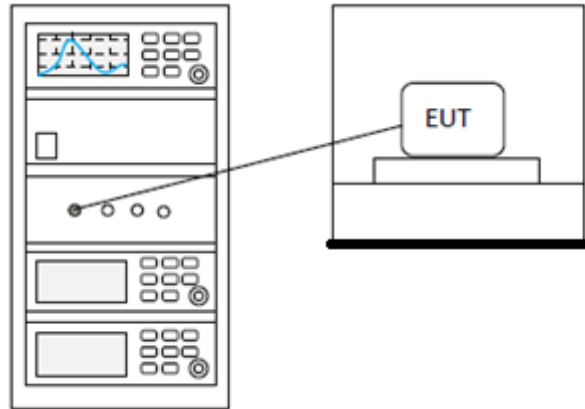

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

Blue Asia


CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

BLOCK DIAGRAM OF TEST SETUP

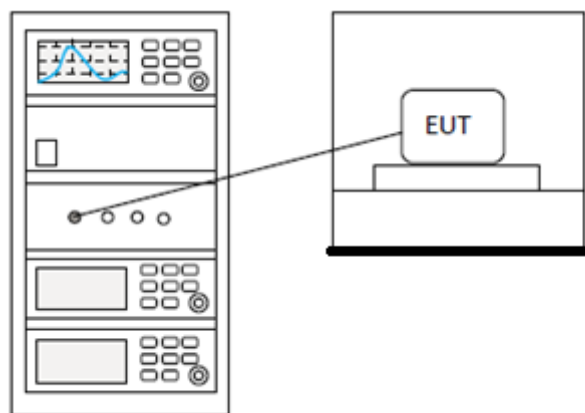

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

BLOCK DIAGRAM OF TEST SETUP

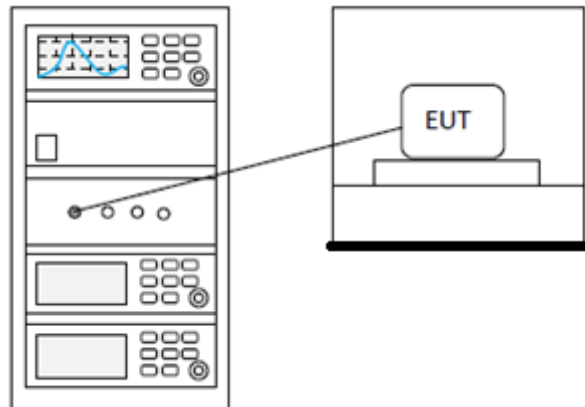

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

BLOCK DIAGRAM OF TEST SETUP

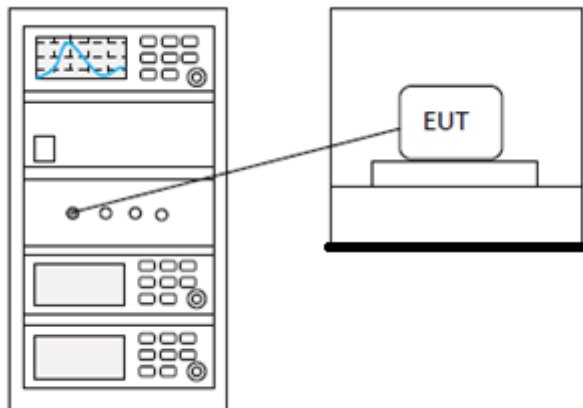


TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--

20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

BLOCK DIAGRAM OF TEST SETUP

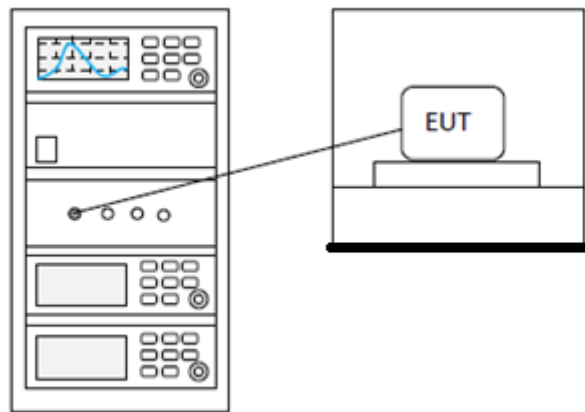

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	57%

LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

BLOCK DIAGRAM OF TEST SETUP

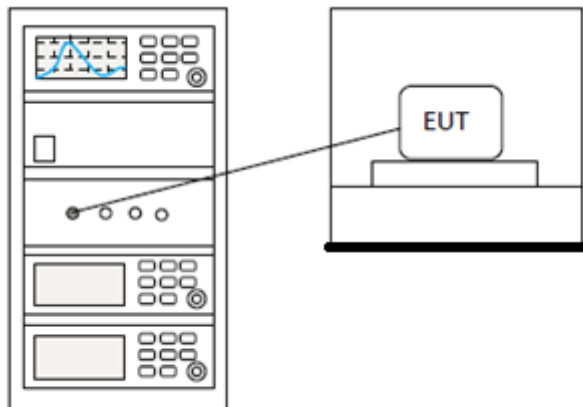

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

10 APPENDIX


Appendix1

10.1 APPENDIX: 20DBEMISSION BANDWIDTH

Test Result


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.116	2401.463	2402.579	---	PASS
		2441	1.119	2440.463	2441.582	---	PASS
		2480	1.116	2479.463	2480.579	---	PASS
2DH1	Ant1	2402	1.413	2401.301	2402.714	---	PASS
		2441	1.419	2440.298	2441.717	---	PASS
		2480	1.410	2479.307	2480.717	---	PASS
3DH1	Ant1	2402	1.404	2401.325	2402.729	---	PASS
		2441	1.410	2440.319	2441.729	---	PASS
		2480	1.407	2479.325	2480.732	---	PASS

Test Graphs

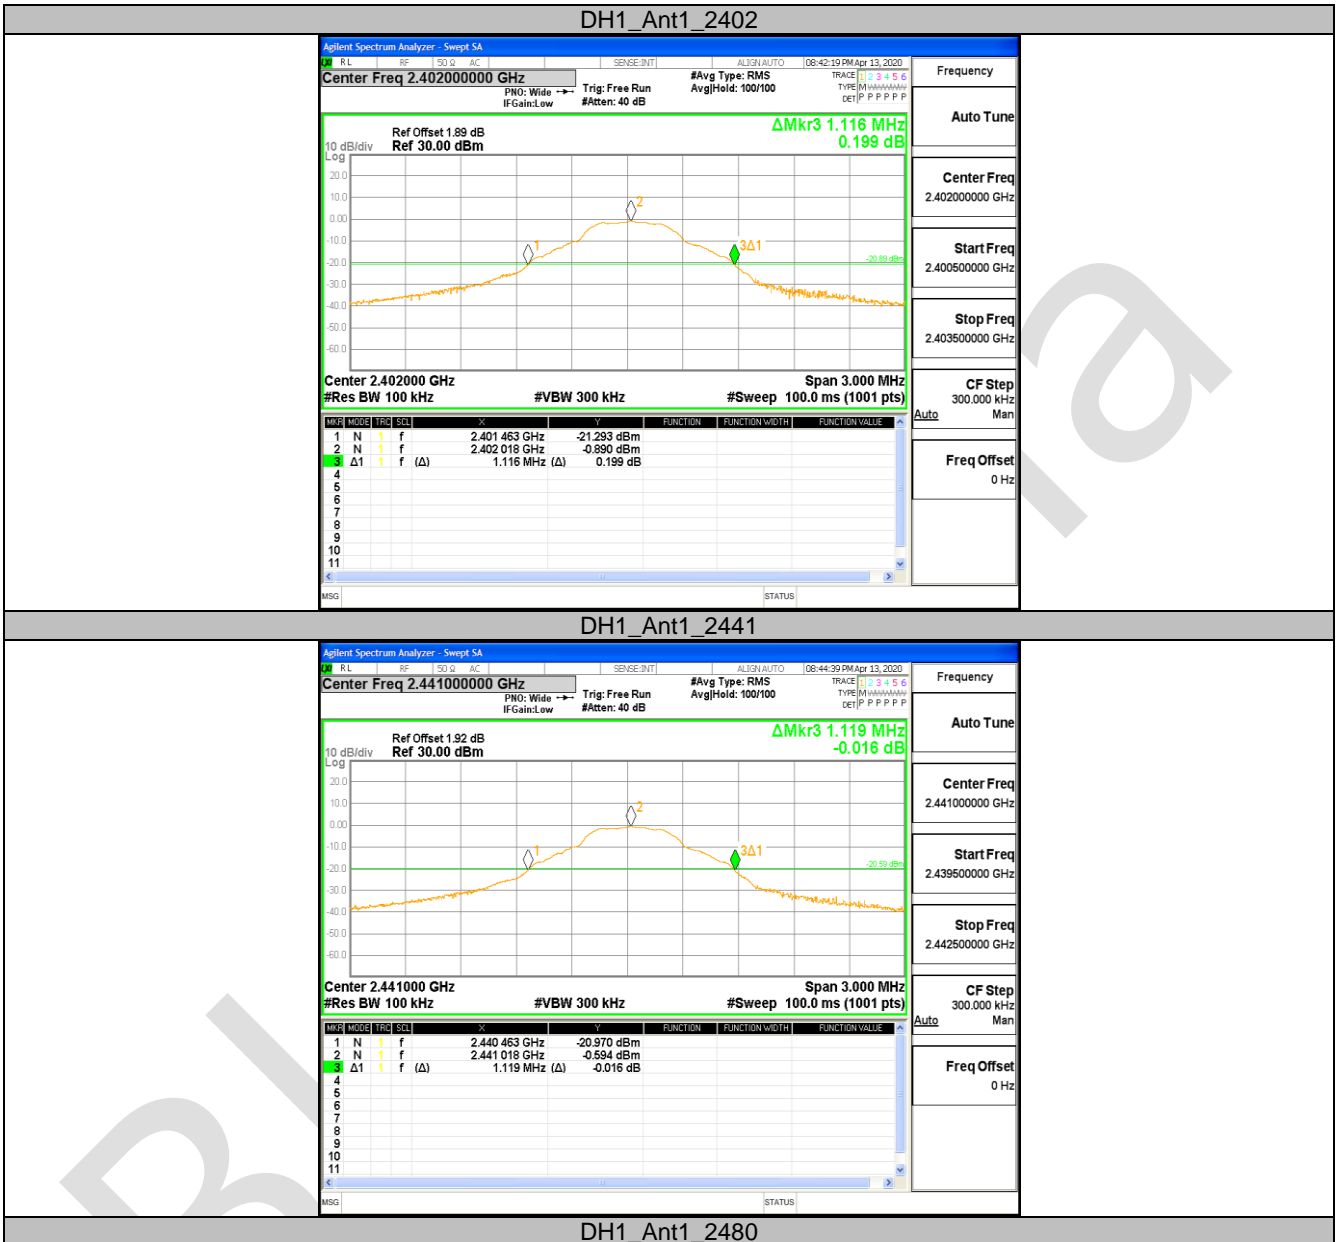





2DH1_Ant1_2402

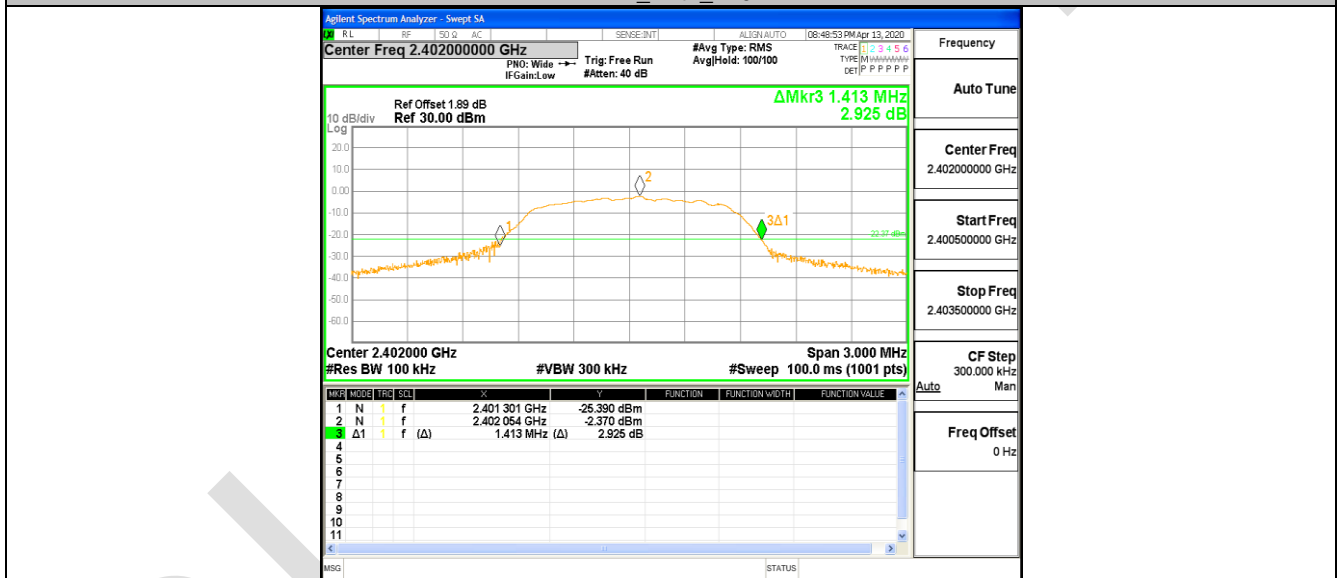


2DH1_Ant1_2441

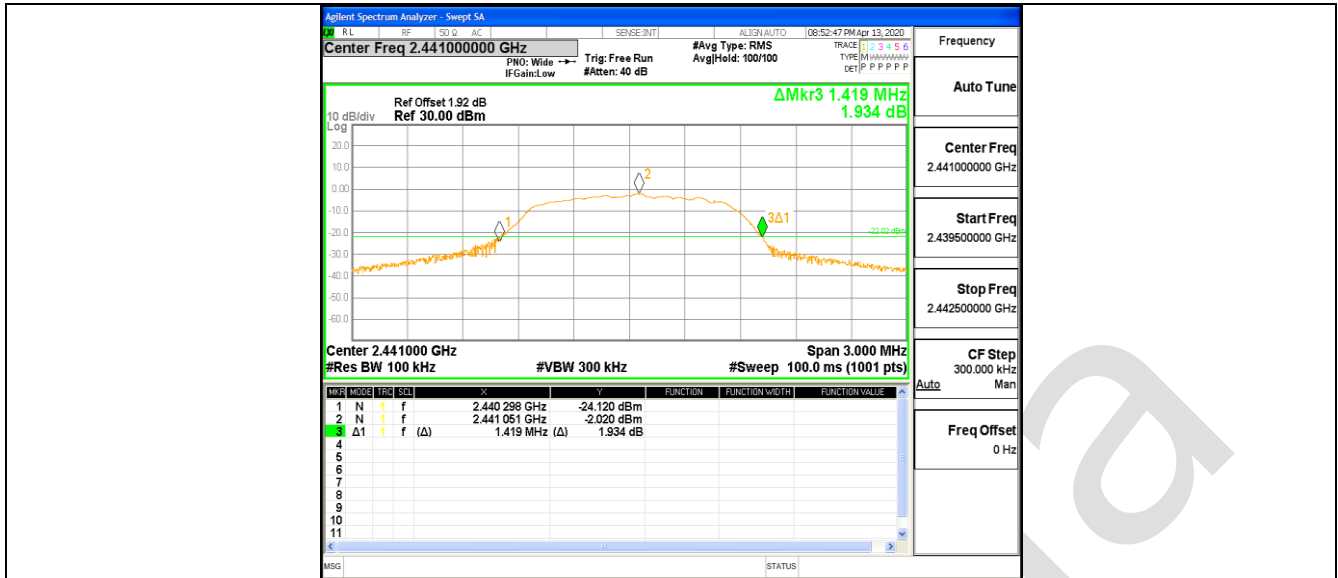


2DH1_Ant1_2480

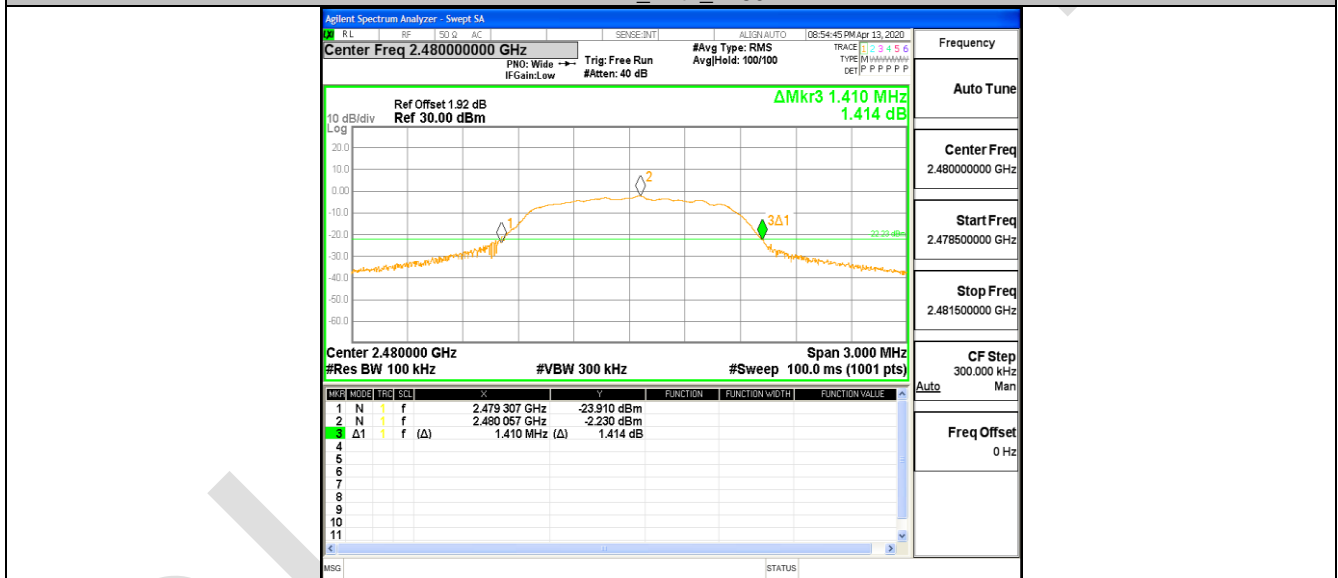


3DH1_Ant1_2402

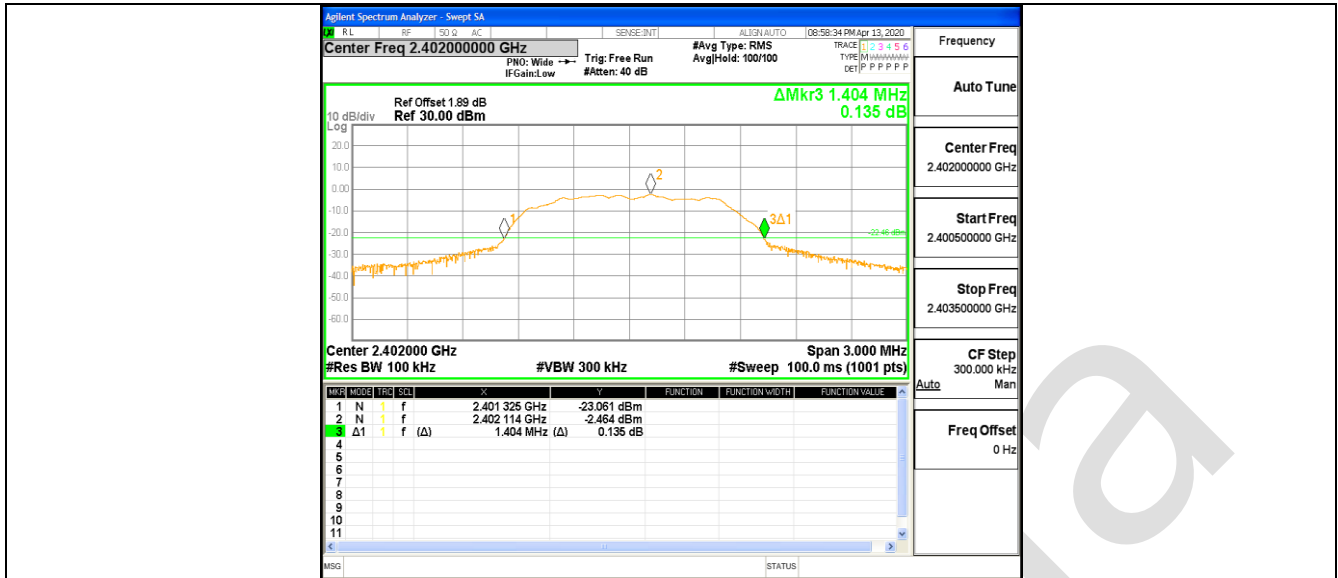

3DH1_Ant1_2441

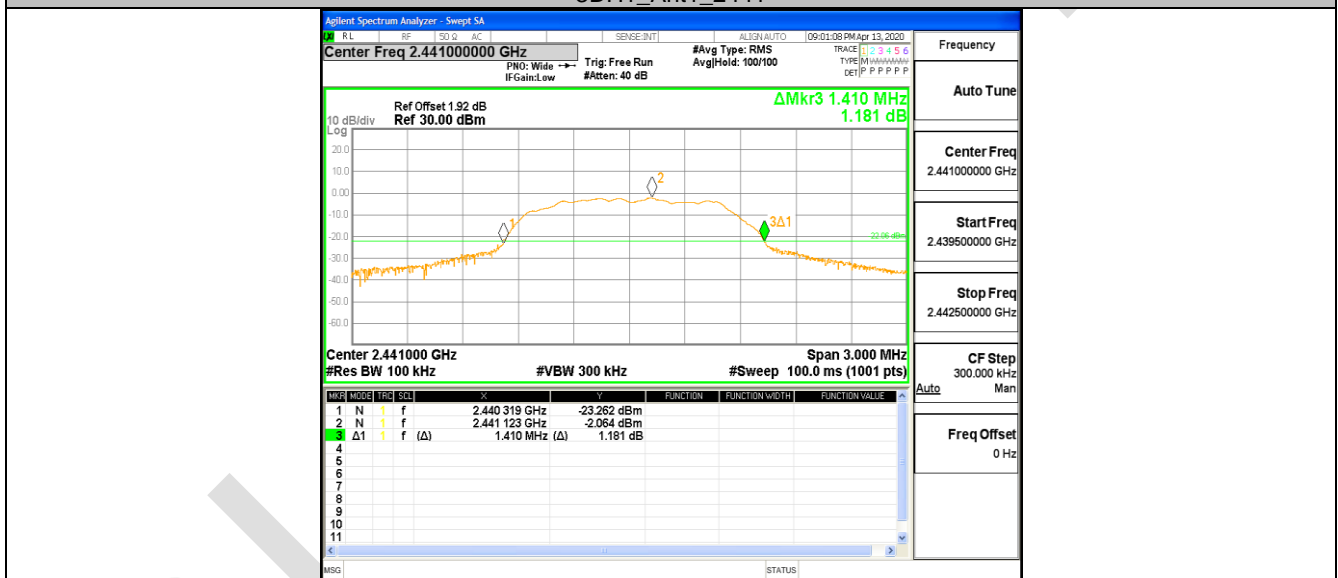

3DH1_Ant1_2480

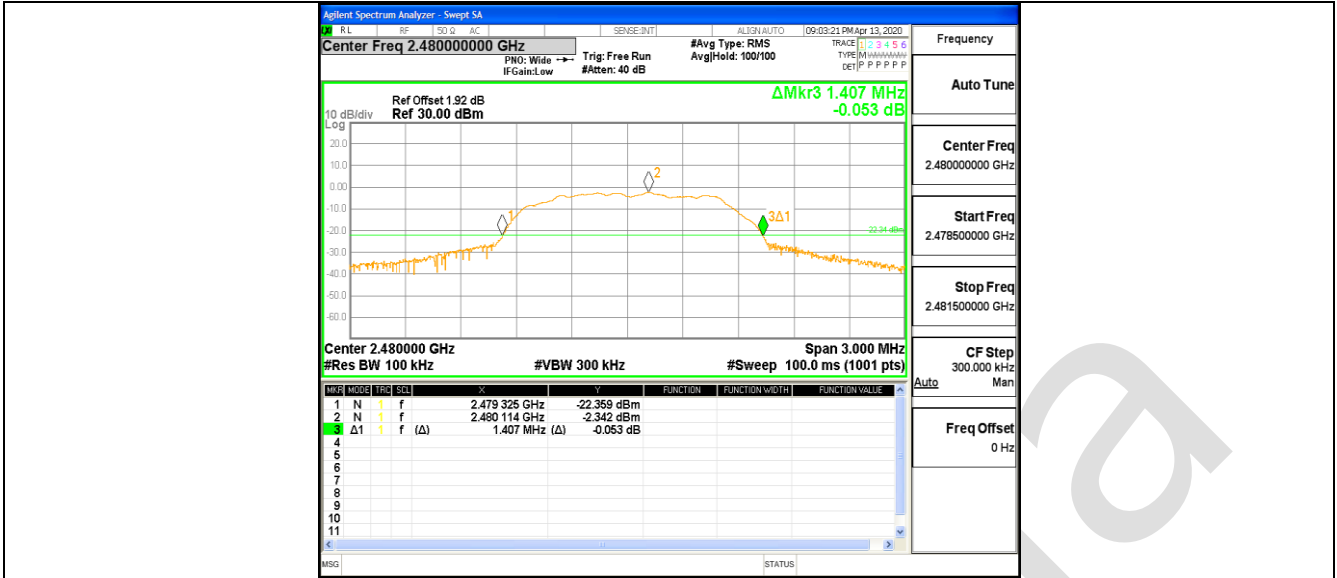


10.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	-0.52	<=20.97	PASS
		2441	-0.24	<=20.97	PASS
		2480	-0.38	<=20.97	PASS
2DH1	Ant1	2402	1.64	<=20.97	PASS
		2441	1.99	<=20.97	PASS
		2480	1.85	<=20.97	PASS
3DH1	Ant1	2402	1.92	<=20.97	PASS
		2441	2.21	<=20.97	PASS
		2480	1.96	<=20.97	PASS


BlueAsia

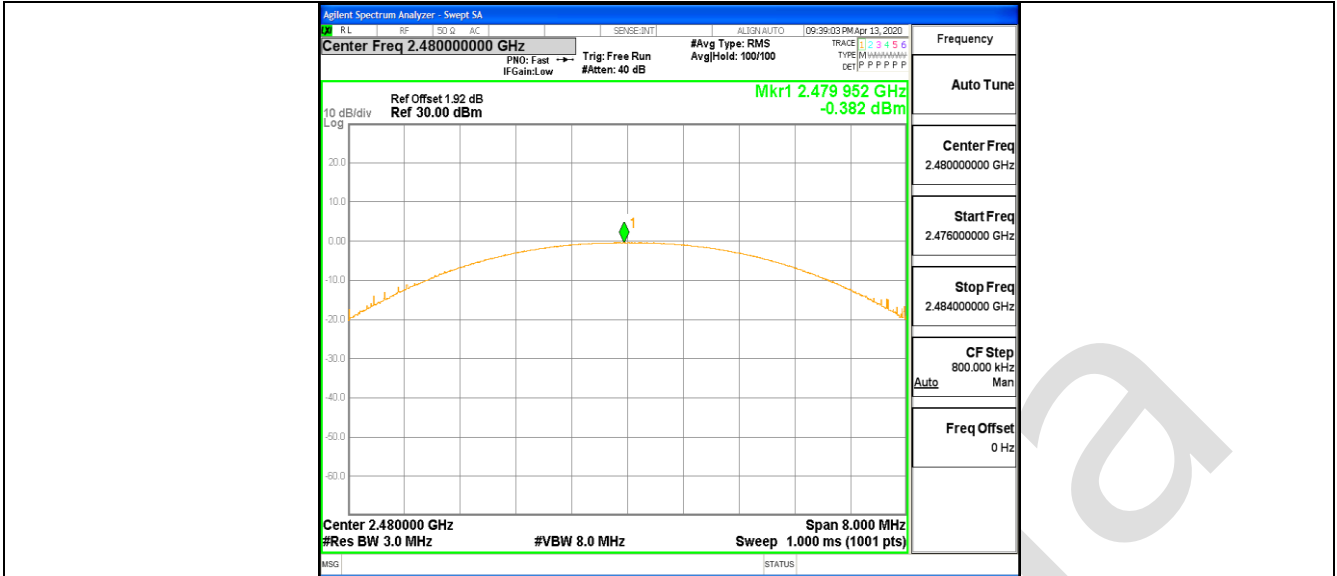


2DH1_Ant1_2402

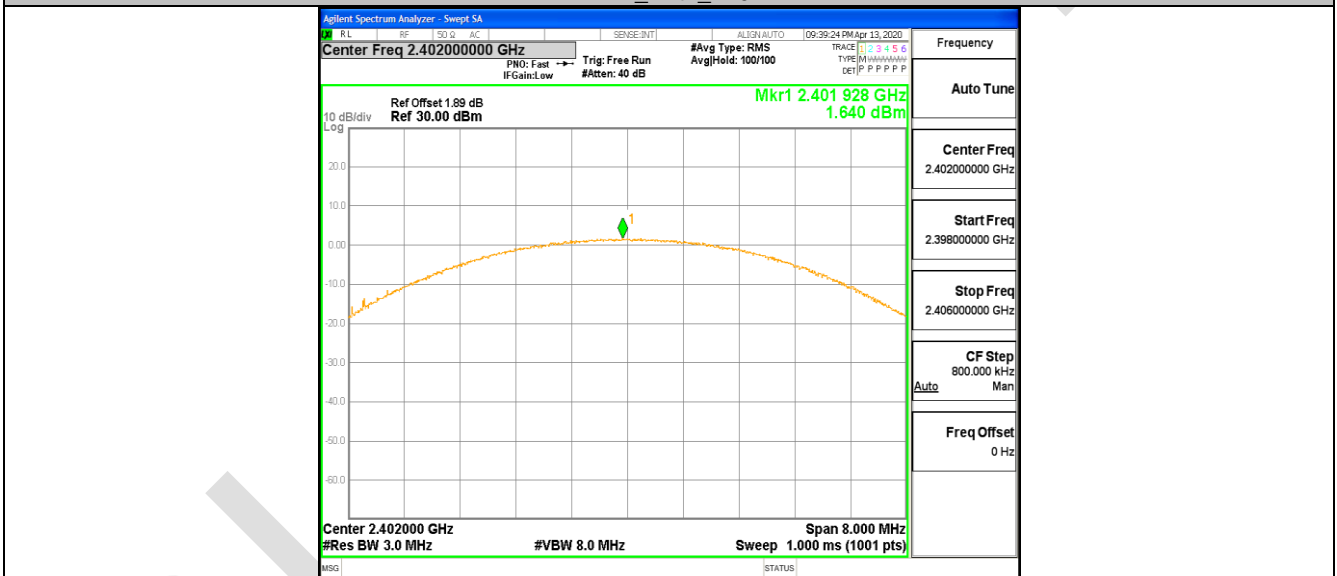


2DH1_Ant1_2441

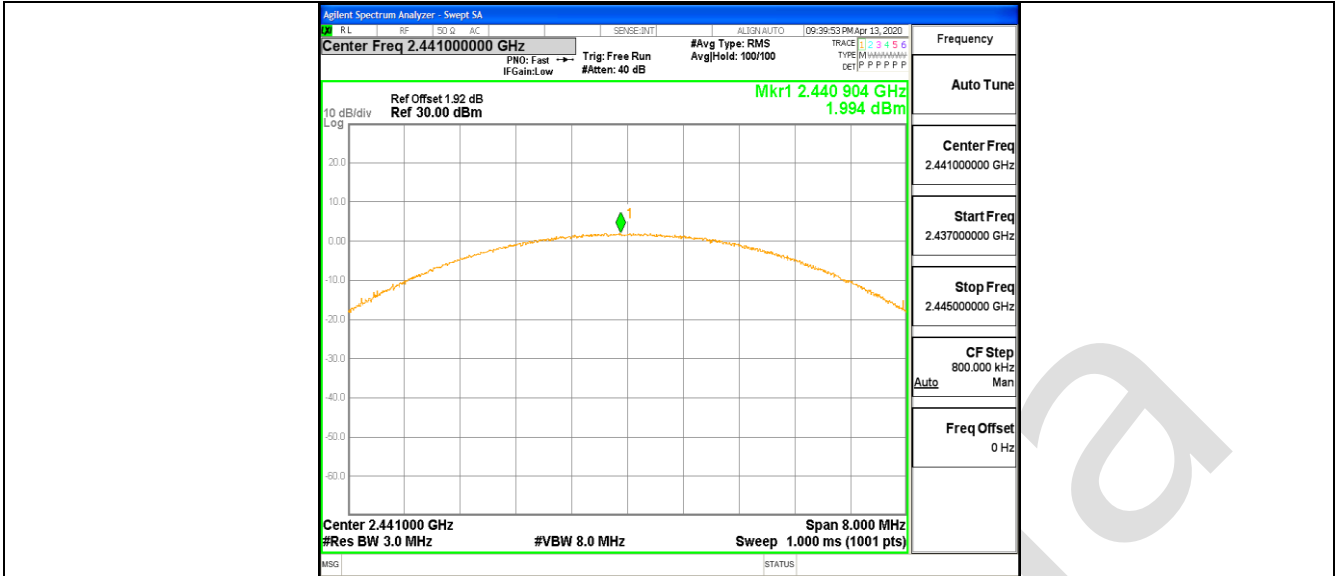


2DH1_Ant1_2480

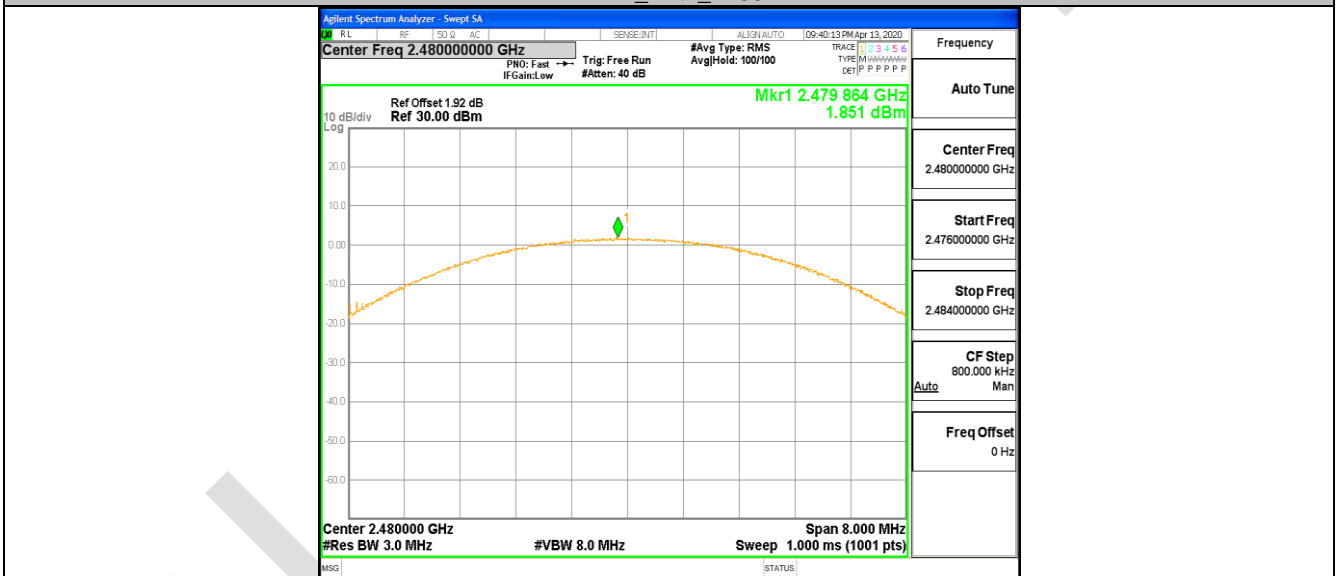


3DH1_Ant1_2402

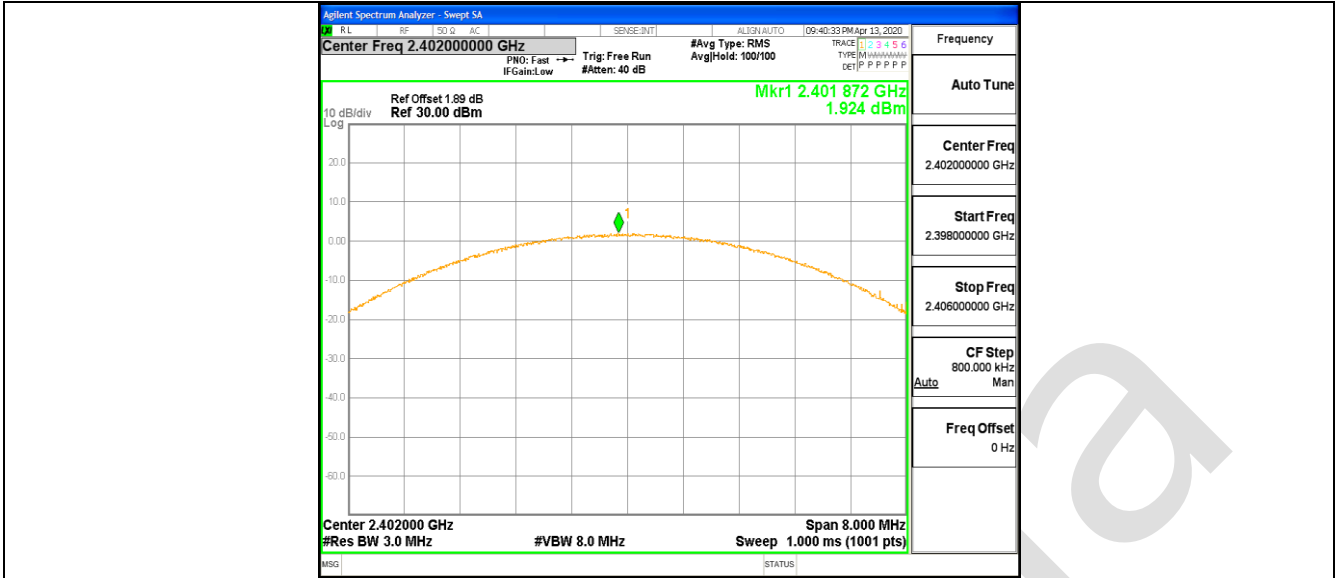

3DH1_Ant1_2441

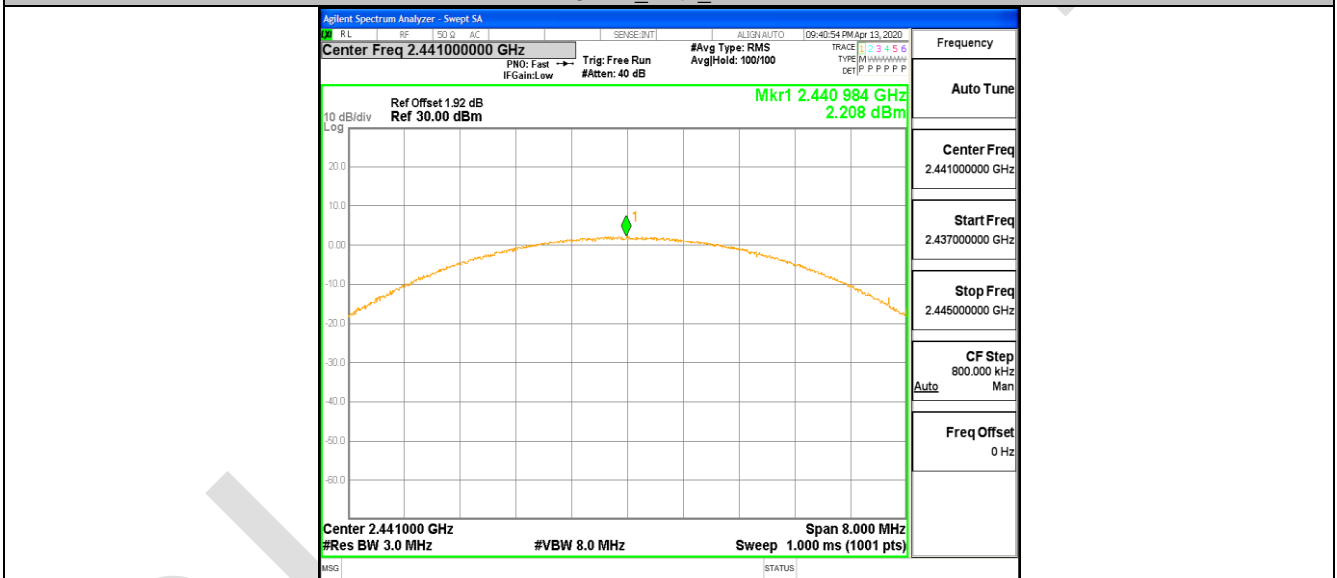

3DH1_Ant1_2480

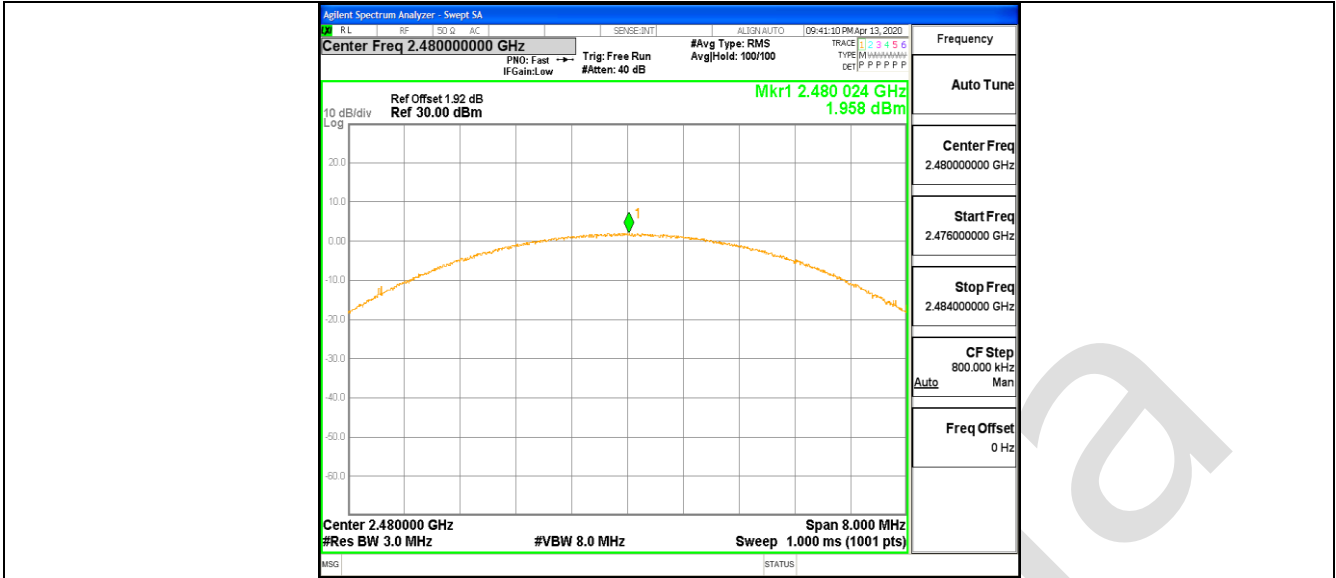

BlueAsia

10.3 APPENDIX: CARRIER FREQUENCY SEPARATION

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	0.992	≥ 0.746	PASS
2DH1	Ant1	Hop	1.03	≥ 0.946	PASS
3DH1	Ant1	Hop	1.074	≥ 0.940	PASS

Test Graphs

