

# TEST REPORT

**FCC ID: RDR-T1PRO**

**Product: Bluetooth Headset**

**Model No.: T1 Pro**

**Report No.: TCT171117E015**

**Issued Date: Nov. 07, 2017**

Issued for:

**Dongguan Hele Electronics Co., Ltd.**

**Dalingya Industrial Zone, Daojiao Town, Dongguan City, Guangdong, China**

Issued By:

**Shenzhen Tongce Testing Lab.**

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,  
Shenzhen, Guangdong, China**

**TEL: +86-755-27673339**

**FAX: +86-755-27673332**

**Note:** This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

**TABLE OF CONTENTS**

1. Test Certification..... 3

2. Test Result Summary ..... 4

3. EUT Description..... 5

4. General Information..... 7

    4.1. TEST ENVIRONMENT AND MODE..... 7

    4.2. DESCRIPTION OF SUPPORT UNITS ..... 8

5. Facilities and Accreditations ..... 9

    5.1. FACILITIES ..... 9

    5.2. LOCATION..... 9

    5.3. MEASUREMENT UNCERTAINTY ..... 9

6. Test Results and Measurement Data ..... 10

    6.1. ANTENNA REQUIREMENT ..... 10

    6.2. CONDUCTED EMISSION ..... 11

    6.3. RADIATED EMISSION MEASUREMENT..... 15

    6.4. 20dB OCCUPIED BANDWIDTH ..... 25

**Appendix A: Photographs of Test Setup**

**Appendix B: Photographs of EUT**

## 1. Test Certification

<b>Product:</b>	Bluetooth Headset
<b>Model No.:</b>	T1 Pro
<b>Applicant:</b>	Dongguan Hele Electronics Co., Ltd.
<b>Address:</b>	Dalingya Industrial Zone, Daojiao Town, Dongguan City, Guangdong, China
<b>Manufacturer:</b>	Dongguan Hele Electronics Co., Ltd.
<b>Address:</b>	Dalingya Industrial Zone, Daojiao Town, Dongguan City, Guangdong, China
<b>Date of Test:</b>	Nov. 02 - Nov. 06, 2017
<b>Applicable Standards:</b>	FCC CFR Title 47 Part 15 Subpart C Section 15.249

*The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.*

Tested By:



Beryl Zhao

Date:

Nov. 02, 2017

Reviewed By:



Joe Zhou

Date:

Nov. 07, 2017

Approved By:



Tomsin

Date:

Nov. 07, 2017

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Field Strength of Fundamental	§15.249 (a)	PASS
Spurious Emissions	§2.1053 §15.249 (a) (d)/ §15.209	PASS
Band Edge	§2.1053 §15.249 (d)/ §15.205	PASS
20dB Occupied Bandwidth	§2.1049 §15.215 (c)	PASS

**Note:**

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. EUT Description

<b>Product:</b>	Bluetooth Headset
<b>Model No.:</b>	T1 Pro
<b>Operation Frequency:</b>	2402MHz - 2480MHz
<b>Number of Channel:</b>	40
<b>Modulation Technology:</b>	GFSK
<b>Antenna Type:</b>	Integral antenna
<b>Antenna Gain:</b>	2.3dBi
<b>Power Supply:</b>	Rechargeable Battery: DC 3.7V

**Operation Frequency each of channel**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: Channel 0, 19 & 39 have been tested.

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

## 4. Genera Information

### 4.1. Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel
<p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

Per-test mode.			
We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:			
Axis	X	Y	Z
Field Strength(dBuV/m)	88.21	89.20	87.32

## 4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 5. Facilities and Accreditations

### 5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

### 5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339


### 5.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

## 6. Test Results and Measurement Data

### 6.1. Antenna Requirement
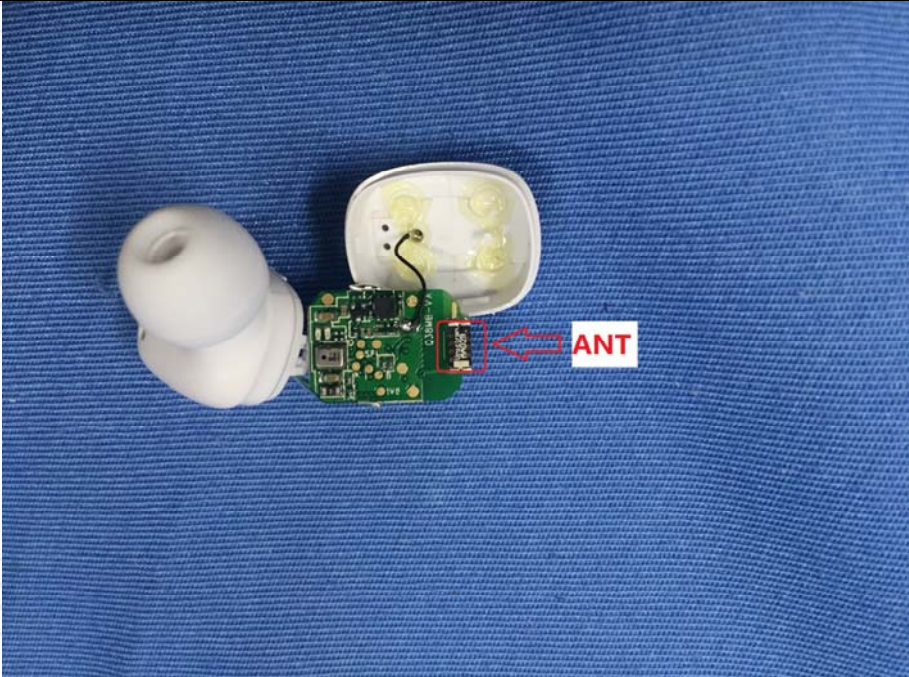
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>E.U.T Antenna:</b>	
The EUT antenna is integral antenna which permanently attached, and the best case gain of the antenna is 2.3dBi.	
	

## 6.2. Conducted Emission

### 6.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Transmitting mode with modulation														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	Pass														


**6.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESPI	101401	Jun. 12, 2018
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018
Coax cable (9KHz-30MHz)	TCT	CE-05	N/A	Sep. 27, 2018
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.2.3. Test data

Please refer to following diagram for individual  
Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

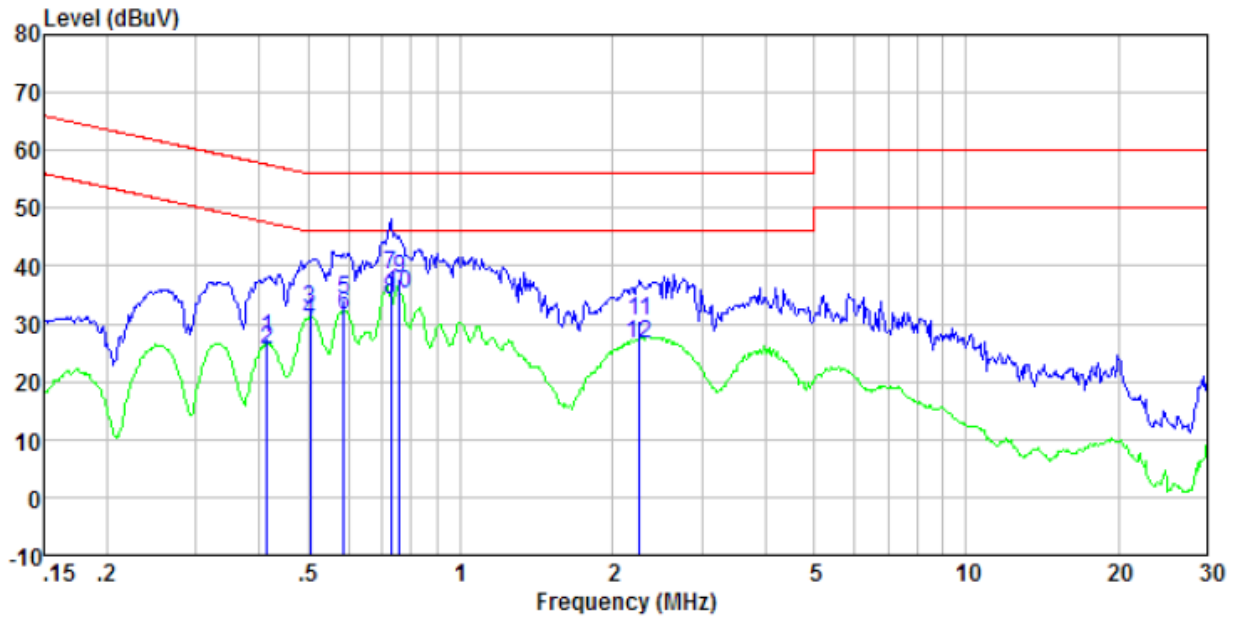

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.415	26.97	0.35	0.11	27.43	57.55	-30.12	QP
0.415	24.94	0.35	0.11	25.40	47.55	-22.15	Average
0.505	32.24	0.31	0.11	32.66	56.00	-23.34	QP
0.505	30.13	0.31	0.11	30.55	46.00	-15.45	Average
0.589	33.86	0.29	0.12	34.27	56.00	-21.73	QP
0.589	31.22	0.29	0.12	31.63	46.00	-14.37	Average
0.727	38.24	0.25	0.13	38.62	56.00	-17.38	QP
0.727	33.86	0.25	0.13	34.24	46.00	-11.76	Average
0.759	37.57	0.25	0.13	37.95	56.00	-18.05	QP
0.759	34.73	0.25	0.13	35.11	46.00	-10.89	Average
2.261	30.15	0.20	0.18	30.53	56.00	-25.47	QP
2.261	26.14	0.20	0.18	26.52	46.00	-19.48	Average

**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

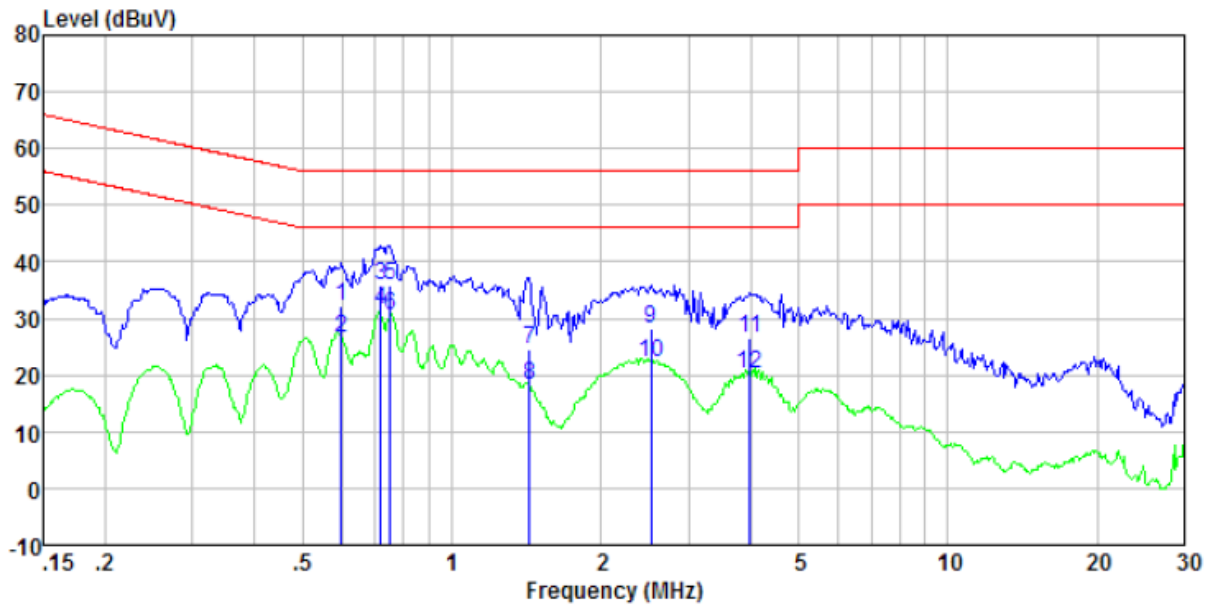

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.598	31.69	0.29	0.12	32.10	56.00	-23.90	QP
0.598	26.17	0.29	0.12	26.58	46.00	-19.42	Average
0.720	35.54	0.26	0.13	35.93	56.00	-20.07	QP
0.720	30.99	0.26	0.13	31.38	46.00	-14.62	Average
0.751	35.54	0.25	0.13	35.92	56.00	-20.08	QP
0.751	30.12	0.25	0.13	30.50	46.00	-15.50	Average
1.433	24.11	0.20	0.16	24.47	56.00	-31.53	QP
1.433	17.80	0.20	0.16	18.16	46.00	-27.84	Average
2.527	27.77	0.20	0.18	28.15	56.00	-27.85	QP
2.527	21.85	0.20	0.18	22.23	46.00	-23.77	Average
3.985	26.03	0.20	0.18	26.41	56.00	-29.59	QP
3.985	20.00	0.20	0.18	20.38	46.00	-25.62	Average

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

### 6.3. Radiated Emission Measurement

#### 6.3.1. Test Specification


<b>Test Requirement:</b>	FCC Part15 C Section 15.209/ Part 2 J Section 2.1053				
<b>Test Method:</b>	ANSI C63.10:2013				
<b>Frequency Range:</b>	9 kHz to 25 GHz				
<b>Measurement Distance:</b>	3 m				
<b>Antenna Polarization:</b>	Horizontal & Vertical				
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
<b>Limit(Field strength of the fundamental signal):</b>	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
<b>Limit(Spurious Emissions):</b>	Frequency	Limit (dBuV/m @3m)		Remark	
	0.009-0.490	2400/F(KHz)		Quasi-peak Value	
	0.490-1.705	24000/F(KHz)		Quasi-peak Value	
	1.705-30	30		Quasi-peak Value	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
74.0		Peak Value			
<b>Limit (band edge) :</b>	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make</li> </ol>				




**Test setup:**

- the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
  5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
  6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

For radiated emissions below 30MHz

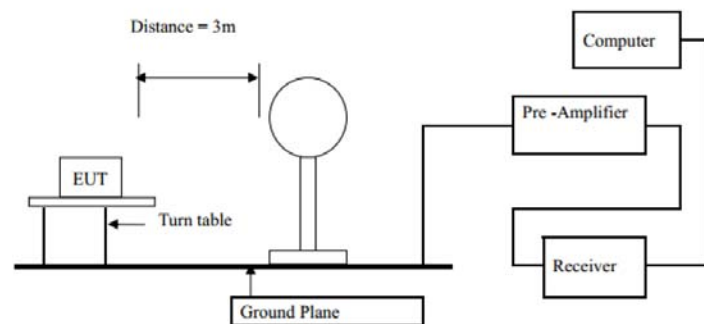


30MHz to 1GHz

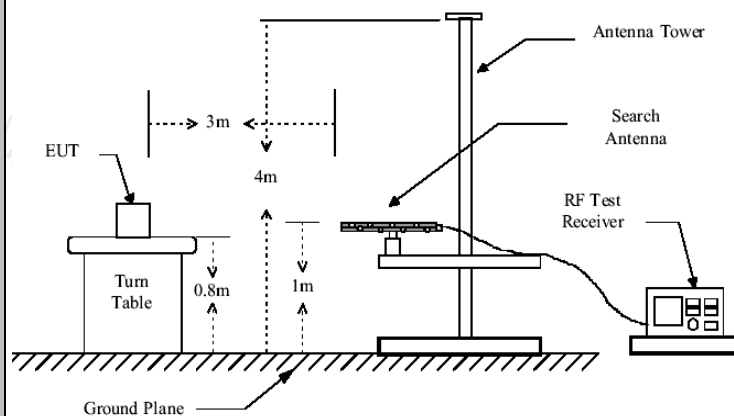

Above 1GHz

(The diagram below shows the test setup that is utilized to make the measurements for emission from 1GHz to the tenth harmonic of the highest fundamental frequency or to 40GHz emissions, whichever is lower.)



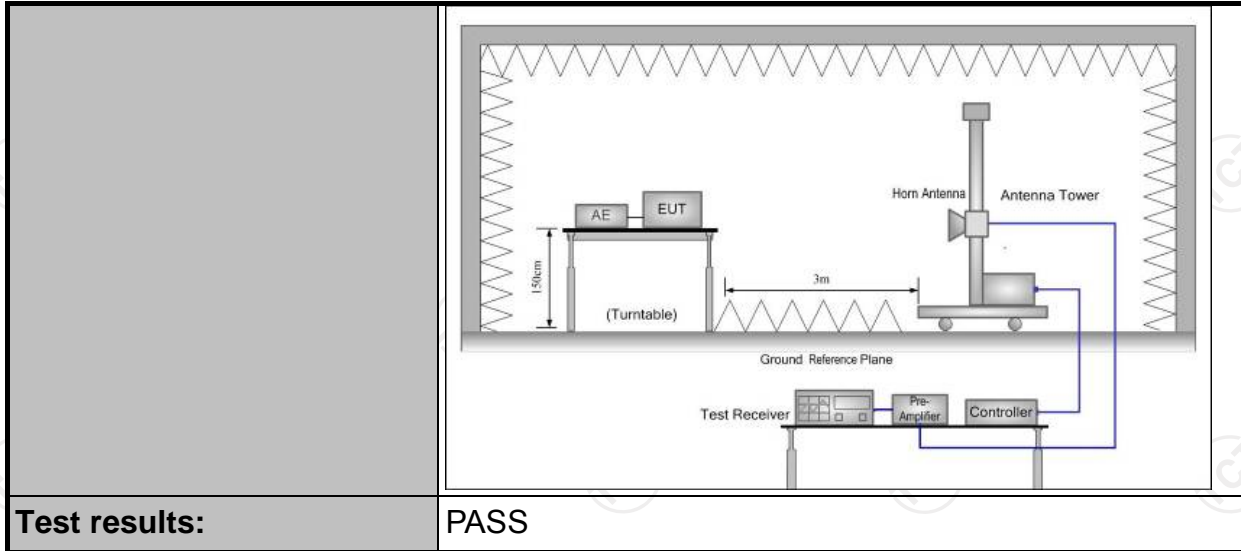

Test results:

PASS



**6.3.2. Test Instruments**

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 27, 2018
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ	200061	Sep. 27, 2018
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 27, 2018
Pre-amplifier	HP	8447D	2727A05017	Sep. 27, 2018
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBH 9170	582	Jun. 07, 2018
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Coax cable (9KHz-1GHz)	TCT	RE-low-01	N/A	Sep. 27, 2018
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Sep. 27, 2018
Coax cable (9KHz-1GHz)	TCT	RE-low-03	N/A	Sep. 27, 2018
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Sep. 27, 2018
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

### 6.3.3. Test Data

#### 2.1.1 Field Strength of Fundamental

Peak value:

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
2402	88.24 (PK)	V	114	-25.76
2402	86.79 (PK)	H	114	-27.21
2440	87.29 (PK)	V	114	-26.71
2440	86.07 (PK)	H	114	-27.93
2480	89.20 (PK)	V	114	-24.80
2480	86.94 (PK)	H	114	-27.06
2402	78.35 (AV)	V	94	-25.39
2402	76.76 (AV)	H	94	-14.98
2440	77.13 (AV)	V	94	-25.07
2440	74.49 (AV)	H	94	-15.07
2480	79.16 (AV)	V	94	-25.74
2480	77.00 (AV)	H	94	-15.95

Remark: RBW 3MHz, VBW 10MHz, peak detector for PK value, RBW 3MHz, VBW 10MHz AV detector for AV value

#### Spurious Emissions

##### Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBuV/m)	Limit@3m (dBuV/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Frequency Range (30MHz-1GHz)

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
57.59	23.86	11.67	0.84	30.05	6.32	40.00	-33.68	Vertical
143.83	32.35	7.37	1.53	29.62	11.63	43.50	-31.87	Vertical
155.91	32.78	7.85	1.60	29.58	12.65	43.50	-30.85	Vertical
355.43	25.40	14.62	2.64	29.85	12.81	46.00	-33.19	Vertical
515.44	24.72	17.76	3.37	29.48	16.37	46.00	-29.63	Vertical
796.18	25.34	21.25	4.45	29.10	21.94	46.00	-24.06	Vertical
55.22	26.01	11.93	0.82	30.06	8.70	40.00	-31.30	Horizontal
110.18	25.68	11.20	1.28	29.75	8.41	43.50	-35.09	Horizontal
214.51	27.30	10.69	1.93	29.50	10.42	43.50	-33.08	Horizontal
382.59	25.68	15.15	2.77	29.69	13.91	46.00	-32.09	Horizontal
616.37	25.21	19.37	3.79	29.36	19.01	46.00	-26.99	Horizontal
903.31	26.04	22.22	4.87	29.30	23.83	46.00	-22.17	Horizontal



## Band Edge Requirement

Test channel:	Lowest channel
---------------	----------------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	39.77	27.59	5.38	30.18	42.56	74.00	-31.44	Horizontal
2400.00	56.11	27.58	5.39	30.18	58.90	74.00	-15.10	Horizontal
2390.00	40.02	27.59	5.38	30.18	42.81	74.00	-31.19	Vertical
2400.00	57.81	27.58	5.39	30.18	60.60	74.00	-13.40	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.02	27.59	5.38	30.18	33.81	54.00	-20.19	Horizontal
2400.00	42.07	27.58	5.39	30.18	44.86	54.00	-9.14	Horizontal
2390.00	30.74	27.59	5.38	30.18	33.53	54.00	-20.47	Vertical
2400.00	43.42	27.58	5.39	30.18	46.21	54.00	-7.79	Vertical

Test channel:	Highest channel
---------------	-----------------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.50	27.53	5.47	29.93	44.57	74.00	-29.43	Horizontal
2500.00	41.26	27.55	5.49	29.93	44.37	74.00	-29.63	Horizontal
2483.50	41.82	27.53	5.47	29.93	44.89	74.00	-29.11	Vertical
2500.00	41.97	27.55	5.49	29.93	45.08	74.00	-28.92	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.81	27.53	5.47	29.93	36.88	54.00	-17.12	Horizontal
2500.00	32.26	27.55	5.49	29.93	35.37	54.00	-18.63	Horizontal
2483.50	34.76	27.53	5.47	29.93	37.83	54.00	-16.17	Vertical
2500.00	31.92	27.55	5.49	29.93	35.03	54.00	-18.97	Vertical

### Note:

- Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
- Margin (dB) = Emission Level (dBuV/m)- limit (dBuV/m)

### Above 1GHz

Test channel:	Lowest channel
---------------	----------------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	34.89	31.78	8.60	32.09	43.18	74.00	-30.82	Vertical
7206.00	30.23	36.15	11.65	32.00	46.03	74.00	-27.97	Vertical
9608.00	30.04	37.95	14.14	31.62	50.51	74.00	-23.49	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	38.68	31.78	8.60	32.09	46.97	74.00	-27.03	Horizontal
7206.00	31.77	36.15	11.65	32.00	47.57	74.00	-26.43	Horizontal
9608.00	29.23	37.95	14.14	31.62	49.70	74.00	-24.30	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

#### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.16	31.78	8.60	32.09	32.45	54.00	-21.55	Vertical
7206.00	19.19	36.15	11.65	32.00	34.99	54.00	-19.01	Vertical
9608.00	18.41	37.95	14.14	31.62	38.88	54.00	-15.12	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.12	31.78	8.60	32.09	36.41	54.00	-17.59	Horizontal
7206.00	21.20	36.15	11.65	32.00	37.00	54.00	-17.00	Horizontal
9608.00	17.94	37.95	14.14	31.62	38.41	54.00	-15.59	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

#### Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (dBuV/m)- limit (dBuV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “\*” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	35.28	31.85	8.67	32.12	43.68	74.00	-30.32	Vertical
7320.00	30.49	36.37	11.72	31.89	46.69	74.00	-27.31	Vertical
9760.00	30.28	38.35	14.25	31.62	51.26	74.00	-22.74	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	39.16	31.85	8.67	32.12	47.56	74.00	-26.44	Horizontal
7320.00	32.07	36.37	11.72	31.89	48.27	74.00	-25.73	Horizontal
9760.00	29.51	38.35	14.25	31.62	50.49	74.00	-23.51	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.48	31.85	8.67	32.12	32.88	54.00	-21.12	Vertical
7320.00	19.41	36.37	11.72	31.89	35.61	54.00	-18.39	Vertical
9760.00	18.61	38.35	14.25	31.62	39.59	54.00	-14.41	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	28.49	31.85	8.67	32.12	36.89	54.00	-17.11	Horizontal
7320.00	21.45	36.37	11.72	31.89	37.65	54.00	-16.35	Horizontal
9760.00	18.17	38.35	14.25	31.62	39.15	54.00	-14.85	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (dBμV/m)- limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “\*” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.39	31.93	8.73	32.16	43.89	74.00	-30.11	Vertical
7440.00	30.56	36.59	11.79	31.78	47.16	74.00	-26.84	Vertical
9920.00	30.34	38.81	14.38	31.88	51.65	74.00	-22.35	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.28	31.93	8.73	32.16	47.78	74.00	-26.22	Horizontal
7440.00	32.15	36.59	11.79	31.78	48.75	74.00	-25.25	Horizontal
9920.00	29.58	38.81	14.38	31.88	50.89	74.00	-23.11	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.59	31.93	8.73	32.16	33.09	54.00	-20.91	Vertical
7440.00	19.48	36.59	11.79	31.78	36.08	54.00	-17.92	Vertical
9920.00	18.68	38.81	14.38	31.88	39.99	54.00	-14.01	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.61	31.93	8.73	32.16	37.11	54.00	-16.89	Horizontal
7440.00	21.53	36.59	11.79	31.78	38.13	54.00	-15.87	Horizontal
9920.00	18.25	38.81	14.38	31.88	39.56	54.00	-14.44	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal


**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (dBμV/m)- limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “\*” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.



## 6.4.20dB Occupied Bandwidth

### 6.4.1. Test Specification
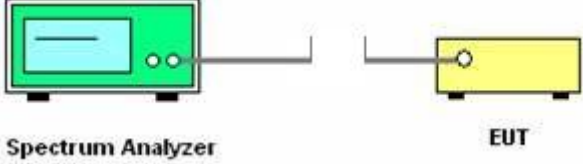
<b>Test Requirement:</b>	FCC Part15 C Section 15.215(c)/ Part 2 J Section 2.1049
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	N/A
	<ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW<math>\geq</math>1% of the 20 dB bandwidth; VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test setup:</b>	 <p>The diagram illustrates the test setup. On the left is a green Spectrum Analyzer with a screen and two knobs. A cable connects it to a yellow rectangular EUT (Equipment Under Test) on the right. The Spectrum Analyzer is labeled 'Spectrum Analyzer' and the EUT is labeled 'EUT'.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test results:</b>	PASS

### 6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


**6.4.3. Test data**

Test Channel	20dB Occupy Bandwidth (MHz)	Limit	Conclusion
Lowest	1.210	---	PASS
Middle	1.218	---	PASS
Highest	1.218	---	PASS


Test plots as follows:




Lowest channel

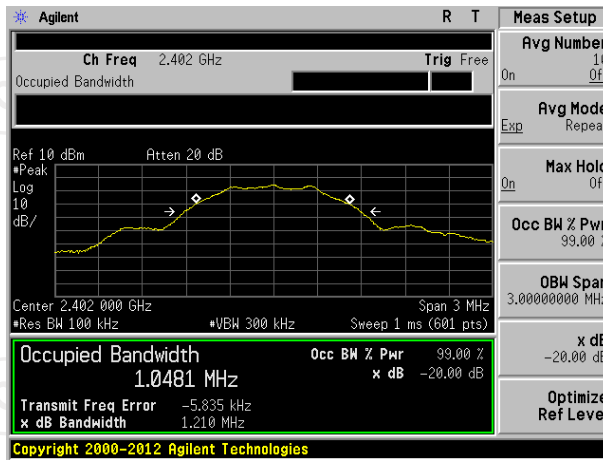

Middle channel

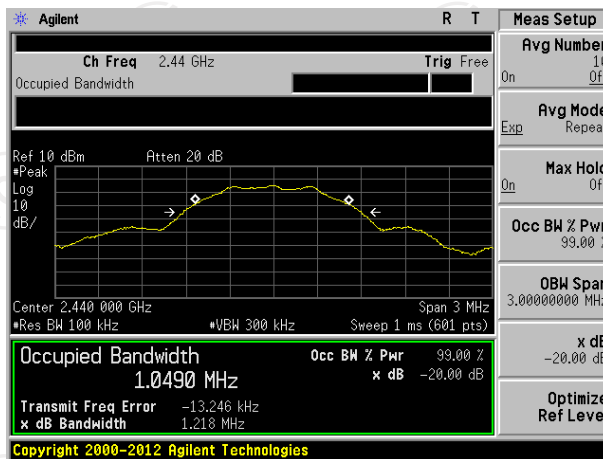

Highest channel

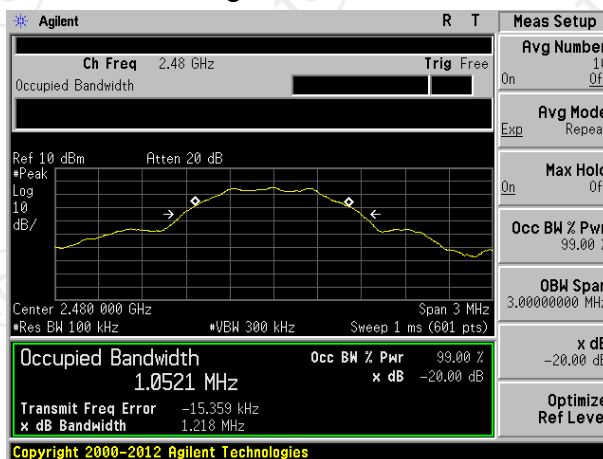

## Appendix A: Photographs of Test Setup

Product: Bluetooth Headset

Model: T1 Pro

Radiated Emission



Conducted Emission



**Appendix B: Photographs of EUT**

Refer to test report TCT171117E011

**\*\*\*\*\*END OF REPORT\*\*\*\*\***