




Mode 15 :


PSD Plot on 802.11n (BW 20MHz) Channel 11 - Chain A

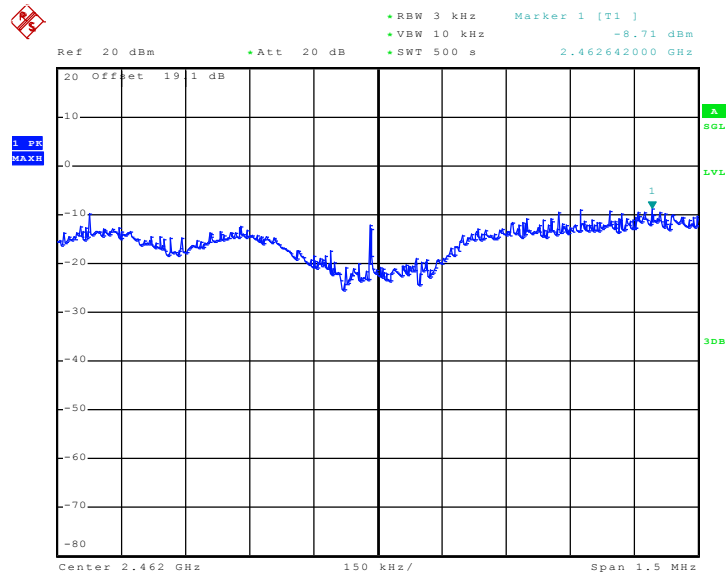

Date: 14.SEP.2010 13:55:02

Mode 15 :

PSD Plot on 802.11n (BW 20MHz) Channel 11 - Chain B

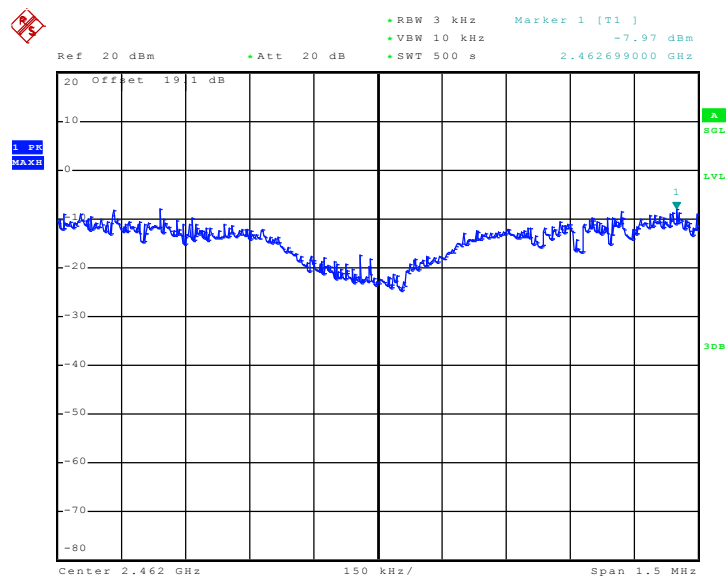


Date: 14.SEP.2010 14:04:33



Mode 16 :


PSD Plot on 802.11n (BW 40MHz) Channel 03 - Chain A

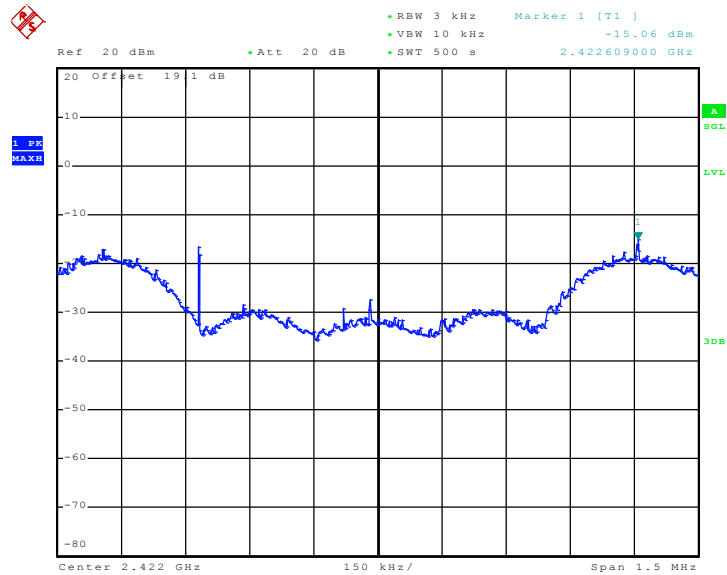

Date: 14.SEP.2010 14:27:11

Mode 16 :

PSD Plot on 802.11n (BW 40MHz) Channel 03 - Chain B

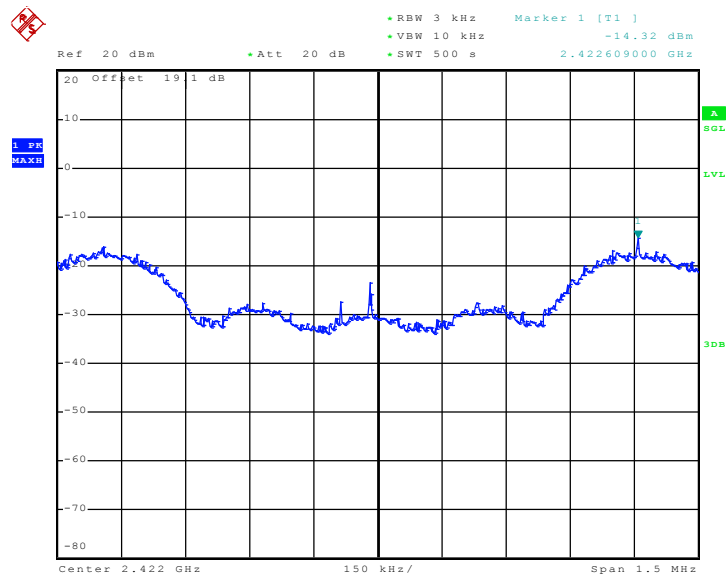


Date: 14.SEP.2010 14:17:19



Mode 17 :


PSD Plot on 802.11n (BW 40MHz) Channel 04 - Chain A

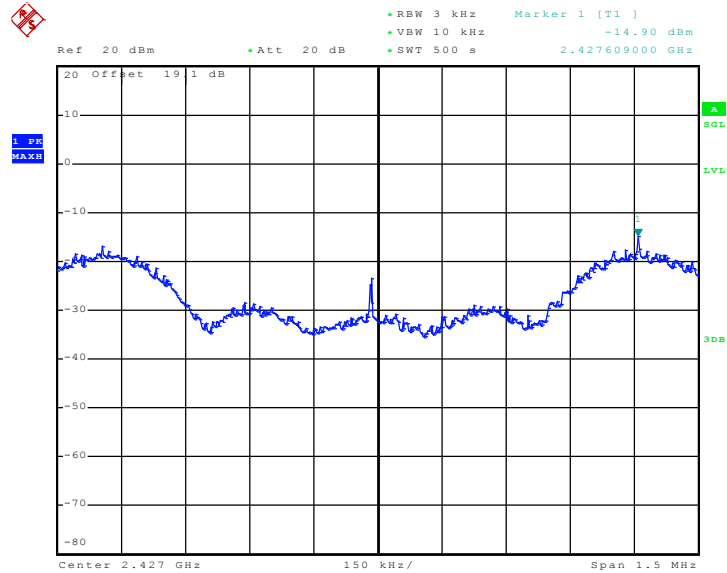

Date: 14.SEP.2010 14:45:21

Mode 17 :

PSD Plot on 802.11n (BW 40MHz) Channel 04 - Chain B

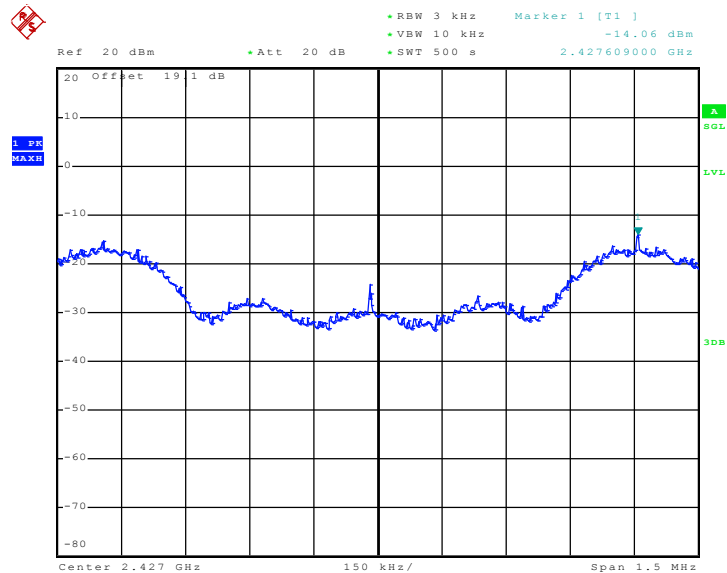


Date: 14.SEP.2010 14:54:45



Mode 18 :


PSD Plot on 802.11n (BW 40MHz) Channel 06 - Chain A

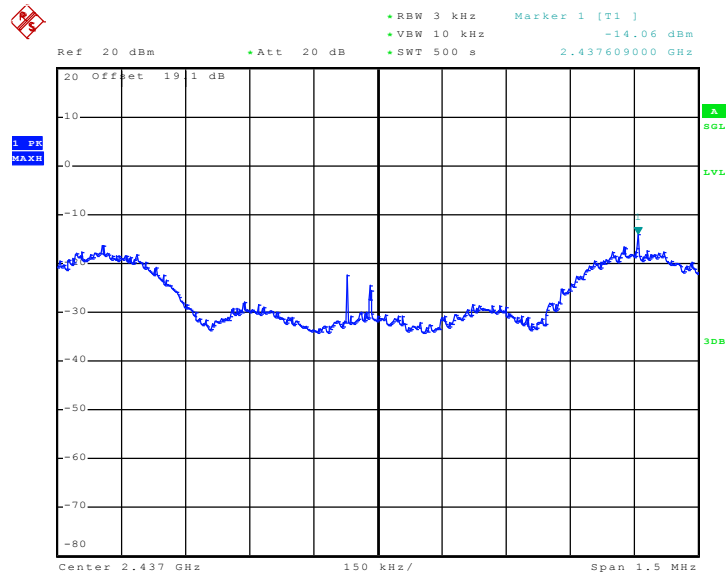

Date: 14.SEP.2010 15:24:51

Mode 18 :

PSD Plot on 802.11n (BW 40MHz) Channel 06 - Chain B

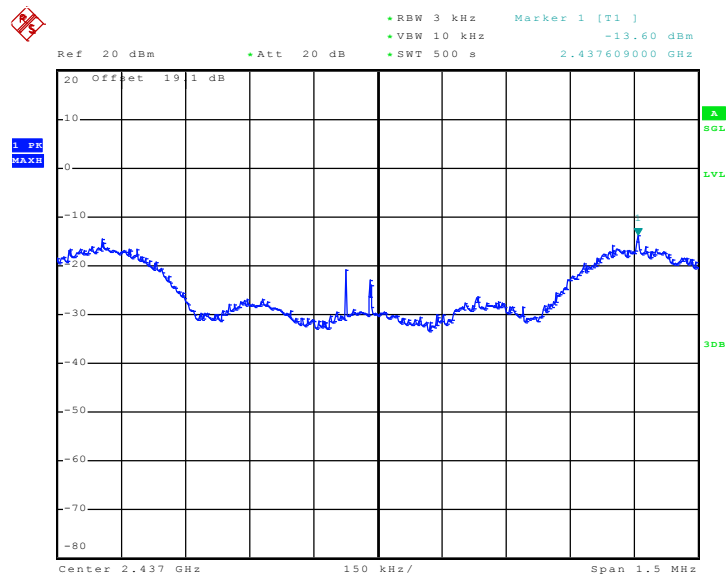


Date: 14.SEP.2010 15:10:35



Mode 19 :


PSD Plot on 802.11n (BW 40MHz) Channel 08 - Chain A

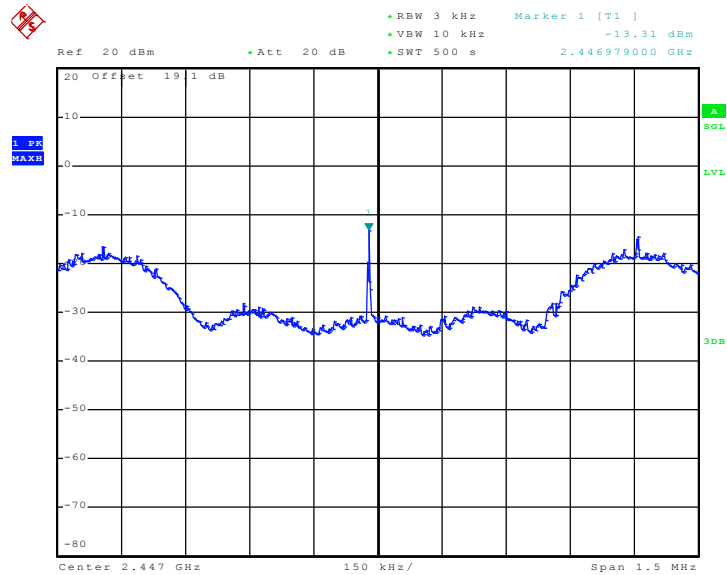

Date: 14.SEP.2010 15:40:07

Mode 19 :

PSD Plot on 802.11n (BW 40MHz) Channel 08 - Chain B

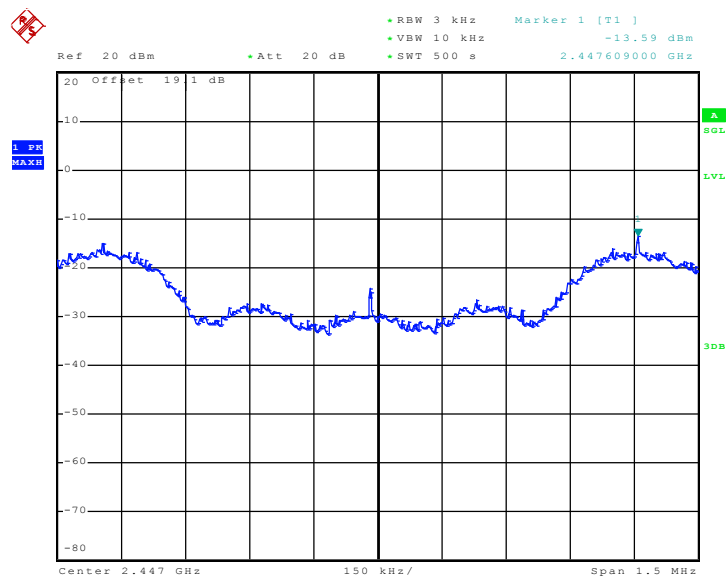


Date: 14.SEP.2010 15:56:24



Mode 20 :


PSD Plot on 802.11n (BW 40MHz) Channel 09 - Chain A

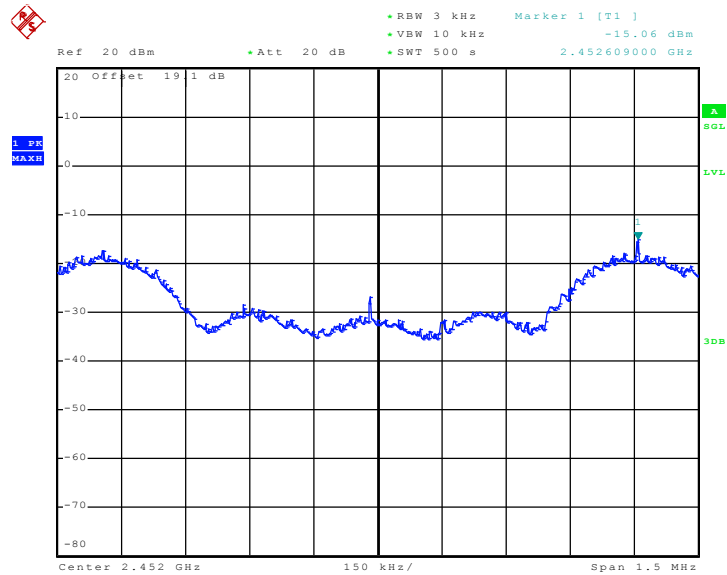

Date: 14.SEP.2010 17:30:02

Mode 20 :

PSD Plot on 802.11n (BW 40MHz) Channel 09 - Chain B

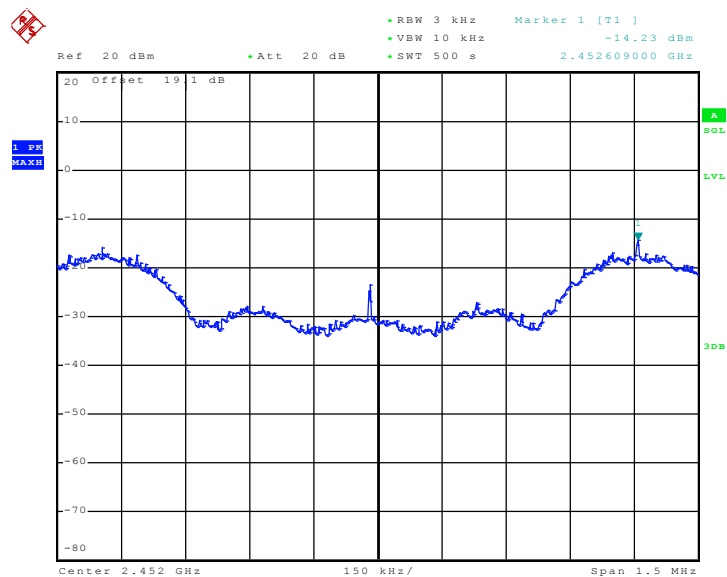


Date: 14.SEP.2010 16:11:24



Mode 21:


PSD Plot on 802.11a Channel 149 - Chain A

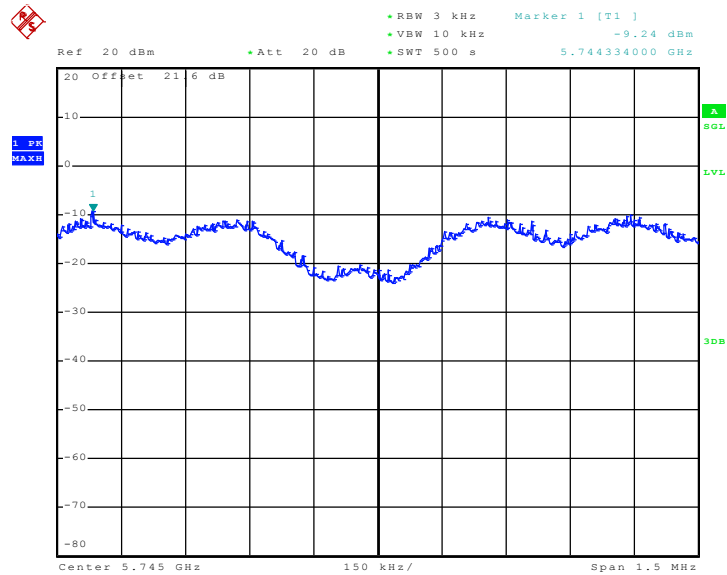

Date: 20.SEP.2010 16:14:44

Mode 22:

PSD Plot on 802.11a Channel 157 - Chain A

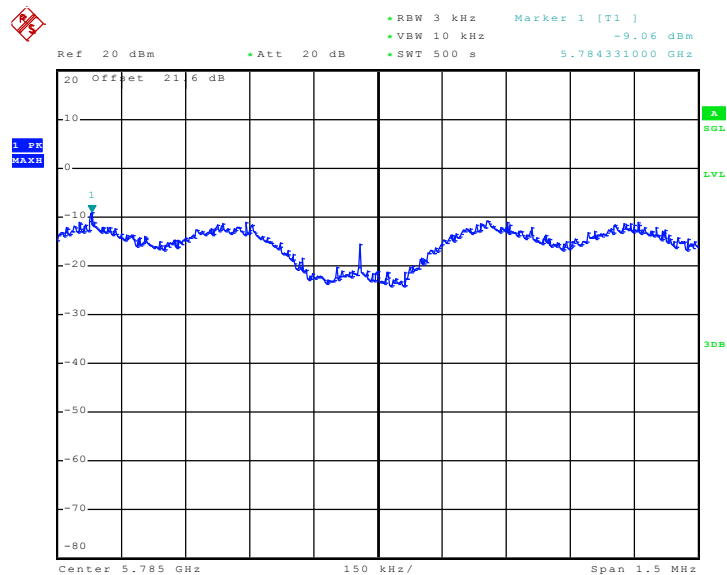


Date: 20.SEP.2010 17:03:28



Mode 23:


PSD Plot on 802.11a Channel 165 - Chain A

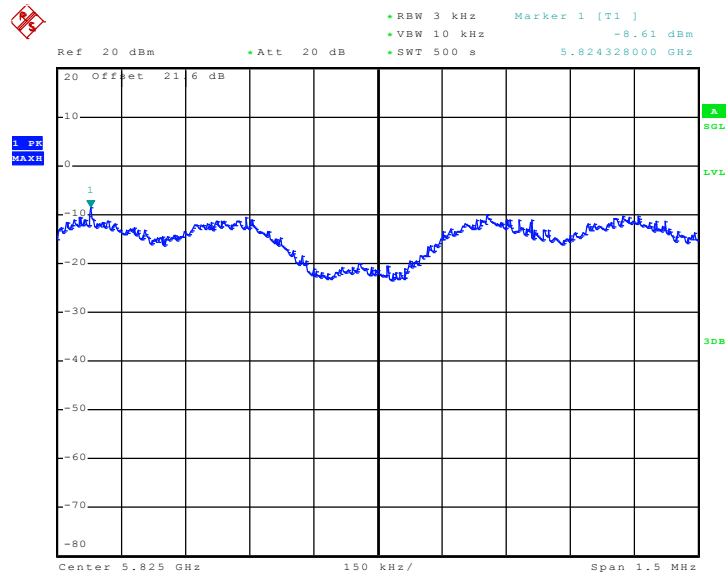

Date: 20.SEP.2010 17:15:41

Mode 24 :

PSD Plot on 802.11n (BW 20MHz) Channel 149 - Chain A

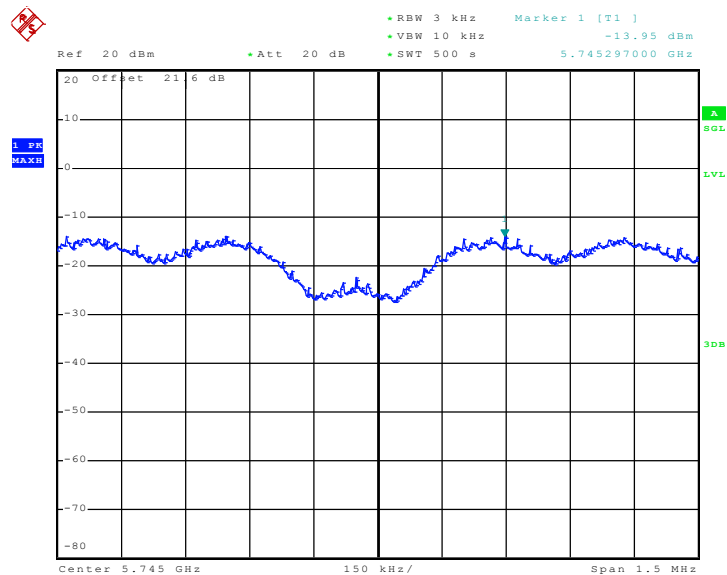


Date: 23.SEP.2010 04:09:49





Mode 24 :


PSD Plot on 802.11n (BW 20MHz) Channel 149 - Chain B

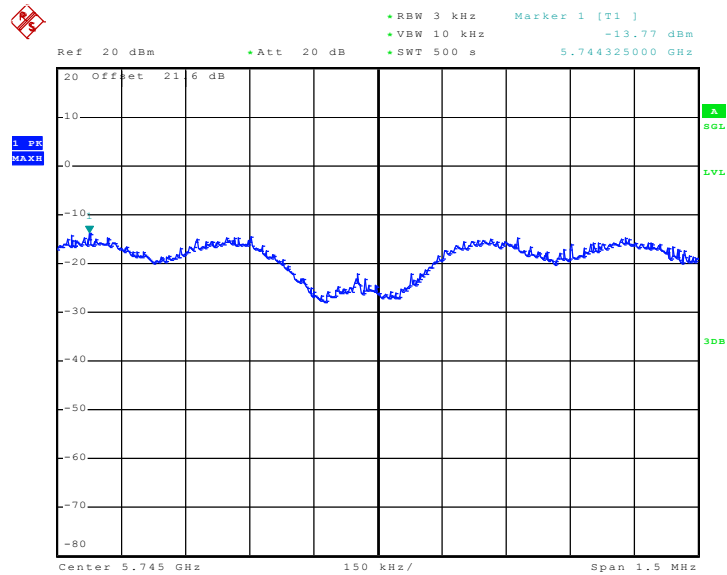

Date: 23.SEP.2010 04:25:45

Mode 25 :

PSD Plot on 802.11n (BW 20MHz) Channel 157 - Chain A

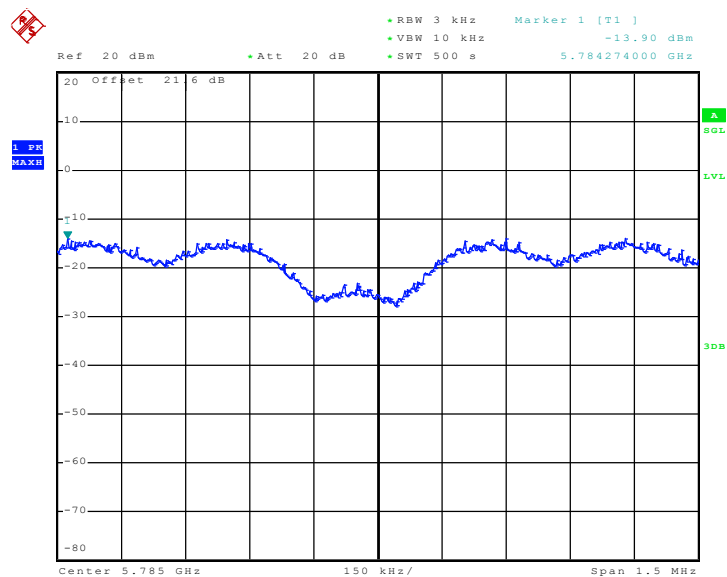


Date: 23.SEP.2010 04:53:53



Mode 25 :


PSD Plot on 802.11n (BW 20MHz) Channel 157 - Chain B

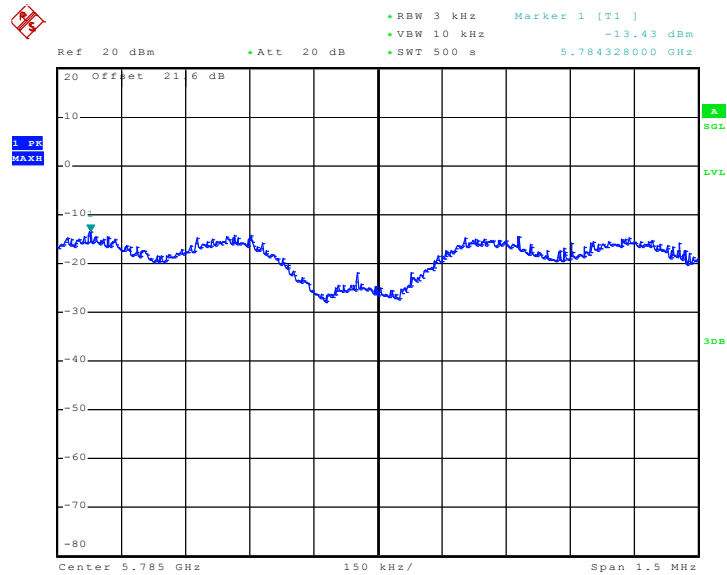

Date: 23.SEP.2010 04:38:37

Mode 26 :

PSD Plot on 802.11n (BW 20MHz) Channel 165 - Chain A

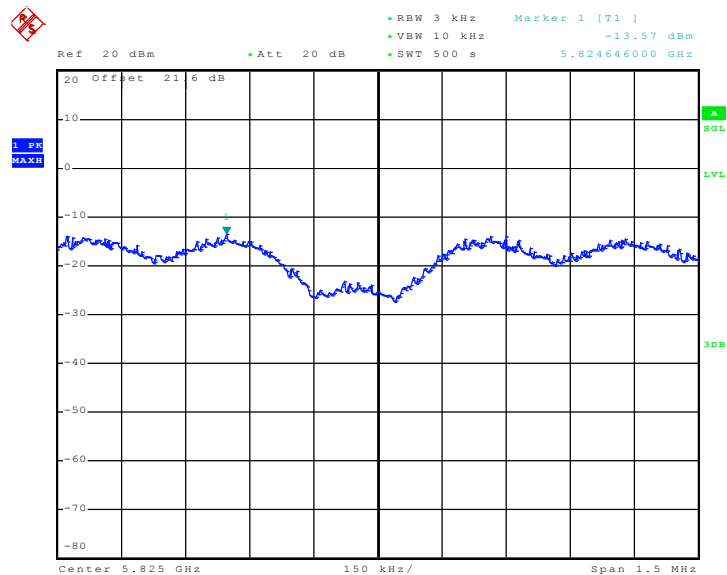


Date: 23.SEP.2010 05:10:04



Mode 26 :


PSD Plot on 802.11n (BW 20MHz) Channel 165 - Chain B

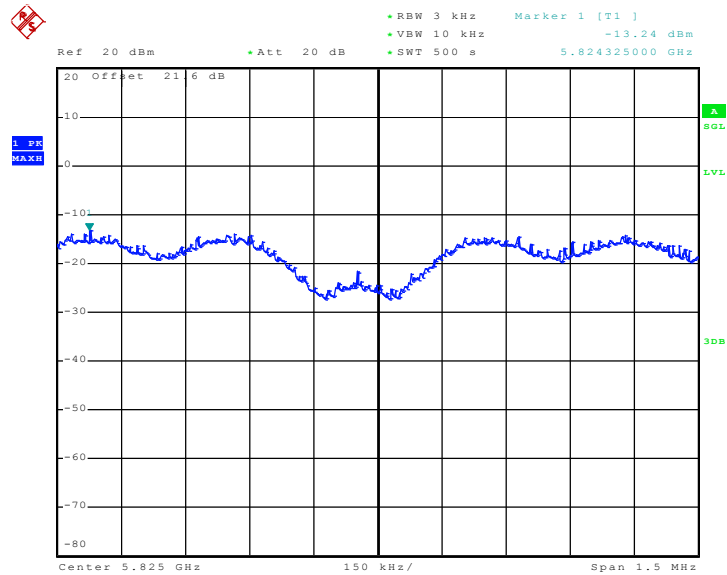

Date: 23.SEP.2010 05:24:47

Mode 27 :

PSD Plot on 802.11n (BW 40MHz) Channel 151 - Chain A

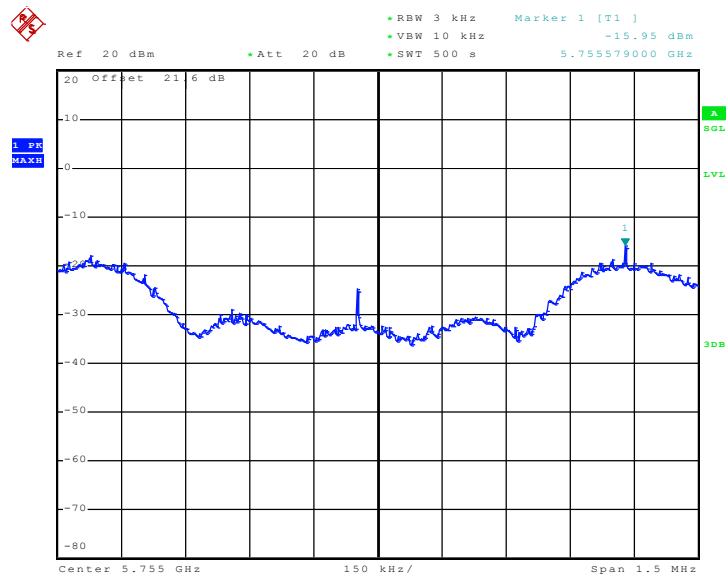


Date: 23.SEP.2010 05:54:12



Mode 27 :


PSD Plot on 802.11n (BW 40MHz) Channel 151 - Chain B

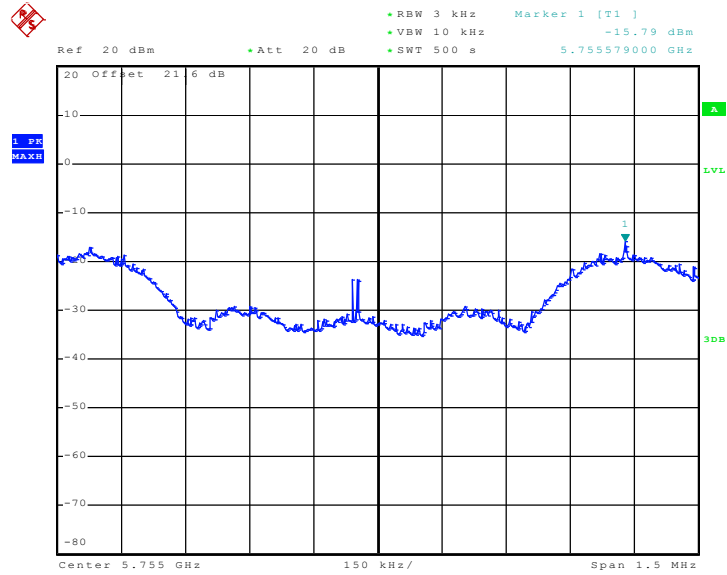

Date: 23.SEP.2010 05:40:33

Mode 28 :

PSD Plot on 802.11n (BW 40MHz) Channel 159 - Chain A

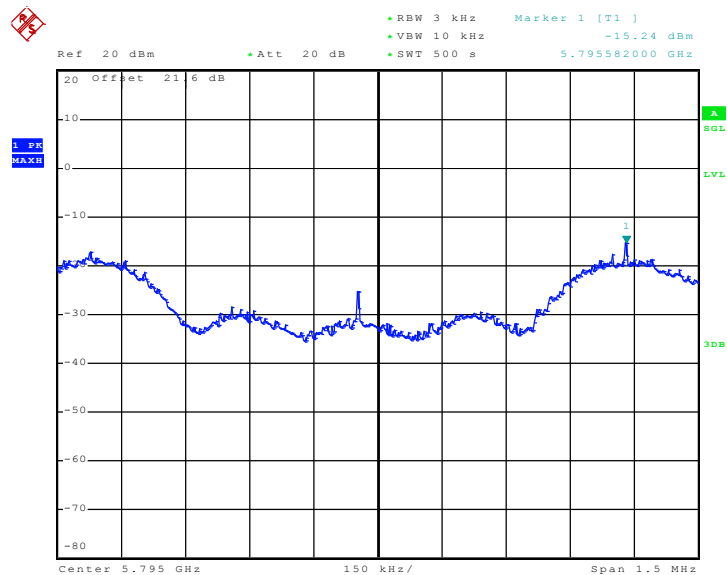


Date: 23.SEP.2010 06:10:57



Mode 28 :


PSD Plot on 802.11n (BW 40MHz) Channel 159 - Chain B

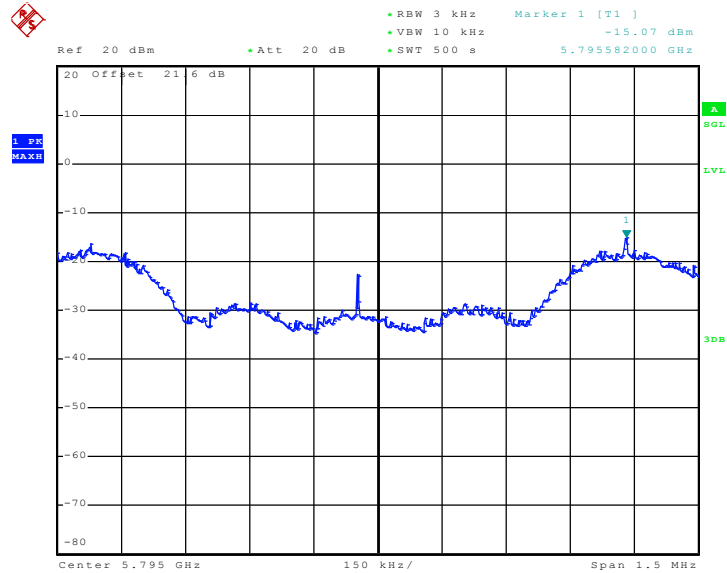

Date: 23.SEP.2010 06:25:19

Mode 29 :

PSD Plot on 802.11b Channel 01 - Chain A

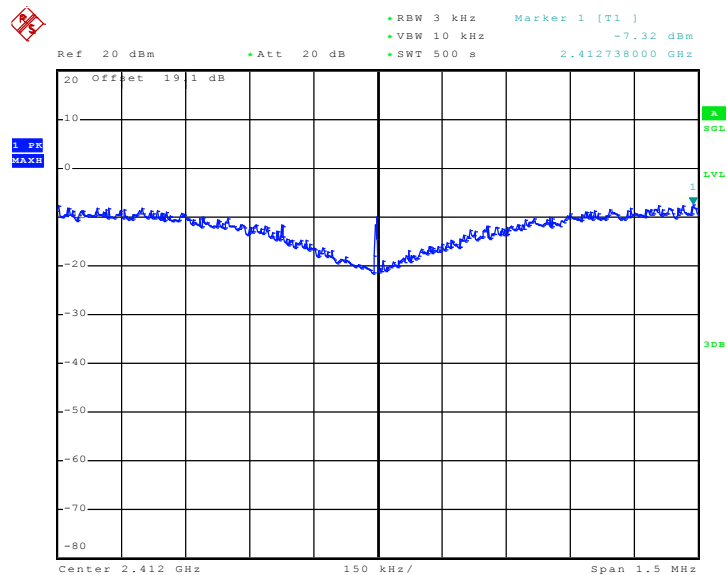


Date: 16.SEP.2010 04:40:25



Mode 30 :


PSD Plot on 802.11b Channel 02 - Chain A

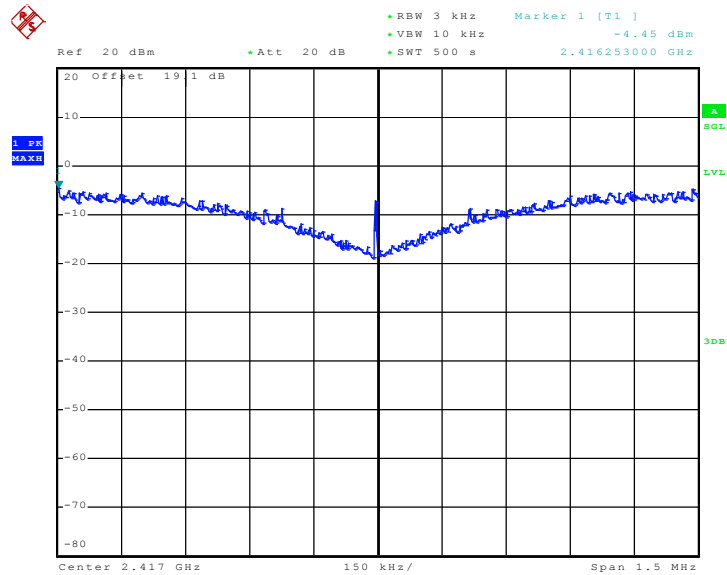

Date: 16.SEP.2010 04:28:40

Mode 31 :

PSD Plot on 802.11b Channel 06 - Chain A

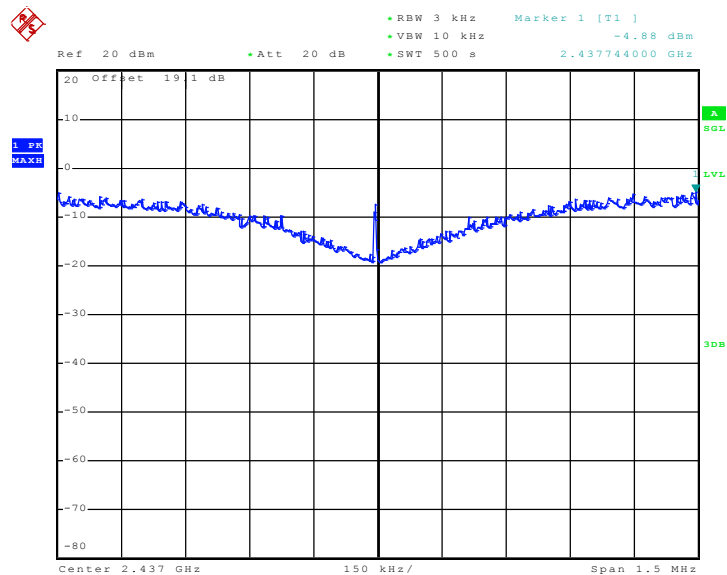


Date: 24.SEP.2010 04:53:02



Mode 32 :


PSD Plot on 802.11b Channel 10 - Chain A

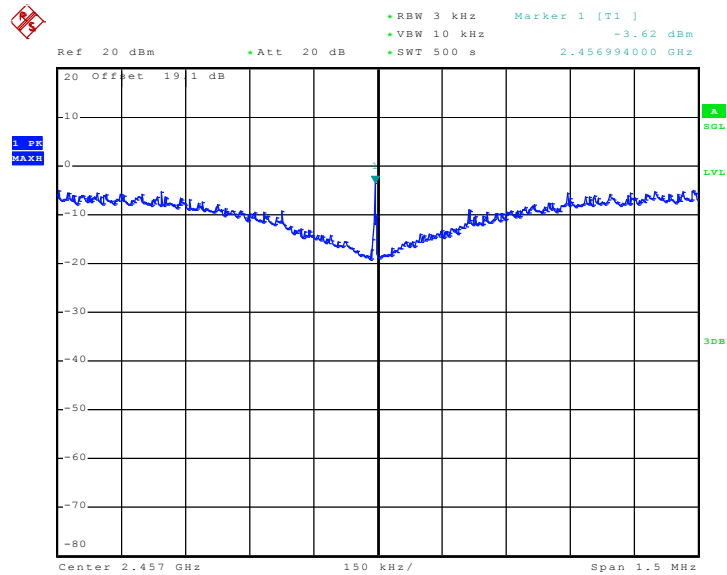

Date: 16.SEP.2010 03:54:02

Mode 33 :

PSD Plot on 802.11b Channel 11 - Chain A

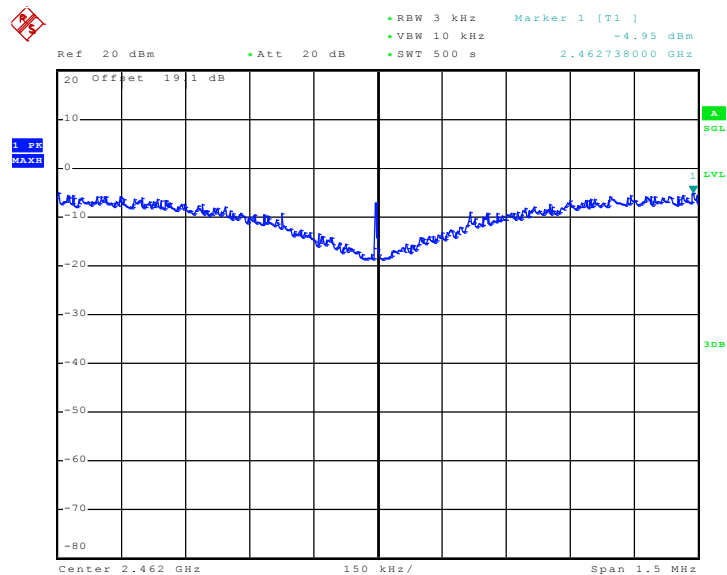


Date: 16.SEP.2010 03:38:34



Mode 34 :


PSD Plot on 802.11g Channel 01 - Chain A

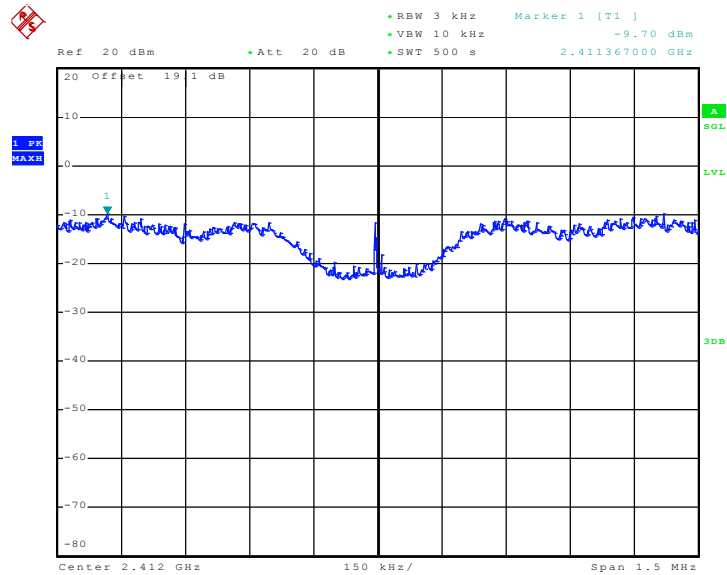

Date: 16.SEP.2010 04:56:08

Mode 35 :

PSD Plot on 802.11g Channel 02 - Chain A

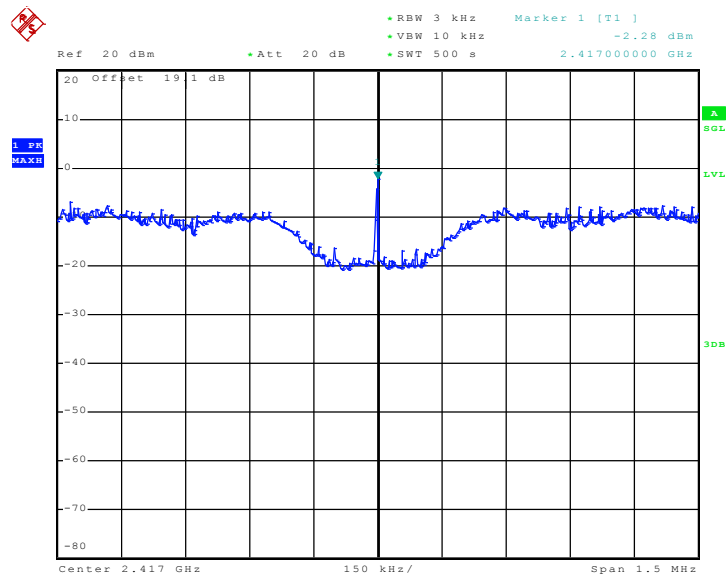


Date: 16.SEP.2010 05:11:18





Mode 36 :


PSD Plot on 802.11g Channel 06 - Chain A

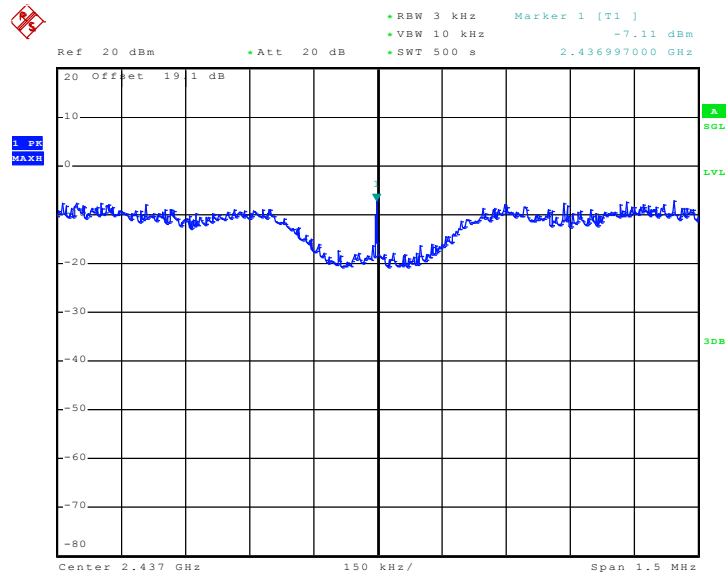

Date: 16.SEP.2010 05:26:22

Mode 37 :

PSD Plot on 802.11g Channel 10 - Chain A

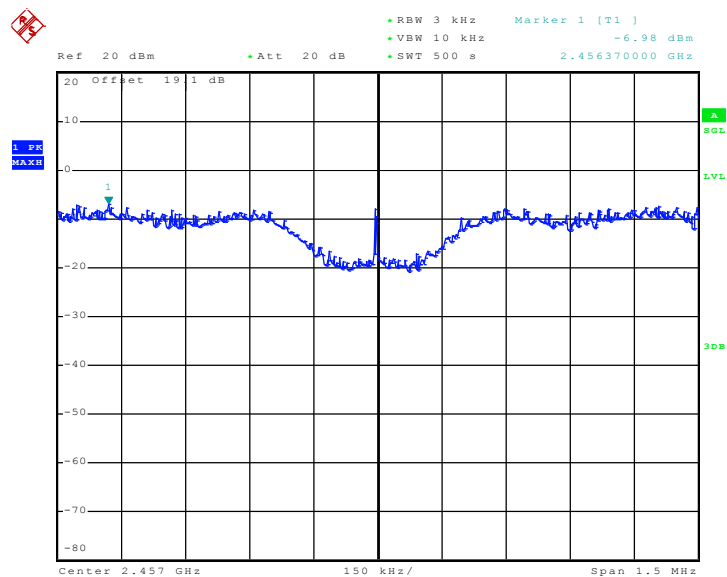


Date: 16.SEP.2010 05:42:13



Mode 38 :


PSD Plot on 802.11g Channel 11 - Chain A

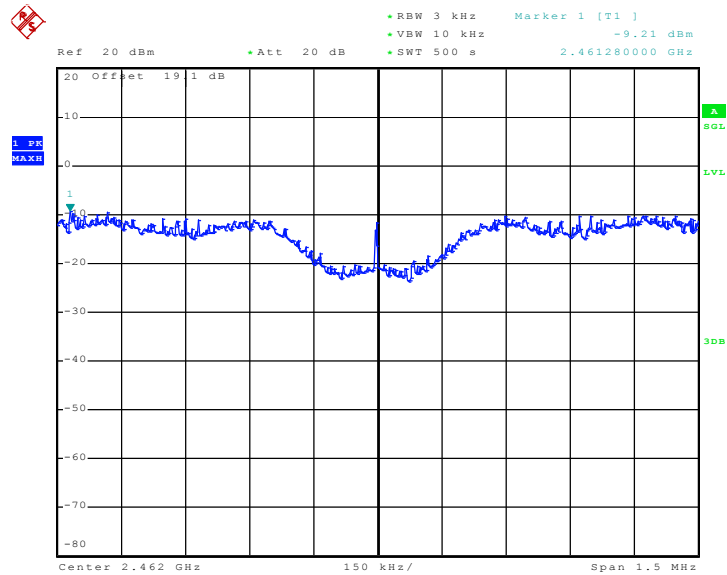

Date: 16.SEP.2010 05:59:47

Mode 39 :

PSD Plot on 802.11n (BW 20MHz) Channel 01 - Chain A

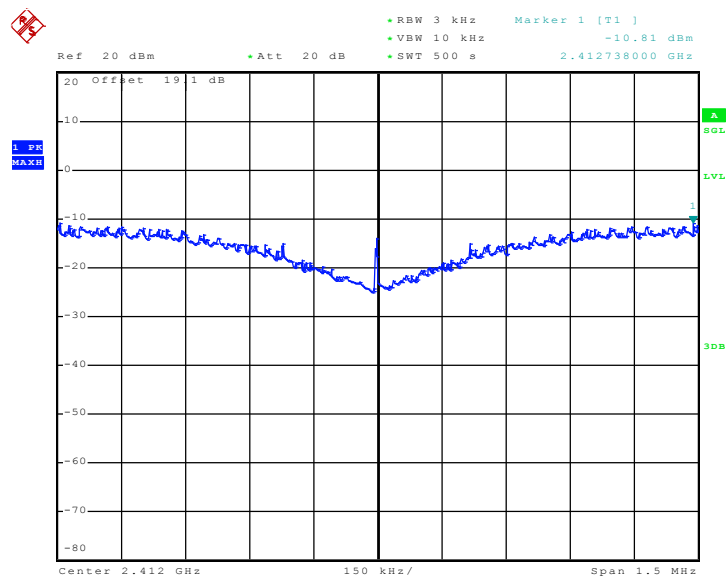


Date: 20.SEP.2010 10:52:51



Mode 39 :


PSD Plot on 802.11n (BW 20MHz) Channel 01 - Chain B

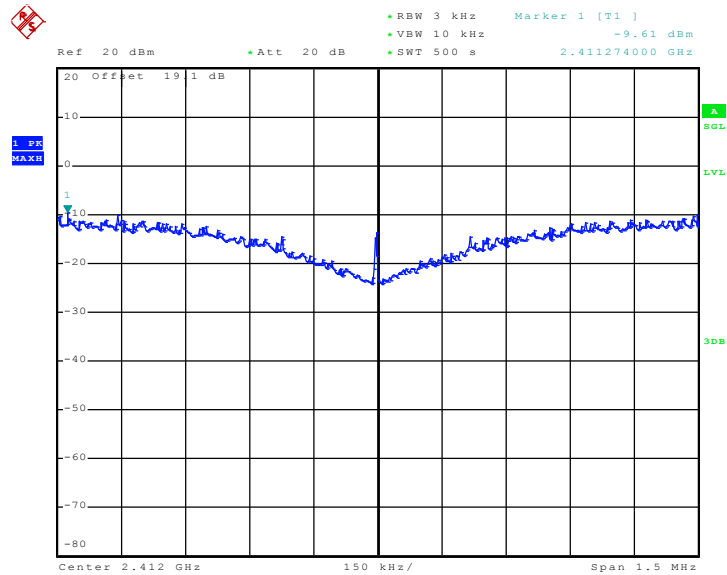

Date: 20.SEP.2010 13:10:09

Mode 40 :

PSD Plot on 802.11n (BW 20MHz) Channel 02 - Chain A

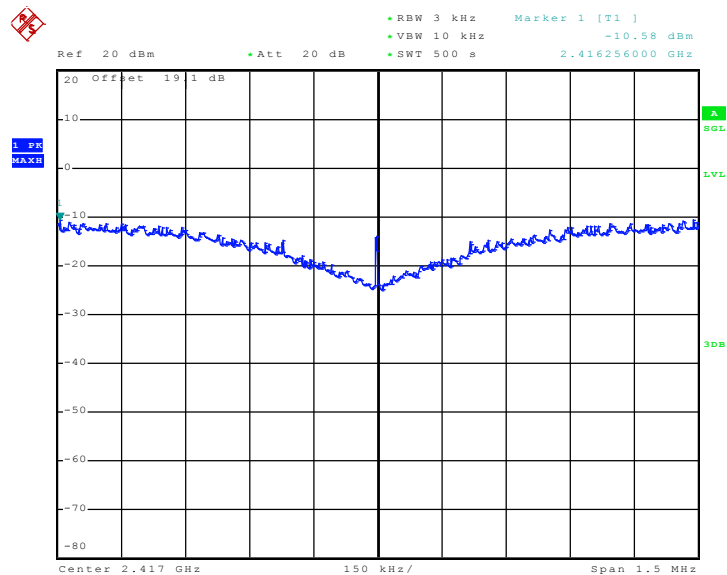


Date: 20.SEP.2010 11:02:02



Mode 40 :


PSD Plot on 802.11n (BW 20MHz) Channel 02 - Chain B

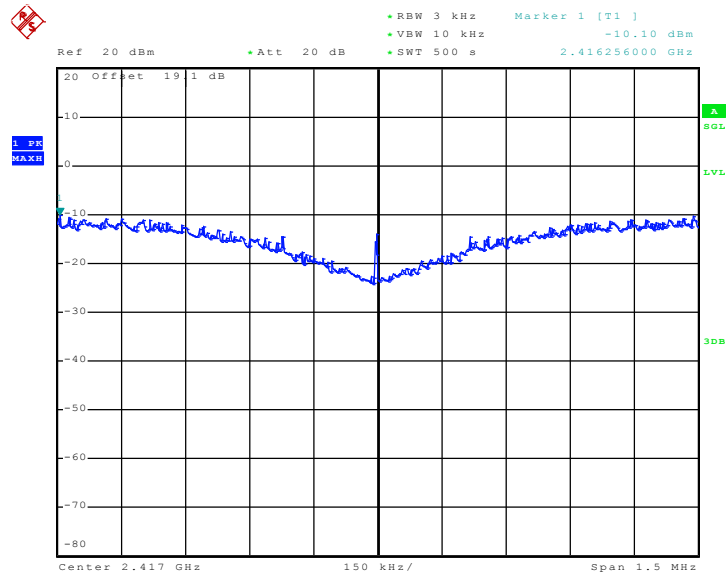

Date: 20.SEP.2010 12:50:14

Mode 41 :

PSD Plot on 802.11n (BW 20MHz) Channel 06 - Chain A

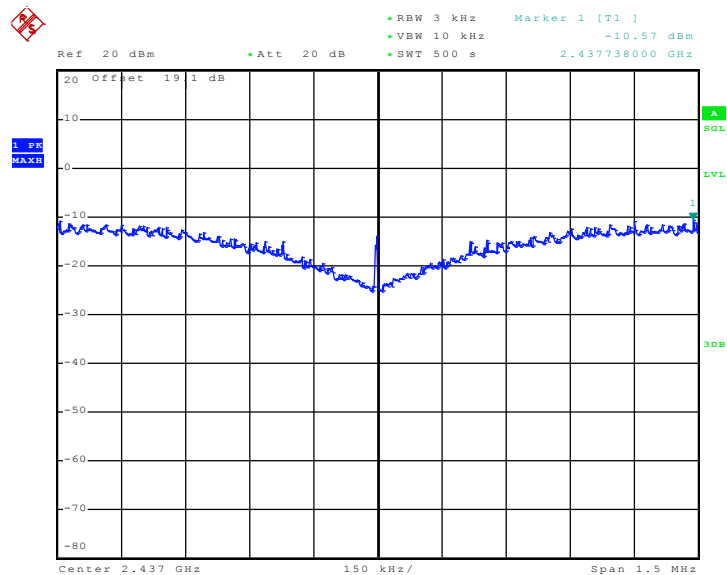


Date: 20.SEP.2010 11:11:02



Mode 41 :


PSD Plot on 802.11n (BW 20MHz) Channel 06 - Chain B

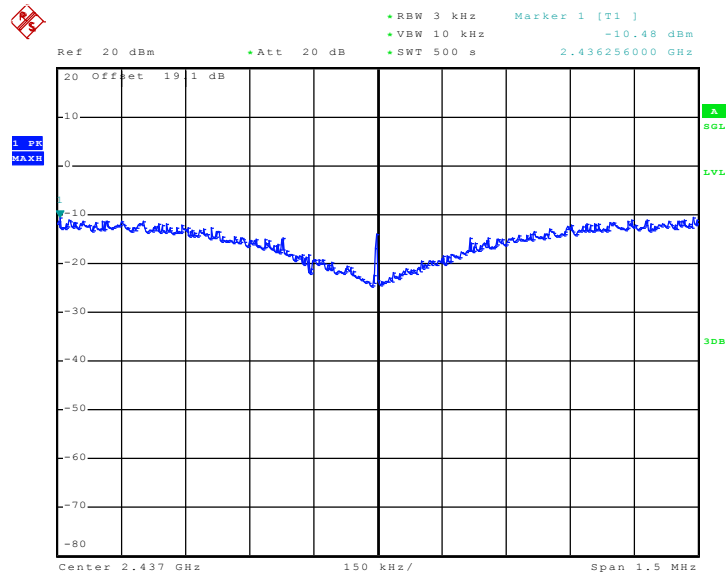

Date: 20.SEP.2010 12:39:45

Mode 42 :

PSD Plot on 802.11n (BW 20MHz) Channel 10 - Chain A

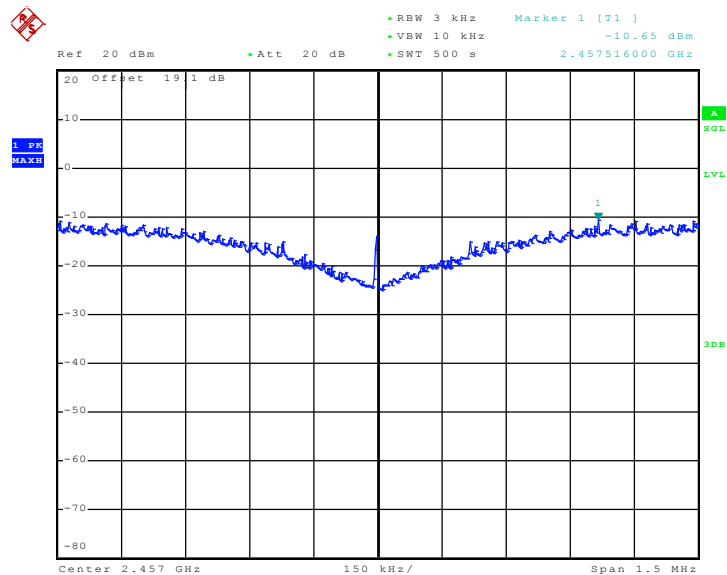


Date: 20.SEP.2010 11:20:12



Mode 42 :


PSD Plot on 802.11n (BW 20MHz) Channel 10 - Chain B

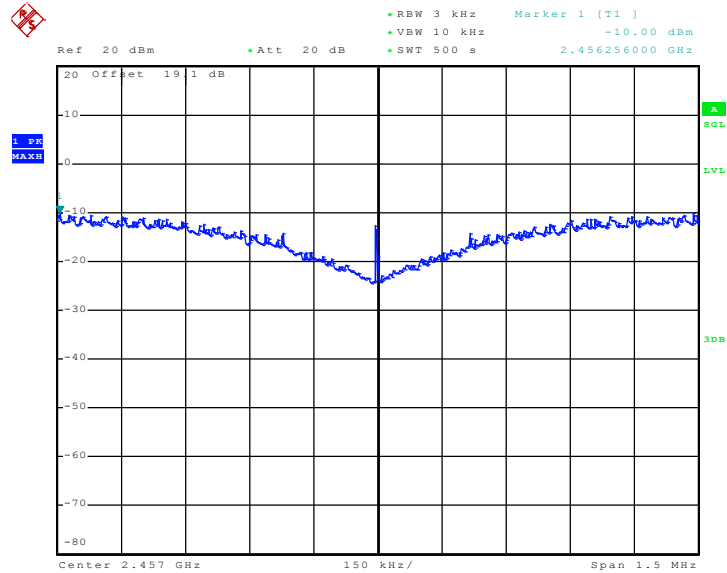

Date: 20.SEP.2010 12:04:13

Mode 43 :

PSD Plot on 802.11n (BW 20MHz) Channel 11 - Chain A

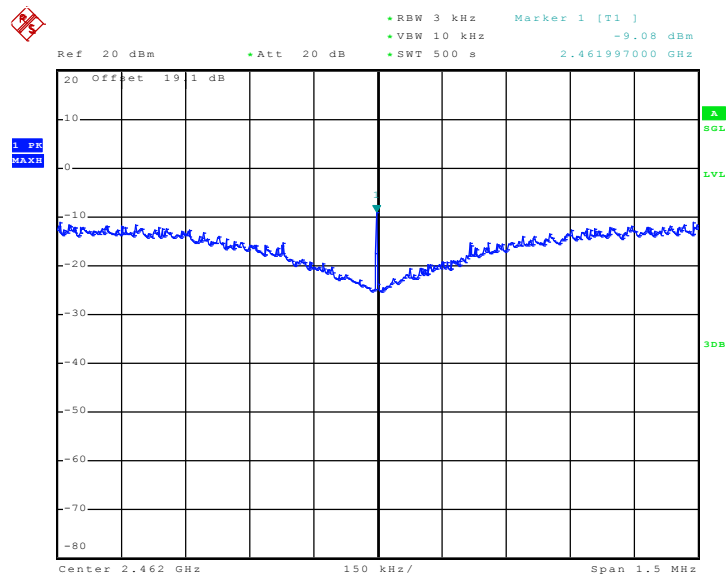


Date: 20.SEP.2010 11:32:28



Mode 43 :


PSD Plot on 802.11n (BW 20MHz) Channel 11 - Chain B

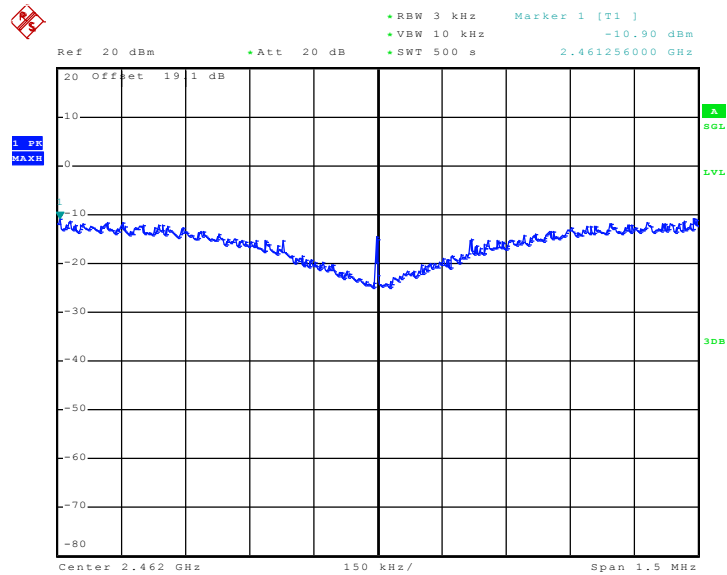

Date: 20.SEP.2010 11:47:08

Mode 44 :

PSD Plot on 802.11n (BW 40MHz) Channel 03 - Chain A

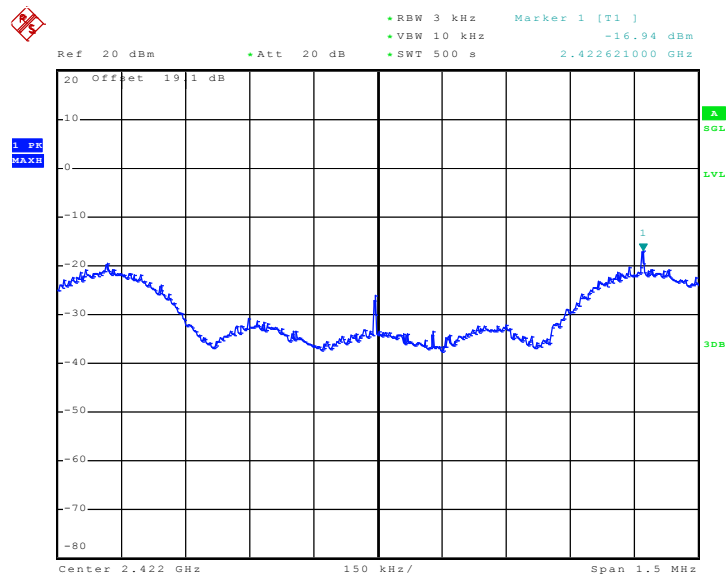


Date: 24.SEP.2010 05:28:26



Mode 44 :


PSD Plot on 802.11n (BW 40MHz) Channel 03 - Chain B

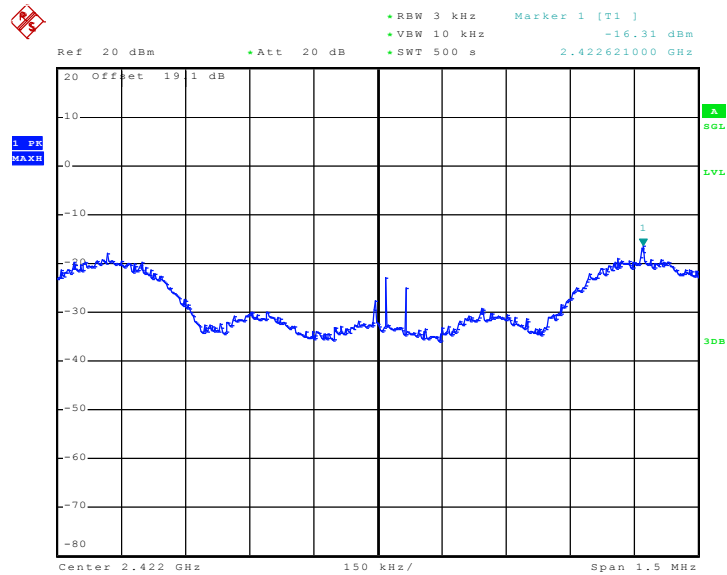

Date: 24.SEP.2010 05:42:17

Mode 45 :

PSD Plot on 802.11n (BW 40MHz) Channel 04 - Chain A

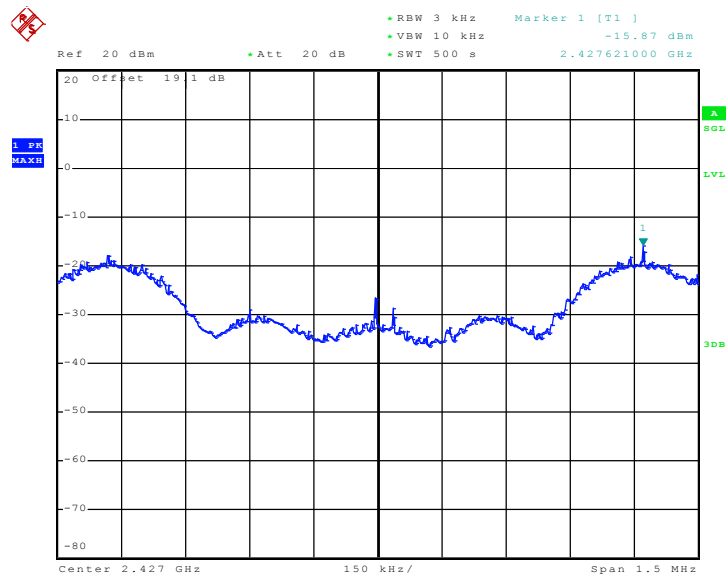


Date: 24.SEP.2010 06:26:27





Mode 45 :


PSD Plot on 802.11n (BW 40MHz) Channel 04 - Chain B

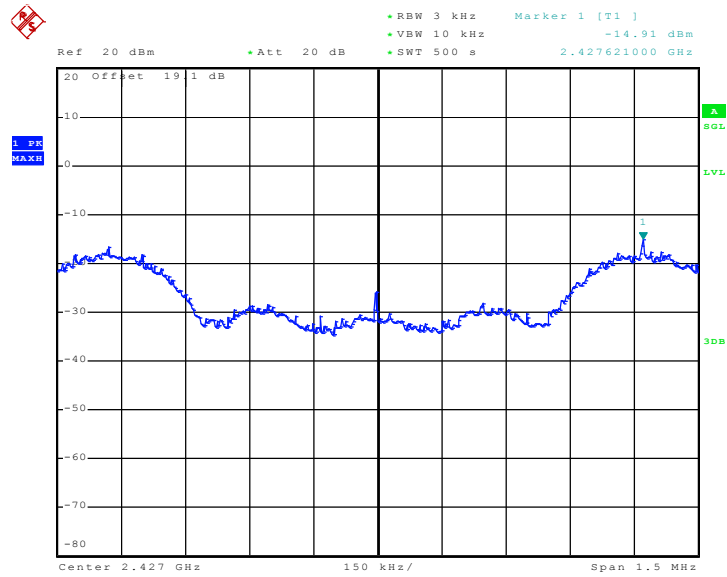

Date: 24.SEP.2010 06:42:14

Mode 46 :

PSD Plot on 802.11n (BW 40MHz) Channel 06 - Chain A

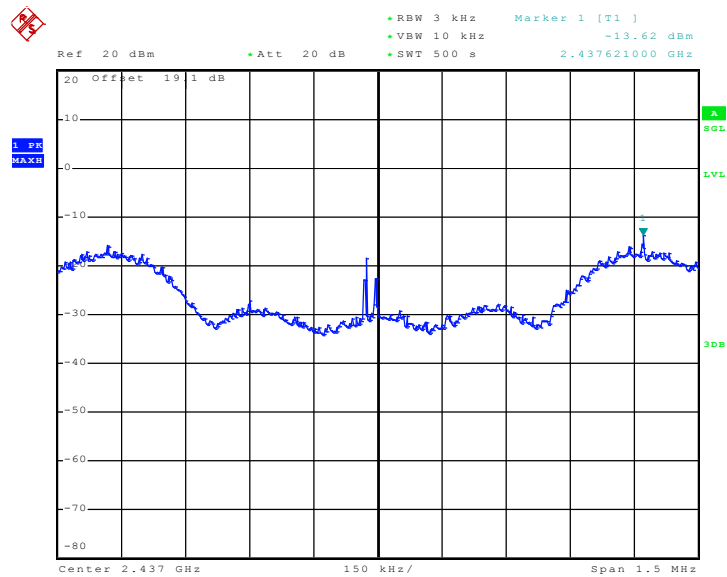


Date: 24.SEP.2010 07:13:16



Mode 46 :


PSD Plot on 802.11n (BW 40MHz) Channel 06 - Chain B

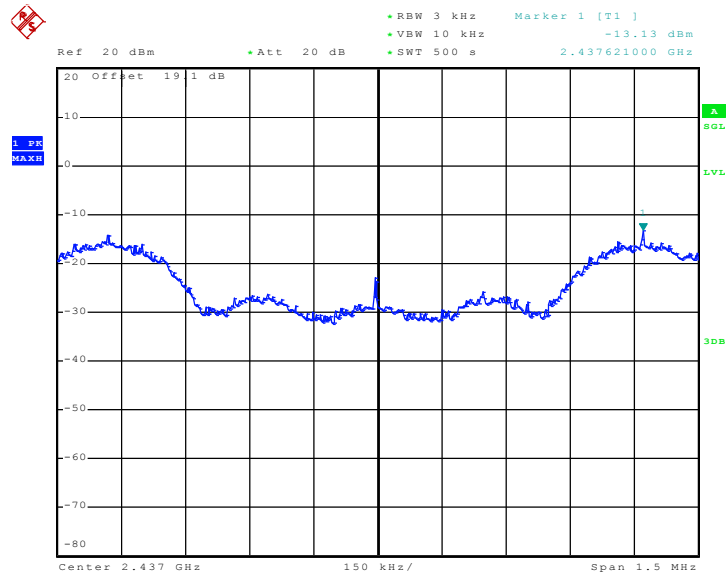

Date: 24.SEP.2010 06:57:11

Mode 47 :

PSD Plot on 802.11n (BW 40MHz) Channel 08 - Chain A

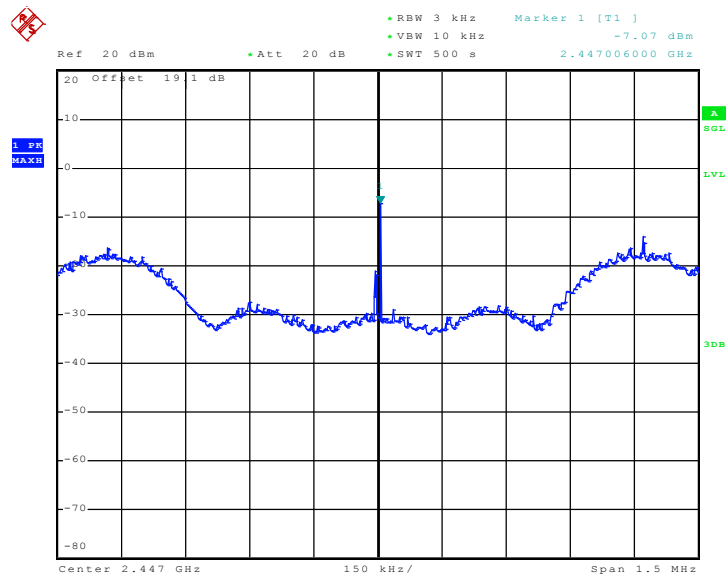


Date: 24.SEP.2010 07:27:15



Mode 47 :


PSD Plot on 802.11n (BW 40MHz) Channel 08 - Chain B

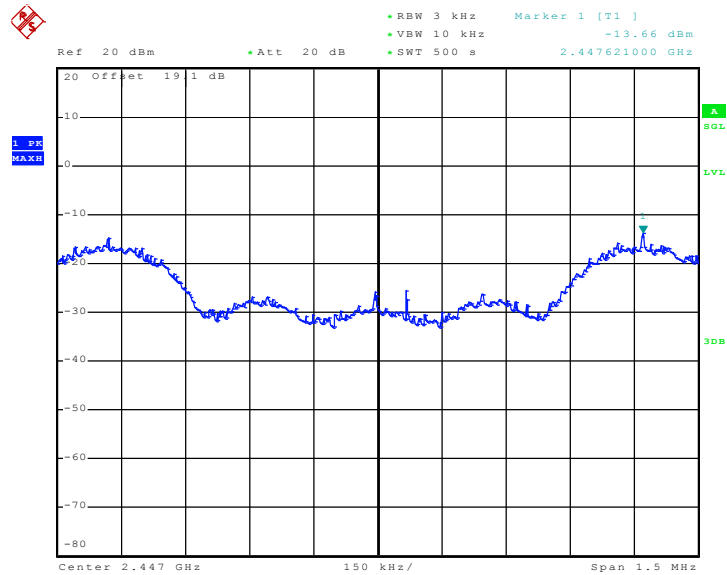

Date: 24.SEP.2010 07:43:19

Mode 48 :

PSD Plot on 802.11n (BW 40MHz) Channel 09 - Chain A

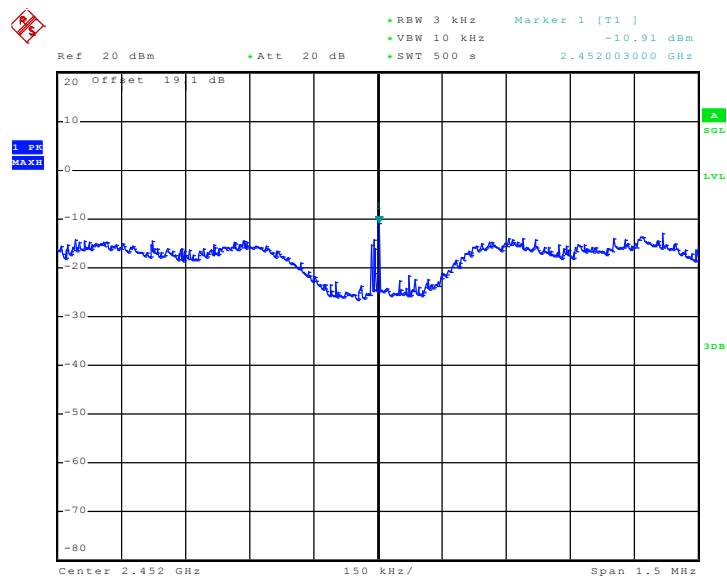


Date: 28.SEP.2010 05:18:39



Mode 48 :


PSD Plot on 802.11n (BW 40MHz) Channel 09 - Chain B

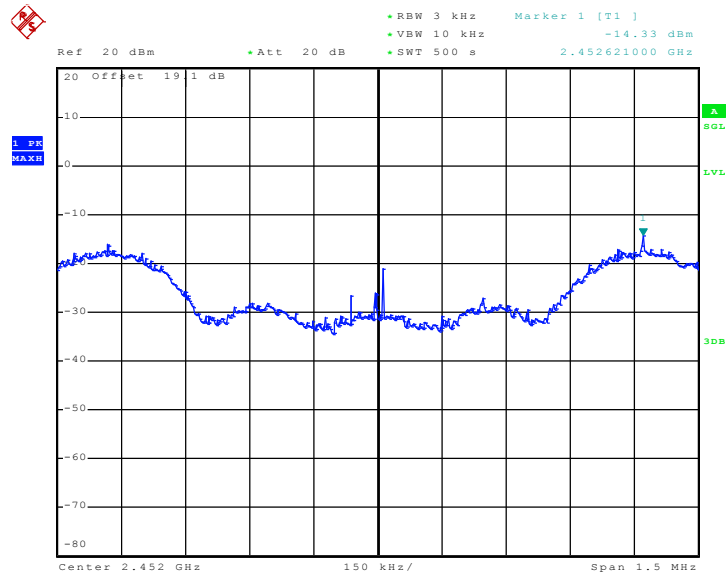

Date: 24.SEP.2010 07:58:02

Mode 49:

PSD Plot on 802.11a Channel 149 - Chain A

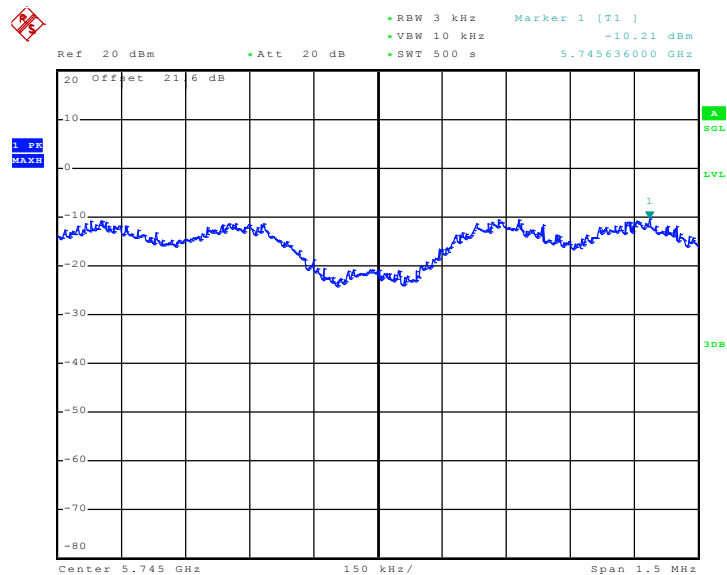


Date: 20.SEP.2010 14:21:51



Mode 50:


PSD Plot on 802.11a Channel 157 - Chain A

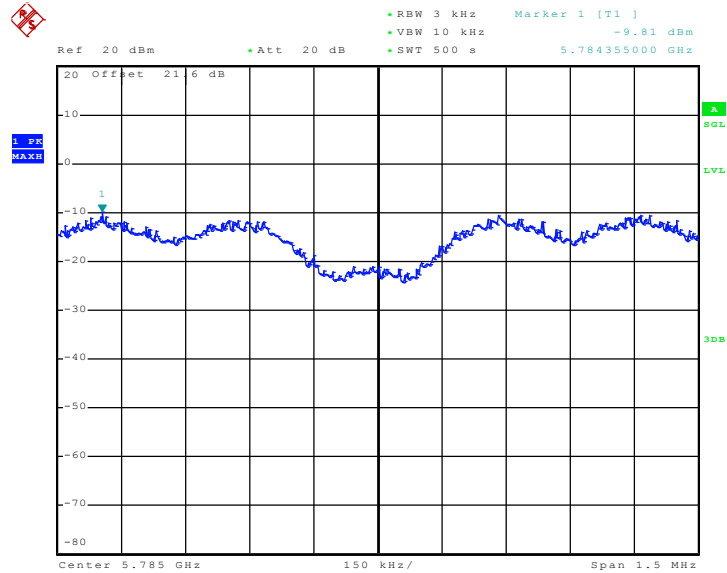

Date: 20.SEP.2010 14:37:58

Mode 51:

PSD Plot on 802.11a Channel 165 - Chain A

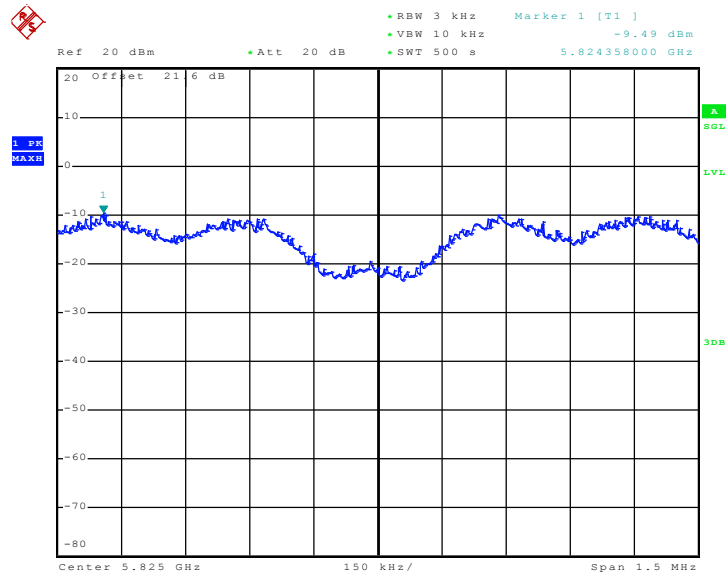


Date: 20.SEP.2010 14:53:58



Mode 52 :


PSD Plot on 802.11n (BW 20MHz) Channel 149 - Chain A

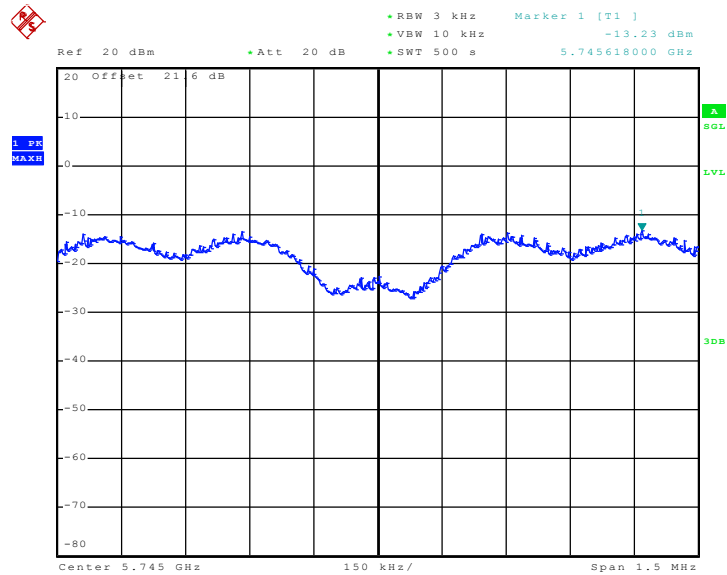

Date: 27.SEP.2010 22:34:46

Mode 52 :

PSD Plot on 802.11n (BW 20MHz) Channel 149 - Chain B

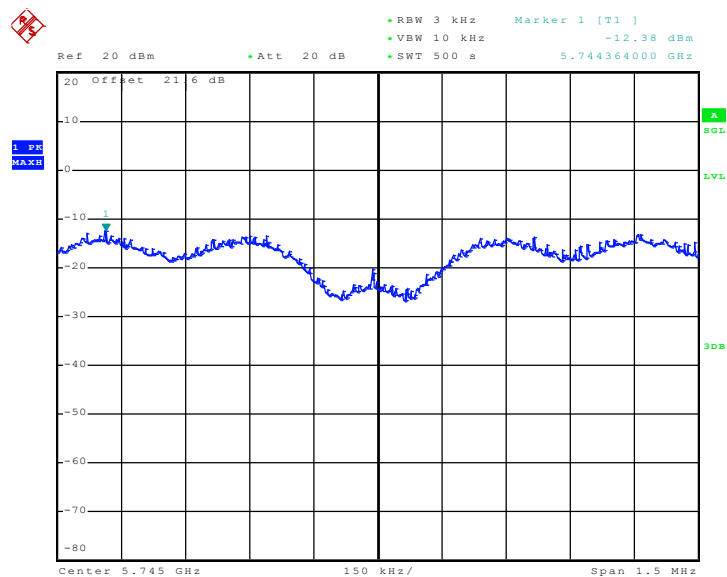


Date: 27.SEP.2010 22:19:10



Mode 53 :


PSD Plot on 802.11n (BW 20MHz) Channel 157 - Chain A

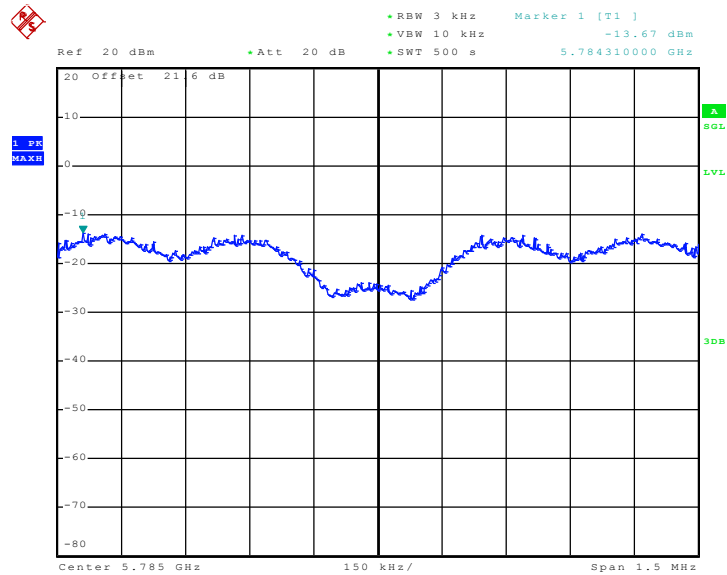

Date: 27.SEP.2010 22:51:46

Mode 53 :

PSD Plot on 802.11n (BW 20MHz) Channel 157 - Chain B

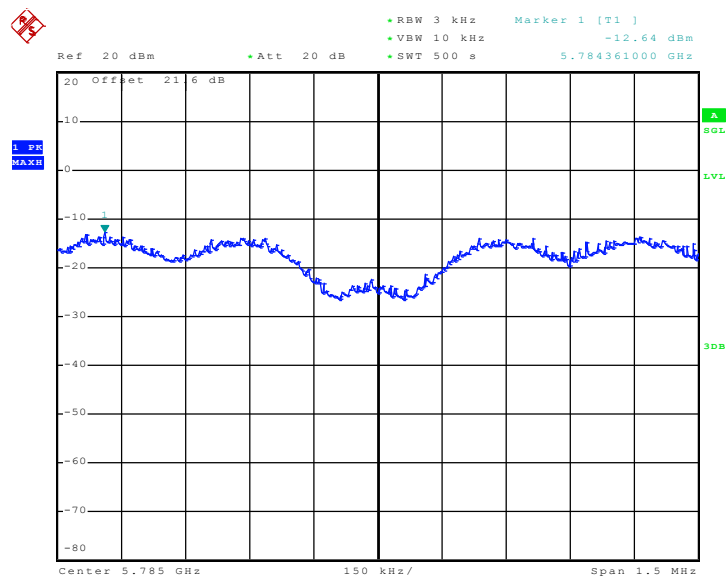


Date: 27.SEP.2010 22:03:54



Mode 54 :


PSD Plot on 802.11n (BW 20MHz) Channel 165 - Chain A

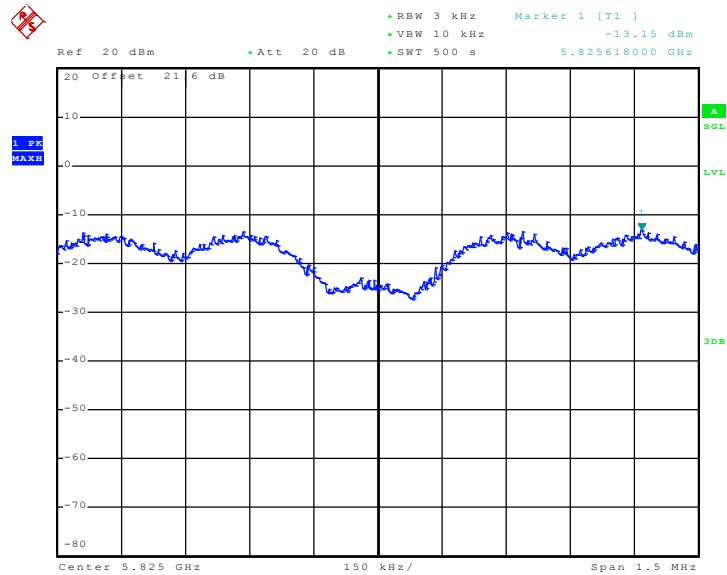

Date: 27.SEP.2010 23:05:49

Mode 54 :

PSD Plot on 802.11n (BW 20MHz) Channel 165 - Chain B

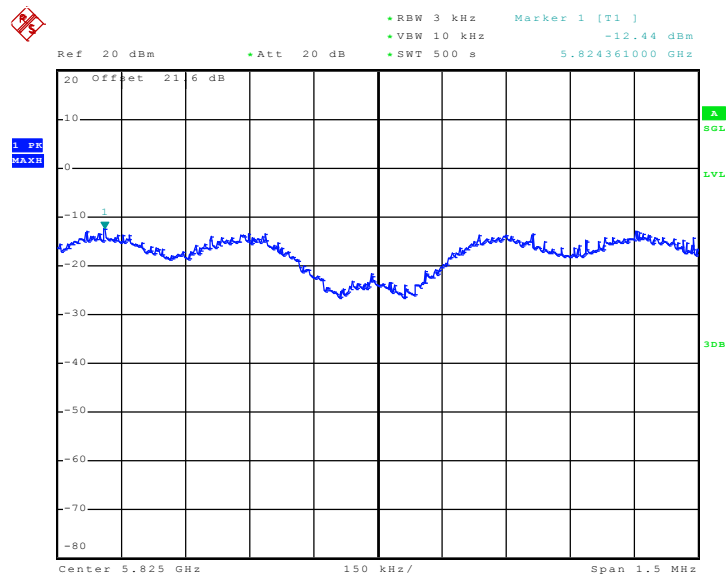


Date: 27.SEP.2010 21:50:27





Mode 55 :


PSD Plot on 802.11n (BW 40MHz) Channel 151 - Chain A

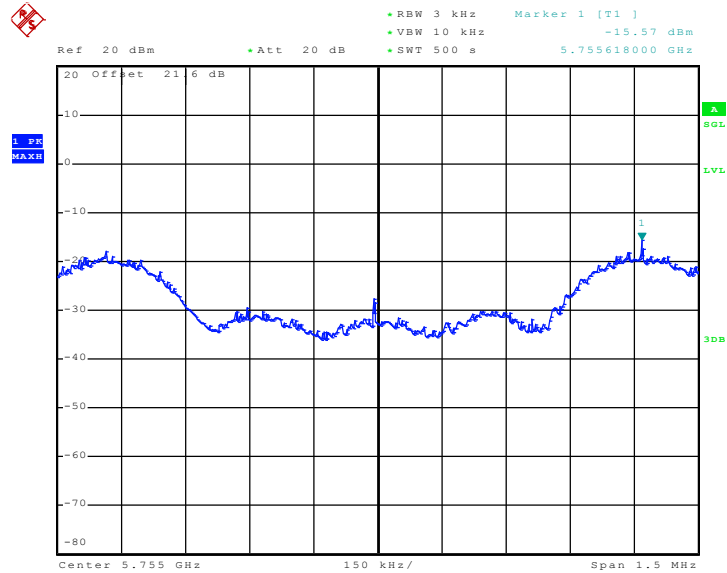

Date: 27.SEP.2010 23:22:23

Mode 55 :

PSD Plot on 802.11n (BW 40MHz) Channel 151 - Chain B

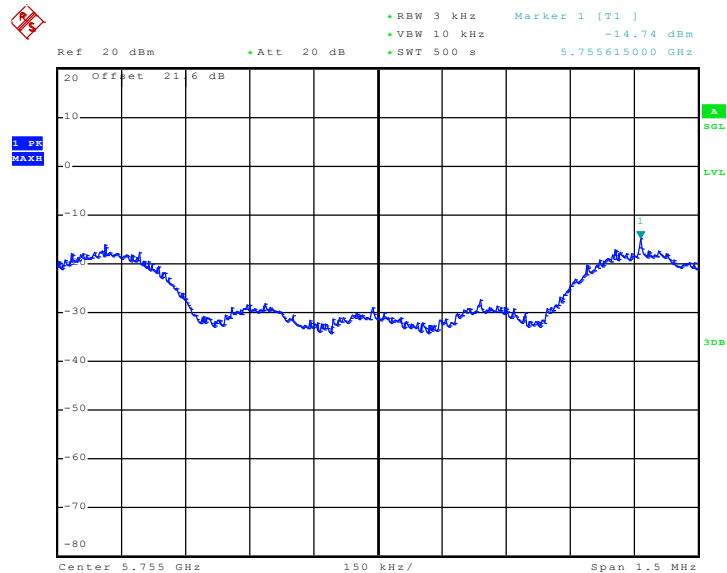


Date: 28.SEP.2010 00:07:51



Mode 56 :


PSD Plot on 802.11n (BW 40MHz) Channel 159 - Chain A

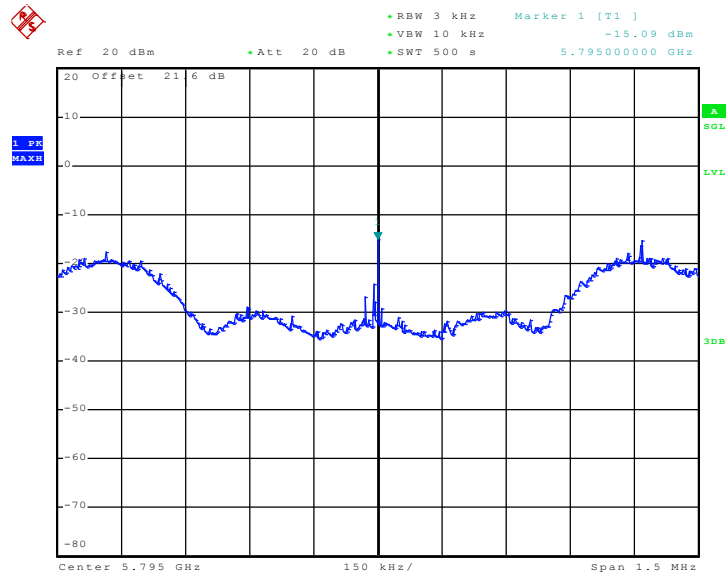

Date: 27.SEP.2010 23:36:43

Mode 56 :

PSD Plot on 802.11n (BW 40MHz) Channel 159 - Chain B

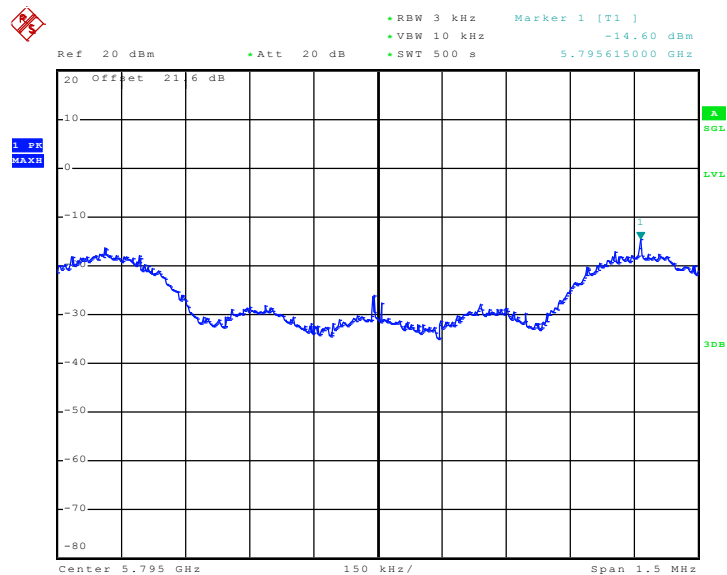

Date: 27.SEP.2010 23:52:51

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures

4. The testing follows the guidelines in ANSI C63.4-2003.
5. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
6. Connect EUT to the power mains through a line impedance stabilization network (LISN).
7. All the support units are connecting to the other LISN.
8. The LISN provides 50 ohm coupling impedance for the measuring instrument.
9. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
10. Both sides of AC line were checked for maximum conducted interference.
11. The frequency range from 150 kHz to 30 MHz was searched.
12. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

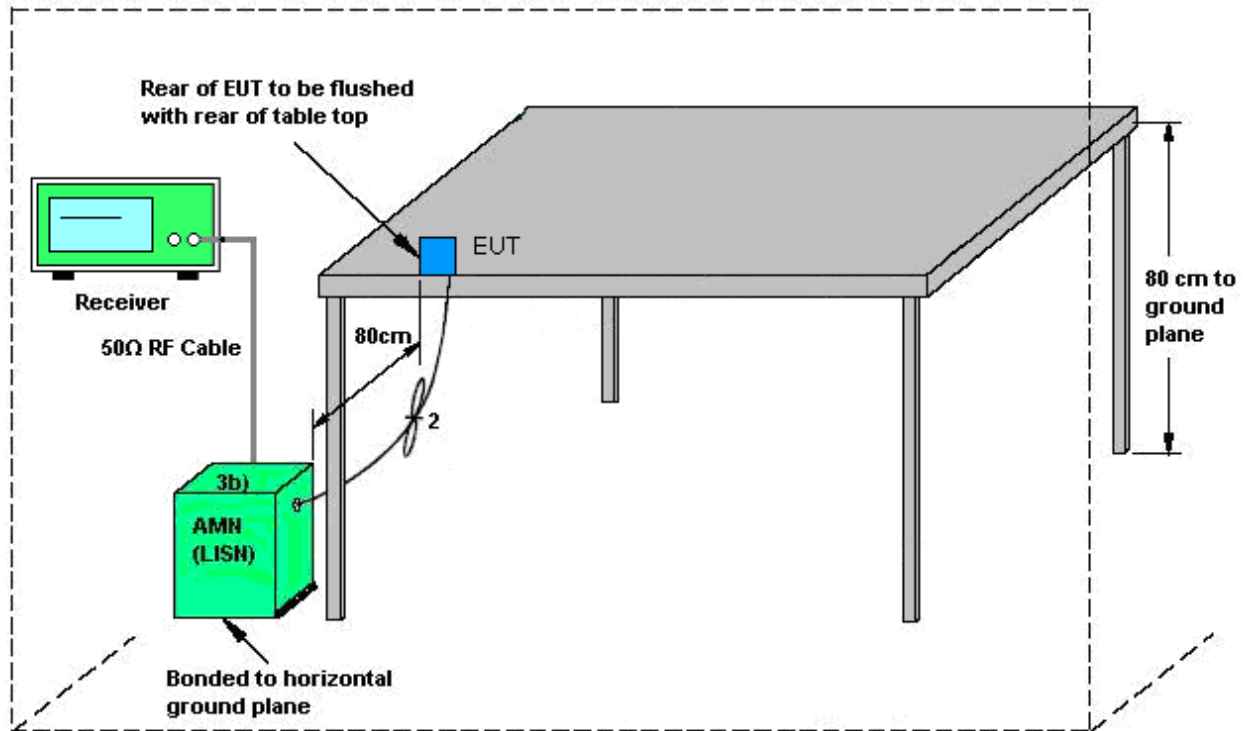


AMN = Artificial mains network (LISN)  
 AE = Associated equipment  
 EUT = Equipment under test  
 ISN = Impedance stabilization network



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	25°C
Test Engineer :	Novic Jiang	Relative Humidity :	63%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN 1 (5G) Link + WLAN 2 (5G) Link + POE		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

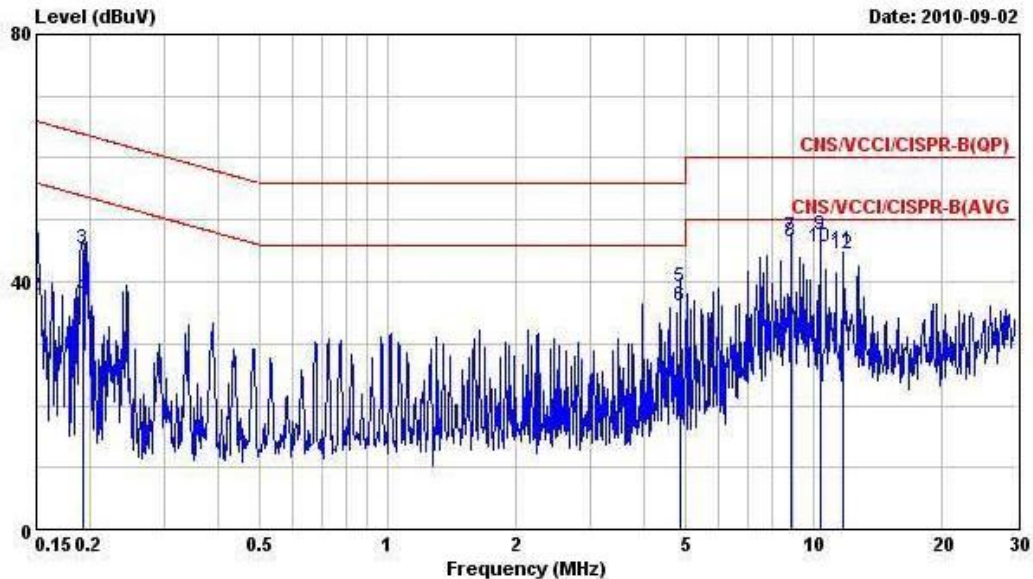


Site : LK\_CO01  
 Condition : LISN\_98087\_20091008 LINE  
 Project : FR082617  
 Mode : Mode 1  
 Temp : 25 C  
 Humidity : 63 %

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	46.45	-19.55	66.00	46.24	0.17	0.04	QP
2	0.150	37.69	-18.31	56.00	37.48	0.17	0.04	Average
3	0.193	45.45	-18.46	63.91	45.28	0.16	0.01	QP
4	0.193	37.34	-16.57	53.91	37.17	0.16	0.01	Average
5	4.897	39.14	-16.86	56.00	38.65	0.30	0.19	QP
6	4.897	36.09	-9.91	46.00	35.60	0.30	0.19	Average
7	8.873	47.22	-12.78	60.00	46.51	0.46	0.25	QP
8	8.873	46.43	-3.57	50.00	45.72	0.46	0.25	Average
9	10.401	47.48	-12.52	60.00	46.70	0.52	0.26	QP
10	10.401	45.53	-4.47	50.00	44.75	0.52	0.26	Average
11	11.780	45.02	-14.98	60.00	44.16	0.58	0.28	QP
12	11.780	44.41	-5.59	50.00	43.55	0.58	0.28	Average



Test Mode :	Mode 1	Temperature :	25°C
Test Engineer :	Novic Jiang	Relative Humidity :	63%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN 1 (5G) Link + WLAN 2 (5G) Link + POE		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

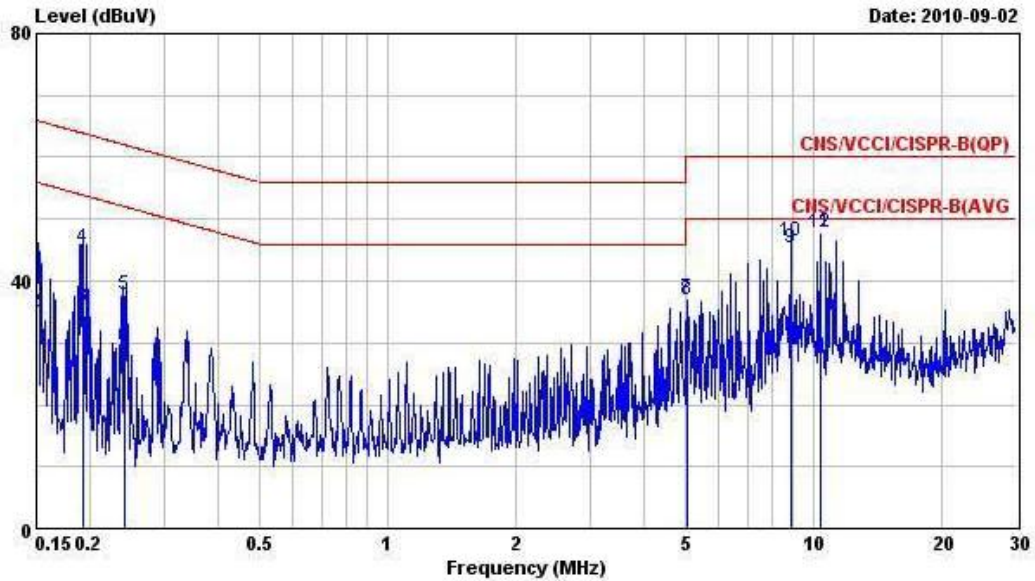

Site : LK\_C001  
 Condition : LISN\_98087\_20091008 NEUTRAL  
 Project : FR082617  
 Mode : Mode 1  
 Temp : 25 C  
 Humidity : 63 %

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	43.73	-22.27	66.00	43.46	0.23	0.04	QP
2	0.150	34.87	-21.13	56.00	34.60	0.23	0.04	Average
3	0.193	35.91	-18.00	53.91	35.68	0.22	0.01	Average
4	0.193	45.24	-18.67	63.91	45.01	0.22	0.01	QP
5	0.241	37.84	-24.21	62.05	37.60	0.22	0.02	QP
6	0.241	29.29	-22.76	52.05	29.05	0.22	0.02	Average
7	5.048	37.12	-22.88	60.00	36.58	0.35	0.19	QP
8	5.048	36.97	-13.03	50.00	36.43	0.35	0.19	Average
9	8.870	45.36	-4.64	50.00	44.63	0.48	0.25	Average
10	8.870	46.44	-13.56	60.00	45.71	0.48	0.25	QP
11	10.400	47.78	-12.22	60.00	46.98	0.54	0.26	QP
12	10.402	47.69	-2.31	50.00	46.89	0.54	0.26	Average

### 3.7 Radiated Emission Measurement

#### 3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
  - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
 Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.7.4 Test Setup

For radiated emissions below 30MHz

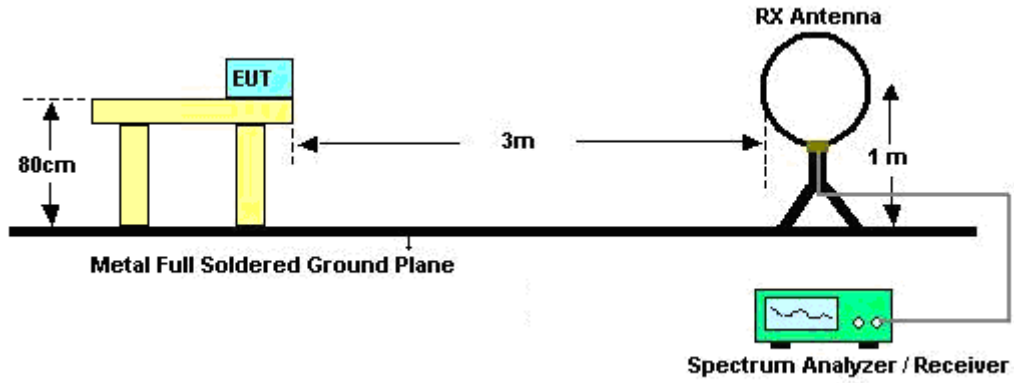

For radiated emissions above 30MHz

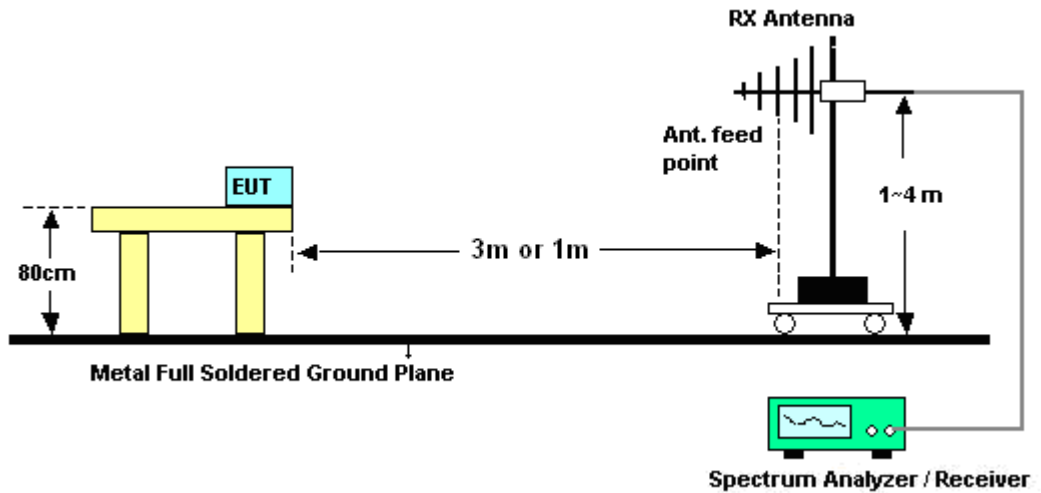





3.7.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

Test Engineer :	David Yang	Temperature :	25~26°C	
		Relative Humidity :	45~46%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.7.6 Test Result of Radiated Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.74	36.36	-3.64	40	57.26	9.94	0.67	31.51	-	-	Peak
191.73	38.41	-5.09	43.5	59.72	8.9	1.29	31.5	-	-	Peak
250.05	42.68	-3.32	46	59.79	12.77	1.53	31.41	120	344	Peak
323.8	39.23	-6.77	46	54.62	14.1	1.83	31.32	-	-	Peak
500.2	34.17	-11.83	46	44.61	18.18	2.45	31.07	-	-	Peak
875.4	37.09	-8.91	46	41.54	22.95	3.31	30.71	-	-	Peak
2389.61	53.76	-20.24	74	49.08	32.18	6.03	33.53	100	231	Peak
2389.61	41.89	-12.11	54	37.21	32.18	6.03	33.53	100	231	Average
2412	107.8	-	-	103.07	32.2	6.07	33.54	100	231	Peak
2412	103.43	-	-	98.7	32.2	6.07	33.54	100	231	Average
2494	39.54	-14.46	54	34.63	32.3	6.18	33.57	100	231	Average
2494	49.46	-24.54	74	44.55	32.3	6.18	33.57	100	231	Peak
8301	54.13	-19.87	74	41.74	35.56	10.93	34.1	131	345	Peak
8301	42.25	-11.75	54	29.86	35.56	10.93	34.1	131	345	Average
9645	45.37	-42.43	87.8	78.05	-10.32	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.88	-3.12	40	49.39	18.4	0.55	31.46	100	358	Peak
95.61	39.7	-3.8	43.5	60.49	9.76	0.98	31.53	-	-	Peak
191.73	36.62	-6.88	43.5	57.93	8.9	1.29	31.5	-	-	Peak
374.2	33.67	-12.33	46	47.39	15.44	2.09	31.25	-	-	Peak
500.2	36.31	-9.69	46	46.75	18.18	2.45	31.07	-	-	Peak
750.1	38.15	-7.85	46	44.27	21.52	3.06	30.7	-	-	Peak
2389.99	56.97	-17.03	74	52.29	32.18	6.03	33.53	100	347	Peak
2389.99	45.79	-8.21	54	41.11	32.18	6.03	33.53	100	347	Average
2412	108.78	-	-	104.05	32.2	6.07	33.54	100	347	Peak
2412	104.3	-	-	99.57	32.2	6.07	33.54	100	347	Average
2500	41.69	-12.31	54	36.78	32.3	6.18	33.57	100	347	Average
2500	49.02	-24.98	74	44.11	32.3	6.18	33.57	100	347	Peak
4824	52.82	-21.18	74	43.66	34.07	9.12	34.03	144	344	Peak
4824	47.26	-6.74	54	38.1	34.07	9.12	34.03	144	344	Average
8394	53.9	-20.1	74	41.45	35.58	10.96	34.09	109	115	Peak
8394	41.78	-12.22	54	29.33	35.58	10.96	34.09	109	115	Average
9648	52.4	-36.38	88.78	85.08	-10.32	11.99	34.35	100	0	Peak



Test Mode :	Mode 2	Temperature :	25~26°C
Test Channel :	02	Relative Humidity :	45~46%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.16	-3.84	40	48.67	18.4	0.55	31.46	-	-	Peak
46.74	36.52	-3.48	40	57.42	9.94	0.67	31.51	116	267	Peak
250.05	42.09	-3.91	46	59.2	12.77	1.53	31.41	-	-	Peak
310.5	38.87	-7.13	46	54.66	13.74	1.79	31.32	-	-	Peak
500.2	33.97	-12.03	46	44.41	18.18	2.45	31.07	-	-	Peak
800.5	33.96	-12.04	46	39.28	22.22	3.14	30.68	-	-	Peak
2381.06	56.31	-17.69	74	51.65	32.16	6.03	33.53	100	230	Peak
2381.06	43.05	-10.95	54	38.39	32.16	6.03	33.53	100	230	Average
2417	109.48	-	-	104.75	32.2	6.07	33.54	100	230	Peak
2417	105.02	-	-	100.29	32.2	6.07	33.54	100	230	Average
2500	39.72	-14.28	54	34.81	32.3	6.18	33.57	100	230	Average
2500	48.71	-25.29	74	43.8	32.3	6.18	33.57	100	230	Peak
8286	53.1	-20.9	74	40.71	35.56	10.93	34.1	141	235	Peak
8286	42.16	-11.84	54	29.77	35.56	10.93	34.1	141	235	Average
9668	47.69	-41.79	89.48	80.32	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.38	-3.62	40	48.35	18.95	0.54	31.46	106	356	Peak
87.78	36.03	-3.97	40	58.01	8.62	0.93	31.53	-	-	Peak
95.61	40.96	-2.54	43.5	61.75	9.76	0.98	31.53	-	-	Peak
374.2	33.24	-12.76	46	46.96	15.44	2.09	31.25	-	-	Peak
663.3	37.42	-8.58	46	44.85	20.56	2.87	30.86	-	-	Peak
750.1	37.05	-8.95	46	43.17	21.52	3.06	30.7	-	-	Peak
2384.29	56.9	-17.1	74	52.24	32.16	6.03	33.53	100	345	Peak
2384.29	45.3	-8.7	54	40.64	32.16	6.03	33.53	100	345	Average
2417	110.3	-	-	105.56	32.22	6.07	33.55	100	345	Peak
2417	105.92	-	-	101.19	32.2	6.07	33.54	100	345	Average
2500	40.86	-13.14	54	35.95	32.3	6.18	33.57	100	345	Average
2500	48.94	-25.06	74	44.03	32.3	6.18	33.57	100	345	Peak
4834	54.28	-19.72	74	45.12	34.07	9.12	34.03	126	347	Peak
4834	50.77	-3.23	54	41.61	34.07	9.12	34.03	126	347	Average
7251	54.73	-19.27	74	43.28	35.51	10.03	34.09	100	7	Peak
7251	48.28	-5.72	54	36.86	35.49	10.03	34.1	100	7	Average
9668	56.36	-33.94	90.3	88.99	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	36.72	-3.28	40	49.79	17.84	0.56	31.47	-	-	Peak
191.73	39.72	-3.78	43.5	61.03	8.9	1.29	31.5	-	-	Peak
250.05	42.8	-3.2	46	59.91	12.77	1.53	31.41	127	283	Peak
310.5	38.94	-7.06	46	54.73	13.74	1.79	31.32	-	-	Peak
666.1	32.53	-13.47	46	39.93	20.58	2.87	30.85	-	-	Peak
788.6	34	-12	46	39.5	22.06	3.12	30.68	-	-	Peak
2356	54.75	-19.25	74	50.19	32.13	5.95	33.52	125	233	Peak
2356	45.23	-8.77	54	40.67	32.13	5.95	33.52	125	233	Average
2437	102.8	-	-	98	32.24	6.11	33.55	125	233	Average
2437	107.25	-	-	102.45	32.24	6.11	33.55	125	233	Peak
2492	48.54	-25.46	74	43.63	32.3	6.18	33.57	125	233	Peak
2492	38.67	-15.33	54	33.76	32.3	6.18	33.57	125	233	Average
7311	54.26	-19.74	74	42.85	35.45	10.06	34.1	144	44	Peak
7311	43.85	-10.15	54	32.44	35.45	10.06	34.1	144	44	Average
9748	45.73	-41.52	87.25	78.24	-10.12	11.94	34.33	100	0	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.7	-3.3	40	49.21	18.4	0.55	31.46	107	350	Peak
95.61	39.36	-4.14	43.5	60.15	9.76	0.98	31.53	-	-	Peak
250.05	36.81	-9.19	46	53.92	12.77	1.53	31.41	-	-	Peak
374.2	33.48	-12.52	46	47.2	15.44	2.09	31.25	-	-	Peak
500.2	36.28	-9.72	46	46.72	18.18	2.45	31.07	-	-	Peak
750.1	38.03	-7.97	46	44.15	21.52	3.06	30.7	-	-	Peak
2374	53.76	-20.24	74	49.14	32.16	5.99	33.53	126	347	Peak
2374	43.83	-10.17	54	39.21	32.16	5.99	33.53	126	347	Average
2437	105.64	-	-	100.84	32.24	6.11	33.55	126	347	Average
2437	110.08	-	-	105.3	32.22	6.11	33.55	126	347	Peak
2484	49.15	-24.85	74	44.25	32.28	6.18	33.56	126	347	Peak
2484	37.18	-16.82	54	32.28	32.28	6.18	33.56	126	347	Average
4874	53.64	-20.36	74	44.47	34.08	9.13	34.04	100	347	Peak
4874	50.05	-3.95	54	40.88	34.08	9.13	34.04	100	347	Average
7311	55.79	-18.21	74	44.38	35.45	10.06	34.1	100	6	Peak
7311	49.28	-4.72	54	37.87	35.45	10.06	34.1	100	6	Average
9748	55.13	-34.95	90.08	87.64	-10.12	11.94	34.33	100	0	Peak



<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.2	-3.8	40	48.71	18.4	0.55	31.46	-	-	Peak
46.74	35.78	-4.22	40	56.68	9.94	0.67	31.51	-	-	Peak
250.05	42.5	-3.5	46	59.61	12.77	1.53	31.41	131	255	Peak
323.8	39.67	-6.33	46	55.06	14.1	1.83	31.32	-	-	Peak
666.1	33.44	-12.56	46	40.84	20.58	2.87	30.85	-	-	Peak
794.9	37.3	-8.7	46	42.7	22.15	3.13	30.68	-	-	Peak
2380	50.51	-23.49	74	45.85	32.16	6.03	33.53	194	231	Peak
2380	40.98	-13.02	54	36.32	32.16	6.03	33.53	194	231	Average
2457	107.63	-	-	102.79	32.26	6.14	33.56	194	231	Peak
2457	103.06	-	-	98.22	32.26	6.14	33.56	194	231	Average
2499.81	50.08	-23.92	74	45.17	32.3	6.18	33.57	194	231	Peak
2499.81	42.12	-11.88	54	37.21	32.3	6.18	33.57	194	231	Average
8298	53.47	-20.53	74	41.08	35.56	10.93	34.1	127	89	Peak
8298	41.54	-12.46	54	29.15	35.56	10.93	34.1	127	89	Average
9828	43.19	-44.44	87.63	75.56	-9.96	11.89	34.3	100	0	Peak





<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.06	-3.94	40	48.57	18.4	0.55	31.46	-	-	Peak
95.61	39.86	-3.64	43.5	60.65	9.76	0.98	31.53	132	336	Peak
250.05	36.61	-9.39	46	53.72	12.77	1.53	31.41	-	-	Peak
374.2	34.02	-11.98	46	47.74	15.44	2.09	31.25	-	-	Peak
500.2	38.15	-7.85	46	48.59	18.18	2.45	31.07	-	-	Peak
750.1	37.32	-8.68	46	43.44	21.52	3.06	30.7	-	-	Peak
2380	54.13	-19.87	74	49.47	32.16	6.03	33.53	127	168	Peak
2380	44.89	-9.11	54	40.23	32.16	6.03	33.53	127	168	Average
2457	103.52	-	-	98.68	32.26	6.14	33.56	127	168	Average
2457	107.83	-	-	102.99	32.26	6.14	33.56	127	168	Peak
2483.66	54.2	-19.8	74	49.3	32.28	6.18	33.56	127	168	Peak
2483.66	41.92	-12.08	54	37.02	32.28	6.18	33.56	127	168	Average
4914	55.06	-18.94	74	45.89	34.08	9.14	34.05	100	352	Peak
4914	50.36	-3.64	54	41.19	34.08	9.14	34.05	100	352	Average
7371	55.23	-18.77	74	43.85	35.41	10.08	34.11	100	3	Peak
7371	46.53	-7.47	54	35.16	35.4	10.08	34.11	100	3	Average
9828	51.35	-36.48	87.83	83.72	-9.96	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.29	-3.71	40	48.8	18.4	0.55	31.46	-	-	Peak
95.61	34.76	-8.74	43.5	55.55	9.76	0.98	31.53	-	-	Peak
250.05	42.96	-3.04	46	60.07	12.77	1.53	31.41	126	319	Peak
335	37.62	-8.38	46	52.67	14.39	1.87	31.31	-	-	Peak
794.9	34.31	-11.69	46	39.71	22.15	3.13	30.68	-	-	Peak
875.4	36.76	-9.24	46	41.21	22.95	3.31	30.71	-	-	Peak
2382	47.46	-26.54	74	42.8	32.16	6.03	33.53	164	338	Peak
2382	37.91	-16.09	54	33.25	32.16	6.03	33.53	164	338	Average
2462	99.24	-	-	94.4	32.26	6.14	33.56	164	338	Average
2462	103.85	-	-	99.01	32.26	6.14	33.56	164	338	Peak
2483.66	49.01	-24.99	74	44.11	32.28	6.18	33.56	164	338	Peak
2483.66	37.98	-16.02	54	33.08	32.28	6.18	33.56	164	338	Average
8397	53.61	-20.39	74	41.16	35.58	10.96	34.09	148	106	Peak
8397	42.17	-11.83	54	29.72	35.58	10.96	34.09	148	106	Average
9848	40.31	-43.54	83.85	72.63	-9.9	11.88	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.97	-3.03	40	49.48	18.4	0.55	31.46	102	357	Peak
95.61	37.68	-5.82	43.5	58.47	9.76	0.98	31.53	-	-	Peak
250.05	35.56	-10.44	46	52.67	12.77	1.53	31.41	-	-	Peak
374.2	32.54	-13.46	46	46.26	15.44	2.09	31.25	-	-	Peak
500.2	36.36	-9.64	46	46.8	18.18	2.45	31.07	-	-	Peak
750.1	36.4	-9.6	46	42.52	21.52	3.06	30.7	-	-	Peak
2364	51.43	-22.57	74	46.83	32.13	5.99	33.52	123	168	Peak
2364	41.11	-12.89	54	36.51	32.13	5.99	33.52	123	168	Average
2462	107.42	-	-	102.58	32.26	6.14	33.56	123	168	Peak
2462	103.28	-	-	98.44	32.26	6.14	33.56	123	168	Average
2484.42	57.56	-16.44	74	52.66	32.28	6.18	33.56	123	168	Peak
2484.42	47.67	-6.33	54	42.77	32.28	6.18	33.56	123	168	Average
4924	52.85	-21.15	74	43.67	34.09	9.15	34.06	100	350	Peak
4924	50.07	-3.93	54	40.89	34.09	9.15	34.06	100	350	Average
7386	54.46	-19.54	74	43.09	35.38	10.1	34.11	101	4	Peak
7386	48.18	-5.82	54	36.81	35.38	10.1	34.11	101	4	Average
9848	44.19	-43.23	87.42	76.51	-9.9	11.88	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 6	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.74	36.34	-3.66	40	57.24	9.94	0.67	31.51	-	-	Peak
83.73	34.69	-5.31	40	57.37	7.96	0.9	31.54	-	-	Peak
250.05	42.78	-3.22	46	59.89	12.77	1.53	31.41	130	286	Peak
310.5	38.15	-7.85	46	53.94	13.74	1.79	31.32	-	-	Peak
663.3	29.92	-16.08	46	37.35	20.56	2.87	30.86	-	-	Peak
786.5	33.31	-12.69	46	38.85	22.03	3.12	30.69	-	-	Peak
2389.99	64.86	-9.14	74	60.18	32.18	6.03	33.53	100	230	Peak
2389.99	46.35	-7.65	54	41.67	32.18	6.03	33.53	100	230	Average
2412	106.69	-	-	101.96	32.2	6.07	33.54	100	230	Peak
2412	95.73	-	-	91	32.2	6.07	33.54	100	230	Average
2500	38.7	-15.3	54	33.79	32.3	6.18	33.57	100	230	Average
2500	48.27	-25.73	74	43.36	32.3	6.18	33.57	100	230	Peak
8421	54.36	-19.64	74	41.89	35.59	10.97	34.09	150	122	Peak
8421	41.6	-12.4	54	29.13	35.59	10.97	34.09	150	122	Average
9648	38.66	-48.03	86.69	71.34	-10.32	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 6	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.51	36.37	-3.63	40	49.98	17.29	0.57	31.47	100	355	Peak
95.61	38.29	-5.21	43.5	59.08	9.76	0.98	31.53	-	-	Peak
250.05	38.25	-7.75	46	55.36	12.77	1.53	31.41	-	-	Peak
374.2	31.79	-14.21	46	45.51	15.44	2.09	31.25	-	-	Peak
500.2	37.49	-8.51	46	47.93	18.18	2.45	31.07	-	-	Peak
750.1	37.44	-8.56	46	43.56	21.52	3.06	30.7	-	-	Peak
2389.99	68.36	-5.64	74	63.68	32.18	6.03	33.53	100	347	Peak
2389.99	49.85	-4.15	54	45.17	32.18	6.03	33.53	100	347	Average
2412	107.54	-	-	102.81	32.2	6.07	33.54	100	347	Peak
2412	96.75	-	-	92.02	32.2	6.07	33.54	100	347	Average
2500	37.77	-16.23	54	32.86	32.3	6.18	33.57	100	347	Average
2500	47.24	-26.76	74	42.33	32.3	6.18	33.57	100	347	Peak
8313	53.89	-20.11	74	41.49	35.56	10.94	34.1	100	288	Peak
8313	42.21	-11.79	54	29.81	35.56	10.94	34.1	100	288	Average
9648	45.64	-41.9	87.54	78.33	-10.32	11.99	34.36	100	0	Peak



<b>Test Mode :</b>	Mode 7	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.53	-3.47	40	49.04	18.4	0.55	31.46	112	76	Peak
95.61	34.94	-8.56	43.5	55.73	9.76	0.98	31.53	-	-	Peak
250.05	42.38	-3.62	46	59.49	12.77	1.53	31.41	-	-	Peak
310.5	38.66	-7.34	46	54.45	13.74	1.79	31.32	-	-	Peak
788.6	34.58	-11.42	46	40.08	22.06	3.12	30.68	-	-	Peak
875.4	36.04	-9.96	46	40.49	22.95	3.31	30.71	-	-	Peak
2389.61	63.43	-10.57	74	58.75	32.18	6.03	33.53	100	230	Peak
2389.61	44.52	-9.48	54	39.84	32.18	6.03	33.53	100	230	Average
2417	107.6	-	-	102.87	32.2	6.07	33.54	100	230	Peak
2417	97.35	-	-	92.62	32.2	6.07	33.54	100	230	Average
2500	38.76	-15.24	54	33.85	32.3	6.18	33.57	100	230	Average
2500	48.22	-25.78	74	43.31	32.3	6.18	33.57	100	230	Peak
8358	53.88	-20.12	74	41.45	35.57	10.95	34.09	147	121	Peak
8358	41.76	-12.24	54	29.33	35.57	10.95	34.09	147	121	Average
9668	39.05	-48.55	87.6	71.68	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 7	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.47	-3.53	40	48.98	18.4	0.55	31.46	100	358	Peak
95.61	37.7	-5.8	43.5	58.49	9.76	0.98	31.53	-	-	Peak
250.05	37.52	-8.48	46	54.63	12.77	1.53	31.41	-	-	Peak
374.2	31.71	-14.29	46	45.43	15.44	2.09	31.25	-	-	Peak
500.2	36.3	-9.7	46	46.74	18.18	2.45	31.07	-	-	Peak
750.1	35.33	-10.67	46	41.45	21.52	3.06	30.7	-	-	Peak
2388.85	65.88	-8.12	74	61.2	32.18	6.03	33.53	100	345	Peak
2388.85	46.68	-7.32	54	42	32.18	6.03	33.53	100	345	Average
2417	107.98	-	-	103.24	32.22	6.07	33.55	100	345	Peak
2417	97.64	-	-	92.91	32.2	6.07	33.54	100	345	Average
2484	37.93	-16.07	54	33.03	32.28	6.18	33.56	100	345	Average
2484	48.52	-25.48	74	43.62	32.28	6.18	33.56	100	345	Peak
8373	54.08	-19.92	74	41.64	35.58	10.95	34.09	110	278	Peak
8373	42.26	-11.74	54	29.82	35.58	10.95	34.09	110	278	Average
9668	47.98	-40	87.98	80.61	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 8	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.1	-3.9	40	48.61	18.4	0.55	31.46	-	-	Peak
47.01	35.64	-4.36	40	57.04	9.45	0.67	31.52	-	-	Peak
250.05	42.18	-3.82	46	59.29	12.77	1.53	31.41	122	274	Peak
323.8	38.57	-7.43	46	53.96	14.1	1.83	31.32	-	-	Peak
360.2	33.65	-12.35	46	47.8	15.06	2.06	31.27	-	-	Peak
794.2	33.47	-12.53	46	38.88	22.14	3.13	30.68	-	-	Peak
2390	46.81	-27.19	74	42.13	32.18	6.03	33.53	100	313	Peak
2390	35.71	-18.29	54	31.03	32.18	6.03	33.53	100	313	Average
2437	94.51	-	-	89.71	32.24	6.11	33.55	100	313	Average
2437	104.9	-	-	100.1	32.24	6.11	33.55	100	313	Peak
2494	46.86	-27.14	74	41.95	32.3	6.18	33.57	100	313	Peak
2494	36.9	-17.1	54	31.99	32.3	6.18	33.57	100	313	Average
8409	53.83	-20.17	74	41.37	35.58	10.97	34.09	136	121	Peak
8409	42.12	-11.88	54	29.66	35.58	10.97	34.09	136	121	Average
9748	41.3	-43.6	84.9	73.81	-10.12	11.94	34.33	100	0	Peak





<b>Test Mode :</b>	Mode 8	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.75	-3.25	40	49.26	18.4	0.55	31.46	110	96	Peak
95.61	38.58	-4.92	43.5	59.37	9.76	0.98	31.53	-	-	Peak
250.05	37.61	-8.39	46	54.72	12.77	1.53	31.41	-	-	Peak
374.2	31.5	-14.5	46	45.22	15.44	2.09	31.25	-	-	Peak
500.2	35.78	-10.22	46	46.22	18.18	2.45	31.07	-	-	Peak
750.1	36.08	-9.92	46	42.2	21.52	3.06	30.7	-	-	Peak
2390	53.29	-20.71	74	48.61	32.18	6.03	33.53	100	351	Peak
2390	40.91	-13.09	54	36.23	32.18	6.03	33.53	100	351	Average
2437	95.64	-	-	90.84	32.24	6.11	33.55	100	351	Average
2437	106.88	-	-	102.1	32.22	6.11	33.55	100	351	Peak
2500	47.26	-26.74	74	42.35	32.3	6.18	33.57	100	351	Peak
2500	37.34	-16.66	54	32.43	32.3	6.18	33.57	100	351	Average
8316	53.5	-20.5	74	41.1	35.56	10.94	34.1	105	336	Peak
8316	41.67	-12.33	54	29.27	35.56	10.94	34.1	105	336	Average
9748	48.39	-38.49	86.88	80.9	-10.12	11.94	34.33	100	0	Peak



<b>Test Mode :</b>	Mode 9	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.49	-3.51	40	49	18.4	0.55	31.46	106	82	Peak
45.66	35.75	-4.25	40	56.17	10.43	0.66	31.51	-	-	Peak
250.05	42.06	-3.94	46	59.17	12.77	1.53	31.41	-	-	Peak
310.5	37.98	-8.02	46	53.77	13.74	1.79	31.32	-	-	Peak
430.9	31.43	-14.57	46	43.56	16.75	2.25	31.13	-	-	Peak
875.4	36.61	-9.39	46	41.06	22.95	3.31	30.71	-	-	Peak
2374	52.16	-21.84	74	47.54	32.16	5.99	33.53	139	314	Peak
2374	41.22	-12.78	54	36.6	32.16	5.99	33.53	139	314	Average
2457	96.48	-	-	91.64	32.26	6.14	33.56	139	314	Average
2457	106.94	-	-	102.14	32.24	6.11	33.55	139	314	Peak
2484.61	55.4	-18.6	74	50.5	32.28	6.18	33.56	139	314	Peak
2484.61	41.53	-12.47	54	36.63	32.28	6.18	33.56	139	314	Average
8442	54.39	-19.61	74	41.91	35.59	10.98	34.09	155	283	Peak
8442	41.37	-12.63	54	28.89	35.59	10.98	34.09	155	283	Average
9828	40.06	-46.88	86.94	72.43	-9.96	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 9	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.74	-3.26	40	49.25	18.4	0.55	31.46	100	360	Peak
95.61	37.19	-6.31	43.5	57.98	9.76	0.98	31.53	-	-	Peak
250.05	38.02	-7.98	46	55.13	12.77	1.53	31.41	-	-	Peak
374.2	31.64	-14.36	46	45.36	15.44	2.09	31.25	-	-	Peak
500.2	37.42	-8.58	46	47.86	18.18	2.45	31.07	-	-	Peak
750.1	36.89	-9.11	46	43.01	21.52	3.06	30.7	-	-	Peak
2332	52.11	-21.89	74	47.58	32.09	5.95	33.51	128	169	Peak
2332	42.82	-11.18	54	38.29	32.09	5.95	33.51	128	169	Average
2457	98.24	-	-	93.4	32.26	6.14	33.56	128	169	Average
2457	108.74	-	-	103.94	32.24	6.11	33.55	128	169	Peak
2484.61	61.06	-12.94	74	56.16	32.28	6.18	33.56	128	169	Peak
2484.61	46.28	-7.72	54	41.38	32.28	6.18	33.56	128	169	Average
8253	53.1	-20.9	74	40.74	35.55	10.91	34.1	109	114	Peak
8253	41.5	-12.5	54	29.14	35.55	10.91	34.1	109	114	Average
9828	47.92	-40.82	88.74	80.31	-9.98	11.9	34.31	100	0	Peak



<b>Test Mode :</b>	Mode 10	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.56	-3.44	40	49.07	18.4	0.55	31.46	-	-	Peak
83.73	34.56	-5.44	40	57.24	7.96	0.9	31.54	-	-	Peak
250.05	42.78	-3.22	46	59.89	12.77	1.53	31.41	139	281	Peak
323.8	37.36	-8.64	46	52.75	14.1	1.83	31.32	-	-	Peak
663.3	29.86	-16.14	46	37.29	20.56	2.87	30.86	-	-	Peak
794.9	34.31	-11.69	46	39.71	22.15	3.13	30.68	-	-	Peak
2358	46.85	-27.15	74	42.25	32.13	5.99	33.52	194	230	Peak
2358	36.33	-17.67	54	31.73	32.13	5.99	33.52	194	230	Average
2462	95.12	-	-	90.28	32.26	6.14	33.56	194	230	Average
2462	105.73	-	-	100.89	32.26	6.14	33.56	194	230	Peak
2483.5	56.68	-17.32	74	51.78	32.28	6.18	33.56	194	230	Peak
2483.5	41.28	-12.72	54	36.38	32.28	6.18	33.56	194	230	Average
8334	53.57	-20.43	74	41.15	35.57	10.95	34.1	151	310	Peak
8334	40.87	-13.13	54	28.45	35.57	10.95	34.1	151	310	Average
9848	37.87	-47.86	85.73	70.19	-9.9	11.88	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 10	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.7	-3.3	40	49.21	18.4	0.55	31.46	102	356	Peak
95.61	38.06	-5.44	43.5	58.85	9.76	0.98	31.53	-	-	Peak
250.05	36.62	-9.38	46	53.73	12.77	1.53	31.41	-	-	Peak
374.2	31.92	-14.08	46	45.64	15.44	2.09	31.25	-	-	Peak
500.2	35.84	-10.16	46	46.28	18.18	2.45	31.07	-	-	Peak
624.1	29.23	-16.77	46	37.12	20.25	2.76	30.9	-	-	Peak
2358	50.8	-23.2	74	46.2	32.13	5.99	33.52	124	168	Peak
2358	40.08	-13.92	54	35.48	32.13	5.99	33.52	124	168	Average
2462	94.85	-	-	90.01	32.26	6.14	33.56	124	168	Average
2462	106.04	-	-	101.2	32.26	6.14	33.56	124	168	Peak
2483.5	66.25	-7.75	74	61.35	32.28	6.18	33.56	124	168	Peak
2483.5	49.74	-4.26	54	44.84	32.28	6.18	33.56	124	168	Average
8322	54.15	-19.85	74	41.74	35.57	10.94	34.1	105	360	Peak
8322	41.77	-12.23	54	29.36	35.57	10.94	34.1	105	360	Average
9848	44.04	-42	86.04	76.36	-9.9	11.88	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 11	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.11	-3.89	40	48.62	18.4	0.55	31.46	-	-	Peak
83.73	34.28	-5.72	40	56.96	7.96	0.9	31.54	-	-	Peak
250.05	42.24	-3.76	46	59.35	12.77	1.53	31.41	124	273	Peak
310.5	38.32	-7.68	46	54.11	13.74	1.79	31.32	-	-	Peak
794.2	34.07	-11.93	46	39.48	22.14	3.13	30.68	-	-	Peak
875.4	37.27	-8.73	46	41.72	22.95	3.31	30.71	-	-	Peak
2389.61	69.3	-4.7	74	64.62	32.18	6.03	33.53	130	233	Peak
2389.61	50.04	-3.96	54	45.36	32.18	6.03	33.53	130	233	Average
2412	106.64	-	-	101.91	32.2	6.07	33.54	130	233	Peak
2412	96.04	-	-	91.31	32.2	6.07	33.54	130	233	Average
2500	47.73	-26.27	74	42.82	32.3	6.18	33.57	130	233	Peak
2500	39.55	-14.45	54	34.64	32.3	6.18	33.57	130	233	Average
8118	55.87	-18.13	74	43.61	35.52	10.86	34.12	121	245	Peak
8118	40.98	-13.02	54	28.72	35.52	10.86	34.12	121	245	Average
9648	39.5	-47.14	86.64	72.18	-10.32	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 11	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.88	-3.12	40	49.39	18.4	0.55	31.46	101	351	Peak
95.61	39.25	-4.25	43.5	60.04	9.76	0.98	31.53	-	-	Peak
250.05	37.78	-8.22	46	54.89	12.77	1.53	31.41	-	-	Peak
374.2	31.65	-14.35	46	45.37	15.44	2.09	31.25	-	-	Peak
500.2	38.09	-7.91	46	48.53	18.18	2.45	31.07	-	-	Peak
750.1	35.29	-10.71	46	41.41	21.52	3.06	30.7	-	-	Peak
2388.85	68.11	-5.89	74	63.43	32.18	6.03	33.53	100	166	Peak
2388.85	48.14	-5.86	54	43.46	32.18	6.03	33.53	100	166	Average
2412	104.07	-	-	99.34	32.2	6.07	33.54	100	166	Peak
2412	93.89	-	-	89.16	32.2	6.07	33.54	100	166	Average
2500	33.75	-20.25	54	28.84	32.3	6.18	33.57	100	166	Average
2500	45.35	-28.65	74	40.44	32.3	6.18	33.57	100	166	Peak
8289	56.09	-17.91	74	43.7	35.56	10.93	34.1	116	351	Peak
8289	41.8	-12.2	54	29.41	35.56	10.93	34.1	116	351	Average
9648	44.65	-39.42	84.07	77.33	-10.32	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 12	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.97	36.25	-3.75	40	49.32	17.84	0.56	31.47	-	-	Peak
83.46	34.29	-5.71	40	56.97	7.96	0.9	31.54	-	-	Peak
250.05	42.29	-3.71	46	59.4	12.77	1.53	31.41	132	288	Peak
309.8	38.51	-7.49	46	54.33	13.72	1.79	31.33	-	-	Peak
430.9	31.53	-14.47	46	43.66	16.75	2.25	31.13	-	-	Peak
794.9	33.6	-12.4	46	39	22.15	3.13	30.68	-	-	Peak
2387.33	59.79	-14.21	74	55.11	32.18	6.03	33.53	130	233	Peak
2387.33	42.16	-11.84	54	37.48	32.18	6.03	33.53	130	233	Average
2417	106.49	-	-	101.76	32.2	6.07	33.54	130	233	Peak
2417	95.71	-	-	90.98	32.2	6.07	33.54	130	233	Average
2500	39.71	-14.29	54	34.8	32.3	6.18	33.57	130	233	Average
2500	48.71	-25.29	74	43.8	32.3	6.18	33.57	130	233	Peak
8346	55.47	-18.53	74	43.05	35.57	10.95	34.1	131	334	Peak
8346	40.87	-13.13	54	28.45	35.57	10.95	34.1	131	334	Average
9668	38.83	-47.66	86.49	71.5	-10.3	11.98	34.35	100	0	Peak





<b>Test Mode :</b>	Mode 12	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.77	-3.23	40	49.28	18.4	0.55	31.46	100	357	Peak
95.61	38.45	-5.05	43.5	59.24	9.76	0.98	31.53	-	-	Peak
250.05	37.51	-8.49	46	54.62	12.77	1.53	31.41	-	-	Peak
374.2	31.17	-14.83	46	44.89	15.44	2.09	31.25	-	-	Peak
500.2	36.61	-9.39	46	47.05	18.18	2.45	31.07	-	-	Peak
666.1	32.07	-13.93	46	39.47	20.58	2.87	30.85	-	-	Peak
2389.42	62.74	-11.26	74	58.06	32.18	6.03	33.53	100	63	Peak
2389.42	44.68	-9.32	54	40	32.18	6.03	33.53	100	63	Average
2417	106.61	-	-	101.88	32.2	6.07	33.54	100	63	Peak
2417	96.8	-	-	92.07	32.2	6.07	33.54	100	63	Average
2500	37.23	-16.77	54	32.32	32.3	6.18	33.57	100	63	Average
2500	49.6	-24.4	74	44.69	32.3	6.18	33.57	100	63	Peak
8301	55.53	-18.47	74	43.14	35.56	10.93	34.1	152	302	Peak
8301	42.27	-11.73	54	29.88	35.56	10.93	34.1	152	302	Average
9668	44.09	-42.52	86.61	76.72	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 13	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.97	36.73	-3.27	40	49.8	17.84	0.56	31.47	109	81	Peak
46.74	35.26	-4.74	40	56.16	9.94	0.67	31.51	-	-	Peak
250.05	42.1	-3.9	46	59.21	12.77	1.53	31.41	-	-	Peak
304.2	37.85	-8.15	46	53.81	13.59	1.78	31.33	-	-	Peak
663.3	29.21	-16.79	46	36.64	20.56	2.87	30.86	-	-	Peak
786.5	34.25	-11.75	46	39.79	22.03	3.12	30.69	-	-	Peak
2390	48.62	-25.38	74	43.94	32.18	6.03	33.53	200	235	Peak
2390	39.05	-14.95	54	34.37	32.18	6.03	33.53	200	235	Average
2437	105.74	-	-	100.94	32.24	6.11	33.55	200	235	Peak
2437	96.98	-	-	92.18	32.24	6.11	33.55	200	235	Average
2500	48.46	-25.54	74	43.55	32.3	6.18	33.57	200	235	Peak
2500	39.89	-14.11	54	34.98	32.3	6.18	33.57	200	235	Average
8322	55.59	-18.41	74	43.18	35.57	10.94	34.1	122	140	Peak
8322	41.04	-12.96	54	28.63	35.57	10.94	34.1	122	140	Average
9748	39.35	-46.39	85.74	71.86	-10.12	11.94	34.33	100	0	Peak



<b>Test Mode :</b>	Mode 13	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	36.52	-3.48	40	49.59	17.84	0.56	31.47	-	-	Peak
84.54	36.62	-3.38	40	59.17	8.09	0.9	31.54	114	193	Peak
250.05	37.18	-8.82	46	54.29	12.77	1.53	31.41	-	-	Peak
374.2	31.7	-14.3	46	45.42	15.44	2.09	31.25	-	-	Peak
500.2	36.65	-9.35	46	47.09	18.18	2.45	31.07	-	-	Peak
750.1	34.9	-11.1	46	41.02	21.52	3.06	30.7	-	-	Peak
2350	50.82	-23.18	74	46.28	32.11	5.95	33.52	159	71	Peak
2350	40.39	-13.61	54	35.85	32.11	5.95	33.52	159	71	Average
2437	105.64	-	-	100.84	32.24	6.11	33.55	159	71	Peak
2437	95.73	-	-	90.93	32.24	6.11	33.55	159	71	Average
2500	49.84	-24.16	74	44.93	32.3	6.18	33.57	159	71	Peak
2500	38.79	-15.21	54	33.88	32.3	6.18	33.57	159	71	Average
8289	55.31	-18.69	74	42.92	35.56	10.93	34.1	114	306	Peak
8289	41.2	-12.8	54	28.81	35.56	10.93	34.1	114	306	Average
9748	44	-41.64	85.64	76.51	-10.12	11.94	34.33	100	0	Peak



<b>Test Mode :</b>	Mode 14	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.54	-3.46	40	49.05	18.4	0.55	31.46	112	79	Peak
83.46	34.5	-5.5	40	57.18	7.96	0.9	31.54	-	-	Peak
250.05	42.33	-3.67	46	59.44	12.77	1.53	31.41	-	-	Peak
310.5	37.64	-8.36	46	53.43	13.74	1.79	31.32	-	-	Peak
794.9	32.78	-13.22	46	38.18	22.15	3.13	30.68	-	-	Peak
875.4	36.5	-9.5	46	40.95	22.95	3.31	30.71	-	-	Peak
2374	49.36	-24.64	74	44.74	32.16	5.99	33.53	195	232	Peak
2374	33.61	-20.39	54	28.99	32.16	5.99	33.53	195	232	Average
2457	104.72	-	-	99.88	32.26	6.14	33.56	195	232	Peak
2457	94.72	-	-	89.88	32.26	6.14	33.56	195	232	Average
2484.61	57.54	-16.46	74	52.64	32.28	6.18	33.56	195	232	Peak
2484.61	41.4	-12.6	54	36.5	32.28	6.18	33.56	195	232	Average
8334	55.7	-18.3	74	43.28	35.57	10.95	34.1	142	261	Peak
8334	41.08	-12.92	54	28.66	35.57	10.95	34.1	142	261	Average
9828	38.63	-46.09	84.72	71	-9.96	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 14	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	36.52	-3.48	40	49.59	17.84	0.56	31.47	100	355	Peak
95.61	37.12	-6.38	43.5	57.91	9.76	0.98	31.53	-	-	Peak
250.05	37.25	-8.75	46	54.36	12.77	1.53	31.41	-	-	Peak
374.2	31.54	-14.46	46	45.26	15.44	2.09	31.25	-	-	Peak
500.2	35.12	-10.88	46	45.56	18.18	2.45	31.07	-	-	Peak
750.1	36.49	-9.51	46	42.61	21.52	3.06	30.7	-	-	Peak
2372	52.55	-21.45	74	47.93	32.16	5.99	33.53	131	347	Peak
2372	36.29	-17.71	54	31.67	32.16	5.99	33.53	131	347	Average
2457	103.76	-	-	98.92	32.26	6.14	33.56	141	347	Peak
2457	95.46	-	-	90.62	32.26	6.14	33.56	131	347	Average
2483.5	55.74	-18.26	74	50.84	32.28	6.18	33.56	131	347	Peak
2483.5	40.6	-13.4	54	35.7	32.28	6.18	33.56	131	347	Average
8250	55.82	-18.18	74	43.47	35.55	10.91	34.11	113	162	Peak
8250	41.48	-12.52	54	29.13	35.55	10.91	34.11	113	162	Average
9828	42.38	-41.38	83.76	74.77	-9.98	11.9	34.31	100	0	Peak



<b>Test Mode :</b>	Mode 15	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	35.49	-4.51	40	47.46	18.95	0.54	31.46	-	-	Peak
191.73	37.34	-6.16	43.5	58.65	8.9	1.29	31.5	-	-	Peak
250.05	42.75	-3.25	46	59.86	12.77	1.53	31.41	142	269	Peak
309.8	37.86	-8.14	46	53.68	13.72	1.79	31.33	-	-	Peak
430.9	31.68	-14.32	46	43.81	16.75	2.25	31.13	-	-	Peak
799.8	33.88	-12.12	46	39.2	22.22	3.14	30.68	-	-	Peak
2374	49.33	-24.67	74	44.71	32.16	5.99	33.53	195	233	Peak
2374	33.95	-20.05	54	29.33	32.16	5.99	33.53	195	233	Average
2462	105.88	-	-	101.04	32.26	6.14	33.56	195	233	Peak
2462	95.3	-	-	90.46	32.26	6.14	33.56	195	233	Average
2485.18	64.82	-9.18	74	59.92	32.28	6.18	33.56	195	233	Peak
2485.18	46.11	-7.89	54	41.21	32.28	6.18	33.56	195	233	Average
8421	55.75	-18.25	74	43.28	35.59	10.97	34.09	120	148	Peak
8421	41.02	-12.98	54	28.55	35.59	10.97	34.09	120	148	Average



<b>Test Mode :</b>	Mode 15	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.25	-3.75	40	48.76	18.4	0.55	31.46	108	72	Peak
95.61	36.83	-6.67	43.5	57.62	9.76	0.98	31.53	-	-	Peak
250.05	36.41	-9.59	46	53.52	12.77	1.53	31.41	-	-	Peak
374.2	32.3	-13.7	46	46.02	15.44	2.09	31.25	-	-	Peak
500.2	35.89	-10.11	46	46.33	18.18	2.45	31.07	-	-	Peak
750.1	36.65	-9.35	46	42.77	21.52	3.06	30.7	-	-	Peak
2390	50.12	-23.88	74	45.44	32.18	6.03	33.53	124	349	Peak
2390	37.26	-16.74	54	32.58	32.18	6.03	33.53	124	349	Average
2462	103.93	-	-	99.09	32.26	6.14	33.56	124	349	Peak
2462	94.94	-	-	90.1	32.26	6.14	33.56	124	349	Average
2483.66	65.6	-8.4	74	60.7	32.28	6.18	33.56	124	349	Peak
2483.66	47.57	-6.43	54	42.67	32.28	6.18	33.56	124	349	Average
8130	54.84	-19.16	74	42.58	35.52	10.86	34.12	117	325	Peak
8130	41.43	-12.57	54	29.17	35.52	10.86	34.12	117	325	Average
9848	41.07	-42.86	83.93	73.4	-9.92	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 16	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	03	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2422 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.14	-3.86	40	48.65	18.4	0.55	31.46	-	-	Peak
83.46	34.06	-5.94	40	56.74	7.96	0.9	31.54	-	-	Peak
250.05	42.83	-3.17	46	59.94	12.77	1.53	31.41	126	274	Peak
323.8	38.46	-7.54	46	53.85	14.1	1.83	31.32	-	-	Peak
430.9	32.31	-13.69	46	44.44	16.75	2.25	31.13	-	-	Peak
875.4	35.68	-10.32	46	40.13	22.95	3.31	30.71	-	-	Peak
2385.05	68.91	-5.09	74	64.25	32.16	6.03	33.53	200	233	Peak
2385.05	51.25	-2.75	54	46.59	32.16	6.03	33.53	200	233	Average
2422	103.45	-	-	98.71	32.22	6.07	33.55	200	233	Peak
2422	92.21	-	-	87.47	32.22	6.07	33.55	200	233	Average
2484	37.34	-16.66	54	32.44	32.28	6.18	33.56	200	233	Average
2484	48.88	-25.12	74	43.98	32.28	6.18	33.56	200	233	Peak
8238	55.52	-18.48	74	43.17	35.55	10.91	34.11	131	240	Peak
8238	41.71	-12.29	54	29.36	35.55	10.91	34.11	131	240	Average





<b>Test Mode :</b>	Mode 16	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	03	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2422 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	36.64	-3.36	40	49.71	17.84	0.56	31.47	102	355	Peak
95.61	37.47	-6.03	43.5	58.26	9.76	0.98	31.53	-	-	Peak
250.05	37.34	-8.66	46	54.45	12.77	1.53	31.41	-	-	Peak
374.2	31.46	-14.54	46	45.18	15.44	2.09	31.25	-	-	Peak
500.2	36.19	-9.81	46	46.63	18.18	2.45	31.07	-	-	Peak
750.1	35.93	-10.07	46	42.05	21.52	3.06	30.7	-	-	Peak
2376.69	68.49	-5.51	74	63.87	32.16	5.99	33.53	100	71	Peak
2376.69	49.89	-4.11	54	45.27	32.16	5.99	33.53	100	71	Average
2422	102.92	-	-	98.18	32.22	6.07	33.55	100	71	Peak
2422	91.86	-	-	87.12	32.22	6.07	33.55	100	71	Average
2500	35.54	-18.46	54	30.63	32.3	6.18	33.57	100	71	Average
2500	49.83	-24.17	74	44.92	32.3	6.18	33.57	100	71	Peak
8370	55.56	-18.44	74	43.12	35.58	10.95	34.09	115	131	Peak
8370	41.58	-12.42	54	29.14	35.58	10.95	34.09	115	131	Average
9688	39.57	-43.35	82.92	72.16	-10.22	11.97	34.34	100	0	Peak



<b>Test Mode :</b>	Mode 17	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	04	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2427 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.25	-3.75	40	48.76	18.4	0.55	31.46	-	-	Peak
95.61	34.61	-8.89	43.5	55.4	9.76	0.98	31.53	-	-	Peak
250.05	42.69	-3.31	46	59.8	12.77	1.53	31.41	129	243	Peak
321.7	37.72	-8.28	46	53.17	14.05	1.82	31.32	-	-	Peak
430.9	31.17	-14.83	46	43.3	16.75	2.25	31.13	-	-	Peak
794.2	33.46	-12.54	46	38.87	22.14	3.13	30.68	-	-	Peak
2382.58	67	-7	74	62.34	32.16	6.03	33.53	200	232	Peak
2382.58	48.05	-5.95	54	43.39	32.16	6.03	33.53	200	232	Average
2427	102.6	-	-	97.86	32.22	6.07	33.55	200	232	Peak
2427	91.22	-	-	86.48	32.22	6.07	33.55	200	232	Average
2484	37.73	-16.27	54	32.83	32.28	6.18	33.56	200	232	Average
2484	52.23	-21.77	74	47.33	32.28	6.18	33.56	200	232	Peak
8346	55.85	-18.15	74	43.43	35.57	10.95	34.1	118	315	Peak
8346	41.05	-12.95	54	28.63	35.57	10.95	34.1	118	315	Average



<b>Test Mode :</b>	Mode 17	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	04	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2427 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.78	36.33	-3.67	40	49.94	17.29	0.57	31.47	103	360	Peak
95.61	38.53	-4.97	43.5	59.32	9.76	0.98	31.53	-	-	Peak
209.82	33.81	-9.69	43.5	54.95	8.97	1.36	31.47	-	-	Peak
374.2	31.79	-14.21	46	45.51	15.44	2.09	31.25	-	-	Peak
500.2	36.78	-9.22	46	47.22	18.18	2.45	31.07	-	-	Peak
750.1	35.15	-10.85	46	41.27	21.52	3.06	30.7	-	-	Peak
2390	67.57	-6.43	74	62.89	32.18	6.03	33.53	100	196	Peak
2390	52.84	-1.16	54	48.16	32.18	6.03	33.53	100	196	Average
2427	103.35	-	-	98.61	32.22	6.07	33.55	100	196	Peak
2427	91.36	-	-	86.62	32.22	6.07	33.55	100	196	Average
2484	34.51	-19.49	54	29.61	32.28	6.18	33.56	100	196	Average
2484	47.33	-26.67	74	42.43	32.28	6.18	33.56	100	196	Peak
8298	55.92	-18.08	74	43.53	35.56	10.93	34.1	137	178	Peak
8298	40.88	-13.12	54	28.49	35.56	10.93	34.1	137	178	Average
9708	38.63	-44.72	83.35	71.22	-10.2	11.95	34.34	100	0	Peak



<b>Test Mode :</b>	Mode 18	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.25	-3.75	40	48.76	18.4	0.55	31.46	-	-	Peak
45.93	36.1	-3.9	40	56.52	10.43	0.66	31.51	-	-	Peak
250.05	42.81	-3.19	46	59.92	12.77	1.53	31.41	145	182	Peak
310.5	38.13	-7.87	46	53.92	13.74	1.79	31.32	-	-	Peak
797	33.72	-12.28	46	39.08	22.18	3.14	30.68	-	-	Peak
875.4	36.63	-9.37	46	41.08	22.95	3.31	30.71	-	-	Peak
2390	64.55	-9.45	74	59.87	32.18	6.03	33.53	200	234	Peak
2390	46.13	-7.87	54	41.45	32.18	6.03	33.53	200	234	Average
2437	103.85	-	-	99.05	32.24	6.11	33.55	200	234	Peak
2437	93.22	-	-	88.42	32.24	6.11	33.55	200	234	Average
2484	62.92	-11.08	74	58.02	32.28	6.18	33.56	200	234	Peak
2484	44.27	-9.73	54	39.37	32.28	6.18	33.56	200	234	Average
8337	54.89	-19.11	74	42.47	35.57	10.95	34.1	121	188	Peak
8337	41.25	-12.75	54	28.83	35.57	10.95	34.1	121	188	Average



<b>Test Mode :</b>	Mode 18	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.91	-3.09	40	49.42	18.4	0.55	31.46	103	353	Peak
95.61	38.01	-5.49	43.5	58.8	9.76	0.98	31.53	-	-	Peak
250.05	37.69	-8.31	46	54.8	12.77	1.53	31.41	-	-	Peak
374.2	32.02	-13.98	46	45.74	15.44	2.09	31.25	-	-	Peak
500.2	35.47	-10.53	46	45.91	18.18	2.45	31.07	-	-	Peak
666.1	31.95	-14.05	46	39.35	20.58	2.87	30.85	-	-	Peak
2390	65.38	-8.62	74	60.7	32.18	6.03	33.53	100	196	Peak
2390	50.24	-3.76	54	45.56	32.18	6.03	33.53	100	196	Average
2437	102.41	-	-	97.61	32.24	6.11	33.55	100	196	Peak
2437	92.72	-	-	87.92	32.24	6.11	33.55	100	196	Average
2484	59.74	-14.26	74	54.84	32.28	6.18	33.56	100	196	Peak
2484	40.27	-13.73	54	35.37	32.28	6.18	33.56	100	196	Average
8247	54.53	-19.47	74	42.18	35.55	10.91	34.11	140	263	Peak
8247	40.8	-13.2	54	28.45	35.55	10.91	34.11	140	263	Average
9748	42.05	-40.36	82.41	74.46	-10.02	11.92	34.31	100	0	Peak



<b>Test Mode :</b>	Mode 19	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	08	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2447 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.97	36.24	-3.76	40	49.31	17.84	0.56	31.47	-	-	Peak
83.73	34.07	-5.93	40	56.75	7.96	0.9	31.54	-	-	Peak
250.05	42.67	-3.33	46	59.78	12.77	1.53	31.41	129	184	Peak
310.5	38.82	-7.18	46	54.61	13.74	1.79	31.32	-	-	Peak
430.9	31.81	-14.19	46	43.94	16.75	2.25	31.13	-	-	Peak
794.2	33.51	-12.49	46	38.92	22.14	3.13	30.68	-	-	Peak
2390	54.34	-19.66	74	49.66	32.18	6.03	33.53	196	235	Peak
2390	37.8	-16.2	54	33.12	32.18	6.03	33.53	196	235	Average
2447	103.44	-	-	98.64	32.24	6.11	33.55	196	235	Peak
2447	92.7	-	-	87.9	32.24	6.11	33.55	196	235	Average
2485.18	65.27	-8.73	74	60.37	32.28	6.18	33.56	196	235	Peak
2485.18	49.52	-4.48	54	44.62	32.28	6.18	33.56	196	235	Average
8358	55.34	-18.66	74	42.91	35.57	10.95	34.09	137	285	Peak
8358	41.65	-12.35	54	29.22	35.57	10.95	34.09	137	285	Average



<b>Test Mode :</b>	Mode 19	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	08	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2447 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
34.05	36.89	-3.11	40	50.5	17.29	0.57	31.47	113	102	Peak
96.69	37.81	-5.69	43.5	58.46	9.9	0.98	31.53	-	-	Peak
206.58	34.12	-9.38	43.5	55.32	8.92	1.35	31.47	-	-	Peak
374.2	31.89	-14.11	46	45.61	15.44	2.09	31.25	-	-	Peak
500.2	36.57	-9.43	46	47.01	18.18	2.45	31.07	-	-	Peak
750.1	36.5	-9.5	46	42.62	21.52	3.06	30.7	-	-	Peak
2390	55.44	-18.56	74	50.76	32.18	6.03	33.53	119	197	Peak
2390	38.49	-15.51	54	33.81	32.18	6.03	33.53	119	197	Average
2447	100.37	-	-	95.57	32.24	6.11	33.55	119	197	Peak
2447	91.28	-	-	86.48	32.24	6.11	33.55	119	197	Average
2485.18	63.45	-10.55	74	58.55	32.28	6.18	33.56	119	197	Peak
2485.18	48.48	-5.52	54	43.58	32.28	6.18	33.56	119	197	Average
8169	54.27	-19.73	74	41.97	35.53	10.88	34.11	113	353	Peak
8169	40.99	-13.01	54	28.69	35.53	10.88	34.11	113	353	Average
9788	40.35	-40.02	80.37	72.72	-9.96	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	09	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2452 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.74	36.77	-3.23	40	57.67	9.94	0.67	31.51	108	94	Peak
191.73	39.94	-3.56	43.5	61.25	8.9	1.29	31.5	-	-	Peak
250.05	42.36	-3.64	46	59.47	12.77	1.53	31.41	-	-	Peak
310.5	39.31	-6.69	46	55.1	13.74	1.79	31.32	-	-	Peak
500.2	34.68	-11.32	46	45.12	18.18	2.45	31.07	-	-	Peak
788.6	35	-11	46	40.5	22.06	3.12	30.68	-	-	Peak
2390	54.79	-19.21	74	50.11	32.18	6.03	33.53	200	235	Peak
2390	38.67	-15.33	54	33.99	32.18	6.03	33.53	200	235	Average
2452	104.18	-	-	99.38	32.24	6.11	33.55	200	235	Peak
2452	92.03	-	-	87.23	32.24	6.11	33.55	200	235	Average
2485.37	66.36	-7.64	74	61.46	32.28	6.18	33.56	200	235	Peak
2485.37	49.55	-4.45	54	44.65	32.28	6.18	33.56	200	235	Average
8277	54.96	-19.04	74	42.58	35.56	10.92	34.1	144	296	Peak
8277	41.08	-12.92	54	28.7	35.56	10.92	34.1	144	296	Average





<b>Test Mode :</b>	Mode 20	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	09	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2452 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.22	-3.78	40	48.73	18.4	0.55	31.46	101	357	Peak
97.5	39.39	-4.11	43.5	59.89	10.05	0.99	31.54	-	-	Peak
250.05	37.8	-8.2	46	54.91	12.77	1.53	31.41	-	-	Peak
374.2	34.58	-11.42	46	48.3	15.44	2.09	31.25	-	-	Peak
500.2	37.77	-8.23	46	48.21	18.18	2.45	31.07	-	-	Peak
666.1	37.12	-8.88	46	44.52	20.58	2.87	30.85	-	-	Peak
2388	53.97	-20.03	74	49.29	32.18	6.03	33.53	121	197	Peak
2388	36.49	-17.51	54	31.81	32.18	6.03	33.53	121	197	Average
2452	101.02	-	-	96.22	32.24	6.11	33.55	121	197	Peak
2452	90.93	-	-	86.13	32.24	6.11	33.55	121	197	Average
2485.18	64.55	-9.45	74	59.65	32.28	6.18	33.56	121	197	Peak
2485.18	50.5	-3.5	54	45.6	32.28	6.18	33.56	121	197	Average
8337	55.91	-18.09	74	43.49	35.57	10.95	34.1	122	193	Peak
8337	41.77	-12.23	54	29.35	35.57	10.95	34.1	122	193	Average



<b>Test Mode :</b>	Mode 21	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
45.66	36.67	-3.33	40	57.09	10.43	0.66	31.51	-	-	Peak
191.73	39.78	-3.72	43.5	61.09	8.9	1.29	31.5	-	-	Peak
250.05	42.82	-3.18	46	59.93	12.77	1.53	31.41	118	184	Peak
323.8	38.74	-7.26	46	54.13	14.1	1.83	31.32	-	-	Peak
500.2	34.49	-11.51	46	44.93	18.18	2.45	31.07	-	-	Peak
663.3	32.98	-13.02	46	40.41	20.56	2.87	30.86	-	-	Peak
5725	69.92	-12.34	82.26	61.02	34.82	9.92	35.84	100	358	Peak
5745	102.26	-	-	93.34	34.84	9.91	35.83	100	358	Peak
5745	90.45	-	-	81.53	34.84	9.91	35.83	100	358	Average
5850	49.82	-32.44	82.26	40.78	34.94	9.87	35.77	100	358	Peak
8444	56.67	-17.33	74	44.19	35.59	10.98	34.09	112	351	Peak
8444	41.06	-12.94	54	28.58	35.59	10.98	34.09	112	351	Average



<b>Test Mode :</b>	Mode 21	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.97	-3.03	40	49.48	18.4	0.55	31.46	102	358	Peak
96.42	39.16	-4.34	43.5	59.95	9.76	0.98	31.53	-	-	Peak
250.05	37.81	-8.19	46	54.92	12.77	1.53	31.41	-	-	Peak
374.2	34.34	-11.66	46	48.06	15.44	2.09	31.25	-	-	Peak
500.2	37.96	-8.04	46	48.4	18.18	2.45	31.07	-	-	Peak
750.1	38.88	-7.12	46	45	21.52	3.06	30.7	-	-	Peak
5725	77.8	-11.36	89.16	68.9	34.82	9.92	35.84	129	5	Peak
5745	109.16	-	-	100.24	34.84	9.91	35.83	129	5	Peak
5745	99.52	-	-	90.6	34.84	9.91	35.83	129	5	Average
5850	51.53	-37.63	89.16	42.49	34.94	9.87	35.77	129	5	Peak
8312	54.49	-19.51	74	42.09	35.56	10.94	34.1	127	210	Peak
8312	41.53	-12.47	54	29.13	35.56	10.94	34.1	127	210	Average



<b>Test Mode :</b>	Mode 22	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.35	36.64	-3.36	40	48.61	18.95	0.54	31.46	113	68	Peak
191.73	39.17	-4.33	43.5	60.48	8.9	1.29	31.5	-	-	Peak
250.05	42.15	-3.85	46	59.26	12.77	1.53	31.41	-	-	Peak
335	39.68	-6.32	46	54.73	14.39	1.87	31.31	-	-	Peak
500.2	33.55	-12.45	46	43.99	18.18	2.45	31.07	-	-	Peak
786.5	34.52	-11.48	46	40.06	22.03	3.12	30.69	-	-	Peak
5725	50.45	-30.25	80.7	41.55	34.82	9.92	35.84	123	349	Peak
5785	100.7	-	-	91.73	34.88	9.9	35.81	123	349	Peak
5785	91.04	-	-	82.07	34.88	9.9	35.81	123	349	Average
5850	50.03	-30.67	80.7	40.99	34.94	9.87	35.77	123	349	Peak
8268	54.89	-19.11	74	42.51	35.56	10.92	34.1	136	124	Peak
8268	42.14	-11.86	54	29.76	35.56	10.92	34.1	136	124	Average



<b>Test Mode :</b>	Mode 22	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.3	-3.7	40	48.81	18.4	0.55	31.46	100	360	Peak
95.61	38.19	-5.31	43.5	58.98	9.76	0.98	31.53	-	-	Peak
250.05	37.49	-8.51	46	54.6	12.77	1.53	31.41	-	-	Peak
374.2	33.77	-12.23	46	47.49	15.44	2.09	31.25	-	-	Peak
500.2	36.9	-9.1	46	47.34	18.18	2.45	31.07	-	-	Peak
750.1	37.95	-8.05	46	44.07	21.52	3.06	30.7	-	-	Peak
5725	53.62	-34.12	87.74	44.72	34.82	9.92	35.84	114	358	Peak
5785	107.74	-	-	98.77	34.88	9.9	35.81	114	358	Peak
5785	97.98	-	-	89.01	34.88	9.9	35.81	114	358	Average
5850	52.85	-34.89	87.74	43.81	34.94	9.87	35.77	114	358	Peak
8428	55.66	-18.34	74	43.18	35.59	10.98	34.09	118	315	Peak
8428	41.13	-12.87	54	28.65	35.59	10.98	34.09	118	315	Average
11570	44.77	-29.23	74	75	-9.8	13.18	33.61	100	0	Peak
17355	43.54	-44.2	87.74	70.12	-8.67	14.41	32.32	100	0	Peak



<b>Test Mode :</b>	Mode 23	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.33	-3.67	40	48.84	18.4	0.55	31.46	-	-	Peak
191.73	39.57	-3.93	43.5	60.88	8.9	1.29	31.5	-	-	Peak
250.05	42.73	-3.27	46	59.84	12.77	1.53	31.41	132	253	Peak
335	39.39	-6.61	46	54.44	14.39	1.87	31.31	-	-	Peak
500.2	32.97	-13.03	46	43.41	18.18	2.45	31.07	-	-	Peak
875.4	38.18	-7.82	46	42.63	22.95	3.31	30.71	-	-	Peak
5725	50.87	-29.38	80.25	41.97	34.82	9.92	35.84	100	2	Peak
5825	100.25	-	-	91.22	34.93	9.88	35.78	100	2	Peak
5825	90.12	-	-	81.09	34.93	9.88	35.78	100	2	Average
5850	64.38	-15.87	80.25	55.34	34.94	9.87	35.77	100	2	Peak
8332	55.6	-18.4	74	43.18	35.57	10.95	34.1	145	230	Peak
8332	41.2	-12.8	54	28.78	35.57	10.95	34.1	145	230	Average



<b>Test Mode :</b>	Mode 23	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.75	-3.25	40	49.26	18.4	0.55	31.46	102	354	Peak
95.61	39.72	-3.78	43.5	60.51	9.76	0.98	31.53	-	-	Peak
250.05	38.21	-7.79	46	55.32	12.77	1.53	31.41	-	-	Peak
374.2	33.97	-12.03	46	47.69	15.44	2.09	31.25	-	-	Peak
500.2	37.53	-8.47	46	47.97	18.18	2.45	31.07	-	-	Peak
750.1	37.85	-8.15	46	43.97	21.52	3.06	30.7	-	-	Peak
5725	54.71	-32.92	87.63	45.81	34.82	9.92	35.84	125	3	Peak
5825	107.63	-	-	98.6	34.93	9.88	35.78	125	3	Peak
5825	98.34	-	-	89.31	34.93	9.88	35.78	125	3	Average
5850	72.71	-14.92	87.63	63.67	34.94	9.87	35.77	125	3	Peak
8308	55.72	-18.28	74	43.33	35.56	10.93	34.1	110	96	Peak
8308	41.63	-12.37	54	29.24	35.56	10.93	34.1	110	96	Average



<b>Test Mode :</b>	Mode 24	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
83.73	35.22	-4.78	40	57.9	7.96	0.9	31.54	-	-	Peak
191.73	40.27	-3.23	43.5	61.58	8.9	1.29	31.5	-	-	Peak
250.05	42.93	-3.07	46	60.04	12.77	1.53	31.41	144	271	Peak
321.7	39.25	-6.75	46	54.7	14.05	1.82	31.32	-	-	Peak
500.2	34.69	-11.31	46	45.13	18.18	2.45	31.07	-	-	Peak
875.4	38.68	-7.32	46	43.13	22.95	3.31	30.71	-	-	Peak
5725	66.58	-13.2	79.78	57.68	34.82	9.92	35.84	100	349	Peak
5745	99.78	-	-	90.86	34.84	9.91	35.83	100	349	Peak
5745	90.45	-	-	81.53	34.84	9.91	35.83	100	349	Average
5850	49.92	-29.86	79.78	40.88	34.94	9.87	35.77	100	349	Peak
8182	54.1	-19.9	74	41.8	35.53	10.88	34.11	128	261	Peak
8182	40.96	-13.04	54	28.66	35.53	10.88	34.11	128	261	Average
17235	38.94	-40.84	79.78	65.55	-8.65	14.37	32.33	100	0	Peak





<b>Test Mode :</b>	Mode 24	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
34.05	36.56	-3.44	40	50.17	17.29	0.57	31.47	100	348	Peak
95.61	38.83	-4.67	43.5	59.62	9.76	0.98	31.53	-	-	Peak
250.05	37.65	-8.35	46	54.76	12.77	1.53	31.41	-	-	Peak
374.2	34	-12	46	47.72	15.44	2.09	31.25	-	-	Peak
500.2	36.45	-9.55	46	46.89	18.18	2.45	31.07	-	-	Peak
750.1	37.82	-8.18	46	43.94	21.52	3.06	30.7	-	-	Peak
5725	72.67	-13.71	86.38	63.77	34.82	9.92	35.84	117	354	Peak
5745	106.38	-	-	97.46	34.84	9.91	35.83	117	354	Peak
5745	96.23	-	-	87.31	34.84	9.91	35.83	117	354	Average
5850	51.07	-35.31	86.38	42.03	34.94	9.87	35.77	117	354	Peak
8252	54.79	-19.21	74	42.43	35.55	10.91	34.1	125	104	Peak
8252	41.73	-12.27	54	29.37	35.55	10.91	34.1	125	104	Average
11490	44	-30	74	74.12	-9.7	13.14	33.56	100	0	Peak
17235	40.37	-46.01	86.38	66.98	-8.65	14.37	32.33	100	0	Peak



<b>Test Mode :</b>	Mode 25	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
46.74	36.41	-3.59	40	57.31	9.94	0.67	31.51	-	-	Peak
191.73	39.39	-4.11	43.5	60.7	8.9	1.29	31.5	-	-	Peak
250.05	42.85	-3.15	46	59.96	12.77	1.53	31.41	121	176	Peak
310.5	39.3	-6.7	46	55.09	13.74	1.79	31.32	-	-	Peak
500.2	32.85	-13.15	46	43.29	18.18	2.45	31.07	-	-	Peak
875.4	37	-9	46	41.45	22.95	3.31	30.71	-	-	Peak
5725	50.04	-31.44	81.48	41.14	34.82	9.92	35.84	123	349	Peak
5785	101.48	-	-	92.51	34.88	9.9	35.81	123	349	Peak
5785	90.86	-	-	81.89	34.88	9.9	35.81	123	349	Average
5850	49.58	-31.9	81.48	40.54	34.94	9.87	35.77	123	349	Peak
8364	55.16	-18.84	74	42.73	35.57	10.95	34.09	133	327	Peak
8364	41.24	-12.76	54	28.81	35.57	10.95	34.09	133	327	Average



<b>Test Mode :</b>	Mode 25	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.27	-3.73	40	48.24	18.95	0.54	31.46	103	352	Peak
95.61	38.93	-4.57	43.5	59.72	9.76	0.98	31.53	-	-	Peak
250.05	37.92	-8.08	46	55.03	12.77	1.53	31.41	-	-	Peak
374.2	34.1	-11.9	46	47.82	15.44	2.09	31.25	-	-	Peak
500.2	37.21	-8.79	46	47.65	18.18	2.45	31.07	-	-	Peak
666.1	37.01	-8.99	46	44.41	20.58	2.87	30.85	-	-	Peak
5725	52.1	-33.92	86.02	43.2	34.82	9.92	35.84	114	13	Peak
5785	106.02	-	-	97.05	34.88	9.9	35.81	114	13	Peak
5785	95.95	-	-	86.98	34.88	9.9	35.81	114	13	Average
5850	50.71	-35.31	86.02	41.67	34.94	9.87	35.77	114	13	Peak
8134	54.54	-19.46	74	42.27	35.53	10.86	34.12	112	85	Peak
8134	42.12	-11.88	54	29.85	35.53	10.86	34.12	112	85	Average
11570	41.21	-32.79	74	71.44	-9.8	13.18	33.61	100	0	Peak
17355	40.85	-45.17	86.02	67.42	-8.67	14.42	32.32	100	0	Peak



<b>Test Mode :</b>	Mode 26	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.86	-3.14	40	48.83	18.95	0.54	31.46	113	88	Peak
191.73	40.22	-3.28	43.5	61.53	8.9	1.29	31.5	-	-	Peak
250.05	42.08	-3.92	46	59.19	12.77	1.53	31.41	-	-	Peak
321.7	38.92	-7.08	46	54.37	14.05	1.82	31.32	-	-	Peak
663.3	32.92	-13.08	46	40.35	20.56	2.87	30.86	-	-	Peak
875.4	36.98	-9.02	46	41.43	22.95	3.31	30.71	-	-	Peak
5725	49.54	-30.36	79.9	40.64	34.82	9.92	35.84	100	348	Peak
5825	99.9	-	-	90.87	34.93	9.88	35.78	100	348	Peak
5825	90.32	-	-	81.29	34.93	9.88	35.78	100	348	Average
5850	57.04	-22.86	79.9	48	34.94	9.87	35.77	100	348	Peak
8108	54.81	-19.19	74	42.55	35.52	10.86	34.12	131	248	Peak
8108	41.79	-12.21	54	29.53	35.52	10.86	34.12	131	248	Average
17475	40.01	-39.89	79.9	66.55	-8.7	14.46	32.3	100	0	Peak



<b>Test Mode :</b>	Mode 26	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.76	-3.24	40	48.73	18.95	0.54	31.46	102	355	Peak
96.42	39.54	-3.96	43.5	60.33	9.76	0.98	31.53	-	-	Peak
250.05	38.17	-7.83	46	55.28	12.77	1.53	31.41	-	-	Peak
374.2	34.12	-11.88	46	47.84	15.44	2.09	31.25	-	-	Peak
500.2	36.32	-9.68	46	46.76	18.18	2.45	31.07	-	-	Peak
750.1	38.11	-7.89	46	44.23	21.52	3.06	30.7	-	-	Peak
5725	51.42	-34.1	85.52	42.52	34.82	9.92	35.84	103	2	Peak
5825	105.52	-	-	96.49	34.93	9.88	35.78	103	2	Peak
5825	96.43	-	-	87.4	34.93	9.88	35.78	103	2	Average
5850	66.39	-19.13	85.52	57.35	34.94	9.87	35.77	103	2	Peak
8364	55.87	-18.13	74	43.44	35.57	10.95	34.09	115	337	Peak
8364	40.66	-13.34	54	28.23	35.57	10.95	34.09	115	337	Average
11650	42.03	-31.97	74	72.37	-9.91	13.22	33.65	100	0	Peak
17475	39.99	-45.53	85.52	66.53	-8.69	14.45	32.3	100	0	Peak



<b>Test Mode :</b>	Mode 27	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5755 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.28	36.56	-3.44	40	57.96	9.45	0.67	31.52	110	63	Peak
191.73	39.23	-4.27	43.5	60.54	8.9	1.29	31.5	-	-	Peak
250.05	42.27	-3.73	46	59.38	12.77	1.53	31.41	-	-	Peak
321.7	39.07	-6.93	46	54.52	14.05	1.82	31.32	-	-	Peak
666.1	33.29	-12.71	46	40.69	20.58	2.87	30.85	-	-	Peak
875.4	36.7	-9.3	46	41.15	22.95	3.31	30.71	-	-	Peak
5725	64.86	-13.49	78.35	55.96	34.82	9.92	35.84	100	349	Peak
5755	98.35	-	-	89.4	34.86	9.91	35.82	100	349	Peak
5755	87.78	-	-	78.83	34.86	9.91	35.82	100	349	Average
5850	49.89	-28.46	78.35	40.85	34.94	9.87	35.77	100	349	Peak
8388	55.59	-18.41	74	43.14	35.58	10.96	34.09	141	257	Peak
8388	40.79	-13.21	54	28.34	35.58	10.96	34.09	141	257	Average



<b>Test Mode :</b>	Mode 27	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5755 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.45	-3.55	40	48.96	18.4	0.55	31.46	102	360	Peak
95.61	38.65	-4.85	43.5	59.44	9.76	0.98	31.53	-	-	Peak
250.05	37.66	-8.34	46	54.77	12.77	1.53	31.41	-	-	Peak
500.2	38.07	-7.93	46	48.51	18.18	2.45	31.07	-	-	Peak
666.1	37.03	-8.97	46	44.43	20.58	2.87	30.85	-	-	Peak
750.1	38.31	-7.69	46	44.43	21.52	3.06	30.7	-	-	Peak
5725	71.01	-12.63	83.64	62.11	34.82	9.92	35.84	104	354	Peak
5755	103.64	-	-	94.69	34.86	9.91	35.82	104	354	Peak
5755	92.61	-	-	83.66	34.86	9.91	35.82	104	354	Average
5850	51.49	-32.15	83.64	42.45	34.94	9.87	35.77	104	354	Peak
8166	53.17	-20.83	74	40.87	35.53	10.88	34.11	114	93	Peak
8166	41.62	-12.38	54	29.32	35.53	10.88	34.11	114	93	Average



<b>Test Mode :</b>	Mode 28	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	159	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5795 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	36.43	-3.57	40	49.5	17.84	0.56	31.47	-	-	Peak
191.73	39.66	-3.84	43.5	60.97	8.9	1.29	31.5	-	-	Peak
250.05	42.79	-3.21	46	59.9	12.77	1.53	31.41	129	182	Peak
335	38.95	-7.05	46	54	14.39	1.87	31.31	-	-	Peak
500.2	33.26	-12.74	46	43.7	18.18	2.45	31.07	-	-	Peak
792.1	33.3	-12.7	46	38.74	22.11	3.13	30.68	-	-	Peak
5725	49.56	-27.8	77.36	40.66	34.82	9.92	35.84	100	348	Peak
5795	97.36	-	-	88.38	34.89	9.89	35.8	100	348	Peak
5795	87.13	-	-	78.15	34.89	9.89	35.8	100	348	Average
5850	52.03	-25.33	77.36	42.99	34.94	9.87	35.77	100	348	Peak
8236	55.05	-18.95	74	42.7	35.55	10.91	34.11	126	352	Peak
8236	42.03	-11.97	54	29.68	35.55	10.91	34.11	126	352	Average





<b>Test Mode :</b>	Mode 28	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	159	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5795 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.86	-3.14	40	49.37	18.4	0.55	31.46	102	351	Peak
95.61	39.62	-3.88	43.5	60.41	9.76	0.98	31.53	-	-	Peak
250.05	38.3	-7.7	46	55.41	12.77	1.53	31.41	-	-	Peak
374.2	34.4	-11.6	46	48.12	15.44	2.09	31.25	-	-	Peak
500.2	37.05	-8.95	46	47.49	18.18	2.45	31.07	-	-	Peak
750.1	37.03	-8.97	46	43.15	21.52	3.06	30.7	-	-	Peak
5725	53.75	-29.01	82.76	44.85	34.82	9.92	35.84	115	0	Peak
5795	102.76	-	-	93.78	34.89	9.89	35.8	115	0	Peak
5795	92.59	-	-	83.61	34.89	9.89	35.8	115	0	Average
5850	58.39	-24.37	82.76	49.35	34.94	9.87	35.77	115	0	Peak
8428	55.37	-18.63	74	42.89	35.59	10.98	34.09	105	78	Peak
8428	41.73	-12.27	54	29.25	35.59	10.98	34.09	105	78	Average
11590	40.12	-33.88	74	70.39	-9.83	13.18	33.62	100	0	Peak



<b>Test Mode :</b>	Mode 29	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.63	-3.37	40	49.14	18.4	0.55	31.46	101	187	Peak
191.73	39.03	-4.47	43.5	60.34	8.9	1.29	31.5	-	-	Peak
250.05	42.56	-3.44	46	59.67	12.77	1.53	31.41	-	-	Peak
374.2	40.35	-5.65	46	54.07	15.44	2.09	31.25	-	-	Peak
666.1	32.76	-13.24	46	40.16	20.58	2.87	30.85	-	-	Peak
875.4	38.16	-7.84	46	42.61	22.95	3.31	30.71	-	-	Peak
2389.61	48.49	-5.51	54	43.81	32.18	6.03	33.53	131	128	Average
2389.61	58.17	-15.83	74	53.49	32.18	6.03	33.53	131	128	Peak
2412	101.87	-	-	97.14	32.2	6.07	33.54	131	128	Average
2412	105.53	-	-	100.8	32.2	6.07	33.54	131	128	Peak
2500	47.2	-26.8	74	42.29	32.3	6.18	33.57	131	128	Peak
2500	39.75	-14.25	54	34.84	32.3	6.18	33.57	131	128	Average
8193	54.49	-19.51	74	42.17	35.54	10.89	34.11	100	162	Peak
8193	39.91	-14.09	54	27.59	35.54	10.89	34.11	100	162	Average
9648	44.26	-41.27	85.53	76.92	-10.3	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 29	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.09	-3.91	40	48.6	18.4	0.55	31.46	-	-	Peak
95.61	40.21	-3.29	43.5	61	9.76	0.98	31.53	127	300	Peak
191.73	38.66	-4.84	43.5	59.97	8.9	1.29	31.5	-	-	Peak
374.2	33.17	-12.83	46	46.89	15.44	2.09	31.25	-	-	Peak
666.1	36.74	-9.26	46	44.14	20.58	2.87	30.85	-	-	Peak
750.1	36.46	-9.54	46	42.58	21.52	3.06	30.7	-	-	Peak
2389.42	61.53	-12.47	74	56.85	32.18	6.03	33.53	100	163	Peak
2389.42	52.37	-1.63	54	47.69	32.18	6.03	33.53	100	163	Average
2412	105.65	-	-	100.92	32.2	6.07	33.54	100	163	Peak
2412	102.02	-	-	97.29	32.2	6.07	33.54	100	163	Average
2486	40.62	-13.38	54	35.72	32.28	6.18	33.56	100	163	Average
2486	50.18	-23.82	74	45.28	32.28	6.18	33.56	100	163	Peak
8262	56.28	-17.72	74	43.91	35.55	10.92	34.1	116	218	Peak
8262	40.72	-13.28	54	28.35	35.55	10.92	34.1	116	218	Average
9648	49.76	-35.89	85.65	82.42	-10.3	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 30	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.95	-3.05	40	49.46	18.4	0.55	31.46	100	201	Peak
83.73	36.16	-3.84	40	58.84	7.96	0.9	31.54	-	-	Peak
250.05	42.54	-3.46	46	59.65	12.77	1.53	31.41	-	-	Peak
310.5	38.23	-7.77	46	54.02	13.74	1.79	31.32	-	-	Peak
430.9	32.17	-13.83	46	44.3	16.75	2.25	31.13	-	-	Peak
875.4	35.9	-10.1	46	40.35	22.95	3.31	30.71	-	-	Peak
2380.49	48.16	-5.84	54	43.5	32.16	6.03	33.53	154	90	Average
2380.49	57.4	-16.6	74	52.74	32.16	6.03	33.53	154	90	Peak
2417	106.96	-	-	102.23	32.2	6.07	33.54	154	90	Peak
2417	103.23	-	-	98.5	32.2	6.07	33.54	154	90	Average
2500	37.79	-16.21	54	32.88	32.3	6.18	33.57	154	90	Average
2500	47.21	-26.79	74	42.3	32.3	6.18	33.57	154	90	Peak
8397	55.8	-18.2	74	43.35	35.58	10.96	34.09	100	132	Peak
8397	42.44	-11.56	54	29.99	35.58	10.96	34.09	100	132	Average
9668	50.58	-36.38	86.96	83.21	-10.26	11.98	34.35	100	0	Peak
12085	41.14	-32.86	74	71.9	-10.43	13.45	33.78	100	0	Peak



<b>Test Mode :</b>	Mode 30	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.91	-3.09	40	49.42	18.4	0.55	31.46	111	139	Peak
95.61	39.54	-3.96	43.5	60.33	9.76	0.98	31.53	-	-	Peak
210.09	34.28	-9.22	43.5	55.41	8.98	1.36	31.47	-	-	Peak
374.2	28.93	-17.07	46	42.65	15.44	2.09	31.25	-	-	Peak
500.2	32.97	-13.03	46	43.41	18.18	2.45	31.07	-	-	Peak
750.1	34.49	-11.51	46	40.61	21.52	3.06	30.7	-	-	Peak
2389.99	52.74	-1.26	54	48.06	32.18	6.03	33.53	100	163	Average
2389.99	63.35	-10.65	74	58.67	32.18	6.03	33.53	100	163	Peak
2417	108.82	-	-	104.08	32.22	6.07	33.55	100	163	Peak
2417	104.86	-	-	100.13	32.2	6.07	33.54	100	163	Average
2492	41.71	-12.29	54	36.8	32.3	6.18	33.57	100	163	Average
2492	52.09	-21.91	74	47.18	32.3	6.18	33.57	100	163	Peak
4834	56.35	-17.65	74	47.19	34.07	9.12	34.03	180	14	Peak
4834	52.9	-1.1	54	43.74	34.07	9.12	34.03	180	14	Average
8409	56.67	-17.33	74	44.21	35.58	10.97	34.09	100	68	Peak
8409	42.35	-11.65	54	29.89	35.58	10.97	34.09	100	68	Average
9668	54.19	-34.63	88.82	86.82	-10.26	11.98	34.35	100	0	Peak
12085	40.31	-33.69	74	71.07	-10.43	13.45	33.78	100	0	Peak



<b>Test Mode :</b>	Mode 31	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.7	-3.3	40	48.67	18.95	0.54	31.46	100	244	Peak
45.93	35.45	-4.55	40	55.87	10.43	0.66	31.51	-	-	Peak
250.05	42.31	-3.69	46	59.42	12.77	1.53	31.41	-	-	Peak
323.8	38.26	-7.74	46	53.65	14.1	1.83	31.32	-	-	Peak
430.9	31.58	-14.42	46	43.71	16.75	2.25	31.13	-	-	Peak
875.4	36.39	-9.61	46	40.84	22.95	3.31	30.71	-	-	Peak
2390	54.46	-19.54	74	49.78	32.18	6.03	33.53	167	190	Peak
2390	40.95	-13.05	54	36.27	32.18	6.03	33.53	167	190	Average
2437	106.78	-	-	101.98	32.24	6.11	33.55	167	190	Peak
2437	103.21	-	-	98.41	32.24	6.11	33.55	167	190	Average
2484	55.07	-18.93	74	50.17	32.28	6.18	33.56	167	190	Peak
2484	41.18	-12.82	54	36.28	32.28	6.18	33.56	167	190	Average
8313	55.98	-18.02	74	43.58	35.56	10.94	34.1	100	32	Peak
8313	41.65	-12.35	54	29.25	35.56	10.94	34.1	100	32	Average
9748	46.13	-40.65	86.78	78.61	-10.1	11.94	34.32	100	0	Peak
12185	39.68	-34.32	74	70.3	-10.47	13.49	33.64	100	0	Peak



<b>Test Mode :</b>	Mode 31	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.66	-3.34	40	49.17	18.4	0.55	31.46	126	100	Peak
95.61	39.83	-3.67	43.5	60.62	9.76	0.98	31.53	-	-	Peak
214.41	34.59	-8.91	43.5	55.63	9.05	1.38	31.47	-	-	Peak
374.2	29.95	-16.05	46	43.67	15.44	2.09	31.25	-	-	Peak
500.2	32.94	-13.06	46	43.38	18.18	2.45	31.07	-	-	Peak
750.1	35.96	-10.04	46	42.08	21.52	3.06	30.7	-	-	Peak
2390	62	-12	74	57.32	32.18	6.03	33.53	100	161	Peak
2390	47.08	-6.92	54	42.4	32.18	6.03	33.53	100	161	Average
2437	110.49	-	-	105.71	32.22	6.11	33.55	100	161	Peak
2437	107.12	-	-	102.32	32.24	6.11	33.55	100	161	Average
2484	43.25	-10.75	54	38.35	32.28	6.18	33.56	100	161	Average
2484	55.43	-18.57	74	50.53	32.28	6.18	33.56	100	161	Peak
4874	56.7	-17.3	74	47.52	34.08	9.14	34.04	100	25	Peak
4874	52.81	-1.19	54	43.64	34.08	9.13	34.04	100	25	Average
7311	55.62	-18.38	74	44.21	35.45	10.06	34.1	102	46	Peak
7311	46.09	-7.91	54	34.68	35.45	10.06	34.1	102	46	Average
9748	51.05	-39.44	90.49	83.53	-10.1	11.94	34.32	100	0	Peak
12185	39.01	-34.99	74	69.63	-10.47	13.49	33.64	100	0	Peak



<b>Test Mode :</b>	Mode 32	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.95	-3.05	40	49.46	18.4	0.55	31.46	100	311	Peak
84.54	35.44	-4.56	40	57.99	8.09	0.9	31.54	-	-	Peak
250.05	42	-4	46	59.11	12.77	1.53	31.41	-	-	Peak
310.5	37.56	-8.44	46	53.35	13.74	1.79	31.32	-	-	Peak
374.2	35.22	-10.78	46	48.94	15.44	2.09	31.25	-	-	Peak
875.4	35.66	-10.34	46	40.11	22.95	3.31	30.71	-	-	Peak
2382	46.45	-27.55	74	41.79	32.16	6.03	33.53	100	296	Peak
2382	35.82	-18.18	54	31.16	32.16	6.03	33.53	100	296	Average
2457	103.39	-	-	98.55	32.26	6.14	33.56	100	296	Peak
2457	99.71	-	-	94.87	32.26	6.14	33.56	100	296	Average
2493.54	44.37	-9.63	54	39.46	32.3	6.18	33.57	100	296	Average
2493.54	54.43	-19.57	74	49.52	32.3	6.18	33.57	100	296	Peak
8406	56.87	-17.13	74	44.41	35.58	10.97	34.09	100	29	Peak
8406	42.43	-11.57	54	29.97	35.58	10.97	34.09	100	29	Average
9828	44.29	-39.1	83.39	76.64	-9.94	11.89	34.3	100	0	Peak
12285	39.56	-34.44	74	70.06	-10.51	13.52	33.51	100	0	Peak





<b>Test Mode :</b>	Mode 32	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.85	-3.15	40	49.36	18.4	0.55	31.46	120	269	Peak
95.61	39.48	-4.02	43.5	60.27	9.76	0.98	31.53	-	-	Peak
250.05	34.7	-11.3	46	51.81	12.77	1.53	31.41	-	-	Peak
374.2	29.16	-16.84	46	42.88	15.44	2.09	31.25	-	-	Peak
500.2	31.9	-14.1	46	42.34	18.18	2.45	31.07	-	-	Peak
750.1	31.84	-14.16	46	37.96	21.52	3.06	30.7	-	-	Peak
2380	52.57	-21.43	74	47.91	32.16	6.03	33.53	127	163	Peak
2380	40.82	-13.18	54	36.16	32.16	6.03	33.53	127	163	Average
2457	106.14	-	-	101.3	32.26	6.14	33.56	127	163	Peak
2457	102.93	-	-	98.09	32.26	6.14	33.56	127	163	Average
2483.5	45.28	-8.72	54	40.38	32.28	6.18	33.56	127	163	Average
2483.5	56.25	-17.75	74	51.35	32.28	6.18	33.56	127	163	Peak
4914	56.79	-17.21	74	47.62	34.08	9.14	34.05	112	359	Peak
4914	52.97	-1.03	54	43.8	34.08	9.14	34.05	112	359	Average
8361	55.87	-18.13	74	43.44	35.57	10.95	34.09	100	222	Peak
8361	42.09	-11.91	54	29.66	35.57	10.95	34.09	100	222	Average
9828	50.12	-36.02	86.14	82.47	-9.94	11.89	34.3	100	0	Peak
12285	39.5	-34.5	74	70	-10.51	13.52	33.51	100	0	Peak



<b>Test Mode :</b>	Mode 33	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.56	-3.44	40	49.07	18.4	0.55	31.46	100	96	Peak
46.74	35.44	-4.56	40	56.34	9.94	0.67	31.51	-	-	Peak
250.05	42.03	-3.97	46	59.14	12.77	1.53	31.41	-	-	Peak
321.7	37.78	-8.22	46	53.23	14.05	1.82	31.32	-	-	Peak
374.2	34.54	-11.46	46	48.26	15.44	2.09	31.25	-	-	Peak
875.4	35.99	-10.01	46	40.44	22.95	3.31	30.71	-	-	Peak
2382	49.12	-24.88	74	44.46	32.16	6.03	33.53	102	297	Peak
2382	38.03	-15.97	54	33.37	32.16	6.03	33.53	102	297	Average
2462	103.9	-	-	99.06	32.26	6.14	33.56	102	297	Peak
2462	99.86	-	-	95.02	32.26	6.14	33.56	102	297	Average
2483.66	45.64	-8.36	54	40.74	32.28	6.18	33.56	102	297	Average
2483.66	54.51	-19.49	74	49.61	32.28	6.18	33.56	102	297	Peak
8385	56.32	-17.68	74	43.87	35.58	10.96	34.09	100	58	Peak
8385	42.44	-11.56	54	29.99	35.58	10.96	34.09	100	58	Average
9848	42.95	-40.95	83.9	75.27	-9.9	11.88	34.3	100	0	Peak
12310	39.03	-34.97	74	69.51	-10.52	13.53	33.49	100	0	Peak



<b>Test Mode :</b>	Mode 33	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.35	-3.65	40	48.86	18.4	0.55	31.46	141	177	Peak
96.42	38.91	-4.59	43.5	59.7	9.76	0.98	31.53	-	-	Peak
211.17	34.36	-9.14	43.5	55.46	9	1.37	31.47	-	-	Peak
374.2	29.71	-16.29	46	43.43	15.44	2.09	31.25	-	-	Peak
500.2	33.48	-12.52	46	43.92	18.18	2.45	31.07	-	-	Peak
750.1	33.4	-12.6	46	39.52	21.52	3.06	30.7	-	-	Peak
2382	52.68	-21.32	74	48.02	32.16	6.03	33.53	126	163	Peak
2382	41.06	-12.94	54	36.4	32.16	6.03	33.53	126	163	Average
2462	106.62	-	-	101.78	32.26	6.14	33.56	126	163	Peak
2462	102.89	-	-	98.05	32.26	6.14	33.56	126	163	Average
2483.66	52.65	-1.35	54	47.75	32.28	6.18	33.56	126	163	Average
2483.66	60.75	-13.25	74	55.85	32.28	6.18	33.56	126	163	Peak
4924	55.36	-18.64	74	46.18	34.09	9.15	34.06	116	26	Peak
4924	52.7	-1.3	54	43.52	34.09	9.15	34.06	116	26	Average
8430	56.65	-17.35	74	44.17	35.59	10.98	34.09	100	37	Peak
8430	42.7	-11.3	54	30.22	35.59	10.98	34.09	100	37	Average
9848	49.47	-37.15	86.62	81.79	-9.9	11.88	34.3	100	0	Peak
12310	39.13	-34.87	74	69.61	-10.52	13.53	33.49	100	0	Peak



<b>Test Mode :</b>	Mode 34	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.7	-3.3	40	49.21	18.4	0.55	31.46	100	258	Peak
43.5	35.72	-4.28	40	55.03	11.55	0.64	31.5	-	-	Peak
250.05	42.55	-3.45	46	59.66	12.77	1.53	31.41	-	-	Peak
310.5	37.4	-8.6	46	53.19	13.74	1.79	31.32	-	-	Peak
794.2	37.3	-8.7	46	42.71	22.14	3.13	30.68	-	-	Peak
875.4	37.11	-8.89	46	41.56	22.95	3.31	30.71	-	-	Peak
2389.99	47.83	-6.17	54	43.15	32.18	6.03	33.53	131	128	Average
2389.99	65.85	-8.15	74	61.17	32.18	6.03	33.53	131	128	Peak
2412	106.24	-	-	101.51	32.2	6.07	33.54	131	128	Peak
2412	95.63	-	-	90.9	32.2	6.07	33.54	131	128	Average
2500	40.54	-13.46	54	35.63	32.3	6.18	33.57	131	128	Average
2500	48.39	-25.61	74	43.48	32.3	6.18	33.57	131	128	Peak
8346	55.94	-18.06	74	43.52	35.57	10.95	34.1	100	58	Peak
8346	42.67	-11.33	54	30.25	35.57	10.95	34.1	100	58	Average
9648	41.06	-45.18	86.24	73.74	-10.32	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 34	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.26	-3.74	40	48.77	18.4	0.55	31.46	102	300	Peak
95.61	38.93	-4.57	43.5	59.72	9.76	0.98	31.53	-	-	Peak
187.41	34.96	-8.54	43.5	56.25	8.96	1.27	31.52	-	-	Peak
374.2	28.69	-17.31	46	42.41	15.44	2.09	31.25	-	-	Peak
500.2	32.41	-13.59	46	42.85	18.18	2.45	31.07	-	-	Peak
750.1	34.96	-11.04	46	41.08	21.52	3.06	30.7	-	-	Peak
2389.99	52.98	-1.02	54	48.3	32.18	6.03	33.53	100	163	Average
2389.99	70.8	-3.2	74	66.12	32.18	6.03	33.53	100	163	Peak
2412	107.31	-	-	102.58	32.2	6.07	33.54	100	163	Peak
2412	96.87	-	-	92.14	32.2	6.07	33.54	100	163	Average
2494	38.72	-15.28	54	33.81	32.3	6.18	33.57	100	163	Average
2494	50.38	-23.62	74	45.47	32.3	6.18	33.57	100	163	Peak
8457	56.75	-17.25	74	44.25	35.59	10.99	34.08	100	113	Peak
8457	43.76	-10.24	54	31.26	35.59	10.99	34.08	100	113	Average
9648	46.17	-41.14	87.31	78.88	-10.34	11.99	34.36	100	0	Peak



<b>Test Mode :</b>	Mode 35	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.32	-3.68	40	48.83	18.4	0.55	31.46	100	220	Peak
83.46	35.94	-4.06	40	58.62	7.96	0.9	31.54	-	-	Peak
250.05	42.1	-3.9	46	59.21	12.77	1.53	31.41	-	-	Peak
310.5	37.33	-8.67	46	53.12	13.74	1.79	31.32	-	-	Peak
430.9	31.51	-14.49	46	43.64	16.75	2.25	31.13	-	-	Peak
875.4	37.15	-8.85	46	41.6	22.95	3.31	30.71	-	-	Peak
2388.09	45.6	-8.4	54	40.92	32.18	6.03	33.53	153	91	Average
2388.09	62.72	-11.28	74	58.04	32.18	6.03	33.53	153	91	Peak
2417	107.27	-	-	102.54	32.2	6.07	33.54	153	91	Peak
2417	96.96	-	-	92.23	32.2	6.07	33.54	153	91	Average
2492	37.57	-16.43	54	32.66	32.3	6.18	33.57	153	91	Average
2492	46.95	-27.05	74	42.04	32.3	6.18	33.57	153	91	Peak
8394	55.83	-18.17	74	43.38	35.58	10.96	34.09	100	33	Peak
8394	42.57	-11.43	54	30.12	35.58	10.96	34.09	100	33	Average
9668	45.63	-41.64	87.27	78.26	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 35	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.8	-3.2	40	49.31	18.4	0.55	31.46	100	193	Peak
96.42	38.85	-4.65	43.5	59.64	9.76	0.98	31.53	-	-	Peak
250.05	35.48	-10.52	46	52.59	12.77	1.53	31.41	-	-	Peak
374.2	29.51	-16.49	46	43.23	15.44	2.09	31.25	-	-	Peak
500.2	30.66	-15.34	46	41.1	18.18	2.45	31.07	-	-	Peak
750.1	34.1	-11.9	46	40.22	21.52	3.06	30.7	-	-	Peak
2389.61	52.09	-1.91	54	47.41	32.18	6.03	33.53	100	163	Average
2389.61	70.55	-3.45	74	65.87	32.18	6.03	33.53	100	163	Peak
2417	109.5	-	-	104.76	32.22	6.07	33.55	100	163	Peak
2417	99.04	-	-	94.31	32.2	6.07	33.54	100	163	Average
2494	39.71	-14.29	54	34.8	32.3	6.18	33.57	100	163	Average
2494	51.06	-22.94	74	46.15	32.3	6.18	33.57	100	163	Peak
8382	56.08	-17.92	74	43.63	35.58	10.96	34.09	100	56	Peak
8382	43	-11	54	30.55	35.58	10.96	34.09	100	56	Average
9668	50.08	-39.42	89.5	82.71	-10.26	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 36	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.62	-3.38	40	48.59	18.95	0.54	31.46	100	286	Peak
45.93	36.22	-3.78	40	56.64	10.43	0.66	31.51	-	-	Peak
250.05	42.28	-3.72	46	59.39	12.77	1.53	31.41	-	-	Peak
335	37.47	-8.53	46	52.52	14.39	1.87	31.31	-	-	Peak
430.9	32.37	-13.63	46	44.5	16.75	2.25	31.13	-	-	Peak
794.2	34.04	-11.96	46	39.45	22.14	3.13	30.68	-	-	Peak
2390	54.37	-19.63	74	49.69	32.18	6.03	33.53	170	190	Peak
2390	39.71	-14.29	54	35.03	32.18	6.03	33.53	170	190	Average
2437	106.2	-	-	101.42	32.22	6.11	33.55	170	190	Peak
2437	95.21	-	-	90.41	32.24	6.11	33.55	170	190	Average
2484	39.61	-14.39	54	34.71	32.28	6.18	33.56	170	190	Average
2484	51.23	-22.77	74	46.33	32.28	6.18	33.56	170	190	Peak
8430	56.35	-17.65	74	43.87	35.59	10.98	34.09	100	94	Peak
8430	42.92	-11.08	54	30.44	35.59	10.98	34.09	100	94	Average
9748	43.81	-42.39	86.2	76.3	-10.1	11.93	34.32	100	0	Peak
12158	42.44	-31.56	74	73.11	-10.46	13.48	33.69	100	0	Peak





<b>Test Mode :</b>	Mode 36	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.59	-3.41	40	48.56	18.95	0.54	31.46	100	169	Peak
95.61	38.66	-4.84	43.5	59.45	9.76	0.98	31.53	-	-	Peak
250.05	36.98	-9.02	46	54.09	12.77	1.53	31.41	-	-	Peak
374.2	29.11	-16.89	46	42.83	15.44	2.09	31.25	-	-	Peak
500.2	33.64	-12.36	46	44.08	18.18	2.45	31.07	-	-	Peak
750.1	34.74	-11.26	46	40.86	21.52	3.06	30.7	-	-	Peak
2390	61.53	-12.47	74	56.85	32.18	6.03	33.53	100	163	Peak
2390	45.55	-8.45	54	40.87	32.18	6.03	33.53	100	163	Average
2437	110.08	-	-	105.3	32.22	6.11	33.55	100	163	Peak
2437	99.14	-	-	94.34	32.24	6.11	33.55	100	163	Average
2484	53.36	-20.64	74	48.46	32.28	6.18	33.56	100	163	Peak
2484	40.03	-13.97	54	35.13	32.28	6.18	33.56	100	163	Average
8301	55.8	-18.2	74	43.41	35.56	10.93	34.1	100	65	Peak
8301	42.33	-11.67	54	29.94	35.56	10.93	34.1	100	65	Average
9748	46.54	-43.54	90.08	79.03	-10.1	11.93	34.32	100	0	Peak
12185	40.13	-33.87	74	70.76	-10.48	13.49	33.64	100	0	Peak



<b>Test Mode :</b>	Mode 37	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.26	-3.74	40	48.23	18.95	0.54	31.46	100	206	Peak
84.81	35.48	-4.52	40	57.88	8.23	0.91	31.54	-	-	Peak
250.05	42.07	-3.93	46	59.18	12.77	1.53	31.41	-	-	Peak
323.8	38.08	-7.92	46	53.47	14.1	1.83	31.32	-	-	Peak
374.2	34.84	-11.16	46	48.56	15.44	2.09	31.25	-	-	Peak
875.4	36.27	-9.73	46	40.72	22.95	3.31	30.71	-	-	Peak
2380	47.97	-26.03	74	43.31	32.16	6.03	33.53	100	297	Peak
2380	35.86	-18.14	54	31.2	32.16	6.03	33.53	100	297	Average
2457	105.37	-	-	100.53	32.26	6.14	33.56	100	297	Peak
2457	94.74	-	-	89.9	32.26	6.14	33.56	100	297	Average
2485.18	43.36	-10.64	54	38.46	32.28	6.18	33.56	100	297	Average
2485.18	58.1	-15.9	74	53.2	32.28	6.18	33.56	100	297	Peak
8418	55.97	-18.03	74	43.51	35.58	10.97	34.09	100	331	Peak
8418	43.09	-10.91	54	30.63	35.58	10.97	34.09	100	331	Average
9828	40.96	-44.41	85.37	73.33	-9.96	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 37	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.45	-3.55	40	48.96	18.4	0.55	31.46	102	244	Peak
95.61	39.36	-4.14	43.5	60.15	9.76	0.98	31.53	-	-	Peak
250.05	36.29	-9.71	46	53.4	12.77	1.53	31.41	-	-	Peak
374.2	29.17	-16.83	46	42.89	15.44	2.09	31.25	-	-	Peak
500.2	31.39	-14.61	46	41.83	18.18	2.45	31.07	-	-	Peak
750.1	36.06	-9.94	46	42.18	21.52	3.06	30.7	-	-	Peak
2390	54.63	-19.37	74	49.95	32.18	6.03	33.53	100	163	Peak
2390	41.34	-12.66	54	36.66	32.18	6.03	33.53	100	163	Average
2457	109.48	-	-	104.68	32.24	6.11	33.55	100	163	Peak
2457	98.78	-	-	93.94	32.26	6.14	33.56	100	163	Average
2484.61	47.02	-6.98	54	42.12	32.28	6.18	33.56	100	163	Average
2484.61	63.81	-10.19	74	58.91	32.28	6.18	33.56	100	163	Peak
8370	56.04	-17.96	74	43.6	35.58	10.95	34.09	100	66	Peak
8370	42.55	-11.45	54	30.11	35.58	10.95	34.09	100	66	Average
9828	40.81	-48.67	89.48	73.18	-9.96	11.89	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 38	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.8	-3.2	40	48.77	18.95	0.54	31.46	100	156	Peak
46.74	35.91	-4.09	40	56.81	9.94	0.67	31.51	-	-	Peak
250.05	42.35	-3.65	46	59.46	12.77	1.53	31.41	-	-	Peak
323.8	38.49	-7.51	46	53.88	14.1	1.83	31.32	-	-	Peak
430.9	32.44	-13.56	46	44.57	16.75	2.25	31.13	-	-	Peak
794.9	34.85	-11.15	46	40.25	22.15	3.13	30.68	-	-	Peak
2388	47.69	-26.31	74	43.01	32.18	6.03	33.53	102	298	Peak
2388	36.2	-17.8	54	31.52	32.18	6.03	33.53	102	298	Average
2462	92.15	-	-	87.31	32.26	6.14	33.56	102	298	Average
2462	102.23	-	-	97.39	32.26	6.14	33.56	102	298	Peak
2483.66	56.73	-17.27	74	51.83	32.28	6.18	33.56	102	298	Peak
2483.66	40.61	-13.39	54	35.71	32.28	6.18	33.56	102	298	Average
8406	56.39	-17.61	74	43.93	35.58	10.97	34.09	100	132	Peak
8406	42.73	-11.27	54	30.27	35.58	10.97	34.09	100	132	Average



<b>Test Mode :</b>	Mode 38	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.32	-3.68	40	48.83	18.4	0.55	31.46	100	158	Peak
96.42	38.04	-5.46	43.5	58.83	9.76	0.98	31.53	-	-	Peak
250.05	36.32	-9.68	46	53.43	12.77	1.53	31.41	-	-	Peak
374.2	30.03	-15.97	46	43.75	15.44	2.09	31.25	-	-	Peak
500.2	33.31	-12.69	46	43.75	18.18	2.45	31.07	-	-	Peak
750.1	34.16	-11.84	46	40.28	21.52	3.06	30.7	-	-	Peak
2380	51.14	-22.86	74	46.48	32.16	6.03	33.53	127	164	Peak
2380	38.63	-15.37	54	33.97	32.16	6.03	33.53	127	164	Average
2462	95.06	-	-	90.22	32.26	6.14	33.56	127	164	Average
2462	106.2	-	-	101.36	32.26	6.14	33.56	127	164	Peak
2483.5	63.21	-10.79	74	58.31	32.28	6.18	33.56	127	164	Peak
2483.5	46.63	-7.37	54	41.73	32.28	6.18	33.56	127	164	Average
8457	56.4	-17.6	74	43.9	35.59	10.99	34.08	100	111	Peak
8457	42.49	-11.51	54	29.99	35.59	10.99	34.08	100	111	Average
9848	41.98	-44.22	86.2	74.3	-9.9	11.88	34.3	100	0	Peak



<b>Test Mode :</b>	Mode 39	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.74	-3.26	40	49.25	18.4	0.55	31.46	100	178	Peak
83.46	35.63	-4.37	40	58.31	7.96	0.9	31.54	-	-	Peak
250.05	42.19	-3.81	46	59.3	12.77	1.53	31.41	-	-	Peak
335	37.75	-8.25	46	52.8	14.39	1.87	31.31	-	-	Peak
374.2	35.53	-10.47	46	49.25	15.44	2.09	31.25	-	-	Peak
875.4	36.17	-9.83	46	40.62	22.95	3.31	30.71	-	-	Peak
2388.85	72.56	-1.44	74	67.88	32.18	6.03	33.53	132	127	Peak
2388.85	51.69	-2.31	54	47.01	32.18	6.03	33.53	132	127	Average
2412	108.73	-	-	104	32.2	6.07	33.54	132	127	Peak
2412	98.52	-	-	93.79	32.2	6.07	33.54	132	127	Average
2500	38.6	-15.4	54	33.69	32.3	6.18	33.57	132	127	Average
2500	47.78	-26.22	74	42.87	32.3	6.18	33.57	132	127	Peak
8430	56.17	-17.83	74	43.69	35.59	10.98	34.09	100	112	Peak
8430	42.14	-11.86	54	29.66	35.59	10.98	34.09	100	112	Average
9648	38.33	-50.4	88.73	71	-10.3	11.98	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 39	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.9	-3.1	40	49.41	18.4	0.55	31.46	100	164	Peak
95.61	38.38	-5.12	43.5	59.17	9.76	0.98	31.53	-	-	Peak
250.05	35.18	-10.82	46	52.29	12.77	1.53	31.41	-	-	Peak
374.2	29.69	-16.31	46	43.41	15.44	2.09	31.25	-	-	Peak
500.2	32.19	-13.81	46	42.63	18.18	2.45	31.07	-	-	Peak
750.1	33.81	-12.19	46	39.93	21.52	3.06	30.7	-	-	Peak
2389.99	69.29	-4.71	74	64.61	32.18	6.03	33.53	100	12	Peak
2389.99	50.95	-3.05	54	46.27	32.18	6.03	33.53	100	12	Average
2412	108.49	-	-	103.76	32.2	6.07	33.54	100	12	Peak
2412	98.05	-	-	93.32	32.2	6.07	33.54	100	12	Average
2500	41.7	-12.3	54	36.79	32.3	6.18	33.57	100	12	Average
2500	50.55	-23.45	74	45.64	32.3	6.18	33.57	100	12	Peak
8253	56.04	-17.96	74	43.68	35.55	10.91	34.1	100	55	Peak
8253	42.48	-11.52	54	30.12	35.55	10.91	34.1	100	55	Average
9648	42.44	-46.05	88.49	75.12	-10.32	11.99	34.35	100	0	Peak



<b>Test Mode :</b>	Mode 40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.56	-3.44	40	49.07	18.4	0.55	31.46	100	259	Peak
83.46	35.21	-4.79	40	57.89	7.96	0.9	31.54	-	-	Peak
250.05	42.44	-3.56	46	59.55	12.77	1.53	31.41	-	-	Peak
335	39.19	-6.81	46	54.24	14.39	1.87	31.31	-	-	Peak
663.3	29.64	-16.36	46	37.07	20.56	2.87	30.86	-	-	Peak
794.2	34.57	-11.43	46	39.98	22.14	3.13	30.68	-	-	Peak
2388.85	61.72	-12.28	74	57.04	32.18	6.03	33.53	131	127	Peak
2388.85	45.38	-8.62	54	40.7	32.18	6.03	33.53	131	127	Average
2417	108.89	-	-	104.15	32.22	6.07	33.55	131	127	Peak
2417	98.44	-	-	93.71	32.2	6.07	33.54	131	127	Average
2500	38.58	-15.42	54	33.67	32.3	6.18	33.57	131	127	Average
2500	47.34	-26.66	74	42.43	32.3	6.18	33.57	131	127	Peak
8349	55.75	-18.25	74	43.33	35.57	10.95	34.1	100	94	Peak
8349	42.45	-11.55	54	30.03	35.57	10.95	34.1	100	94	Average





<b>Test Mode :</b>	Mode 40	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	02	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2417 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.4	-3.6	40	48.91	18.4	0.55	31.46	100	142	Peak
95.61	39.54	-3.96	43.5	60.33	9.76	0.98	31.53	-	-	Peak
215.22	34.39	-9.11	43.5	55.4	9.07	1.39	31.47	-	-	Peak
374.2	28.98	-17.02	46	42.7	15.44	2.09	31.25	-	-	Peak
500.2	34.96	-11.04	46	45.4	18.18	2.45	31.07	-	-	Peak
750.1	32.93	-13.07	46	39.05	21.52	3.06	30.7	-	-	Peak
2389.99	60.74	-13.26	74	56.06	32.18	6.03	33.53	125	11	Peak
2389.99	44.4	-9.6	54	39.72	32.18	6.03	33.53	125	11	Average
2417	107.33	-	-	102.59	32.22	6.07	33.55	125	11	Peak
2417	97.13	-	-	92.4	32.2	6.07	33.54	125	11	Average
2494	39.55	-14.45	54	34.64	32.3	6.18	33.57	125	11	Average
2494	49.88	-24.12	74	44.97	32.3	6.18	33.57	125	11	Peak
8310	56.07	-17.93	74	43.67	35.56	10.94	34.1	100	30	Peak
8310	43.02	-10.98	54	30.62	35.56	10.94	34.1	100	30	Average
9668	45.92	-41.41	87.33	70.68	0	11.98	36.74	100	0	Peak



<b>Test Mode :</b>	Mode 41	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.88	-3.12	40	48.85	18.95	0.54	31.46	100	105	Peak
45.93	35.67	-4.33	40	56.09	10.43	0.66	31.51	-	-	Peak
250.05	42.13	-3.87	46	59.24	12.77	1.53	31.41	-	-	Peak
323.8	38.25	-7.75	46	53.64	14.1	1.83	31.32	-	-	Peak
374.2	34.47	-11.53	46	48.19	15.44	2.09	31.25	-	-	Peak
875.4	36.09	-9.91	46	40.54	22.95	3.31	30.71	-	-	Peak
2390	56.39	-17.61	74	51.71	32.18	6.03	33.53	132	126	Peak
2390	43.73	-10.27	54	39.05	32.18	6.03	33.53	132	126	Average
2437	96.4	-	-	91.6	32.24	6.11	33.55	132	126	Average
2437	107.46	-	-	102.66	32.24	6.11	33.55	132	126	Peak
2484	48.28	-25.72	74	43.38	32.28	6.18	33.56	132	126	Peak
2484	38.74	-15.26	54	33.84	32.28	6.18	33.56	132	126	Average
8433	55.79	-18.21	74	43.31	35.59	10.98	34.09	100	33	Peak
8433	42.16	-11.84	54	29.68	35.59	10.98	34.09	100	33	Average



<b>Test Mode :</b>	Mode 41	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.7	36.17	-3.83	40	49.24	17.84	0.56	31.47	100	173	Peak
96.42	38.21	-5.29	43.5	59	9.76	0.98	31.53	-	-	Peak
250.05	35.73	-10.27	46	52.84	12.77	1.53	31.41	-	-	Peak
374.2	29.14	-16.86	46	42.86	15.44	2.09	31.25	-	-	Peak
500.2	30.66	-15.34	46	41.1	18.18	2.45	31.07	-	-	Peak
750.1	34.38	-11.62	46	40.5	21.52	3.06	30.7	-	-	Peak
2390	55.13	-18.87	74	50.45	32.18	6.03	33.53	100	164	Peak
2390	42.85	-11.15	54	38.17	32.18	6.03	33.53	100	164	Average
2437	95.99	-	-	91.19	32.24	6.11	33.55	100	164	Average
2437	106.45	-	-	101.67	32.22	6.11	33.55	100	164	Peak
2492	52.59	-21.41	74	47.68	32.3	6.18	33.57	100	164	Peak
2492	41.86	-12.14	54	36.95	32.3	6.18	33.57	100	164	Average
8289	56.48	-17.52	74	44.09	35.56	10.93	34.1	100	65	Peak
8289	42.71	-11.29	54	30.32	35.56	10.93	34.1	100	65	Average
9748	41.22	-45.23	86.45	73.73	-10.12	11.94	34.33	100	0	Peak



<b>Test Mode :</b>	Mode 42	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.56	-3.44	40	48.53	18.95	0.54	31.46	103	136	Peak
46.74	35.04	-4.96	40	55.94	9.94	0.67	31.51	-	-	Peak
250.05	40.84	-5.16	46	57.95	12.77	1.53	31.41	-	-	Peak
310.5	37.9	-8.1	46	53.69	13.74	1.79	31.32	-	-	Peak
430.9	30.84	-15.16	46	42.97	16.75	2.25	31.13	-	-	Peak
794.2	34.93	-11.07	46	40.34	22.14	3.13	30.68	-	-	Peak
2340	46.96	-27.04	74	42.42	32.11	5.95	33.52	100	297	Peak
2340	36.06	-17.94	54	31.52	32.11	5.95	33.52	100	297	Average
2457	94.43	-	-	89.59	32.26	6.14	33.56	100	297	Average
2457	105.01	-	-	100.17	32.26	6.14	33.56	100	297	Peak
2488.41	55.78	-18.22	74	50.87	32.3	6.18	33.57	100	297	Peak
2488.41	41.03	-12.97	54	36.12	32.3	6.18	33.57	100	297	Average
8277	56.03	-17.97	74	43.65	35.56	10.92	34.1	100	36	Peak
8277	42.58	-11.42	54	30.2	35.56	10.92	34.1	100	36	Average



<b>Test Mode :</b>	Mode 42	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	10	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2457 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.25	-3.75	40	48.76	18.4	0.55	31.46	100	127	Peak
95.61	38.22	-5.28	43.5	59.01	9.76	0.98	31.53	-	-	Peak
187.41	35.14	-8.36	43.5	56.43	8.96	1.27	31.52	-	-	Peak
500.2	34.23	-11.77	46	44.67	18.18	2.45	31.07	-	-	Peak
663.3	31.45	-14.55	46	38.88	20.56	2.87	30.86	-	-	Peak
750.1	35.73	-10.27	46	41.85	21.52	3.06	30.7	-	-	Peak
2372	50.24	-23.76	74	45.62	32.16	5.99	33.53	100	34	Peak
2372	39.03	-14.97	54	34.41	32.16	5.99	33.53	100	34	Average
2457	96.31	-	-	91.47	32.26	6.14	33.56	100	34	Average
2457	107.22	-	-	102.42	32.24	6.11	33.55	100	34	Peak
2484.61	58.93	-15.07	74	54.03	32.28	6.18	33.56	100	34	Peak
2484.61	44.15	-9.85	54	39.25	32.28	6.18	33.56	100	34	Average
8370	56.06	-17.94	74	43.62	35.58	10.95	34.09	100	222	Peak
8370	42.1	-11.9	54	29.66	35.58	10.95	34.09	100	222	Average



<b>Test Mode :</b>	Mode 43	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.84	-3.16	40	49.35	18.4	0.55	31.46	-	-	Peak
83.73	34.98	-5.02	40	57.66	7.96	0.9	31.54	-	-	Peak
250.05	42.94	-3.06	46	60.05	12.77	1.53	31.41	100	146	Peak
323.8	38	-8	46	53.39	14.1	1.83	31.32	-	-	Peak
430.9	31.94	-14.06	46	44.07	16.75	2.25	31.13	-	-	Peak
663.3	29.41	-16.59	46	36.84	20.56	2.87	30.86	-	-	Peak
2326	47.68	-26.32	74	43.18	32.09	5.92	33.51	100	298	Peak
2326	34.75	-19.25	54	30.25	32.09	5.92	33.51	100	298	Average
2462	93.52	-	-	88.68	32.26	6.14	33.56	100	298	Average
2462	103.28	-	-	98.44	32.26	6.14	33.56	100	298	Peak
2483.66	61.7	-12.3	74	56.8	32.28	6.18	33.56	100	298	Peak
2483.66	45.04	-8.96	54	40.14	32.28	6.18	33.56	100	298	Average
8337	56.14	-17.86	74	43.72	35.57	10.95	34.1	100	22	Peak
8337	42.46	-11.54	54	30.04	35.57	10.95	34.1	100	22	Average



<b>Test Mode :</b>	Mode 43	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.12	-3.88	40	48.63	18.4	0.55	31.46	100	79	Peak
95.61	38.09	-5.41	43.5	58.88	9.76	0.98	31.53	-	-	Peak
211.98	34.02	-9.48	43.5	55.1	9.02	1.37	31.47	-	-	Peak
374.2	29.45	-16.55	46	43.17	15.44	2.09	31.25	-	-	Peak
500.2	31.41	-14.59	46	41.85	18.18	2.45	31.07	-	-	Peak
750.1	32.62	-13.38	46	38.74	21.52	3.06	30.7	-	-	Peak
2388	49.17	-24.83	74	44.49	32.18	6.03	33.53	100	37	Peak
2388	37.17	-16.83	54	32.49	32.18	6.03	33.53	100	37	Average
2462	94.05	-	-	89.21	32.26	6.14	33.56	100	37	Average
2462	105.36	-	-	100.52	32.26	6.14	33.56	100	37	Peak
2484.42	64.94	-9.06	74	60.04	32.28	6.18	33.56	100	37	Peak
2484.42	47.14	-6.86	54	42.24	32.28	6.18	33.56	100	37	Average
8322	56.25	-17.75	74	43.84	35.57	10.94	34.1	100	99	Peak
8322	42.74	-11.26	54	30.33	35.57	10.94	34.1	100	99	Average



<b>Test Mode :</b>	Mode 44	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	03	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2422 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	36.1	-3.9	40	47.52	19.51	0.53	31.46	100	151	Peak
83.46	34.89	-5.11	40	57.57	7.96	0.9	31.54	-	-	Peak
240.06	36.44	-9.56	46	54.73	11.6	1.53	31.42	-	-	Peak
323.8	37.21	-8.79	46	52.6	14.1	1.83	31.32	-	-	Peak
430.9	31.42	-14.58	46	43.55	16.75	2.25	31.13	-	-	Peak
794.2	34.69	-11.31	46	40.1	22.14	3.13	30.68	-	-	Peak
2376.69	67.44	-6.56	74	62.82	32.16	5.99	33.53	133	129	Peak
2376.69	50.46	-3.54	54	45.84	32.16	5.99	33.53	133	129	Average
2422	103.72	-	-	98.99	32.2	6.07	33.54	133	129	Peak
2422	91.79	-	-	87.05	32.22	6.07	33.55	133	129	Average
2500	38.2	-15.8	54	33.29	32.3	6.18	33.57	133	129	Average
2500	46.88	-27.12	74	41.97	32.3	6.18	33.57	133	129	Peak
8370	55.97	-18.03	74	43.53	35.58	10.95	34.09	100	94	Peak
8370	42.1	-11.9	54	29.66	35.58	10.95	34.09	100	94	Average





<b>Test Mode :</b>	Mode 44	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	03	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2422 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.71	-3.29	40	48.68	18.95	0.54	31.46	100	138	Peak
95.61	37.19	-6.31	43.5	57.98	9.76	0.98	31.53	-	-	Peak
213.33	34.03	-9.47	43.5	55.09	9.03	1.38	31.47	-	-	Peak
374.2	29.12	-16.88	46	42.84	15.44	2.09	31.25	-	-	Peak
500.2	31.16	-14.84	46	41.6	18.18	2.45	31.07	-	-	Peak
750.1	32.26	-13.74	46	38.38	21.52	3.06	30.7	-	-	Peak
2387.9	65.37	-8.63	74	60.69	32.18	6.03	33.53	100	10	Peak
2387.9	48.51	-5.49	54	43.83	32.18	6.03	33.53	100	10	Average
2422	101.57	-	-	96.84	32.2	6.07	33.54	100	10	Peak
2422	89.93	-	-	85.19	32.22	6.07	33.55	100	10	Average
2500	41.67	-12.33	54	36.76	32.3	6.18	33.57	100	10	Average
2500	49.93	-24.07	74	45.02	32.3	6.18	33.57	100	10	Peak
8337	56.05	-17.95	74	43.63	35.57	10.95	34.1	100	73	Peak
8337	43.08	-10.92	54	30.66	35.57	10.95	34.1	100	73	Average



<b>Test Mode :</b>	Mode 45	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	04	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2427 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.92	-3.08	40	48.89	18.95	0.54	31.46	100	144	Peak
83.46	35.26	-4.74	40	57.94	7.96	0.9	31.54	-	-	Peak
191.73	37.36	-6.14	43.5	58.67	8.9	1.29	31.5	-	-	Peak
310.5	37.97	-8.03	46	53.76	13.74	1.79	31.32	-	-	Peak
430.9	30.98	-15.02	46	43.11	16.75	2.25	31.13	-	-	Peak
794.9	35.13	-10.87	46	40.53	22.15	3.13	30.68	-	-	Peak
2386.57	69.49	-4.51	74	64.81	32.18	6.03	33.53	133	128	Peak
2386.57	50.68	-3.32	54	46	32.18	6.03	33.53	133	128	Average
2427	103.31	-	-	98.58	32.2	6.07	33.54	133	128	Peak
2427	92.42	-	-	87.68	32.22	6.07	33.55	133	128	Average
2484	37.95	-16.05	54	33.05	32.28	6.18	33.56	133	128	Average
2484	48.14	-25.86	74	43.24	32.28	6.18	33.56	133	128	Peak
8406	55.23	-18.77	74	42.77	35.58	10.97	34.09	100	123	Peak
8406	42.89	-11.11	54	30.43	35.58	10.97	34.09	100	123	Average



<b>Test Mode :</b>	Mode 45	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	04	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2427 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.74	-3.26	40	48.71	18.95	0.54	31.46	103	179	Peak
95.61	37.12	-6.38	43.5	57.91	9.76	0.98	31.53	-	-	Peak
208.74	35.12	-8.38	43.5	56.29	8.95	1.35	31.47	-	-	Peak
500.2	30.6	-15.4	46	41.04	18.18	2.45	31.07	-	-	Peak
666.1	30.44	-15.56	46	37.84	20.58	2.87	30.85	-	-	Peak
750.1	35.18	-10.82	46	41.3	21.52	3.06	30.7	-	-	Peak
2389.99	65.91	-8.09	74	61.23	32.18	6.03	33.53	104	34	Peak
2389.99	50.1	-3.9	54	45.42	32.18	6.03	33.53	104	34	Average
2427	102.63	-	-	97.89	32.22	6.07	33.55	104	34	Peak
2427	91.25	-	-	86.51	32.22	6.07	33.55	104	34	Average
2484	36.22	-17.78	54	31.32	32.28	6.18	33.56	104	34	Average
2484	49.5	-24.5	74	44.6	32.28	6.18	33.56	104	34	Peak
8466	55.59	-18.41	74	43.09	35.59	10.99	34.08	100	111	Peak
8466	43.82	-10.18	54	31.32	35.59	10.99	34.08	100	111	Average



<b>Test Mode :</b>	Mode 46	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	36.74	-3.26	40	48.16	19.51	0.53	31.46	101	222	Peak
83.46	34.78	-5.22	40	57.46	7.96	0.9	31.54	-	-	Peak
250.05	42.36	-3.64	46	59.47	12.77	1.53	31.41	-	-	Peak
323.8	37.82	-8.18	46	53.21	14.1	1.83	31.32	-	-	Peak
430.9	30.62	-15.38	46	42.75	16.75	2.25	31.13	-	-	Peak
665.4	29.47	-16.53	46	36.88	20.57	2.87	30.85	-	-	Peak
2390	68.03	-5.97	74	63.35	32.18	6.03	33.53	126	129	Peak
2390	50.27	-3.73	54	45.59	32.18	6.03	33.53	126	129	Average
2437	93.84	-	-	89.04	32.24	6.11	33.55	126	129	Average
2437	105.82	-	-	101.08	32.22	6.07	33.55	126	129	Peak
2484	61.72	-12.28	74	56.82	32.28	6.18	33.56	126	129	Peak
2484	45.54	-8.46	54	40.64	32.28	6.18	33.56	126	129	Average
8310	56.12	-17.88	74	43.72	35.56	10.94	34.1	100	46	Peak
8310	42.39	-11.61	54	29.99	35.56	10.94	34.1	100	46	Average



<b>Test Mode :</b>	Mode 46	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.12	-3.88	40	48.09	18.95	0.54	31.46	100	116	Peak
95.61	38.26	-5.24	43.5	59.05	9.76	0.98	31.53	-	-	Peak
250.05	35.7	-10.3	46	52.81	12.77	1.53	31.41	-	-	Peak
374.2	29.17	-16.83	46	42.89	15.44	2.09	31.25	-	-	Peak
663.3	31.72	-14.28	46	39.15	20.56	2.87	30.86	-	-	Peak
780.2	28.59	-17.41	46	34.23	21.94	3.11	30.69	-	-	Peak
2390	65.46	-8.54	74	60.78	32.18	6.03	33.53	104	34	Peak
2390	48.98	-5.02	54	44.3	32.18	6.03	33.53	104	34	Average
2437	92.83	-	-	88.03	32.24	6.11	33.55	104	34	Average
2437	104.1	-	-	99.36	32.22	6.07	33.55	104	34	Peak
2484	59.92	-14.08	74	55.02	32.28	6.18	33.56	104	34	Peak
2484	43.87	-10.13	54	38.97	32.28	6.18	33.56	104	34	Average
8394	55.67	-18.33	74	43.22	35.58	10.96	34.09	100	122	Peak
8394	42.13	-11.87	54	29.68	35.58	10.96	34.09	100	122	Average



<b>Test Mode :</b>	Mode 47	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	08	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2447 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.81	-3.19	40	48.78	18.95	0.54	31.46	100	150	Peak
83.46	34.79	-5.21	40	57.47	7.96	0.9	31.54	-	-	Peak
250.05	42.58	-3.42	46	59.69	12.77	1.53	31.41	-	-	Peak
310.5	38.28	-7.72	46	54.07	13.74	1.79	31.32	-	-	Peak
374.2	34.59	-11.41	46	48.31	15.44	2.09	31.25	-	-	Peak
528.2	27.07	-18.93	46	36.87	18.71	2.51	31.02	-	-	Peak
2380	58.94	-15.06	74	54.28	32.16	6.03	33.53	130	125	Peak
2380	43.33	-10.67	54	38.67	32.16	6.03	33.53	130	125	Average
2447	92.73	-	-	87.93	32.24	6.11	33.55	130	125	Average
2447	105.4	-	-	100.6	32.24	6.11	33.55	130	125	Peak
2483.5	63.39	-10.61	74	58.49	32.28	6.18	33.56	130	125	Peak
2483.5	48.79	-5.21	54	43.89	32.28	6.18	33.56	130	125	Average
8370	55.94	-18.06	74	43.5	35.58	10.95	34.09	100	99	Peak
8370	42.33	-11.67	54	29.89	35.58	10.95	34.09	100	99	Average



<b>Test Mode :</b>	Mode 47	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	08	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2447 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.26	-3.74	40	48.23	18.95	0.54	31.46	102	190	Peak
96.42	37.53	-5.97	43.5	58.32	9.76	0.98	31.53	-	-	Peak
215.22	36.06	-7.44	43.5	57.07	9.07	1.39	31.47	-	-	Peak
374.2	30.13	-15.87	46	43.85	15.44	2.09	31.25	-	-	Peak
500.2	33.34	-12.66	46	43.78	18.18	2.45	31.07	-	-	Peak
750.1	35.24	-10.76	46	41.36	21.52	3.06	30.7	-	-	Peak
2390	57.47	-16.53	74	52.79	32.18	6.03	33.53	100	33	Peak
2390	41.98	-12.02	54	37.3	32.18	6.03	33.53	100	33	Average
2447	91.66	-	-	86.86	32.24	6.11	33.55	100	33	Average
2447	102.71	-	-	97.91	32.24	6.11	33.55	100	33	Peak
2485.18	66.69	-7.31	74	61.79	32.28	6.18	33.56	100	33	Peak
2485.18	50.24	-3.76	54	45.34	32.28	6.18	33.56	100	33	Average
8430	55.9	-18.1	74	43.42	35.59	10.98	34.09	100	46	Peak
8430	42.27	-11.73	54	29.79	35.59	10.98	34.09	100	46	Average



<b>Test Mode :</b>	Mode 48	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	09	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2452 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.94	-3.06	40	48.91	18.95	0.54	31.46	100	140	Peak
83.46	34.89	-5.11	40	57.57	7.96	0.9	31.54	-	-	Peak
250.05	41.82	-4.18	46	58.93	12.77	1.53	31.41	-	-	Peak
310.5	37.72	-8.28	46	53.51	13.74	1.79	31.32	-	-	Peak
374.2	34.68	-11.32	46	48.4	15.44	2.09	31.25	-	-	Peak
803.3	37.19	-8.81	46	42.47	22.25	3.15	30.68	-	-	Peak
2390	56.54	-17.46	74	51.86	32.18	6.03	33.53	100	126	Peak
2390	40.71	-13.29	54	36.03	32.18	6.03	33.53	100	126	Average
2452	104.11	-	-	99.31	32.24	6.11	33.55	100	126	Peak
2452	88.1	-	-	83.3	32.24	6.11	33.55	100	126	Average
2483.5	45.74	-8.26	54	40.84	32.28	6.18	33.56	100	126	Average
2483.5	61.19	-12.81	74	56.29	32.28	6.18	33.56	100	126	Peak
8361	56.35	-17.65	74	43.92	35.57	10.95	34.09	100	99	Peak
8361	42.61	-11.39	54	30.18	35.57	10.95	34.09	100	99	Average





<b>Test Mode :</b>	Mode 48	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	09	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2452 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	36.87	-3.13	40	48.84	18.95	0.54	31.46	100	106	Peak
95.61	37.99	-5.51	43.5	58.78	9.76	0.98	31.53	-	-	Peak
188.22	34.4	-9.1	43.5	55.7	8.94	1.27	31.51	-	-	Peak
374.2	29.68	-16.32	46	43.4	15.44	2.09	31.25	-	-	Peak
500.2	34.24	-11.76	46	44.68	18.18	2.45	31.07	-	-	Peak
750.1	34.94	-11.06	46	41.06	21.52	3.06	30.7	-	-	Peak
2372	51.44	-22.56	74	46.82	32.16	5.99	33.53	100	34	Peak
2372	39.31	-14.69	54	34.69	32.16	5.99	33.53	100	34	Average
2452	101.11	-	-	96.27	32.26	6.14	33.56	100	34	Peak
2452	85.52	-	-	80.72	32.24	6.11	33.55	100	34	Average
2484	46.75	-7.25	54	41.85	32.28	6.18	33.56	100	34	Average
2484	64.57	-9.43	74	59.67	32.28	6.18	33.56	100	34	Peak
8358	55.81	-18.19	74	43.38	35.57	10.95	34.09	100	52	Peak
8358	42.59	-11.41	54	30.16	35.57	10.95	34.09	100	52	Average



<b>Test Mode :</b>	Mode 49	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.55	-3.45	40	48.52	18.95	0.54	31.46	100	180	Peak
83.73	35.02	-4.98	40	57.7	7.96	0.9	31.54	-	-	Peak
191.73	35.7	-7.8	43.5	57.01	8.9	1.29	31.5	-	-	Peak
250.05	41.8	-4.2	46	58.91	12.77	1.53	31.41	-	-	Peak
323.8	38.43	-7.57	46	53.82	14.1	1.83	31.32	-	-	Peak
430.9	31.67	-14.33	46	43.8	16.75	2.25	31.13	-	-	Peak
794.2	35.35	-10.65	46	40.76	22.14	3.13	30.68	-	-	Peak
5725	71.33	-9.46	80.79	62.43	34.82	9.92	35.84	100	7	Peak
5745	100.79	-	-	91.87	34.84	9.91	35.83	100	7	Peak
5745	90.4	-	-	81.48	34.84	9.91	35.83	100	7	Average
5850	50.51	-30.28	80.79	41.47	34.94	9.87	35.77	100	7	Peak
8316	56.07	-17.93	74	43.67	35.56	10.94	34.1	100	111	Peak
8316	42.53	-11.47	54	30.13	35.56	10.94	34.1	100	111	Average
11490	39.62	-34.38	74	69.74	-9.7	13.14	33.56	100	0	Peak
17235	46.56	-34.23	80.79	73.16	-8.65	14.38	32.33	100	0	Peak



<b>Test Mode :</b>	Mode 49	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.62	-3.38	40	48.59	18.95	0.54	31.46	100	173	Peak
95.34	37.48	-6.02	43.5	58.42	9.61	0.98	31.53	-	-	Peak
250.05	34.98	-11.02	46	52.09	12.77	1.53	31.41	-	-	Peak
374.2	29.63	-16.37	46	43.35	15.44	2.09	31.25	-	-	Peak
500.2	33.92	-12.08	46	44.36	18.18	2.45	31.07	-	-	Peak
750.1	34.41	-11.59	46	40.53	21.52	3.06	30.7	-	-	Peak
5725	77.65	-9.69	87.34	68.75	34.82	9.92	35.84	168	348	Peak
5745	107.34	-	-	98.42	34.84	9.91	35.83	168	348	Peak
5745	97.22	-	-	88.3	34.84	9.91	35.83	168	348	Average
5850	54.18	-33.16	87.34	45.14	34.94	9.87	35.77	168	348	Peak
8446	56.29	-17.71	74	43.81	35.59	10.98	34.09	100	44	Peak
8446	42.93	-11.07	54	30.45	35.59	10.98	34.09	100	44	Average
11490	44.7	-29.3	74	74.82	-9.7	13.14	33.56	100	0	Peak
17235	44.47	-42.87	87.34	71.08	-8.65	14.37	32.33	100	0	Peak



<b>Test Mode :</b>	Mode 50	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.69	-3.31	40	49.2	18.4	0.55	31.46	-	-	Peak
83.73	35.18	-4.82	40	57.86	7.96	0.9	31.54	-	-	Peak
250.05	42.98	-3.02	46	60.09	12.77	1.53	31.41	100	157	Peak
321.7	39.04	-6.96	46	54.49	14.05	1.82	31.32	-	-	Peak
478.5	28.9	-17.1	46	39.87	17.72	2.37	31.06	-	-	Peak
666.1	30.15	-15.85	46	37.55	20.58	2.87	30.85	-	-	Peak
5725	52.1	-28.95	81.05	43.2	34.82	9.92	35.84	111	10	Peak
5785	101.05	-	-	92.07	34.89	9.89	35.8	111	10	Peak
5785	90.53	-	-	81.56	34.88	9.9	35.81	111	10	Average
5850	49.87	-31.18	81.05	40.83	34.94	9.87	35.77	111	10	Peak
8438	56.13	-17.87	74	43.65	35.59	10.98	34.09	100	55	Peak
8438	42.44	-11.56	54	29.96	35.59	10.98	34.09	100	55	Average
11570	38.47	-35.53	74	68.7	-9.8	13.18	33.61	100	0	Peak
17355	46.74	-34.31	81.05	73.31	-8.67	14.42	32.32	100	0	Peak



<b>Test Mode :</b>	Mode 50	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.45	-3.55	40	48.96	18.4	0.55	31.46	100	172	Peak
95.61	38.81	-4.69	43.5	59.6	9.76	0.98	31.53	-	-	Peak
250.05	34.63	-11.37	46	51.74	12.77	1.53	31.41	-	-	Peak
374.2	29.29	-16.71	46	43.01	15.44	2.09	31.25	-	-	Peak
500.2	31.43	-14.57	46	41.87	18.18	2.45	31.07	-	-	Peak
750.1	35.18	-10.82	46	41.3	21.52	3.06	30.7	-	-	Peak
5725	52.97	-35.57	88.54	44.07	34.82	9.92	35.84	200	353	Peak
5785	108.54	-	-	99.57	34.88	9.9	35.81	200	353	Peak
5785	97.83	-	-	88.86	34.88	9.9	35.81	200	353	Average
5850	53	-35.54	88.54	43.96	34.94	9.87	35.77	200	353	Peak
8428	56.19	-17.81	74	43.71	35.59	10.98	34.09	100	195	Peak
8428	41.65	-12.35	54	29.17	35.59	10.98	34.09	100	195	Average
11570	44.74	-29.26	74	74.98	-9.81	13.18	33.61	100	0	Peak
17355	50.12	-38.42	88.54	76.7	-8.67	14.41	32.32	100	0	Peak



<b>Test Mode :</b>	Mode 51	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.89	-3.11	40	49.4	18.4	0.55	31.46	102	313	Peak
42.42	36.54	-3.46	40	55.22	12.18	0.64	31.5	-	-	Peak
250.05	41.16	-4.84	46	58.27	12.77	1.53	31.41	-	-	Peak
309.8	37.22	-8.78	46	53.04	13.72	1.79	31.33	-	-	Peak
374.2	34.68	-11.32	46	48.4	15.44	2.09	31.25	-	-	Peak
663.3	29.88	-16.12	46	37.31	20.56	2.87	30.86	-	-	Peak
5725	49.08	-32.04	81.12	40.18	34.82	9.92	35.84	123	12	Peak
5825	101.12	-	-	92.09	34.93	9.88	35.78	123	12	Peak
5825	90.02	-	-	80.99	34.93	9.88	35.78	123	12	Average
5850	63.33	-17.79	81.12	54.29	34.94	9.87	35.77	123	12	Peak
8300	55.86	-18.14	74	43.47	35.56	10.93	34.1	100	98	Peak
8300	42.52	-11.48	54	30.13	35.56	10.93	34.1	100	98	Average
11650	39.13	-34.87	74	69.47	-9.91	13.22	33.65	100	0	Peak
17475	49.51	-31.61	81.12	76.06	-8.7	14.45	32.3	100	0	Peak



<b>Test Mode :</b>	Mode 51	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.52	-3.48	40	48.49	18.95	0.54	31.46	132	105	Peak
95.61	39.42	-4.08	43.5	60.21	9.76	0.98	31.53	-	-	Peak
207.66	34.94	-8.56	43.5	56.13	8.93	1.35	31.47	-	-	Peak
374.2	28.62	-17.38	46	42.34	15.44	2.09	31.25	-	-	Peak
500.2	31.35	-14.65	46	41.79	18.18	2.45	31.07	-	-	Peak
750.1	35.56	-10.44	46	41.68	21.52	3.06	30.7	-	-	Peak
5725	51.45	-37.75	89.2	42.55	34.82	9.92	35.84	164	357	Peak
5825	109.2	-	-	100.17	34.93	9.88	35.78	164	357	Peak
5825	99.23	-	-	90.2	34.93	9.88	35.78	164	357	Average
5850	73.48	-15.72	89.2	64.44	34.94	9.87	35.77	164	357	Peak
8438	55.65	-18.35	74	43.17	35.59	10.98	34.09	100	23	Peak
8438	43	-11	54	30.52	35.59	10.98	34.09	100	23	Average
11650	45.6	-28.4	74	75.94	-9.91	13.22	33.65	100	0	Peak
17475	48.81	-40.39	89.2	75.36	-8.7	14.45	32.3	100	0	Peak



<b>Test Mode :</b>	Mode 52	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.81	-3.19	40	49.32	18.4	0.55	31.46	105	77	Peak
83.46	35.48	-4.52	40	58.16	7.96	0.9	31.54	-	-	Peak
250.05	42.21	-3.79	46	59.32	12.77	1.53	31.41	-	-	Peak
310.5	38.73	-7.27	46	54.52	13.74	1.79	31.32	-	-	Peak
374.2	34.89	-11.11	46	48.61	15.44	2.09	31.25	-	-	Peak
875.4	36.3	-9.7	46	40.75	22.95	3.31	30.71	-	-	Peak
5725	63.73	-14.34	78.07	54.83	34.82	9.92	35.84	102	6	Peak
5745	98.07	-	-	89.15	34.84	9.91	35.83	102	6	Peak
5745	87.87	-	-	78.95	34.84	9.91	35.83	102	6	Average
5850	49.98	-28.09	78.07	40.94	34.94	9.87	35.77	102	6	Peak
8348	55.82	-18.18	74	43.4	35.57	10.95	34.1	100	33	Peak
8348	42.88	-11.12	54	30.46	35.57	10.95	34.1	100	33	Average
17235	41.13	-36.94	78.07	67.74	-8.65	14.37	32.33	100	0	Peak





<b>Test Mode :</b>	Mode 52	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	149	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5745 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.51	-3.49	40	48.48	18.95	0.54	31.46	114	202	Peak
95.61	38.51	-4.99	43.5	59.3	9.76	0.98	31.53	-	-	Peak
187.14	35.24	-8.26	43.5	56.53	8.96	1.27	31.52	-	-	Peak
374.2	30.26	-15.74	46	43.98	15.44	2.09	31.25	-	-	Peak
500.2	31.7	-14.3	46	42.14	18.18	2.45	31.07	-	-	Peak
750.1	33.9	-12.1	46	40.02	21.52	3.06	30.7	-	-	Peak
5725	68.08	-16.78	84.86	59.18	34.82	9.92	35.84	172	308	Peak
5745	94.72	-	-	85.8	34.84	9.91	35.83	172	308	Average
5745	104.86	-	-	95.94	34.84	9.91	35.83	172	308	Peak
5850	50.79	-34.07	84.86	41.75	34.94	9.87	35.77	172	308	Peak
8390	56.01	-17.99	74	43.56	35.58	10.96	34.09	100	331	Peak
8390	42.74	-11.26	54	30.29	35.58	10.96	34.09	100	331	Average
11490	38.7	-35.3	74	68.82	-9.7	13.14	33.56	100	0	Peak
17235	45.33	-39.53	84.86	71.94	-8.65	14.37	32.33	100	0	Peak



<b>Test Mode :</b>	Mode 53	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	36.88	-3.12	40	48.85	18.95	0.54	31.46	100	108	Peak
45.66	34.94	-5.06	40	55.36	10.43	0.66	31.51	-	-	Peak
250.05	41.3	-4.7	46	58.41	12.77	1.53	31.41	-	-	Peak
321.7	37.75	-8.25	46	53.2	14.05	1.82	31.32	-	-	Peak
478.5	28.69	-17.31	46	39.66	17.72	2.37	31.06	-	-	Peak
794.2	34.17	-11.83	46	39.58	22.14	3.13	30.68	-	-	Peak
5725	49.07	-31.68	80.75	40.17	34.82	9.92	35.84	102	25	Peak
5785	100.75	-	-	91.77	34.89	9.89	35.8	102	25	Peak
5785	90.02	-	-	81.05	34.88	9.9	35.81	102	25	Average
5850	49.47	-31.28	80.75	40.43	34.94	9.87	35.77	102	25	Peak
8332	55.87	-18.13	74	43.45	35.57	10.95	34.1	100	22	Peak
8332	41.9	-12.1	54	29.48	35.57	10.95	34.1	100	22	Average
17355	40.33	-40.42	80.75	66.91	-8.67	14.41	32.32	100	0	Peak



<b>Test Mode :</b>	Mode 53	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	157	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5785 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.65	-3.35	40	49.16	18.4	0.55	31.46	121	349	Peak
95.61	37.99	-5.51	43.5	58.78	9.76	0.98	31.53	-	-	Peak
215.22	35.12	-8.38	43.5	56.13	9.07	1.39	31.47	-	-	Peak
374.2	28.82	-17.18	46	42.54	15.44	2.09	31.25	-	-	Peak
500.2	33.57	-12.43	46	44.01	18.18	2.45	31.07	-	-	Peak
750.1	34.52	-11.48	46	40.64	21.52	3.06	30.7	-	-	Peak
5725	50.64	-34.94	85.58	41.74	34.82	9.92	35.84	164	347	Peak
5785	95.28	-	-	86.31	34.88	9.9	35.81	164	347	Average
5785	105.58	-	-	96.6	34.89	9.89	35.8	164	347	Peak
5850	51.53	-34.05	85.58	42.49	34.94	9.87	35.77	164	347	Peak
8246	55.99	-18.01	74	43.64	35.55	10.91	34.11	100	31	Peak
8246	42.14	-11.86	54	29.79	35.55	10.91	34.11	100	31	Average
17355	44.22	-41.36	85.58	70.8	-8.67	14.41	32.32	100	0	Peak



<b>Test Mode :</b>	Mode 54	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.03	-3.97	40	48.54	18.4	0.55	31.46	104	89	Peak
83.73	35.48	-4.52	40	58.16	7.96	0.9	31.54	-	-	Peak
250.05	41.43	-4.57	46	58.54	12.77	1.53	31.41	-	-	Peak
321.7	38.31	-7.69	46	53.76	14.05	1.82	31.32	-	-	Peak
374.2	34.87	-11.13	46	48.59	15.44	2.09	31.25	-	-	Peak
875.4	36.3	-9.7	46	40.75	22.95	3.31	30.71	-	-	Peak
5725	49.45	-28.47	77.92	40.55	34.82	9.92	35.84	100	24	Peak
5825	97.92	-	-	88.89	34.93	9.88	35.78	100	24	Peak
5825	87.94	-	-	78.91	34.93	9.88	35.78	100	24	Average
5850	54.48	-23.44	77.92	45.44	34.94	9.87	35.77	100	24	Peak
8358	55.6	-18.4	74	43.17	35.57	10.95	34.09	100	212	Peak
8358	42.12	-11.88	54	29.69	35.57	10.95	34.09	100	212	Average
17475	41.07	-36.85	77.92	67.62	-8.7	14.45	32.3	100	0	Peak



<b>Test Mode :</b>	Mode 54	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	165	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5825 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.46	-3.54	40	48.97	18.4	0.55	31.46	126	107	Peak
95.61	38.57	-4.93	43.5	59.36	9.76	0.98	31.53	-	-	Peak
214.41	34.77	-8.73	43.5	55.81	9.05	1.38	31.47	-	-	Peak
250.05	35.72	-10.28	46	52.83	12.77	1.53	31.41	-	-	Peak
310.5	29.02	-16.98	46	44.81	13.74	1.79	31.32	-	-	Peak
500.2	33.72	-12.28	46	44.16	18.18	2.45	31.07	-	-	Peak
875.4	32.77	-13.23	46	37.22	22.95	3.31	30.71	-	-	Peak
5725	50.69	-36.63	87.32	41.79	34.82	9.92	35.84	126	353	Peak
5825	96.98	-	-	87.95	34.93	9.88	35.78	126	353	Average
5825	107.32	-	-	98.29	34.93	9.88	35.78	126	353	Peak
5850	64	-23.32	87.32	54.96	34.94	9.87	35.77	126	353	Peak
8390	56.15	-17.85	74	43.7	35.58	10.96	34.09	100	98	Peak
8390	42.15	-11.85	54	29.7	35.58	10.96	34.09	100	98	Average
17475	43.92	-43.4	87.32	70.47	-8.7	14.45	32.3	100	0	Peak



<b>Test Mode :</b>	Mode 55	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5755 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.56	-3.44	40	49.07	18.4	0.55	31.46	100	128	Peak
42.69	35.82	-4.18	40	54.5	12.18	0.64	31.5	-	-	Peak
250.05	42.49	-3.51	46	59.6	12.77	1.53	31.41	-	-	Peak
321.7	38.31	-7.69	46	53.76	14.05	1.82	31.32	-	-	Peak
430.9	31.53	-14.47	46	43.66	16.75	2.25	31.13	-	-	Peak
875.4	36.19	-9.81	46	40.64	22.95	3.31	30.71	-	-	Peak
5725	60.3	-17.93	78.23	51.4	34.82	9.92	35.84	103	25	Peak
5755	98.23	-	-	89.29	34.86	9.9	35.82	103	25	Peak
5755	85.95	-	-	77	34.86	9.91	35.82	103	25	Average
5850	50.28	-27.95	78.23	41.24	34.94	9.87	35.77	103	25	Peak
8396	56.12	-17.88	74	43.67	35.58	10.96	34.09	100	333	Peak
8396	42.14	-11.86	54	29.69	35.58	10.96	34.09	100	333	Average



<b>Test Mode :</b>	Mode 55	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	151	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5755 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.81	36.51	-3.49	40	48.48	18.95	0.54	31.46	144	116	Peak
95.61	39.36	-4.14	43.5	60.15	9.76	0.98	31.53	-	-	Peak
250.05	35.25	-10.75	46	52.36	12.77	1.53	31.41	-	-	Peak
374.2	30.04	-15.96	46	43.76	15.44	2.09	31.25	-	-	Peak
500.2	31.81	-14.19	46	42.25	18.18	2.45	31.07	-	-	Peak
750.1	34.73	-11.27	46	40.85	21.52	3.06	30.7	-	-	Peak
5725	66.82	-14.16	80.98	57.92	34.82	9.92	35.84	120	304	Peak
5755	88.14	-	-	79.19	34.86	9.91	35.82	120	304	Average
5755	100.98	-	-	92.03	34.86	9.91	35.82	120	304	Peak
5850	51.63	-29.35	80.98	42.59	34.94	9.87	35.77	120	304	Peak
8422	56.37	-17.63	74	43.9	35.59	10.97	34.09	100	66	Peak
8422	42.36	-11.64	54	29.89	35.59	10.97	34.09	100	66	Average



<b>Test Mode :</b>	Mode 56	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	159	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	5795 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.89	36.35	-3.65	40	48.86	18.4	0.55	31.46	100	255	Peak
83.73	35.25	-4.75	40	57.93	7.96	0.9	31.54	-	-	Peak
250.05	39.32	-6.68	46	56.43	12.77	1.53	31.41	-	-	Peak
430.9	32.24	-13.76	46	44.37	16.75	2.25	31.13	-	-	Peak
478.5	28.73	-17.27	46	39.7	17.72	2.37	31.06	-	-	Peak
875.4	36.77	-9.23	46	41.22	22.95	3.31	30.71	-	-	Peak
5725	50	-28.87	78.87	41.1	34.82	9.92	35.84	102	25	Peak
5795	86.01	-	-	77.03	34.89	9.89	35.8	102	25	Average
5795	98.87	-	-	89.9	34.88	9.9	35.81	102	25	Peak
5850	50.32	-28.55	78.87	41.28	34.94	9.87	35.77	102	25	Peak
8374	56.03	-17.97	74	43.59	35.58	10.95	34.09	100	92	Peak
8374	42.23	-11.77	54	29.79	35.58	10.95	34.09	100	92	Average





<b>Test Mode :</b>	Mode 56	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	159	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	David Yang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	5795 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.62	36.36	-3.64	40	48.87	18.4	0.55	31.46	136	177	Peak
96.42	38.57	-4.93	43.5	59.36	9.76	0.98	31.53	-	-	Peak
190.38	35.15	-8.35	43.5	56.46	8.92	1.28	31.51	-	-	Peak
374.2	29.88	-16.12	46	43.6	15.44	2.09	31.25	-	-	Peak
500.2	31.6	-14.4	46	42.04	18.18	2.45	31.07	-	-	Peak
750.1	35.23	-10.77	46	41.35	21.52	3.06	30.7	-	-	Peak
5725	53.19	-28.99	82.18	44.29	34.82	9.92	35.84	128	360	Peak
5795	91.51	-	-	82.53	34.89	9.89	35.8	128	360	Average
5795	102.18	-	-	93.2	34.89	9.89	35.8	128	360	Peak
5850	54.57	-27.61	82.18	45.53	34.94	9.87	35.77	128	360	Peak
8422	55.74	-18.26	74	43.27	35.59	10.97	34.09	100	19	Peak
8422	41.93	-12.07	54	29.46	35.59	10.97	34.09	100	19	Average



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.8.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna with I-PEX connector and it is considered to meet antenna requirement.

### **3.8.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101329	9kHz~30GHz	Apr. 26, 2010	Apr. 25, 2011	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	N/A	Feb. 25, 2010	Feb. 24, 2011	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	N/A	Feb. 25, 2010	Feb. 24, 2011	Conducted (TH02-HY)
Receiver	R&S	ESCS 30	838251/00 3	9 kHz~2.75 GHz	Apr. 16, 2010	Apr. 15, 2011	Conduction (CO01-LK)
LISN	Rolf Heine	NNB-2/16Z	98087	9 kHz~30 MHz	Oct. 07, 2009	Oct. 06, 2010	Conduction (CO01-LK)
RF Cable-CON	Suhner Switzerland	RG223/U	CB017	9 kHz~30 MHz	Nov. 04, 2009	Nov. 03, 2010	Conduction (CO01-LK)
ISN	TESEQ GMBH	T400A	24853	9kHz ~30MHz	Nov. 11, 2009	Nov. 10, 2010	Conduction (CO01-LK)
ISN	TESEQ GMBH	T800	24558	150kHz ~ 230MHz	Oct. 13, 2009	Oct. 12, 2010	Conduction (CO01-LK)
ISN	TESEQ GMBH	ST08	24347	150kHz ~ 230MHz	Sep. 14, 2010	Sep. 13, 2011	Conduction (CO01-LK)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A023 62	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 27, 2010	Mar. 26, 2011	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/00 1	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP082617 as below.