


NOTES: UNLESS OTHERWISE SPECIFIED)

1. MUST CONFORM TO UL969 MARKING & LABELING SYSTEM PGDQ2; VAL-THERM-D OR EQUIVALENT.
2. ALL TEXT AND GRAPHICS ARE BLACK.
3. CE, GITEKI & KOREAN MARK HAVE MINIMUM HEIGHT OF 5mm.
4. The diameter of the C-Tick mark has a minimum requirement of 3mm and the suppliers identification characters has a minimum height requirement of 1mm
5. For UAE mark, "TRA" min height 3mm, all other characters min height 2mm
6. For So. Africa mark, the ICASA logo min requirement is 3 x 3 mm

| REV | DATE | DESCRIPTION |
|-----|----------|-----------------|
| 1 | 03/10/14 | Initial Release |
| 2 | 09/03/14 | Release to MVT |
| | | |

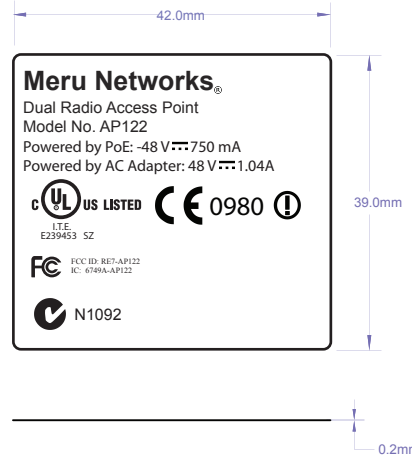

SCALE 1:1

| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES | | | TITLE | | | | | |
|--|--------|--------|--|----------------|---|-------|--------------|--------------------|
| ANG | 2 PLCS | 3 PLCS | Label, Regulatory 1, AP122 P | | | | | |
| ±1.5° | ±.05 | ±.010 | | | | | | |
| DO NOT SCALE THIS DRAWING | | | THIRD ANGLE PROJECTION | | MERU NETWORKS PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS | | | |
| 1:1 | | | ENG DATE | HS 09/03/14 | DRAWING NUMBER 845-00901 | SHEET | REV/REL 1 | DWG SIZE C2/A1R |
| PROFILE NAME | | | | | | | | |