



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

January 9, 2014

Meru Networks, Inc.
894 Ross Dr.
Sunnyvale, CA 94089

Dear Rajendran Chary,

Enclosed is the EMC Wireless test report for compliance testing of the Meru Networks, Inc., AP832e and AP822e as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15, Subpart B and ICES-003, Issue 5 August 2012 for Unintentional Radiators and Part 15.407 and Industry Canada RSS-210, Annex 9, Issue 8, December 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Meru Networks, Inc.\EMCS37430A-FCC407 (UNII 1) Rev. 6)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

**Meru Networks, Inc.
Model AP832e and AP822e**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
FCC Part 15.407 & RSS-210, Annex 9
for Intentional Radiators

MET Report: EMCS37430A-FCC407 (UNII 1) Rev. 6

January 9, 2014

Prepared For:

**Meru Networks, Inc.
894 Ross Dr.
Sunnyvale, CA 94089**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

**Meru Networks, Inc.
Model AP832e and AP822e**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
FCC Part 15.407 & RSS-210, Annex 9
for Intentional Radiators



Jonathan Chao, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules and Industry Canada standards ICES-003, Issue 5 August 2012, RSS-210 Annex 9 under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	March 15, 2013	Initial Issue.
1	April 3, 2013	Revised to reflect engineer corrections.
2	April 15, 2013	Revised to reflect engineer corrections.
3	April 16, 2013	Revised to reflect engineer corrections.
4	April 17, 2013	Revised to add note to Radiated Emissions section.
5	July 1, 2013	Revised to add appendix.
6	January 9, 2014	Revised to add additional model number.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	7
	F. Support Equipment	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	7
	I. Method of Monitoring EUT Operation	8
	J. Modifications.....	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT.....	8
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	9
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emissions Limits.....	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	21
	§ 15.203 Antenna Requirement	22
	§ 15.207(a) Conducted Emissions Limits.....	24
	§ 15.403(c) 26dB Bandwidth	29
	§ 15.407(a)(1) RF Power Output.....	48
	§ 15.407(a)(1) Peak Power Spectral Density.....	51
	§ 15.407(a)(6) Peak Excursion Ratio	61
	§ 15.407(b) Undesirable Emissions.....	70
	Co-location	134
	§ 15.407(f) RF Exposure	149
	§ 15.407(g) Frequency Stability	150
	RSS-GEN Receiver Spurious Emissions.....	155
V.	Test Equipment	159
VI.	Certification & User's Manual Information.....	161
	A. Certification Information	162
	B. Label and User's Manual Information	166
VII.	Appendix.....	168

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	5
Table 4. Equipment Configuration	7
Table 5. Support Equipment.....	7
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	10
Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC-DC Power Supply	11
Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC-DC Power Supply	12
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE	13
Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE	14
Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 12. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits	16
Table 13. Radiated Emissions Limits, Test Results, ICES-003 Limits	18
Table 14. Radiated Emissions, Test Results, Above 1 GHz.....	20
Table 15. Antenna List	22
Table 16. Additional Antennas.....	23
Table 17. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	24
Table 18. Conducted Emissions, 15.207(a), Phase Line, Test Results, AC-DC Power Supply	25
Table 19. Conducted Emissions, 15.207(a), Neutral Line, Test Results, AC-DC Power Supply.....	26
Table 20. Conducted Emissions, 15.207(a), Phase Line, Test Results, PoE	27
Table 21. Conducted Emissions, 15.207(a), Neutral Line, Test Results, PoE.....	28
Table 22. 26 dB Occupied Bandwidth, Test Results	30
Table 23. 99% Occupied Bandwidth, Test Results	31
Table 24. RF Output Power, Test Results, 2 dBi Omni Antenna	48
Table 25. RF Output Power, Test Results, 6 dBi Omni Antenna	49
Table 26. RF Output Power, Test Results, 4 dBi Ceiling Antenna	49
Table 27. RF Output Power, Test Results, 7 dBi Patch Antenna	50
Table 28. Peak Power Spectral Density, 2dBi Antenna, Test Results	51
Table 29. Peak Power Spectral Density, 4 dBi Antenna, Test Results	52
Table 30. Peak Power Spectral Density, 6 dBi Antenna, Test Results	52
Table 31. Peak Power Spectral Density, 7 dBi Antenna, Test Results	52
Table 32. Spurious Emission Limits for Receivers	155
Table 33. Test Equipment List	160

List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
Figure 2. Occupied Bandwidth, Test Setup	29
Figure 3. Power Output Test Setup	48
Figure 4. Power Spectral Density Test Setup	51
Figure 5. Peak Excursion Ration Test Setup	61
Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup	155

List of Plots

Plot 1. Conducted Emission, Phase Line Plot, AC-DC Power Supply.....	11
Plot 2. Conducted Emission, Neutral Line Plot, AC-DC Power Supply	12
Plot 3. Conducted Emission, Phase Line Plot, PoE	13
Plot 4. Conducted Emission, Neutral Line Plot, PoE	14
Plot 5. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits, AC-DC Power Supply	16
Plot 6. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits, PoE.....	17
Plot 7. Radiated Emissions, ICES-003 Limits, AC-DC Power Supply	18
Plot 8. Radiated Emissions, ICES-003 Limits, PoE	19
Plot 9. Radiated Emissions, Above 1 GHz	20
Plot 10. Conducted Emissions, 15.207(a), Phase Line, AC-DC Power Supply	25
Plot 11. Conducted Emissions, 15.207(a), Neutral Line, AC-DC Power Supply.....	26
Plot 12. Conducted Emissions, 15.207(a), Phase Line, PoE	27
Plot 13. Conducted Emissions, 15.207(a), Neutral Line, PoE.....	28
Plot 14. 26 dB Occupied Bandwidth, 802.11a, Port 1, Low Channel	32
Plot 15. 26 dB Occupied Bandwidth, 802.11a, Port 1, Mid Channel.....	32
Plot 16. 26 dB Occupied Bandwidth, 802.11a, Port 1, High Channel.....	32
Plot 17. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1, Low Channel	33
Plot 18. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1, Mid Channel.....	33
Plot 19. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1, High Channel	33
Plot 20. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2, Low Channel	34
Plot 21. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2, Mid Channel.....	34
Plot 22. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2, High Channel	34
Plot 23. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3, Low Channel	35
Plot 24. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3, Mid Channel.....	35
Plot 25. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3, High Channel	35
Plot 26. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 1, Low Channel	36
Plot 27. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 1, High Channel	36
Plot 28. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 2, Low Channel	37
Plot 29. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 2, High Channel	37
Plot 30. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 3, Low Channel	38
Plot 31. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 3, High Channel	38
Plot 32. 26 dB Occupied Bandwidth, 802.11n 80 MHz, Port 1.....	39
Plot 33. 26 dB Occupied Bandwidth, 802.11n 80 MHz, Port 2.....	39
Plot 34. 26 dB Occupied Bandwidth, 802.11n 80 MHz, Port 3.....	39
Plot 35. 99% Occupied Bandwidth, 802.11a, Port 1, Low Channel.....	40
Plot 36. 99% Occupied Bandwidth, 802.11a, Port 1, Mid Channel	40
Plot 37. 99% Occupied Bandwidth, 802.11a, Port 1, High Channel	40
Plot 38. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 1, Low Channel	41
Plot 39. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 1, Mid Channel.....	41
Plot 40. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 1, High Channel.....	41
Plot 41. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 2, Low Channel	42
Plot 42. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 2, Mid Channel.....	42
Plot 43. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 2, High Channel.....	42
Plot 44. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 3, Low Channel	43
Plot 45. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 3, Mid Channel.....	43
Plot 46. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 3, High Channel.....	43
Plot 47. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 1, Low Channel	44
Plot 48. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 1, High Channel.....	44
Plot 49. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 2, Low Channel	45
Plot 50. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 2, High Channel.....	45
Plot 51. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 3, Low Channel	46
Plot 52. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 3, High Channel.....	46

Plot 53. 99% Occupied Bandwidth, 802.11n 80 MHz, Port 1	47
Plot 54. 99% Occupied Bandwidth, 802.11n 80 MHz, Port 2	47
Plot 55. 99% Occupied Bandwidth, 802.11n 80 MHz, Port 3	47
Plot 56. Power Spectral Density, Low Channel, 802.11a	53
Plot 57. Power Spectral Density, Mid Channel, 802.11a	53
Plot 58. Power Spectral Density, High Channel, 802.11a	53
Plot 59. Power Spectral Density, Low Channel, 802.11n 20 MHz, Port 1	54
Plot 60. Power Spectral Density, Mid Channel, 802.11n 20 MHz, Port 1	54
Plot 61. Power Spectral Density, High Channel, 802.11n 20 MHz, Port 1	54
Plot 62. Power Spectral Density, Low Channel, 802.11n 20 MHz, Port 2	55
Plot 63. Power Spectral Density, Mid Channel, 802.11n 20 MHz, Port 2	55
Plot 64. Power Spectral Density, High Channel, 802.11n 20 MHz, Port 2	55
Plot 65. Power Spectral Density, Low Channel, 802.11n 20 MHz, Port 3	56
Plot 66. Power Spectral Density, Mid Channel, 802.11n 20 MHz, Port 3	56
Plot 67. Power Spectral Density, High Channel, 802.11n 20 MHz, Port 3	56
Plot 68. Power Spectral Density, Low Channel, 802.11n 40 MHz, Port 1	57
Plot 69. Power Spectral Density, High Channel, 802.11n 40 MHz, Port 1	57
Plot 70. Power Spectral Density, Low Channel, 802.11n 40 MHz, Port 2	58
Plot 71. Power Spectral Density, High Channel, 802.11n 40 MHz, Port 2	58
Plot 72. Power Spectral Density, Low Channel, 802.11n 40 MHz, Port 3	59
Plot 73. Power Spectral Density, High Channel, 802.11n 40 MHz, Port 3	59
Plot 74. Power Spectral Density, 802.11n 80 MHz, Port 1	60
Plot 75. Power Spectral Density, 802.11n 80 MHz, Port 2	60
Plot 76. Power Spectral Density, 802.11n 80 MHz, Port 3	60
Plot 77. Peak Excursion Ratio, Low Channel, 802.11a	62
Plot 78. Peak Excursion Ratio, Mid Channel, 802.11a	62
Plot 79. Peak Excursion Ratio, High Channel, 802.11a	62
Plot 80. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz, Port 1	63
Plot 81. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz, Port 1	63
Plot 82. Peak Excursion Ratio, High Channel, 802.11n 20 MHz, Port 1	63
Plot 83. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz, Port 2	64
Plot 84. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz, Port 2	64
Plot 85. Peak Excursion Ratio, High Channel, 802.11n 20 MHz, Port 2	64
Plot 86. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz, Port 3	65
Plot 87. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz, Port 3	65
Plot 88. Peak Excursion Ratio, High Channel, 802.11n 20 MHz, Port 3	65
Plot 89. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz, Port 1	66
Plot 90. Peak Excursion Ratio, High Channel, 802.11n 40 MHz, Port 1	66
Plot 91. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz, Port 2	67
Plot 92. Peak Excursion Ratio, High Channel, 802.11n 40 MHz, Port 2	67
Plot 93. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz, Port 3	68
Plot 94. Peak Excursion Ratio, High Channel, 802.11n 40 MHz, Port 3	68
Plot 95. Peak Excursion Ratio, 802.11n 80 MHz, Port 1	69
Plot 96. Peak Excursion Ratio, 802.11n 80 MHz, Port 2	69
Plot 97. Peak Excursion Ratio, 802.11n 80 MHz, Port 3	69
Plot 98. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz, 7 dBi Patch	71
Plot 99. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch	71
Plot 100. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch	71
Plot 101. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz, 7 dBi Patch	72
Plot 102. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz, 7 dBi Patch	72
Plot 103. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch	72
Plot 104. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch	73
Plot 105. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz, 7 dBi Patch	73
Plot 106. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz, 7 dBi Patch	73
Plot 107. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch	74
Plot 108. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch	74

Plot 109. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz, 7 dBi Patch.....	74
Plot 110. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz, 7 dBi Patch	75
Plot 111. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch.....	75
Plot 112. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch	75
Plot 113. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz, 7 dBi Patch.....	76
Plot 114. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz, 7 dBi Patch.....	76
Plot 115. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch	76
Plot 116. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch.....	77
Plot 117. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz, 7 dBi Patch.....	77
Plot 118. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz, 7 dBi Patch.....	77
Plot 119. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch.....	78
Plot 120. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch.....	78
Plot 121. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz, 7 dBi Patch	78
Plot 122. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz, 7 dBi Patch	79
Plot 123. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch.....	79
Plot 124. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch	79
Plot 125. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz, 7 dBi Patch.....	80
Plot 126. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz, 7 dBi Patch.....	80
Plot 127. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch.....	80
Plot 128. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch.....	81
Plot 129. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, 7 dBi Patch	81
Plot 130. Radiated Spurious Emissions, 802.11n 80 MHz, 30 MHz – 1 GHz, 7 dBi Patch.....	82
Plot 131. Radiated Spurious Emissions, 802.11n 80 MHz, 1 GHz – 7 GHz, Average, 7 dBi Patch	82
Plot 132. Radiated Spurious Emissions, 802.11n 80 MHz, 1 GHz – 7 GHz, Peak, 7 dBi Patch.....	82
Plot 133. Radiated Spurious Emissions, 802.11n 80 MHz, 7 GHz – 18 GHz, 7 dBi	83
Plot 134. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz, Ceiling	84
Plot 135. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Average, Ceiling.....	84
Plot 136. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling	84
Plot 137. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz, Ceiling	85
Plot 138. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz, Ceiling	85
Plot 139. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Average, Ceiling	85
Plot 140. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Peak, Ceiling.....	86
Plot 141. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz, Ceiling.....	86
Plot 142. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz, Ceiling.....	86
Plot 143. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Average, Ceiling.....	87
Plot 144. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Peak, Ceiling.....	87
Plot 145. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz, Ceiling	87
Plot 146. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz, Ceiling	88
Plot 147. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average, Ceiling	88
Plot 148. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling	88
Plot 149. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz, Ceiling.....	89
Plot 150. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz, Ceiling.....	89
Plot 151. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average, Ceiling	89
Plot 152. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak, Ceiling.....	90
Plot 153. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz, Ceiling	90
Plot 154. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz, Ceiling	90
Plot 155. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average, Ceiling.....	91
Plot 156. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak, Ceiling	91
Plot 157. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz, Ceiling	91
Plot 158. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz, Ceiling	92
Plot 159. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average, Ceiling	92
Plot 160. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling	92
Plot 161. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz, Ceiling.....	93
Plot 162. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz, Ceiling	93
Plot 163. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average, Ceiling.....	93
Plot 164. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak, Ceiling	94

Plot 165. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, Ceiling	94
Plot 166. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 30 MHz – 1 GHz, Ceiling	95
Plot 167. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Average, Ceiling	95
Plot 168. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling	95
Plot 169. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 7 GHz – 18 GHz, Ceiling.....	96
Plot 170. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz, Omni	97
Plot 171. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Average, Omni	97
Plot 172. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Peak, Omni	97
Plot 173. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz, Omni.....	98
Plot 174. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz, Omni.....	98
Plot 175. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Average, Omni	98
Plot 176. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Peak, Omni.....	99
Plot 177. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz, Omni	99
Plot 178. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz, Omni	99
Plot 179. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Average, Omni.....	100
Plot 180. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Peak, Omni	100
Plot 181. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz, Omni	100
Plot 182. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz, Omni.....	101
Plot 183. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average, Omni	101
Plot 184. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Omni.....	101
Plot 185. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz, Omni	102
Plot 186. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz, Omni	102
Plot 187. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average, Omni.....	102
Plot 188. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak, Omni	103
Plot 189. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz, Omni	103
Plot 190. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz, Omni	103
Plot 191. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average, Omni	104
Plot 192. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak, Omni	104
Plot 193. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz, Omni.....	104
Plot 194. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz, Omni.....	105
Plot 195. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average, Omni	105
Plot 196. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Omni.....	105
Plot 197. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz, Omni	106
Plot 198. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz, Omni	106
Plot 199. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average, Omni	106
Plot 200. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak, Omni	107
Plot 201. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, Omni.....	107
Plot 202. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 30 MHz – 1 GHz, Omni.....	108
Plot 203. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Average, Omni	108
Plot 204. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Omni.....	108
Plot 205. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 7 GHz – 18 GHz, Omni	109
Plot 206. Radiated Band Edge 802.11a, Low Channel, 7 dBi Patch Antenna (Band Edge @ 5150 MHz).....	110
Plot 207. Radiated Band Edge 802.11a, High Channel, 7 dBi Patch Antenna (Band Edge @ 5350 MHz)	110
Plot 208. Radiated Band Edge 802.11n 20 MHz, Low Channel, 7 dBi Patch Antenna (Band Edge @ 5150 MHz)	111
Plot 209. Radiated Band Edge 802.11n 20 MHz, High Channel, 7 dBi Patch Antenna (Band Edge @ 5350 MHz).....	111
Plot 210. Radiated Band Edge 802.11n 40 MHz, Low Channel, 7 dBi Patch Antenna (Band Edge @ 5150 MHz)	112
Plot 211. Radiated Band Edge 802.11n 40 MHz, High Channel, 7 dBi Patch Antenna (Band Edge @ 5350 MHz).....	112
Plot 212. Radiated Band Edge 802.11n 80 MHz, 7 dBi Patch Antenna (Band Edge @ 5150 MHz).....	113
Plot 213. Radiated Band Edge 802.11n 80 MHz, 7 dBi Patch Antenna (Band Edge @ 5350 MHz).....	113
Plot 214. Radiated Band Edge 802.11a, Low Channel, Ceiling Antenna (Band Edge @ 5150 MHz).....	114
Plot 215. Radiated Band Edge 802.11a, High Channel, Ceiling Antenna (Band Edge @ 5350 MHz).....	114
Plot 216. Radiated Band Edge 802.11n 20 MHz, Low Channel, Ceiling Antenna (Band Edge @ 5150 MHz)	115
Plot 217. Radiated Band Edge 802.11n 20 MHz, High Channel, Ceiling Antenna (Band Edge @ 5350 MHz).....	115
Plot 218. Radiated Band Edge 802.11n 40 MHz, Low Channel, Ceiling Antenna (Band Edge @ 5150 MHz)	116
Plot 219. Radiated Band Edge 802.11n 40 MHz, High Channel, Ceiling Antenna (Band Edge @ 5350 MHz).....	116
Plot 220. Radiated Band Edge 802.11n 80 MHz, Ceiling Antenna (Band Edge @ 5150 MHz).....	117

Plot 221. Radiated Band Edge 802.11n 80 MHz, Ceiling Antenna (Band Edge @ 5350 MHz).....	117
Plot 222. Radiated Band Edge 802.11a, Low Channel, Omni Antenna (Band Edge @ 5150 MHz)	118
Plot 223. Radiated Band Edge 802.11a, High Channel, Omni Antenna (Band Edge @ 5350 MHz).....	118
Plot 224. Radiated Band Edge 802.11n 20 MHz, Low Channel, Omni Antenna (Band Edge @ 5150 MHz).....	119
Plot 225. Radiated Band Edge 802.11n 20 MHz, High Channel, Omni Antenna (Band Edge @ 5350 MHz)	119
Plot 226. Radiated Band Edge 802.11n 40 MHz, Low Channel, Omni Antenna (Band Edge @ 5150 MHz).....	120
Plot 227. Radiated Band Edge 802.11n 40 MHz, High Channel, Omni Antenna (Band Edge @ 5350 MHz)	120
Plot 228. Radiated Band Edge 802.11n 80 MHz, Omni Antenna (Band Edge @ 5150 MHz)	121
Plot 229. Radiated Band Edge 802.11n 80 MHz, Omni Antenna (Band Edge @ 5350 MHz)	121
Plot 230. Restricted Band Edge, Patch Antenna, 802.11a, 5180 MHz, Low Channel, Average (4.5 - 5.2 GHz Span).....	122
Plot 231. Restricted Band Edge, Patch Antenna, 802.11a, 5180 MHz, Low Channel, Peak (4.5 - 5.2 GHz Span)	122
Plot 232. Restricted Band Edge, Patch Antenna, 802.11n 20 MHz, 5180 MHz, Low Channel, Average (4.5 - 5.2 GHz Span)	123
Plot 233. Restricted Band Edge, Patch Antenna, 802.11n 20 MHz, 5180 MHz, Low Channel, Peak (4.5 - 5.2 GHz Span)	123
Plot 234. Restricted Band Edge, Patch Antenna, 802.11n 40 MHz, 5190 MHz Low Channel, Average (4.5 - 5.22 GHz Span)	124
Plot 235. Restricted Band Edge, Patch Antenna, 802.11n 40 MHz, 5190 MHz, Low Channel, Peak (4.5 - 5.22 GHz Span)	124
Plot 236. Restricted Band Edge, Patch Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Average	125
Plot 237. Restricted Band Edge, Patch Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Peak.....	125
Plot 238. Restricted Band Edge, Ceiling Antenna, 802.11a 20 MHz, 5180 MHz, High @ 5150 MHz Edge, Average.....	126
Plot 239. Restricted Band Edge, Ceiling Antenna, 802.11a 20 MHz, 5180 MHz, High @ 5150 MHz Edge, Peak	126
Plot 240. Restricted Band Edge, Ceiling Antenna, 802.11n 20 MHz, 5180 MHz High @ 5150 MHz Edge, Average	127
Plot 241. Restricted Band Edge, Ceiling Antenna, 802.11n 20 MHz, 5180 MHz High @ 5150 MHz Edge, Peak	127
Plot 242. Restricted Band Edge, Ceiling Antenna, 802.11n 40 MHz, 5190 MHz High @ 5150 MHz Edge, Average	128
Plot 243. Restricted Band Edge, Ceiling Antenna, 802.11n 40 MHz, 5190 MHz High @ 5150 MHz Edge, Peak	128
Plot 244. Restricted Band Edge, Ceiling Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Average	129
Plot 245. Restricted Band Edge, Ceiling Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Peak	129
Plot 246. Restricted Band Edge, Omni Antenna, 802.11a 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Average.....	130
Plot 247. Restricted Band Edge, Omni Antenna, 802.11a 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Peak.....	130
Plot 248. Restricted Band Edge, Omni Antenna, 802.11n 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Average.....	131
Plot 249. Restricted Band Edge, Omni Antenna, 802.11n 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Peak	131
Plot 250. Restricted Band Edge, Omni Antenna, 802.11n 40 MHz, 5190 MHz Low @ 5150 MHz Edge, Average.....	132
Plot 251. Restricted Band Edge, Omni Antenna, 802.11n 40 MHz, 5190 MHz Low @ 5150 MHz Edge, Peak	132
Plot 252. Restricted Band Edge, Omni Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Average.....	133
Plot 253. Restricted Band Edge, Omni Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Peak.....	133
Plot 254. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 30 MHz – 1 GHz ...	135
Plot 255. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Average	135
Plot 256. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Peak	135
Plot 257. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 7 GHz – 18 GHz, Peak	136
Plot 258. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 30 MHz – 1 GHz ...	136
Plot 259. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Average	136
Plot 260. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Peak	137
Plot 261. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 7 GHz – 18 GHz, Peak	137
Plot 262. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 30 MHz – 1 GHz ...	137
Plot 263. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Average	138
Plot 264. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Peak	138

Plot 265. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 7 GHz – 18 GHz, Peak	138
Plot 266. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 30 MHz – 1 GHz ...	139
Plot 267. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 1 GHz – 7 GHz, Average	139
Plot 268. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 1 GHz – 7 GHz, Peak	139
Plot 269. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 7 GHz – 18 GHz, Peak	140
Plot 270. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 30 MHz – 1 GHz ...	140
Plot 271. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 1 GHz – 7 GHz, Average	140
Plot 272. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 1 GHz – 7 GHz, Peak	141
Plot 273. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 7 GHz – 18 GHz, Peak	141
Plot 274. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 30 MHz – 1 GHz ...	141
Plot 275. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 1 GHz – 7 GHz, Average	142
Plot 276. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 1 GHz – 7 GHz, Peak	142
Plot 277. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 7 GHz – 18 GHz, Peak	142
Plot 278. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 30 MHz – 1 GHz ...	143
Plot 279. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 1 GHz – 7 GHz, Average	143
Plot 280. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 1 GHz – 7 GHz, Peak	143
Plot 281. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 7 GHz – 18 GHz, Peak	144
Plot 282. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 30 MHz – 1 GHz....	145
Plot 283. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Average	145
Plot 284. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Peak	145
Plot 285. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 7 GHz – 18 GHz, Peak	146
Plot 286. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 30 MHz – 1 GHz....	146
Plot 287. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Average	146
Plot 288. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Peak	147
Plot 289. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 7 GHz – 18 GHz, Peak	147
Plot 290. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 30 MHz – 1 GHz....	147
Plot 291. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Average	148
Plot 292. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Peak	148
Plot 293. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 7 GHz – 18 GHz, Peak	148
Plot 294. Frequency Stability, 5150 – 5250 MHz, -30°C, 120 V	151
Plot 295. Frequency Stability, 5150 – 5250 MHz, -20°C, 120 V	151
Plot 296. Frequency Stability, 5150 – 5250 MHz, -10°C, 120 V	151
Plot 297. Frequency Stability, 5150 – 5250 MHz, 0°C, 120 V	152
Plot 298. Frequency Stability, 5150 – 5250 MHz, 10°C, 120 V	152

Plot 299. Frequency Stability, 5150 – 5250 MHz, 20°C, 108 V	152
Plot 300. Frequency Stability, 5150 – 5250 MHz, 20°C, 120 V	153
Plot 301. Frequency Stability, 5150 – 5250 MHz, 20°C, 132 V	153
Plot 302. Frequency Stability, 5150 – 5250 MHz, 30°C, 120 V	153
Plot 303. Frequency Stability, 5150 – 5250 MHz, 40°C, 120 V	154
Plot 304. Frequency Stability, 5150 – 5250 MHz, 50°C, 120 V	154
Plot 305. Frequency Stability, 5150 – 5250 MHz, 55°C, 120 V	154
Plot 306. Receiver Spurious Emission, 30 MHz – 1 GHz, Port 1	156
Plot 307. Receiver Spurious Emission, 1 GHz – 18 GHz, Port 1	156
Plot 308. Receiver Spurious Emission, 30 MHz – 1 GHz, Port 2	157
Plot 309. Receiver Spurious Emission, 1 GHz – 18 GHz, Port 2	157
Plot 310. Receiver Spurious Emission, 30 MHz – 1 GHz, Port 3	158
Plot 311. Receiver Spurious Emission, 1 GHz – 18 GHz, Port 3	158

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Meru Networks, Inc. AP832e and AP822e, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the AP832e and AP822e. Meru Networks, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the AP832e and AP822e, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Meru Networks, Inc., purchase order number 104838. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Industry Canada Reference	Description	Results
§15.107	ICES-003 Issue 5 August 2012	Conducted Emissions	Compliant
§15.109	ICES-003 Issue 5 August 2012	Radiated Emissions	Compliant
§15.203	RSS-GEN 7.1.4	Antenna Requirements	Compliant
§15.207	RSS-GEN 7.2.2; RSS-210 2.2	AC Conducted Emissions 150KHz – 30MHz	Compliant
§15.403 (i)	A8.2	26dB Occupied Bandwidth	Compliant
§15.407 (a)(2)	A9.2(3)	Conducted Transmitter Output Power	Compliant
§15.407 (a)(2)	A9.2(3)	Power Spectral Density	Compliant
§15.407 (a)(6)	N/A	Peak Excursion	Compliant
§15.407 (b)(2), (3), (5), (6)	A9.3(4)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Compliant
§15.407(f)	RSS-GEN	RF Exposure	Compliant
§15.407(g)	2.1	Frequency Stability	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Meru Networks, Inc. to perform testing on the AP832e and AP822e, under Meru Networks, Inc.'s purchase order number 104838.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Meru Networks, Inc. AP832e and AP822e.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	AP832e and AP822e	
Model(s) Covered:	AP832e and AP822e	
EUT Specifications:	Primary Power: 120 VAC, 60 Hz	
	FCC ID: RE7-AP832E	
	IC: 6749A-AP832E	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Peak RF Output Power:	15.97 dBm
	EUT Frequency Ranges:	5150-5250MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Jonathan Chao	
Report Date(s):	January 9, 2014	

Table 2. EUT Summary

B. References

CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
RSS-210, Issue 8, Dec. 2010	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
RSS-GEN, Issue 3, Dec. 2010	General Requirements and Information for the Certification of Radio Apparatus
ICES-003, Issue 5 August 2012	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Meru Networks, Inc. AP832e and AP822e, Equipment Under Test (EUT), is an 802.11AC wireless access point (WAP) that allows wireless devices to connect to a wired network using Wi-Fi, standard. The WAP usually connects to a router (via a wired network), and can relay data between the wireless devices (such as computers or printers) and wired devices on the network.

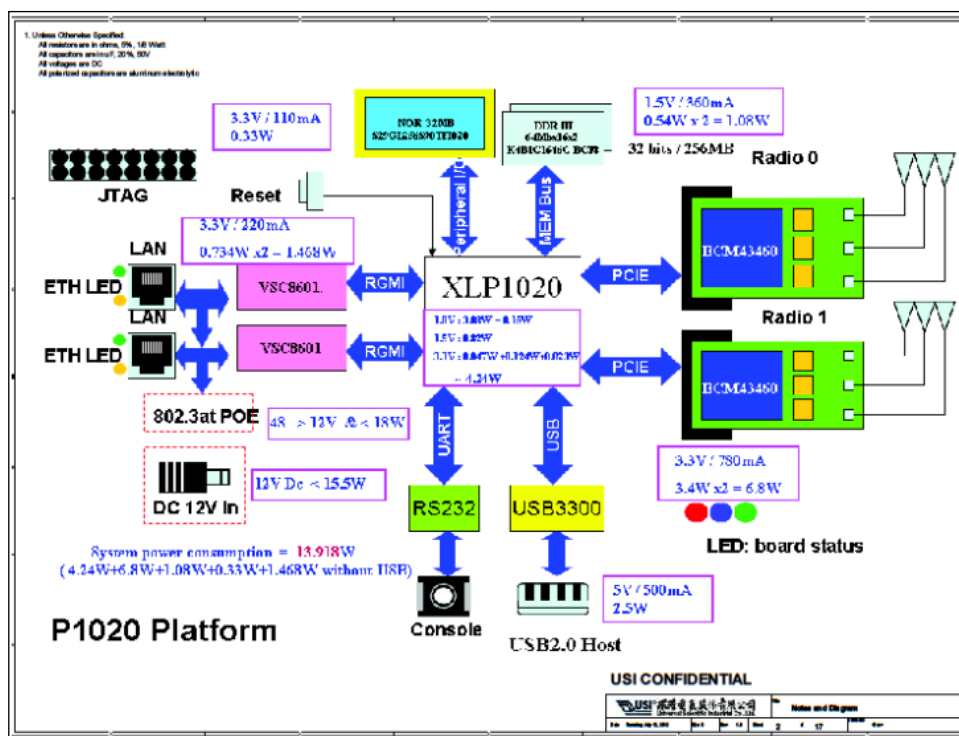


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
3	Dual Radio Access Point	AP832e	4812A832e11252F
4	Dual Radio Access Point	AP832e	4812A832e112529

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Type	Model and Serial Number
Antenna	ANT-ABGN23O-W Omni directional rubber duct Dual-Band
Antenna	ANT-I3ABGN-0304-O Ceiling mount Omni Dual-Band 3 x 3 MIMO
Antenna	ANT-O6ABGN-0606-O Outdoor Omi Dual-Band 3X3 MIMO
Antenna	ANT-O6ABGN-0607-PT Wall mount Dual-Band 3 X 3 MIMO
PoE	PD-9001GR/AC
Cable	Serial cable
Cable	Ethernet cable

Table 5. Support Equipment

G. Ports and Cabling Information

The EUT did not require any ports and cabling information for operation or monitoring.

H. Mode of Operation

During the normal operation the configuration is controlled by the Meru controller which sets the country code, ESSID, Operating frequency band and Channel etc.

I. Method of Monitoring EUT Operation

During the normal operation with controller Green or Blue LED indication on the Access point indicate the normal operation of the Access point. A Red LED indicates a failure of hardware or software settings.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Meru Networks, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dBμV)		*Class B Conducted Limits (dBμV)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50
Note 1 — The lower limit shall apply at the transition frequencies.				
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.				
* -- Limits per Subsection 15.207(a).				

Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50Ω/50μH LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were re-measured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Joseph Dizon

Test Date(s): 01/31/13 & 02/01/13

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC-DC Power Supply

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Line 15.107	0.195	63.56	63.827	-0.267	Pass	42.56	53.827	-11.267	Pass
120V AC Line 15.107	0.255	55.66	61.605	-5.945	Pass	33.14	51.605	-18.465	Pass
120V AC Line 15.107	0.275	54.34	60.979	-6.639	Pass	32.31	50.979	-18.669	Pass

Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC-DC Power Supply

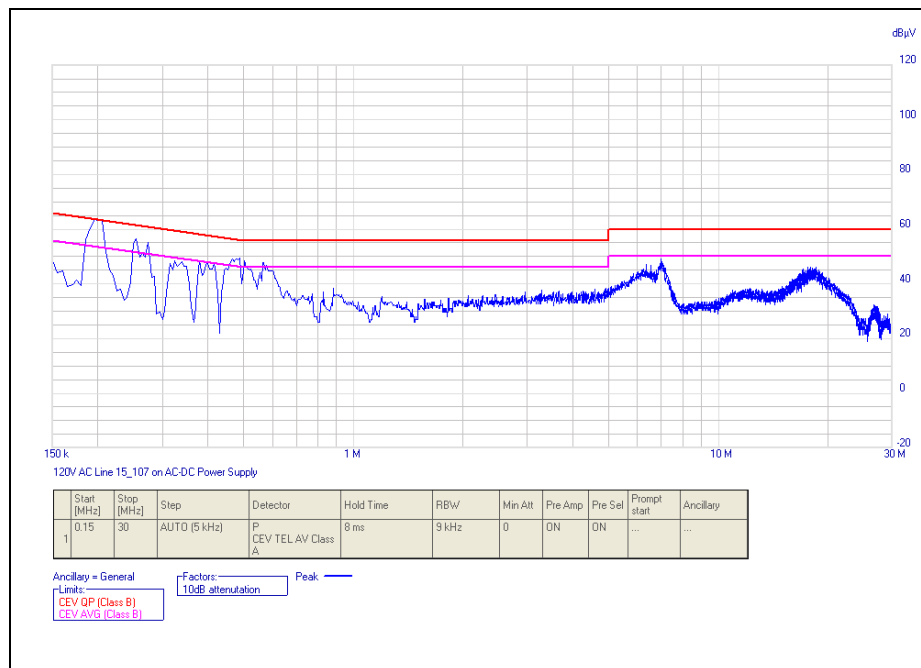


Plot 1. Conducted Emission, Phase Line Plot, AC-DC Power Supply

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC-DC Power Supply

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Neutral 15.107	0.15	53.23	66	-12.77	Pass	23.71	56	-32.29	Pass
120V AC Neutral 15.107	0.2	57.39	63.617	-6.227	Pass	38.46	53.617	-15.157	Pass
120V AC Neutral 15.107	0.265	48.4	61.286	-12.886	Pass	33.07	51.286	-18.216	Pass

Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC-DC Power Supply

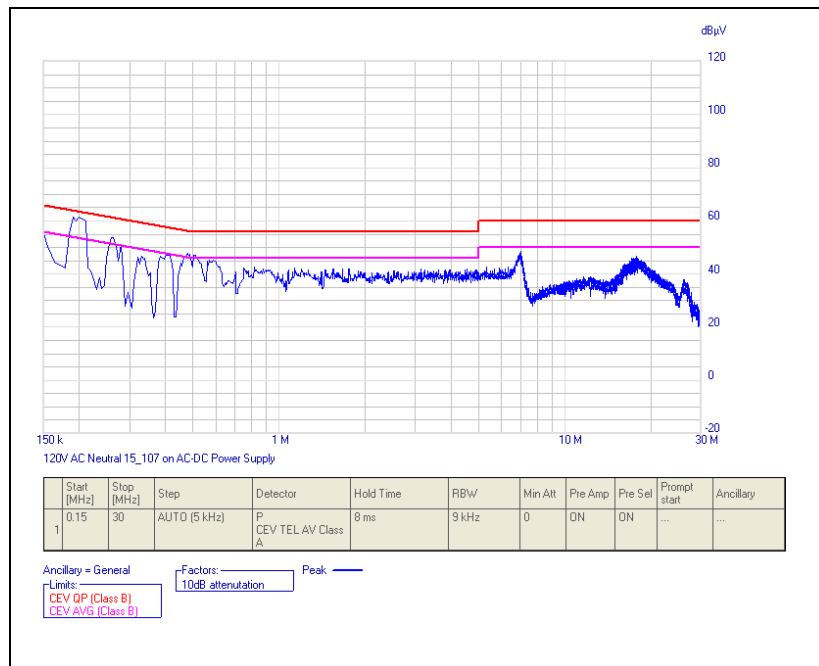


Plot 2. Conducted Emission, Neutral Line Plot, AC-DC Power Supply

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Line 15.107	0.155	51.05	65.728	-14.678	Pass	34.3	55.728	-21.428	Pass
120V AC Line 15.107	0.405	44	57.773	-13.773	Pass	34.78	47.773	-12.993	Pass
120V AC Line 15.107	0.43	46.68	57.277	-10.597	Pass	39	47.277	-8.277	Pass

Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE

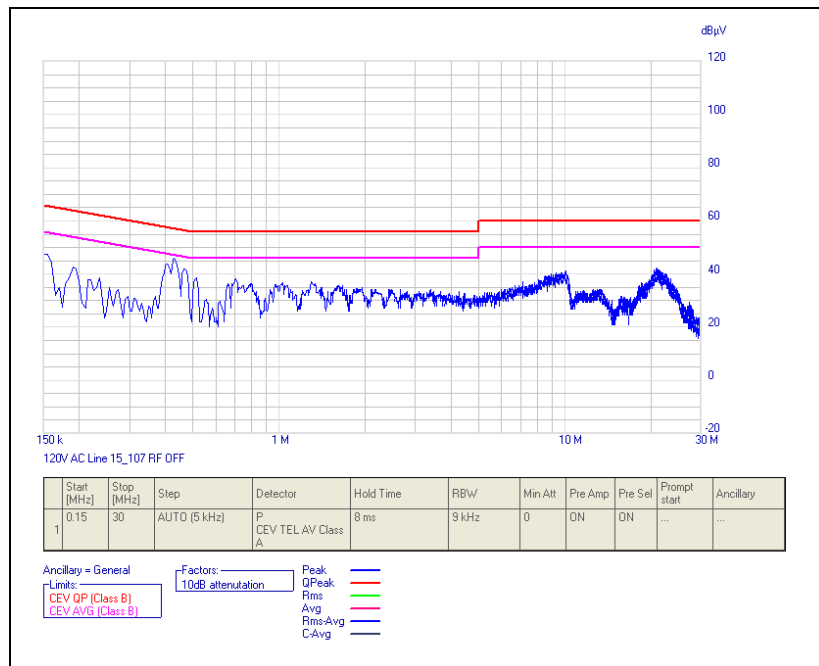


Plot 3. Conducted Emission, Phase Line Plot, PoE

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Neutral 15.107	0.15	53.73	66	-12.27	Pass	31.84	56	-24.16	Pass
120V AC Neutral 15.107	0.41	43.5	57.671	-14.171	Pass	28.96	47.671	-18.711	Pass
120V AC Neutral 15.107	0.43	46.04	57.277	-11.237	Pass	38.26	47.277	-9.017	Pass

Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE

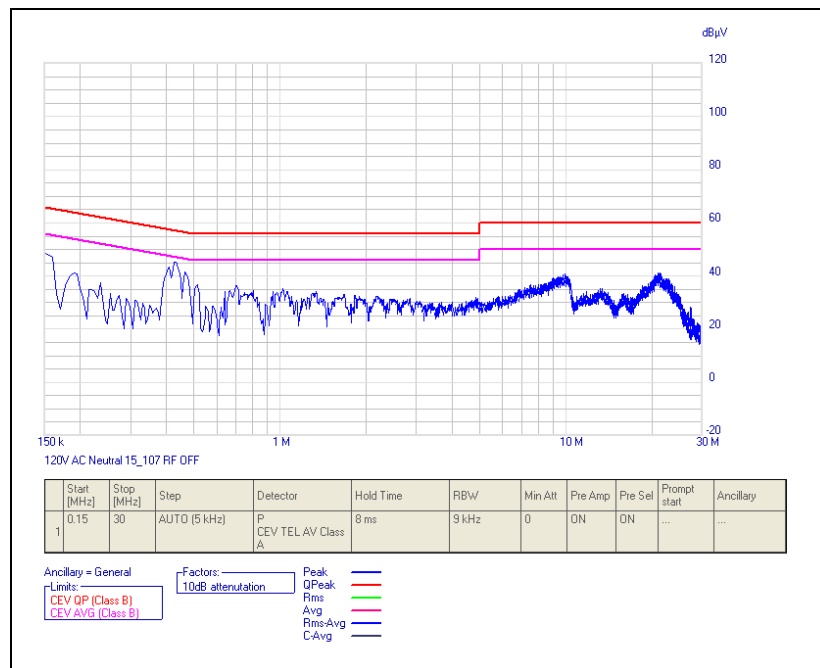

Plot 4. Conducted Emission, Neutral Line Plot, PoE

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 11.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 11.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): John Frank & Joseph Dizon

Test Date(s): 01/18/13


Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
57.095	V	46.6	100	50.03	6.4	30.203	0	10.46	36.687	40	-3.313
104.045	V	139	100	44.742	11.609	29.59	0	10.46	37.221	43.5	-6.279
239.995	V	181	100	39.522	11.3	28.398	0	10.46	32.884	46	-13.116
374.982	V	315	100	34.538	15.198	27.623	0	10.46	32.573	46	-13.427
475.008	V	167	100	34.619	16.801	27.167	0	10.46	34.713	46	-11.287
624.988	H	131	100	38.62	19.199	26.613	0	10.46	41.666	46	-4.334

Table 12. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits

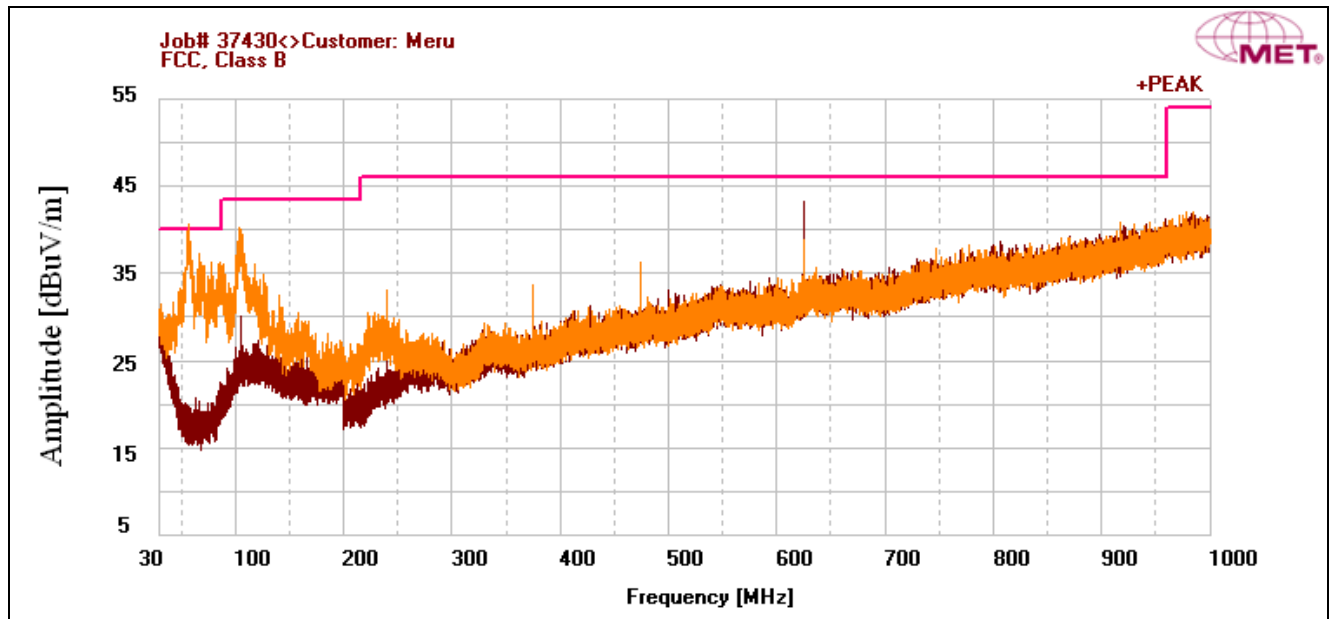

Plot 5. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits, AC-DC Power Supply

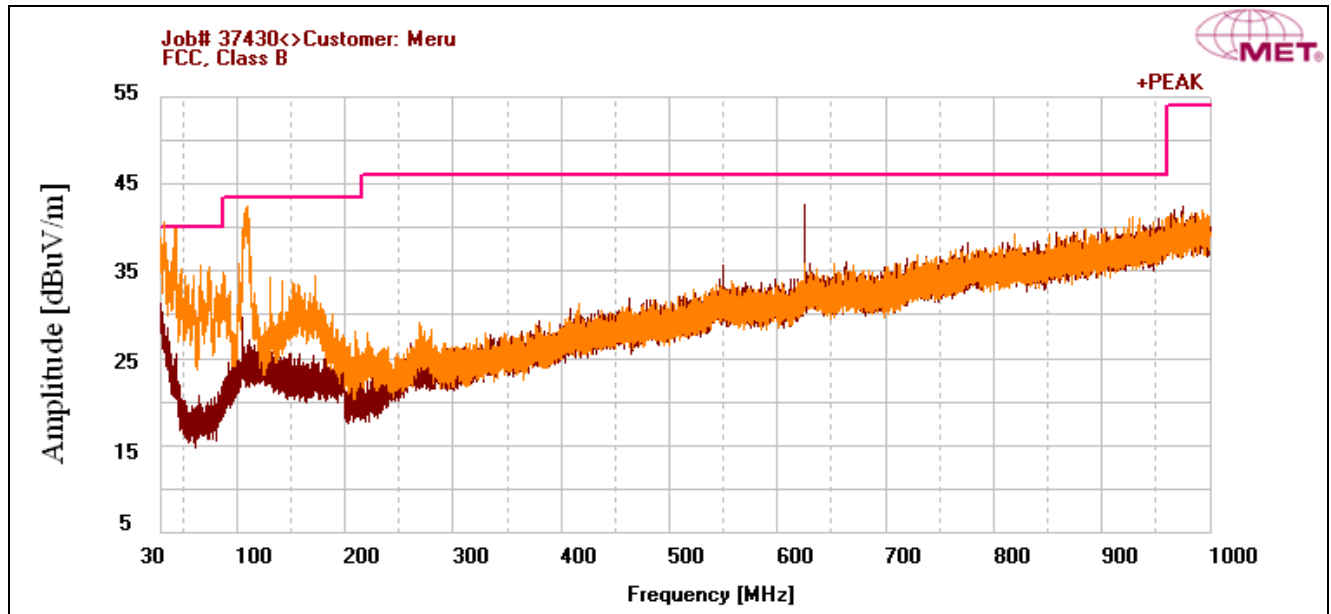


Plot 6. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits, PoE


Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
57.095	V	46.6	100	50.03	6.4	30.203	0	0	26.227	30	-3.773
104.045	V	139	100	44.742	11.609	29.59	0	0	26.761	30	-3.239
239.995	V	181	100	39.522	11.3	28.398	0	0	22.424	37	-14.576
374.982	V	315	100	34.538	15.198	27.623	0	0	22.113	37	-14.887
475.008	V	167	100	34.619	16.801	27.167	0	0	24.253	37	-12.747
624.988	H	131	100	38.62	19.199	26.613	0	0	31.206	37	-5.794

Table 13. Radiated Emissions Limits, Test Results, ICES-003 Limits

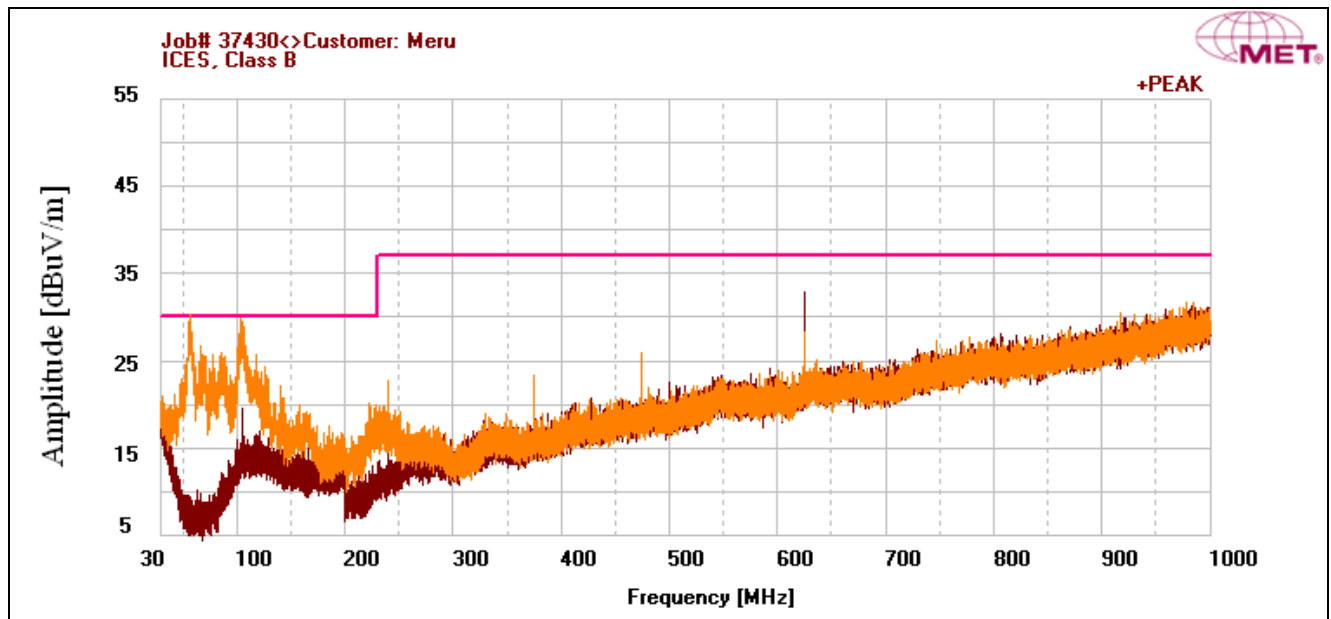


Plot 7. Radiated Emissions, ICES-003 Limits, AC-DC Power Supply

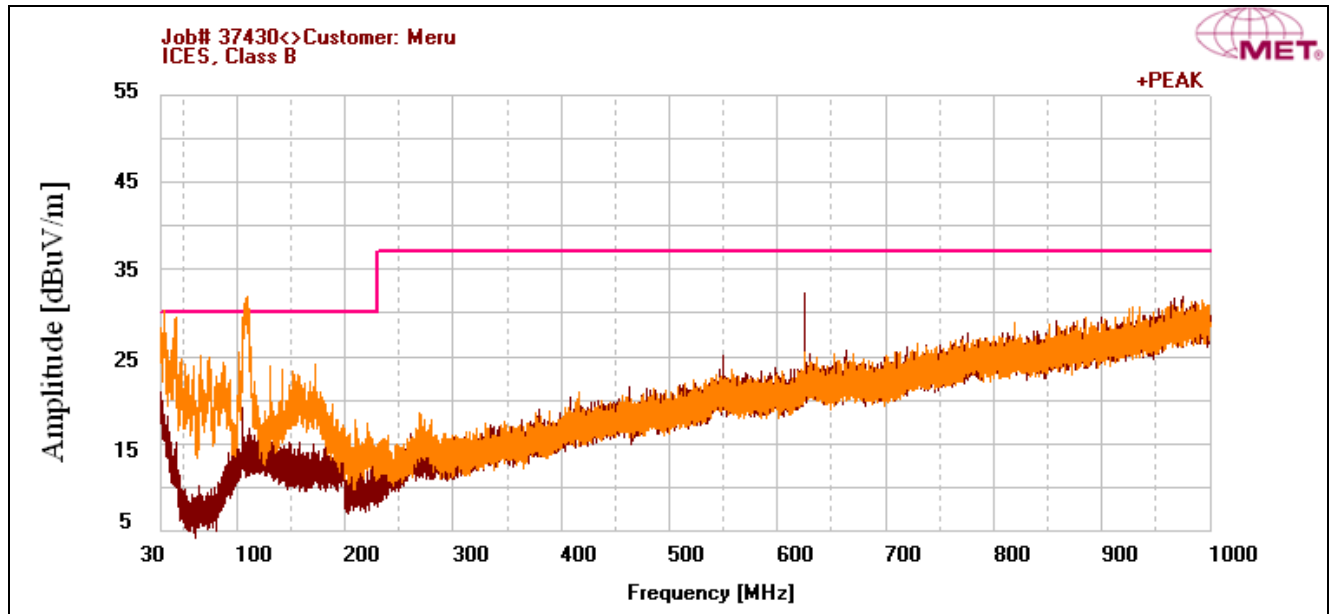

Plot 8. Radiated Emissions, ICES-003 Limits, PoE

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
1125	V	300	100	46.36	24.734	38.234	0	0	32.86	54	-21.14

Table 14. Radiated Emissions, Test Results, Above 1 GHz

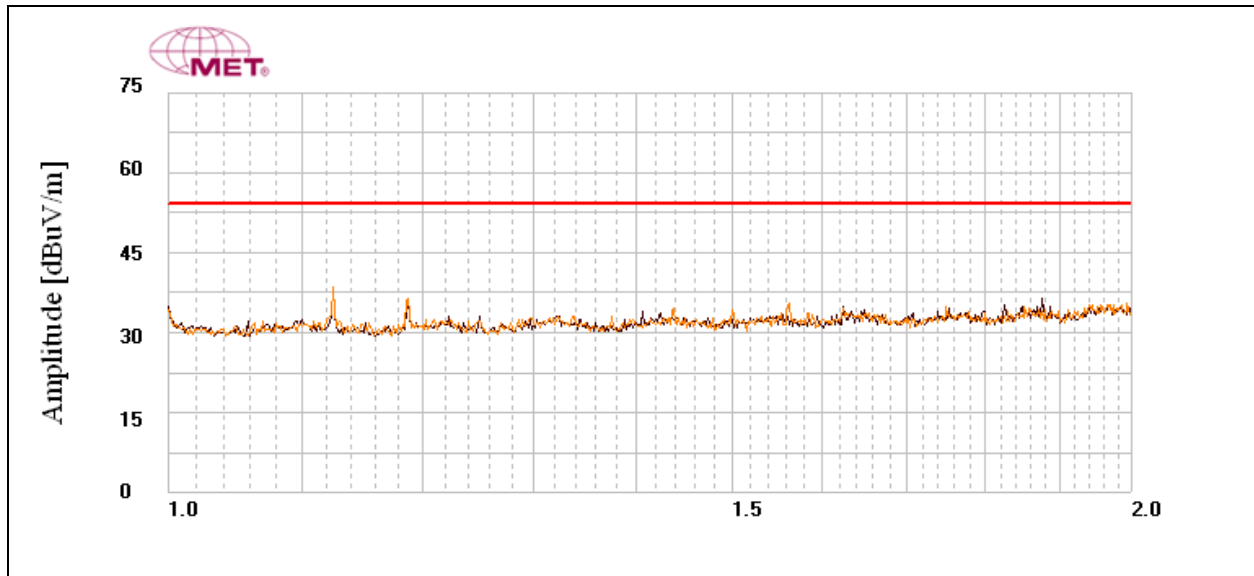

Plot 9. Radiated Emissions, Above 1 GHz

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. Antenna use a reverse SMA connector which is a unique type of connector to attach to the EUT. Table 15 contains the antennas tested with the EUT. Table 16 contains lower gain antennas that were not tested but are covered by Table 15 as they are lower gain that the manufacturer would like to sell with his product.

Test Engineer(s): Jonathan Chao

Test Date(s): 02/18/13

Gain (dBi)		Antenna Type	Antenna Description	Manufacturer	Model Number
2.4 GHz	5 GHz				
2	2	Dipole	Omni Directional Rubber Duct Dual-Band	SOCAA	ANT-ABGN-0304-W
3	4	Dipole	Omni Directional Ceiling Mount Dual-Band 3 x 3 MIMO	Terrawave Solutions	ANT-I3ABGN-0304-O
6	6	Dipole	Omni Directional Cane Dual-Band 3 x 3 MIMO	Terrawave Solutions	ANT-06ABGN-0606-O
6	7	Patch	Directional Wall Mount Dual-Band 3 x 3 MIMO	Terrawave Solutions	ANT-06ABGN-0607-PT

Table 15. Antenna List

Meru Part Number	Manufacturer P/N	Manufacturer	Description	Gain
ANT-ABGN230-W	--	SOCAA	Dual band omnidirectional dipole antenna	2/3 dBi
ANT-ABGN-23	S24493TS	Laird Technologies	Dual band ceiling mount omnidirectional 3-lead antenna	3/4 dBi
ANT-6ABGN-24	M6025040MO1D3620P	Terrawave	Dual band ceiling mount omnidirectional 6-lead antenna	2.5/4 dBi
ANT-ABGN470	ANT-DB1-RAF-RPS	Linx Technologies	Dual band high gain dipole omnidirectional antenna	4.7/4.7 dBi
ANT-O6ABGN-0606-O	M6060060MO1D3620O	Terrawave	Dual band omnidirectional 6-lead antenna	6/6 dBi
ANT-I2ABGN-0304-O	M6030040O1D3620DP	Terrawave	Dual band ceiling mount omnidirectional 2-lead antenna	3/4 dBi
ANT-I3ABGN-0304-O	M6030040O1D1820MP	Terrawave	Dual band ceiling mount omnidirectional 3-lead antenna	3/4 dBi
ANT-O4ABGN-0607-PT	M6060070P23620	Terrawave	Dual band wall mount patch 4-lead antenna	6/7 dBi
ANT-O6ABGN-0607-PT	M6060070MP13620	Terrawave	Dual band wall mount patch 6-lead antenna	6/7 dBi

Table 16. Additional Antennas

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 17. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Results: The EUT was compliant with this requirement.


Test Engineer(s): Joseph Dizon

Test Date(s): 01/31/13 & 02/01/13

15.207(a) Conducted Emissions Test Results, AC-DC Power Supply

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Line 15.207	0.195	63.35	63.827	-0.477	Pass	43.02	53.827	-10.807	Pass
120V AC Line 15.207	0.25	55.66	61.769	-6.109	Pass	30.01	51.769	-21.759	Pass
120V AC Line 15.207	0.485	51.48	56.26	-4.78	Pass	32.42	46.26	-13.84	Pass

Table 18. Conducted Emissions, 15.207(a), Phase Line, Test Results, AC-DC Power Supply

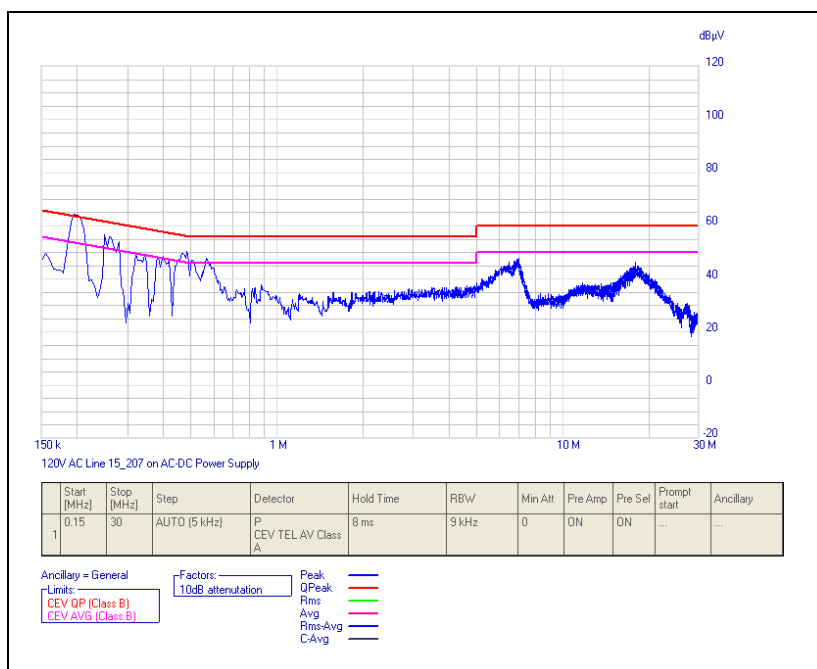


Plot 10. Conducted Emissions, 15.207(a), Phase Line, AC-DC Power Supply

15.207(a) Conducted Emissions Test Results, AC-DC Power Supply

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Neutral 15.207	0.15	53.37	66	-12.63	Pass	23.86	56	-32.14	Pass
120V AC Neutral 15.207	0.195	62.75	63.827	-1.077	Pass	39.32	53.827	-14.507	Pass
120V AC Neutral 15.207	0.255	54.71	61.605	-6.895	Pass	30.65	51.605	-20.955	Pass

Table 19. Conducted Emissions, 15.207(a), Neutral Line, Test Results, AC-DC Power Supply

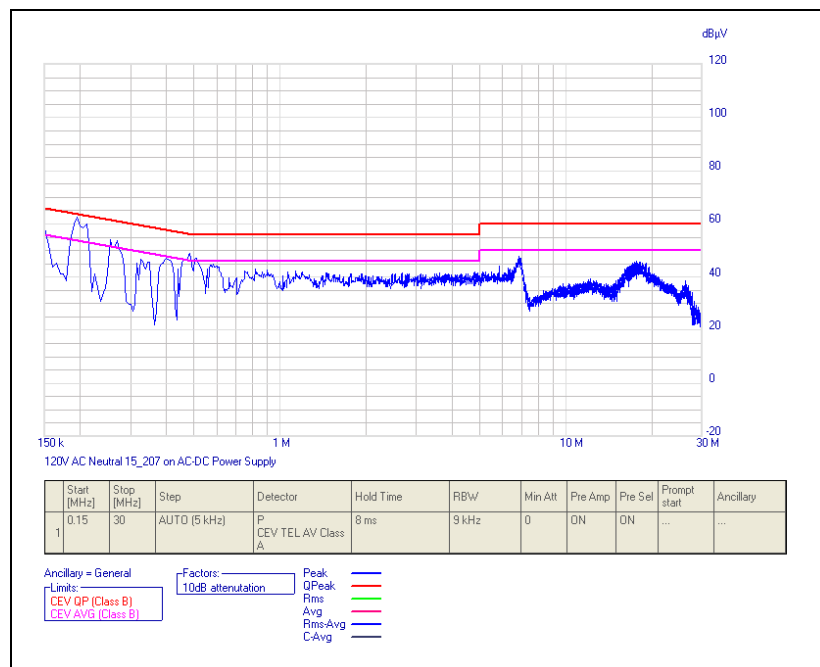

Plot 11. Conducted Emissions, 15.207(a), Neutral Line, AC-DC Power Supply

15.207(a) Conducted Emissions Test Results, PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Line 15.207	0.15	62.57	66	-3.43	Pass	45.33	56	-10.67	Pass
120V AC Line 15.207	0.17	45.72	64.963	-19.243	Pass	18.68	54.963	-36.283	Pass
120V AC Line 15.207	0.425	46.58	57.373	-10.793	Pass	33.82	47.373	-13.553	Pass

Table 20. Conducted Emissions, 15.207(a), Phase Line, Test Results, PoE




Plot 12. Conducted Emissions, 15.207(a), Phase Line, PoE

15.207(a) Conducted Emissions Test Results, PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120V AC Neutral 15.207	0.15	62.65	66	-3.35	Pass	44.02	56	-11.98	Pass
120V AC Neutral 15.207	0.43	43.2	57.277	-14.077	Pass	38.2	47.277	-9.077	Pass
120V AC Neutral 15.207	21.095	56.84	60	-3.16	Pass	48.62	50	-1.38	Pass

Table 21. Conducted Emissions, 15.207(a), Neutral Line, Test Results, PoE

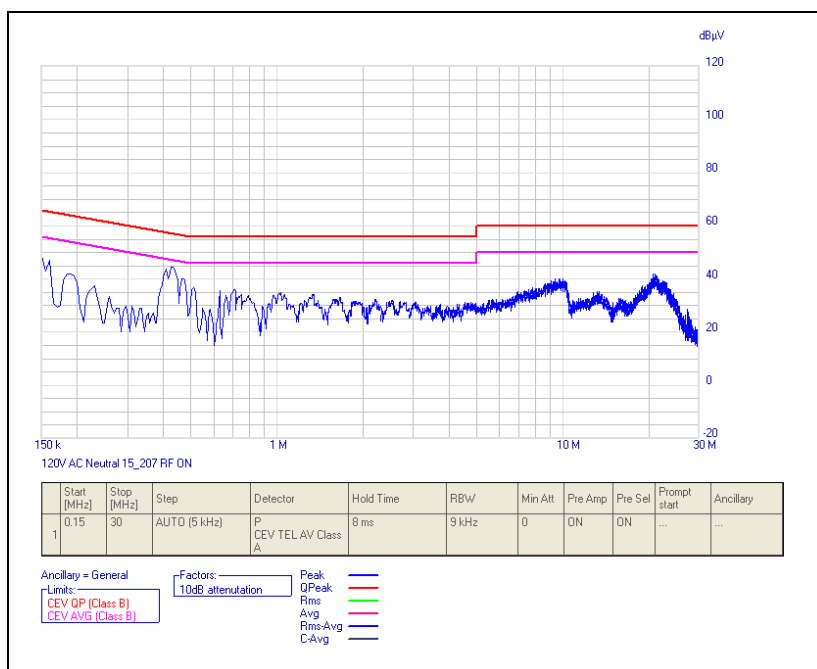

Plot 13. Conducted Emissions, 15.207(a), Neutral Line, PoE

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(c) 26dB Bandwidth

Test Requirements: § 15.403 (i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

Test Results The 26 dB Bandwidth was compliant with the requirements of this section and was determined from the plots on the following pages.

Test Engineer(s): Jonathan Chao

Test Date(s): 01/24/13



Figure 2. Occupied Bandwidth, Test Setup


Mode	Channel	Frequency (MHz)	Port	26dB Bandwidth (MHz)
802.11a	Low	5180	1	20.442
	Mid	5200	1	20.547
	High	5240	1	20.363
802.11n HT20	Low	5180	1	20.756
			2	20.621
			3	20.701
	Mid	5200	1	20.729
			2	20.504
			3	20.610
	High	5240	1	20.679
			2	20.438
			3	20.496
802.11n HT40	Low	5190	1	41.037
			2	40.810
			3	40.872
	High	5230	1	41.259
			2	40.789
			3	40.757
802.11n HT80	--	5210	1	82.797
			2	82.169
			3	82.065

Table 22. 26 dB Occupied Bandwidth, Test Results


Mode	Channel	Frequency (MHz)	Port	99% Bandwidth (MHz)
802.11a	Low	5180	1	16.4568
	Mid	5200	1	16.5033
	High	5240	1	16.5570
802.11n HT20	Low	5180	1	17.6390
			2	17.6757
			3	17.6295
	Mid	5200	1	17.5279
			2	17.7000
			3	17.7507
	High	5240	1	17.7189
			2	17.6778
			3	17.6936
802.11n HT40	Low	5190	1	36.6848
			2	36.7190
			3	36.5418
	High	5230	1	36.6660
			2	36.3250
			3	36.1187
802.11n HT80	--	5210	1	75.1116
			2	75.9054
			3	75.9055

Table 23. 99% Occupied Bandwidth, Test Results


26 dB Occupied Bandwidth, 802.11a

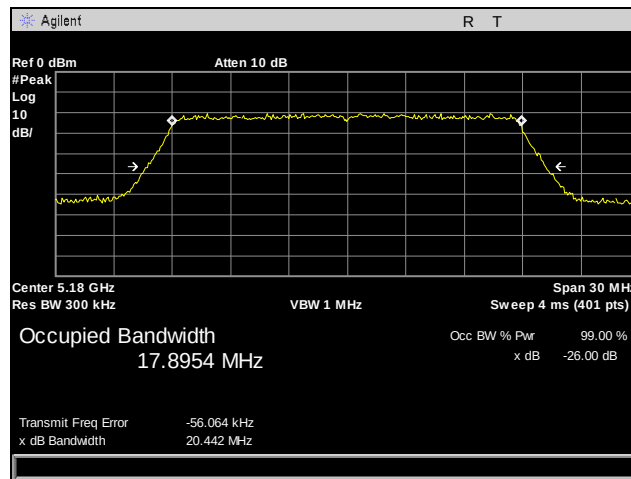

Plot 14. 26 dB Occupied Bandwidth, 802.11a, Port 1, Low Channel

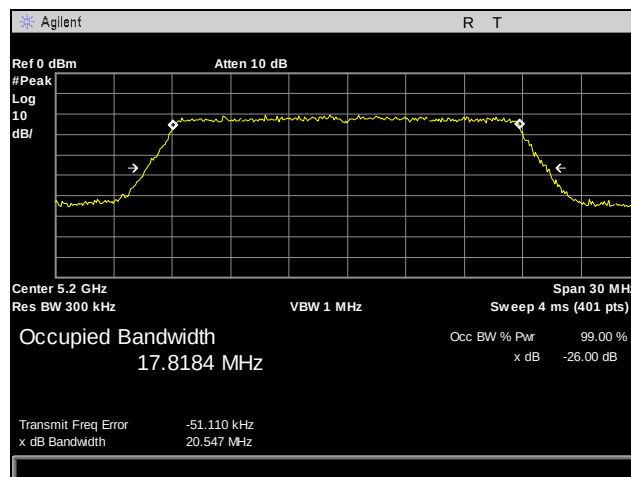


Plot 15. 26 dB Occupied Bandwidth, 802.11a, Port 1, Mid Channel

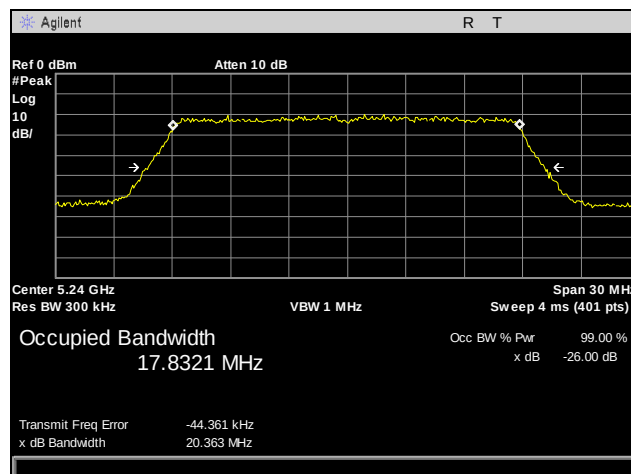


Plot 16. 26 dB Occupied Bandwidth, 802.11a, Port 1, High Channel


26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1

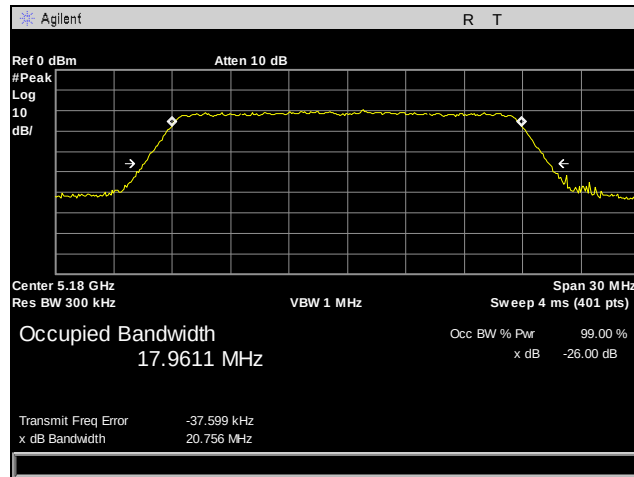

Plot 17. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1, Low Channel

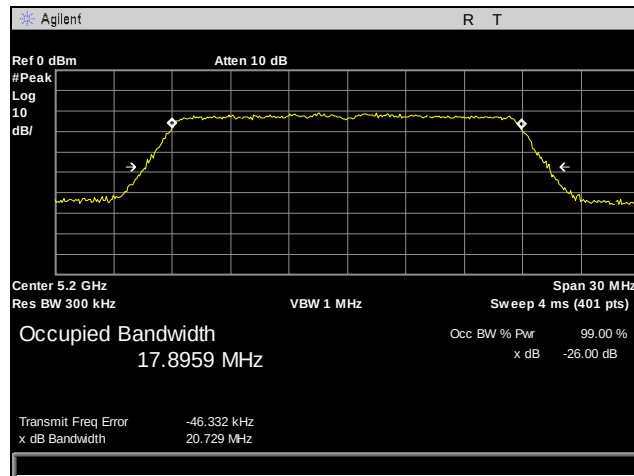


Plot 18. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1, Mid Channel

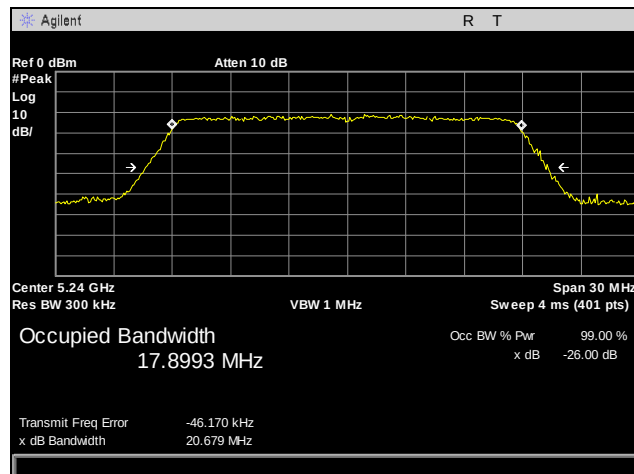


Plot 19. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 1, High Channel


26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2

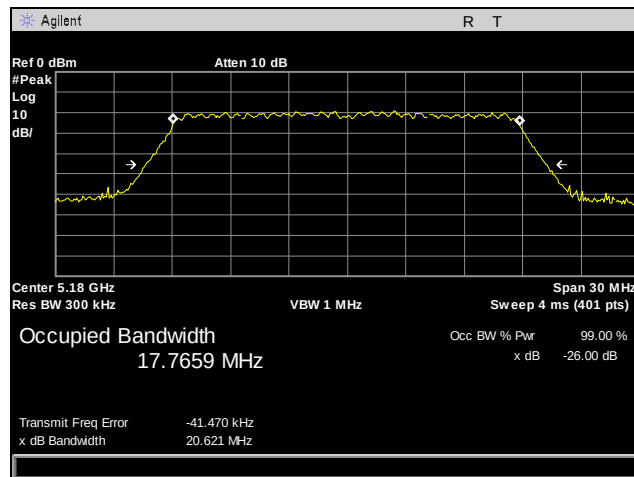

Plot 20. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2, Low Channel

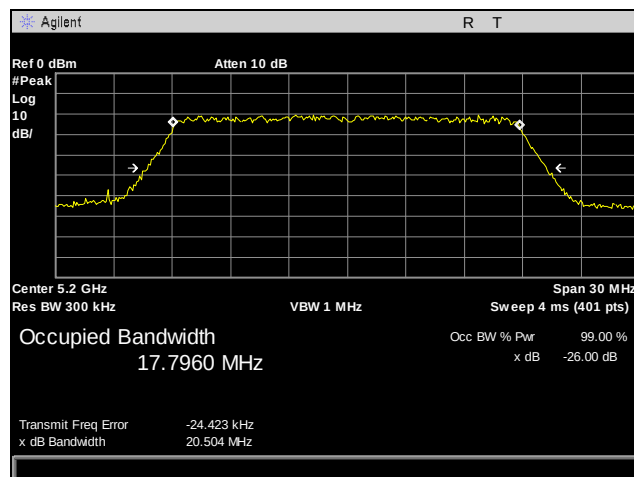


Plot 21. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2, Mid Channel

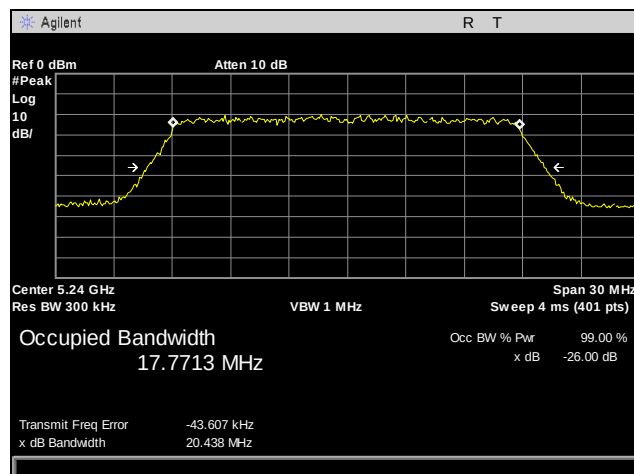


Plot 22. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 2, High Channel


26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3

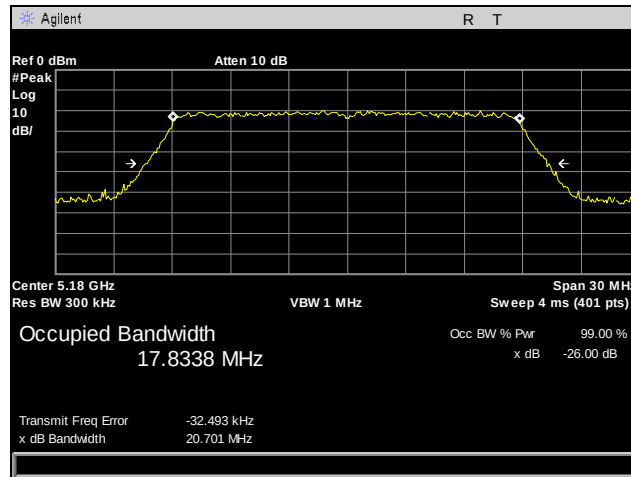

Plot 23. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3, Low Channel

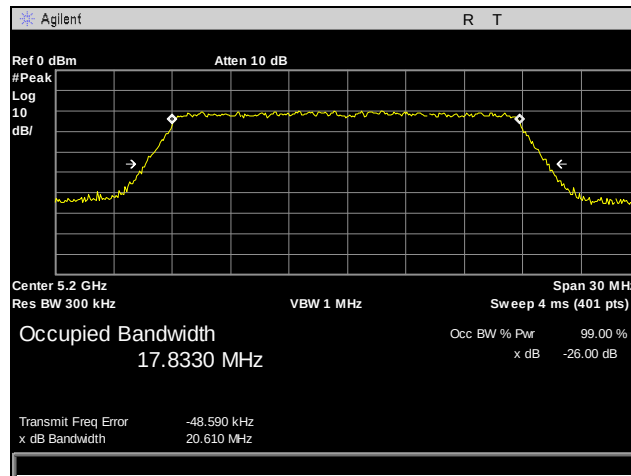


Plot 24. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3, Mid Channel

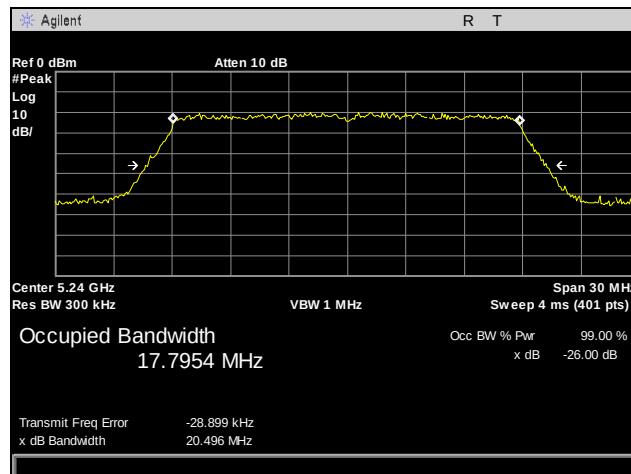


Plot 25. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Port 3, High Channel

26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 1

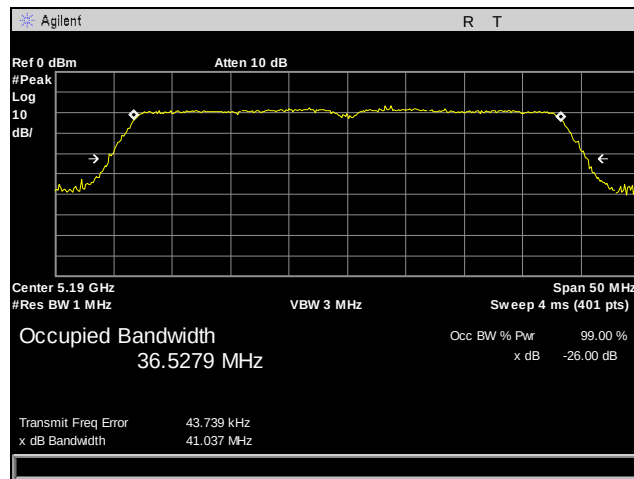


Plot 26. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 1, Low Channel

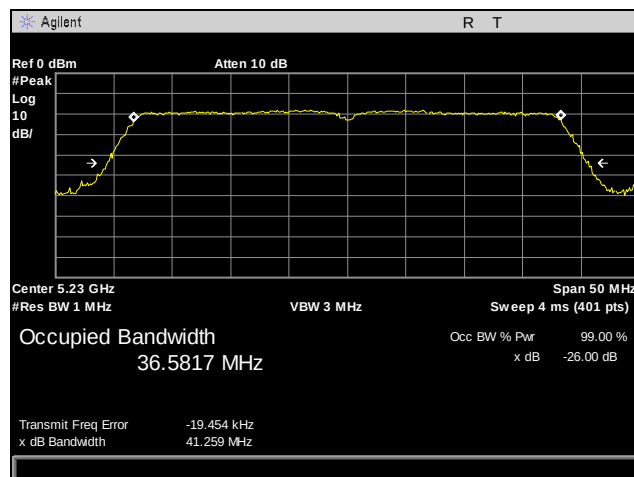


Plot 27. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 1, High Channel

26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 2

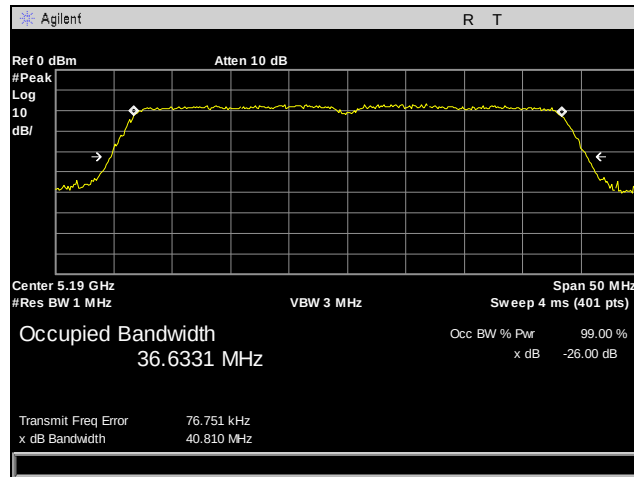


Plot 28. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 2, Low Channel

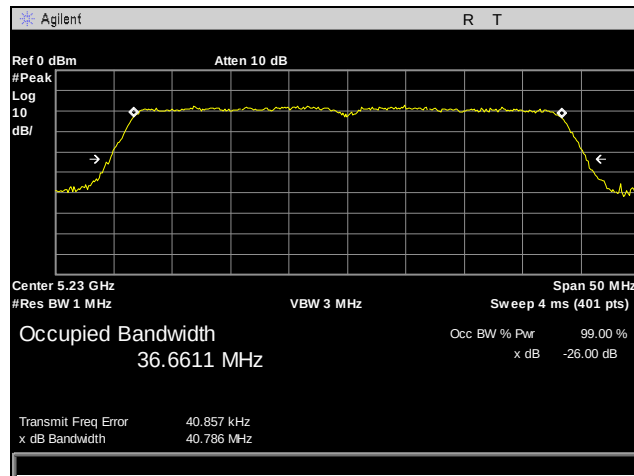


Plot 29. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 2, High Channel

26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 3

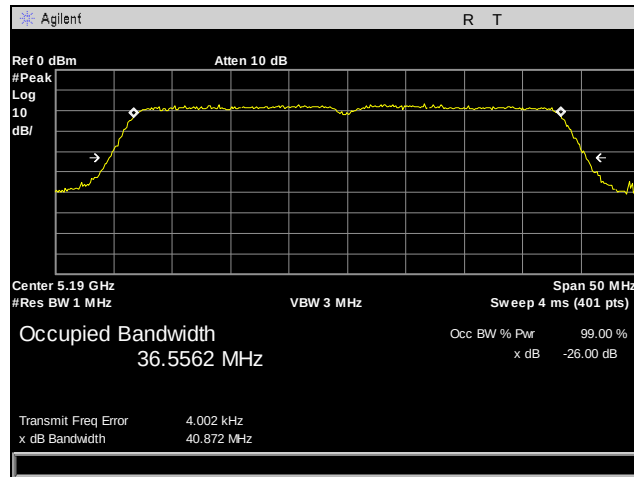


Plot 30. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 3, Low Channel

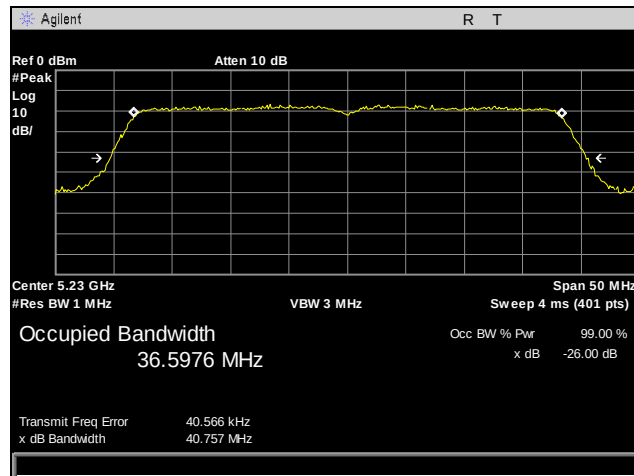


Plot 31. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Port 3, High Channel


26 dB Occupied Bandwidth, 802.11n 80 MHz

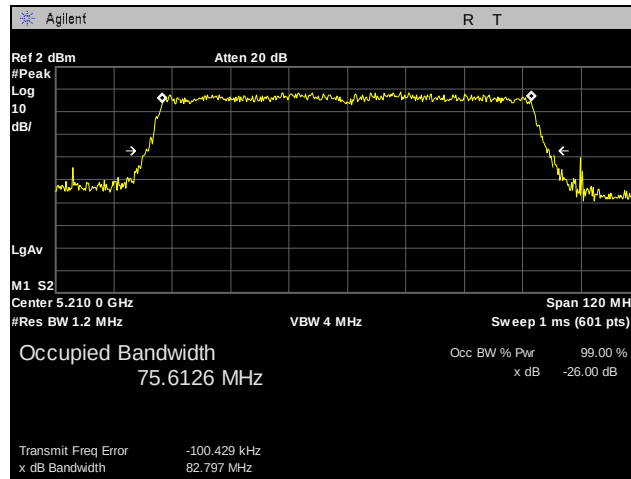

Plot 32. 26 dB Occupied Bandwidth, 802.11n 80 MHz, Port 1

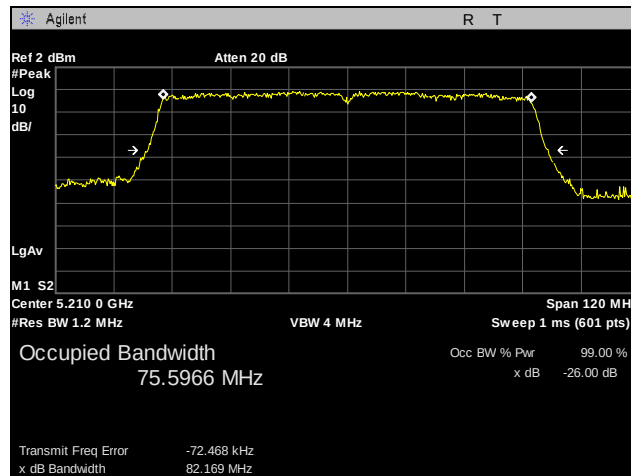


Plot 33. 26 dB Occupied Bandwidth, 802.11n 80 MHz, Port 2

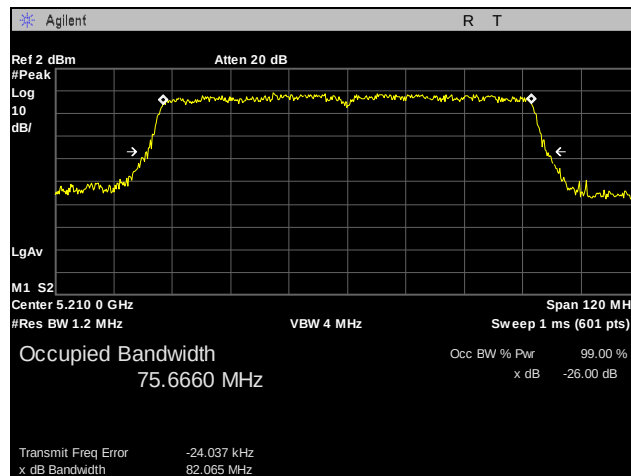


Plot 34. 26 dB Occupied Bandwidth, 802.11n 80 MHz, Port 3


99% Occupied Bandwidth, 802.11a

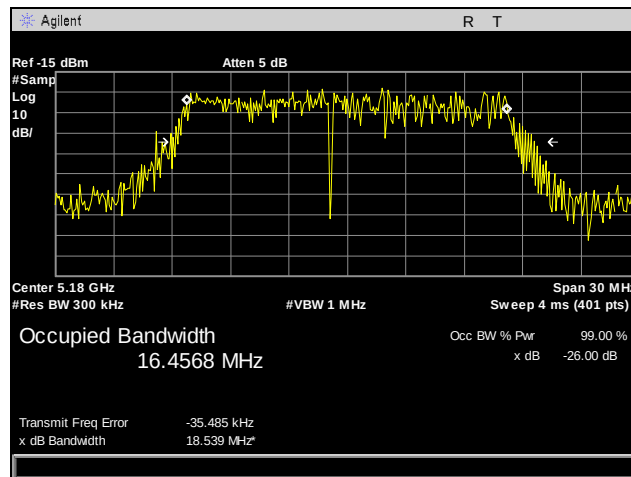

Plot 35. 99% Occupied Bandwidth, 802.11a, Port 1, Low Channel

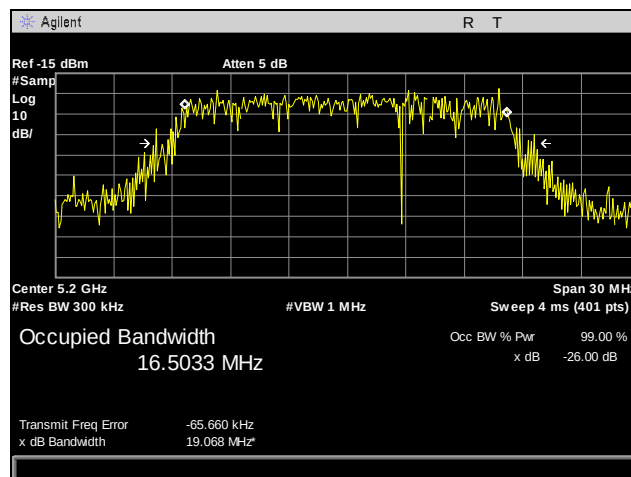


Plot 36. 99% Occupied Bandwidth, 802.11a, Port 1, Mid Channel

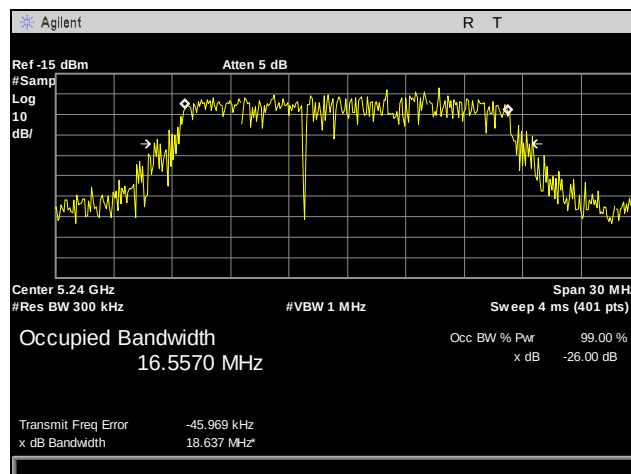


Plot 37. 99% Occupied Bandwidth, 802.11a, Port 1, High Channel


99% Occupied Bandwidth, 802.11n 20 MHz, Port 1

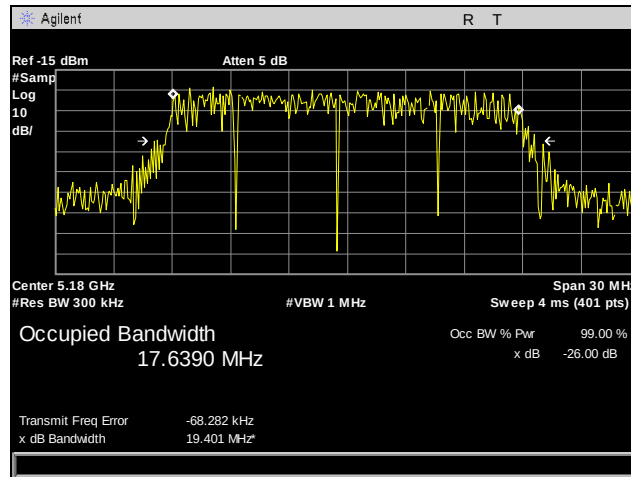

Plot 38. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 1, Low Channel

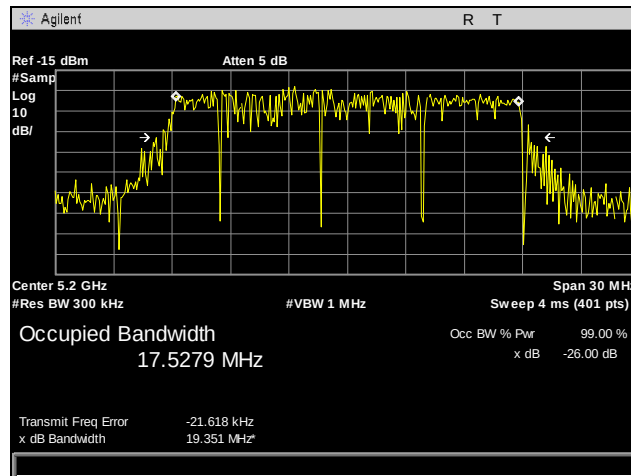


Plot 39. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 1, Mid Channel

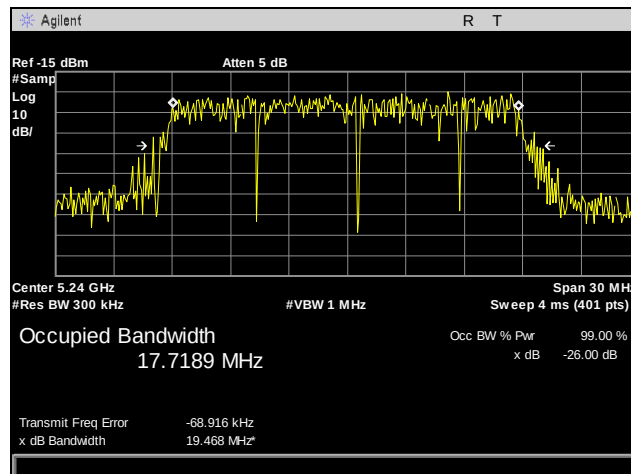


Plot 40. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 1, High Channel


99% Occupied Bandwidth, 802.11n 20 MHz, Port 2

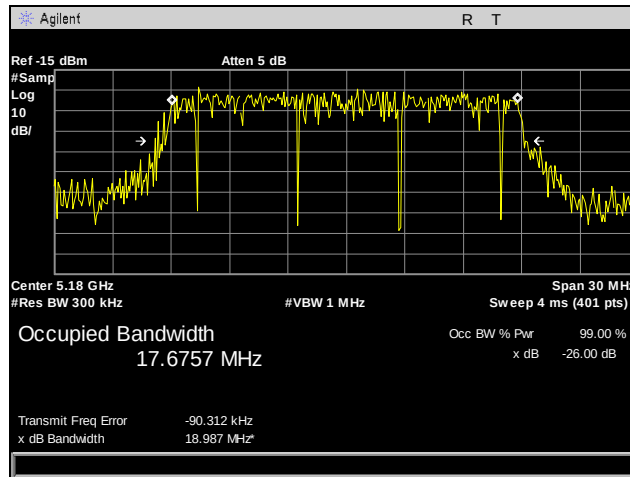

Plot 41. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 2, Low Channel

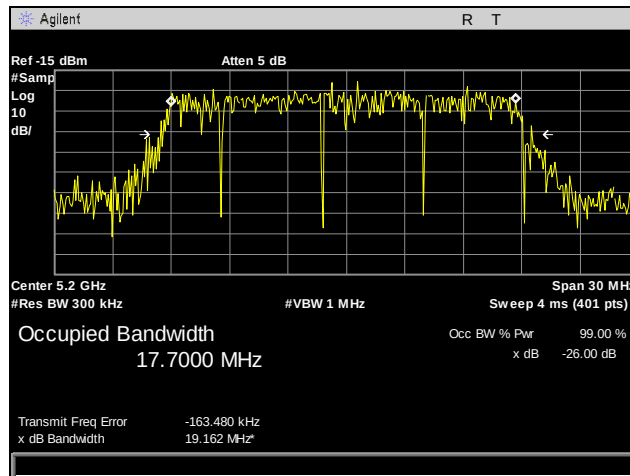


Plot 42. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 2, Mid Channel

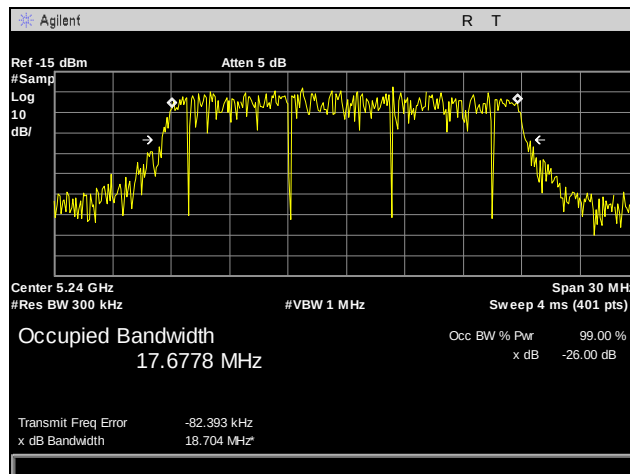


Plot 43. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 2, High Channel


99% Occupied Bandwidth, 802.11n 20 MHz, Port 3

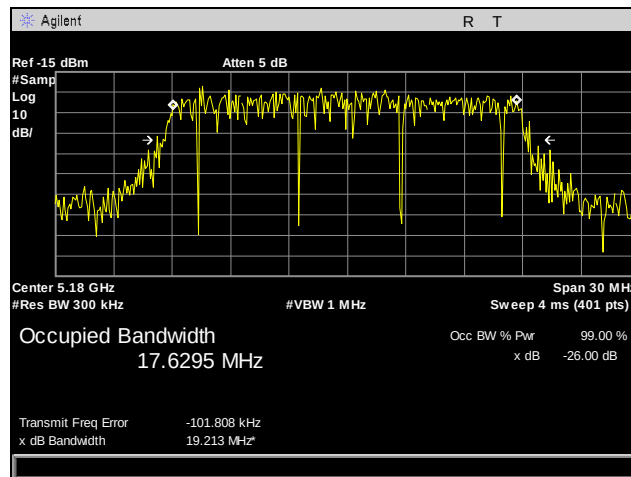

Plot 44. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 3, Low Channel

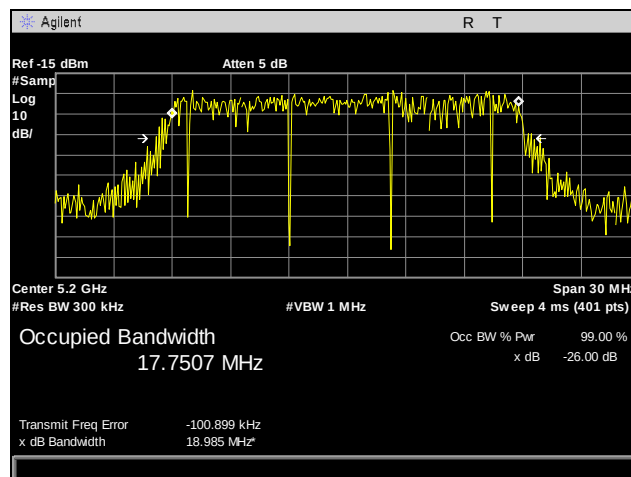


Plot 45. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 3, Mid Channel

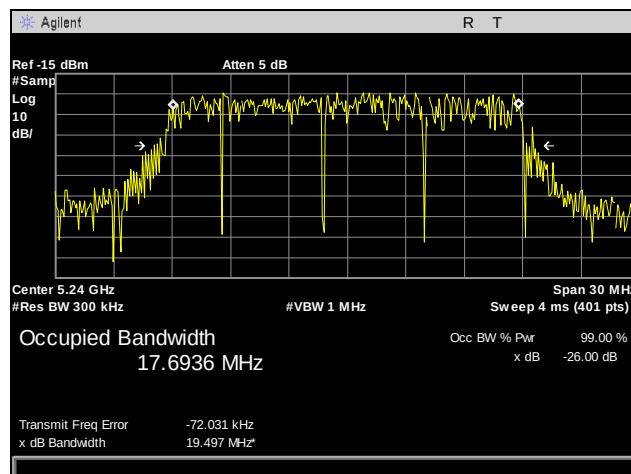


Plot 46. 99% Occupied Bandwidth, 802.11n 20 MHz, Port 3, High Channel

99% Occupied Bandwidth, 802.11n 40 MHz, Port 1

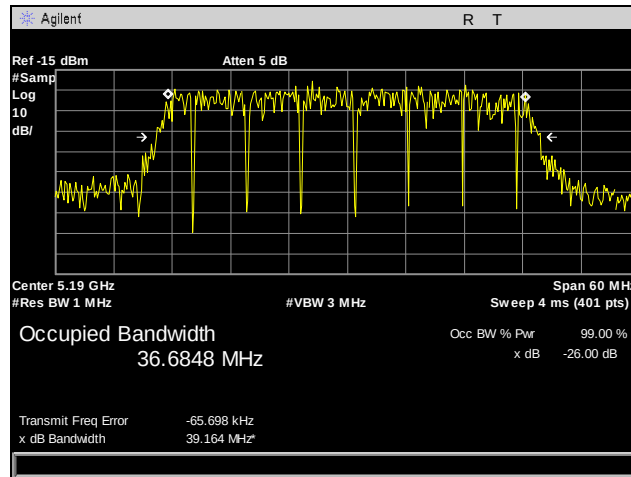


Plot 47. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 1, Low Channel

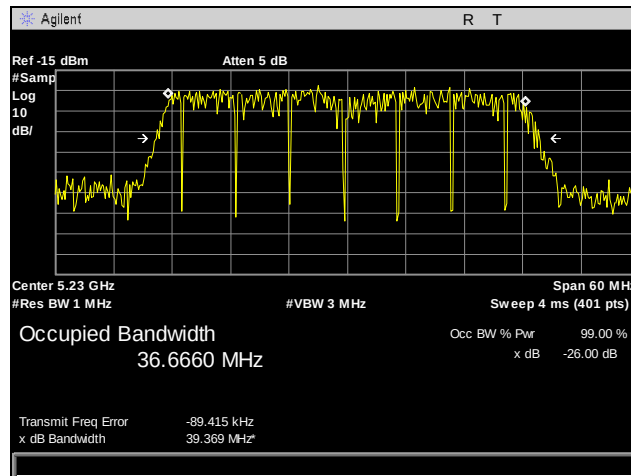


Plot 48. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 1, High Channel

99% Occupied Bandwidth, 802.11n 40 MHz, Port 2

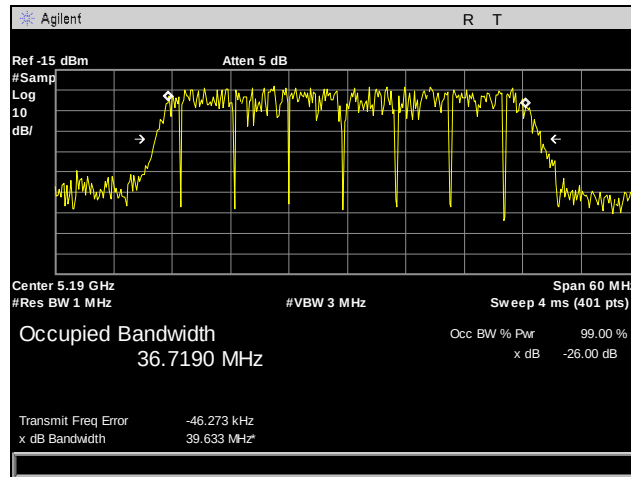


Plot 49. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 2, Low Channel

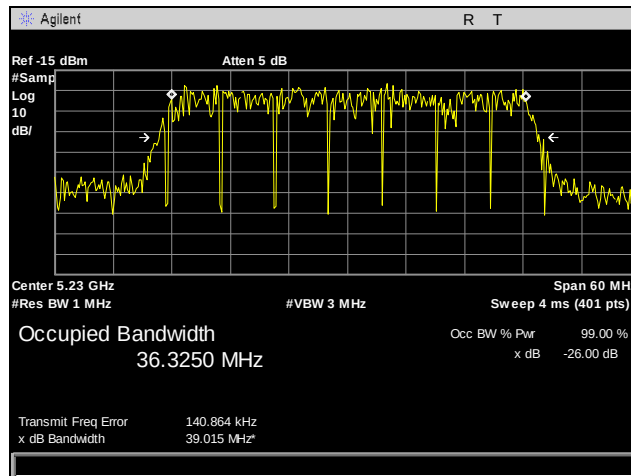


Plot 50. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 2, High Channel

99% Occupied Bandwidth, 802.11n 40 MHz, Port 3

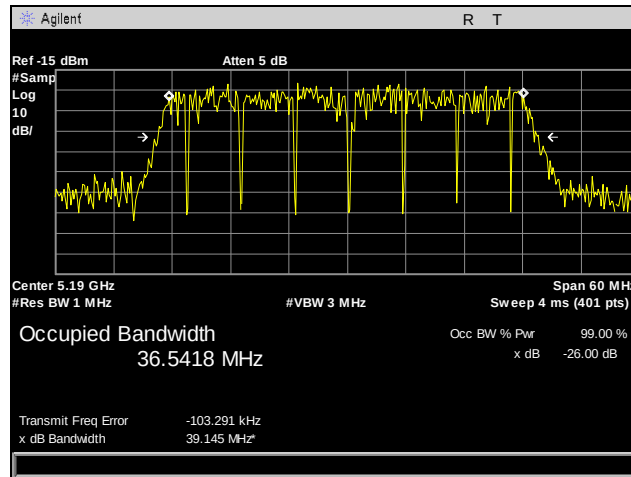


Plot 51. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 3, Low Channel

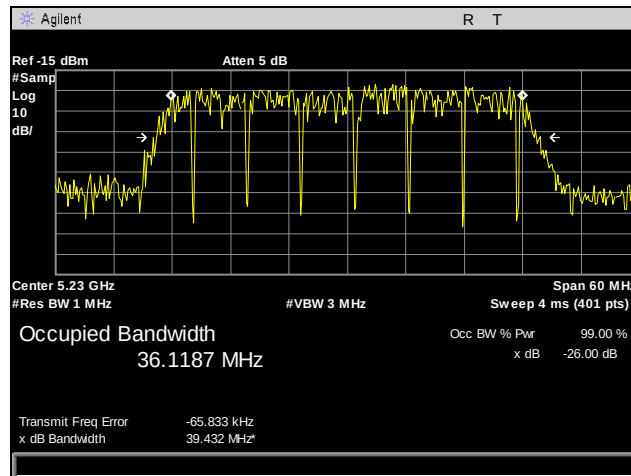


Plot 52. 99% Occupied Bandwidth, 802.11n 40 MHz, Port 3, High Channel


99% Occupied Bandwidth, 802.11n 80 MHz

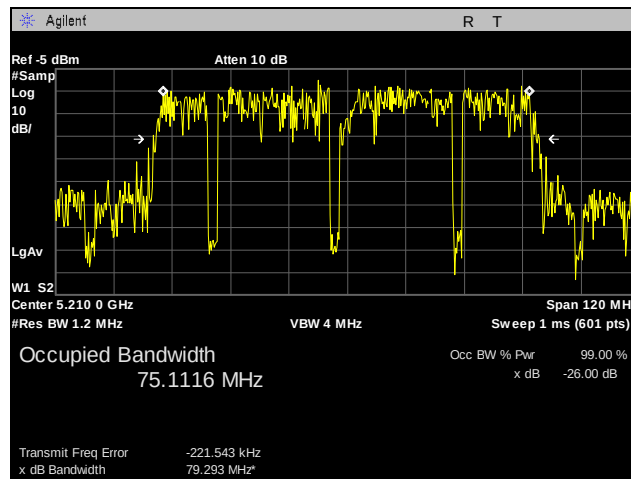

Plot 53. 99% Occupied Bandwidth, 802.11n 80 MHz, Port 1

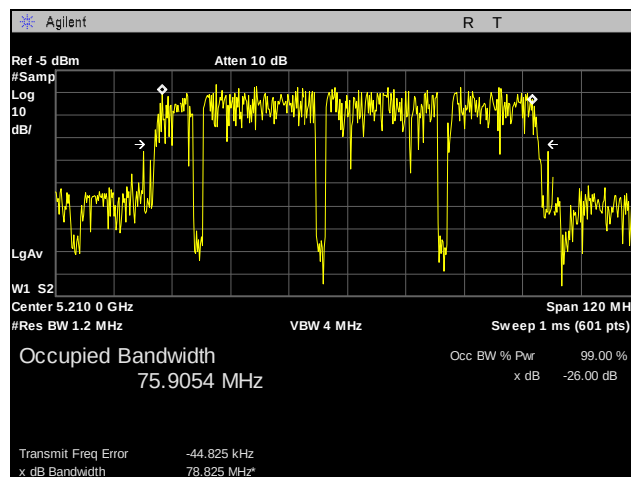

Plot 54. 99% Occupied Bandwidth, 802.11n 80 MHz, Port 2

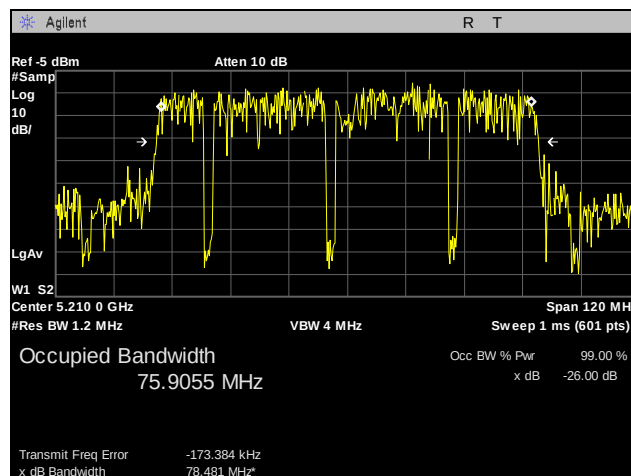

Plot 55. 99% Occupied Bandwidth, 802.11n 80 MHz, Port 3

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15. 407(a)(1) RF Power Output

Test Requirements: §15.407(a)(1): For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz.

Test Procedure: The EUT was connected to a spectrum analyzer through an attenuator and set to transmit continuously on the low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D01 General UNII Test Procedures v01r02. Plots were corrected for attenuator and cable loss. EUT is professionally installed and Meru Networks will lower power by 3dB from those shown in this section when both radios are operating simultaneously in the same band.

Test Results: Equipment was compliant with the Peak Power Output limits of § 15.401(a)(1).

Test Engineer(s): Jonathan Chao

Test Date(s): 02/18/13



Figure 3. Power Output Test Setup

Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum power	Limit (dBm)
					(dBm)	
5180	802.11a	10.21	NA	NA	NA	16.23
5200	802.11a	10.4	NA	NA	NA	16.23
5240	802.11a	10.03	NA	NA	NA	16.23
5180	802.11n HT20	10.74	10.52	10.89	15.49	16.23
5200	802.11n HT20	10.5	10.28	10.6	15.23	16.23
5240	802.11n HT20	10.21	10.24	10.52	15.09	16.23
5190	802.11n HT40	11.23	11.16	11.21	15.92	16.23
5230	802.11n HT40	10.49	10.51	10.65	15.32	16.23
5210	802.11n HT80	9.75	10.08	10.06	14.73	16.23

Table 24. RF Output Power, Test Results, 2 dBi Omni Antenna

Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum power	Limit (dBm)
					(dBm)	
5180	802.11a	10.21	NA	NA	NA	12.23
5200	802.11a	10.4	NA	NA	NA	12.23
5240	802.11a	10.03	NA	NA	NA	12.23
5180	802.11n HT20	6.71	6.32	6.69	11.35	12.23
5200	802.11n HT20	6.12	6.24	6.61	11.10	12.23
5240	802.11n HT20	6.11	6.34	6.43	11.07	12.23
5190	802.11n HT40	7.13	7.12	7.12	11.89	12.23
5230	802.11n HT40	6.34	6.48	6.55	11.23	12.23
5210	802.11n HT80	5.75	6.08	6.06	10.73	12.23

Table 25. RF Output Power, Test Results, 6 dBi Omni Antenna

Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum power	Limit (dBm)
					(dBm)	
5180	802.11a	10.21	NA	NA	NA	14.23
5200	802.11a	10.4	NA	NA	NA	14.23
5240	802.11a	10.03	NA	NA	NA	14.23
5180	802.11n HT20	8.06	7.89	8.17	12.81	14.23
5200	802.11n HT20	7.88	7.71	7.95	12.62	14.23
5240	802.11n HT20	7.66	7.68	7.89	12.51	14.23
5190	802.11n HT40	8.42	8.37	8.41	13.17	14.23
5230	802.11n HT40	7.87	7.88	7.99	12.68	14.23
5210	802.11n HT80	7.75	8.08	8.06	12.73	14.23

Table 26. RF Output Power, Test Results, 4 dBi Ceiling Antenna

Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum power	Limit (dBm)
					(dBm)	
5180	802.11a	10.21	NA	NA	NA	11.23
5200	802.11a	10.4	NA	NA	NA	11.23
5240	802.11a	10.03	NA	NA	NA	11.23
5180	802.11n HT20	6.38	6.38	6.29	11.12	11.23
5200	802.11n HT20	6.04	6.08	6.09	10.84	11.23
5240	802.11n HT20	6.14	6.16	6.14	10.91	11.23
5190	802.11n HT40	6.45	6.51	6.35	11.21	11.23
5230	802.11n HT40	6.19	6.23	6.13	10.95	11.23
5210	802.11n HT80	4.75	5.08	5.06	9.73	11.23

Table 27. RF Output Power, Test Results, 7 dBi Patch Antenna

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(a)(1) Peak Power Spectral Density

Test Requirements: § 15.407(a)(1): In addition, the peak power spectral density shall not exceed 4 dBm in any 1 megahertz band.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement used was method SA-1 from 789033 D01 General UNII Test Procedures v01r02. Plots are correct for attenuators and cable loss.

Test Results: Equipment was compliant with the peak power spectral density limits of § 15.407 (a)(1). The peak power spectral density was determined from plots on the following page(s). Only plots for the 2dBi antenna were taken.

Test Engineer(s): Jonathan Chao

Test Date(s): 02/18/13



Figure 4. Power Spectral Density Test Setup

Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum(dBm)
5180	802.11a	-0.907	NA	NA	NA
5200	802.11a	-0.519	NA	NA	NA
5240	802.11a	-0.824	NA	NA	NA
5180	802.11n HT20	-1.73	-1.85	-1.43	3.105
5200	802.11n HT20	-1.884	-1.66	-1.86	2.971
5240	802.11n HT20	-2.46	-2.267	-2.024	2.525
5190	802.11n HT40	-3.43	-3.307	-3.499	1.360
5230	802.11n HT40	-3.963	-3.619	-3.804	0.978
5210	802.11n HT80	-8.328	-7.117	-7.829	-2.95

Table 28. Peak Power Spectral Density, 2dBi Antenna, Test Results

Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum(dBm)
5180	802.11a	-0.907	NA	NA	NA
5200	802.11a	-0.519	NA	NA	NA
5240	802.11a	-0.824	NA	NA	NA
5180	802.11n HT20	-3.73	-3.85	-3.43	1.105
5200	802.11n HT20	-3.884	-3.66	-3.86	0.971
5240	802.11n HT20	-4.46	-4.267	-4.024	0.525
5190	802.11n HT40	-5.43	-5.307	-5.499	-0.640
5230	802.11n HT40	-5.963	-5.619	-5.804	-1.022
5210	802.11n HT80	-10.328	-9.117	-9.829	-0.958

Table 29. Peak Power Spectral Density, 4 dBi Antenna, Test Results


Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum(dBm)
5180	802.11a	-0.907	NA	NA	NA
5200	802.11a	-0.519	NA	NA	NA
5240	802.11a	-0.824	NA	NA	NA
5180	802.11n HT20	-5.73	-5.85	-5.43	-0.895
5200	802.11n HT20	-5.884	-5.66	-5.86	-1.029
5240	802.11n HT20	-6.46	-6.267	-6.024	-1.475
5190	802.11n HT40	-7.43	-7.307	-7.499	-2.640
5230	802.11n HT40	-7.963	-7.619	-7.804	-3.022
5210	802.11n HT80	-12.328	-11.117	-11.829	-6.958

Table 30. Peak Power Spectral Density, 6 dBi Antenna, Test Results


Frequency (MHz)	Mode/Modulation Type	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Sum(dBm)
5180	802.11a	-0.907	NA	NA	NA
5200	802.11a	-0.519	NA	NA	NA
5240	802.11a	-0.824	NA	NA	NA
5180	802.11n HT20	-6.73	-6.85	-6.43	-1.5163827
5200	802.11n HT20	-6.884	-6.66	-6.86	-1.6741461
5240	802.11n HT20	-7.46	-7.267	-7.024	-2.0978049
5190	802.11n HT40	-8.43	-8.307	-8.499	-3.287434
5230	802.11n HT40	-8.963	-8.619	-8.804	-3.6631807
5210	802.11n HT80	-13.328	-12.117	-12.829	-7.95818

Table 31. Peak Power Spectral Density, 7 dBi Antenna, Test Results


Power Spectral Density, 802.11a

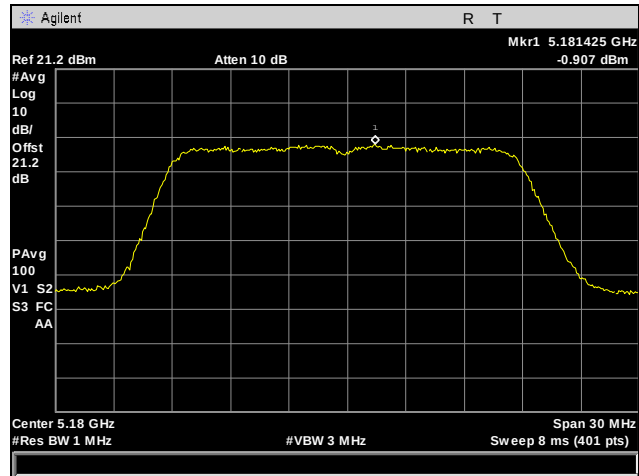

Plot 56. Power Spectral Density, Low Channel, 802.11a

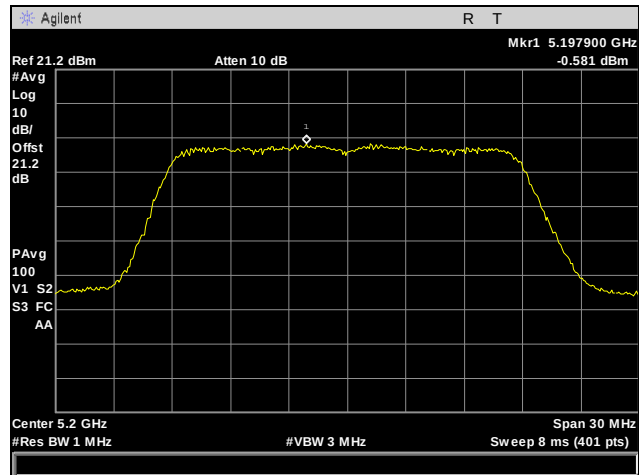


Plot 57. Power Spectral Density, Mid Channel, 802.11a

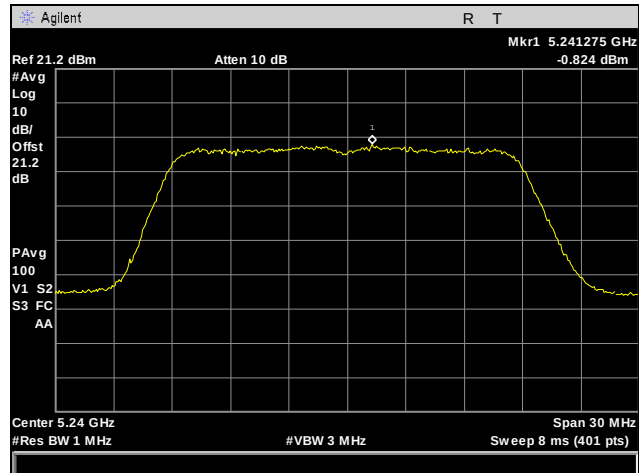


Plot 58. Power Spectral Density, High Channel, 802.11a


Power Spectral Density, 802.11n 20 MHz, Port 1

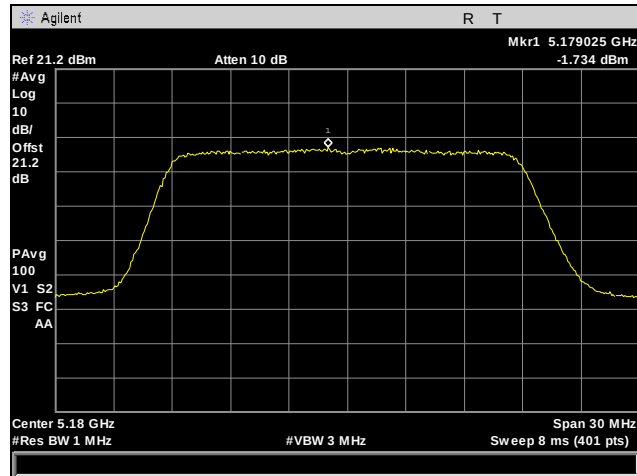

Plot 59. Power Spectral Density, Low Channel, 802.11n 20 MHz, Port 1

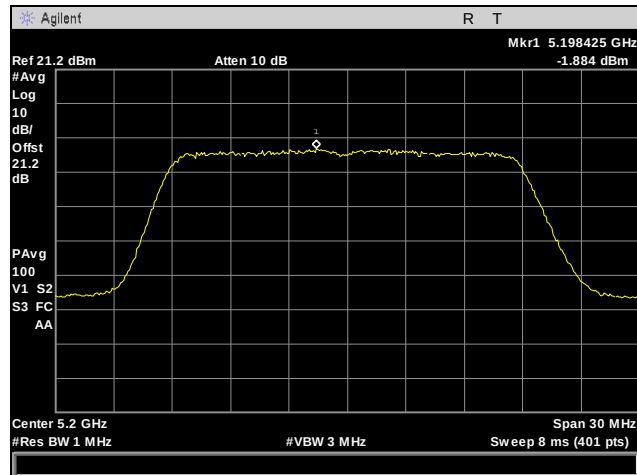


Plot 60. Power Spectral Density, Mid Channel, 802.11n 20 MHz, Port 1

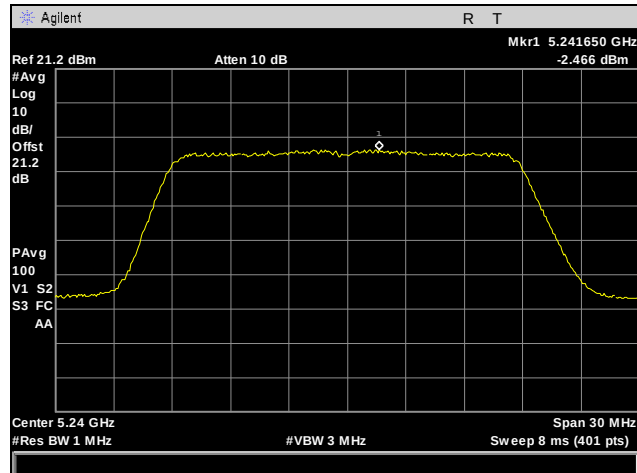


Plot 61. Power Spectral Density, High Channel, 802.11n 20 MHz, Port 1


Power Spectral Density, 802.11n 20 MHz, Port 2

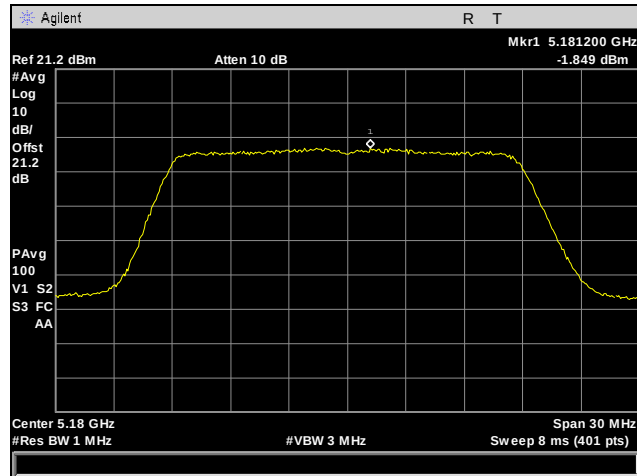

Plot 62. Power Spectral Density, Low Channel, 802.11n 20 MHz, Port 2

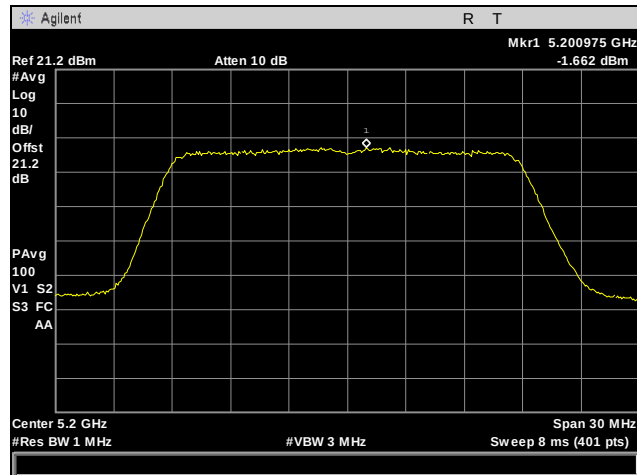


Plot 63. Power Spectral Density, Mid Channel, 802.11n 20 MHz, Port 2

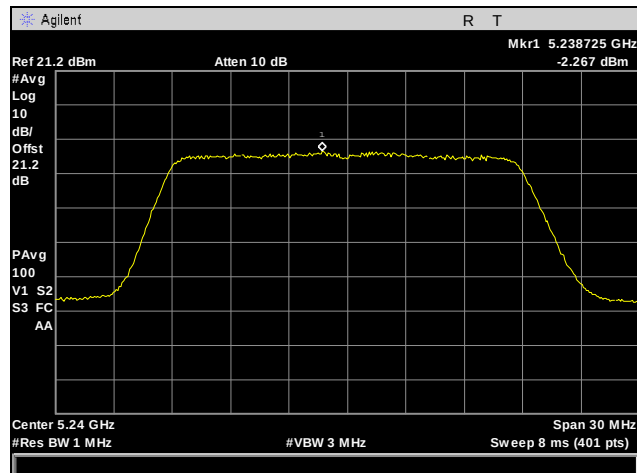


Plot 64. Power Spectral Density, High Channel, 802.11n 20 MHz, Port 2


Power Spectral Density, 802.11n 20 MHz, Port 3

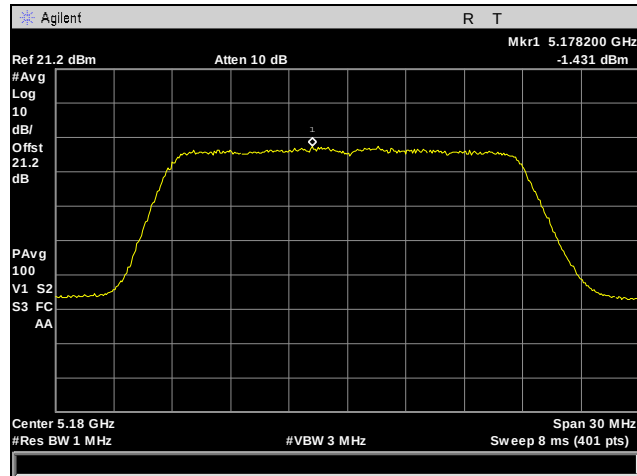

Plot 65. Power Spectral Density, Low Channel, 802.11n 20 MHz, Port 3

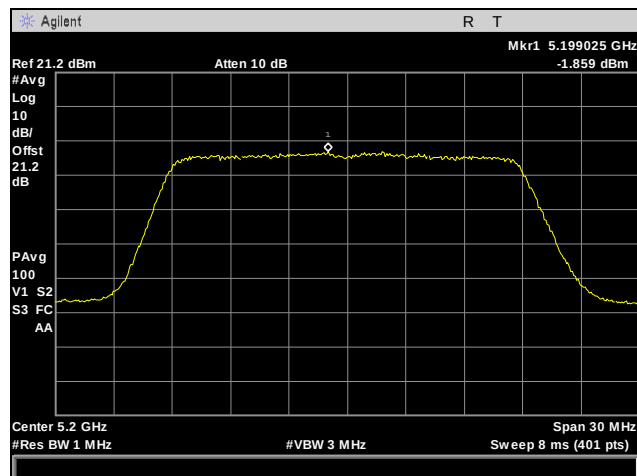


Plot 66. Power Spectral Density, Mid Channel, 802.11n 20 MHz, Port 3

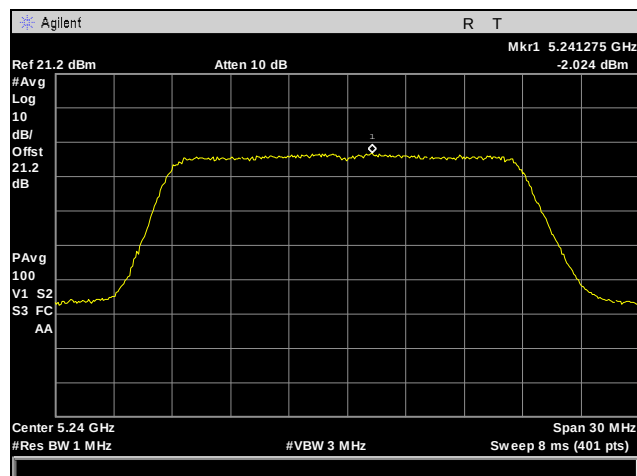


Plot 67. Power Spectral Density, High Channel, 802.11n 20 MHz, Port 3


Power Spectral Density, 802.11n 40 MHz, Port 1

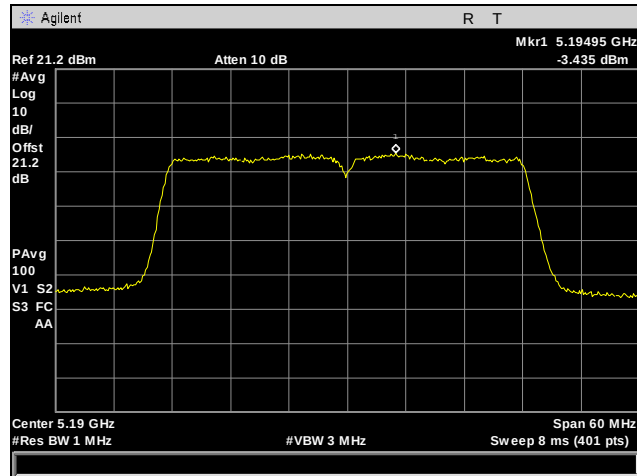

Power Spectral Density, 802.11n 40 MHz, Port 2

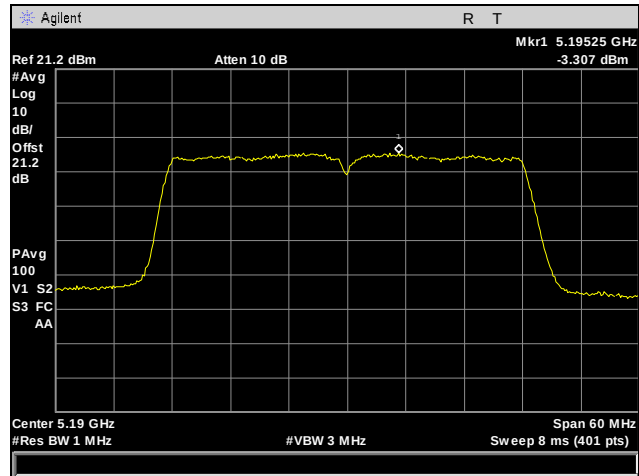


Plot 70. Power Spectral Density, Low Channel, 802.11n 40 MHz, Port 2

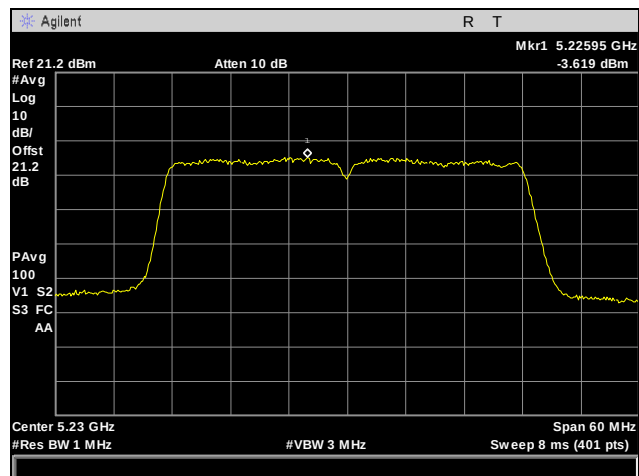


Plot 71. Power Spectral Density, High Channel, 802.11n 40 MHz, Port 2


Power Spectral Density, 802.11n 40 MHz, Port 3

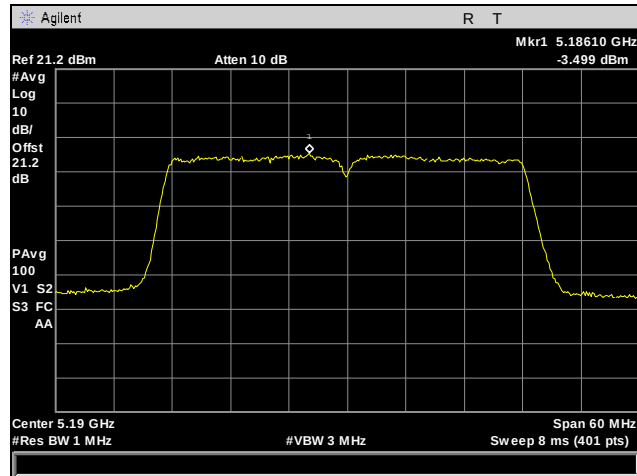


Power Spectral Density, 802.11n 80 MHz

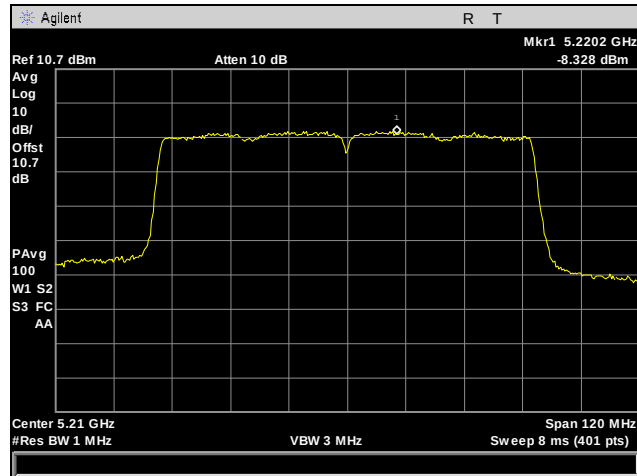

Plot 74. Power Spectral Density, 802.11n 80 MHz, Port 1

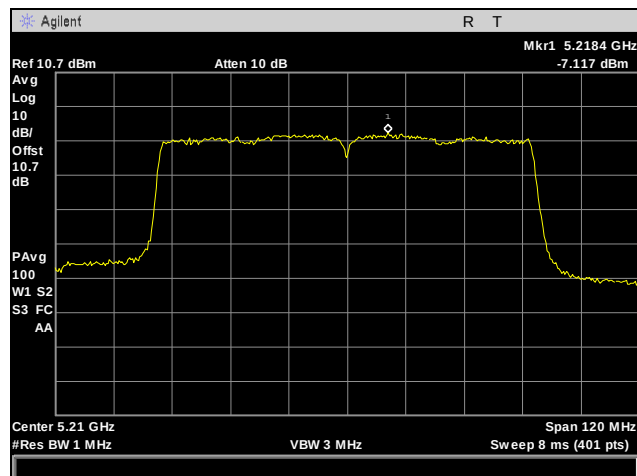

Plot 75. Power Spectral Density, 802.11n 80 MHz, Port 2

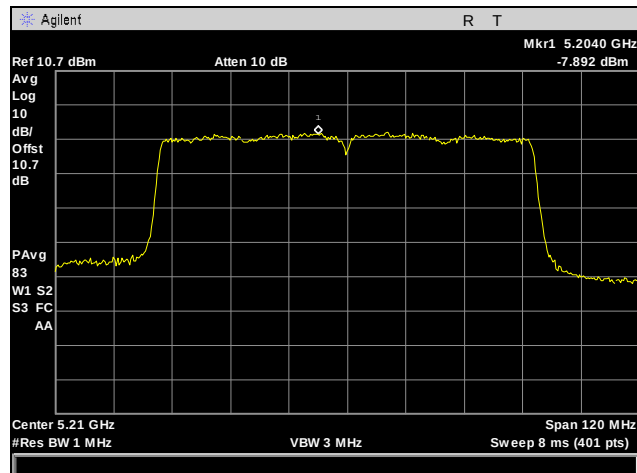

Plot 76. Power Spectral Density, 802.11n 80 MHz, Port 3

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.407(a)(6) Peak Excursion Ratio

- Test Requirements:** § 15.407(a)(6): The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.
- Test Procedure:** The EUT was connected directly to the spectrum analyzer through a attenuation. The 1st trace on the spectrum analyzer was set to RBW=1MHz, VBW=3MHz. A peak detector was used and the trace max held.. The 2nd trace on the spectrum analyzer was set according to measurement method SA-1 from the 789033 D01 General UNII Test Procedures v01r02 for making conducted power measurements.
- Test Results:** Equipment was compliant with the peak excursion ratio limits of § 15.407(a)(6). The peak excursion ratio was determined from plots on the following page(s).
- Test Engineer(s):** Jonathan Chao
- Test Date(s):** 02/18/13




Figure 5. Peak Excursion Ration Test Setup


Peak Excursion Ratio, 802.11a

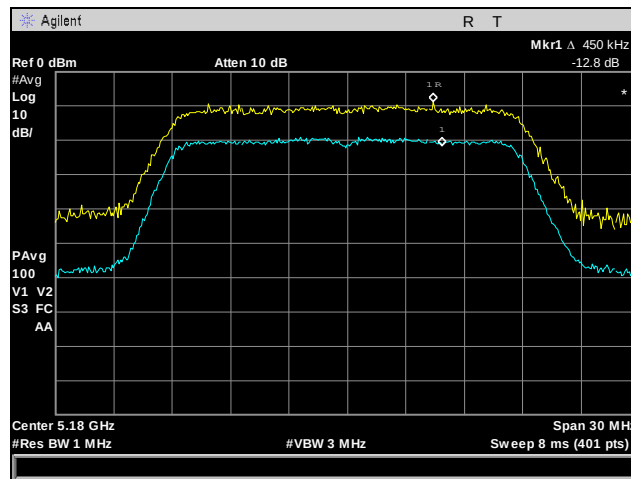

Plot 77. Peak Excursion Ratio, Low Channel, 802.11a

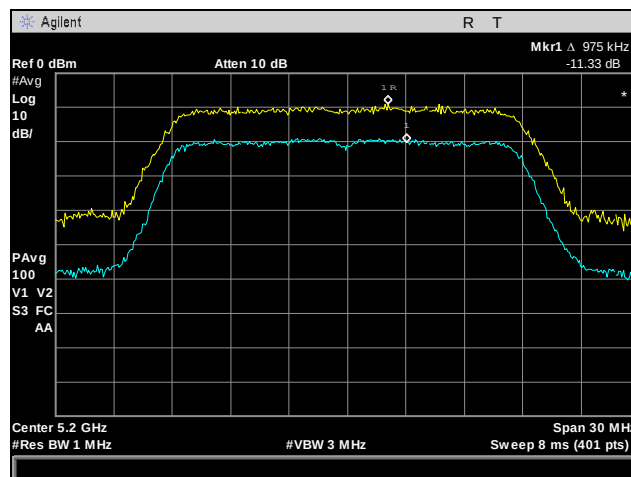


Plot 78. Peak Excursion Ratio, Mid Channel, 802.11a

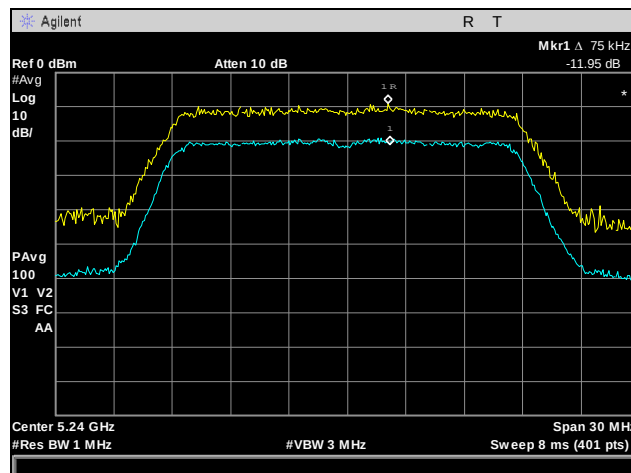


Plot 79. Peak Excursion Ratio, High Channel, 802.11a


Peak Excursion Ratio, 802.11n 20 MHz, Port 1

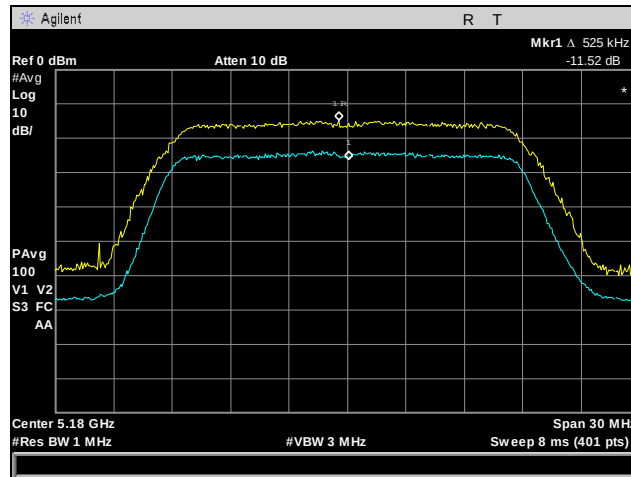

Plot 80. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz, Port 1

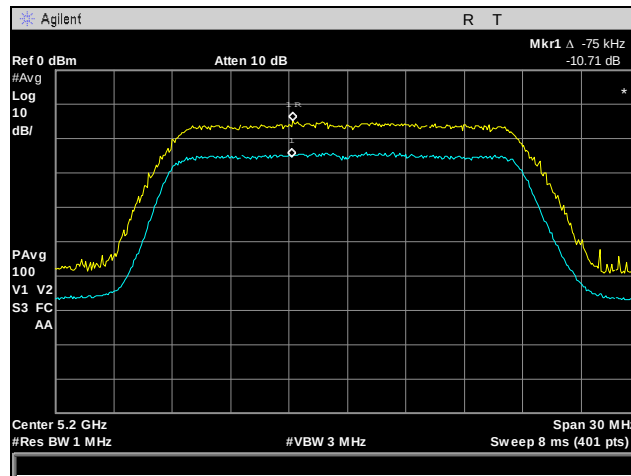


Plot 81. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz, Port 1

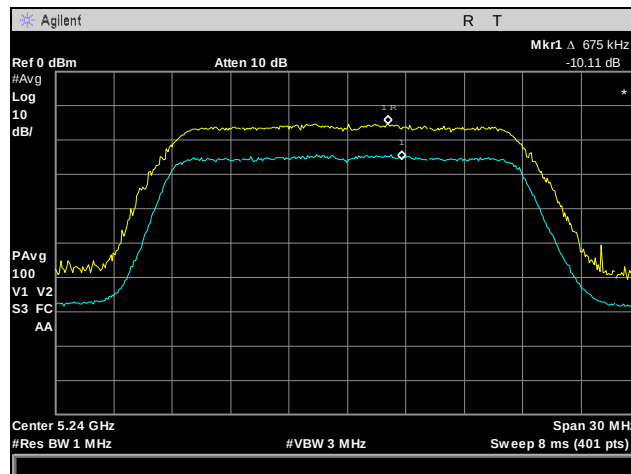


Plot 82. Peak Excursion Ratio, High Channel, 802.11n 20 MHz, Port 1


Peak Excursion Ratio, 802.11n 20 MHz, Port 2

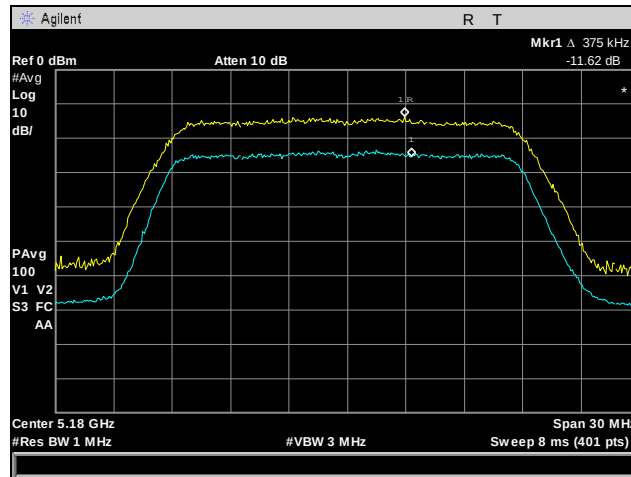

Plot 83. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz, Port 2

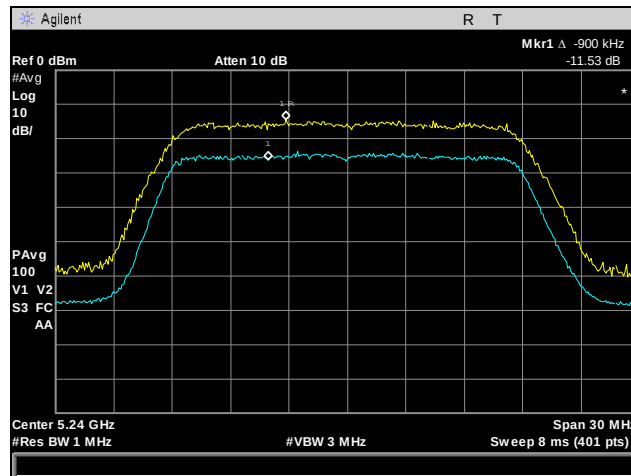


Plot 84. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz, Port 2

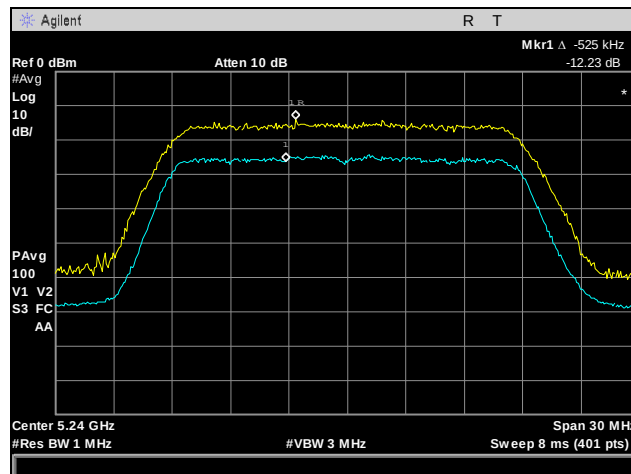


Plot 85. Peak Excursion Ratio, High Channel, 802.11n 20 MHz, Port 2


Peak Excursion Ratio, 802.11n 20 MHz, Port 3

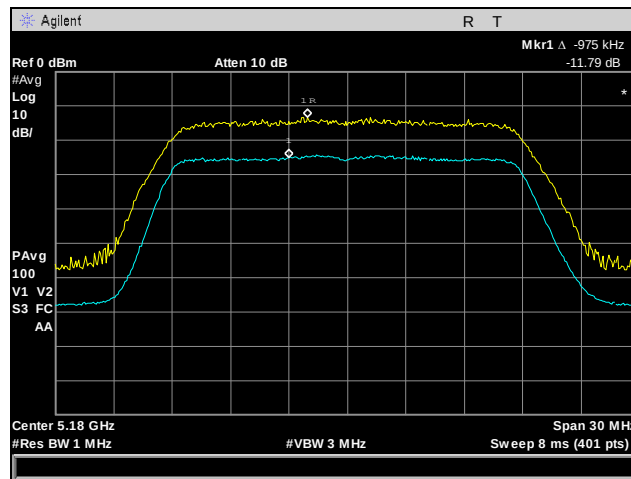

Plot 86. Peak Excursion Ratio, Low Channel, 802.11n 20 MHz, Port 3

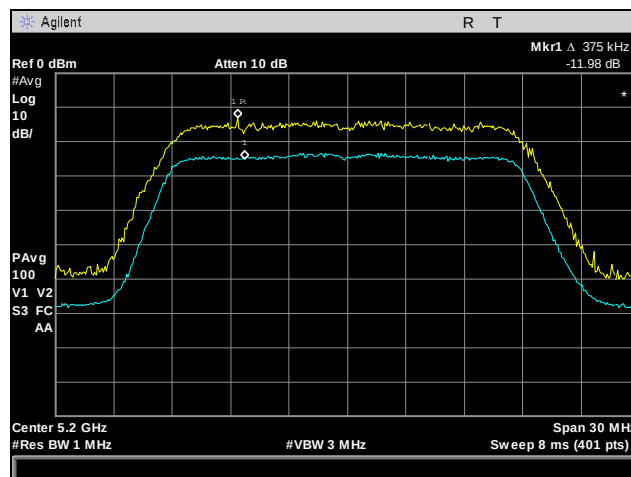


Plot 87. Peak Excursion Ratio, Mid Channel, 802.11n 20 MHz, Port 3

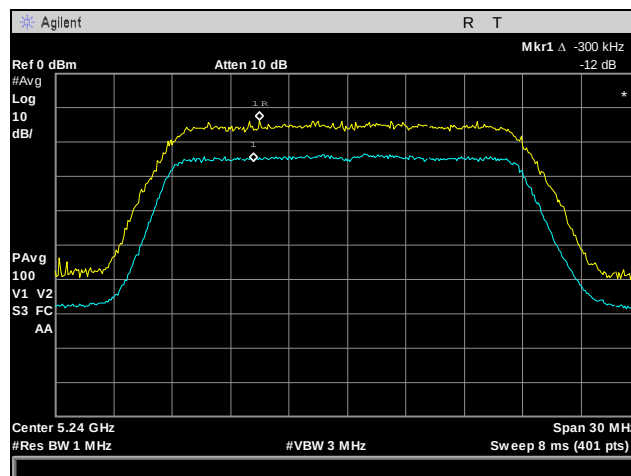


Plot 88. Peak Excursion Ratio, High Channel, 802.11n 20 MHz, Port 3

Peak Excursion Ratio, 802.11n 40 MHz, Port 1

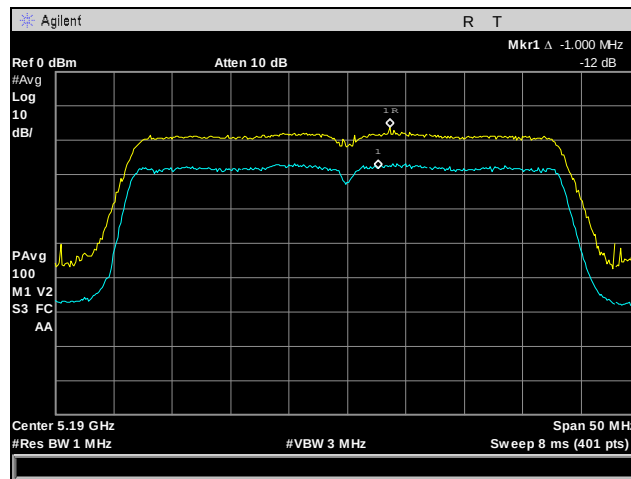


Plot 89. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz, Port 1

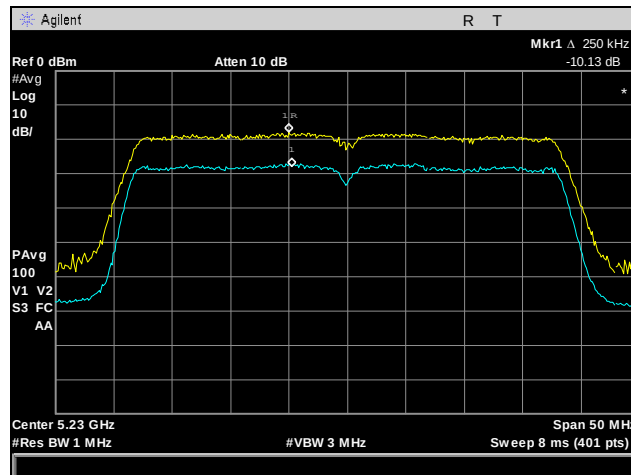


Plot 90. Peak Excursion Ratio, High Channel, 802.11n 40 MHz, Port 1

Peak Excursion Ratio, 802.11n 40 MHz, Port 2

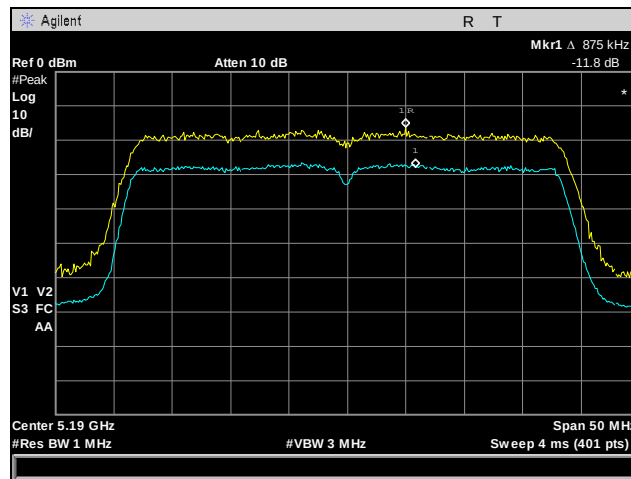


Plot 91. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz, Port 2

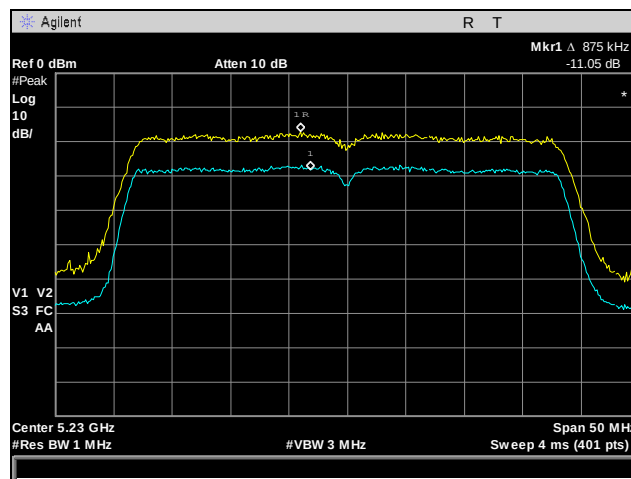


Plot 92. Peak Excursion Ratio, High Channel, 802.11n 40 MHz, Port 2

Peak Excursion Ratio, 802.11n 40 MHz, Port 3

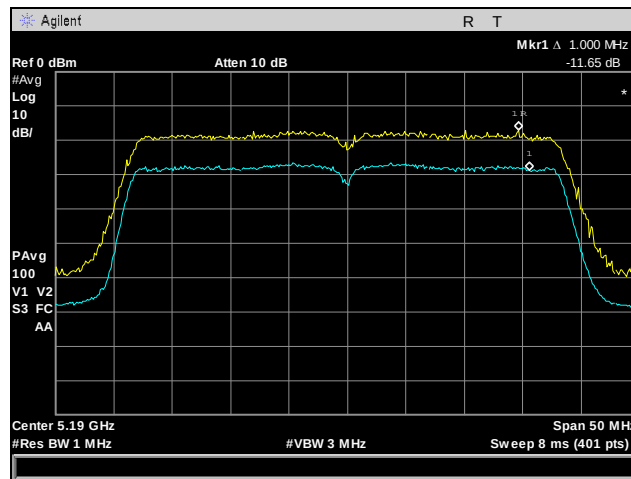


Plot 93. Peak Excursion Ratio, Low Channel, 802.11n 40 MHz, Port 3

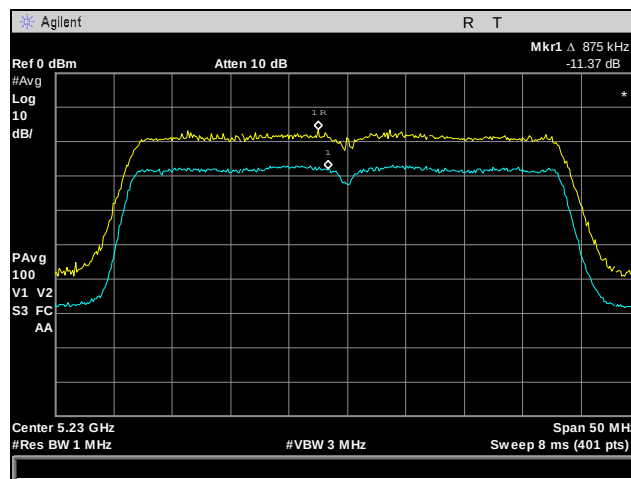


Plot 94. Peak Excursion Ratio, High Channel, 802.11n 40 MHz, Port 3


Peak Excursion Ratio, 802.11n 80 MHz

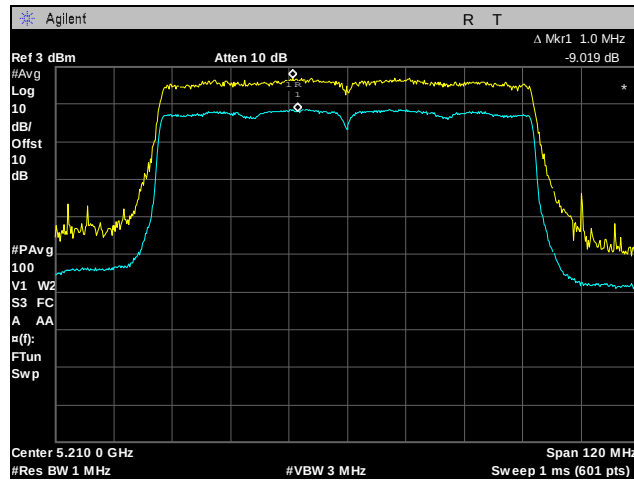

Plot 95. Peak Excursion Ratio, 802.11n 80 MHz, Port 1

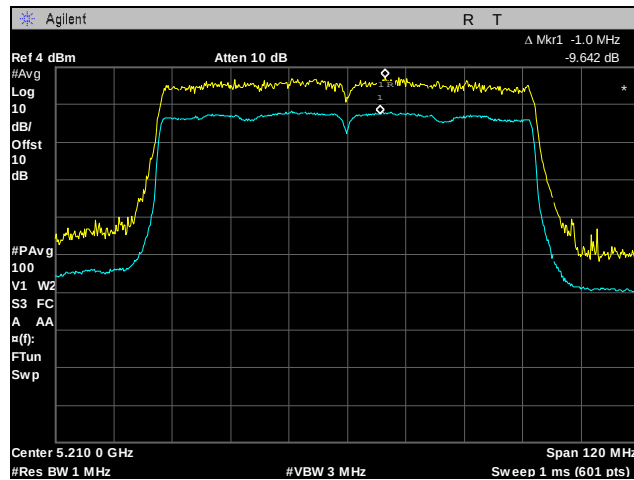

Plot 96. Peak Excursion Ratio, 802.11n 80 MHz, Port 2

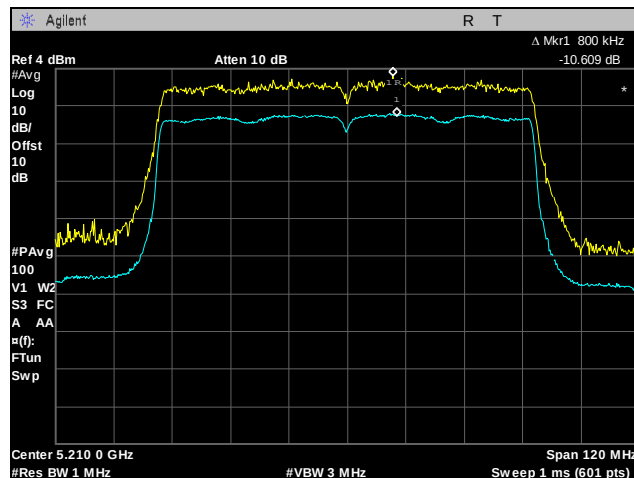

Plot 97. Peak Excursion Ratio, 802.11n 80 MHz, Port 3

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(1), (6), (7) Undesirable Emissions

Test Requirements: § 15.407(b)(1), (6), (7); §15.205: Emissions outside the frequency band.

§ 15.407(b)(1): For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The transmitter was placed on an 80cm wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions. A preamp was used in the range from 7-18GHz to improve noise floor. Plots were corrected for cable loss, antenna, and preamp gain.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. The procedure was used for average.


For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Only noise floor was seen above 18 GHz.

Test Results: The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results. All emissions above 18 GHz were at the noise floor of the receiver.


Test Engineer(s): Jonathan Chao

Test Date(s): 01/18/13 – 01/21/13


Radiated Spurious Emissions, 802.11a, 7 dBi Patch Antenna

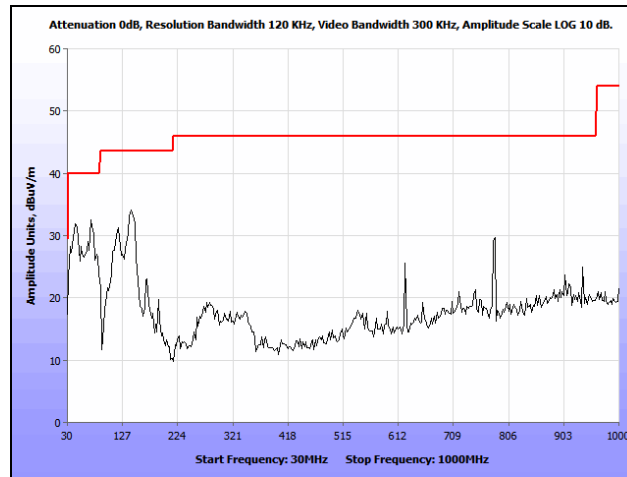


Plot 98. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz, 7 dBi Patch

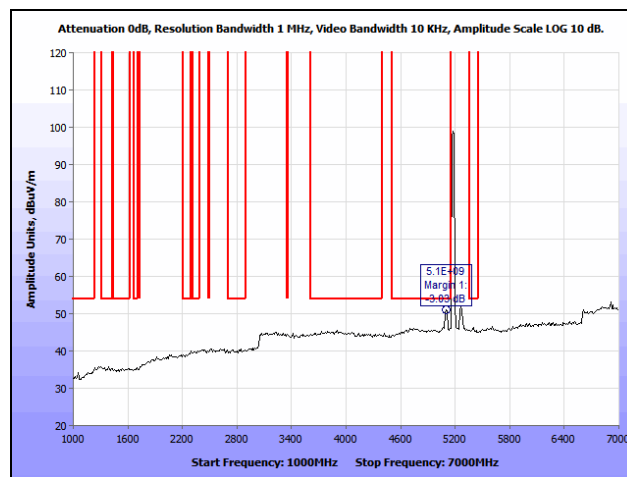


Plot 99. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

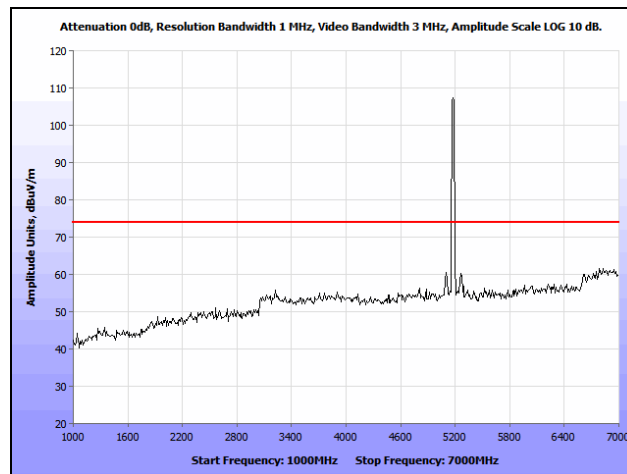


Plot 100. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

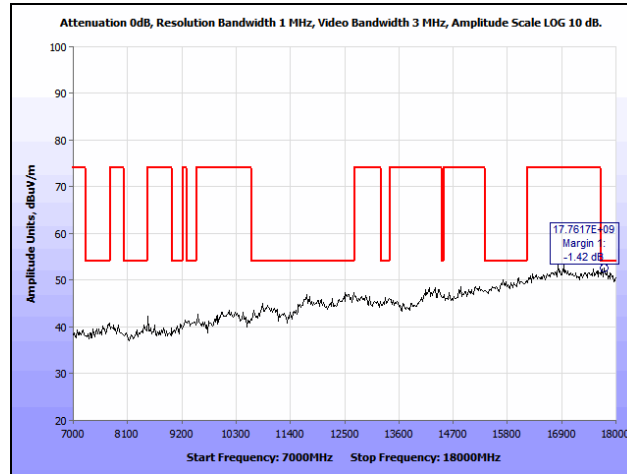


Plot 101. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz, 7 dBi Patch

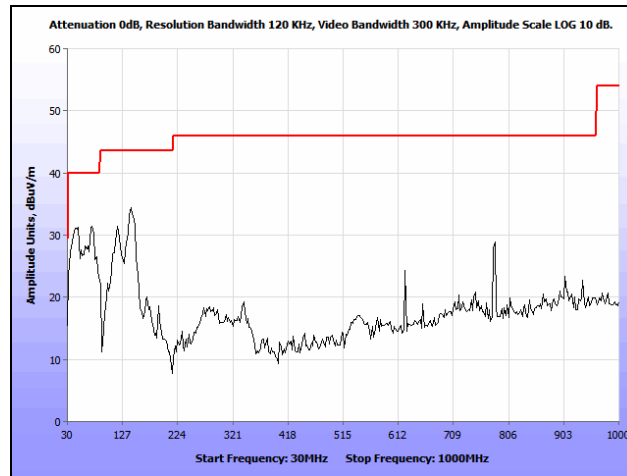


Plot 102. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz, 7 dBi Patch

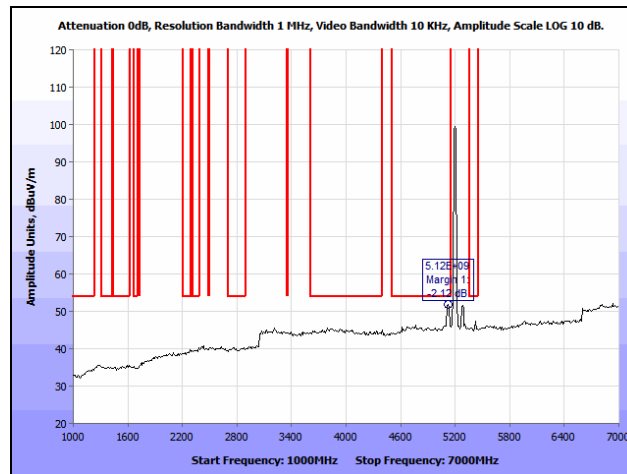


Plot 103. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

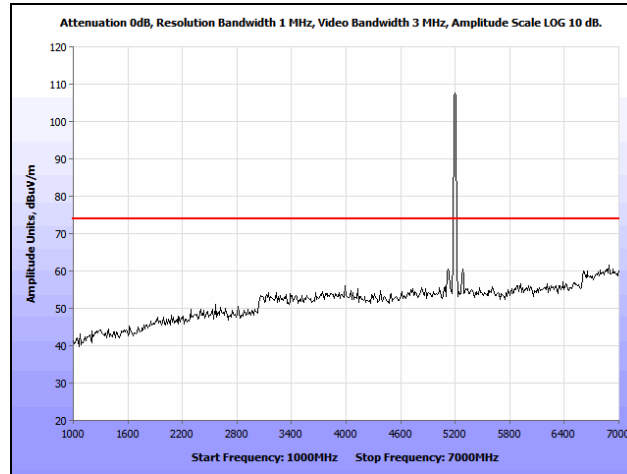


Plot 104. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

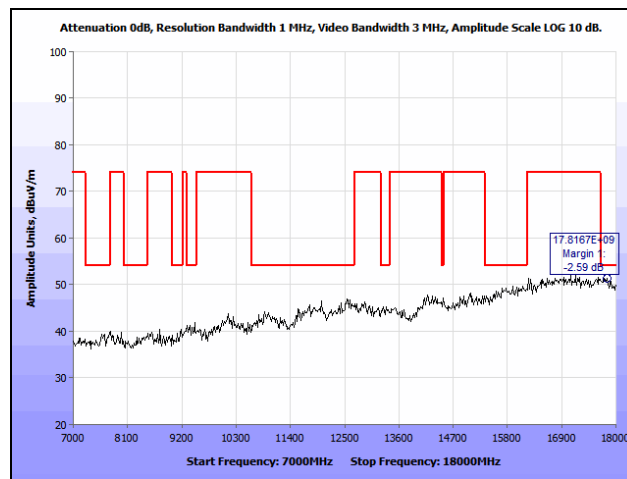


Plot 105. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz, 7 dBi Patch

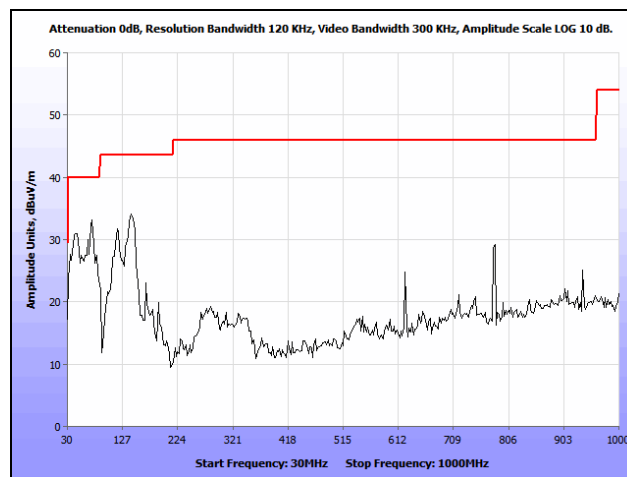


Plot 106. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz, 7 dBi Patch

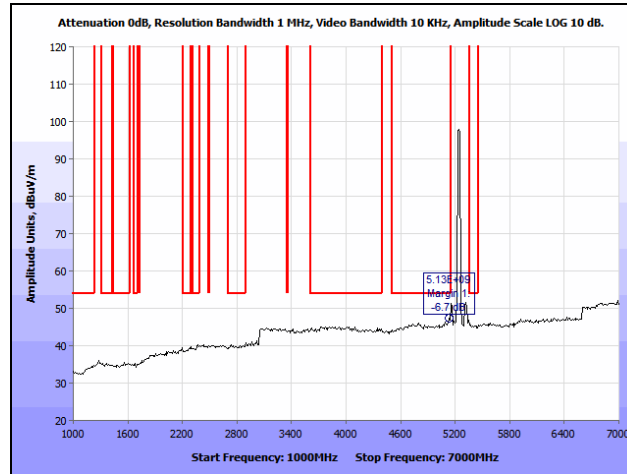

Plot 107. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

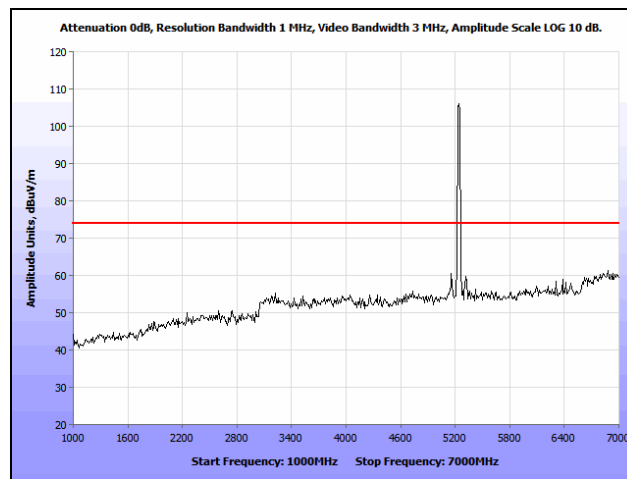


Plot 108. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

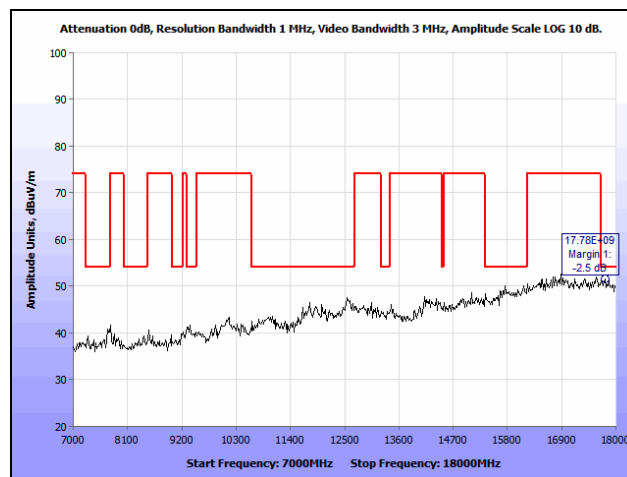


Plot 109. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz, 7 dBi Patch


Radiated Spurious Emissions, 802.11n 20 MHz, 7 dBi Patch Antenna

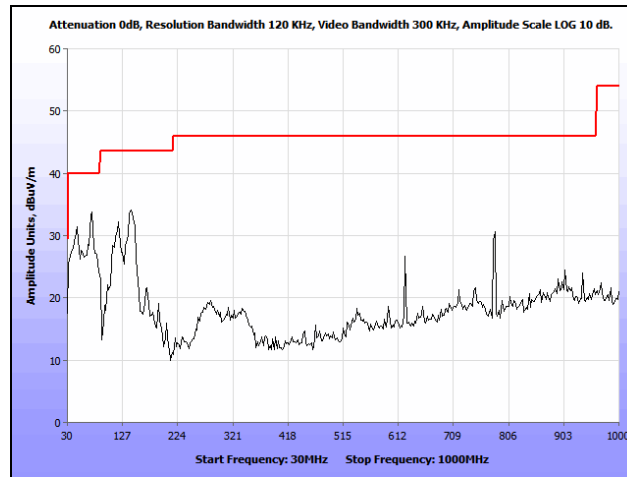


Plot 110. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz, 7 dBi Patch

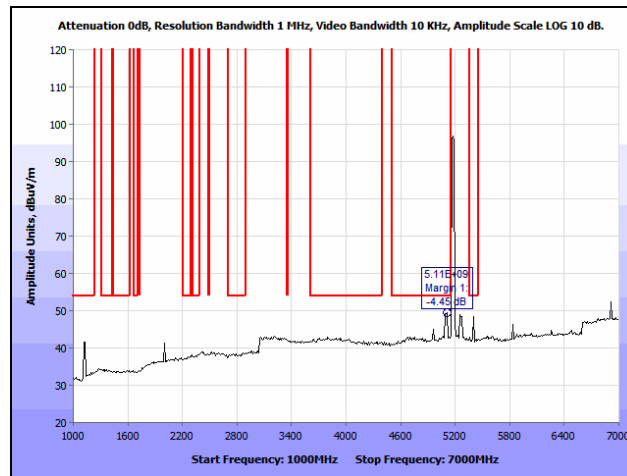


Plot 111. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

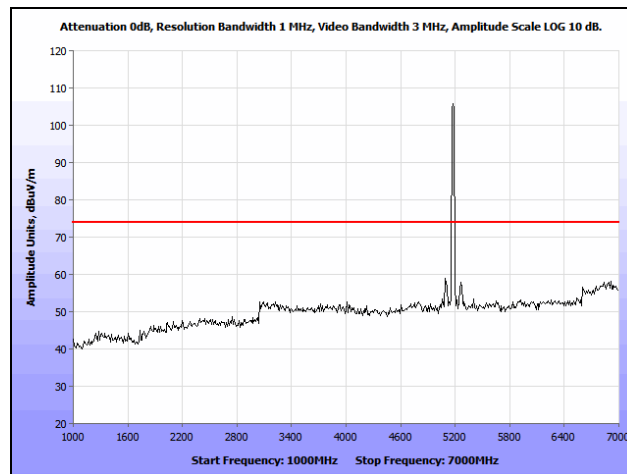


Plot 112. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

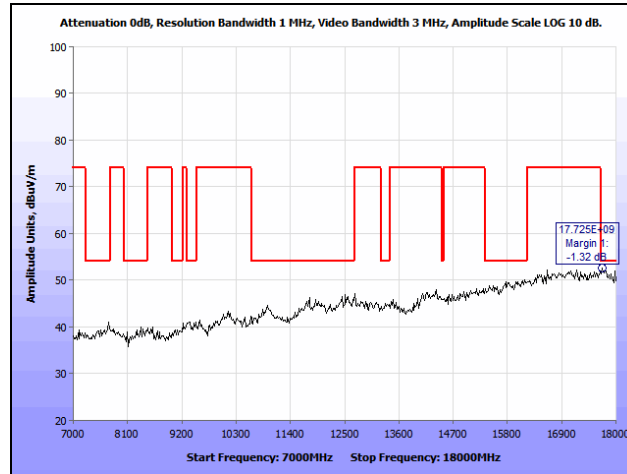


Plot 113. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz, 7 dBi Patch

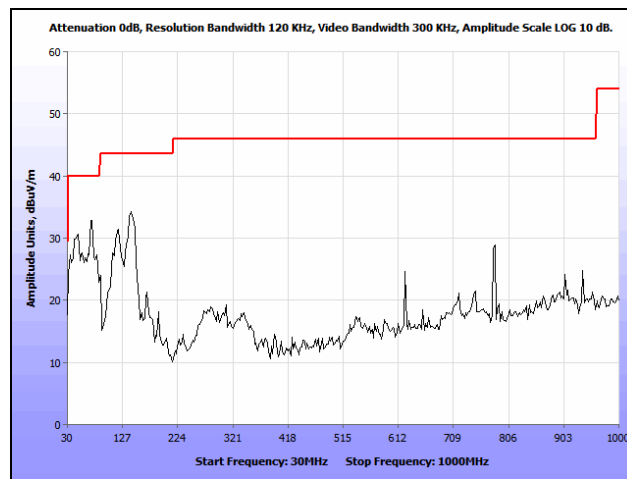


Plot 114. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz, 7 dBi Patch

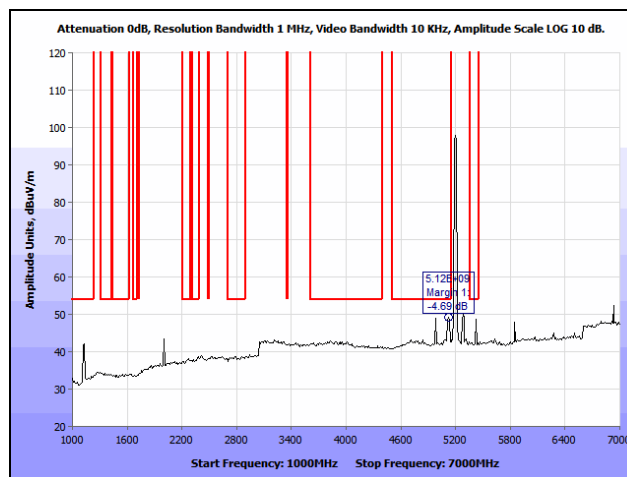


Plot 115. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

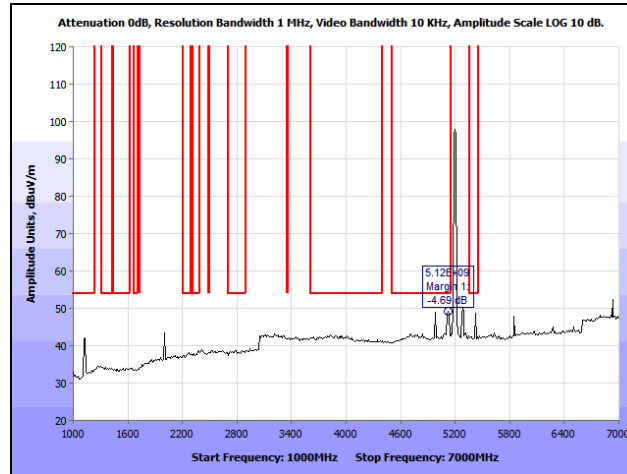


Plot 116. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

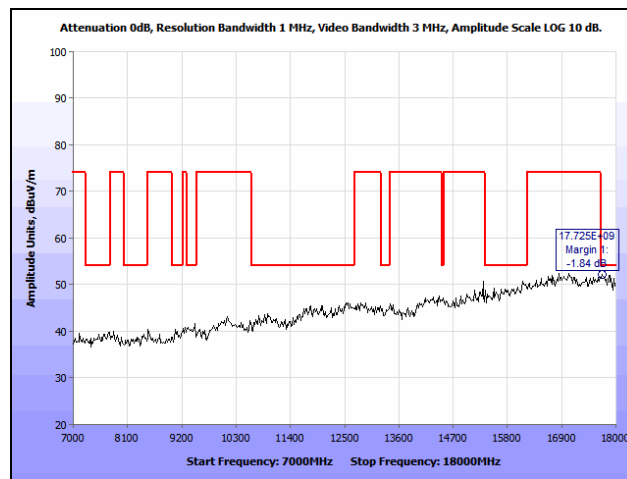


Plot 117. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz, 7 dBi Patch

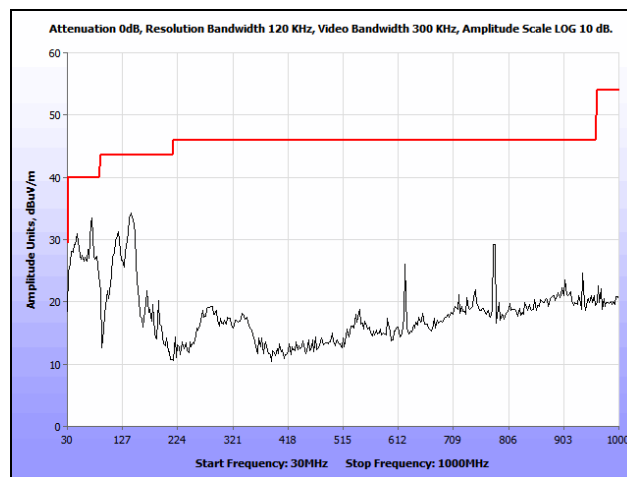


Plot 118. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz, 7 dBi Patch

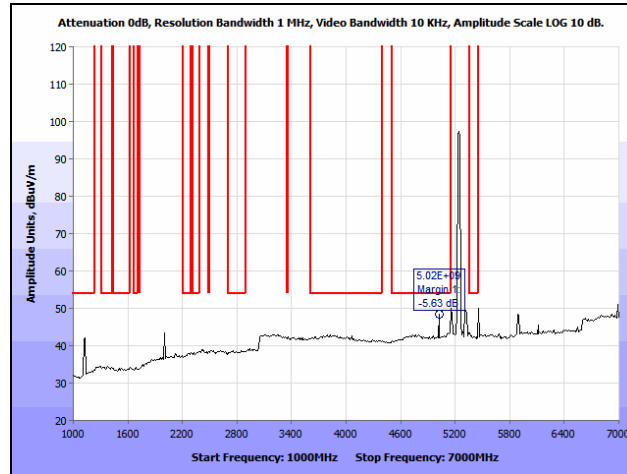

Plot 119. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

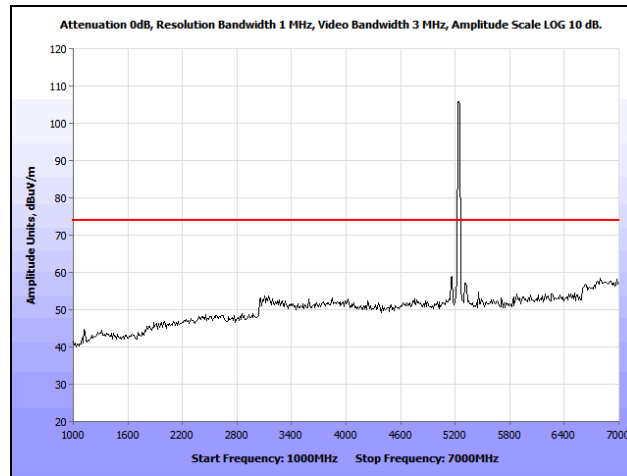


Plot 120. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

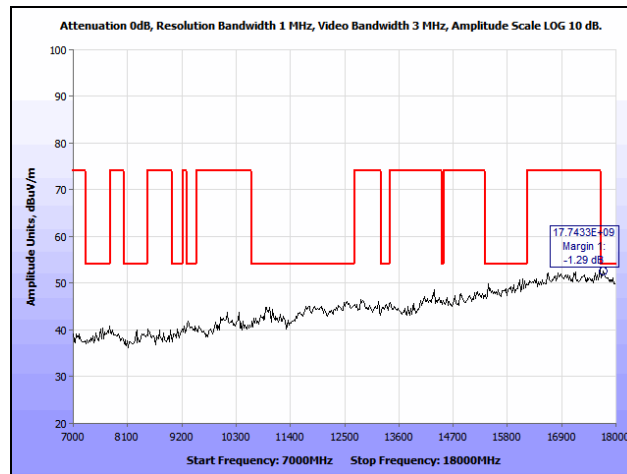


Plot 121. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz, 7 dBi Patch


Radiated Spurious Emissions, 802.11n 40 MHz, 7 dBi Patch Antenna

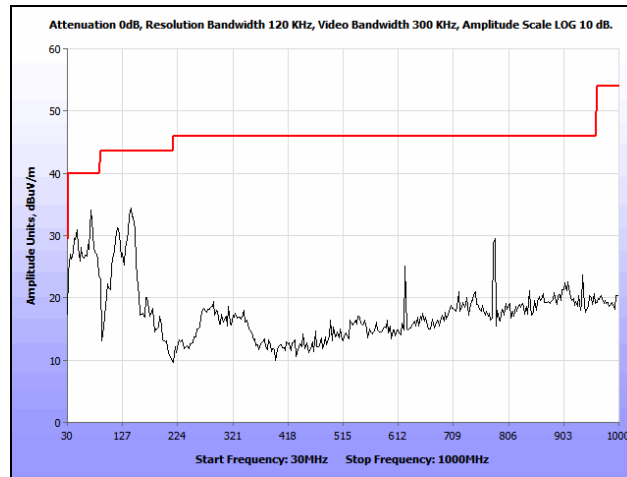


Plot 122. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz, 7 dBi Patch

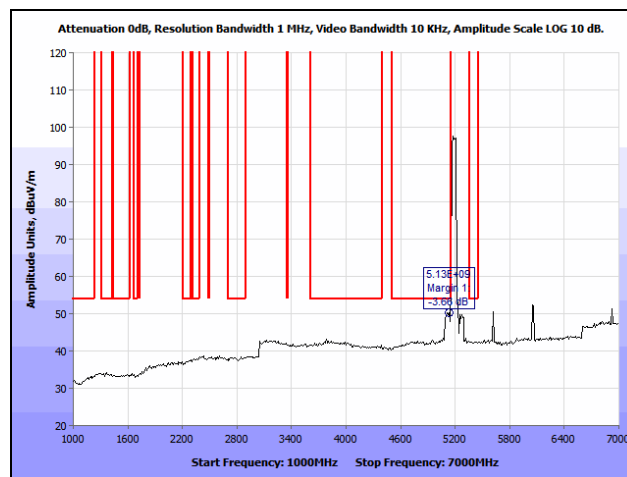


Plot 123. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

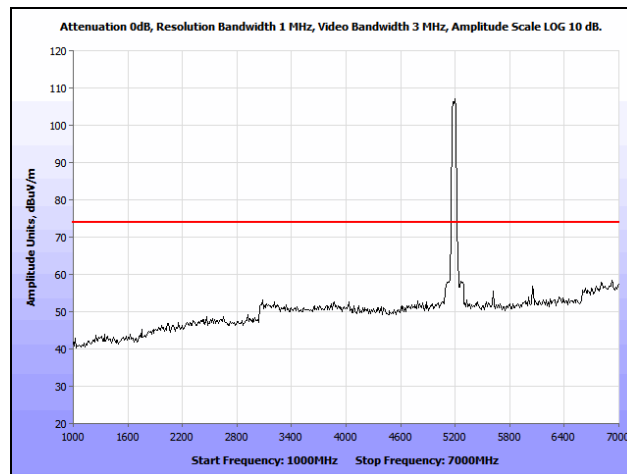


Plot 124. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

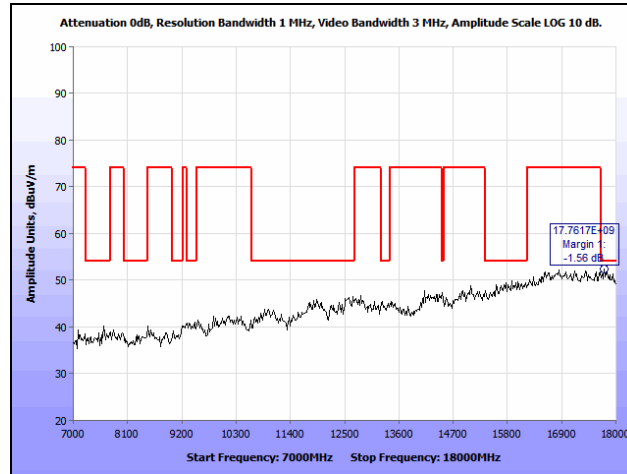


Plot 125. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz, 7 dBi Patch

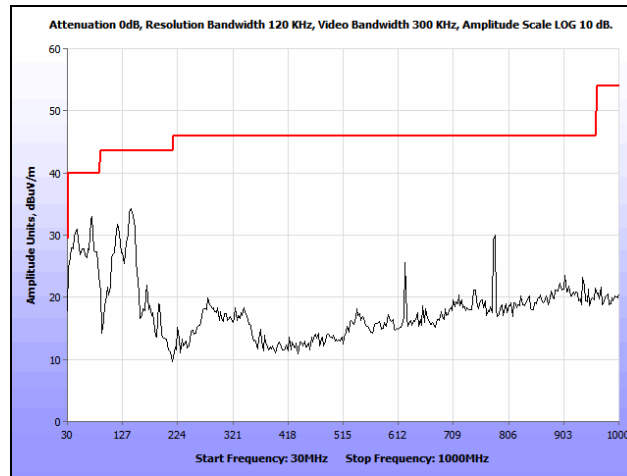


Plot 126. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz, 7 dBi Patch

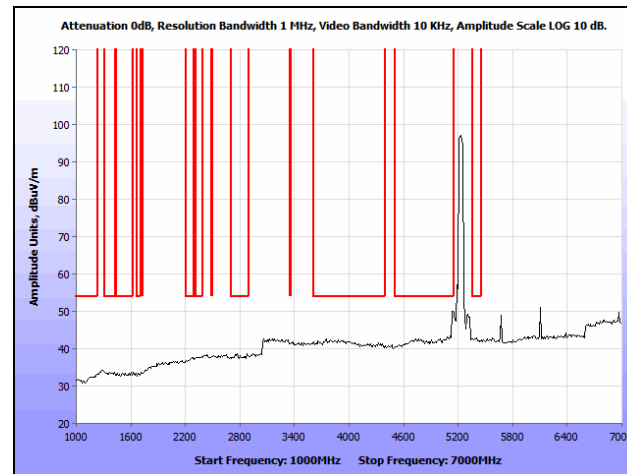

Plot 127. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average, 7 dBi Patch

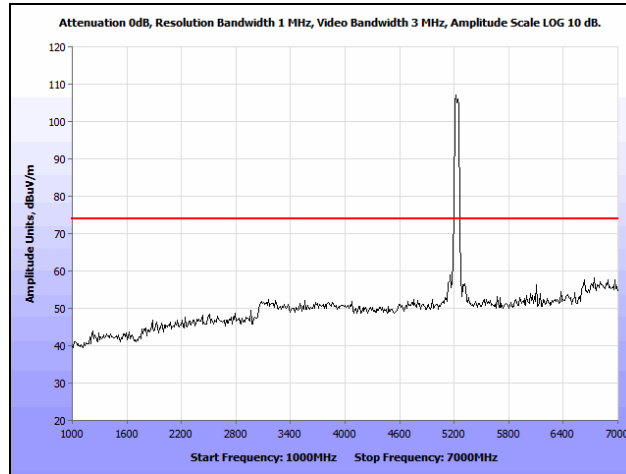


Plot 128. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak, 7 dBi Patch

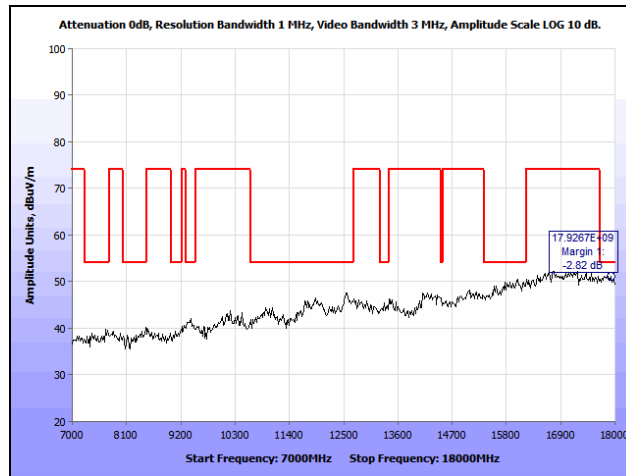


Plot 129. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, 7 dBi Patch


Radiated Spurious Emissions, 802.11n 80 MHz, 7 dBi Patch Antenna

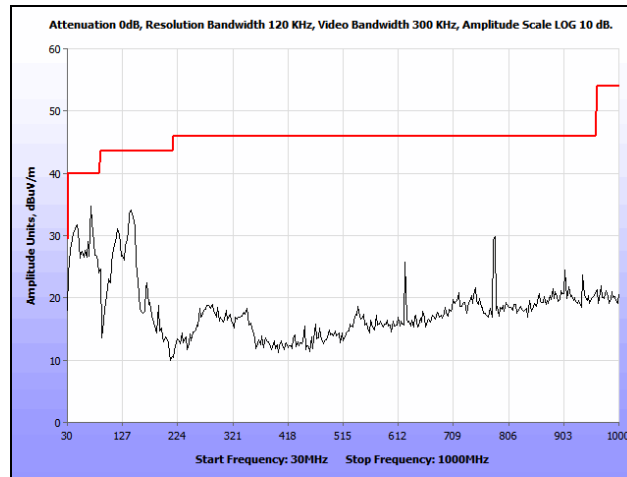


Plot 130. Radiated Spurious Emissions, 802.11n 80 MHz, 30 MHz – 1 GHz, 7 dBi Patch

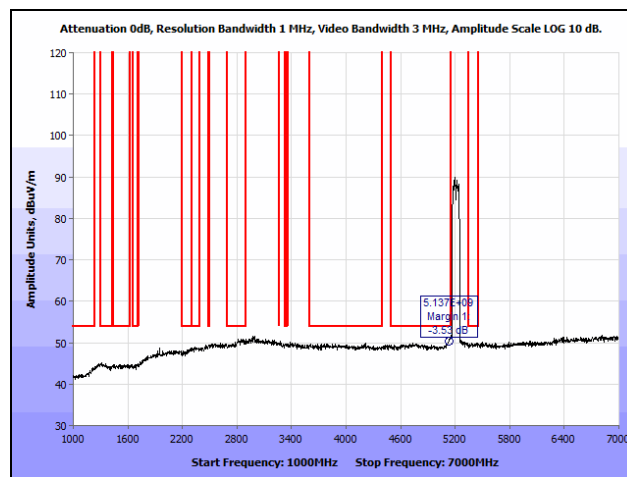

Plot 131. Radiated Spurious Emissions, 802.11n 80 MHz, 1 GHz – 7 GHz, Average, 7 dBi Patch

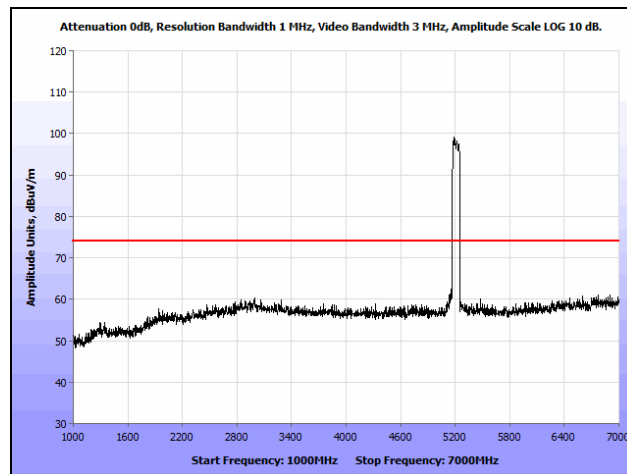


Plot 132. Radiated Spurious Emissions, 802.11n 80 MHz, 1 GHz – 7 GHz, Peak, 7 dBi Patch

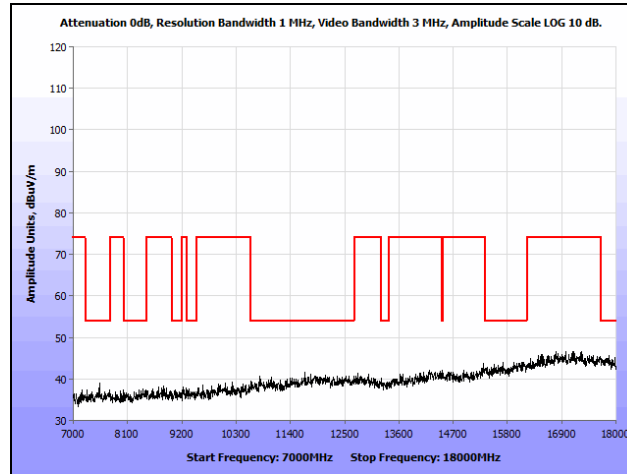


Plot 133. Radiated Spurious Emissions, 802.11n 80 MHz, 7 GHz – 18 GHz, 7 dBi


Radiated Spurious Emissions, 802.11a, Ceiling Antenna

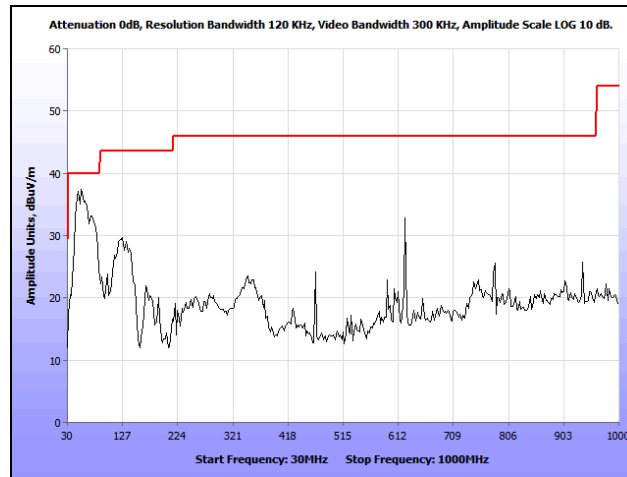


Plot 134. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz, Ceiling

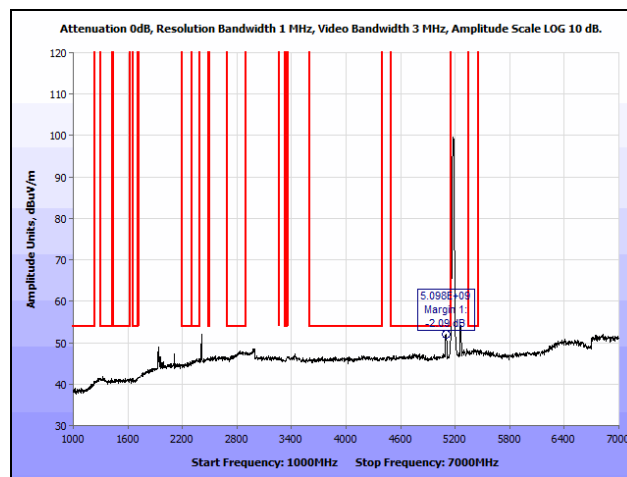


Plot 135. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Average, Ceiling

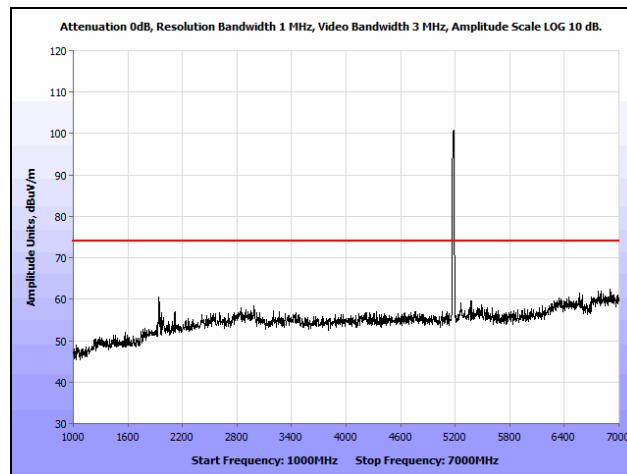


Plot 136. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling

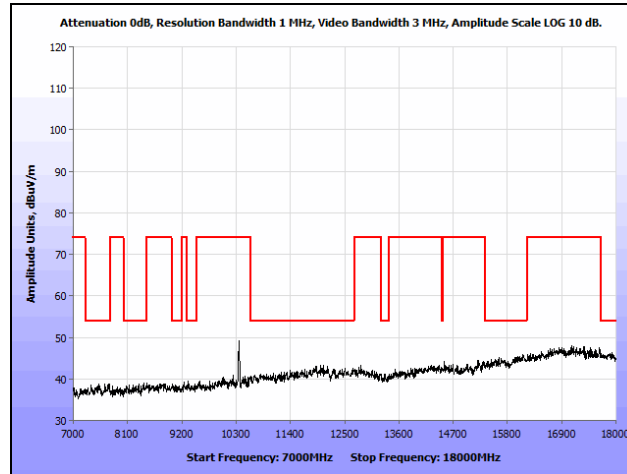


Plot 137. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz, Ceiling

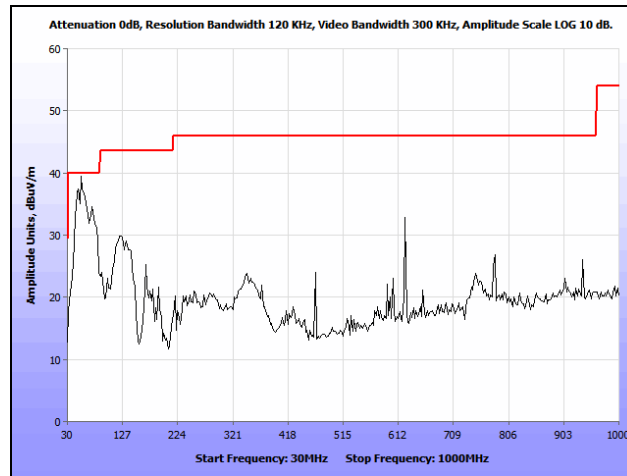


Plot 138. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz, Ceiling

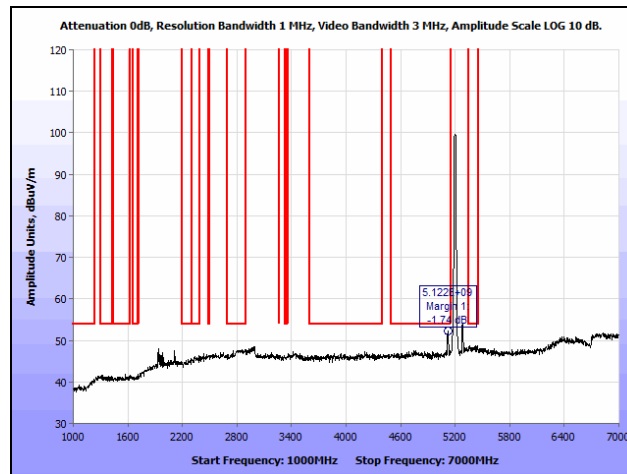


Plot 139. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Average, Ceiling

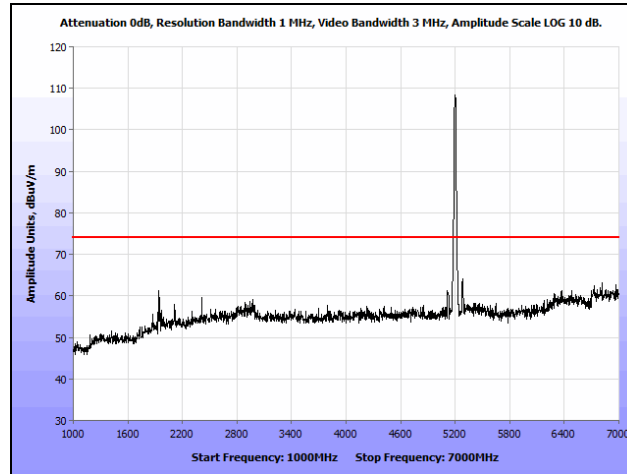


Plot 140. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Peak, Ceiling

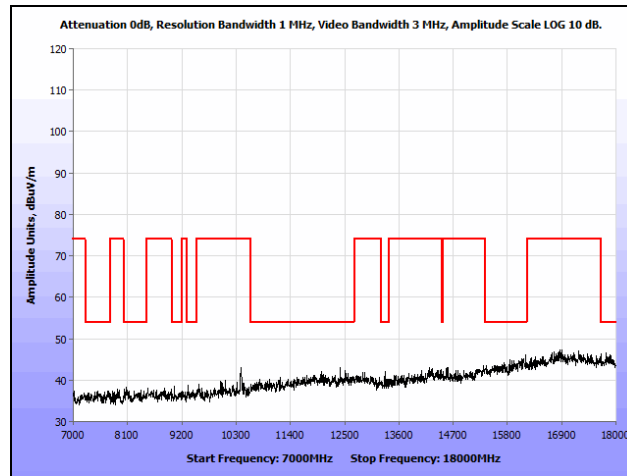


Plot 141. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz, Ceiling

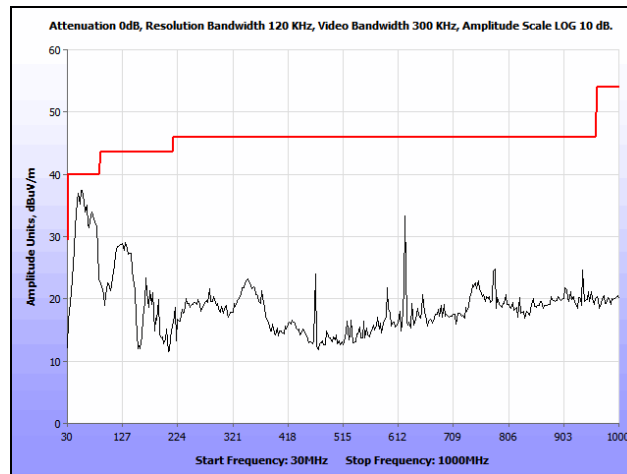


Plot 142. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz, Ceiling

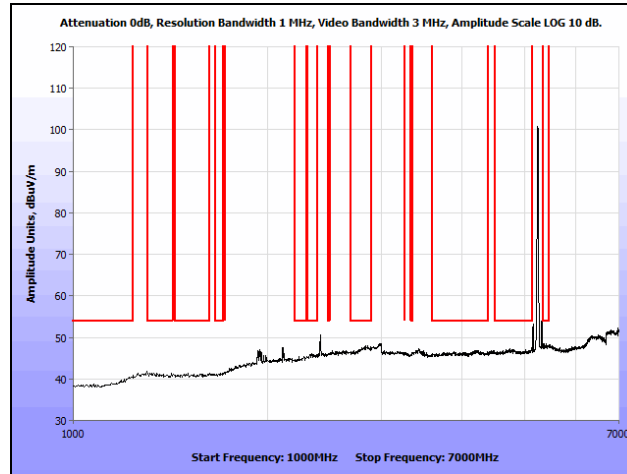

Plot 143. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Average, Ceiling

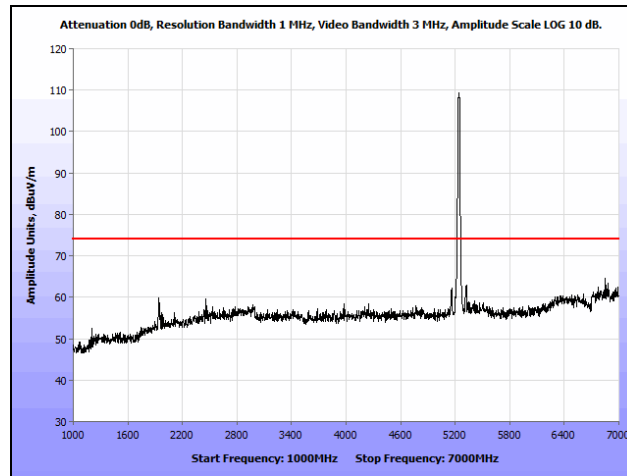


Plot 144. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Peak, Ceiling

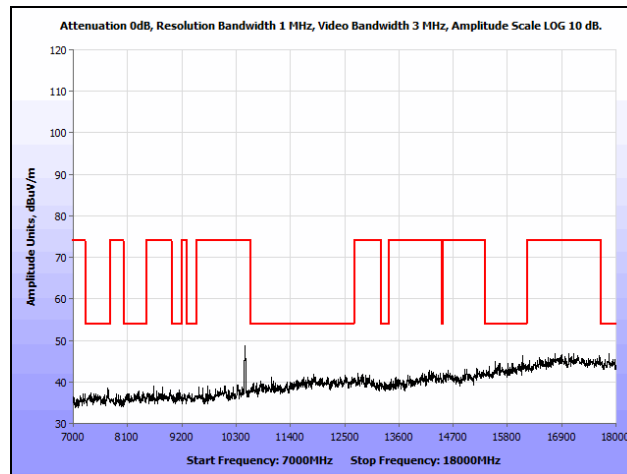


Plot 145. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz, Ceiling


Radiated Spurious Emissions, 802.11n 20 MHz, Ceiling Antenna

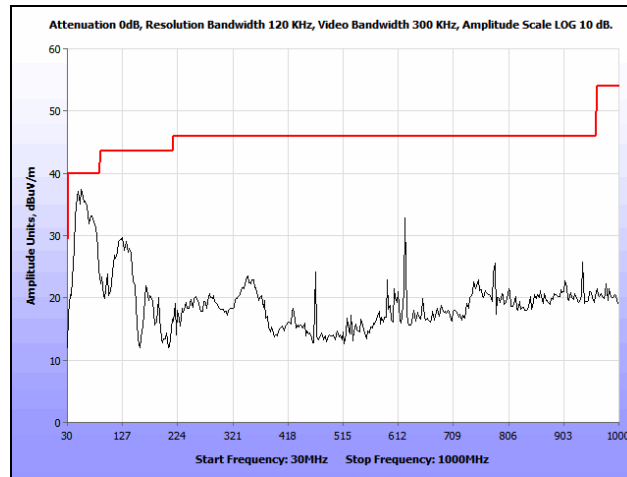


Plot 146. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz, Ceiling

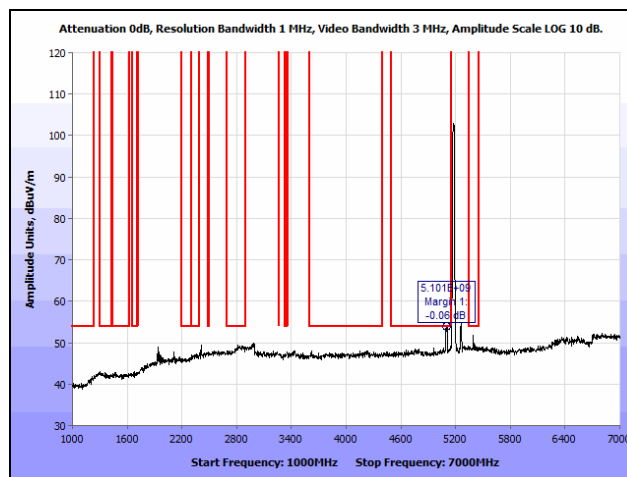


Plot 147. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average, Ceiling

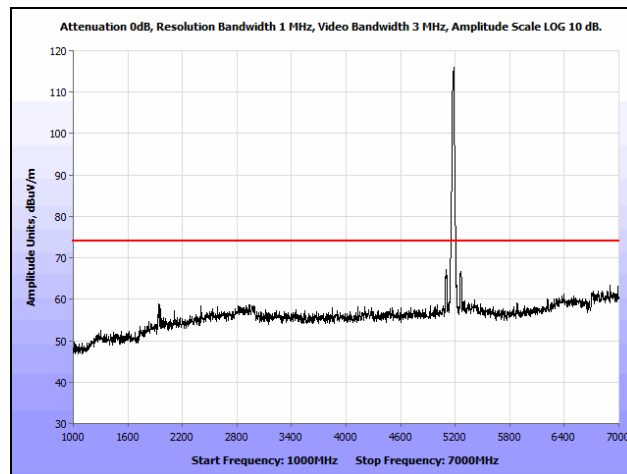


Plot 148. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling

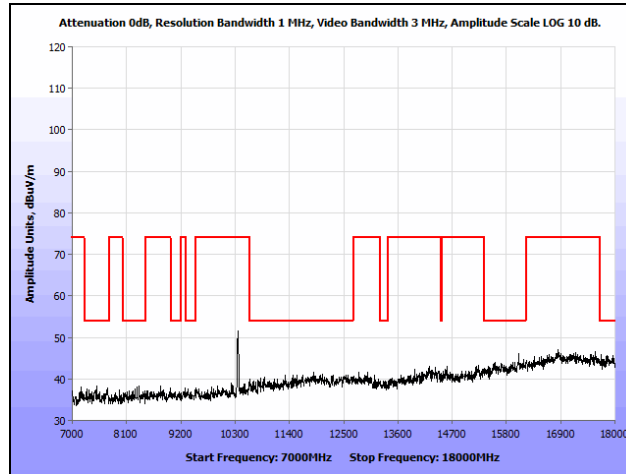


Plot 149. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz, Ceiling

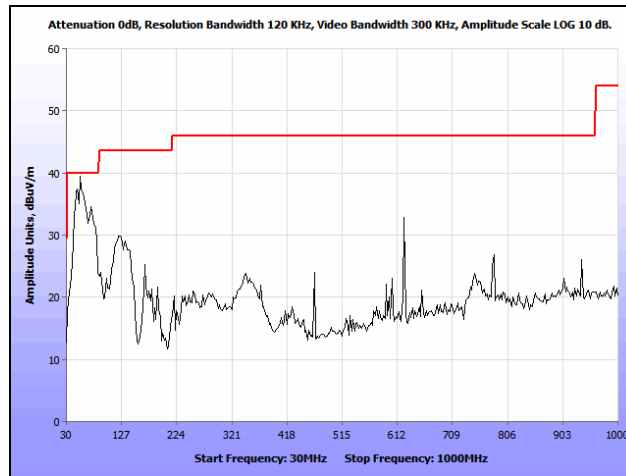


Plot 150. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz, Ceiling

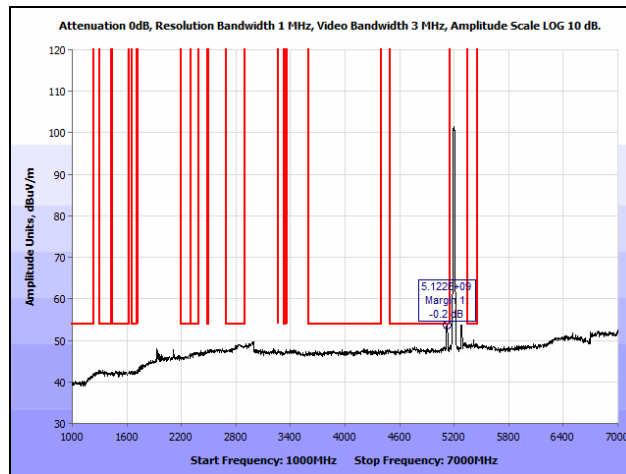


Plot 151. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average, Ceiling

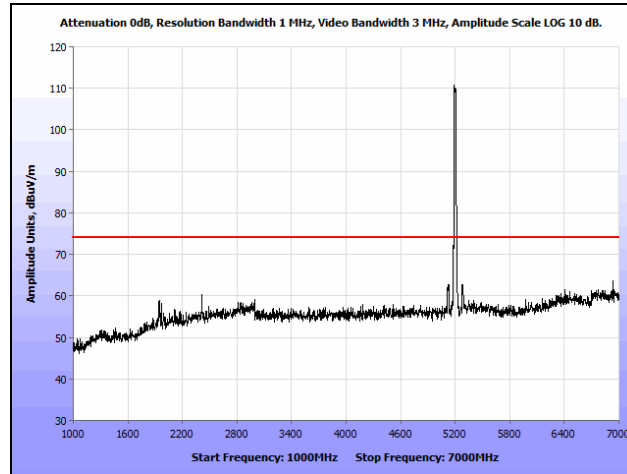


Plot 152. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak, Ceiling

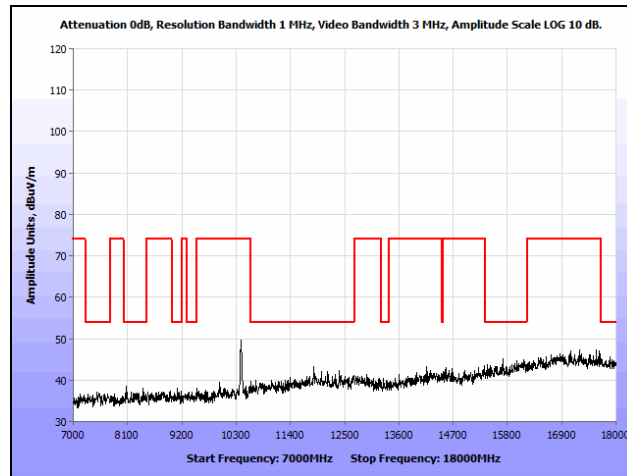


Plot 153. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz, Ceiling

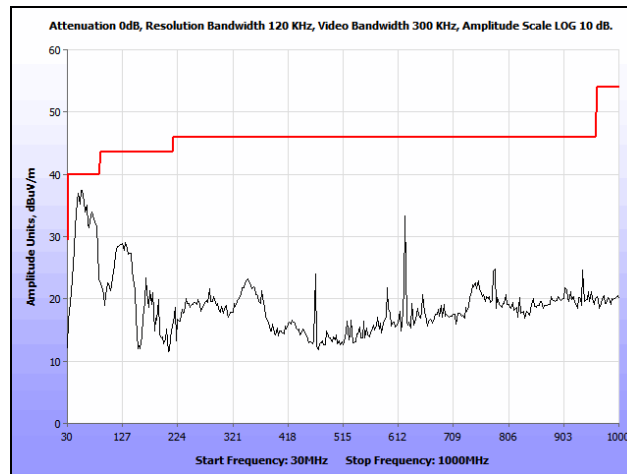


Plot 154. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz, Ceiling

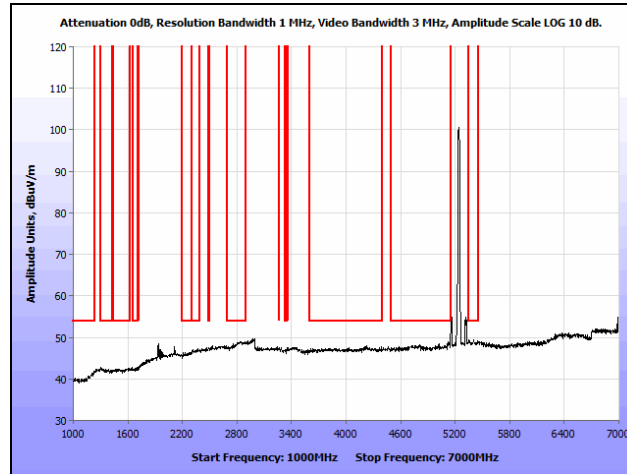

Plot 155. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average, Ceiling

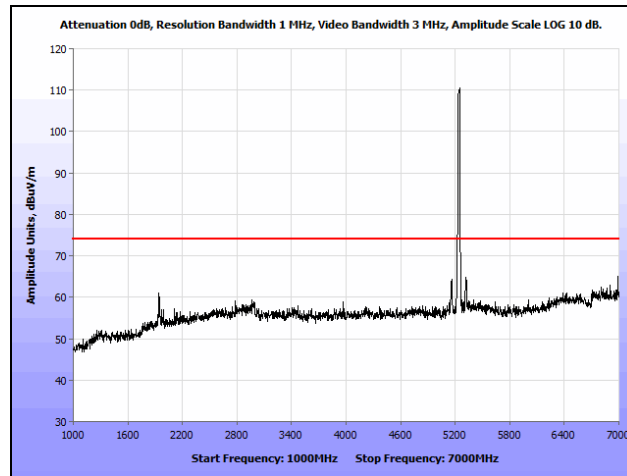


Plot 156. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak, Ceiling

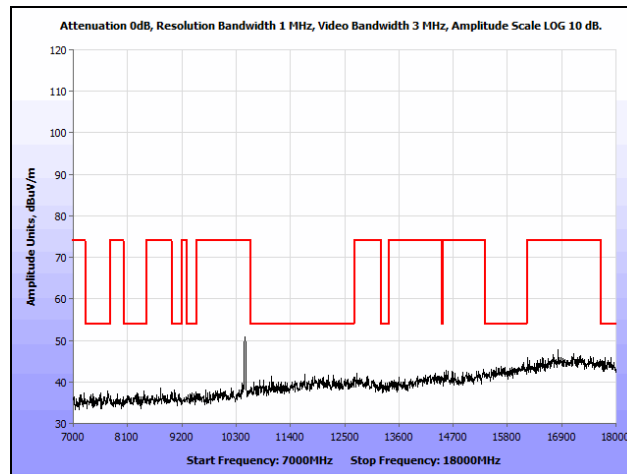


Plot 157. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz, Ceiling


Radiated Spurious Emissions, 802.11n 40 MHz, Ceiling Antenna

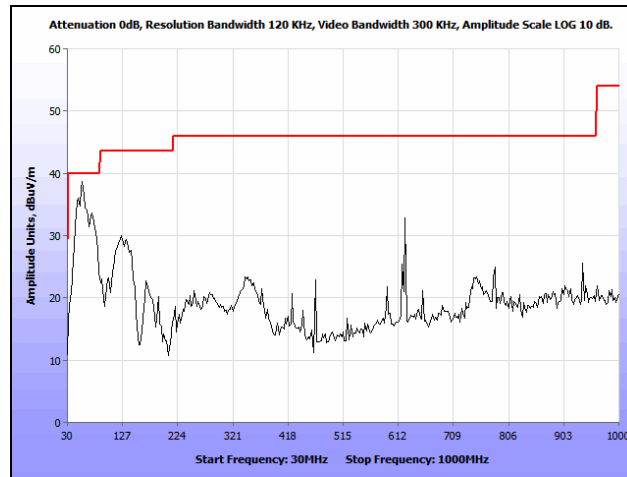


Plot 158. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz, Ceiling

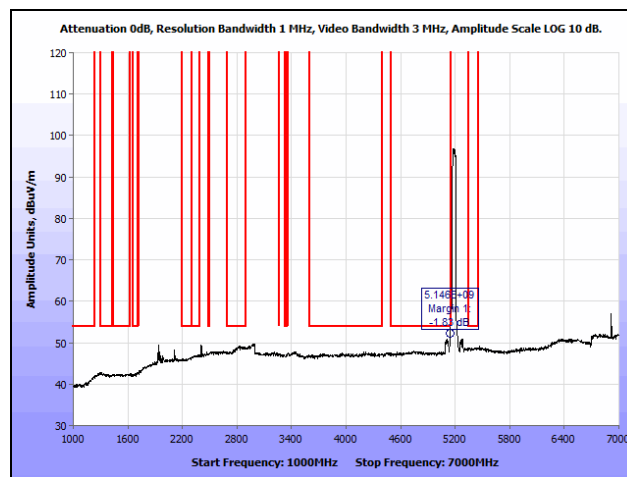


Plot 159. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average, Ceiling

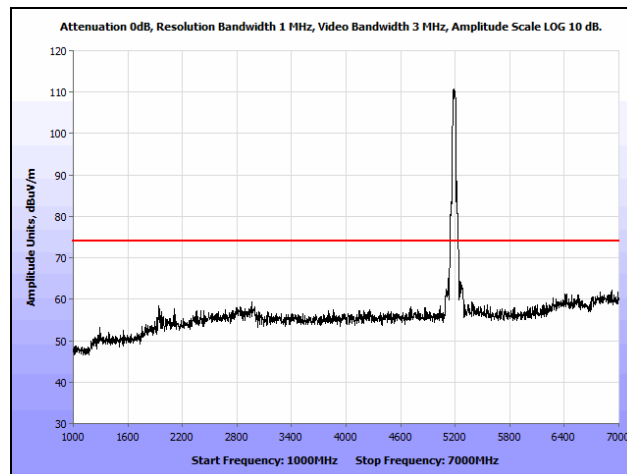


Plot 160. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling

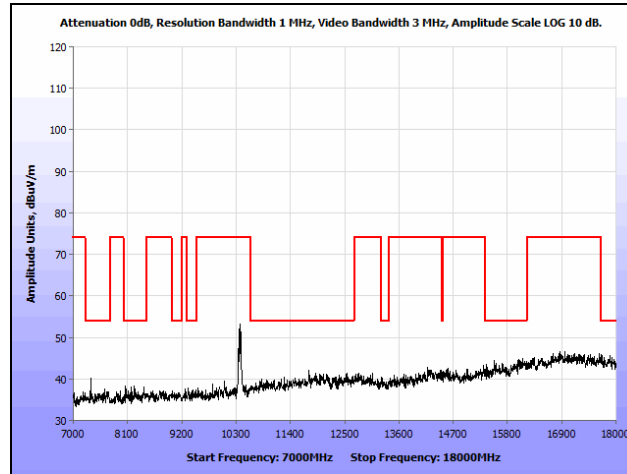


Plot 161. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz, Ceiling

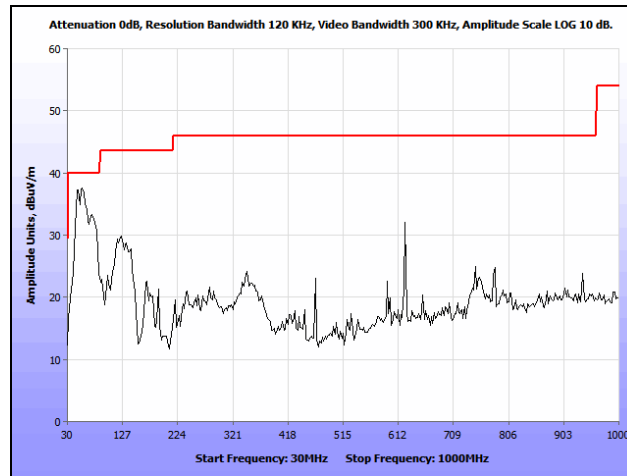


Plot 162. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz, Ceiling

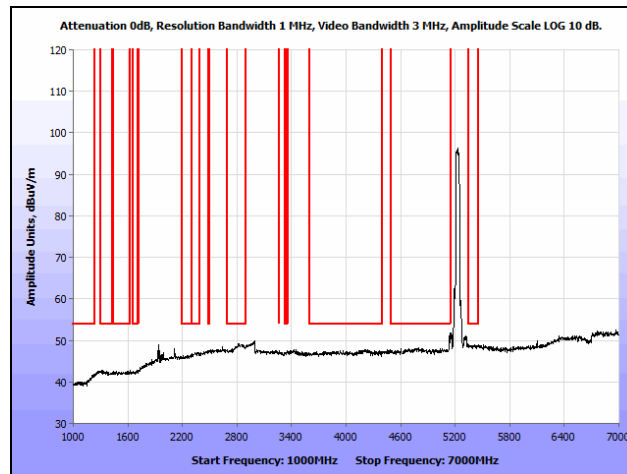

Plot 163. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average, Ceiling

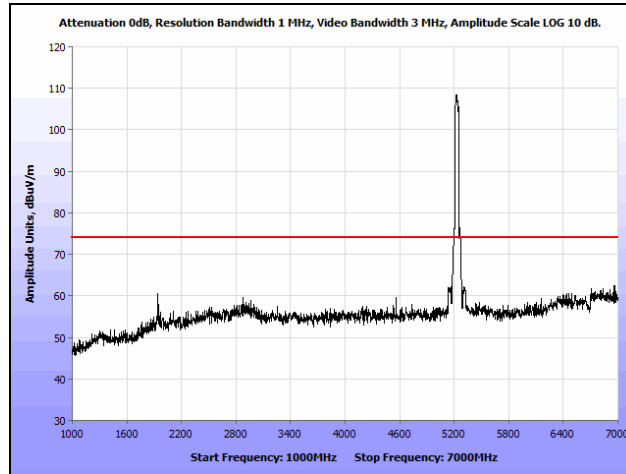


Plot 164. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak, Ceiling

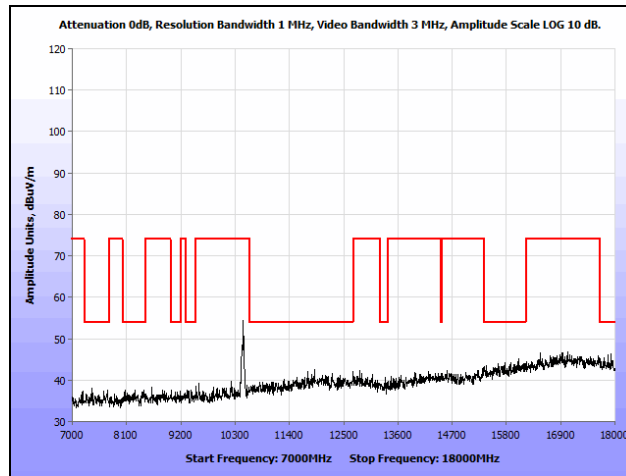


Plot 165. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, Ceiling


Radiated Spurious Emissions, 802.11n 80 MHz, Ceiling Antenna

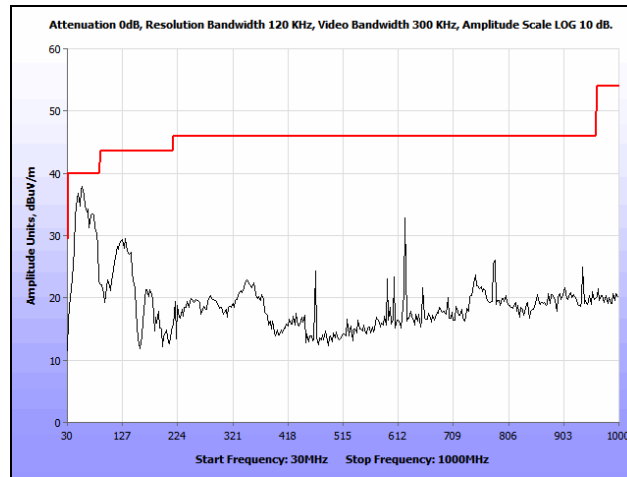


Plot 166. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 30 MHz – 1 GHz, Ceiling

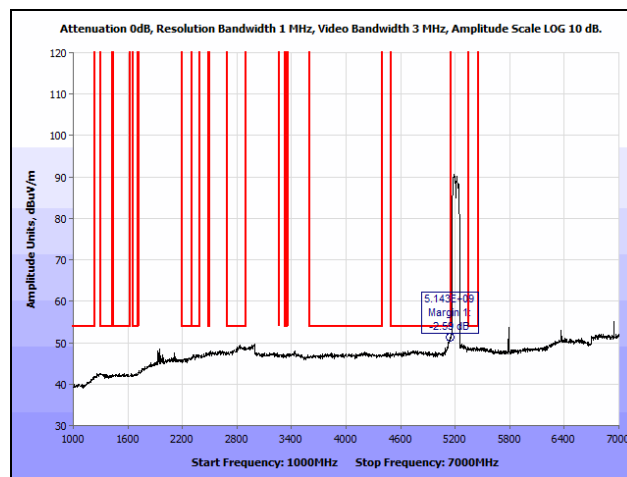

Plot 167. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Average, Ceiling

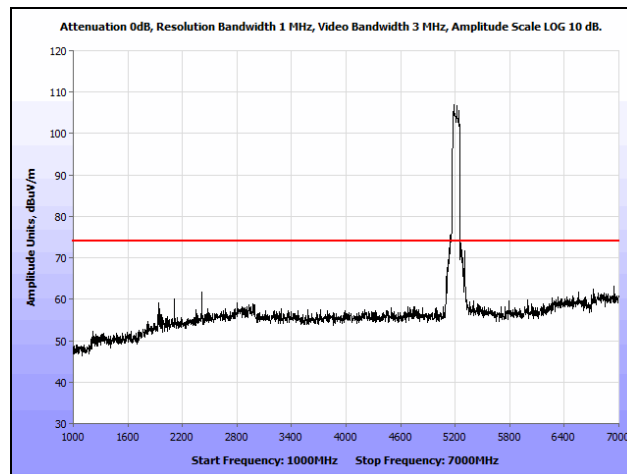


Plot 168. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Ceiling

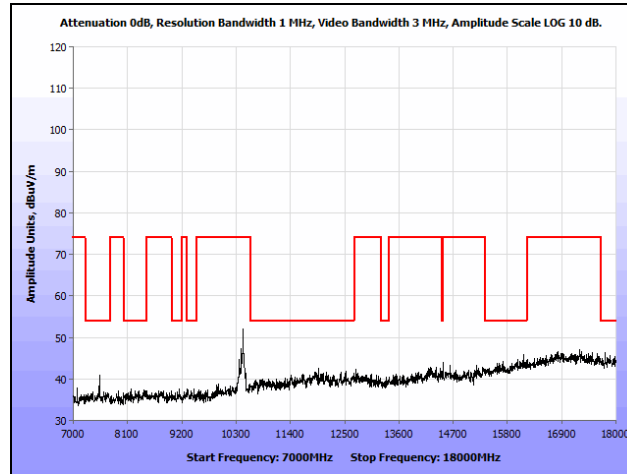


Plot 169. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 7 GHz – 18 GHz, Ceiling


Radiated Spurious Emissions, 802.11a, Omni Antenna

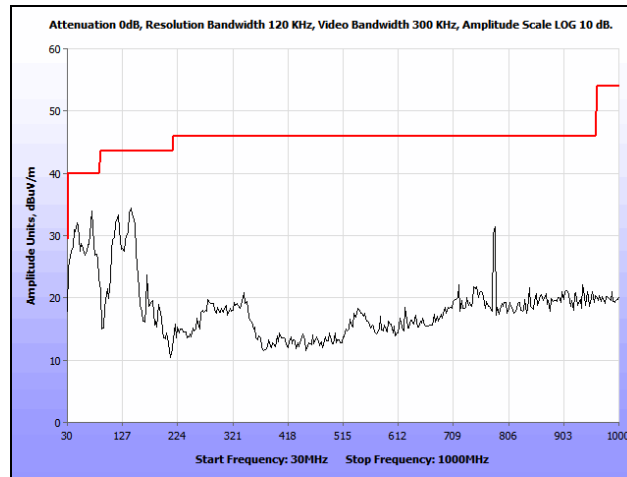


Plot 170. Radiated Spurious Emissions, 802.11a, Low Channel, 30 MHz – 1 GHz, Omni

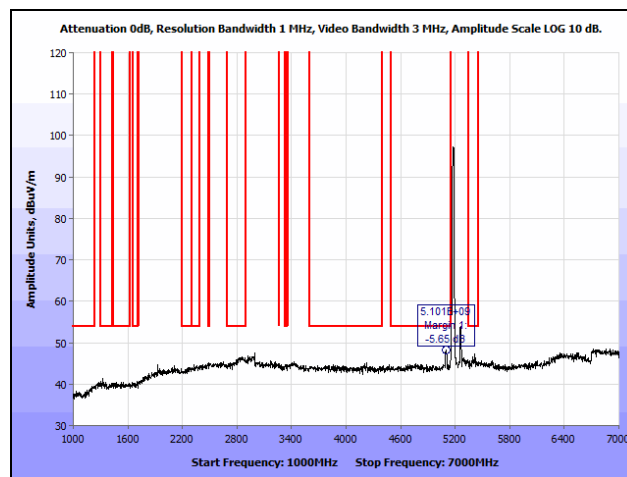


Plot 171. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Average, Omni

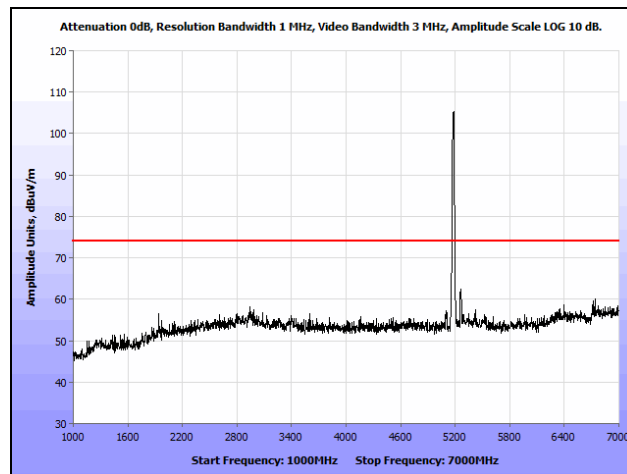


Plot 172. Radiated Spurious Emissions, 802.11a, Low Channel, 1 GHz – 7 GHz, Peak, Omni

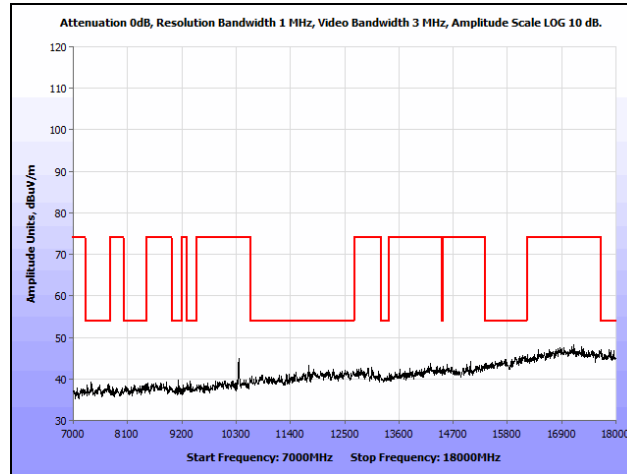


Plot 173. Radiated Spurious Emissions, 802.11a, Low Channel, 7 GHz – 18 GHz, Omni

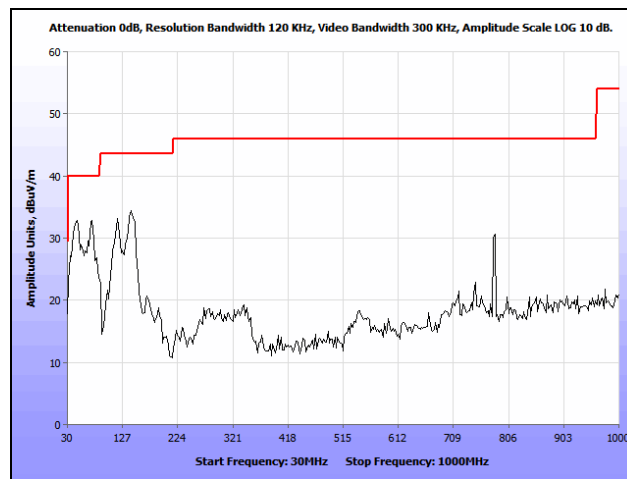


Plot 174. Radiated Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 1 GHz, Omni

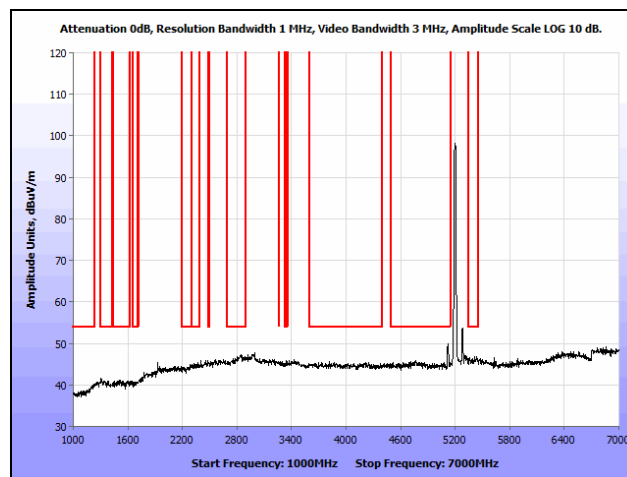


Plot 175. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Average, Omni

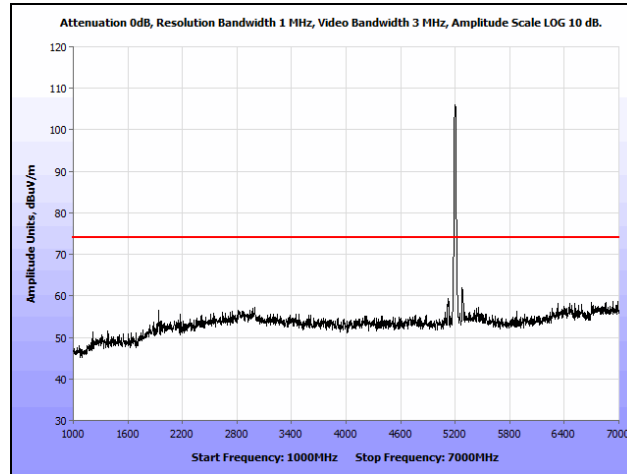


Plot 176. Radiated Spurious Emissions, 802.11a, Mid Channel, 1 GHz – 7 GHz, Peak, Omni

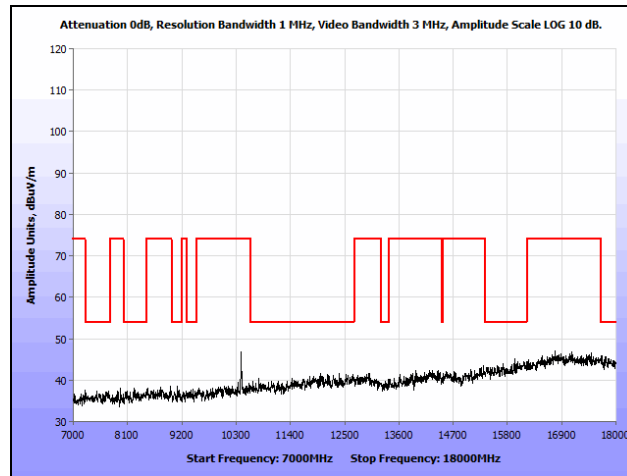


Plot 177. Radiated Spurious Emissions, 802.11a, Mid Channel, 7 GHz – 18 GHz, Omni

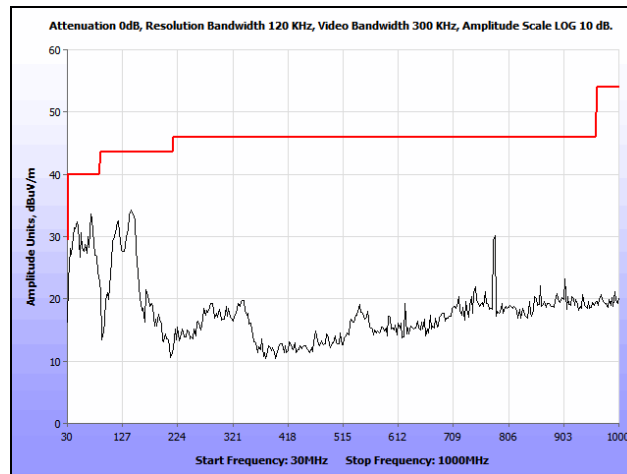


Plot 178. Radiated Spurious Emissions, 802.11a, High Channel, 30 MHz – 1 GHz, Omni

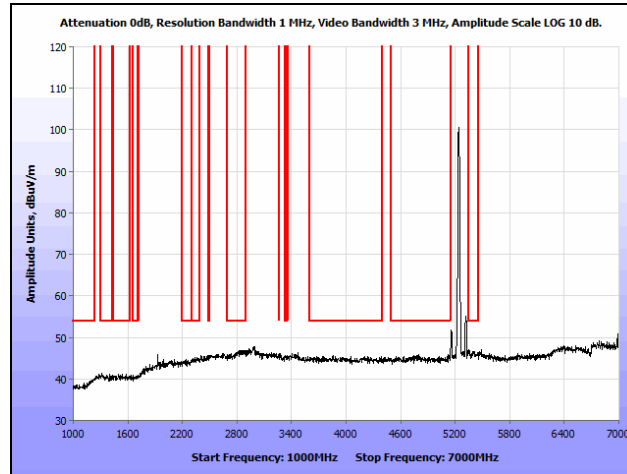

Plot 179. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Average, Omni

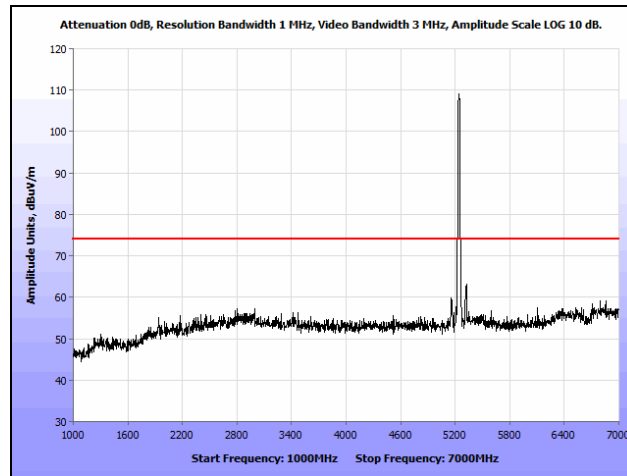


Plot 180. Radiated Spurious Emissions, 802.11a, High Channel, 1 GHz – 7 GHz, Peak, Omni

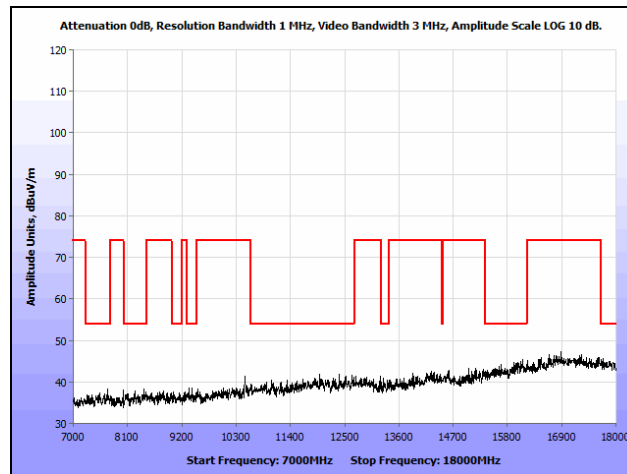


Plot 181. Radiated Spurious Emissions, 802.11a, High Channel, 7 GHz – 18 GHz, Omni


Radiated Spurious Emissions, 802.11n 20 MHz, Omni Antenna

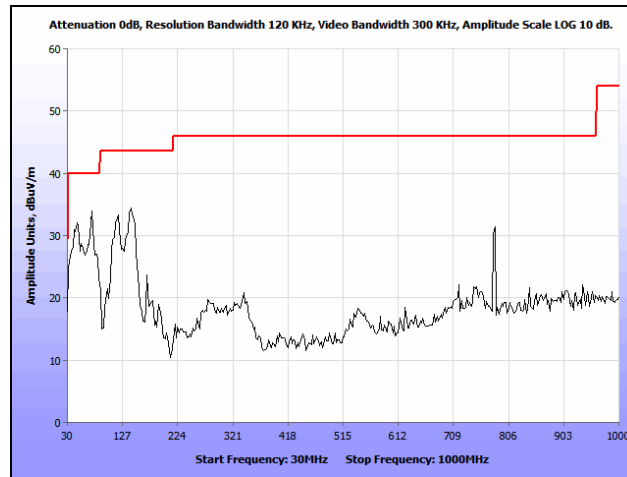


Plot 182. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz, Omni

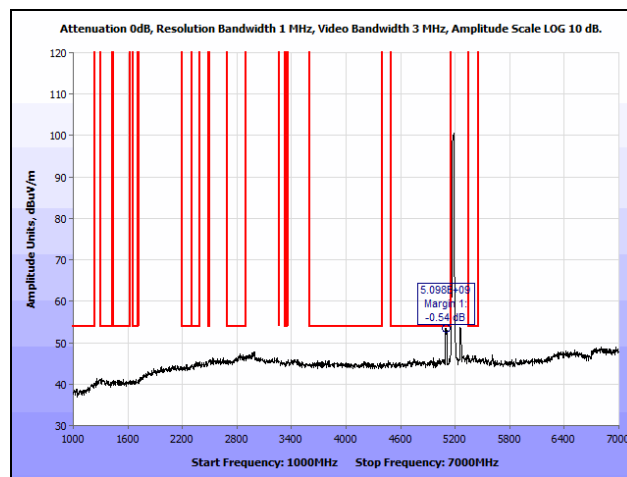


Plot 183. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average, Omni

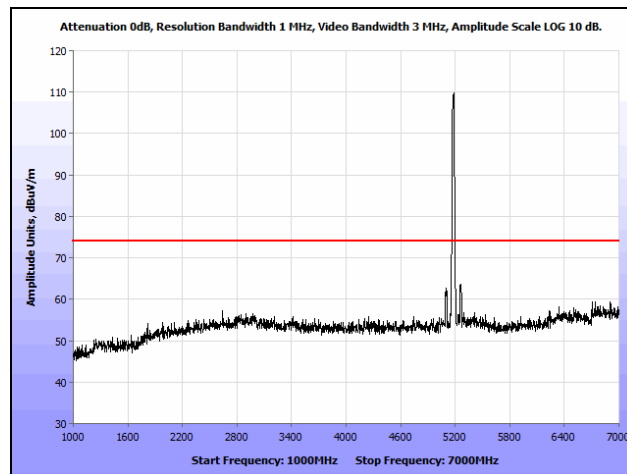


Plot 184. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Omni

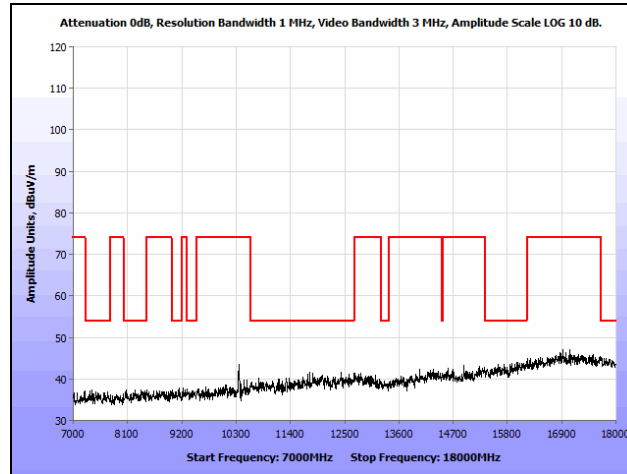


Plot 185. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz, Omni

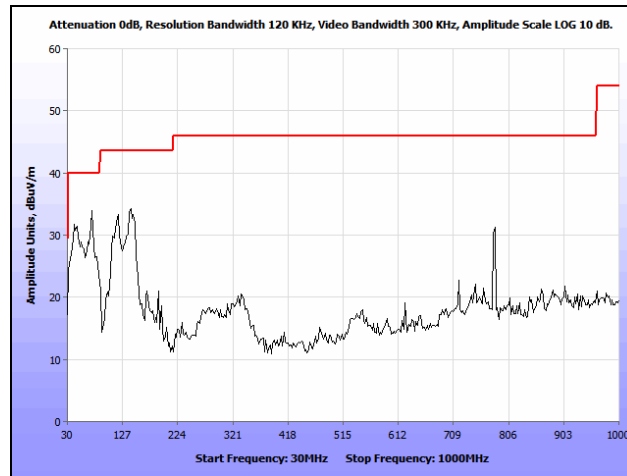


Plot 186. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz, Omni

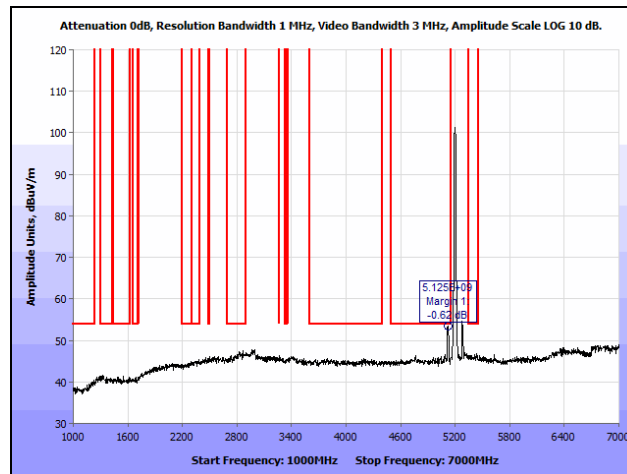


Plot 187. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average, Omni

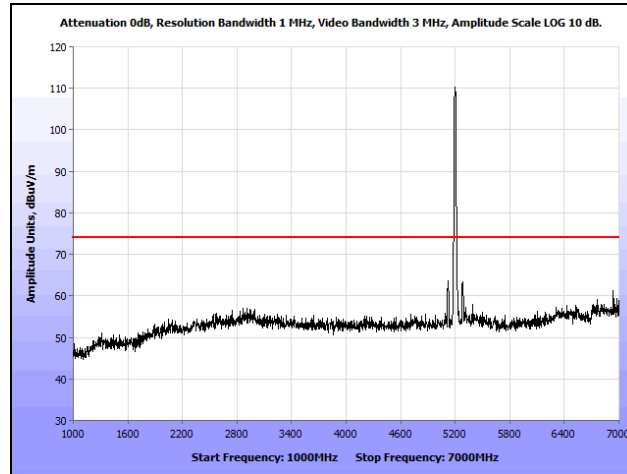


Plot 188. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak, Omni

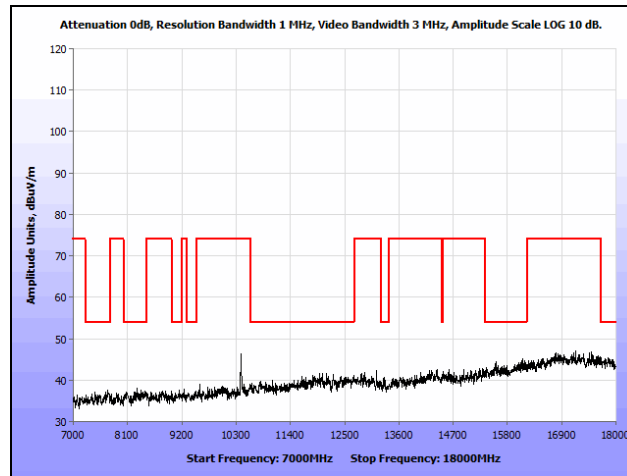


Plot 189. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz, Omni

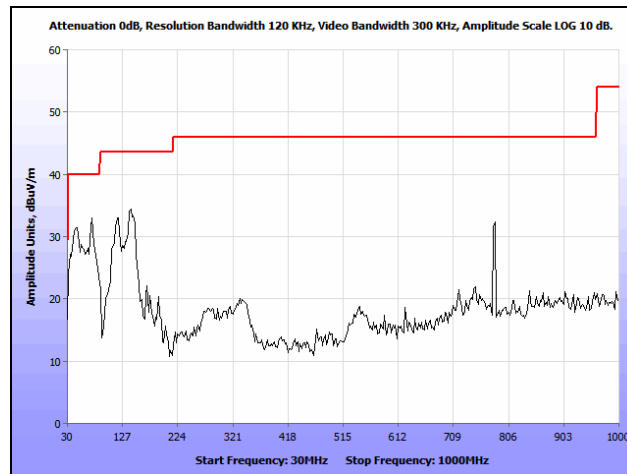


Plot 190. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz, Omni

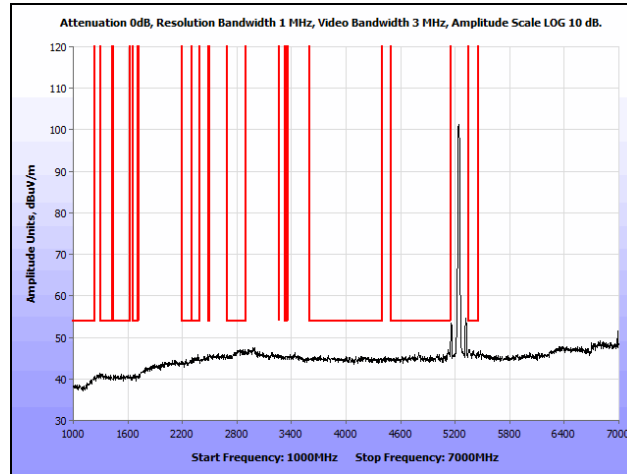

Plot 191. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average, Omni

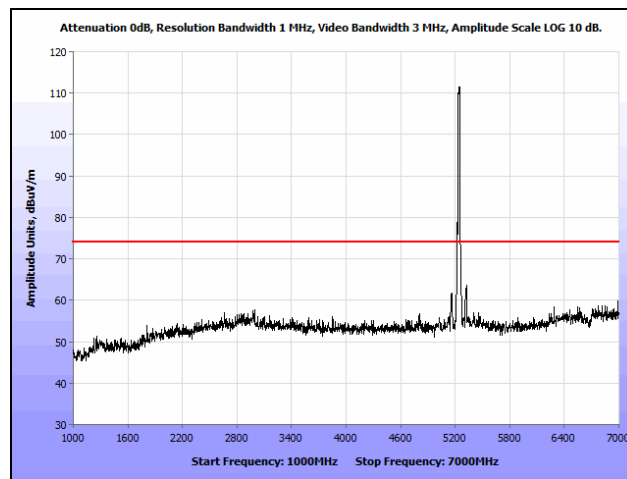


Plot 192. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak, Omni

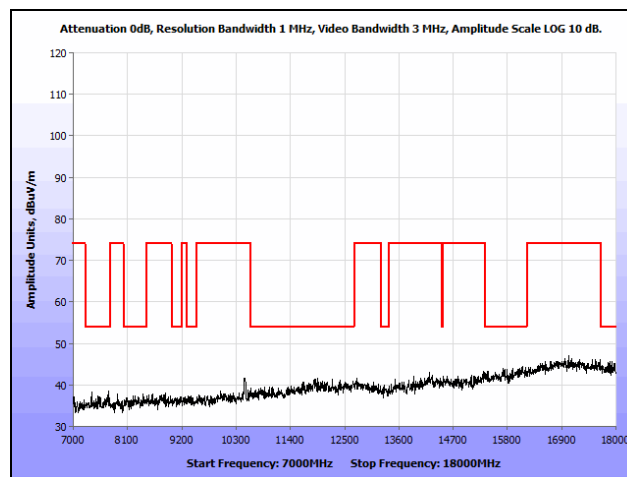


Plot 193. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz, Omni


Radiated Spurious Emissions, 802.11n 40 MHz, Omni Antenna

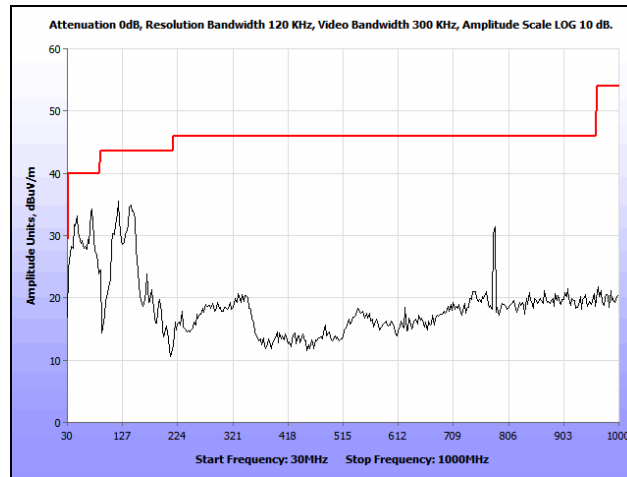


Plot 194. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz, Omni

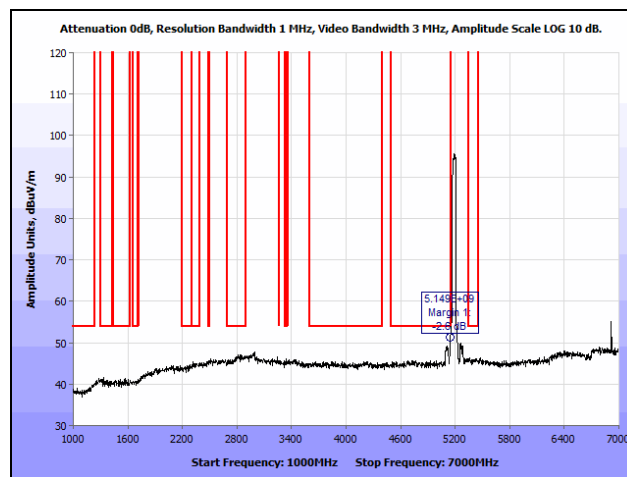


Plot 195. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average, Omni

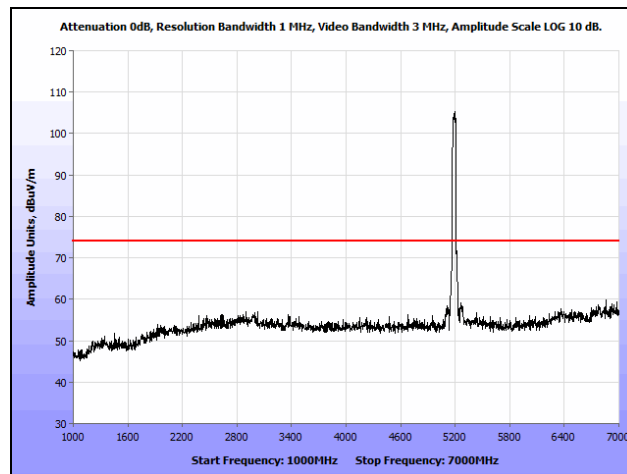


Plot 196. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Omni

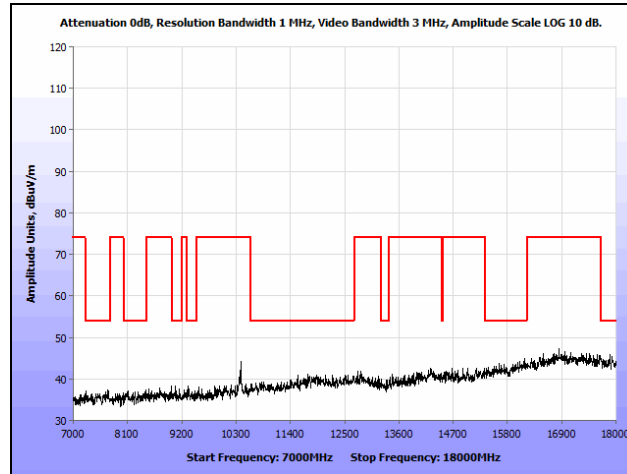


Plot 197. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz, Omni

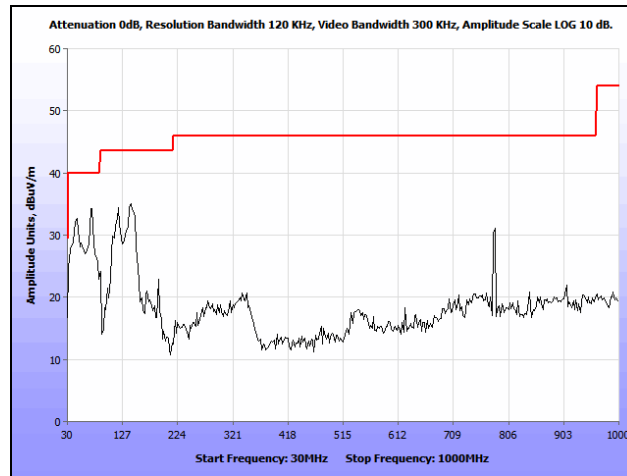


Plot 198. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz, Omni

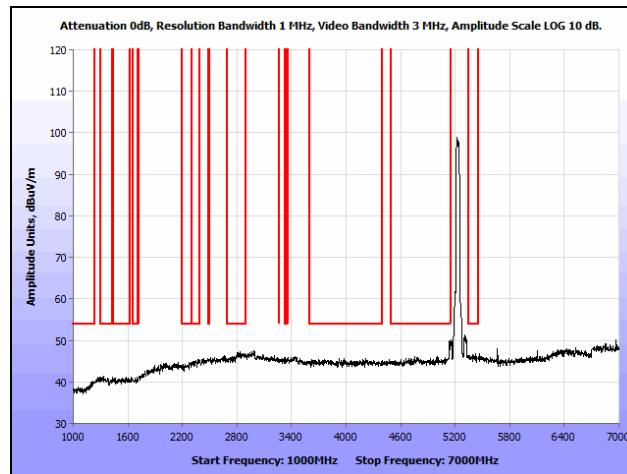

Plot 199. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average, Omni

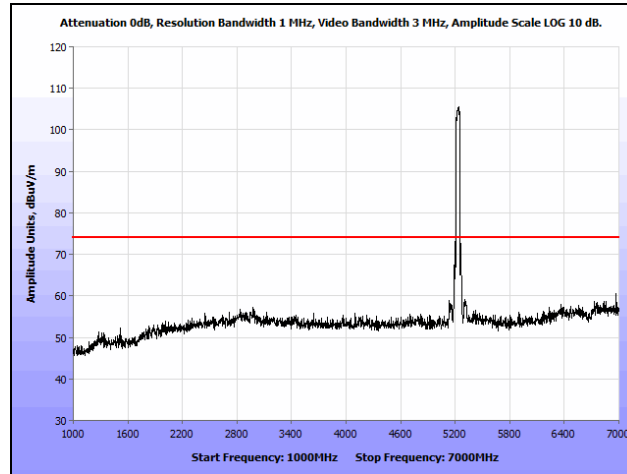


Plot 200. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak, Omni

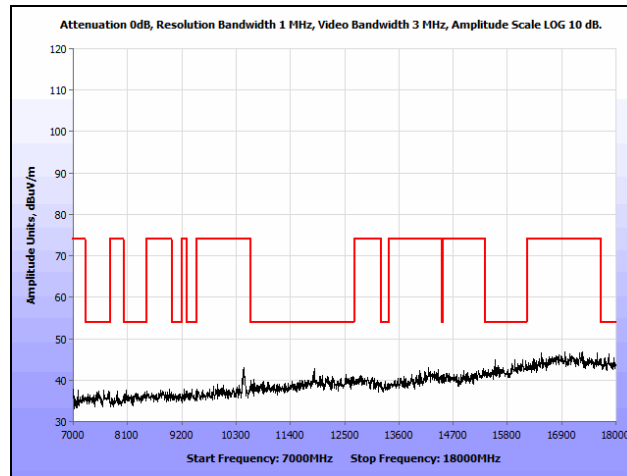


Plot 201. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, Omni


Radiated Spurious Emissions, 802.11n 80 MHz, Omni Antenna

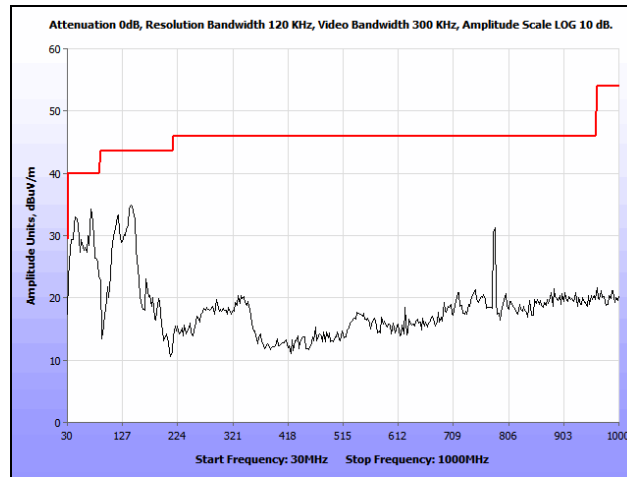


Plot 202. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 30 MHz – 1 GHz, Omni

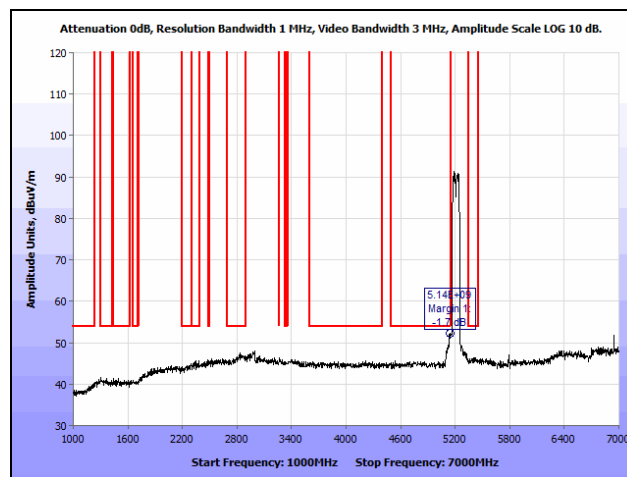

Plot 203. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Average, Omni

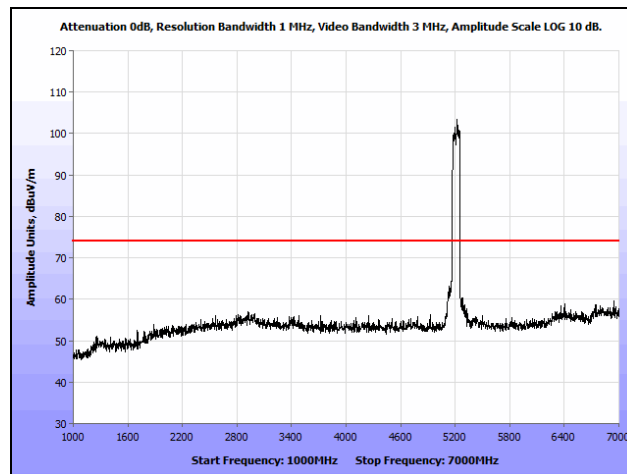


Plot 204. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 1 GHz – 7 GHz, Peak, Omni

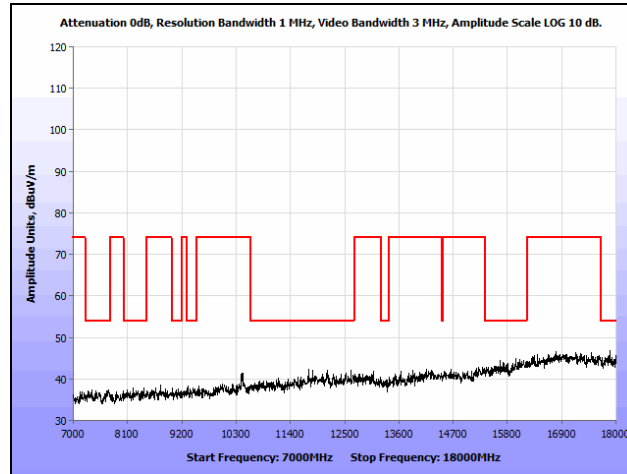


Plot 205. Radiated Spurious Emissions, 802.11n 80 MHz, Low Channel, 7 GHz – 18 GHz, Omni

EIRP, 802.11a, 7 dBi Patch Antenna

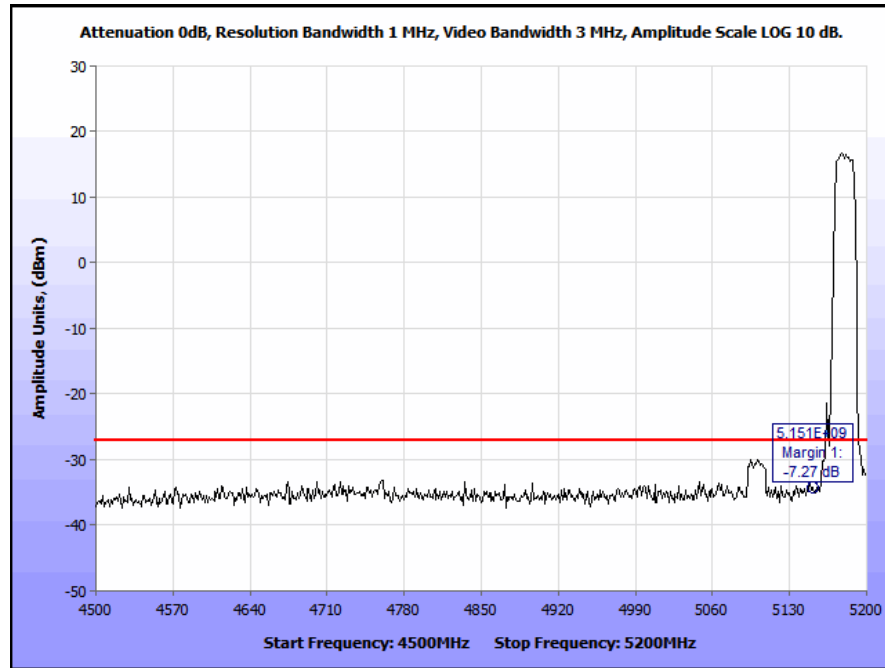


Plot 206. Radiated Band Edge 802.11a, Low Channel, 7 dBi Patch Antenna (Band Edge @ 5150 MHz)

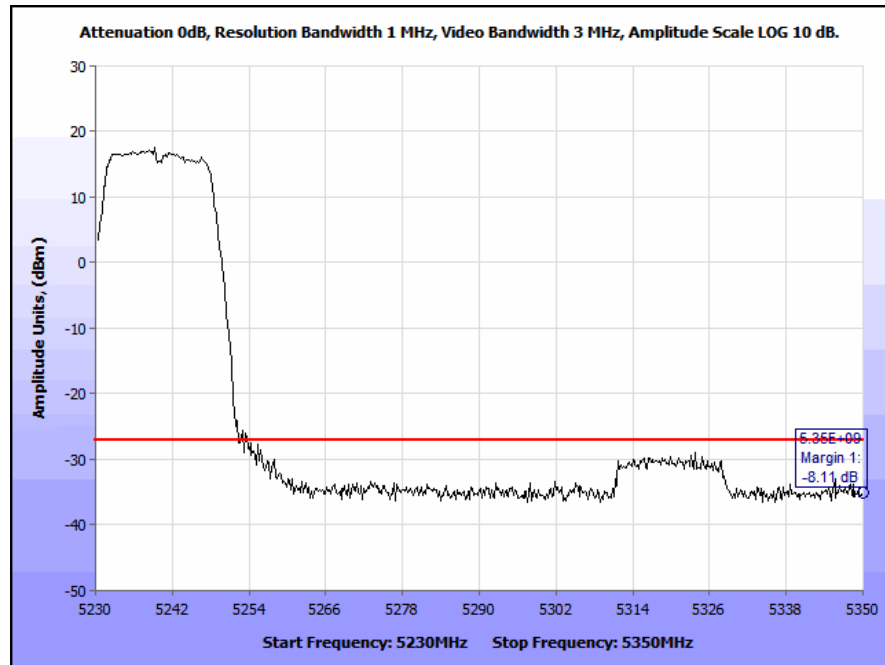


Plot 207. Radiated Band Edge 802.11a, High Channel, 7 dBi Patch Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 20 MHz, 7 dBi Patch Antenna

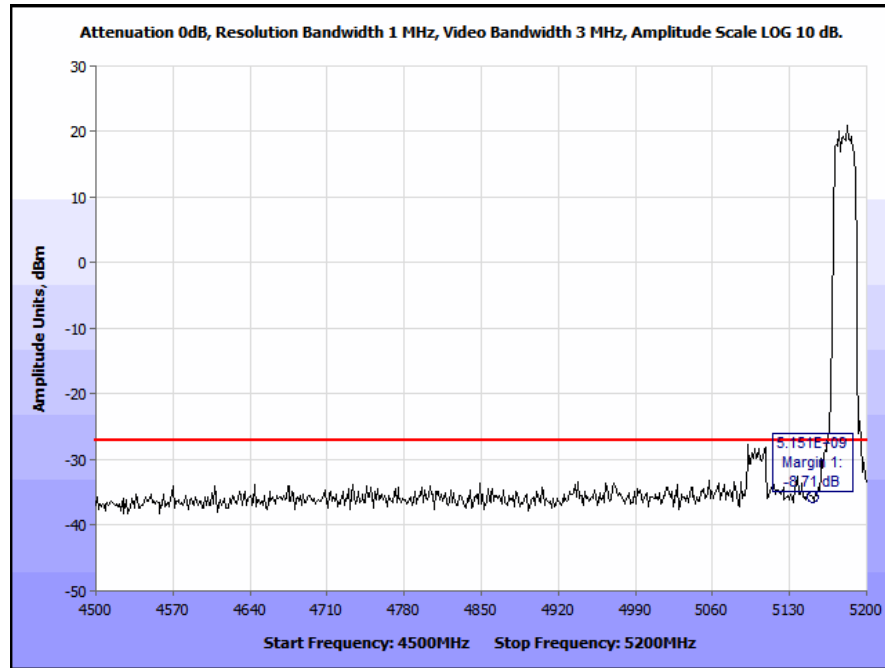


Plot 208. Radiated Band Edge 802.11n 20 MHz, Low Channel, 7 dBi Patch Antenna (Band Edge @ 5150 MHz)

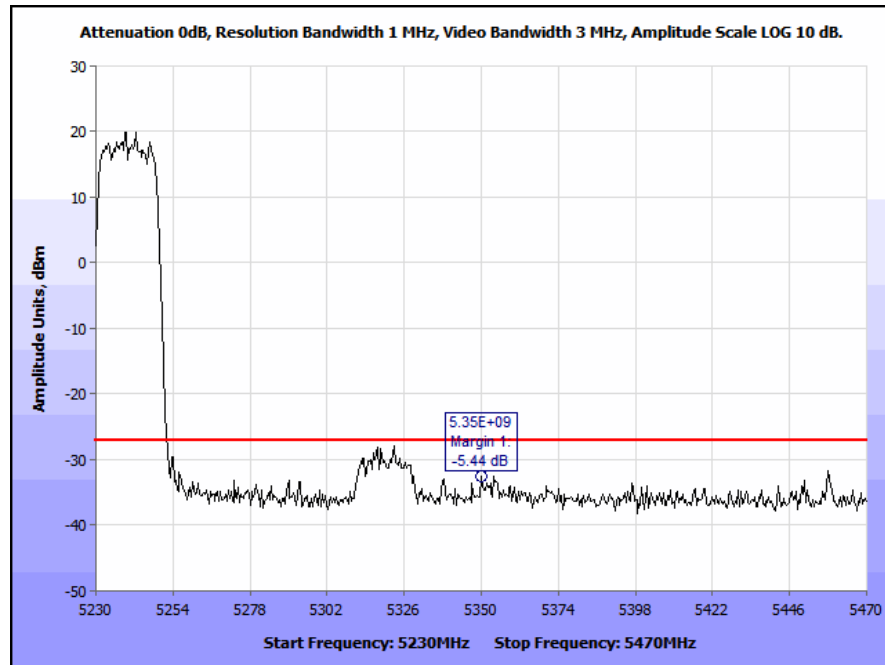


Plot 209. Radiated Band Edge 802.11n 20 MHz, High Channel, 7 dBi Patch Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 40 MHz, 7 dBi Patch Antenna

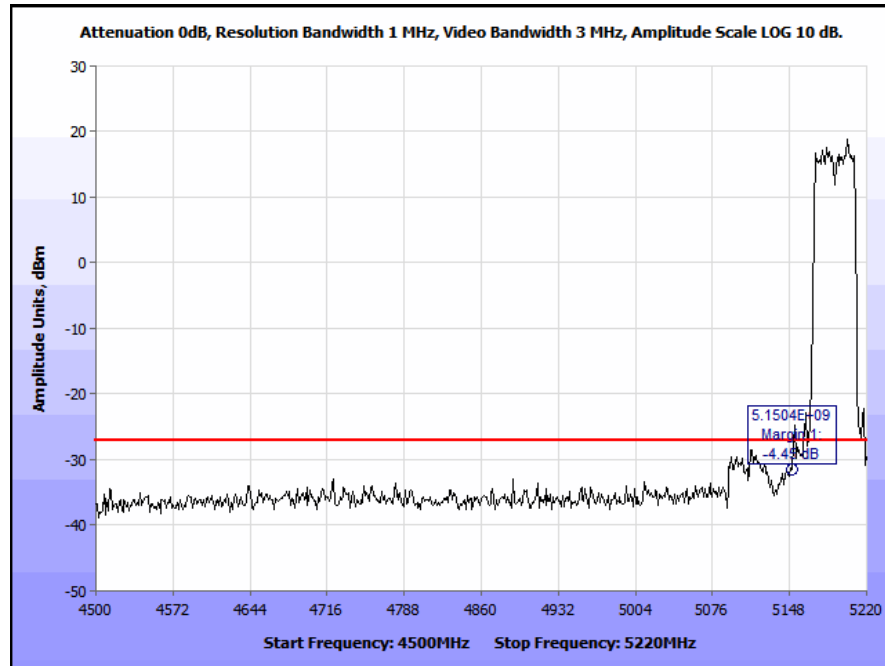


Plot 210. Radiated Band Edge 802.11n 40 MHz, Low Channel, 7 dBi Patch Antenna (Band Edge @ 5150 MHz)

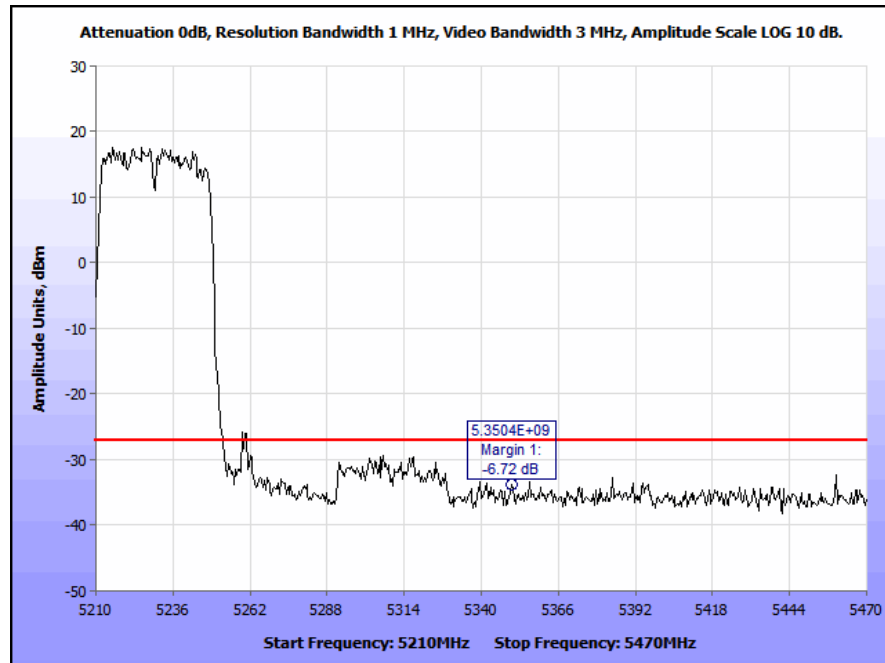


Plot 211. Radiated Band Edge 802.11n 40 MHz, High Channel, 7 dBi Patch Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 80 MHz, 7 dBi Patch Antenna

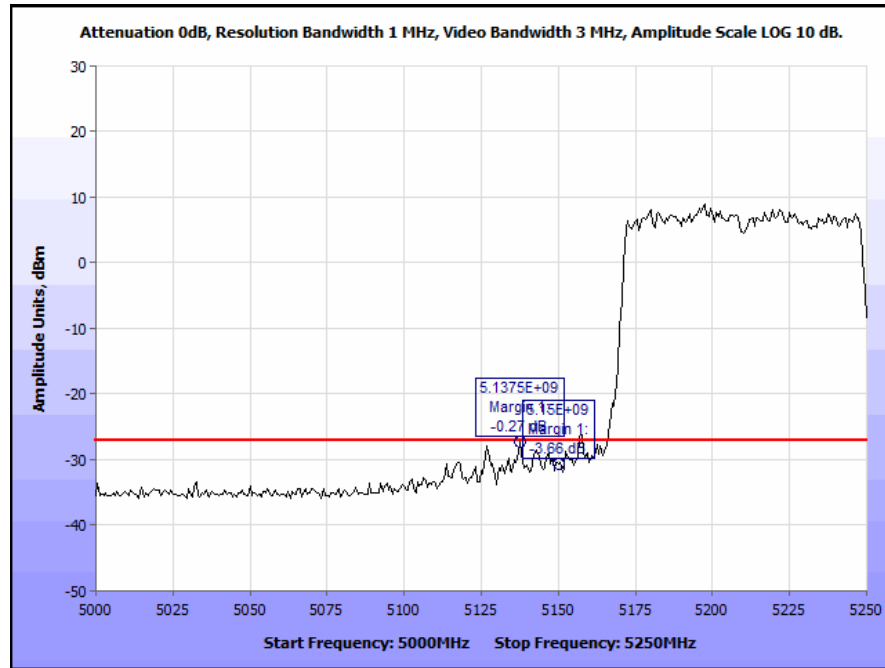


Plot 212. Radiated Band Edge 802.11n 80 MHz, 7 dBi Patch Antenna (Band Edge @ 5150 MHz)

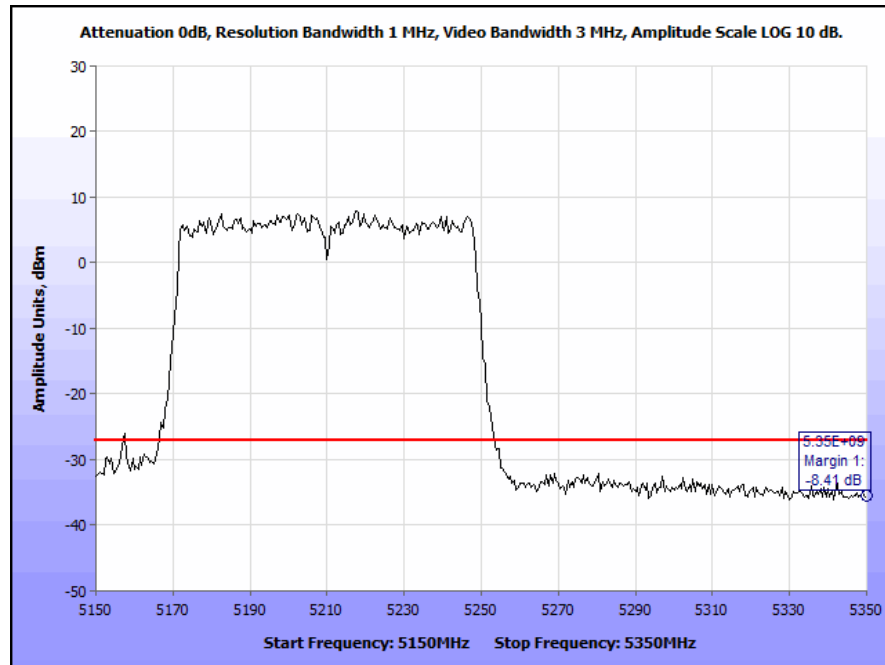


Plot 213. Radiated Band Edge 802.11n 80 MHz, 7 dBi Patch Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11a, Ceiling Antenna

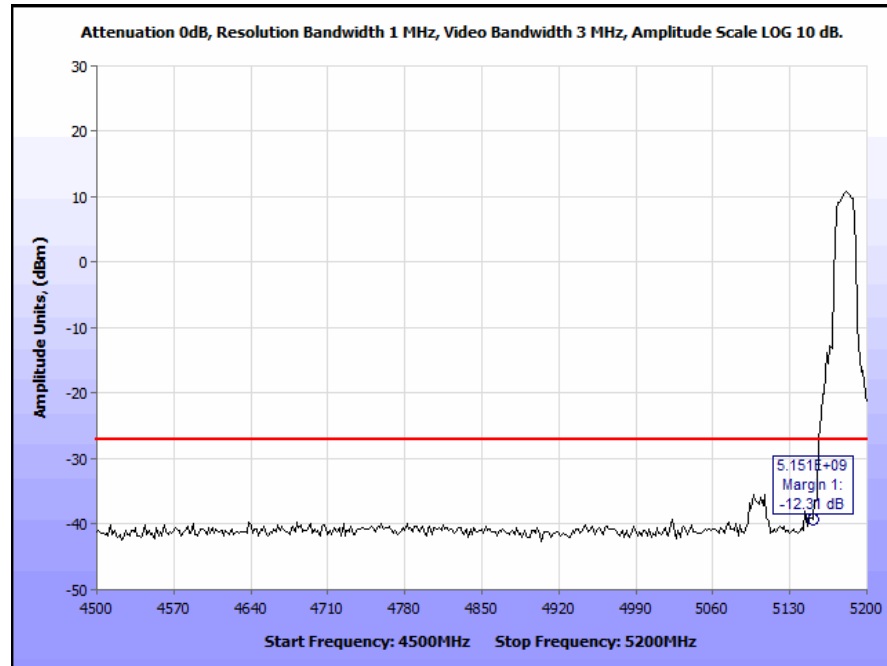


Plot 214. Radiated Band Edge 802.11a, Low Channel, Ceiling Antenna (Band Edge @ 5150 MHz)

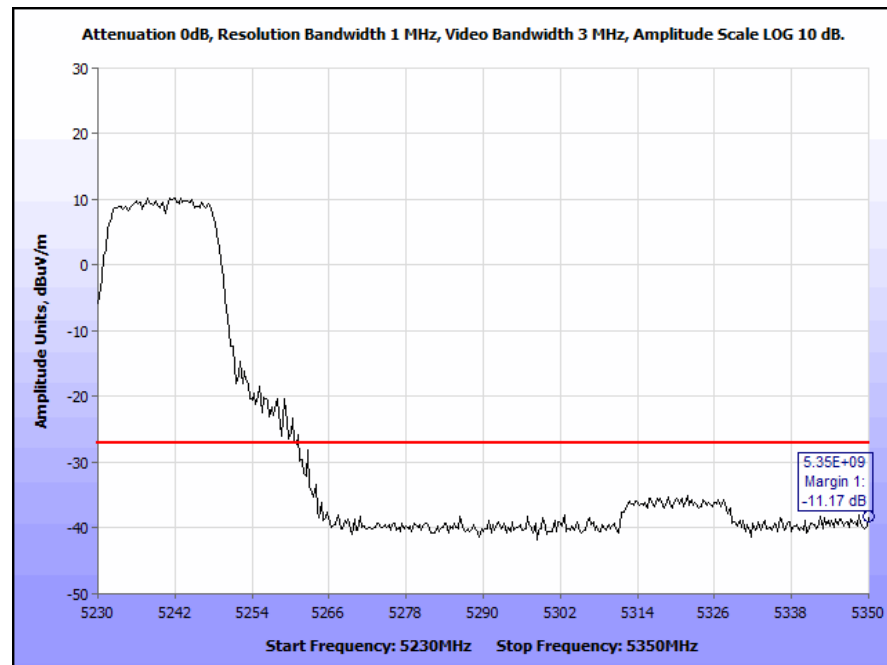


Plot 215. Radiated Band Edge 802.11a, High Channel, Ceiling Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 20 MHz, Ceiling Antenna

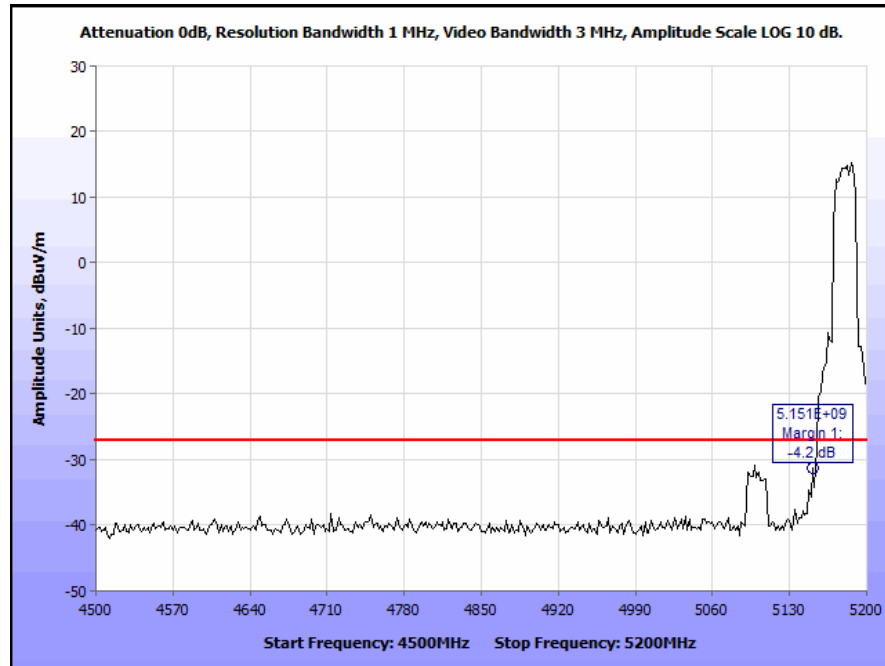


Plot 216. Radiated Band Edge 802.11n 20 MHz, Low Channel, Ceiling Antenna (Band Edge @ 5150 MHz)

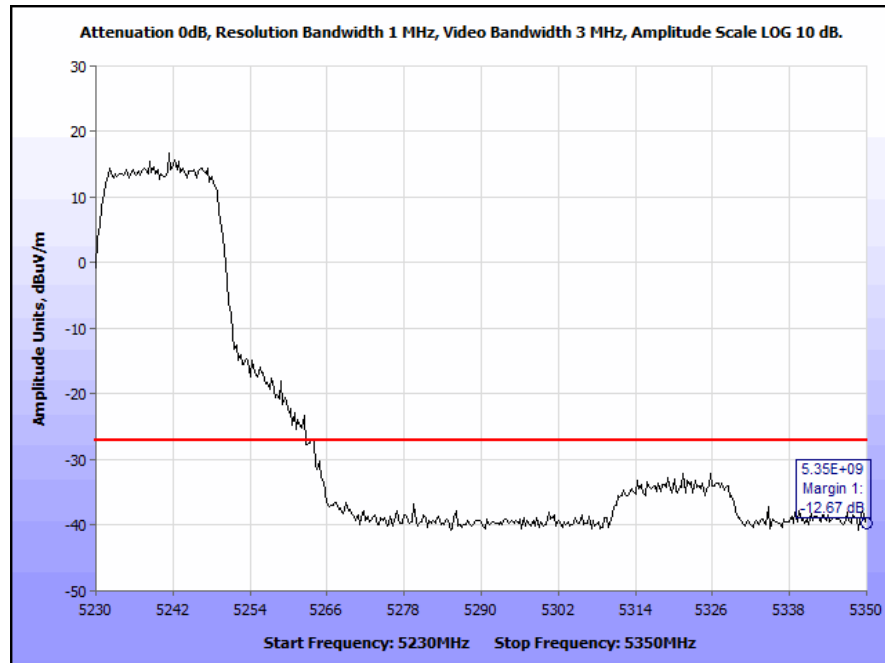


Plot 217. Radiated Band Edge 802.11n 20 MHz, High Channel, Ceiling Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 40 MHz, Ceiling Antenna

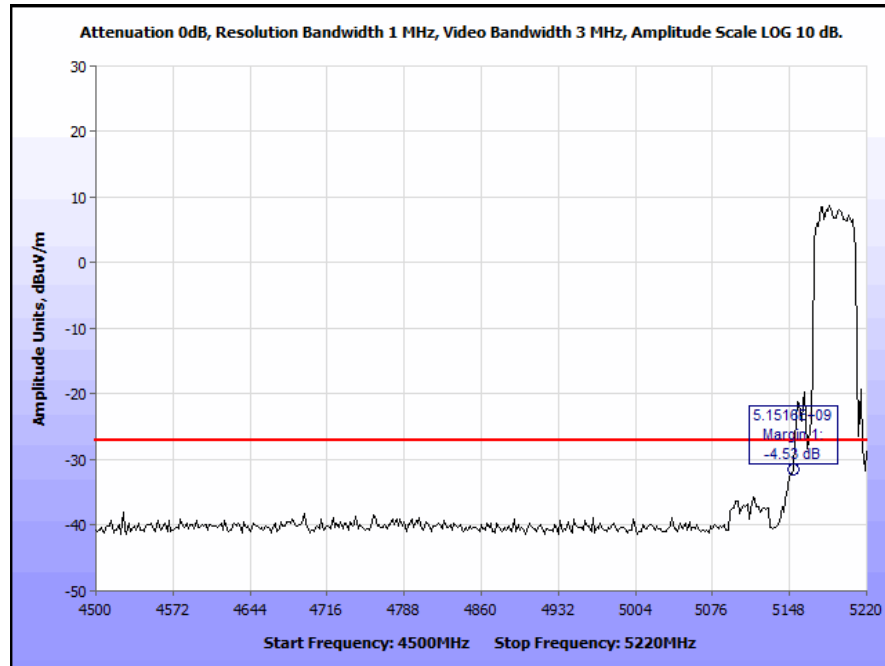


Plot 218. Radiated Band Edge 802.11n 40 MHz, Low Channel, Ceiling Antenna (Band Edge @ 5150 MHz)

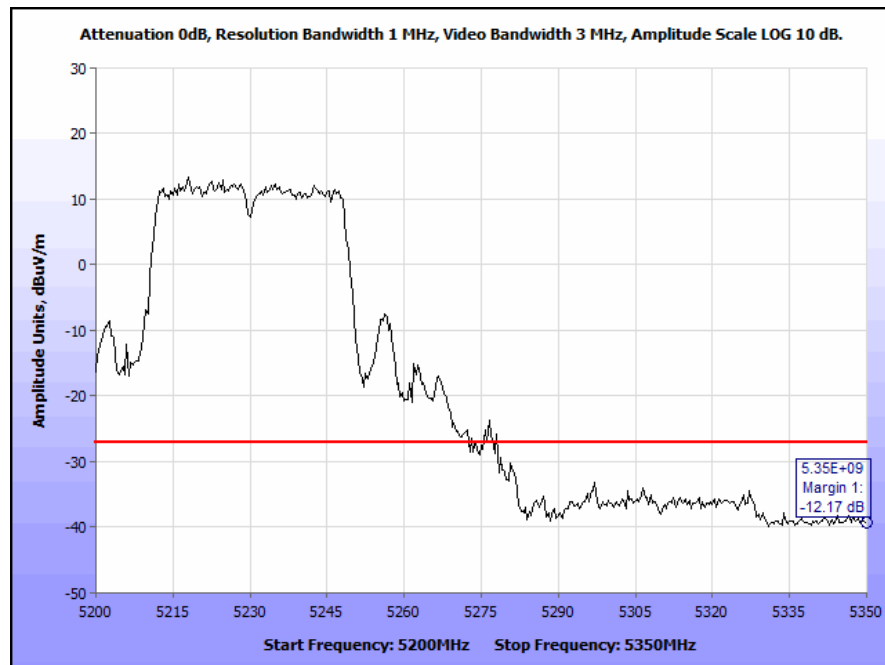


Plot 219. Radiated Band Edge 802.11n 40 MHz, High Channel, Ceiling Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 80 MHz, Ceiling Antenna

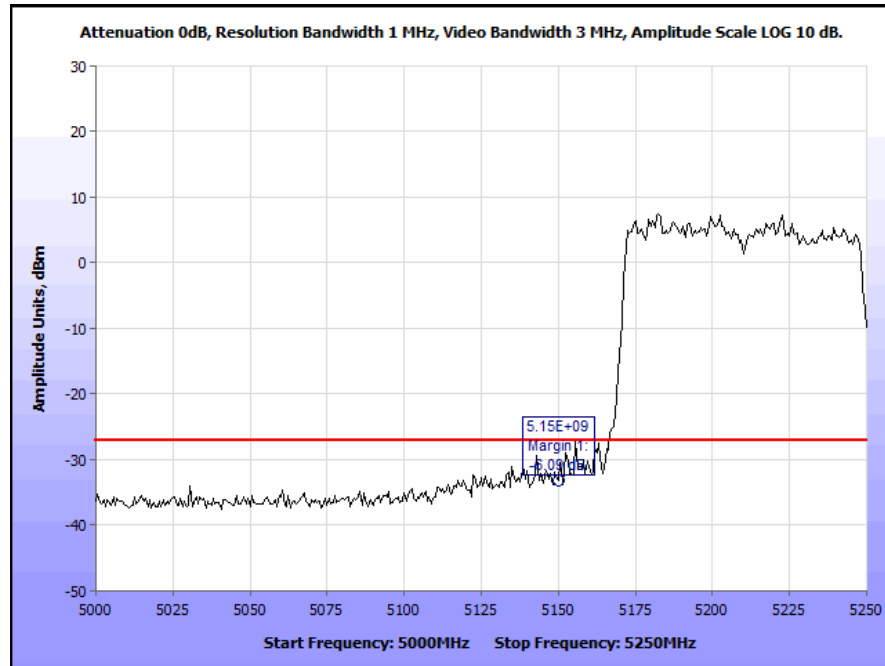


Plot 220. Radiated Band Edge 802.11n 80 MHz, Ceiling Antenna (Band Edge @ 5150 MHz)

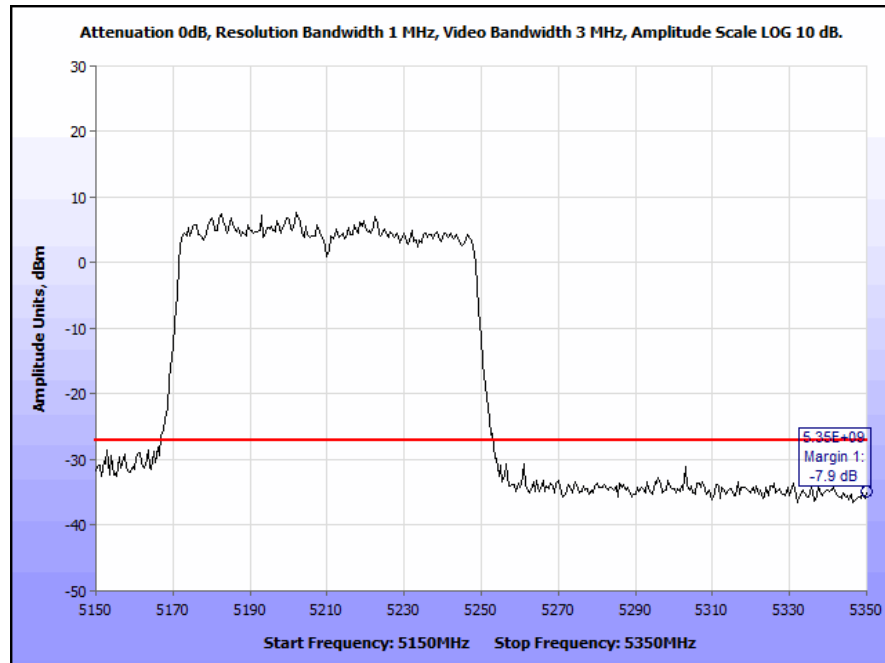


Plot 221. Radiated Band Edge 802.11n 80 MHz, Ceiling Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11a, Omni Antenna

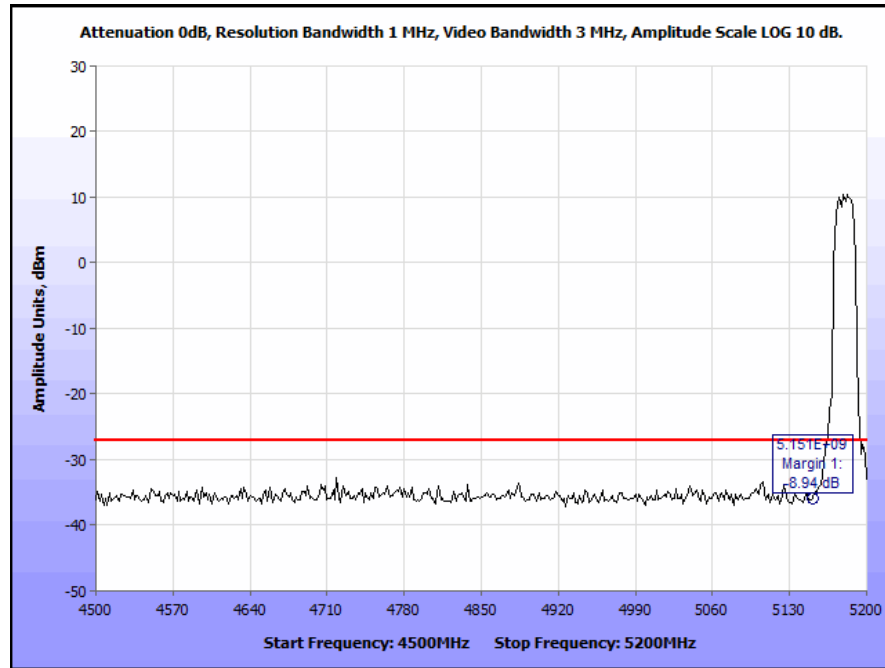


Plot 222. Radiated Band Edge 802.11a, Low Channel, Omni Antenna (Band Edge @ 5150 MHz)

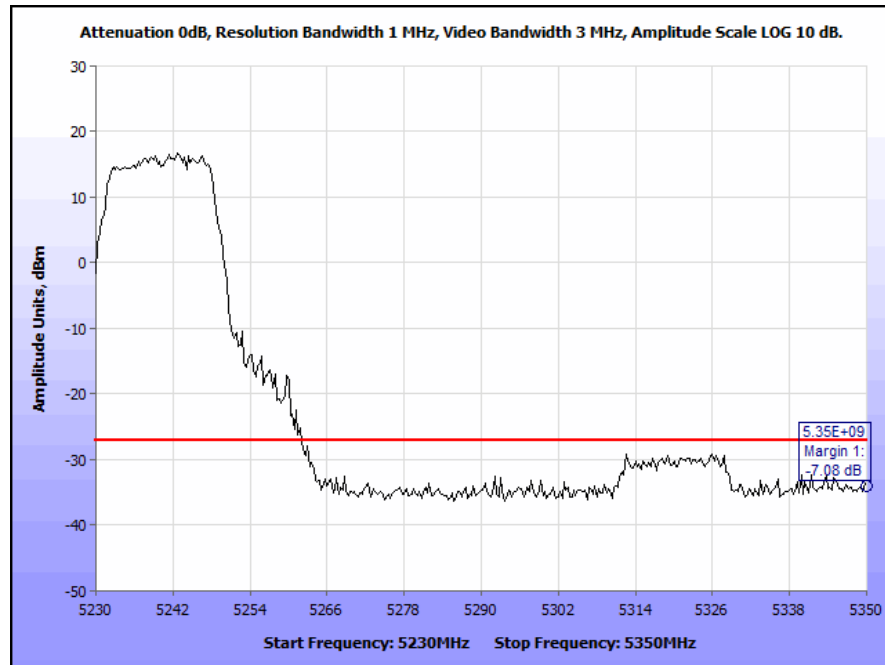


Plot 223. Radiated Band Edge 802.11a, High Channel, Omni Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 20 MHz, Omni Antenna

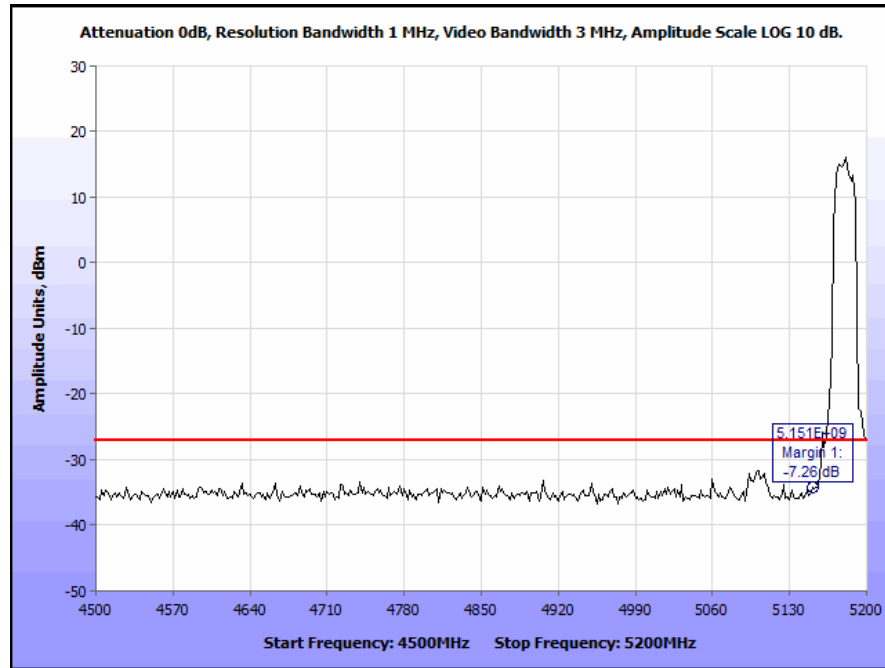


Plot 224. Radiated Band Edge 802.11n 20 MHz, Low Channel, Omni Antenna (Band Edge @ 5150 MHz)

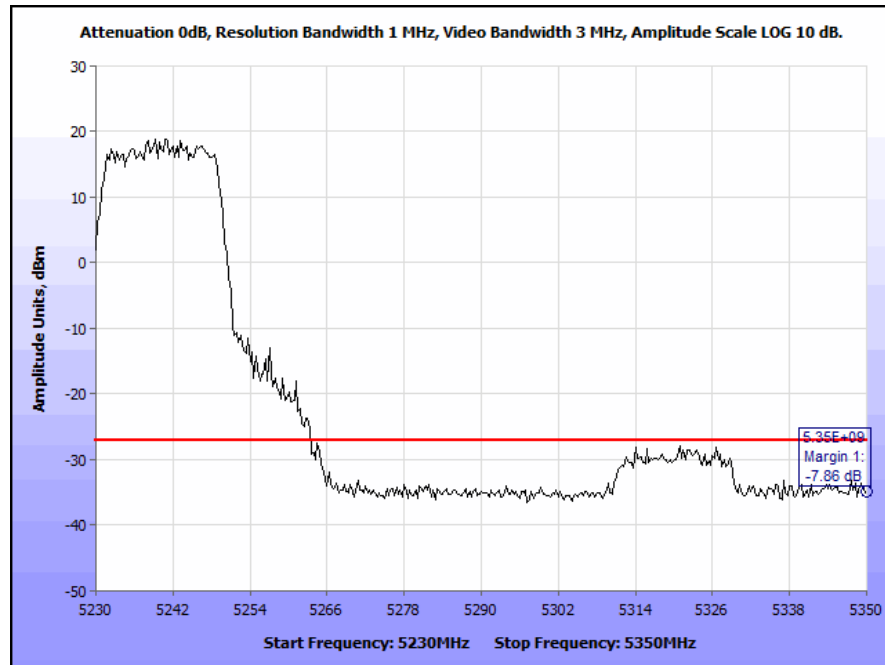


Plot 225. Radiated Band Edge 802.11n 20 MHz, High Channel, Omni Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 40 MHz, Omni Antenna

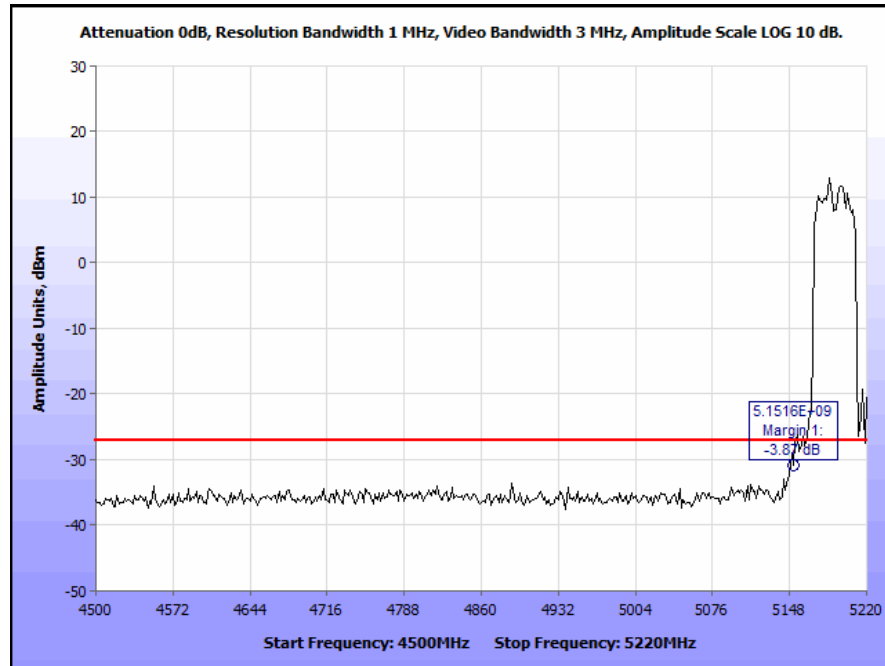


Plot 226. Radiated Band Edge 802.11n 40 MHz, Low Channel, Omni Antenna (Band Edge @ 5150 MHz)

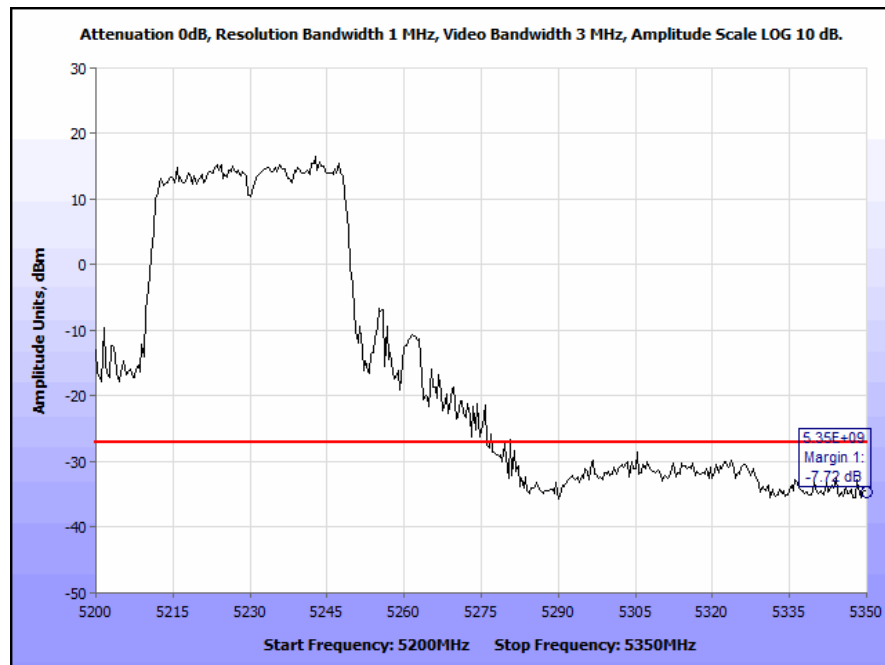


Plot 227. Radiated Band Edge 802.11n 40 MHz, High Channel, Omni Antenna (Band Edge @ 5350 MHz)

EIRP, 802.11n 80 MHz, Omni Antenna

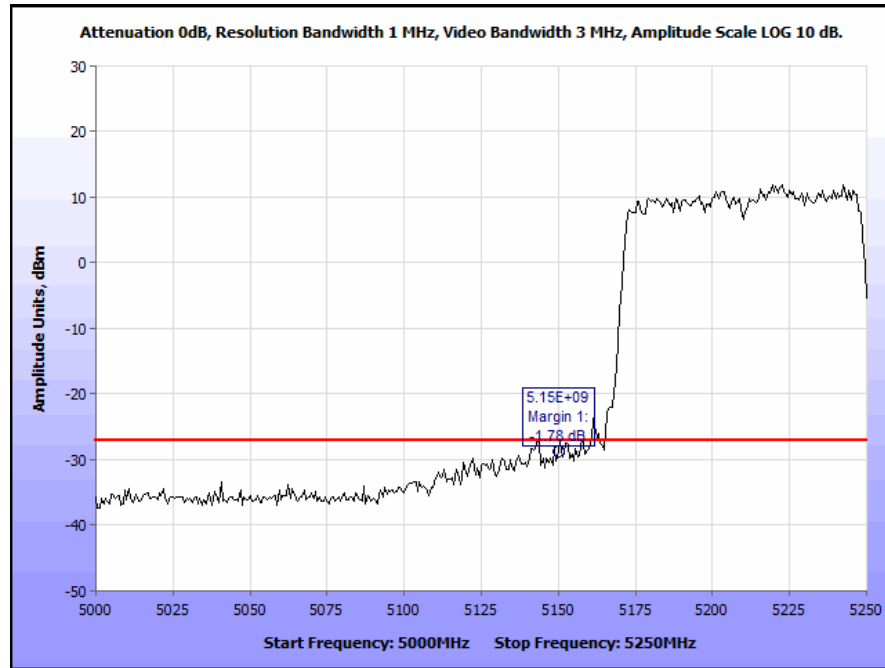


Plot 228. Radiated Band Edge 802.11n 80 MHz, Omni Antenna (Band Edge @ 5150 MHz)

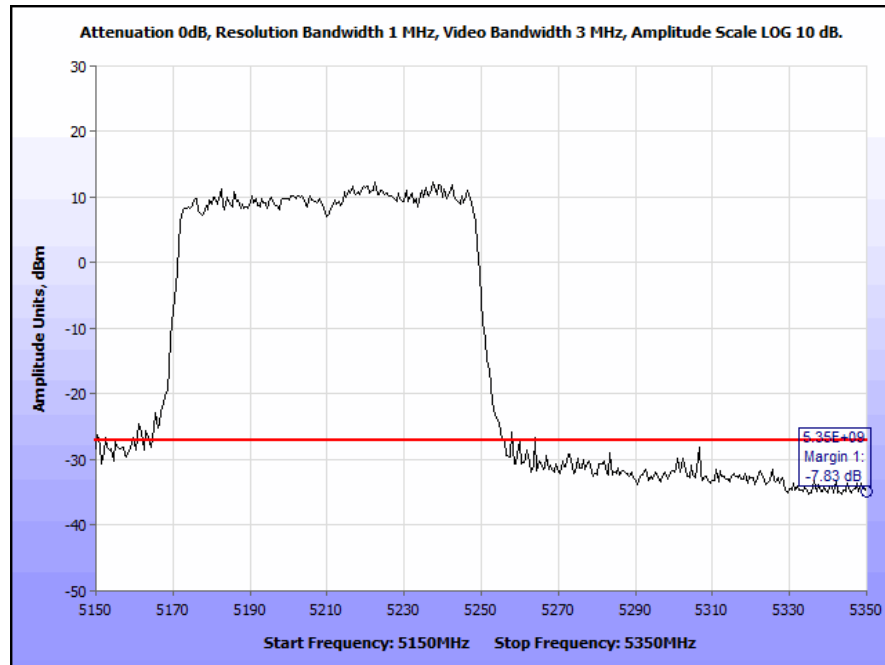


Plot 229. Radiated Band Edge 802.11n 80 MHz, Omni Antenna (Band Edge @ 5350 MHz)

Restricted Band Edge, 802.11a, 7 dBi Patch Antenna

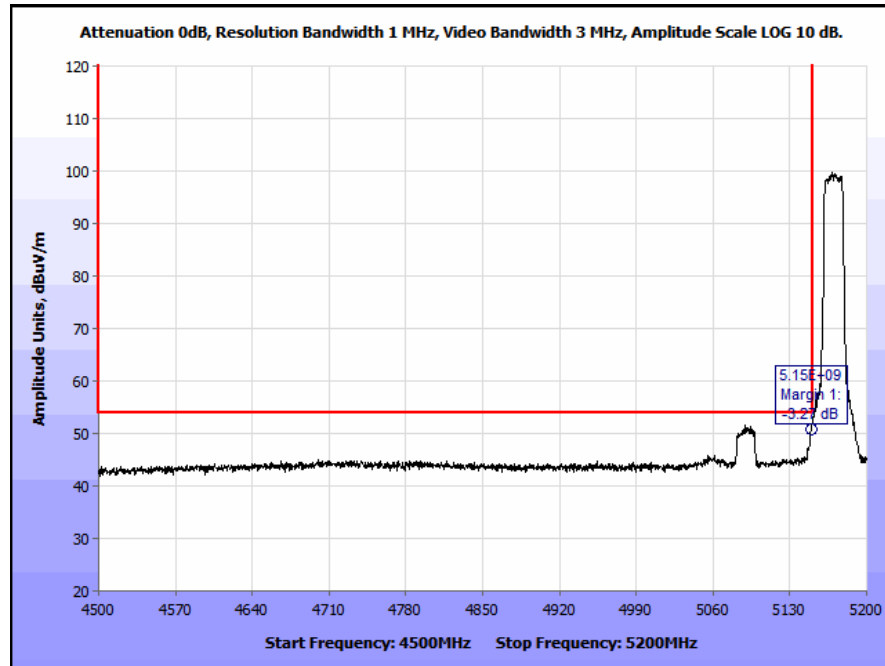


Plot 230. Restricted Band Edge, Patch Antenna, 802.11a, 5180 MHz, Low Channel, Average (4.5 - 5.2 GHz Span)

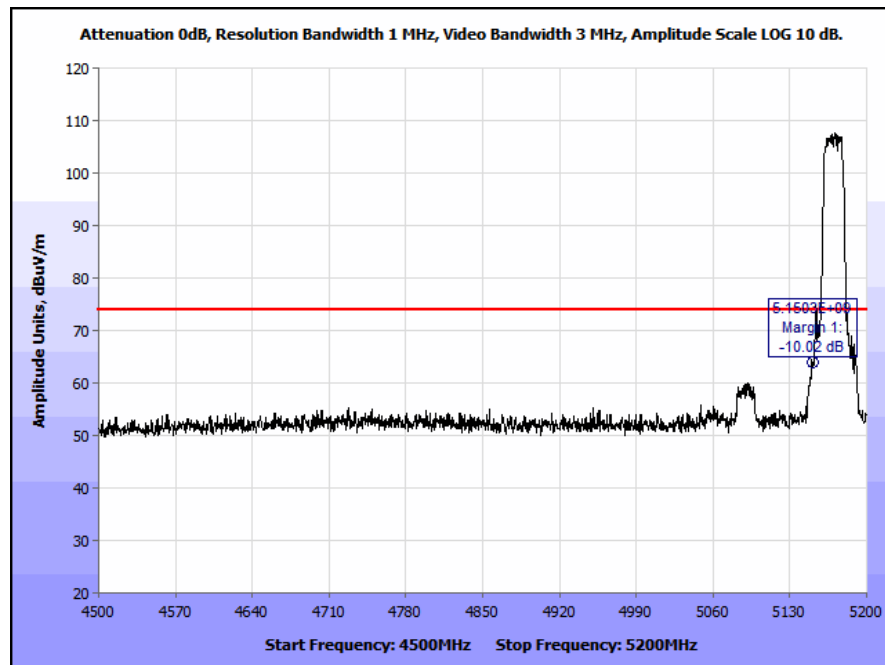


Plot 231. Restricted Band Edge, Patch Antenna, 802.11a, 5180 MHz, Low Channel, Peak (4.5 - 5.2 GHz Span)

Restricted Band Edge, 802.11n 20 MHz, 7 dBi Patch Antenna

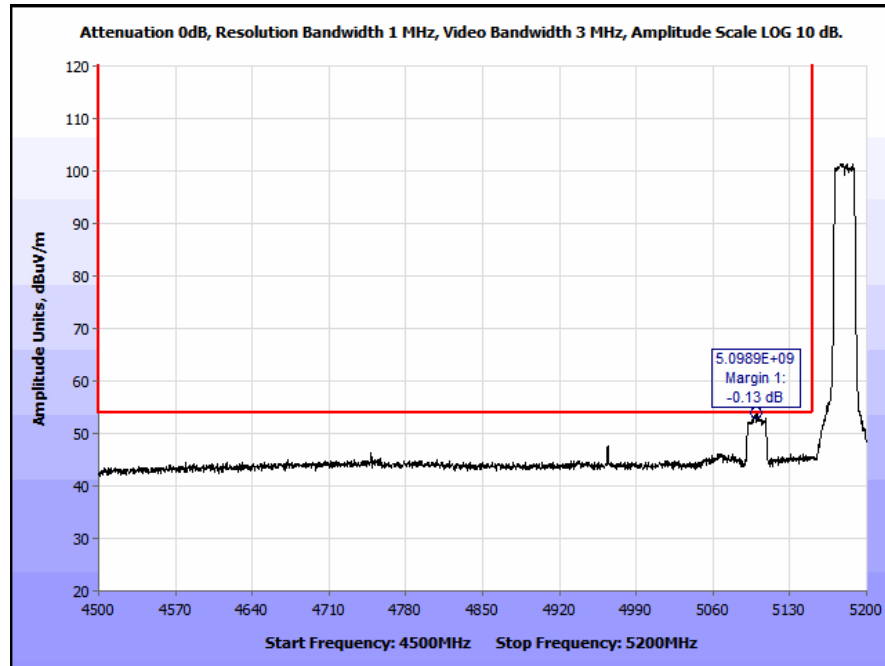


Plot 232. Restricted Band Edge, Patch Antenna, 802.11n 20 MHz, 5180 MHz, Low Channel, Average (4.5 - 5.2 GHz Span)

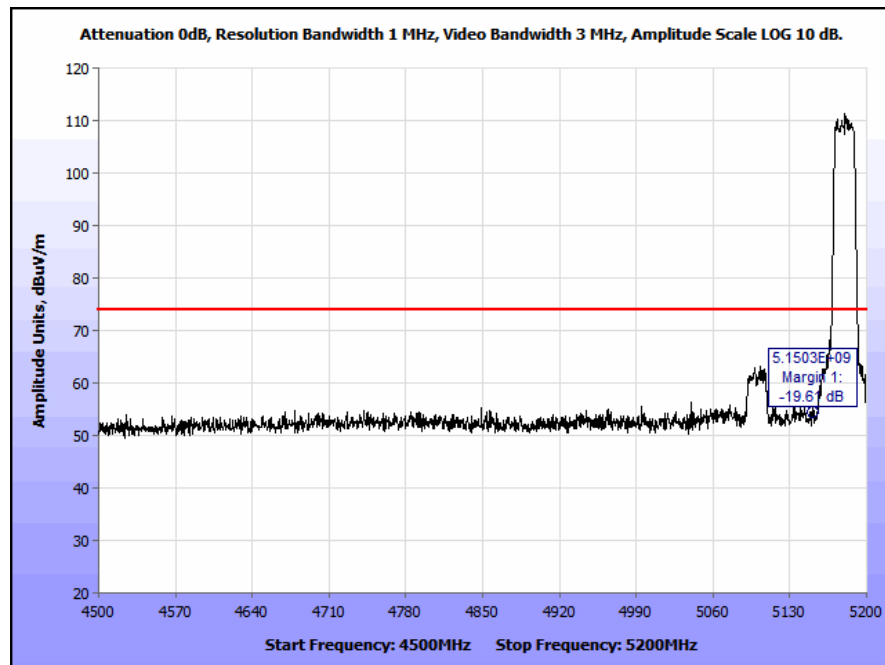


Plot 233. Restricted Band Edge, Patch Antenna, 802.11n 20 MHz, 5180 MHz, Low Channel, Peak (4.5 - 5.2 GHz Span)

Restricted Band Edge, 802.11n 40 MHz, 7 dBi Patch Antenna

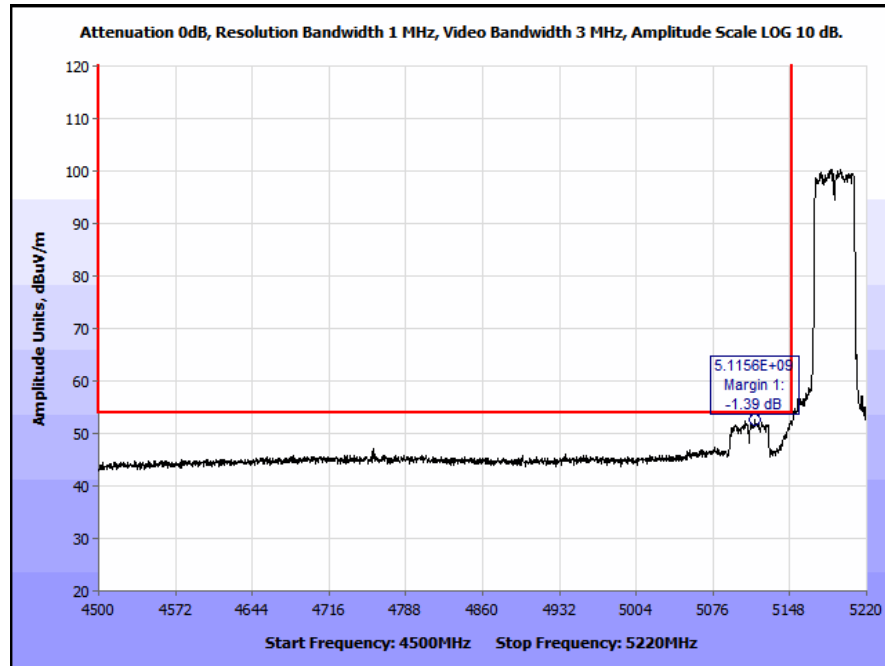


Plot 234. Restricted Band Edge, Patch Antenna, 802.11n 40 MHz, 5190 MHz Low Channel, Average (4.5 - 5.22 GHz Span)

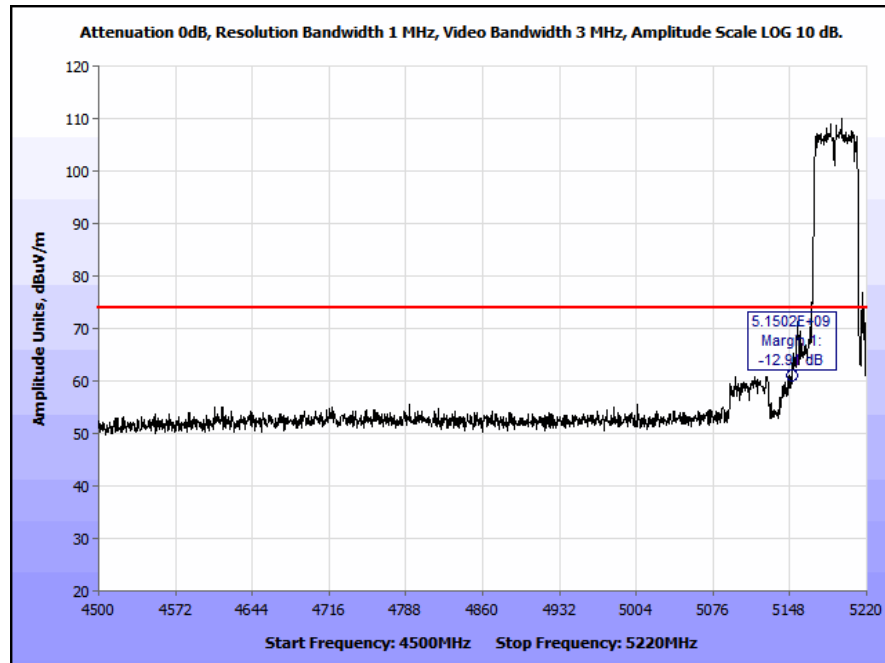


Plot 235. Restricted Band Edge, Patch Antenna, 802.11n 40 MHz, 5190 MHz, Low Channel, Peak (4.5 - 5.22 GHz Span)

Restricted Band Edge, 802.11n 80 MHz, 7 dBi Patch Antenna

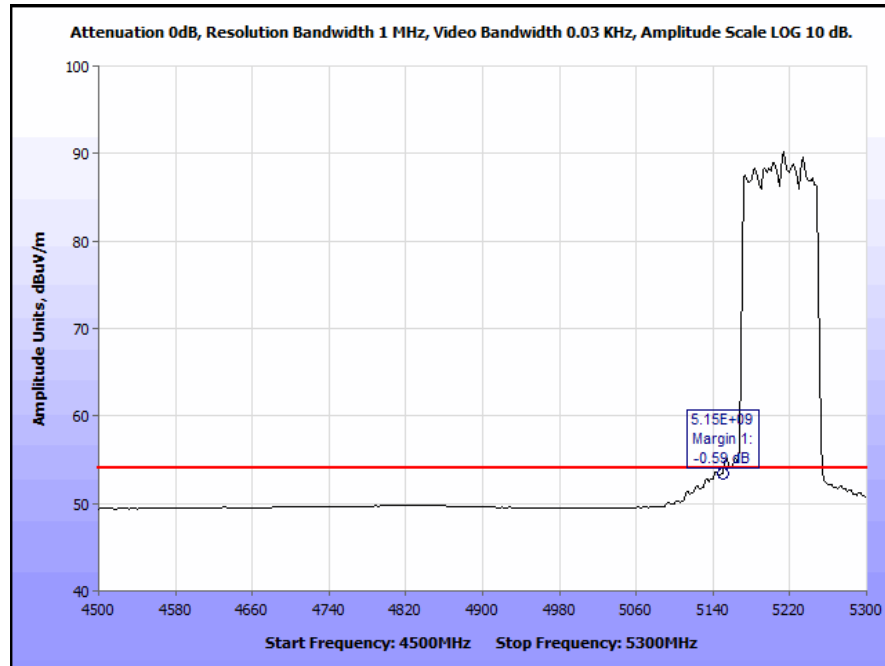


Plot 236. Restricted Band Edge, Patch Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Average

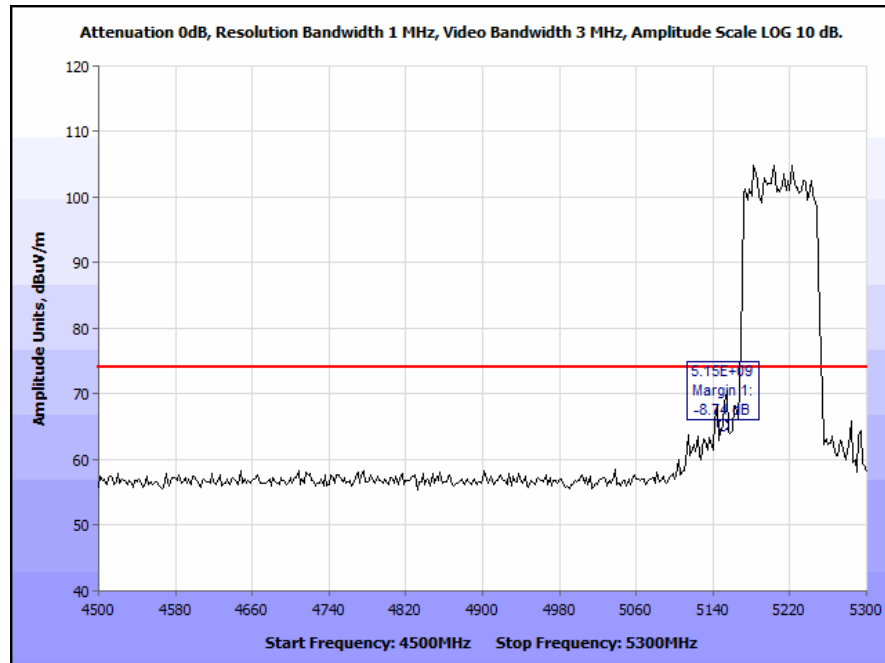


Plot 237. Restricted Band Edge, Patch Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11a, Ceiling Antenna

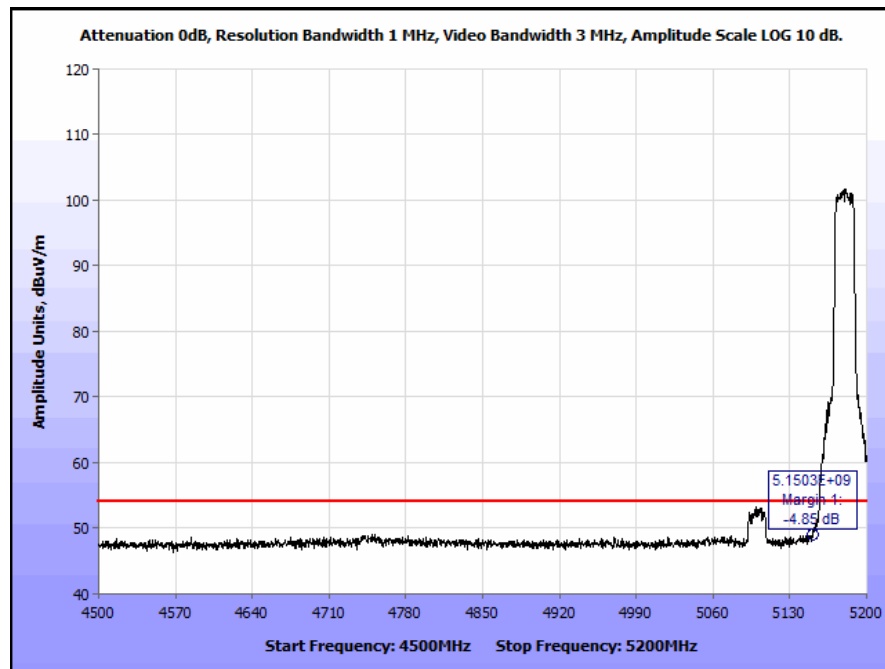


Plot 238. Restricted Band Edge, Ceiling Antenna, 802.11a 20 MHz, 5180 MHz, High @ 5150 MHz Edge, Average

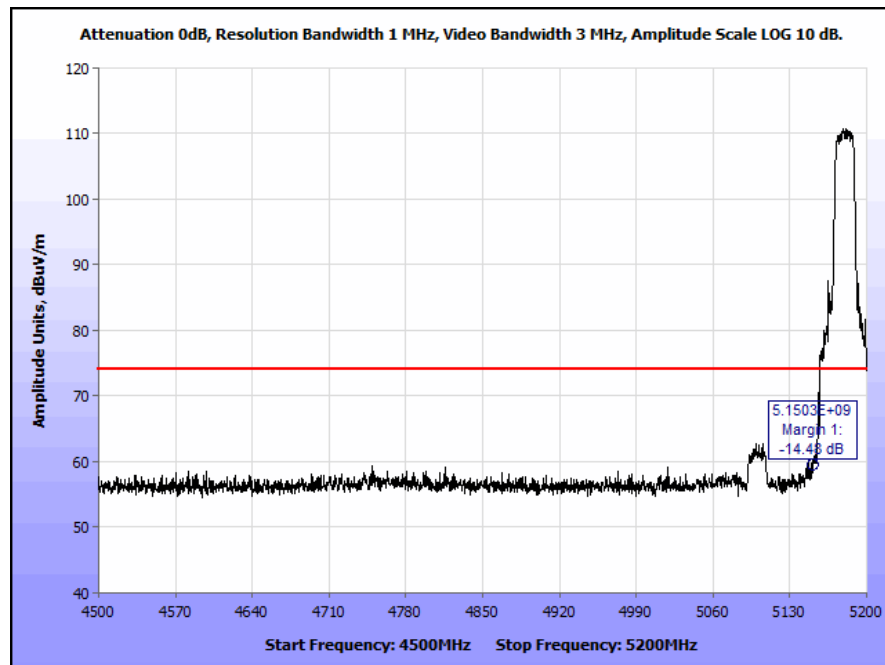


Plot 239. Restricted Band Edge, Ceiling Antenna, 802.11a 20 MHz, 5180 MHz, High @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11n 20 MHz, Ceiling Antenna

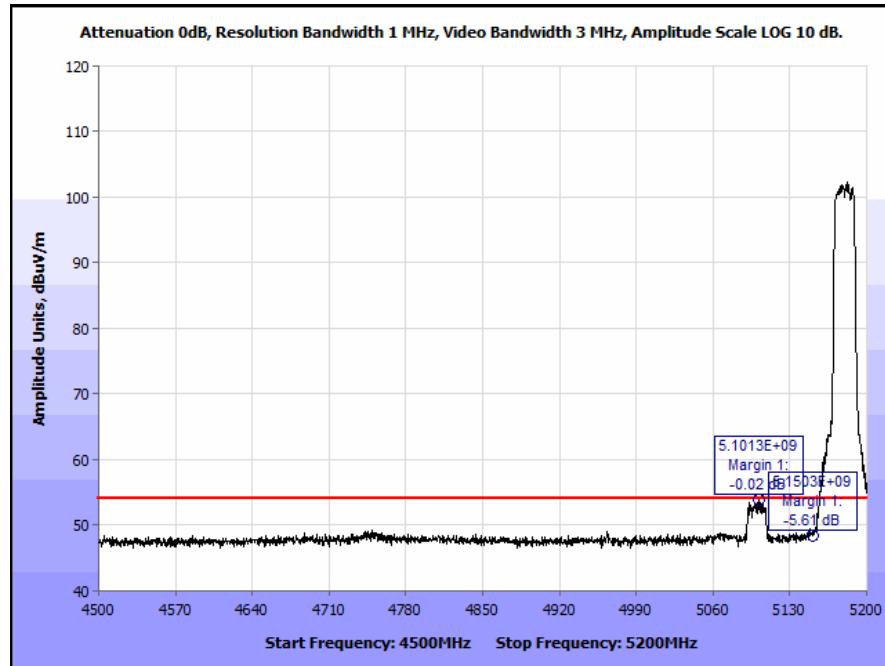


Plot 240. Restricted Band Edge, Ceiling Antenna, 802.11n 20 MHz, 5180 MHz High @ 5150 MHz Edge, Average

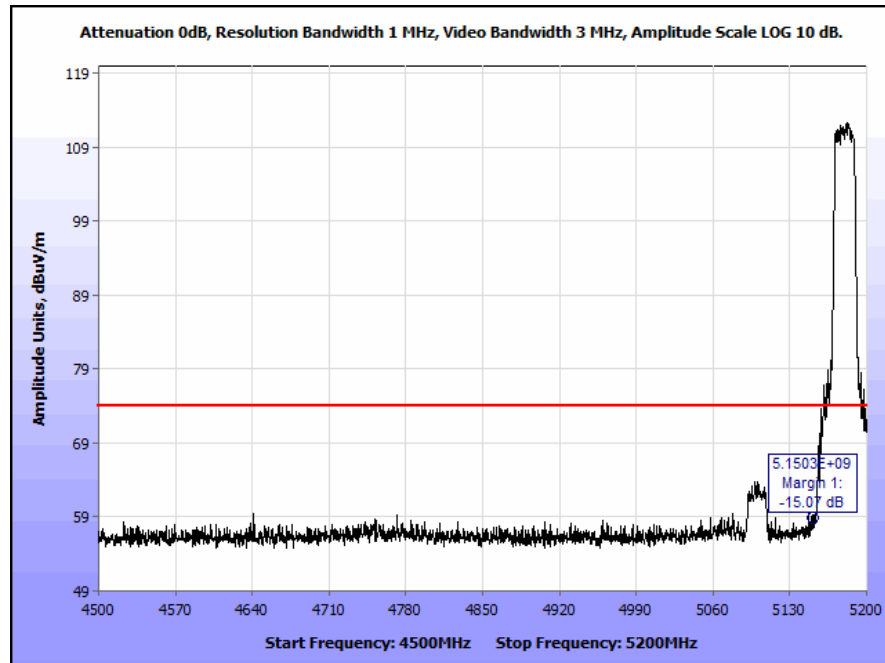


Plot 241. Restricted Band Edge, Ceiling Antenna, 802.11n 20 MHz, 5180 MHz High @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11n 40 MHz, Ceiling Antenna

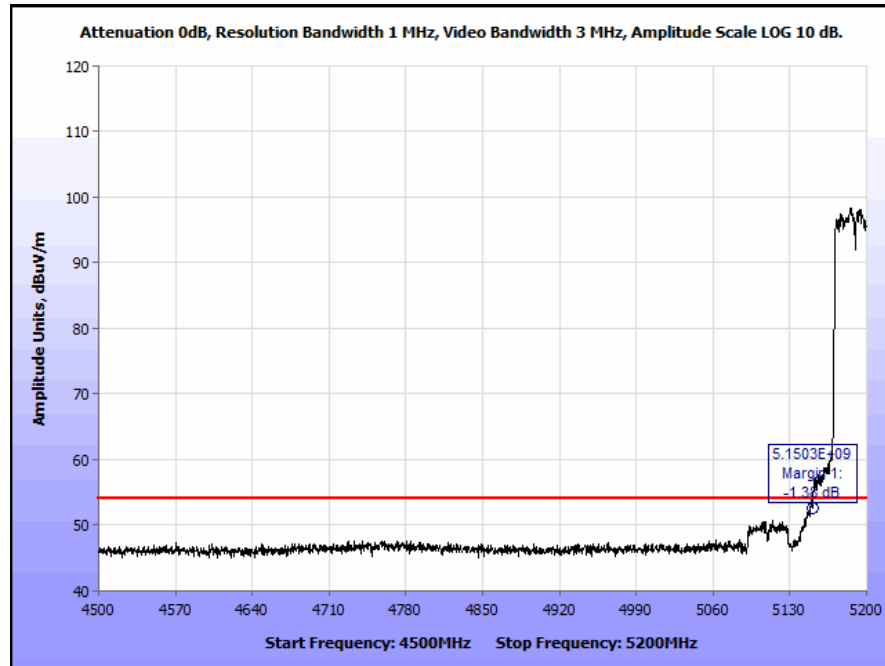


Plot 242. Restricted Band Edge, Ceiling Antenna, 802.11n 40 MHz, 5190 MHz High @ 5150 MHz Edge, Average

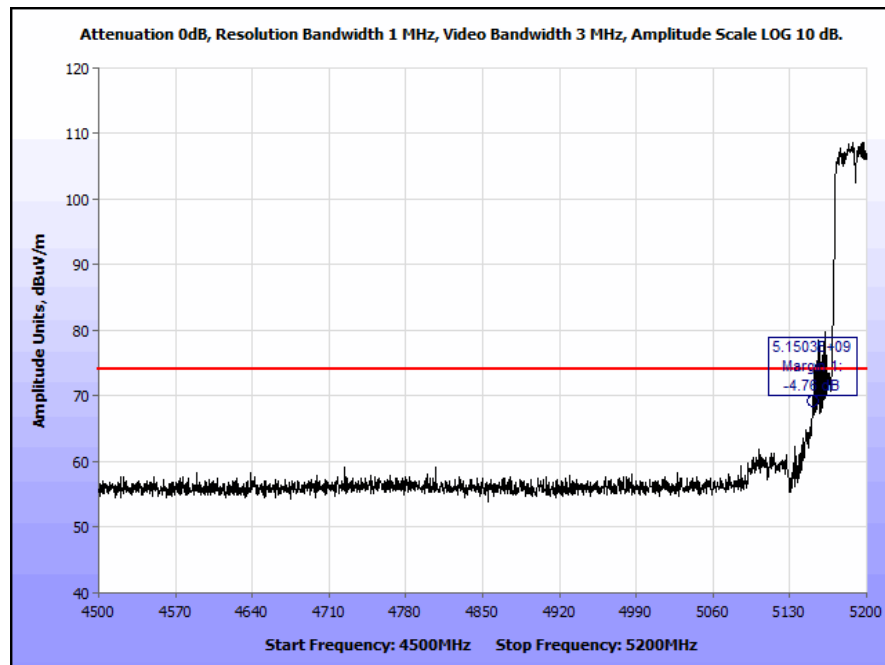


Plot 243. Restricted Band Edge, Ceiling Antenna, 802.11n 40 MHz, 5190 MHz High @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11n 80 MHz, Ceiling Antenna

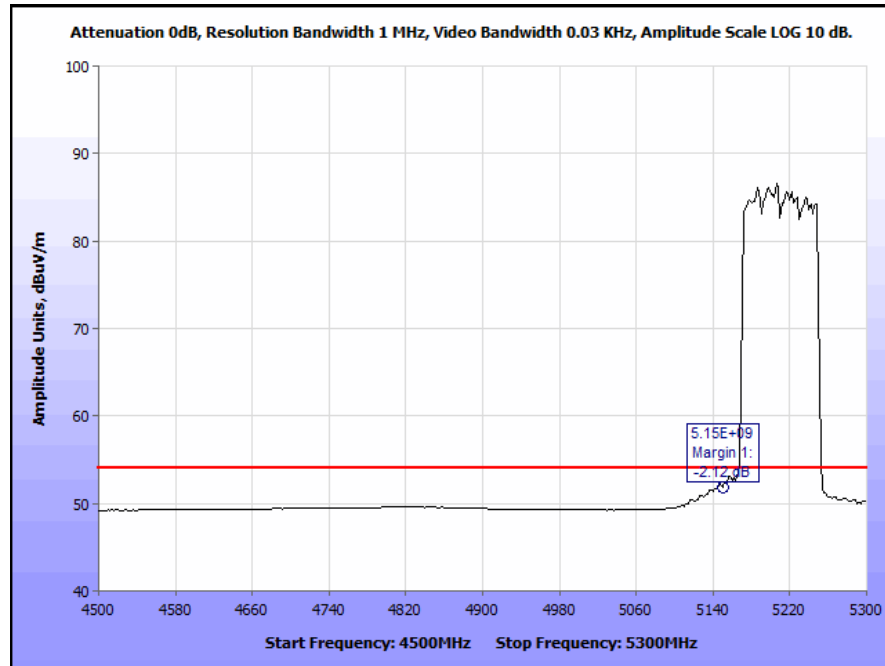


Plot 244. Restricted Band Edge, Ceiling Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Average

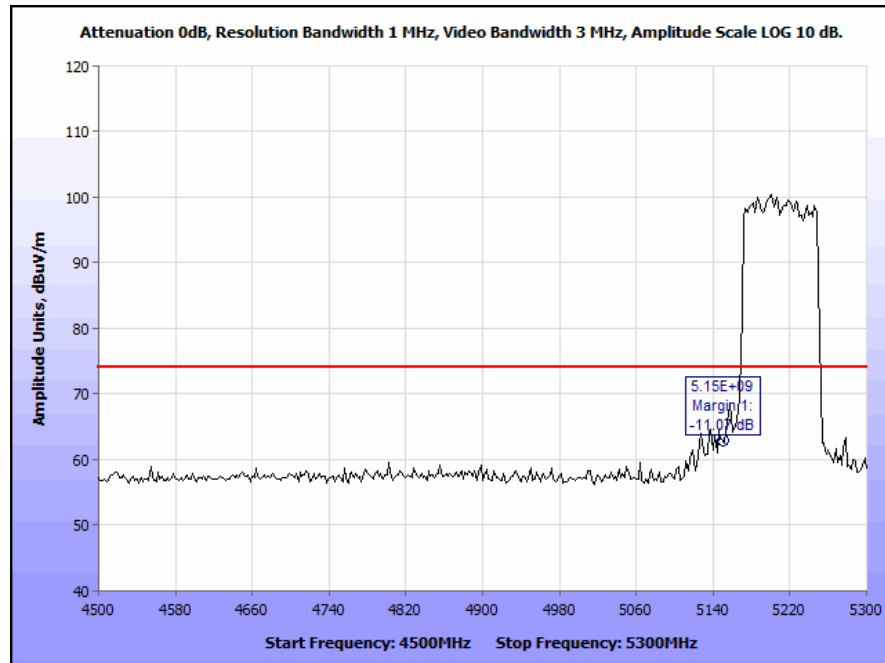


Plot 245. Restricted Band Edge, Ceiling Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11a, Omni Antenna

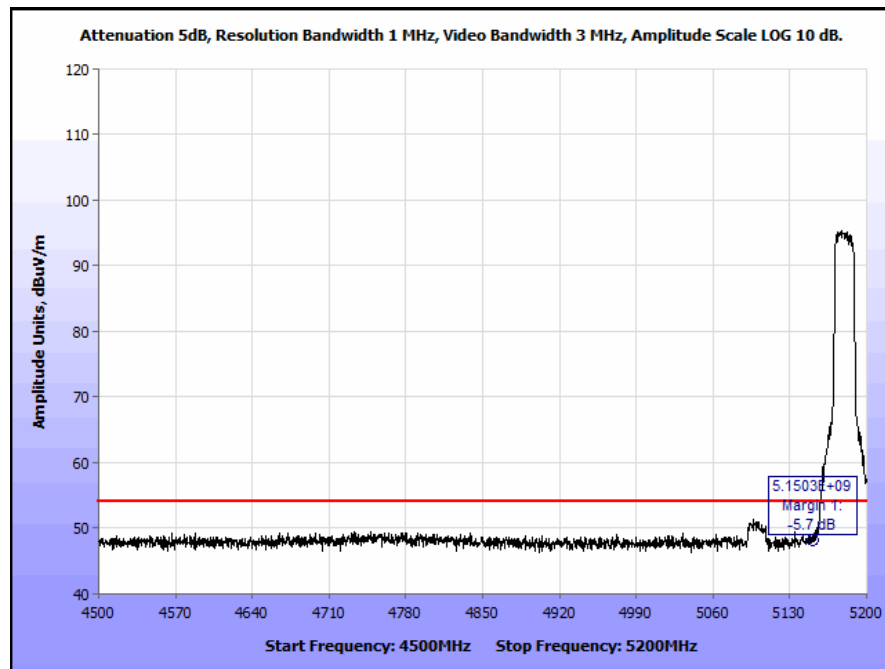


Plot 246. Restricted Band Edge, Omni Antenna, 802.11a 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Average

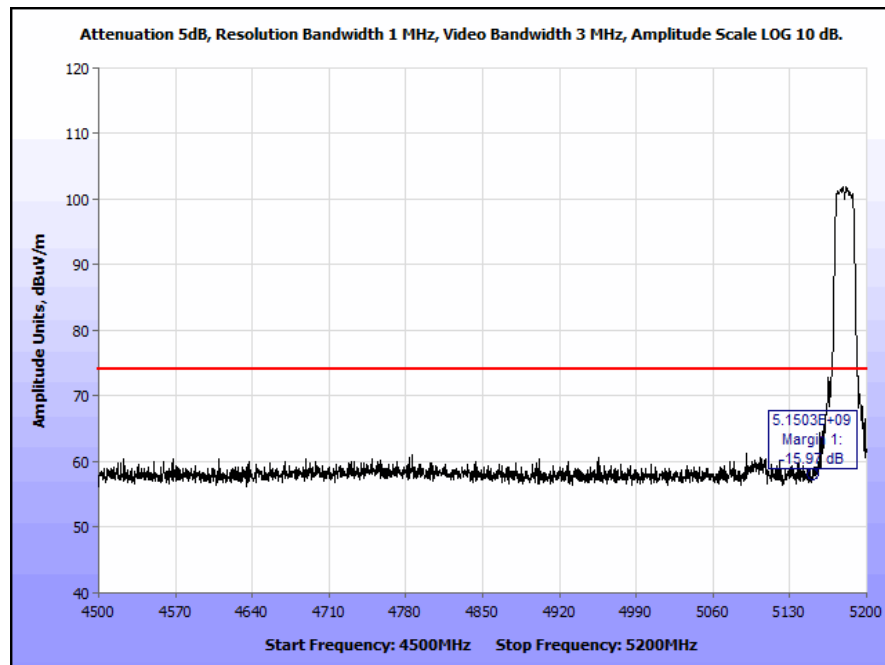


Plot 247. Restricted Band Edge, Omni Antenna, 802.11a 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11n 20 MHz, Omni Antenna

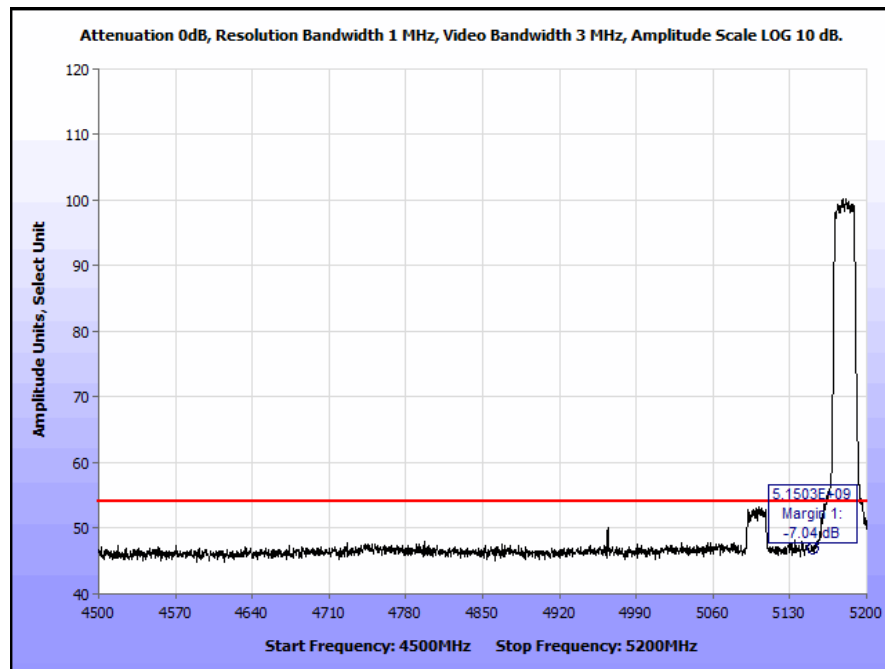


Plot 248. Restricted Band Edge, Omni Antenna, 802.11n 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Average

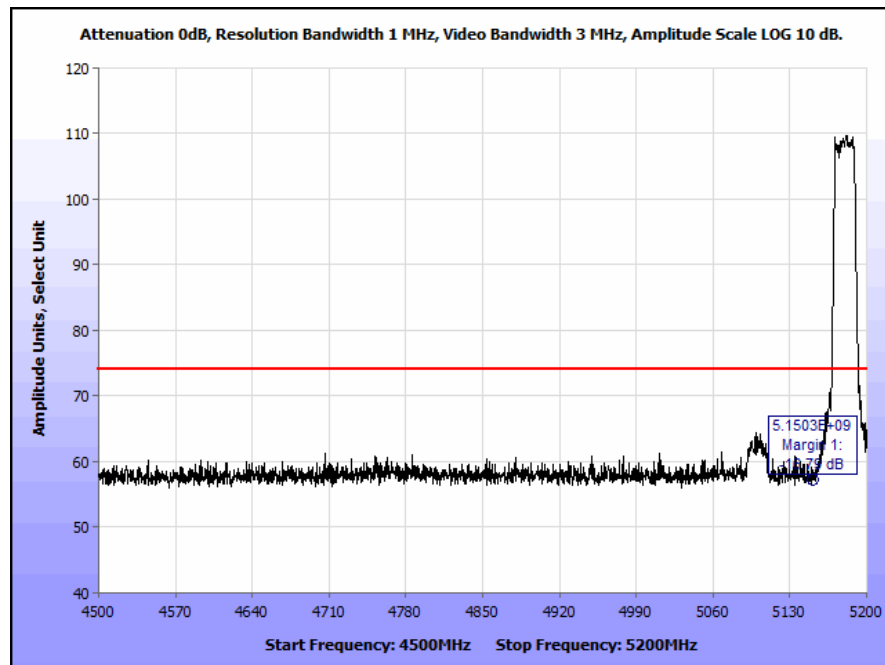


Plot 249. Restricted Band Edge, Omni Antenna, 802.11n 20 MHz, 5180 MHz Low @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11n 40 MHz, Omni Antenna

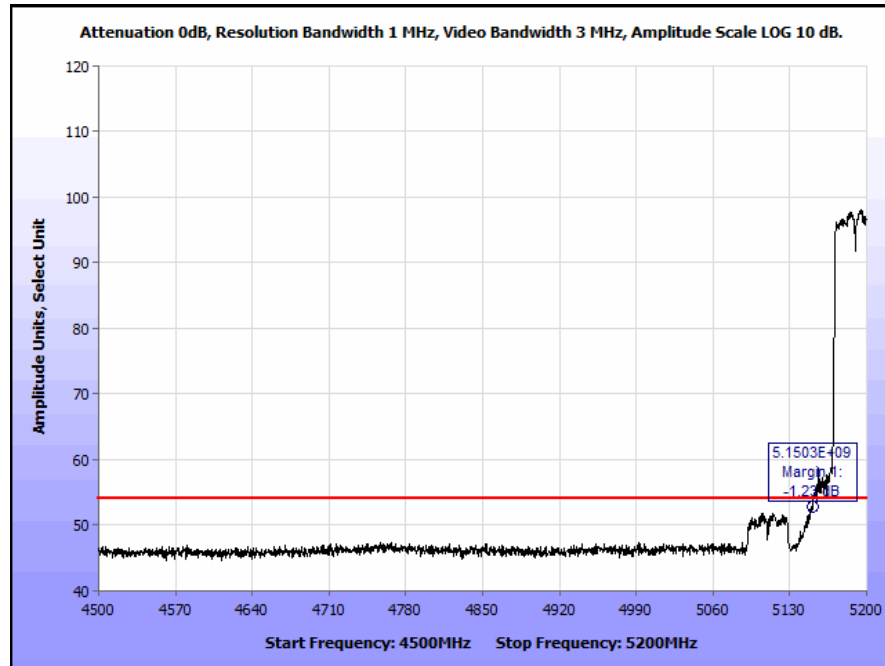


Plot 250. Restricted Band Edge, Omni Antenna, 802.11n 40 MHz, 5190 MHz Low @ 5150 MHz Edge, Average

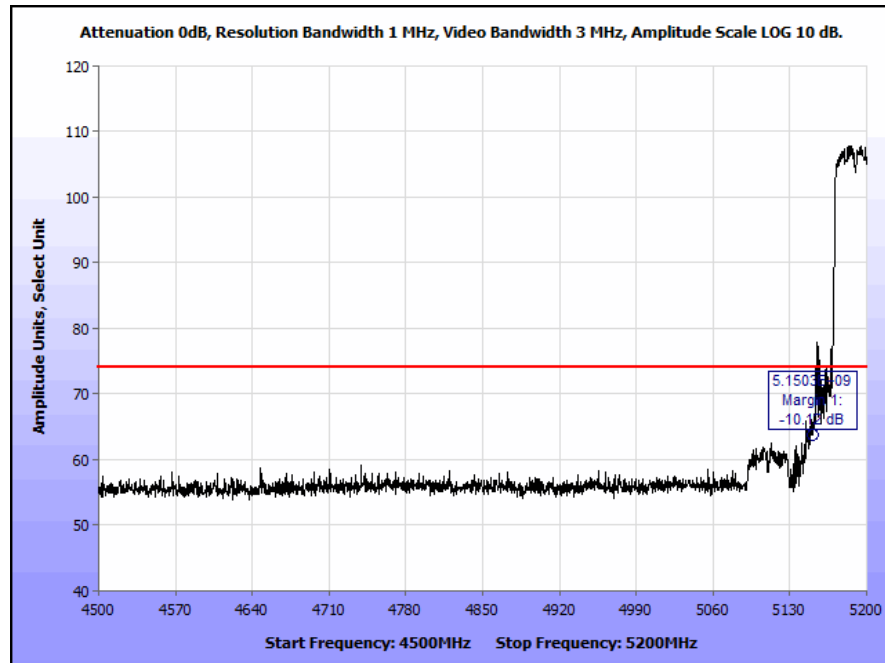


Plot 251. Restricted Band Edge, Omni Antenna, 802.11n 40 MHz, 5190 MHz Low @ 5150 MHz Edge, Peak

Restricted Band Edge, 802.11n 80 MHz, Omni Antenna

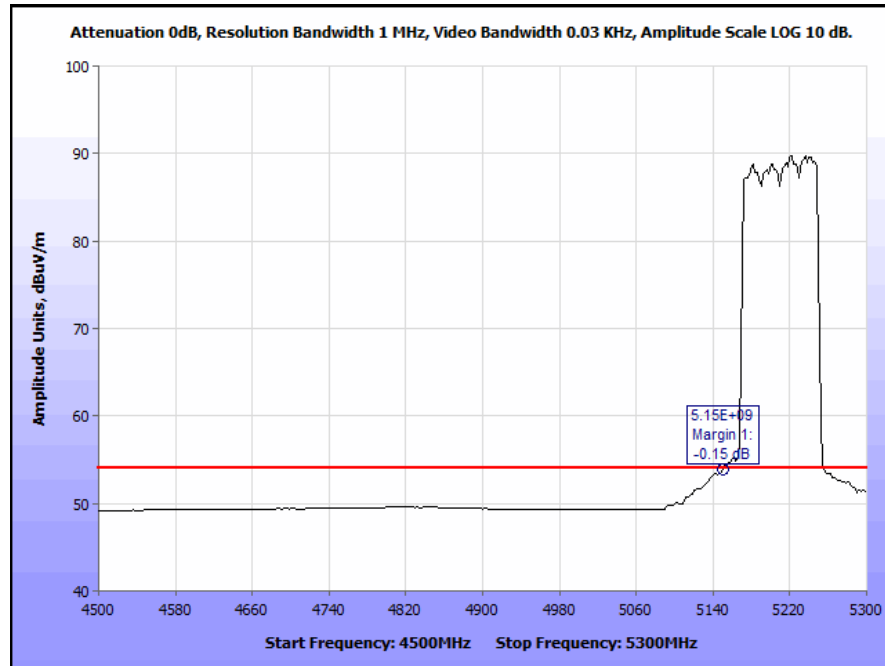

Plot 252. Restricted Band Edge, Omni Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Average

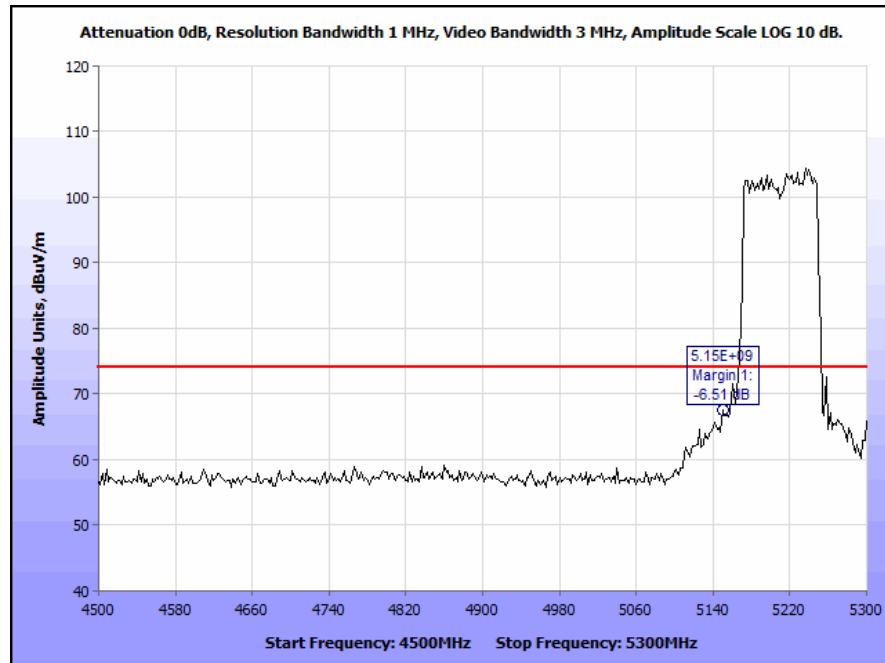

Plot 253. Restricted Band Edge, Omni Antenna, 802.11n 80 MHz, 5210 MHz @ 5150 MHz Edge, Peak

Electromagnetic Compatibility Criteria for Intentional Radiators

Co-location

Test Requirements: Devices designed to transmit simultaneously in multiple channels in single or multiple frequency bands or those using new “carrier aggregation techniques”, excluding cellular base stations or where specific guidance has been proved.

All devices that are capable of transmitting simultaneously in more than one Part-15 band between 5 and 6 GHz (*i.e.*, in two or more of the four U-NII bands or in the 5.8 GHz 15.247 band and at least one U-NII band) are subject to Permit But Ask provisions. This includes devices marketed as IEEE Std 802.11ac or “pre-standard” IEEE Std 802.11ac.


Test Procedure: The transmitter was placed on an 80cm wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions. A preamp was used in the range from 7-18GHz to improve noise floor. Plots were corrected for cable loss, antenna, and preamp gain.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.


For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Only noise floor was seen above 18 GHz.

The EUT uses 2 radios that are co-located. The EUT was set to transmit on both radios using the following matrix below.


Omni (Each port is 2.4-5.8GHz)						Patch, Ports 1-3 is 2.4GHz only. Ports 4-6 is 5GHz Only	
Radio 1	Radio 2	Radio 1	Radio 2	Radio 1	Radio 2	Radio 1	Radio 2
802.11n 20MHz	802.11n 20MHz	802.11n 20MHz	802.11n 20MHz	802.11n 20MHz	802.11n 20MHz	802.11n 20MHz	802.11n 20MHz
2412	5200	2412	2412	5200	5200	2412	2412
2437	5300	2437	2437	5300	5300	2437	2437
2462	5580	2462	2462	5580	5580	2462	2462
--	5785	--	--	5785	5785	--	5200
--	--	--	--	--	--	--	5300
--	--	--	--	--	--	--	5580
--	--	--	--	--	--	--	5785

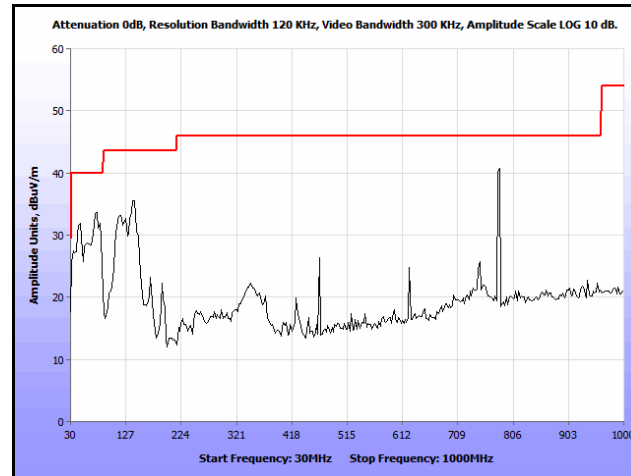


Plot 254. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 30 MHz – 1 GHz

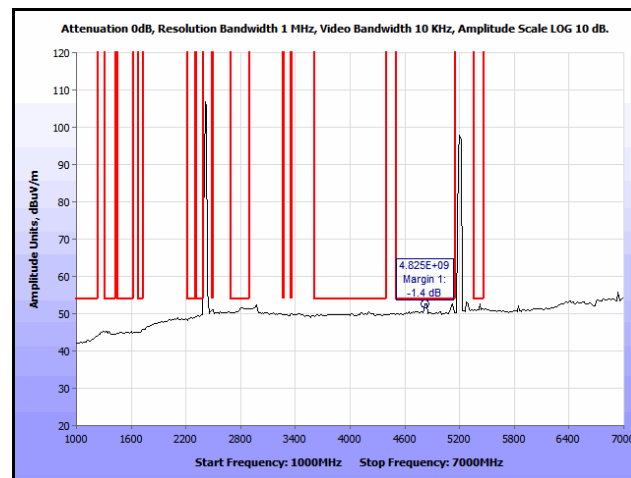


Plot 255. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Average

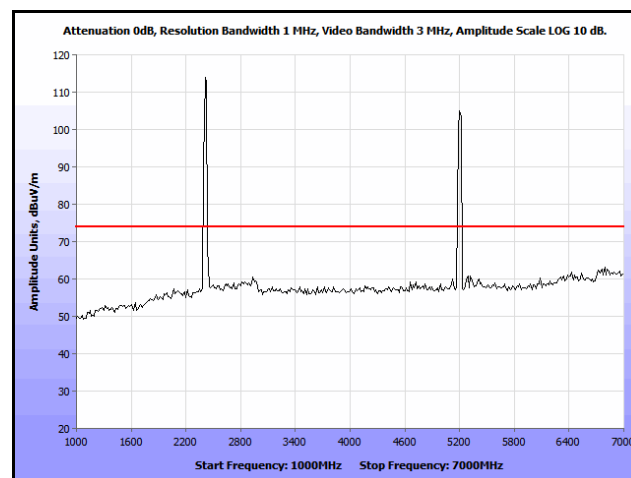


Plot 256. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Peak

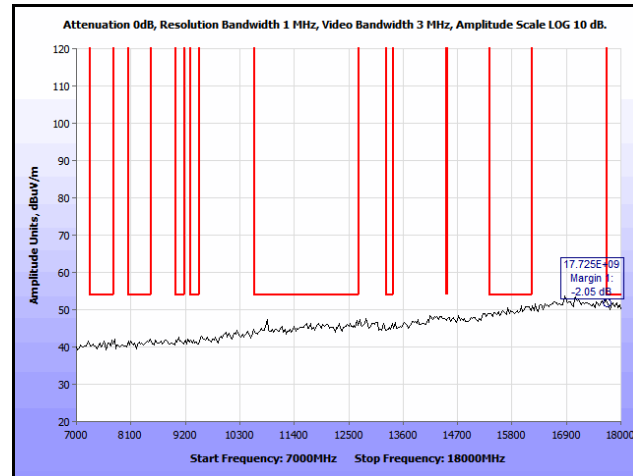


Plot 257. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2412 & 5200 MHz, 7 GHz – 18 GHz, Peak

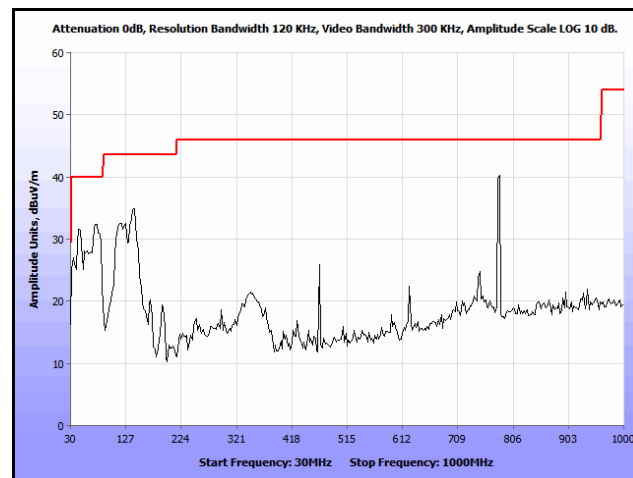


Plot 258. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 30 MHz – 1 GHz

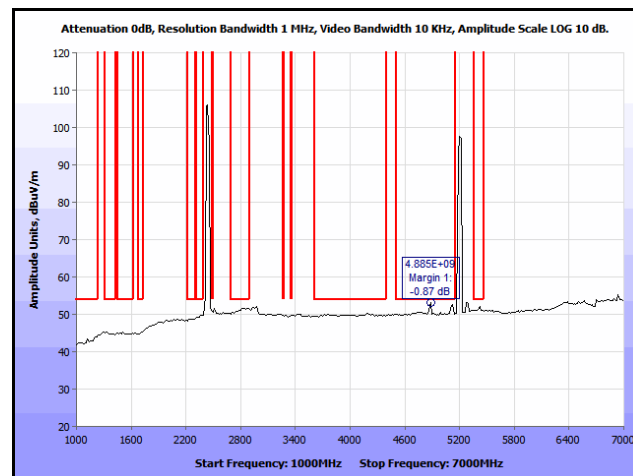


Plot 259. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Average

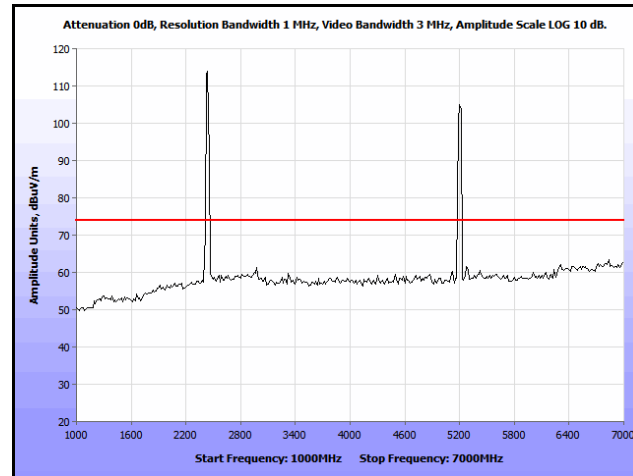


Plot 260. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Peak

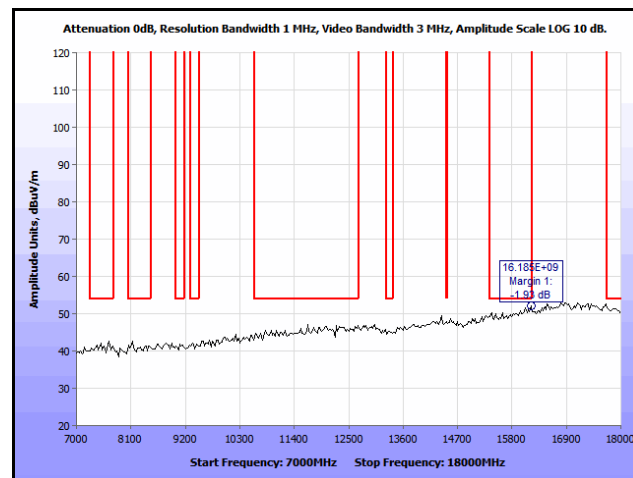


Plot 261. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2437 & 5200 MHz, 7 GHz – 18 GHz, Peak

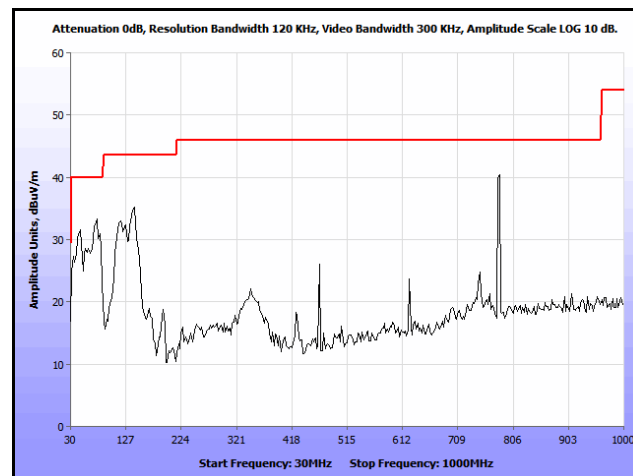


Plot 262. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 30 MHz – 1 GHz

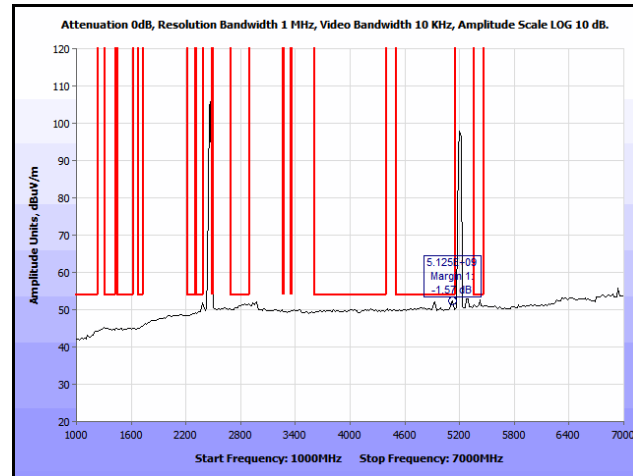


Plot 263. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Average

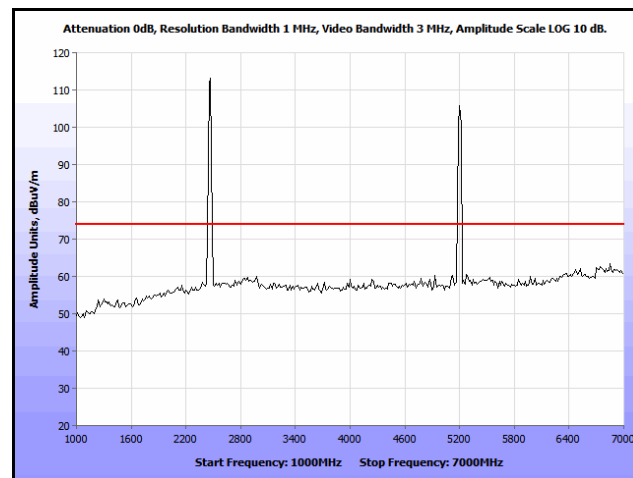


Plot 264. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Peak

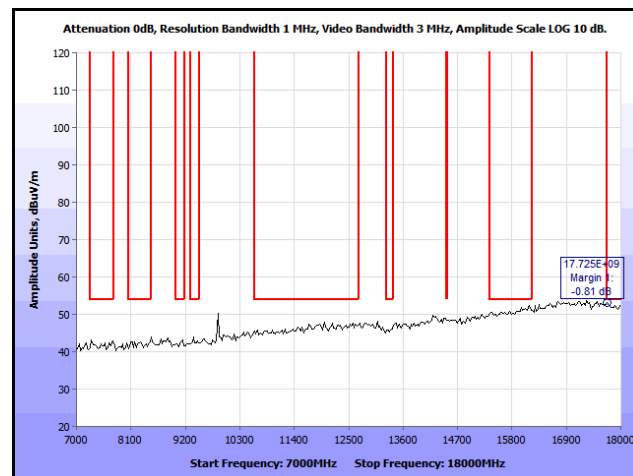


Plot 265. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 2462 & 5200 MHz, 7 GHz – 18 GHz, Peak

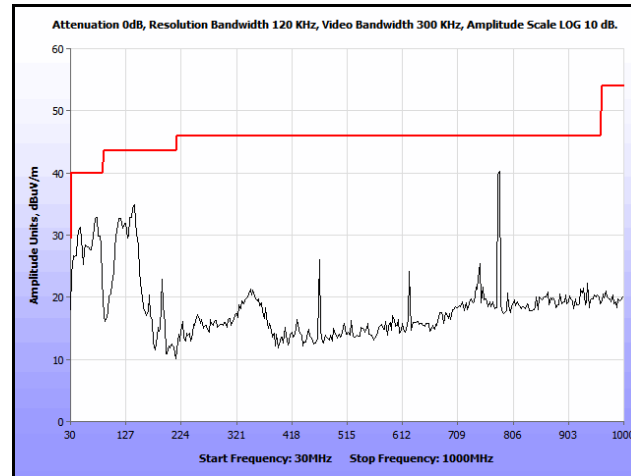


Plot 266. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 30 MHz – 1 GHz

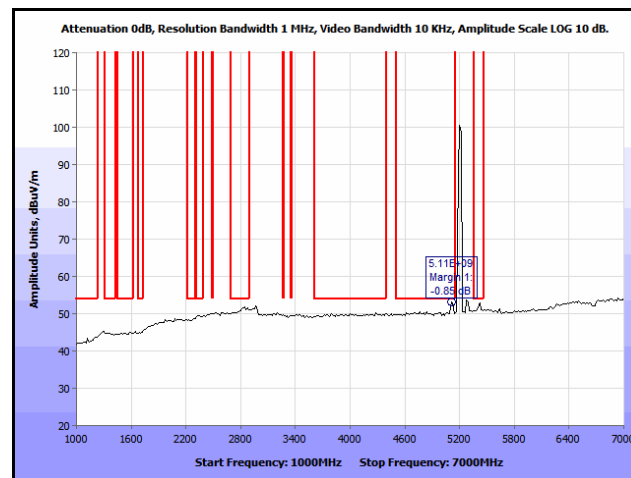


Plot 267. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 1 GHz – 7 GHz, Average

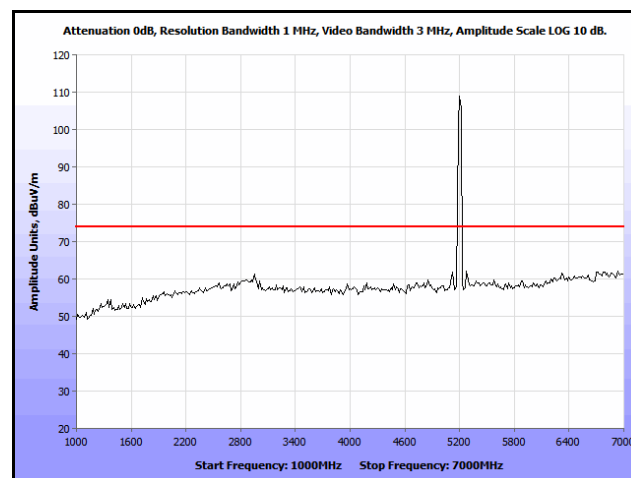


Plot 268. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 1 GHz – 7 GHz, Peak

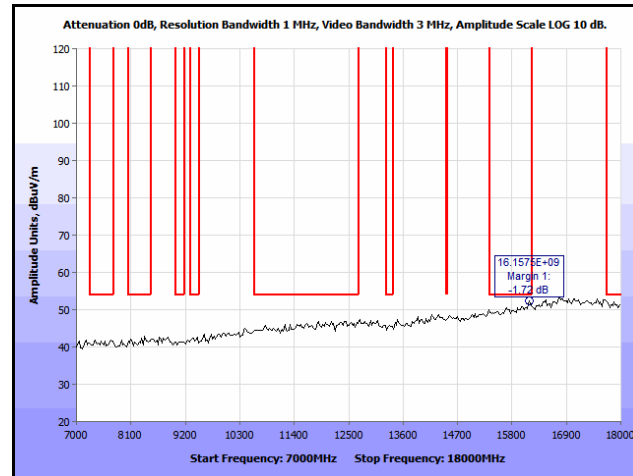


Plot 269. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5200 MHz, 7 GHz – 18 GHz, Peak

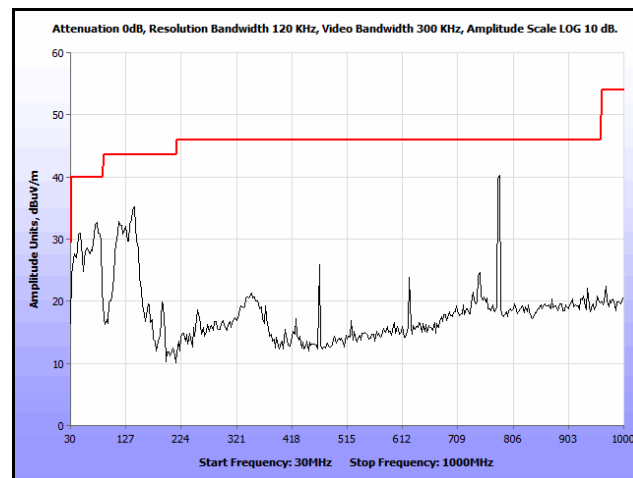


Plot 270. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 30 MHz – 1 GHz

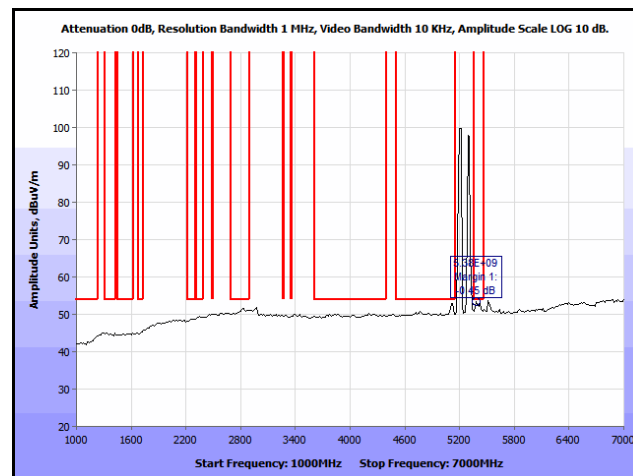


Plot 271. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 1 GHz – 7 GHz, Average

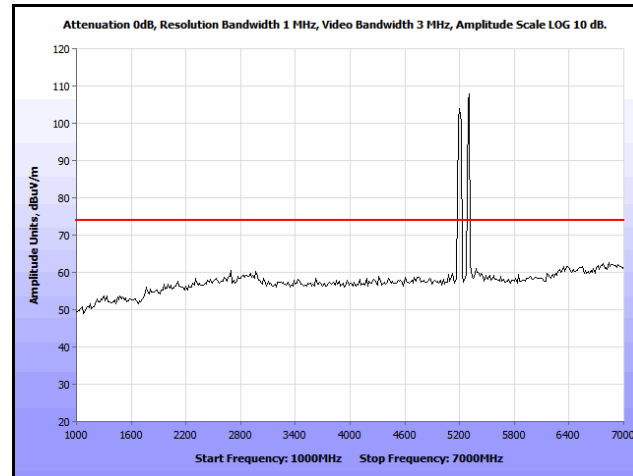


Plot 272. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 1 GHz – 7 GHz, Peak

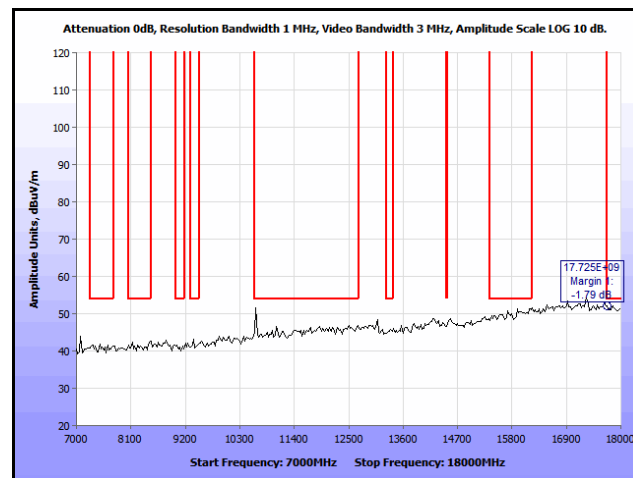


Plot 273. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5300 MHz, 7 GHz – 18 GHz, Peak

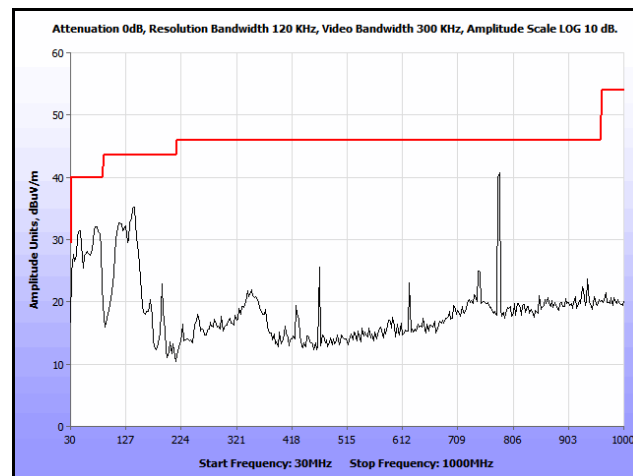


Plot 274. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 30 MHz – 1 GHz

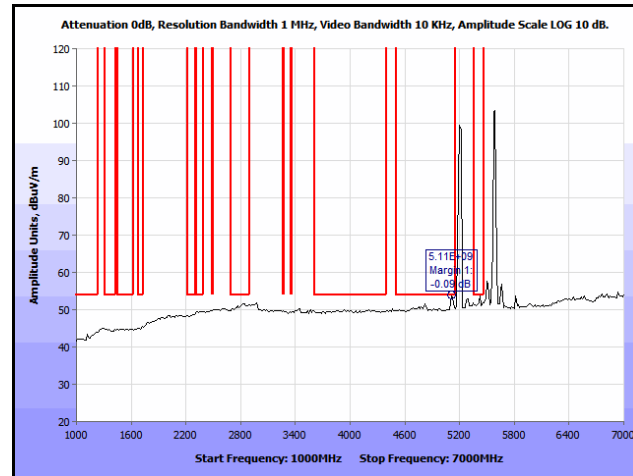


Plot 275. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 1 GHz – 7 GHz, Average

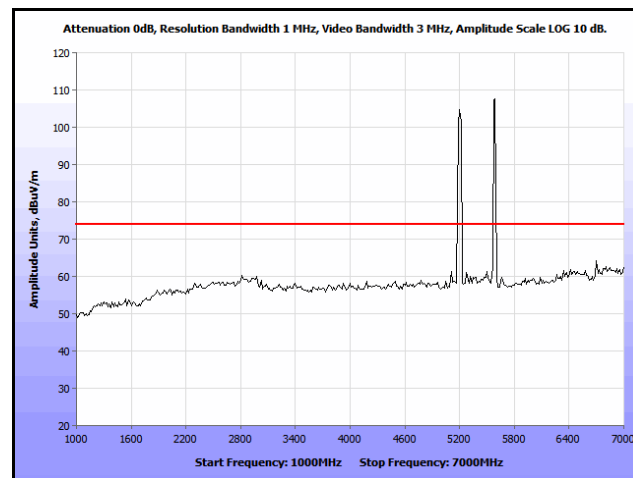


Plot 276. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 1 GHz – 7 GHz, Peak

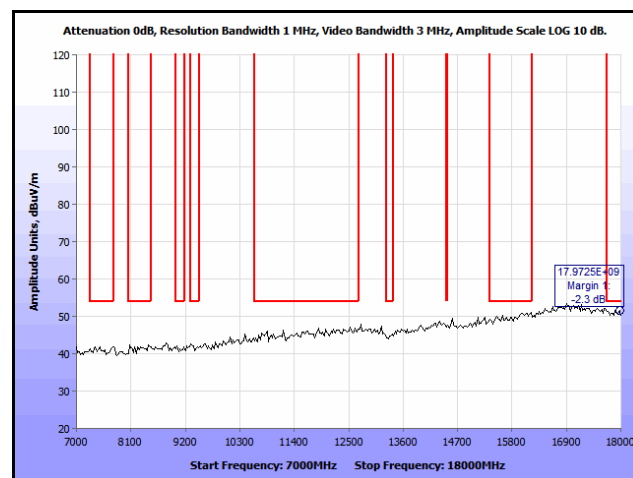


Plot 277. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5580 MHz, 7 GHz – 18 GHz, Peak

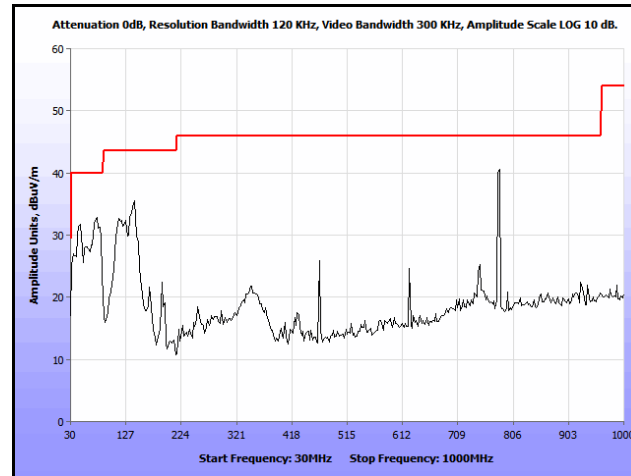


Plot 278. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 30 MHz – 1 GHz

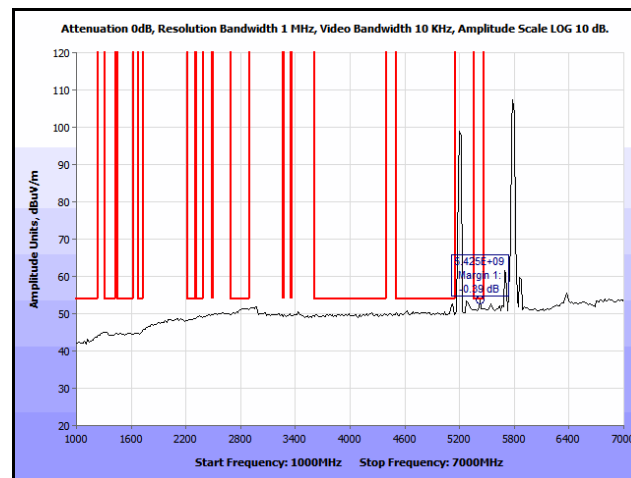


Plot 279. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 1 GHz – 7 GHz, Average

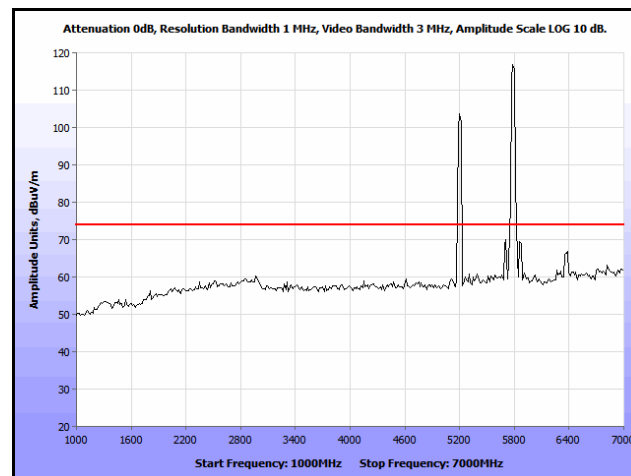


Plot 280. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 1 GHz – 7 GHz, Peak

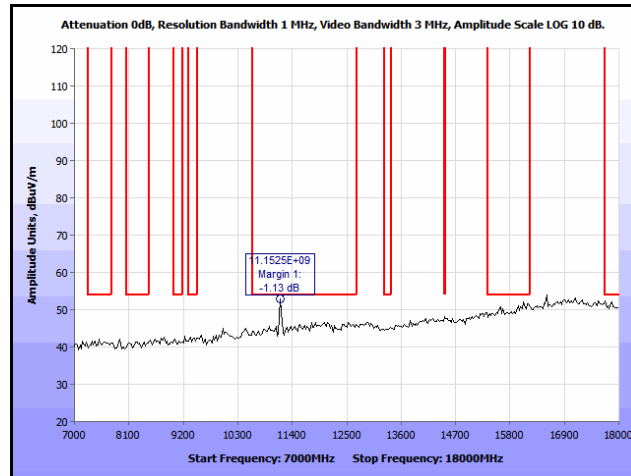


Plot 281. Co-location, Radiated Spurious Emissions, Omni, 802.11n 20 MHz, 5200 & 5785 MHz, 7 GHz – 18 GHz, Peak

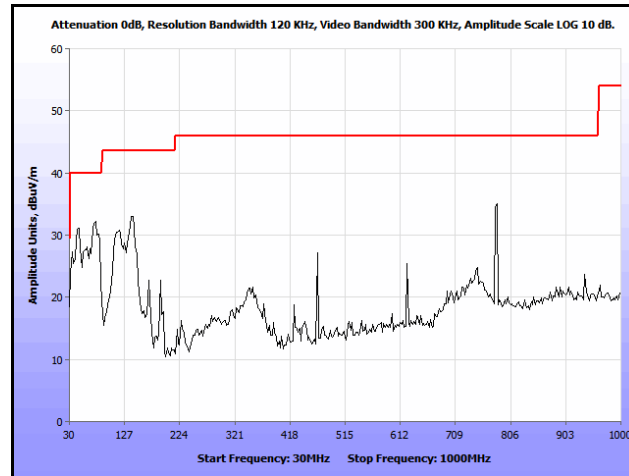


Plot 282. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 30 MHz – 1 GHz

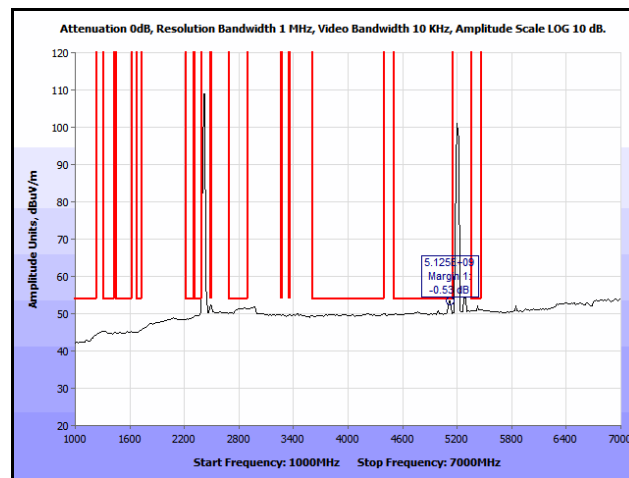


Plot 283. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Average

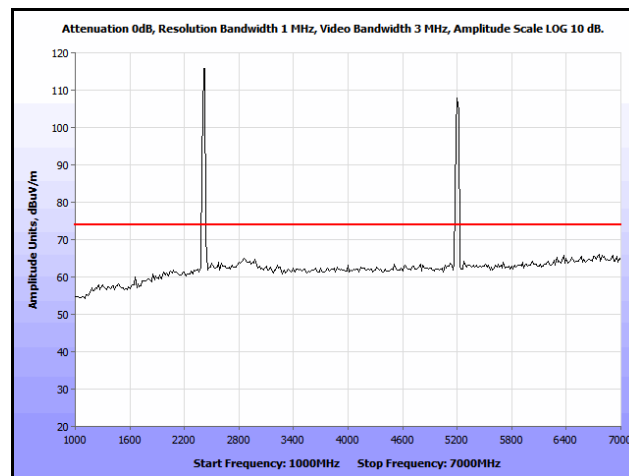


Plot 284. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 1 GHz – 7 GHz, Peak

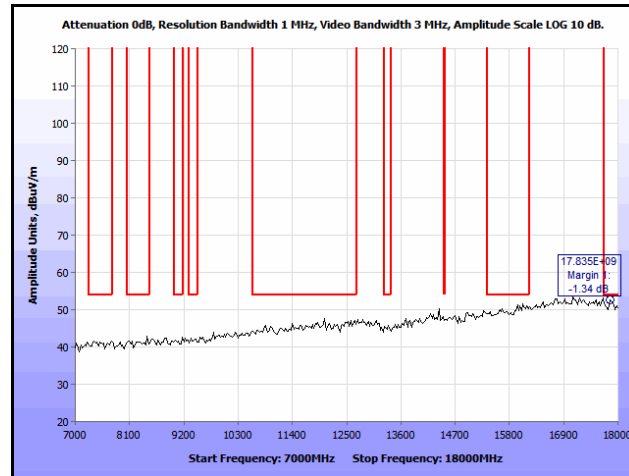


Plot 285. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2412 & 5200 MHz, 7 GHz – 18 GHz, Peak

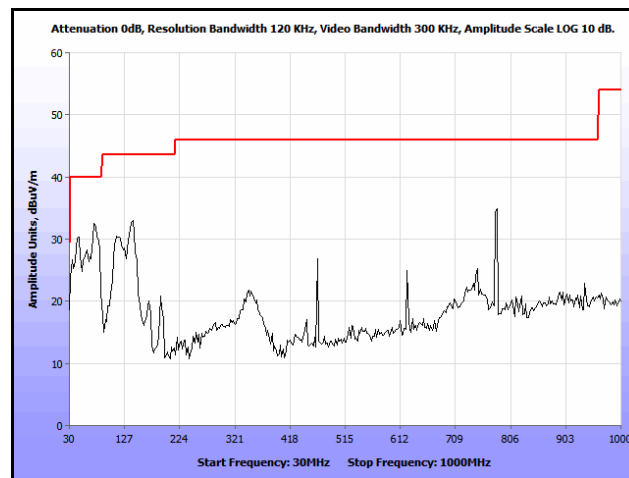


Plot 286. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 30 MHz – 1 GHz

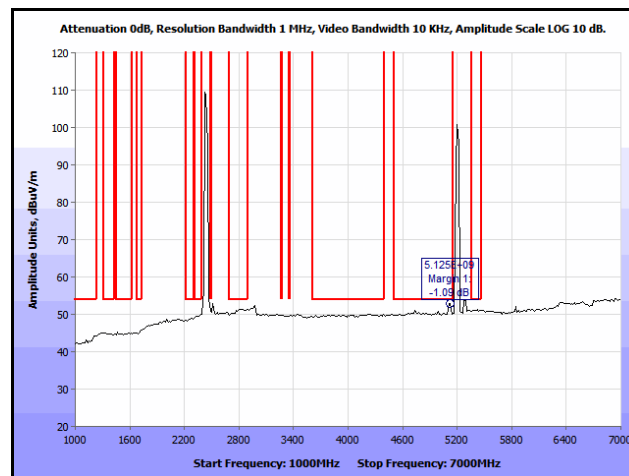


Plot 287. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Average

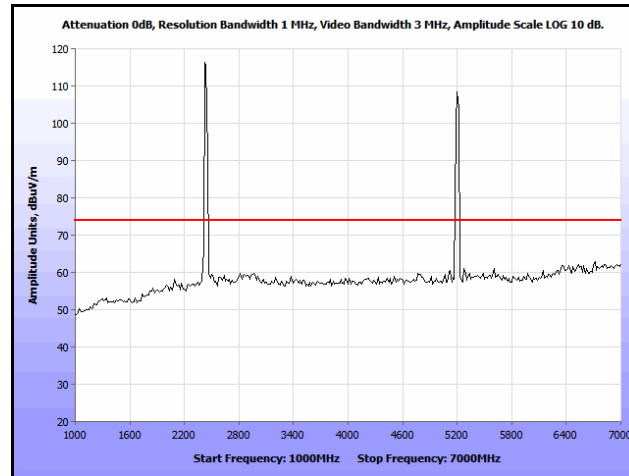


Plot 288. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 1 GHz – 7 GHz, Peak

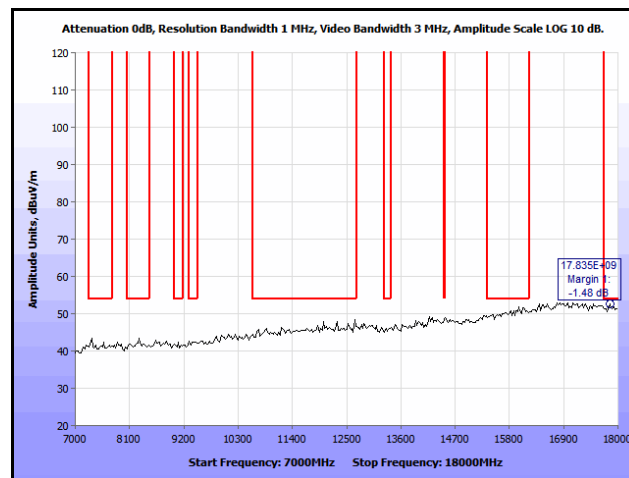


Plot 289. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2437 & 5200 MHz, 7 GHz – 18 GHz, Peak

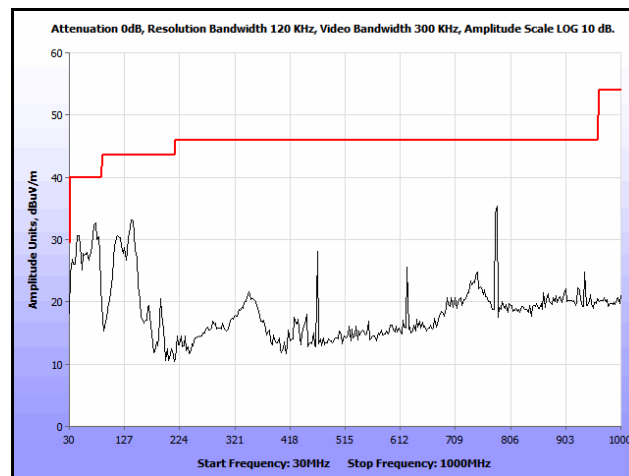


Plot 290. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 30 MHz – 1 GHz

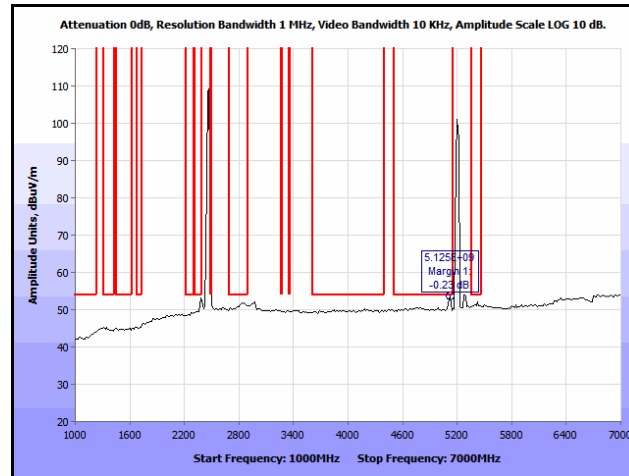

Plot 291. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Average

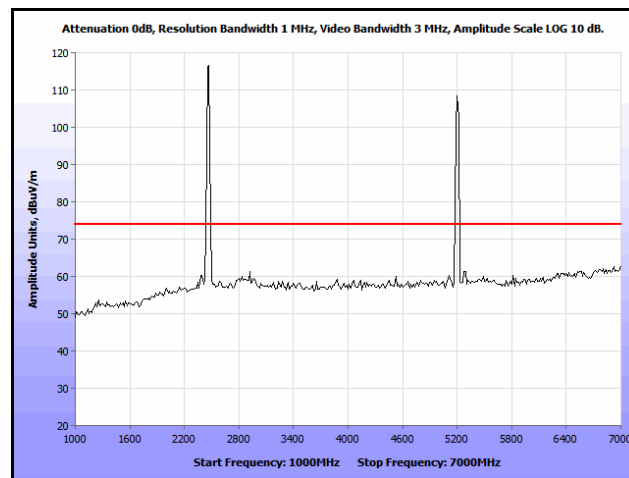

Plot 292. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 1 GHz – 7 GHz, Peak

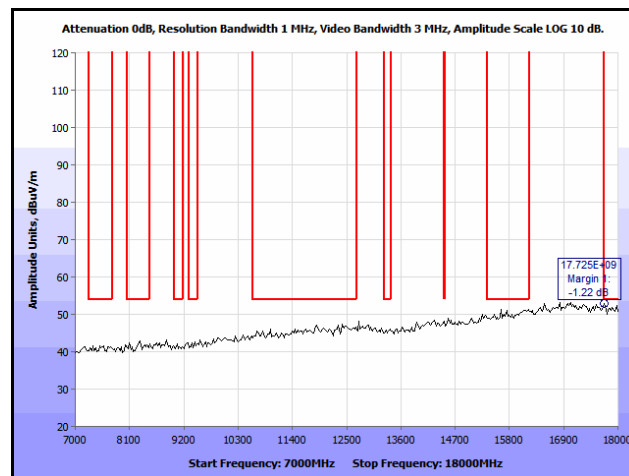

Plot 293. Co-location, Radiated Spurious Emissions, Patch, 802.11n 20 MHz, 2462 & 5200 MHz, 7 GHz – 18 GHz, Peak

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5150-5250 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density

P = Power Input to antenna (13.2 mW)

G = Antenna Gain 11.77dBi (15.03 numeric)

R = Minimum Distance between User and Antenna (20cm)

$$S = (13.2 * 15.03) / (4 * 3.14 * 20^2) = 0.039 \text{ mW/cm}^2$$


Since $S < 1 \text{ mW/cm}^2$, the minimum distance (R) is 20cm

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.407(g) Frequency Stability

Test Requirements:	§ 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test Procedure:	The EUT was connected directly to a spectrum analyzer through an attenuator. The resolution band width of the spectrum analyzer was set to 1 MHz. The Low and High channels were transmitted and viewed from the 5150MHz and 5350MHz edge.
Test Results:	The EUT was compliant with the requirements of §15.407(g) .
Test Engineer(s):	Jonathan Chao
Test Date(s):	02/15/13


Frequency Stability

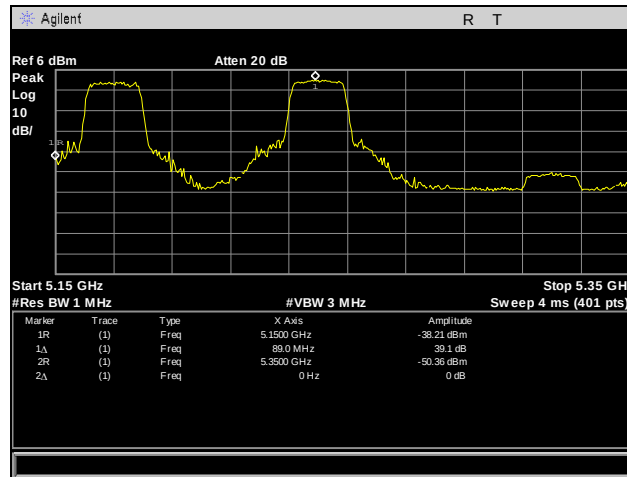


Plot 294. Frequency Stability, 5150 – 5250 MHz, -30°C, 120 V

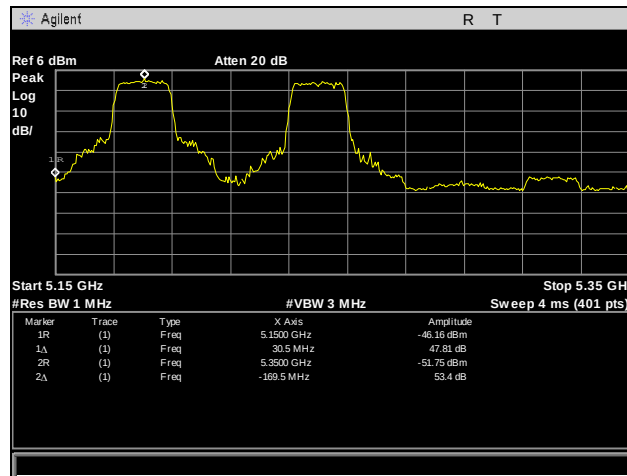


Plot 295. Frequency Stability, 5150 – 5250 MHz, -20°C, 120 V

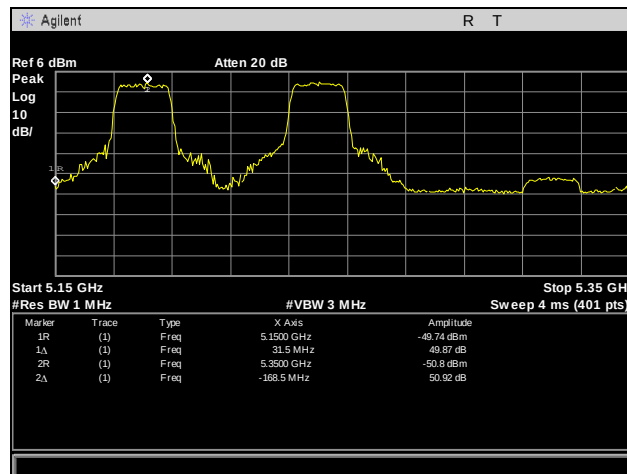


Plot 296. Frequency Stability, 5150 – 5250 MHz, -10°C, 120 V

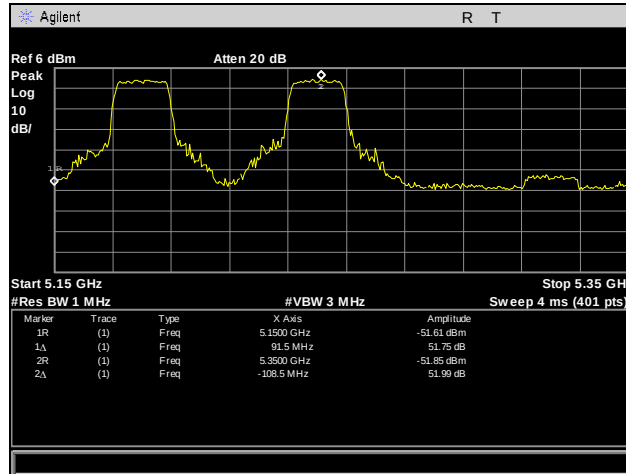


Plot 297. Frequency Stability, 5150 – 5250 MHz, 0°C, 120 V

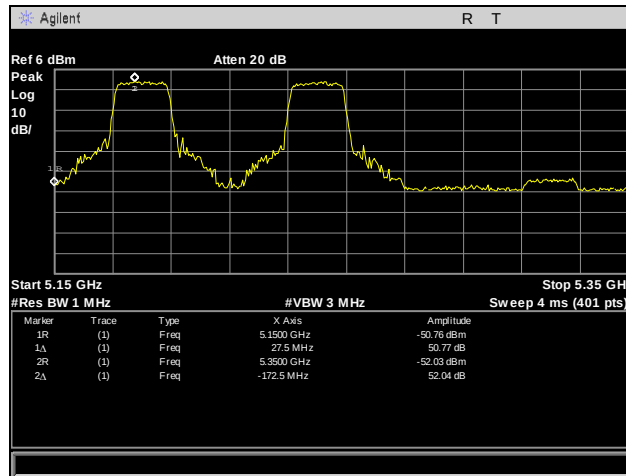


Plot 298. Frequency Stability, 5150 – 5250 MHz, 10°C, 120 V

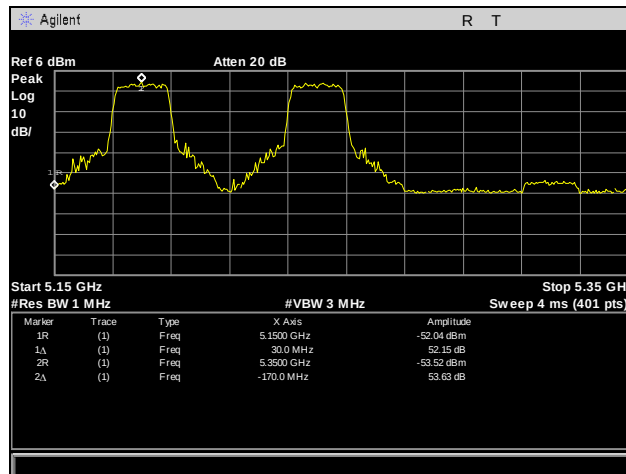


Plot 299. Frequency Stability, 5150 – 5250 MHz, 20°C, 108 V

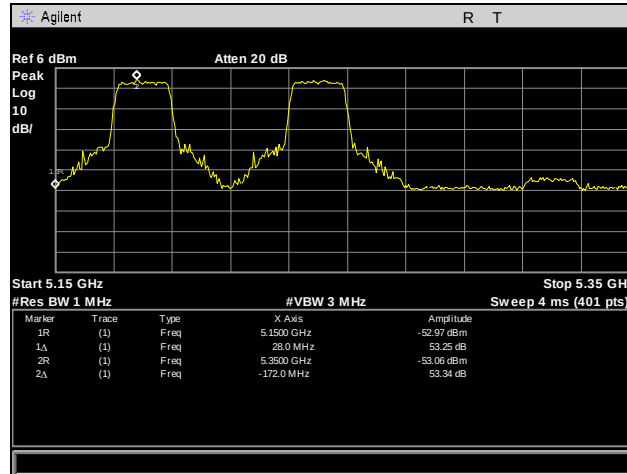


Plot 300. Frequency Stability, 5150 – 5250 MHz, 20°C, 120 V

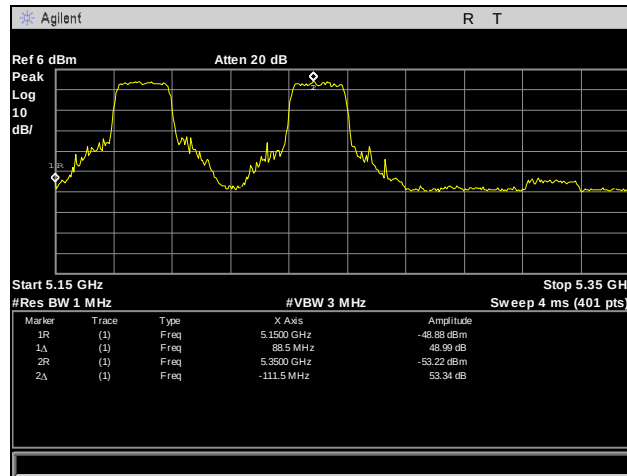


Plot 301. Frequency Stability, 5150 – 5250 MHz, 20°C, 132 V

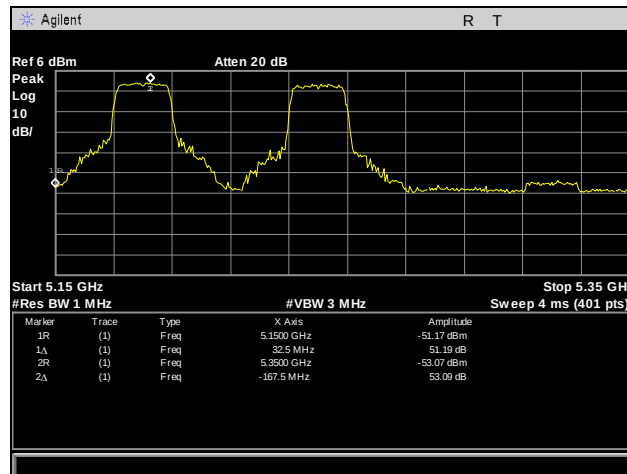


Plot 302. Frequency Stability, 5150 – 5250 MHz, 30°C, 120 V

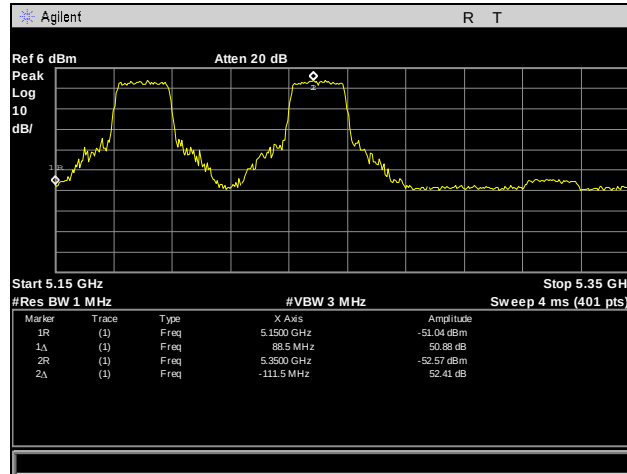

Plot 303. Frequency Stability, 5150 – 5250 MHz, 40°C, 120 V

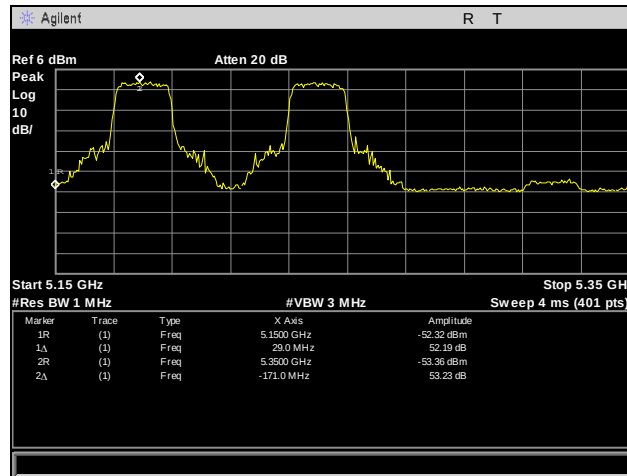

Plot 304. Frequency Stability, 5150 – 5250 MHz, 50°C, 120 V

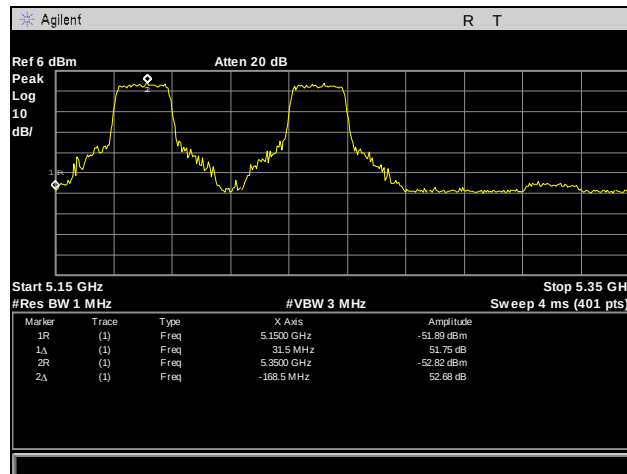

Plot 305. Frequency Stability, 5150 – 5250 MHz, 55°C, 120 V

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN Receiver Spurious Emissions Requirements

Test Requirements: The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 32.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 32. Spurious Emission Limits for Receivers

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test Procedures: The EUT was programmed for receive mode only. Conducted measurements were taken at the antenna port of the EUT. 300 kHz resolution bandwidth was used from 30 MHz - 1 GHz and 1 MHz resolution was used for measurements done above 1 GHz. All plots are corrected for cable loss.

Test Results: Equipment is compliant with the Receiver Spurious Emissions Requirements of RSS-GEN.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 01/30/13






Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup

Conducted Receiver Spurious Emissions, Port 1

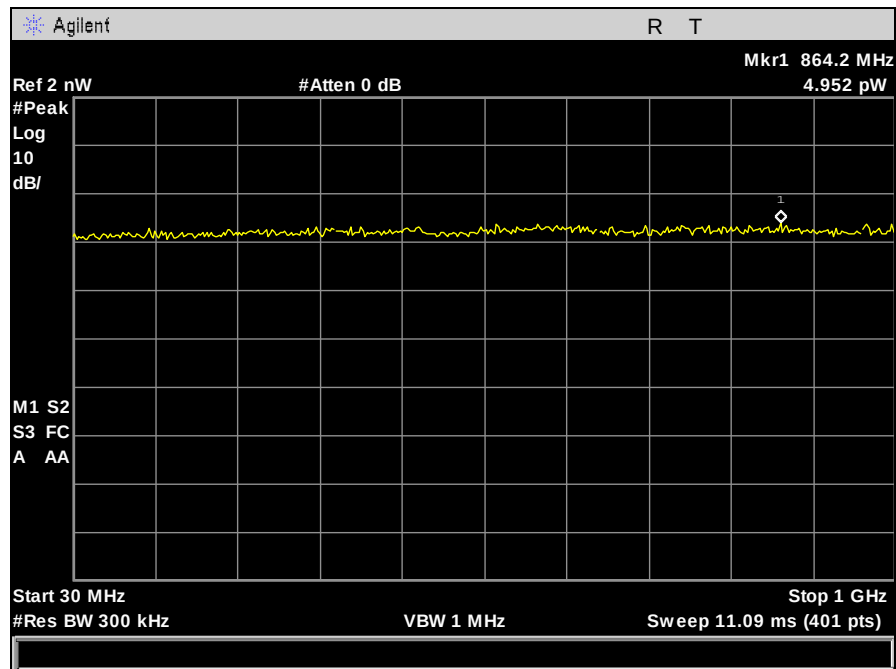


Plot 306. Receiver Spurious Emission, 30 MHz – 1 GHz, Port 1

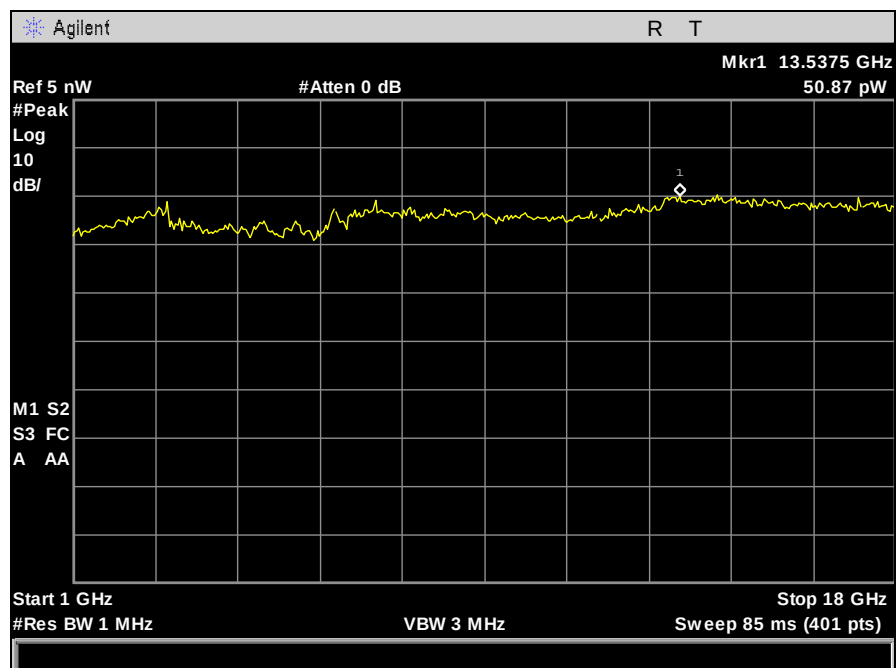


Plot 307. Receiver Spurious Emission, 1 GHz – 18 GHz, Port 1

Conducted Receiver Spurious Emissions, Port 2

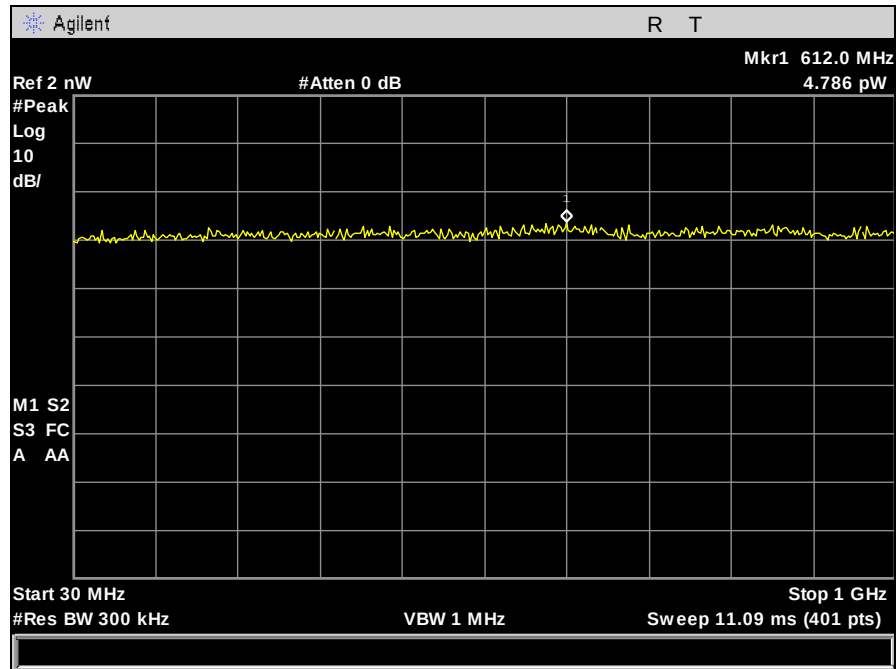


Plot 308. Receiver Spurious Emission, 30 MHz – 1 GHz, Port 2

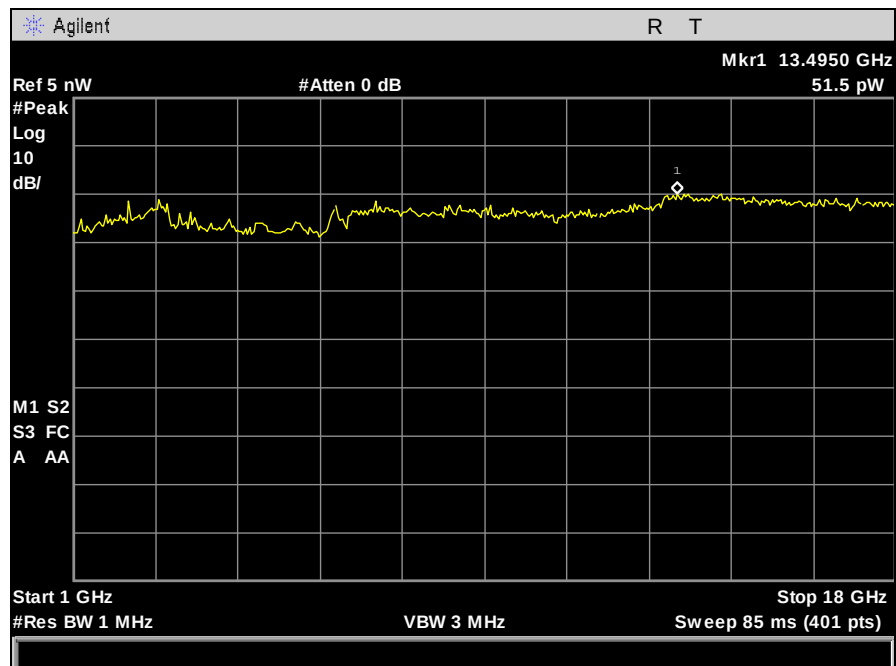


Plot 309. Receiver Spurious Emission, 1 GHz – 18 GHz, Port 2

Conducted Receiver Spurious Emissions, Port 3

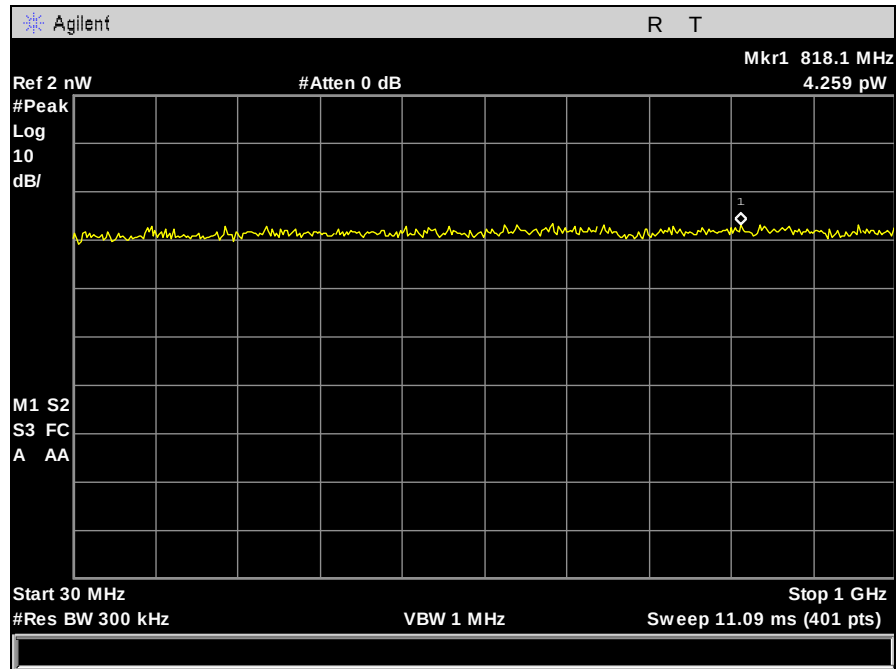

Plot 310. Receiver Spurious Emission, 30 MHz – 1 GHz, Port 3

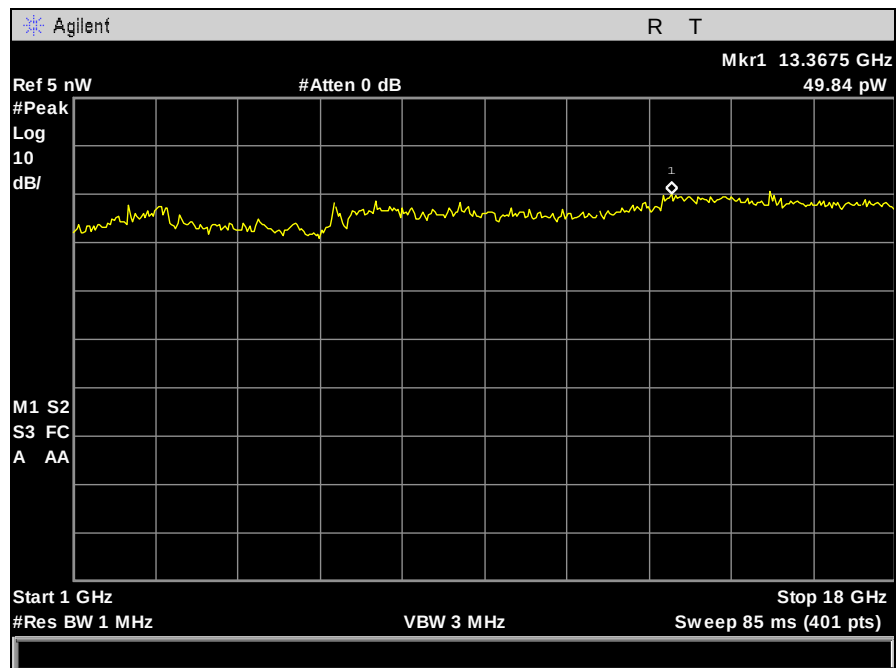

Plot 311. Receiver Spurious Emission, 1 GHz – 18 GHz, Port 3

V. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

Asset	Equipment	Manufacturer	Model	Calibration Date	Calibration Due Date
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	4/14/2010	4/14/2013
1S2482	5 METER CHAMBER (NSA)	PANASHIELD	5 METER SEMI-ANECHOIC CHAMBER	11/22/2011	5/22/2013
1S2583	SPECTRUM ANALYZER	AGILENT/HP	E4447A	3/27/2012	9/27/2013
1S2460	1-26GHZ SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	7/27/2012	1/27/2014
1S2202	HORN ANTENNA (1 METER)	EMCO	3116	4/23/2010	4/23/2013
1S2523	PREAMPLIFIER	AGILENT TECHNOLOGIES	8449B	SEE NOTE	
1S2603	DOUBLE RIDGED WAVEGUIDE HORN	ETS-LINDGREN	3117	4/15/2011	4/15/2013
1S2729	SONOMA AMPLIFIER	SONOMA INSTRUMENT	310N	4/18/2012	10/18/2013
1S2229	TEMPERATURE CHAMBER	TENNY ENGINEERING	T63C	2/18/2012	8/18/2013
NA	HIGH PASS FILTER	MICRO-TRONICS	HPM13147	SEE NOTE	

Table 33. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



VI. Certification & User's Manual Information



Certification & User's Manual Information

L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

VII. Appendix

