



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

January 13, 2015

Meru Networks, Inc.
894 Ross Dr.
Sunnyvale, CA 94089

Dear Rajendran Chary,

Enclosed is the EMC Wireless test report for compliance testing of the Meru Networks, Inc., Mission Peak (AP822iV2 & XP8i) as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15, Subpart B for Unintentional Radiators and Part 15.407 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\\Meru Networks, Inc.\EMC84391-FCC407 UNII 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

**Meru Networks, Inc.
Model Mission Peak (AP822iV2 & XP8i)**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B
for Class B Digital Devices
&
FCC Part 15.407 for Intentional Radiators

MET Report: EMC84391-FCC407 UNII 3

January 13, 2015

Prepared For:

**Meru Networks, Inc.
894 Ross Dr.
Sunnyvale, CA 94089**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

Meru Networks, Inc.
Model Mission Peak (AP822iV2 & XP8i)

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B
for Class B Digital Devices
&
FCC Part 15.407 for Intentional Radiators



Andy Shen, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	January 13, 2015	Initial Issue.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	7
	F. Support Equipment	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation	8
	J. Modifications	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	9
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emissions Limits.....	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	20
	§ 15.203 Antenna Requirement	21
	§ 15.207 Conducted Emissions Limits	22
	§ 15.403(c) 26dB Bandwidth.....	27
	§ 15.407(a)(3) RF Power Output	35
	§ 15.407(a)(3) Peak Power Spectral Density	36
	§ 15.407(b) Undesirable Emissions	37
	Co-location	62
	§ 15.407(f) RF Exposure	117
	§ 15.407(g) Frequency Stability	118
V.	Test Equipment	123
VI.	Certification & User’s Manual Information.....	125
	A. Certification Information	126
	B. Label and User’s Manual Information	130

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	5
Table 4. Equipment Configuration	7
Table 5. Support Equipment.....	7
Table 6. Antenna List	7
Table 7. Ports and Cabling Information	7
Table 8. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b).....	10
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE	11
Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE	12
Table 11. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC/DC.....	13
Table 12. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC/DC	14
Table 13. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 14. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, PoE	16
Table 15. Radiated Emissions Limits, Test Results, 1 GHz – 2 GHz, PoE.....	17
Table 16. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, AC/DC.....	18
Table 17. Radiated Emissions Limits, Test Results, 1 GHz – 2 GHz, AC/DC	19
Table 18. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	22
Table 19. Conducted Emissions - Voltage, AC Power, 15.207(a), Phase Line (120 VAC, 60 Hz), PoE.....	23
Table 20. Conducted Emissions - Voltage, AC Power, 15.207(a), Neutral Line (120 VAC, 60 Hz), PoE	24
Table 21. Conducted Emissions - Voltage, AC Power, 15.207(a), Phase Line (120 VAC, 60 Hz), AC/DC	25
Table 22. Conducted Emissions - Voltage, AC Power, 15.207(a), Neutral Line (120 VAC, 60 Hz), AC/DC.....	26
Table 23. RF Output Power, Test Results	35
Table 24. Peak Spectral Density, Test Results	36
Table 25. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 1 GHz – 7 GHz, Average	42
Table 26. Test Equipment List	124

List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
Figure 2. Occupied Bandwidth, Test Setup	27
Figure 3. Power Output Test Setup	35
Figure 4. Power Spectral Density Test Setup	36

List of Plots

Plot 1. Conducted Emissions, Phase Line, PoE.....	11
Plot 2. Conducted Emissions, Neutral Line, PoE.....	12
Plot 3. Conducted Emissions, Phase Line, AC/DC.....	13
Plot 4. Conducted Emissions, Neutral Line, AC/DC.....	14
Plot 5. Radiated Emissions, 30 MHz – 1 GHz, PoE.....	16
Plot 6. Radiated Emissions, 1 GHz – 2 GHz, PoE.....	17
Plot 7. Radiated Emissions, 30 MHz – 1 GHz, AC/DC.....	18
Plot 8. Radiated Emissions, 1 GHz – 2 GHz, AC/DC.....	19
Plot 9. Conducted Emissions, 15.207(a), Phase Line, PoE.....	23
Plot 10. Conducted Emissions, 15.207(a), Neutral Line, PoE.....	24
Plot 11. Conducted Emissions, 15.207(a), Phase Line, AC/DC.....	25
Plot 12. Conducted Emissions, 15.207(a), Neutral Line, AC/DC.....	26
Plot 13. 26 dB Occupied Bandwidth, 802.11a, 5745 MHz.....	28
Plot 14. 26 dB Occupied Bandwidth, 802.11a, 7577 MHz.....	28
Plot 15. 26 dB Occupied Bandwidth, 802.11a, 5785 MHz.....	28
Plot 16. 26 dB Occupied Bandwidth, 802.11a, 5795 MHz.....	29
Plot 17. 26 dB Occupied Bandwidth, 802.11a, 5825 MHz.....	29
Plot 18. 26 dB Occupied Bandwidth, 802.11n, 5745 MHz, Port 1.....	30
Plot 19. 26 dB Occupied Bandwidth, 802.11n, 7577 MHz, Port 1.....	30
Plot 20. 26 dB Occupied Bandwidth, 802.11n, 5785 MHz, Port 1.....	30
Plot 21. 26 dB Occupied Bandwidth, 802.11n, 5795 MHz, Port 1.....	31
Plot 22. 26 dB Occupied Bandwidth, 802.11n, 5825 MHz, Port 1.....	31
Plot 23. 26 dB Occupied Bandwidth, 802.11n, 5745 MHz, Port 2.....	32
Plot 24. 26 dB Occupied Bandwidth, 802.11n, 7577 MHz, Port 2.....	32
Plot 25. 26 dB Occupied Bandwidth, 802.11n, 5785 MHz, Port 2.....	32
Plot 26. 26 dB Occupied Bandwidth, 802.11n, 5795 MHz, Port 2.....	33
Plot 27. 26 dB Occupied Bandwidth, 802.11n, 5825 MHz, Port 2.....	33
Plot 28. 26 dB Occupied Bandwidth, 802.11ac, 5775 MHz, Port 1.....	34
Plot 29. 26 dB Occupied Bandwidth, 802.11ac, 7777 MHz, Port 1.....	34
Plot 30. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 30 MHz – 1 GHz.....	38
Plot 31. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 1 GHz – 7 GHz, Average.....	38
Plot 32. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak.....	38
Plot 33. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 7 GHz – 18 GHz.....	39
Plot 34. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 30 MHz – 1 GHz.....	39
Plot 35. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 1 GHz – 7 GHz, Average.....	39
Plot 36. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak.....	40
Plot 37. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 7 GHz – 18 GHz.....	40
Plot 38. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 30 MHz – 1 GHz.....	40
Plot 39. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average.....	41
Plot 40. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak.....	41
Plot 41. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 7 GHz – 18 GHz.....	41
Plot 42. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 30 MHz – 1 GHz.....	42
Plot 43. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 1 GHz – 7 GHz, Peak.....	42
Plot 44. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 7 GHz – 18 GHz.....	43
Plot 45. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 30 MHz – 1 GHz.....	43
Plot 46. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 1 GHz – 7 GHz, Average.....	43
Plot 47. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 1 GHz – 7 GHz, Peak.....	44
Plot 48. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 7 GHz – 18 GHz, Peak.....	44
Plot 49. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz.....	45
Plot 50. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average.....	45
Plot 51. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak.....	45

Plot 52. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz	46
Plot 53. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz.....	46
Plot 54. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average	46
Plot 55. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak.....	47
Plot 56. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz	47
Plot 57. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz	47
Plot 58. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average.....	48
Plot 59. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak	48
Plot 60. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz	48
Plot 61. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz	49
Plot 62. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average	49
Plot 63. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak	49
Plot 64. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz.....	50
Plot 65. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz	50
Plot 66. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average	50
Plot 67. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak	51
Plot 68. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, Peak	51
Plot 69. Radiated Spurious Emissions, 802.11ac 80 MHz, 30 MHz – 1 GHz.....	52
Plot 70. Radiated Spurious Emissions, 802.11ac 80 MHz, 1 GHz – 7 GHz, Average	52
Plot 71. Radiated Spurious Emissions, 802.11ac 80 MHz, 1 GHz – 7 GHz, Peak.....	52
Plot 72. Radiated Spurious Emissions, 802.11ac 80 MHz, 7 GHz – 18 GHz	53
Plot 73. Radiated Band Edge, 802.11a, Low Channel (5715 & 5725 MHz), Average	54
Plot 74. Radiated Band Edge, 802.11a, Low Channel (5715 & 5725 MHz), Peak	54
Plot 75. Radiated Band Edge, 802.11a, High Channel (5825 & 5835 MHz), Average.....	55
Plot 76. Radiated Band Edge, 802.11a, High Channel (5825 & 5835 MHz), Peak	55
Plot 77. Radiated Band Edge, 802.11n 20 MHz, Low Channel (5715 & 5725 MHz), Average	56
Plot 78. Radiated Band Edge, 802.11n 20 MHz, Low Channel (5715 & 5725 MHz), Peak	56
Plot 79. Radiated Band Edge, 802.11n 20 MHz, High Channel (5825 & 5835 MHz), Average	57
Plot 80. Radiated Band Edge, 802.11n 20 MHz, High Channel (5825 & 5835 MHz), Peak	57
Plot 81. Radiated Band Edge, 802.11n 40 MHz, Low Channel (5715 & 5725 MHz), Average	58
Plot 82. Radiated Band Edge, 802.11n 40 MHz, Low Channel (5715 & 5725 MHz), Peak	58
Plot 83. Radiated Band Edge, 802.11n 40 MHz, High Channel (5832 & 5835 MHz), Average	59
Plot 84. Radiated Band Edge, 802.11n 40 MHz, High Channel (5832 & 5835 MHz), Peak	59
Plot 85. Radiated Band Edge, 802.11n 80 MHz (5715 & 5725 MHz), Average.....	60
Plot 86. Radiated Band Edge, 802.11n 80 MHz (5715 & 5725 MHz), Peak	60
Plot 87. Radiated Band Edge, 802.11n 80 MHz (5832 & 5835 MHz), Average.....	61
Plot 88. Radiated Band Edge, 802.11n 80 MHz (5832 & 5835 MHz), Peak	61
Plot 89. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 30 MHz – 1 GHz, Peak, Omni.....	63
Plot 90. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 1 GHz – 7 GHz, Avg., Omni	63
Plot 91. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 1 GHz – 7 GHz, Peak, Omni	63
Plot 92. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 7 GHz – 18 GHz, Peak, Omni	64
Plot 93. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 30 MHz – 1 GHz, Peak, Omni.....	64
Plot 94. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 1 GHz – 7 GHz, Avg., Omni	64
Plot 95. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 1 GHz – 7 GHz, Peak, Omni	65
Plot 96. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 7 GHz – 18 GHz, Peak, Omni	65
Plot 97. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 30 MHz – 1 GHz, Peak, Omni.....	65
Plot 98. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 1 GHz – 7 GHz, Avg., Omni	66
Plot 99. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 1 GHz – 7 GHz, Peak, Omni	66
Plot 100. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 7 GHz – 18 GHz, Peak, Omni	66
Plot 101. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 30 MHz – 1 GHz, Peak, Omni.....	67
Plot 102. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 1 GHz – 7 GHz, Avg., Omni	67
Plot 103. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 1 GHz – 7 GHz, Peak, Omni	67
Plot 104. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 7 GHz – 18 GHz, Peak, Omni	68
Plot 105. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 30 MHz – 1 GHz, Peak, Omni.....	68
Plot 106. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 1 GHz – 7 GHz, Avg., Omni	68
Plot 107. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 1 GHz – 7 GHz, Peak, Omni	69

Plot 108. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 7 GHz – 18 GHz, Peak, Omni	69
Plot 109. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 30 MHz – 1 GHz, Peak, Omni	69
Plot 110. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 1 GHz – 7 GHz, Avg., Omni	70
Plot 111. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 1 GHz – 7 GHz, Peak, Omni	70
Plot 112. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 7 GHz – 18 GHz, Peak, Omni	70
Plot 113. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni	71
Plot 114. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni	71
Plot 115. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni	71
Plot 116. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni	72
Plot 117. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni	72
Plot 118. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni	72
Plot 119. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni	73
Plot 120. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni	73
Plot 121. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni	73
Plot 122. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni	74
Plot 123. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni	74
Plot 124. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni	74
Plot 125. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	75
Plot 126. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	75
Plot 127. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	75
Plot 128. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	76
Plot 129. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni	76
Plot 130. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni	76
Plot 131. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni	77
Plot 132. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni	77
Plot 133. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni	77
Plot 134. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni	78
Plot 135. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni	78
Plot 136. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni	78
Plot 137. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni	79
Plot 138. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni	79
Plot 139. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni	79
Plot 140. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni	80
Plot 141. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	80
Plot 142. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	80
Plot 143. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	81
Plot 144. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	81
Plot 145. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni	81
Plot 146. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni	82
Plot 147. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni	82
Plot 148. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni	82
Plot 149. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni	83
Plot 150. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni	83
Plot 151. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni	83
Plot 152. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni	84
Plot 153. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni	84
Plot 154. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni	84
Plot 155. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni	85
Plot 156. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni	85
Plot 157. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	85
Plot 158. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	86
Plot 159. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	86
Plot 160. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	86
Plot 161. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni	87
Plot 162. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni	87
Plot 163. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni	87

Plot 164. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni	88
Plot 165. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni	88
Plot 166. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni	88
Plot 167. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni	89
Plot 168. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni	89
Plot 169. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni	89
Plot 170. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni	90
Plot 171. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni	90
Plot 172. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni	90
Plot 173. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	91
Plot 174. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	91
Plot 175. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	91
Plot 176. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	92
Plot 177. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni	92
Plot 178. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni	92
Plot 179. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni	93
Plot 180. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni	93
Plot 181. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni	93
Plot 182. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni	94
Plot 183. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni	94
Plot 184. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni	94
Plot 185. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	95
Plot 186. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	95
Plot 187. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	95
Plot 188. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	96
Plot 189. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni	96
Plot 190. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni	96
Plot 191. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni	97
Plot 192. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni	97
Plot 193. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	97
Plot 194. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	98
Plot 195. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	98
Plot 196. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	98
Plot 197. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni	99
Plot 198. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni	99
Plot 199. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni	99
Plot 200. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni	100
Plot 201. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Patch	101
Plot 202. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Patch	101
Plot 203. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Patch	101
Plot 204. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Patch	102
Plot 205. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Patch	102
Plot 206. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Patch	102
Plot 207. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Patch	103
Plot 208. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Patch	103
Plot 209. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Patch	103
Plot 210. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Patch	104
Plot 211. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Patch	104
Plot 212. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Patch	104
Plot 213. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Patch	105
Plot 214. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Patch	105
Plot 215. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Patch	105
Plot 216. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Patch	106
Plot 217. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Patch	106
Plot 218. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Patch	106
Plot 219. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Patch	107

Plot 220. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Patch.....	107
Plot 221. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Patch.....	107
Plot 222. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Patch	108
Plot 223. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Patch.....	108
Plot 224. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Patch.....	108
Plot 225. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Patch.....	109
Plot 226. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Patch	109
Plot 227. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Patch.....	109
Plot 228. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Patch.....	110
Plot 229. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Patch.....	110
Plot 230. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Patch	110
Plot 231. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Patch.....	111
Plot 232. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Patch.....	111
Plot 233. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Patch.....	111
Plot 234. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Patch	112
Plot 235. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Patch.....	112
Plot 236. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Patch.....	112
Plot 237. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Patch.....	113
Plot 238. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Patch	113
Plot 239. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Patch.....	113
Plot 240. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Patch.....	114
Plot 241. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Patch.....	114
Plot 242. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Patch	114
Plot 243. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Patch.....	115
Plot 244. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Patch.....	115
Plot 245. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Patch.....	115
Plot 246. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Patch	116
Plot 247. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Patch.....	116
Plot 248. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Patch.....	116
Plot 249. Frequency Stability, 5725 – 5825 MHz, -40°C, 120 V	119
Plot 250. Frequency Stability, 5725 – 5825 MHz, -30°C, 120 V	119
Plot 251. Frequency Stability, 5725 – 5825 MHz, -20°C, 120 V	119
Plot 252. Frequency Stability, 5725 – 5825 MHz, -10°C, 120 V	120
Plot 253. Frequency Stability, 5725 – 5825 MHz, 0°C, 120 V	120
Plot 254. Frequency Stability, 5725 – 5825 MHz, 10°C, 120 V	120
Plot 255. Frequency Stability, 5725 – 5825 MHz, 20°C, 120 V	121
Plot 256. Frequency Stability, 5725 – 5825 MHz, 30°C, 120 V	121
Plot 257. Frequency Stability, 5725 – 5825 MHz, 40°C, 120 V	121
Plot 258. Frequency Stability, 5725 – 5825 MHz, 50°C, 120 V	122
Plot 259. Frequency Stability, 5725 – 5825 MHz, 55°C, 120 V	122

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Meru Networks, Inc. Mission Peak (AP822iV2 & XP8i), with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Mission Peak (AP822iV2 & XP8i). Meru Networks, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Mission Peak (AP822iV2 & XP8i), has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Meru Networks, Inc., purchase order number 107001. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Description	Results
§15.107	Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§15.207	AC Conducted Emissions 150KHz – 30MHz	Compliant
§15.403 (i)	26dB Occupied Bandwidth	Compliant
§15.407 (a)(3)	Conducted Transmitter Output Power	Compliant
§15.407 (a)(3)	Power Spectral Density	Compliant
§15.407 (b)(2), (3), (5), (6)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Compliant
§15.407(f)	RF Exposure	Compliant
§15.407(g)	Frequency Stability	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Meru Networks, Inc. to perform testing on the Mission Peak (AP822iV2 & XP8i), under Meru Networks, Inc.'s purchase order number 107001.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Meru Networks, Inc. Mission Peak (AP822iV2 & XP8i).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Mission Peak (AP822iV2)	
Model(s) Covered:	Mission Peak (AP822iV2 & XP8i)	
EUT Specifications:	Primary Power: 120 VAC, 60 Hz	
	FCC ID: RE7-AP822IV2	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Peak RF Output Power:	24.92 dBm
	EUT Frequency Ranges:	5745-5825MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Andy Shen	
Report Date(s):	January 13, 2015	

Table 2. EUT Summary

B. References

CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Meru Networks, Inc. Mission Peak (AP822iV2 & XP8i), Equipment Under Test (EUT), is an 802.11AC wireless access point (WAP) that allows wireless devices to connect to a wired network using Wi-Fi, standard. The WAP usually connects to a router (via a wired network), and can relay data between the wireless devices (such as computers or printers) and wired devices on the network. The EUT supports 2.4 GHz and 5 GHz operation.

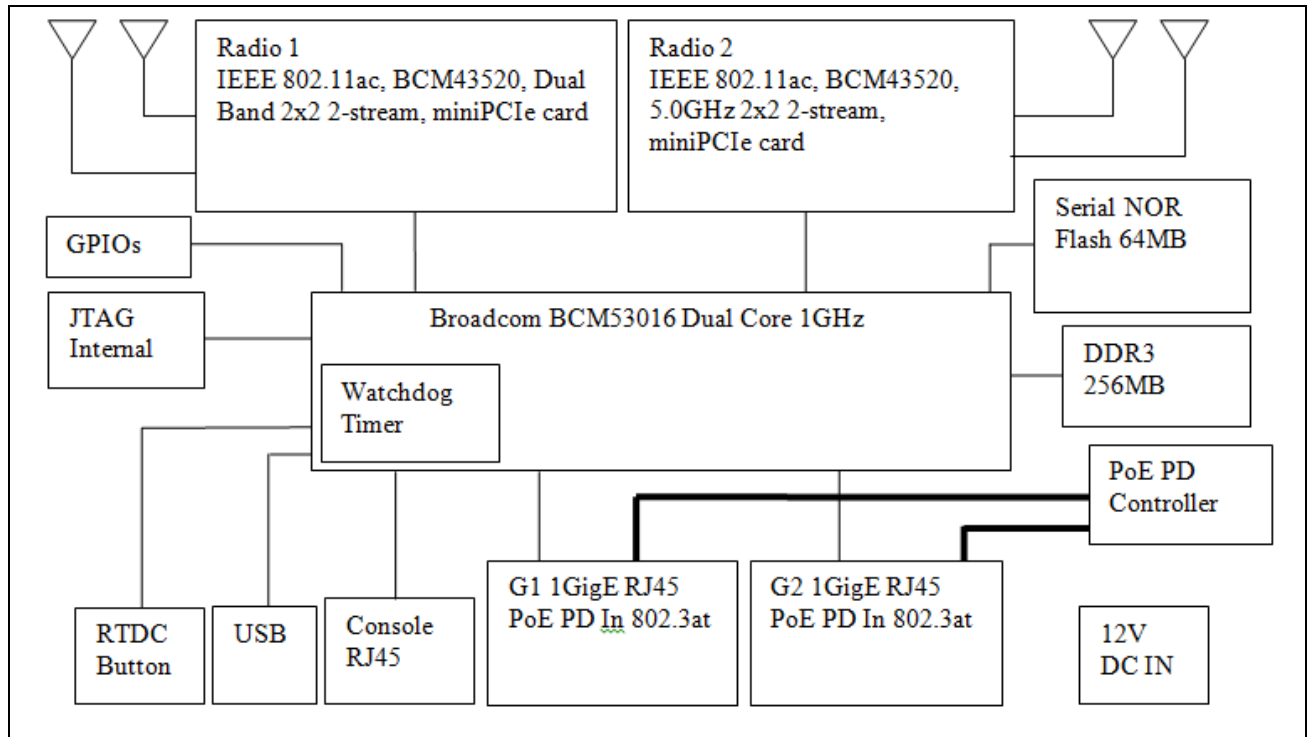


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number	Rev. #
1	Dual Radio Access Point	AP822iV2	2614B822I16DBBE	Rev 1
2	Dual Radio Access Point	AP822iV2	2614B822i16DBC4	Rev 1

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
1	PoE	Power Design	PD-9001GR/AC
2	Labtop	IBM	IBM Thinkpad

Table 5. Support Equipment

Meru Part Number	Description	Gain
MERU-ANT-P1446	Internal PCB antenna	3 dBi at 2.4 GHz and 4 dBi at 5 GHz

Table 6. Antenna List

G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	Reset Console	dB9 Serial cable	1	1	--	Yes	To computer serial port or USB to Serial adapter
2	G1PoE	Data and Power Ethernet port	1	2	10	YES	To PoE injector or Ethernet switch
3	G2PoE	Data and Power Ethernet port	1	2	10	Yes	To PoE injector or Ethernet switch
4	12 DC	12 DV Audio jack	1	1	10	Yes	To DC adapter
5	A1, A3, A4 and A6	RPSMA to SMA co-axial cable	4	0.5	1	Yes	To power meter or spectrum Analyzer

Table 7. Ports and Cabling Information

H. Mode of Operation

During the normal operation the configuration is controlled by the Meru controller which sets the country code, ESSID, Operating frequency band and Channel etc.

I. Method of Monitoring EUT Operation

During the normal operation with controller Green or Blue LED indication on the Access point indicate the normal operation of the Access point. A Red LED indicates a failure of hardware or software settings.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Meru Networks, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 8. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 8. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

Table 8. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50 Ω /50 μ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were re-measured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Danny Alvendia

Test Date(s): 07/28/14

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 Meru PoE Rad_Off 120V L	0.16	46.7	65.465	-18.765	Pass	35.04	55.465	-20.425	Pass
42577 Meru PoE Rad_Off 120V L	0.2	46.06	63.617	-17.557	Pass	28	53.617	-25.617	Pass
42577 Meru PoE Rad_Off 120V L	0.43	45.58	57.277	-11.697	Pass	36.36	47.277	-10.917	Pass
42577 Meru PoE Rad_Off 120V L	0.45	45.59	56.9	-11.31	Pass	37.01	46.9	-9.89	Pass
42577 Meru PoE Rad_Off 120V L	23.83	46.66	60	-13.34	Pass	30.59	50	-19.41	Pass
42577 Meru PoE Rad_Off 120V L	29.93	48.46	60	-11.54	Pass	32.52	50	-17.48	Pass

Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE



Plot 1. Conducted Emissions, Phase Line, PoE

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 Meru PoE Rad_Off 120V N	0.17	45.12	64.963	-19.843	Pass	29.37	54.963	-25.593	Pass
42577 Meru PoE Rad_Off 120V N	0.44	44.77	57.086	-12.316	Pass	32.92	47.086	-14.166	Pass
42577 Meru PoE Rad_Off 120V N	16.32	46.51	60	-13.49	Pass	29.57	50	-20.43	Pass
42577 Meru PoE Rad_Off 120V N	22.04	46.42	60	-13.58	Pass	27.54	50	-22.46	Pass
42577 Meru PoE Rad_Off 120V N	23.08	45.81	60	-14.19	Pass	29.23	50	-20.77	Pass
42577 Meru PoE Rad_Off 120V N	29.885	47.63	60	-12.37	Pass	32.59	50	-17.41	Pass

Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE




Plot 2. Conducted Emissions, Neutral Line, PoE

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC/DC

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 CEV ACDC RadOff L	0.195	57.81	63.827	-6.017	Pass	40.17	53.827	-13.657	Pass
42577 CEV ACDC RadOff L	0.255	51.09	61.605	-10.515	Pass	33.29	51.605	-18.315	Pass
42577 CEV ACDC RadOff L	0.315	42.22	59.854	-17.634	Pass	20.77	49.854	-29.084	Pass
42577 CEV ACDC RadOff L	0.445	40.87	56.993	-16.123	Pass	22.88	46.993	-24.113	Pass
42577 CEV ACDC RadOff L	14.47	46.73	60	-13.27	Pass	37.42	50	-12.58	Pass
42577 CEV ACDC RadOff L	15.785	46.88	60	-13.12	Pass	39.03	50	-10.97	Pass

Table 11. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC/DC

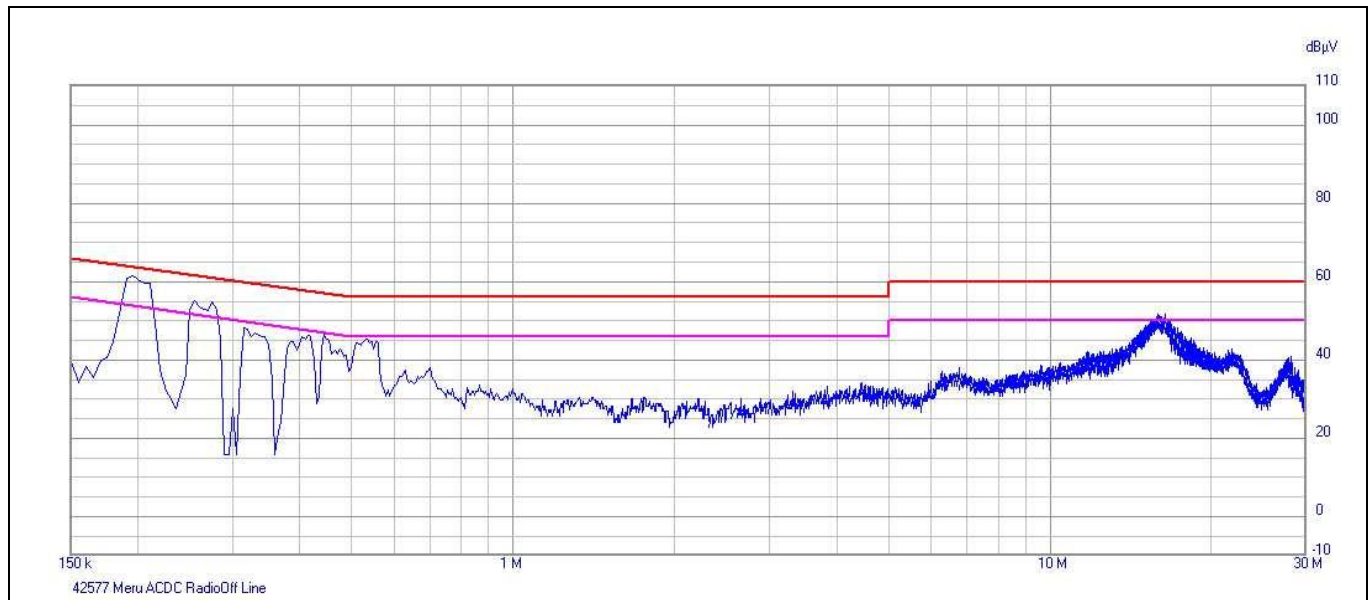

Plot 3. Conducted Emissions, Phase Line, AC/DC

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC/DC

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 CEV ACDC RadOff N	0.205	56.12	63.413	-7.293	Pass	33.83	53.413	-19.583	Pass
42577 CEV ACDC RadOff N	0.26	50	61.444	-11.444	Pass	23.09	51.444	-28.354	Pass
42577 CEV ACDC RadOff N	0.27	49.45	61.131	-11.681	Pass	23.09	51.131	-28.041	Pass
42577 CEV ACDC RadOff N	0.32	40.09	59.724	-19.634	Pass	23.6	49.724	-26.124	Pass
42577 CEV ACDC RadOff N	0.46	35.09	56.712	-21.622	Pass	25.81	46.712	-20.902	Pass
42577 CEV ACDC RadOff N	16.07	38.45	60	-21.55	Pass	24.43	50	-25.57	Pass

Table 12. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC/DC



Plot 4. Conducted Emissions, Neutral Line, AC/DC

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 13.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 13.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 13. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Andy Shen

Test Date(s): 07/24/14

Radiated Emissions Limits Test Results, Class B, PoE

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dB μ V)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
187	H	79	130.11	9.1	9.52	0	2.43	0	21.05	43.5	-22.45
495.84	V	173	100	5.63	16.935	0	3.999	0	26.564	46	-19.436
500.02	H	267	181.41	5.66	17.01	0	4.017	0	26.687	46	-19.313
800	H	169	115.8	8.67	19.67	0	5.182	0	33.522	46	-12.478
806.78	V	46	100	5.63	19.758	0	5.204	0	30.592	46	-15.408
825.94	V	20	100	1.78	20.177	0	5.267	0	27.224	46	-18.776


Table 14. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, PoE

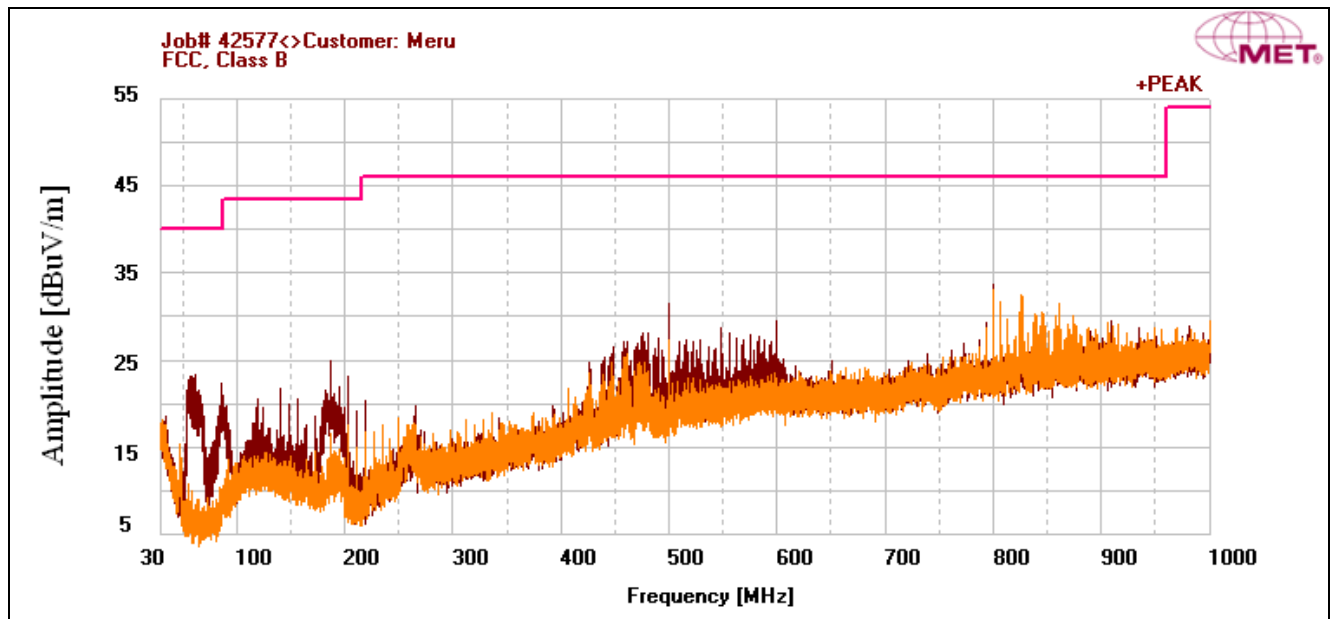

Plot 5. Radiated Emissions, 30 MHz – 1 GHz, PoE

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dB μ V)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1189	H	104	160.23	29.03	28.507	33.471	0	0	24.066	54	-29.934
1282.5	V	133	215.88	29.61	28.722	33.431	0	0	24.901	54	-29.099
1594.367	V	120	114.94	30.2	28.955	33.3	0	0	25.855	54	-28.145
1860	H	17	100	29.14	30.816	33.189	0	0	26.767	54	-27.233
1924	V	73	100	30.44	31.174	33.162	0	0	28.452	54	-25.548
1956	H	0	100	29.79	31.354	33.148	0	0	27.996	54	-26.004

Table 15. Radiated Emissions Limits, Test Results, 1 GHz – 2 GHz, PoE

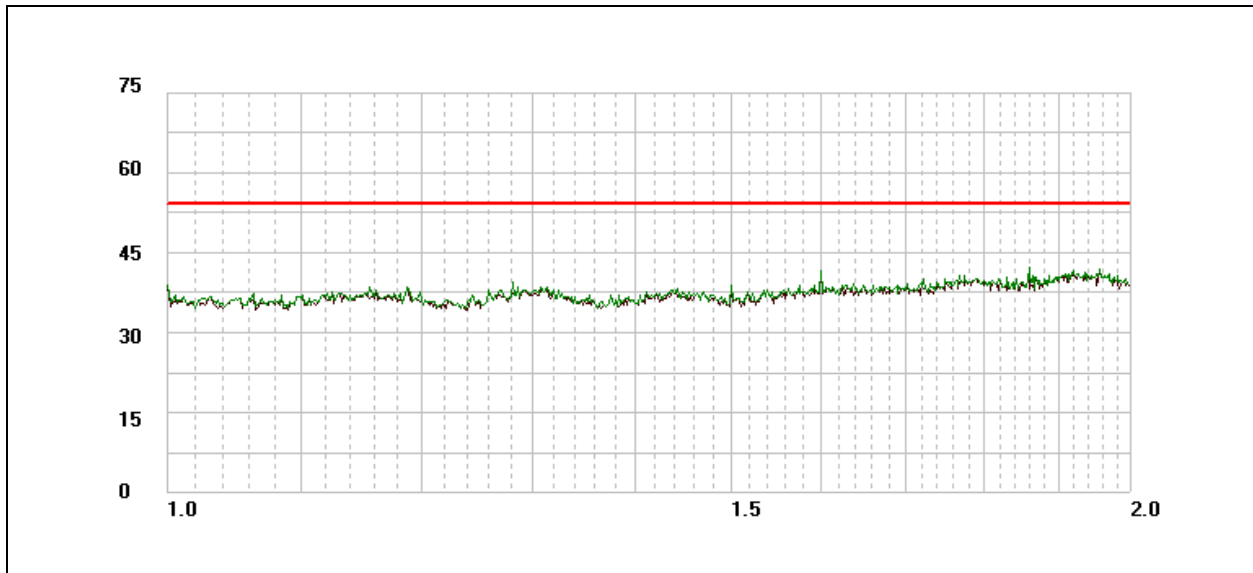


Plot 6. Radiated Emissions, 1 GHz – 2 GHz, PoE

Radiated Emissions Limits Test Results, Class B, AC/DC

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBμV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
71.385	V	151	169.7	13.92	6.801	0	1.477	0	22.198	40	-17.802
131.229	V	283	125.7	13.92	12.479	0	2.021	0	28.42	43.5	-15.08
600.018	V	191	100	1.56	18.82	0	4.486	0	24.866	46	-21.134
793.23	H	269	100.11	5.61	19.792	0	5.156	0	30.558	46	-15.442
800.01	H	264	103.88	9.16	19.67	0	5.182	0	34.012	46	-11.988
806.74	H	270	100.11	3.77	19.758	0	5.204	0	28.732	46	-17.268


Table 16. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, AC/DC

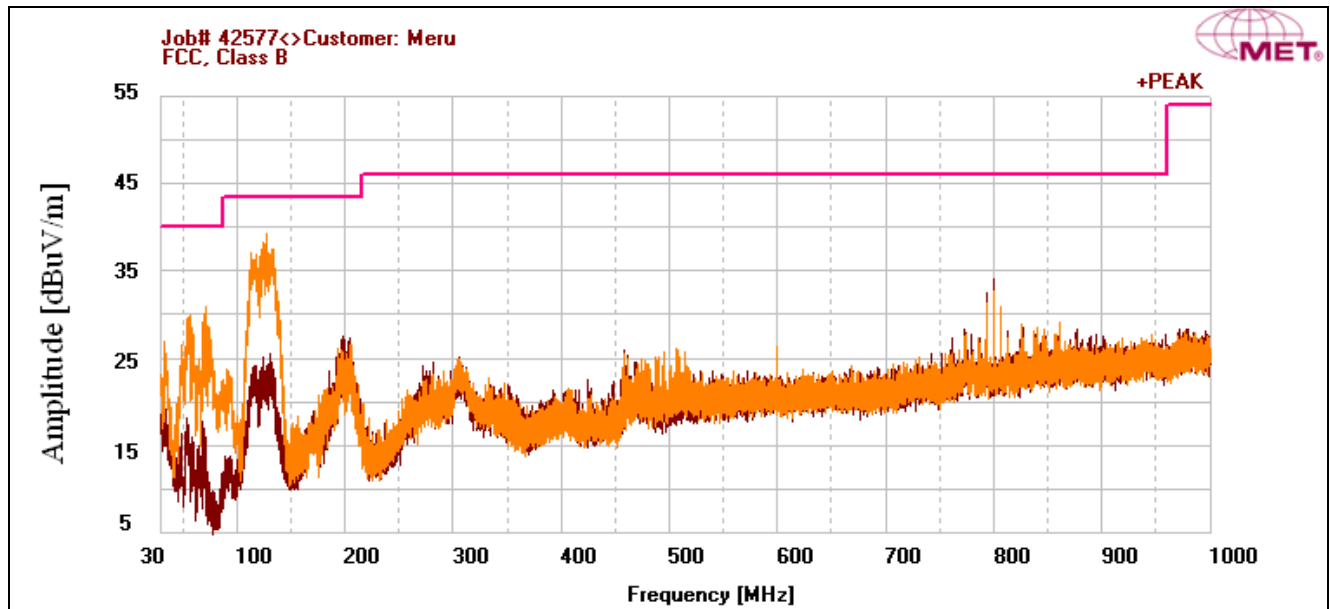

Plot 7. Radiated Emissions, 30 MHz – 1 GHz, AC/DC

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dB μ V)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1062.667	H	0	167.17	45.04	27.901	33.524	0	0	39.417	54	-14.583
1375.133	H	37	130.05	38.25	28.5	33.392	0	0	33.358	54	-20.642
1500.267	H	99	137.52	47.17	28.202	33.34	0	0	42.032	54	-11.968
1625.333	V	154	198.29	46.69	29.203	33.287	0	0	42.606	54	-11.394
1625.333	H	169	128.58	43.51	29.203	33.287	0	0	39.426	54	-14.574
1750.5	V	0	128.11	43.42	30.203	33.235	0	0	40.388	54	-13.612

Table 17. Radiated Emissions Limits, Test Results, 1 GHz – 2 GHz, AC/DC

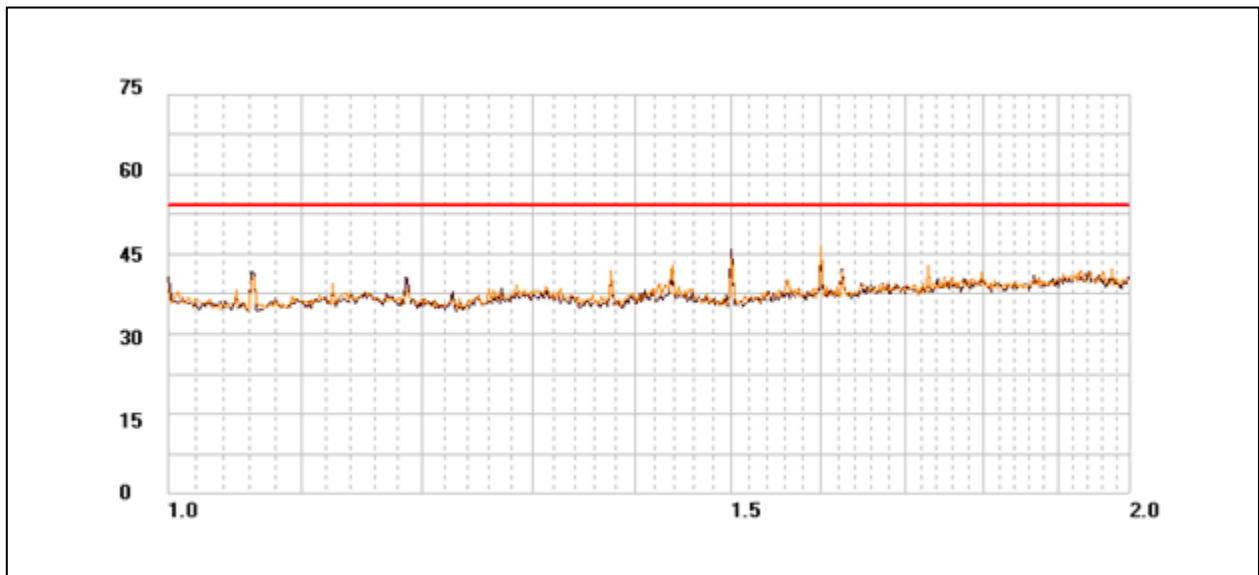

Plot 8. Radiated Emissions, 1 GHz – 2 GHz, AC/DC

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203 because the EUT has permanent antennas.

Test Engineer(s): Andy Shen

Test Date(s): 07/26/14

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 18. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Results: The EUT was compliant with this requirement.

Test Engineer(s): Danny Alvendia

Test Date(s): 07/28/14

Conducted Emissions 15.207(a) - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 Meru PoE Rad_Off 120V L	0.16	46.7	65.465	-18.765	Pass	35.04	55.465	-20.425	Pass
42577 Meru PoE Rad_Off 120V L	0.2	46.06	63.617	-17.557	Pass	28	53.617	-25.617	Pass
42577 Meru PoE Rad_Off 120V L	0.43	45.58	57.277	-11.697	Pass	36.36	47.277	-10.917	Pass
42577 Meru PoE Rad_Off 120V L	0.45	45.59	56.9	-11.31	Pass	37.01	46.9	-9.89	Pass
42577 Meru PoE Rad_Off 120V L	23.83	46.66	60	-13.34	Pass	30.59	50	-19.41	Pass
42577 Meru PoE Rad_Off 120V L	29.93	48.46	60	-11.54	Pass	32.52	50	-17.48	Pass

Table 19. Conducted Emissions - Voltage, AC Power, 15.207(a), Phase Line (120 VAC, 60 Hz), PoE



Plot 9. Conducted Emissions, 15.207(a), Phase Line, PoE

Conducted Emissions 15.207(a) - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 Meru PoE Rad_Off 120V N	0.17	45.12	64.963	-19.843	Pass	29.37	54.963	-25.593	Pass
42577 Meru PoE Rad_Off 120V N	0.44	44.77	57.086	-12.316	Pass	32.92	47.086	-14.166	Pass
42577 Meru PoE Rad_Off 120V N	16.32	46.51	60	-13.49	Pass	29.57	50	-20.43	Pass
42577 Meru PoE Rad_Off 120V N	22.04	46.42	60	-13.58	Pass	27.54	50	-22.46	Pass
42577 Meru PoE Rad_Off 120V N	23.08	45.81	60	-14.19	Pass	29.23	50	-20.77	Pass
42577 Meru PoE Rad_Off 120V N	29.885	47.63	60	-12.37	Pass	32.59	50	-17.41	Pass

Table 20. Conducted Emissions - Voltage, AC Power, 15.207(a), Neutral Line (120 VAC, 60 Hz), PoE




Plot 10. Conducted Emissions, 15.207(a), Neutral Line, PoE

Conducted Emissions 15.207(a) - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), AC/DC

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 CEV ACDC RadOff L	0.195	57.81	63.827	-6.017	Pass	40.17	53.827	-13.657	Pass
42577 CEV ACDC RadOff L	0.255	51.09	61.605	-10.515	Pass	33.29	51.605	-18.315	Pass
42577 CEV ACDC RadOff L	0.315	42.22	59.854	-17.634	Pass	20.77	49.854	-29.084	Pass
42577 CEV ACDC RadOff L	0.445	40.87	56.993	-16.123	Pass	22.88	46.993	-24.113	Pass
42577 CEV ACDC RadOff L	14.47	46.73	60	-13.27	Pass	37.42	50	-12.58	Pass
42577 CEV ACDC RadOff L	15.785	46.88	60	-13.12	Pass	39.03	50	-10.97	Pass

Table 21. Conducted Emissions - Voltage, AC Power, 15.207(a), Phase Line (120 VAC, 60 Hz), AC/DC

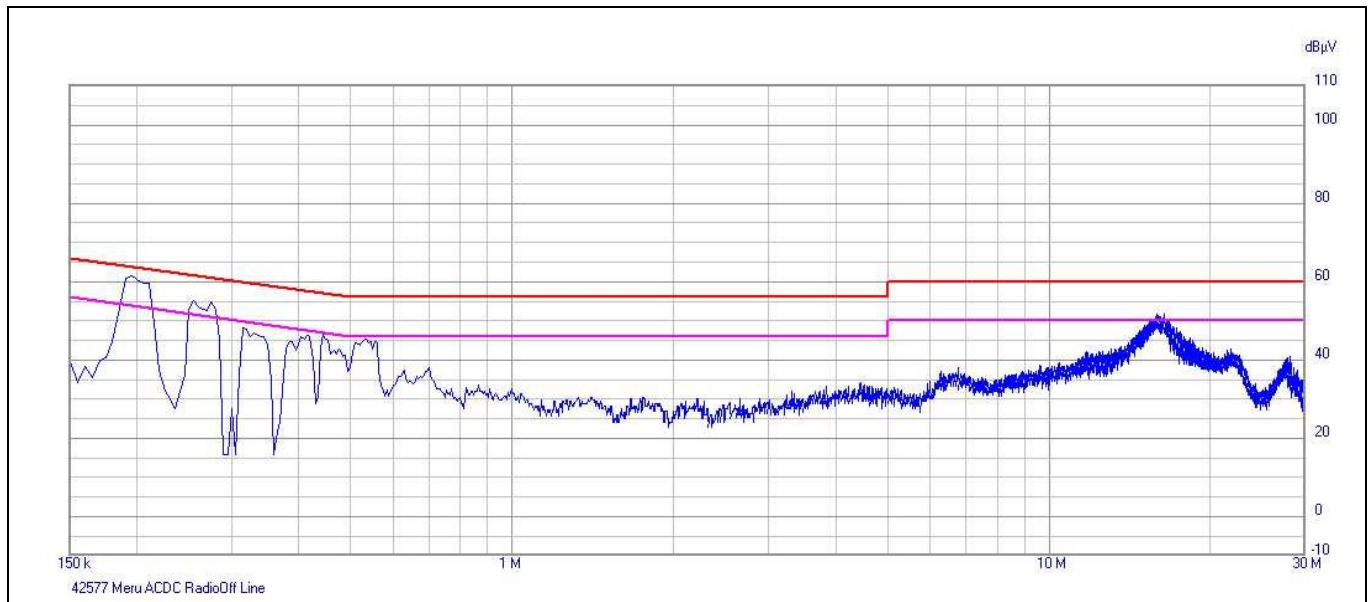

Plot 11. Conducted Emissions, 15.207(a), Phase Line, AC/DC

Conducted Emissions 15.207(a) - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), AC/DC

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
42577 CEV ACDC RadOff N	0.205	56.12	63.413	-7.293	Pass	33.83	53.413	-19.583	Pass
42577 CEV ACDC RadOff N	0.26	50	61.444	-11.444	Pass	23.09	51.444	-28.354	Pass
42577 CEV ACDC RadOff N	0.27	49.45	61.131	-11.681	Pass	23.09	51.131	-28.041	Pass
42577 CEV ACDC RadOff N	0.32	40.09	59.724	-19.634	Pass	23.6	49.724	-26.124	Pass
42577 CEV ACDC RadOff N	0.46	35.09	56.712	-21.622	Pass	25.81	46.712	-20.902	Pass
42577 CEV ACDC RadOff N	16.07	38.45	60	-21.55	Pass	24.43	50	-25.57	Pass

Table 22. Conducted Emissions - Voltage, AC Power, 15.207(a), Neutral Line (120 VAC, 60 Hz), AC/DC



Plot 12. Conducted Emissions, 15.207(a), Neutral Line, AC/DC

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(c) 26dB Bandwidth

Test Requirements: § 15.403 (i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid and high channels at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

Test Results The 26 dB Bandwidth was compliant with the requirements of this section and was determined from the plots on the following pages.

Test Engineer(s): Andy Shen

Test Date(s): 09/05/14






Figure 2. Occupied Bandwidth, Test Setup


26 dB Occupied Bandwidth, 802.11a

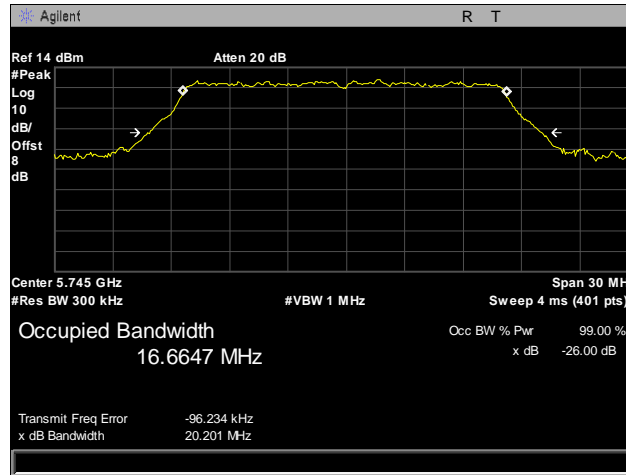


Plot 13. 26 dB Occupied Bandwidth, 802.11a, 5745 MHz

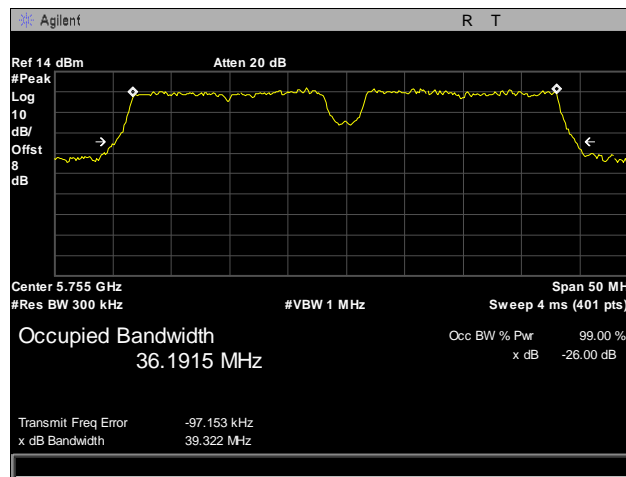


Plot 14. 26 dB Occupied Bandwidth, 802.11a, 7577 MHz

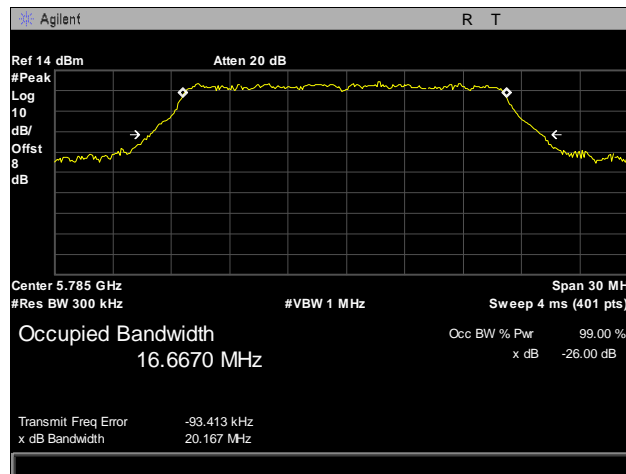

Plot 15. 26 dB Occupied Bandwidth, 802.11a, 5785 MHz

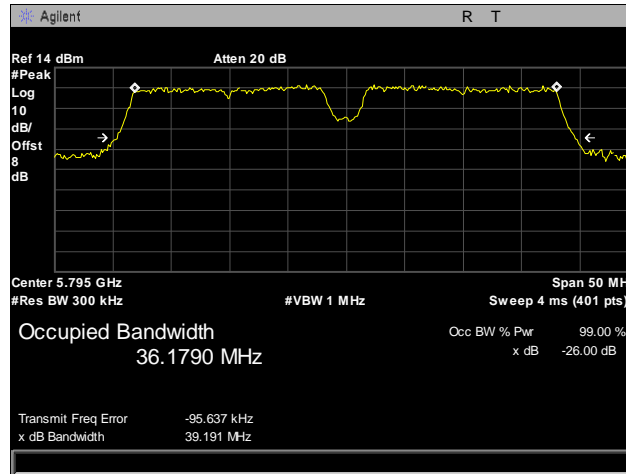


Plot 16. 26 dB Occupied Bandwidth, 802.11a, 5795 MHz

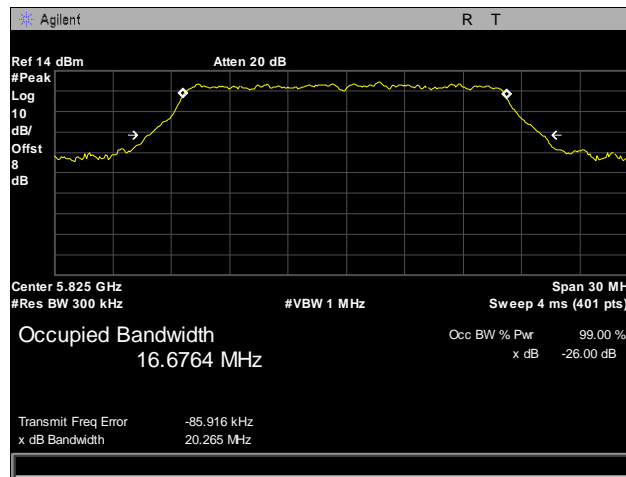


Plot 17. 26 dB Occupied Bandwidth, 802.11a, 5825 MHz


26 dB Occupied Bandwidth, 802.11n, Port 1

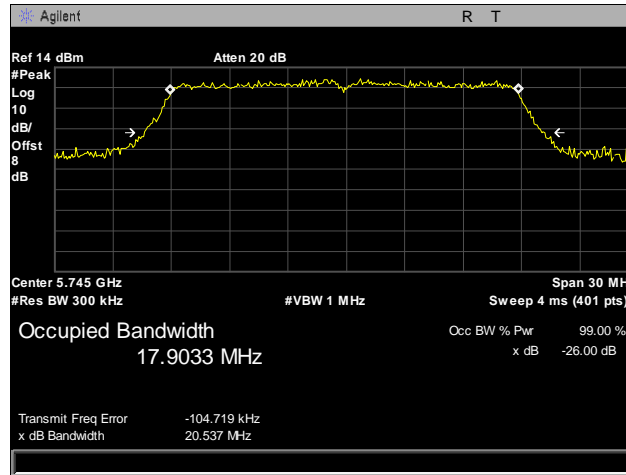


Plot 18. 26 dB Occupied Bandwidth, 802.11n, 5745 MHz, Port 1

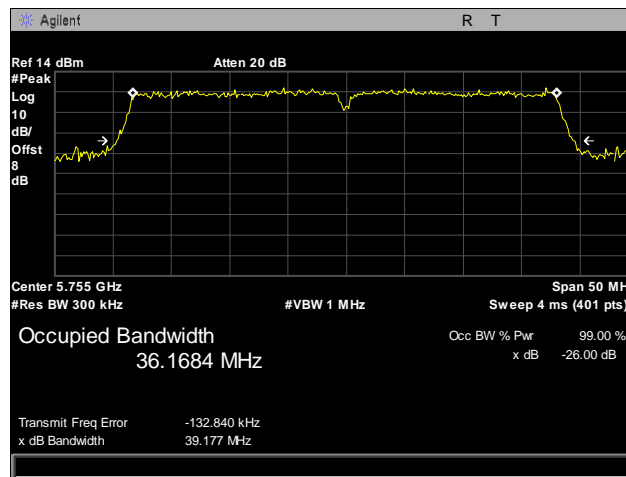


Plot 19. 26 dB Occupied Bandwidth, 802.11n, 7577 MHz, Port 1

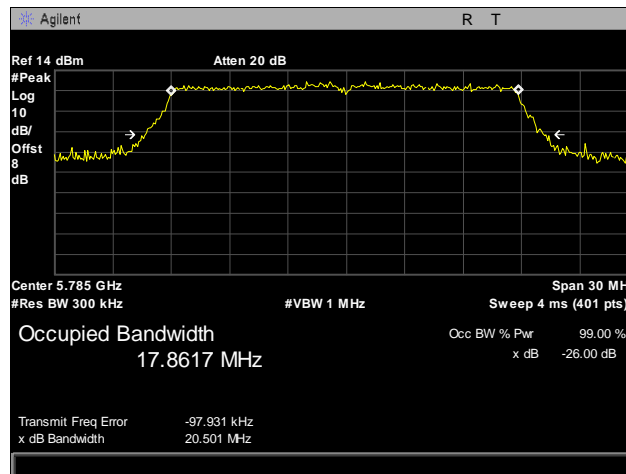

Plot 20. 26 dB Occupied Bandwidth, 802.11n, 5785 MHz, Port 1

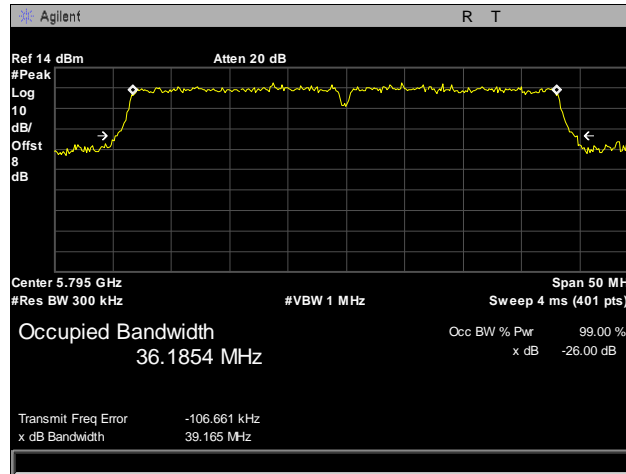


Plot 21. 26 dB Occupied Bandwidth, 802.11n, 5795 MHz, Port 1

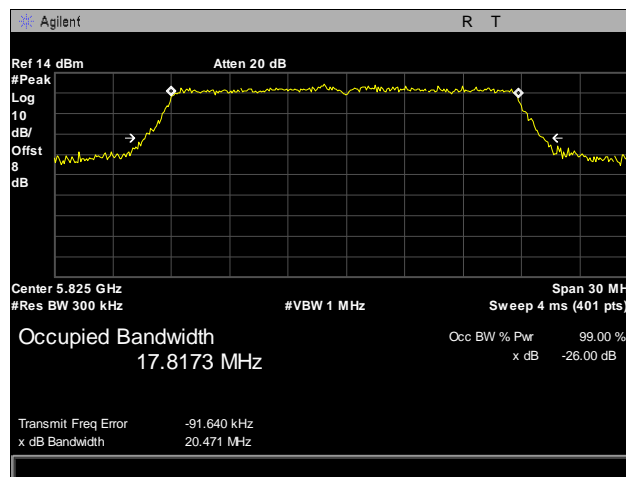


Plot 22. 26 dB Occupied Bandwidth, 802.11n, 5825 MHz, Port 1


26 dB Occupied Bandwidth, 802.11n, Port 2

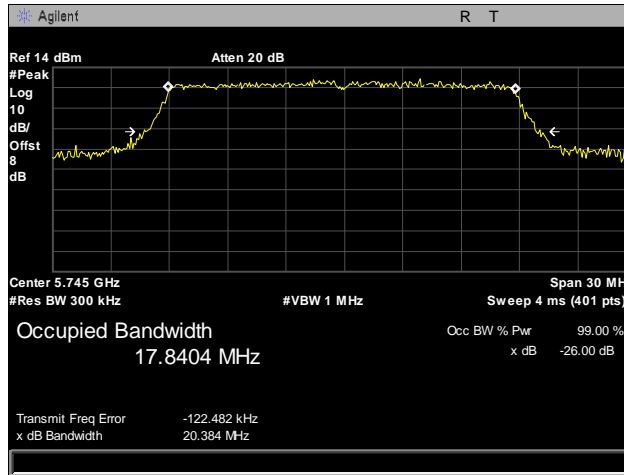


Plot 23. 26 dB Occupied Bandwidth, 802.11n, 5745 MHz, Port 2

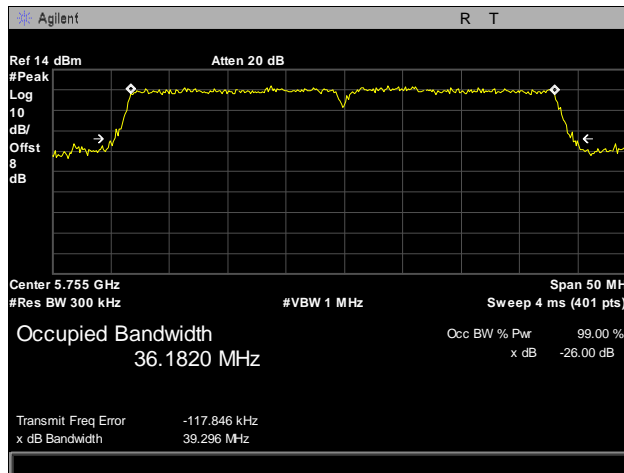


Plot 24. 26 dB Occupied Bandwidth, 802.11n, 7577 MHz, Port 2

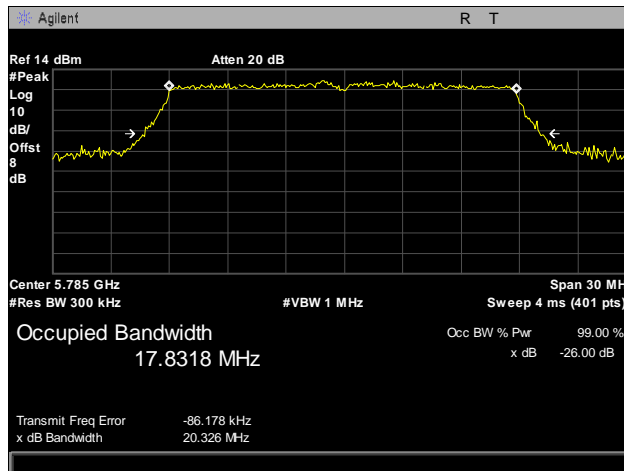

Plot 25. 26 dB Occupied Bandwidth, 802.11n, 5785 MHz, Port 2

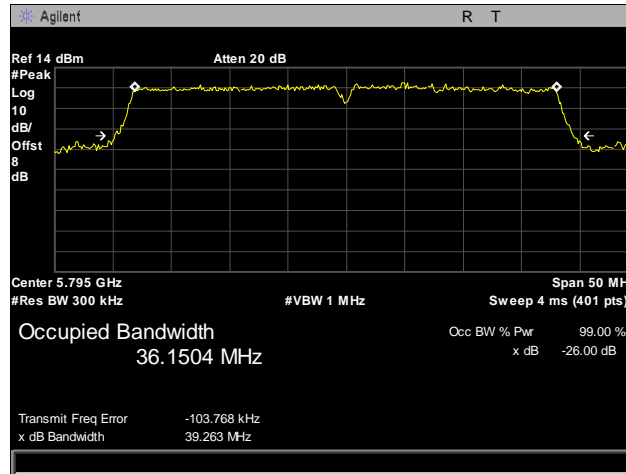


Plot 26. 26 dB Occupied Bandwidth, 802.11n, 5795 MHz, Port 2

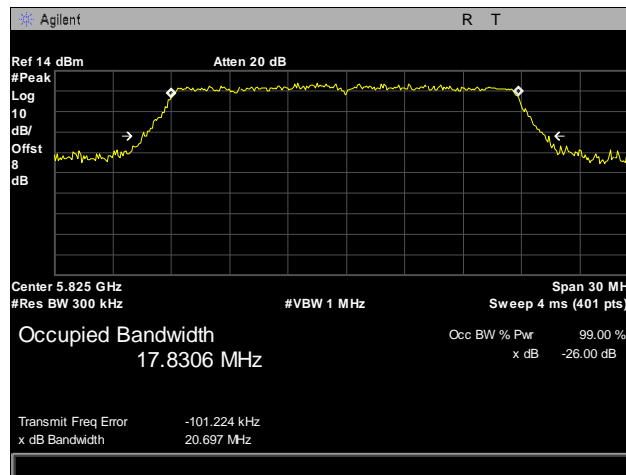


Plot 27. 26 dB Occupied Bandwidth, 802.11n, 5825 MHz, Port 2

26 dB Occupied Bandwidth, 802.11ac

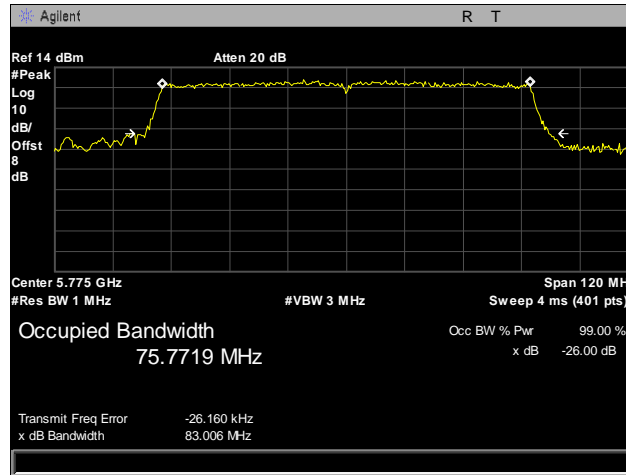

Plot 28. 26 dB Occupied Bandwidth, 802.11ac, 5775 MHz, Port 1

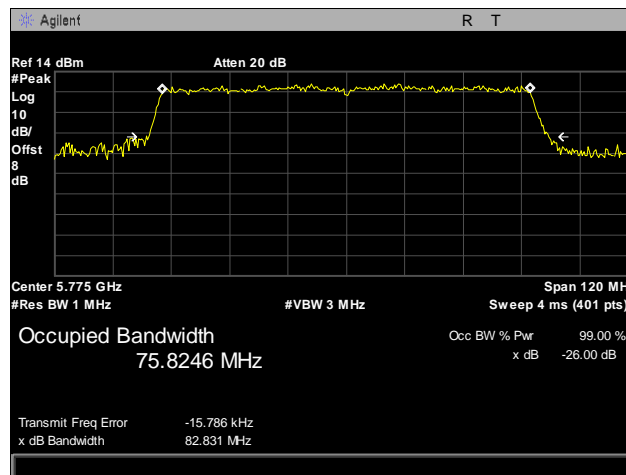

Plot 29. 26 dB Occupied Bandwidth, 802.11ac, 7777 MHz, Port 1

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(a)(3) RF Power Output

Test Requirements: §15.407(a)(3): For the band 5.725–5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Test Procedure: The EUT was connected to a spectrum analyzer through an attenuator and set to transmit continuously on the low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01. Plots were corrected for attenuator and cable loss. EUT will be professionally installed and Meru Networks will lower power accordingly when both radios are operating simultaneously and in the same band.

Test Results: Equipment was compliant with the Peak Power Output limits of § 15.407(a)(3).

Test Engineer(s): Andy Shen

Test Date(s): 09/10/14




Figure 3. Power Output Test Setup

Frequency (MHz)	Mode	Port R1-A Power (dBm)	Port R1-B Power (dBm)	Summed Power (dBm)
5745	802.11a	22.26		22.26
5785	802.11a	22.08		22.08
5825	802.11a	15.54		15.54
5755	802.11a	22.21		22.21
5795	802.11a	16.11		16.11
5745	802.11n	21.57	21.91	24.75
5785	802.11n	22.20	21.59	24.92
5825	802.11n	15.72	15.37	18.56
5755	802.11n	21.96	21.59	24.79
5795	802.11n	15.72	14.37	18.11
5775	802.11ac	15.14	15.23	18.20

Table 23. RF Output Power, Test Results

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(a)(3) Peak Power Spectral Density

Test Requirements: § 15.407(a)(3): In addition, the peak power spectral density shall not exceed 30 dBm in any 500-kHz band

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement used was method SA-1 from 789033 D02 General UNII Test Procedures v01. Plots are correct for attenuators and cable loss.

Test Results: Equipment was compliant with the peak power spectral density limits of § 15.407 (a)(3). The peak power spectral density was determined from plots on the following page(s).

Test Engineer(s): Andy Shen

Test Date(s): 09/10/14




Figure 4. Power Spectral Density Test Setup

Frequency (MHz)	Mode	Port R1-A PSD (dBm)	Port R1-B PSD (dBm)	Summed PSD (dBm)
5745	802.11a	11.48		11.48
5785	802.11a	11.27		11.27
5825	802.11a	8.81		8.81
5755	802.11a	8.51		8.51
5795	802.11a	7.96		7.96
5745	802.11n	11.21	10.87	14.05
5785	802.11n	10.75	11.01	13.89
5825	802.11n	9.36	9.10	12.24
5755	802.11n	7.67	7.14	10.42
5795	802.11n	7.18	5.79	9.55
5775	802.11ac	5.26	5.78	8.54

Table 24. Peak Spectral Density, Test Results

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(4), (6), (7) Undesirable Emissions

Test Requirements: § 15.407(b)(4), (6), (7); §15.205: Emissions outside the frequency band.

§ 15.407(b)(4): For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The transmitter was placed on an 80cm non-metallic table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions. A preamp was used in the range from 7-18GHz to improve noise floor. Plots were corrected for cable loss, antenna, and preamp gain.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.


For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. A notch filter was use to filter the transmitting signal. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Only noise floor was observed above 18 GHz.

Test Results: The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results. All emissions above 18 GHz were at the noise floor of the receiver.


Test Engineer(s): Andy Shen

Test Date(s): 09/05/14


Radiated Spurious Emissions, 802.11a, Ceiling Antenna

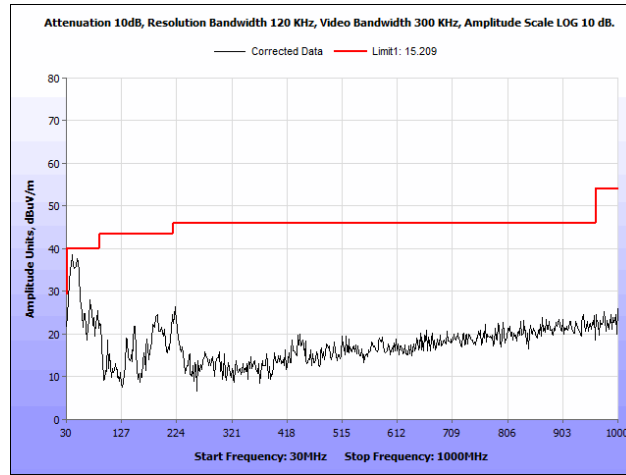


Plot 30. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 30 MHz – 1 GHz

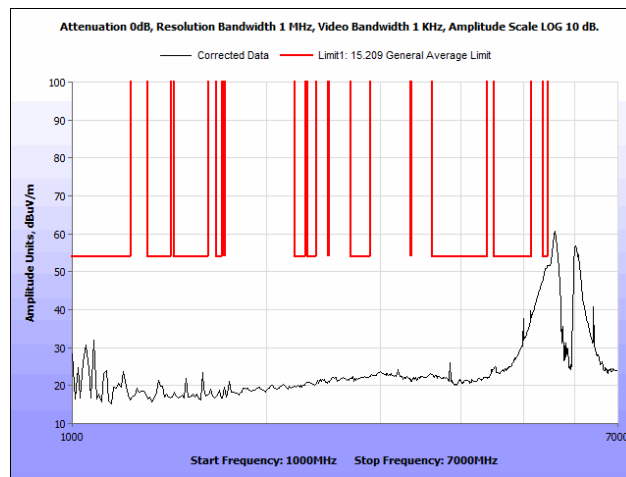


Plot 31. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 1 GHz – 7 GHz, Average

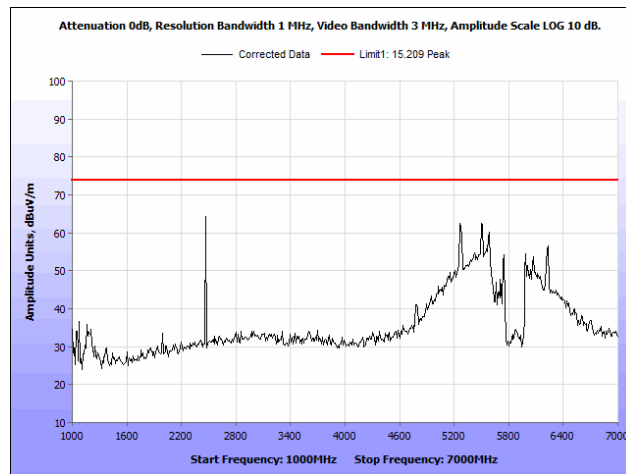


Plot 32. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak

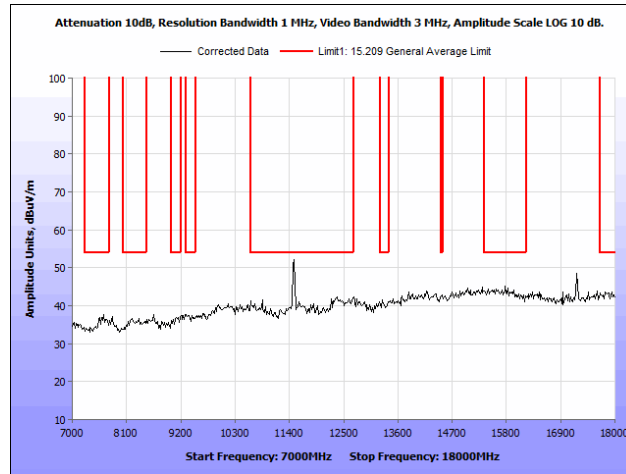


Plot 33. Radiated Spurious Emissions, 802.11a 20 MHz, Low Channel, 7 GHz – 18 GHz

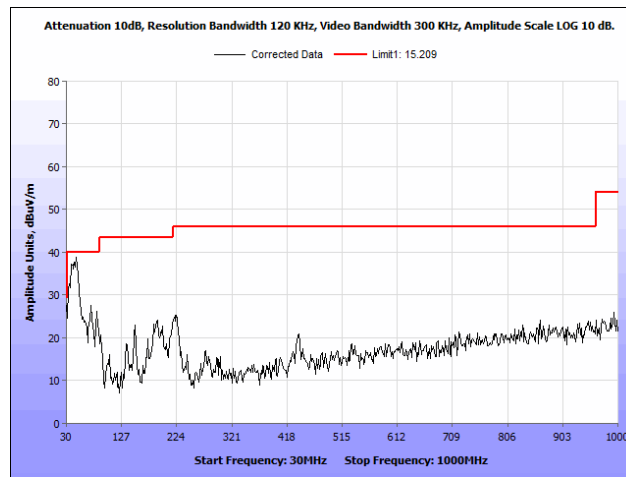


Plot 34. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 30 MHz – 1 GHz

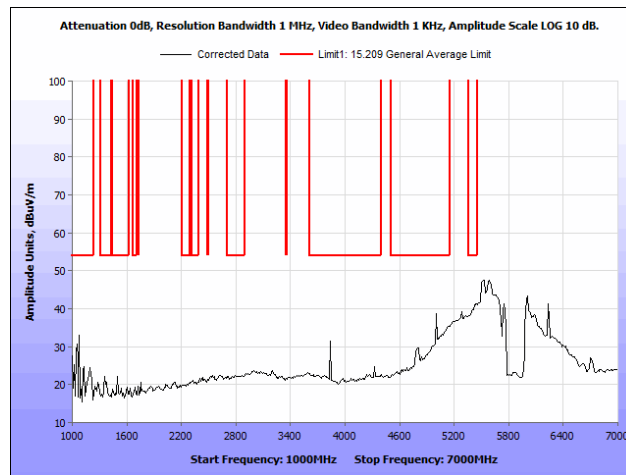


Plot 35. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 1 GHz – 7 GHz, Average

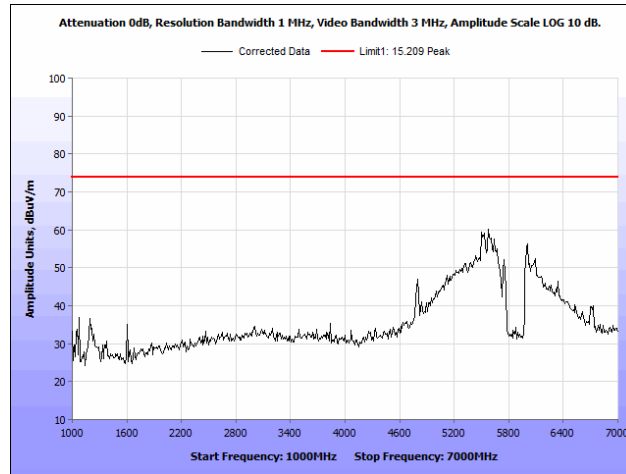


Plot 36. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak

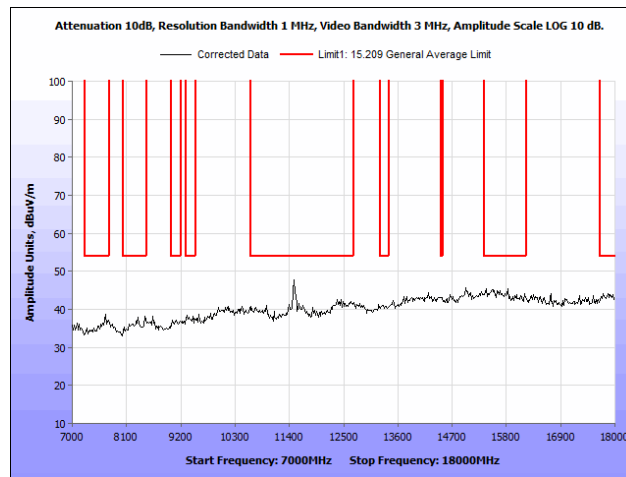


Plot 37. Radiated Spurious Emissions, 802.11a 40 MHz, Low Channel, 7 GHz – 18 GHz

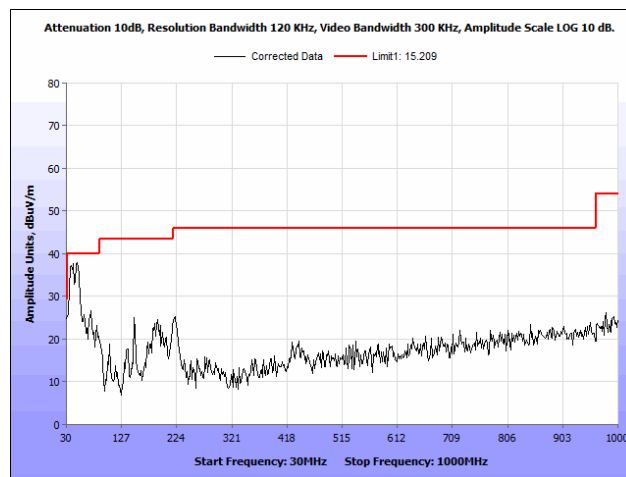


Plot 38. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 30 MHz – 1 GHz

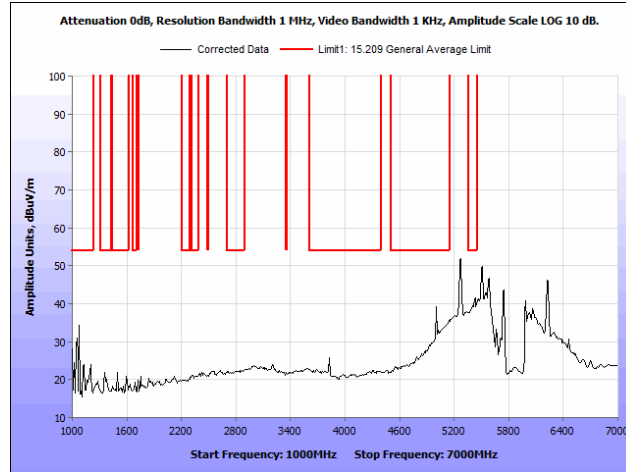


Plot 39. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average

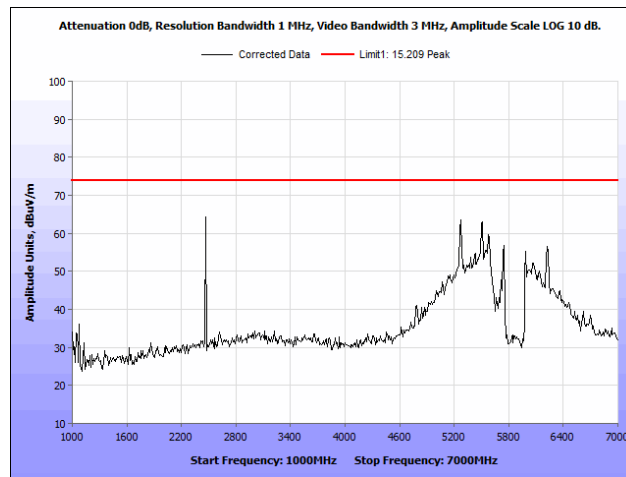

Plot 40. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak

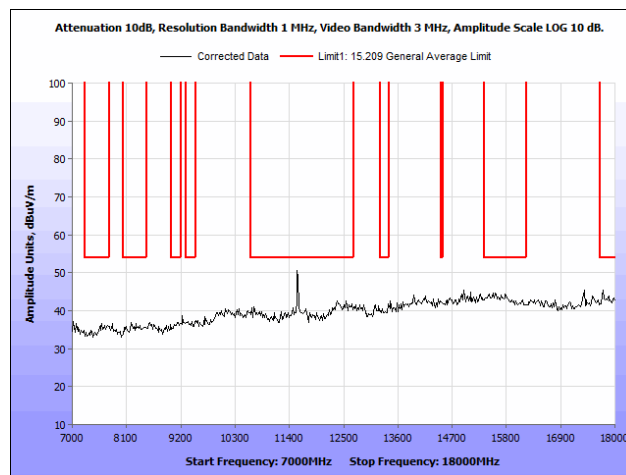

Plot 41. Radiated Spurious Emissions, 802.11a 20 MHz, Mid Channel, 7 GHz – 18 GHz

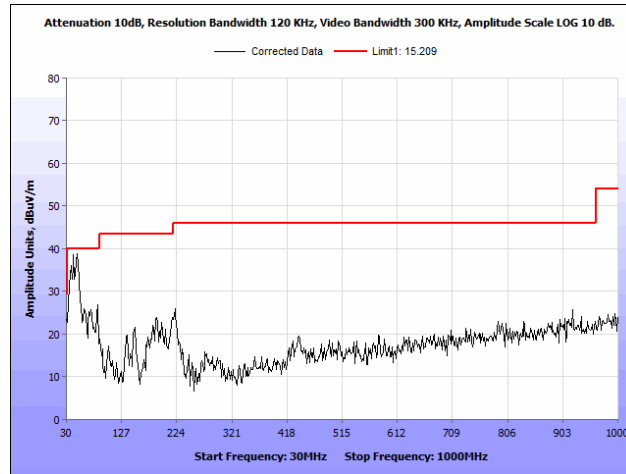

Plot 42. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 30 MHz – 1 GHz



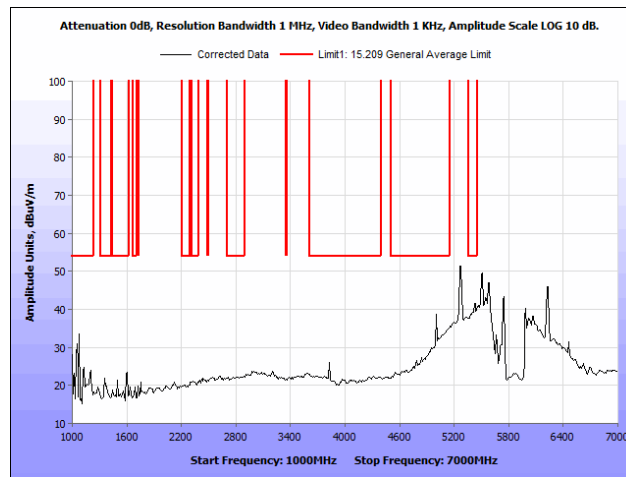



Table 25. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 1 GHz – 7 GHz, Average

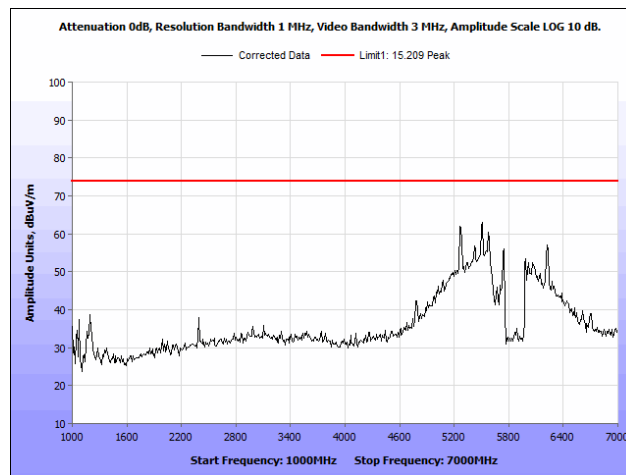


Plot 43. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 1 GHz – 7 GHz, Peak

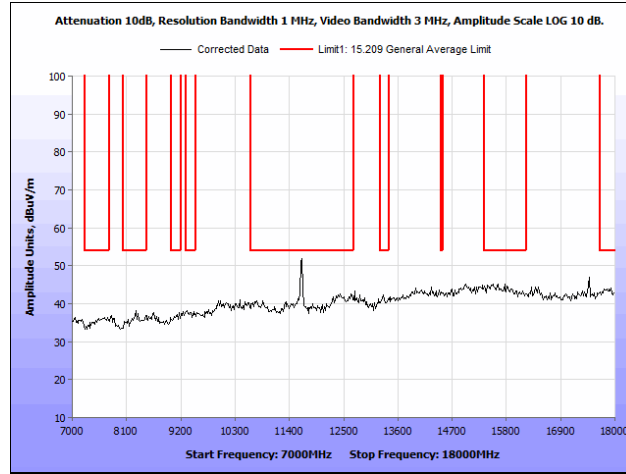


Plot 44. Radiated Spurious Emissions, 802.11a 20 MHz, High Channel, 7 GHz – 18 GHz

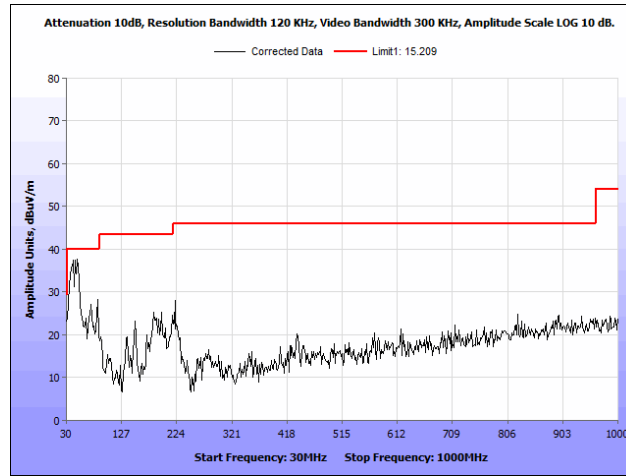


Plot 45. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 30 MHz – 1 GHz

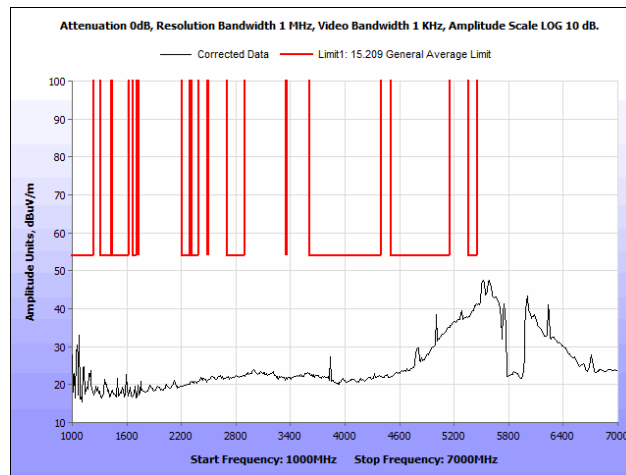

Plot 46. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 1 GHz – 7 GHz, Average

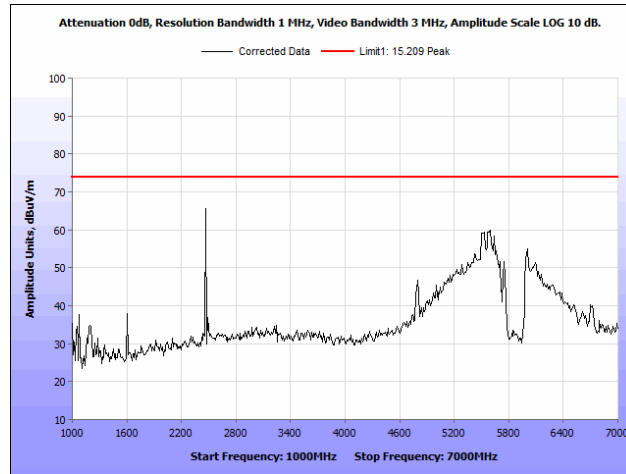


Plot 47. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 1 GHz – 7 GHz, Peak

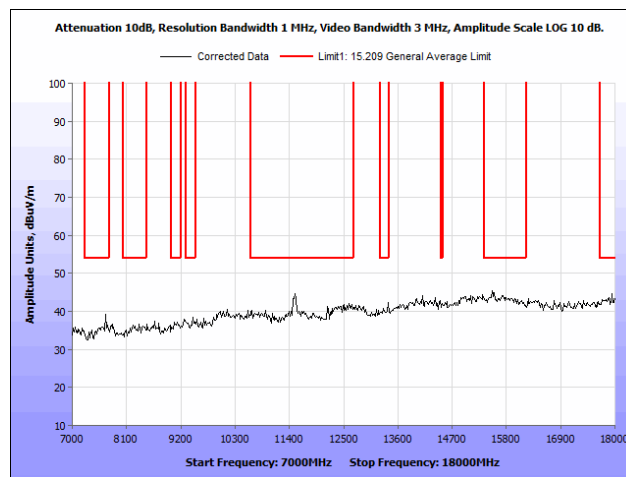


Plot 48. Radiated Spurious Emissions, 802.11a 40 MHz, High Channel, 7 GHz – 18 GHz, Peak


Radiated Spurious Emissions, 802.11n

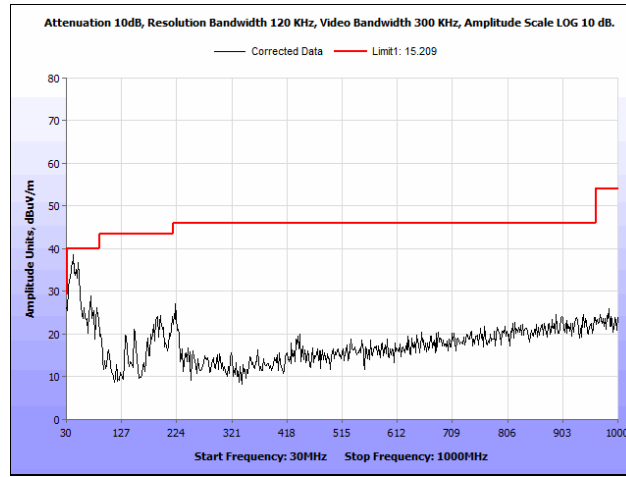


Plot 49. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 30 MHz – 1 GHz

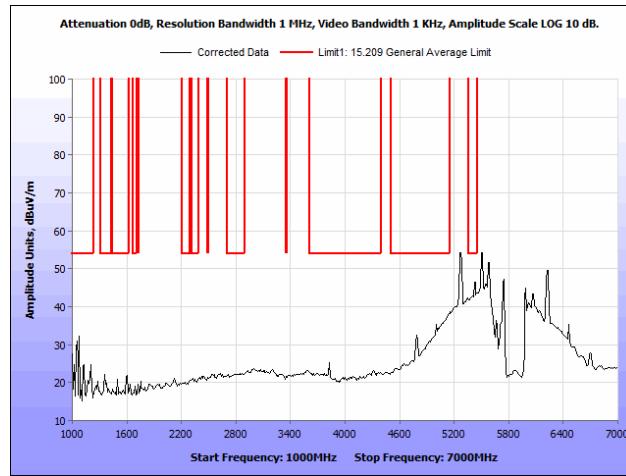


Plot 50. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Average

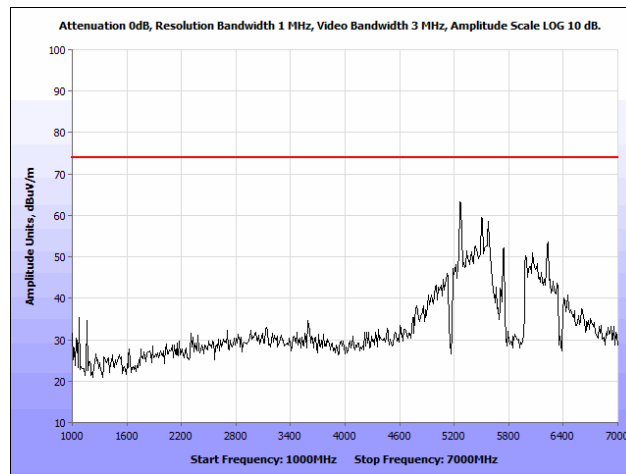


Plot 51. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 1 GHz – 7 GHz, Peak

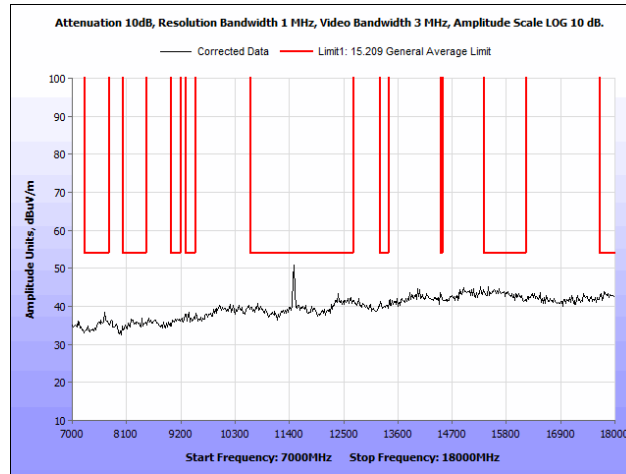


Plot 52. Radiated Spurious Emissions, 802.11n 20 MHz, Low Channel, 7 GHz – 18 GHz

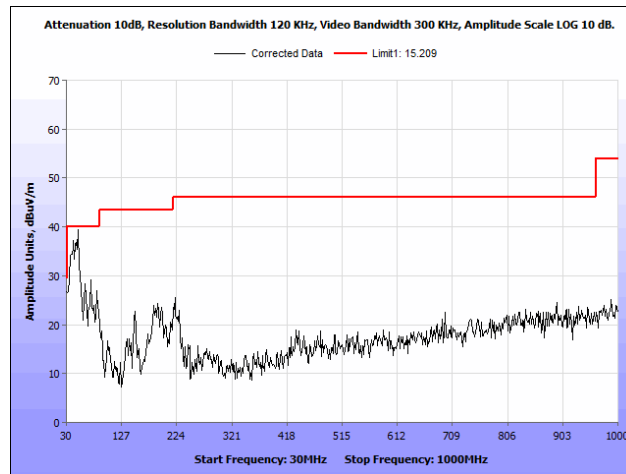


Plot 53. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 30 MHz – 1 GHz

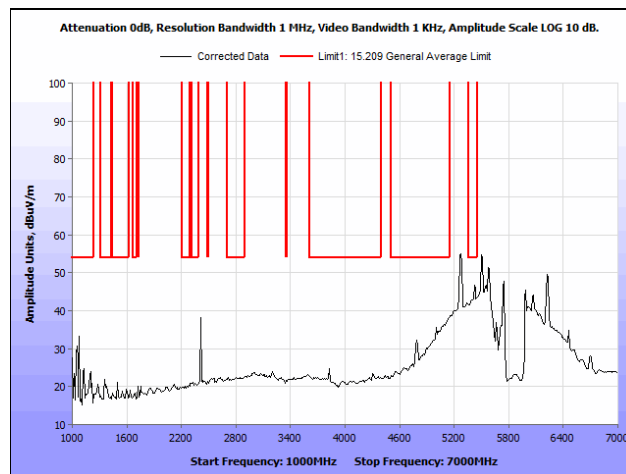


Plot 54. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Average

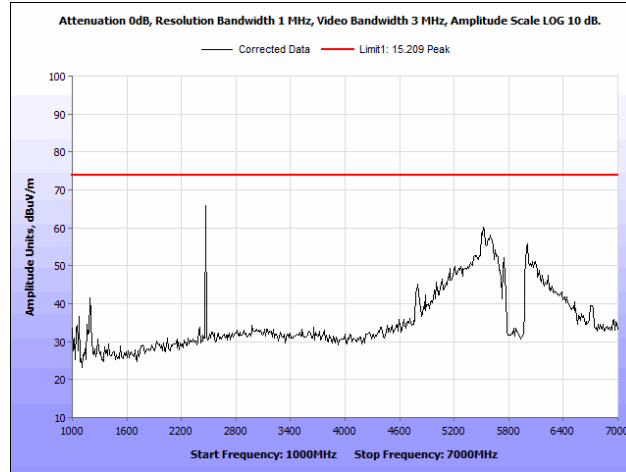


Plot 55. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 1 GHz – 7 GHz, Peak

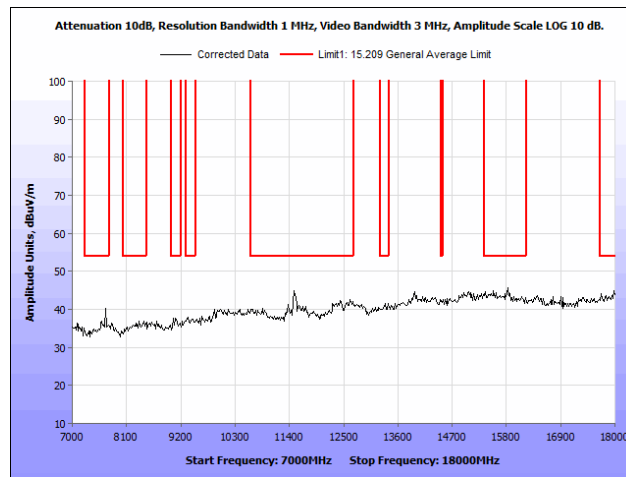


Plot 56. Radiated Spurious Emissions, 802.11n 40 MHz, Low Channel, 7 GHz – 18 GHz

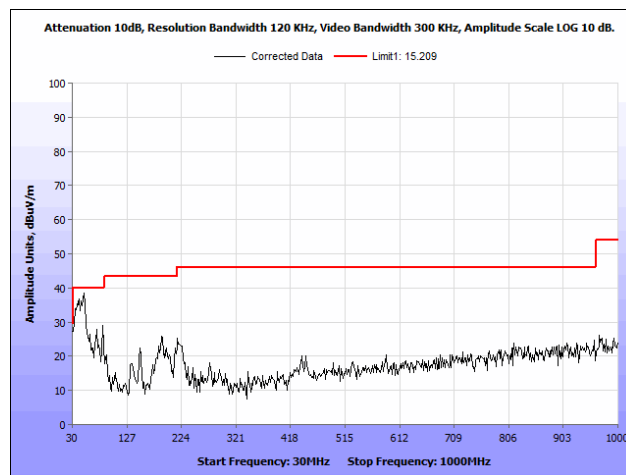


Plot 57. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 30 MHz – 1 GHz

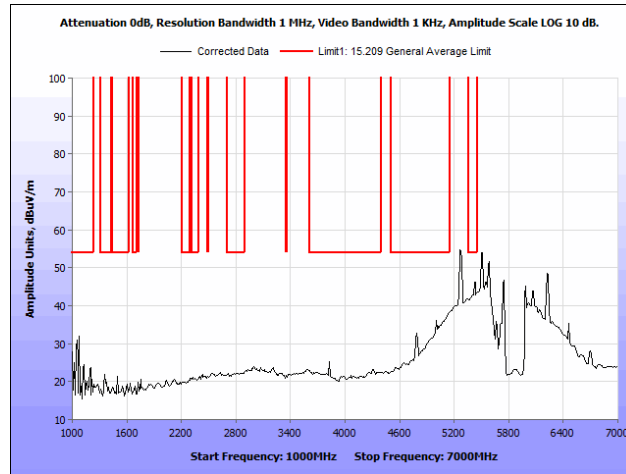


Plot 58. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Average

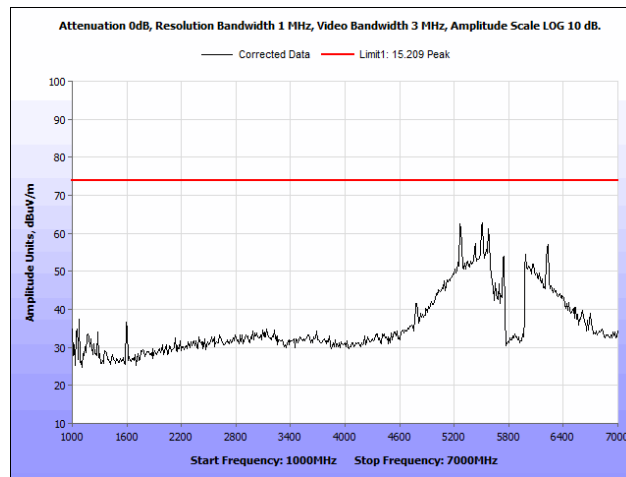


Plot 59. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 1 GHz – 7 GHz, Peak

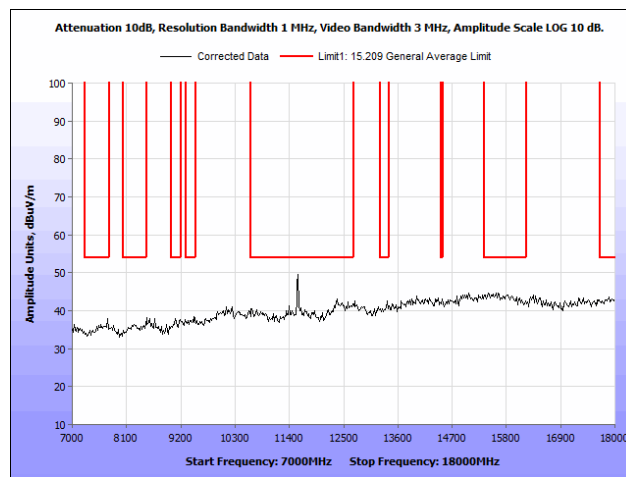


Plot 60. Radiated Spurious Emissions, 802.11n 20 MHz, Mid Channel, 7 GHz – 18 GHz

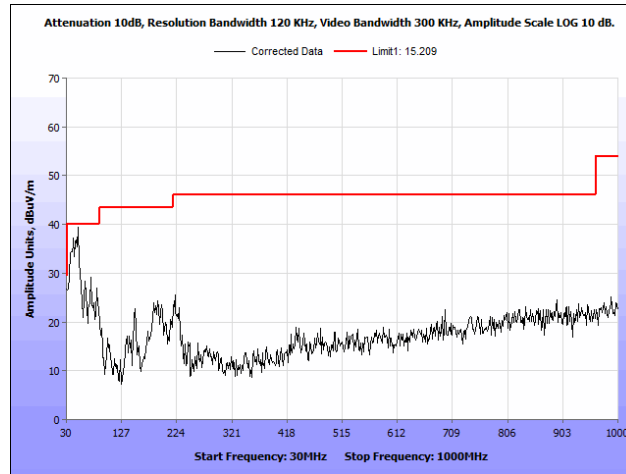


Plot 61. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 30 MHz – 1 GHz

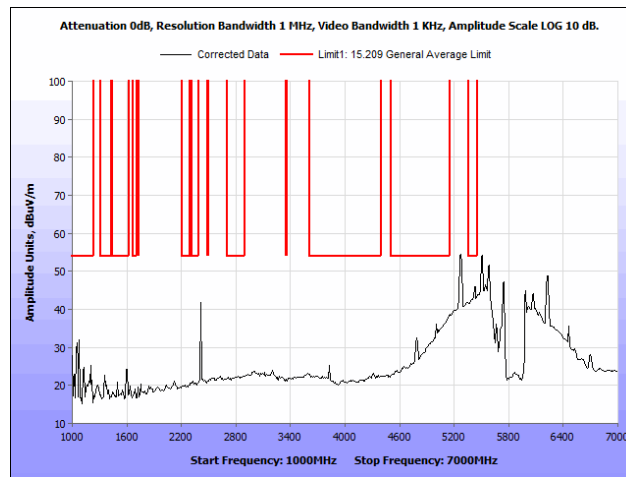


Plot 62. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Average

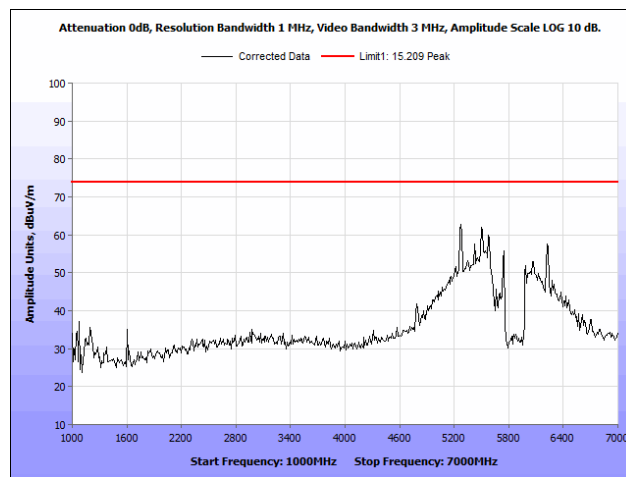


Plot 63. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 1 GHz – 7 GHz, Peak

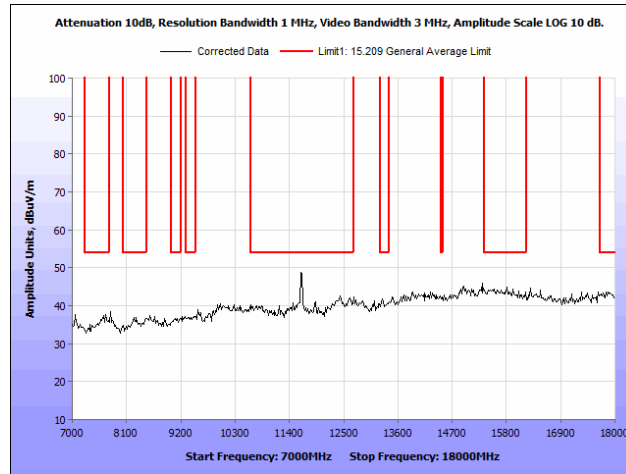


Plot 64. Radiated Spurious Emissions, 802.11n 20 MHz, High Channel, 7 GHz – 18 GHz

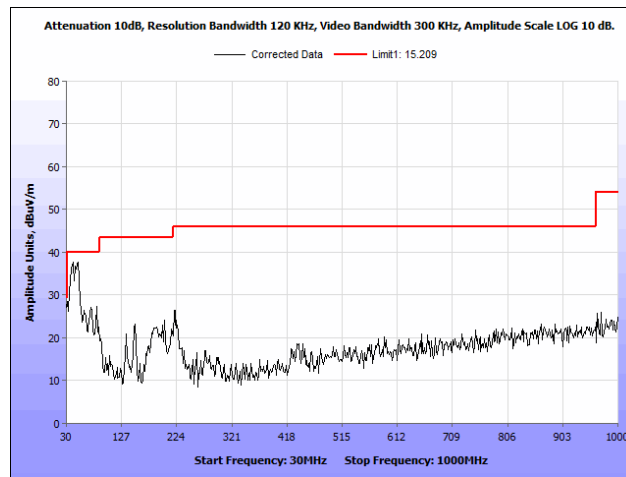


Plot 65. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 30 MHz – 1 GHz

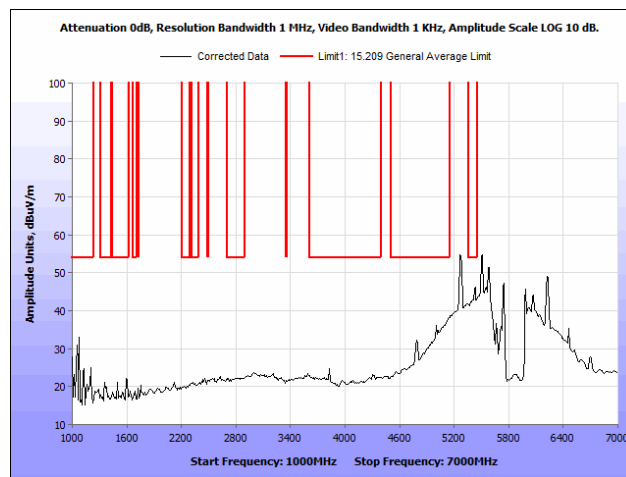

Plot 66. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Average

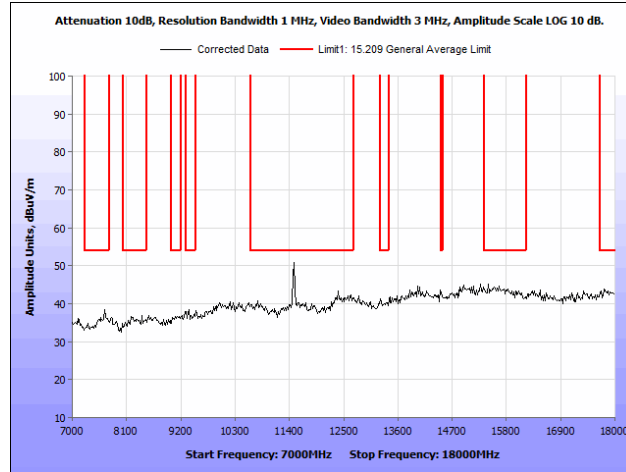


Plot 67. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 1 GHz – 7 GHz, Peak

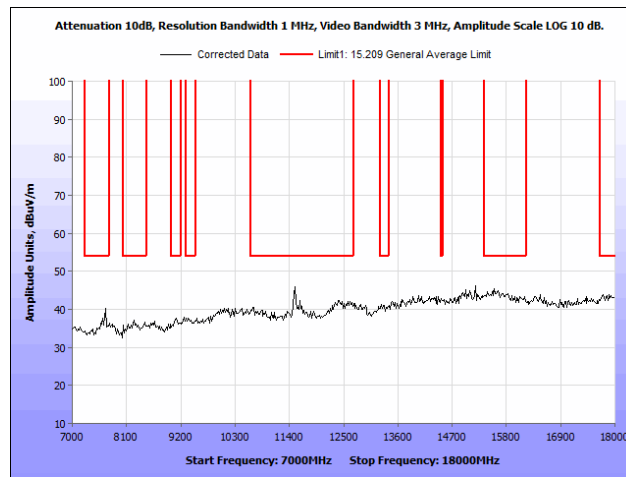


Plot 68. Radiated Spurious Emissions, 802.11n 40 MHz, High Channel, 7 GHz – 18 GHz, Peak


Radiated Spurious Emissions, 802.11ac

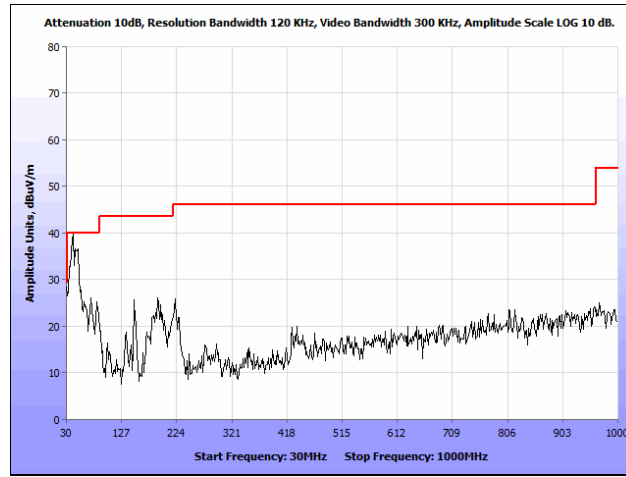


Plot 69. Radiated Spurious Emissions, 802.11ac 80 MHz, 30 MHz – 1 GHz

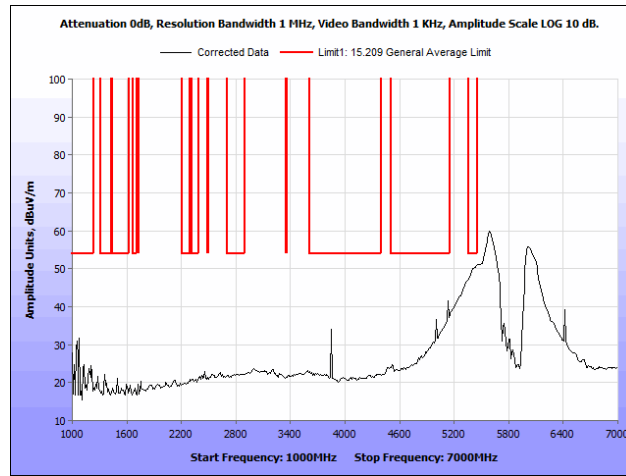

Plot 70. Radiated Spurious Emissions, 802.11ac 80 MHz, 1 GHz – 7 GHz, Average

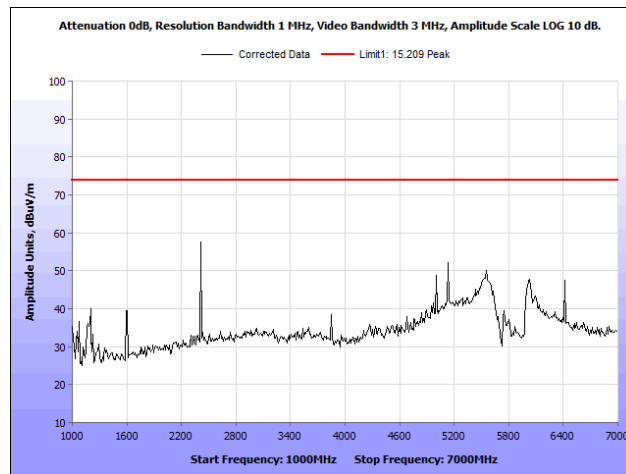


Plot 71. Radiated Spurious Emissions, 802.11ac 80 MHz, 1 GHz – 7 GHz, Peak

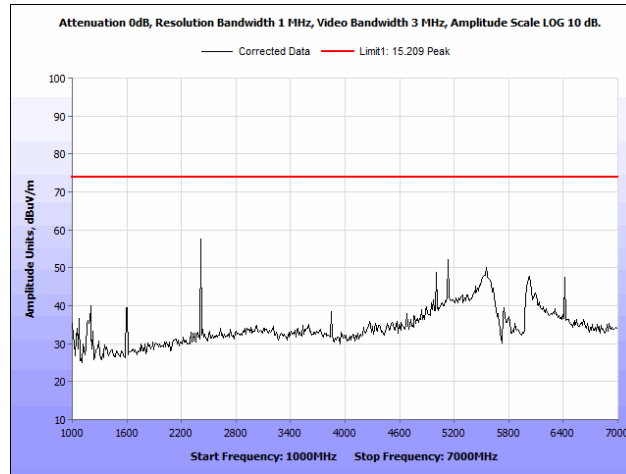


Plot 72. Radiated Spurious Emissions, 802.11ac 80 MHz, 7 GHz – 18 GHz


Band Edge, 802.11a

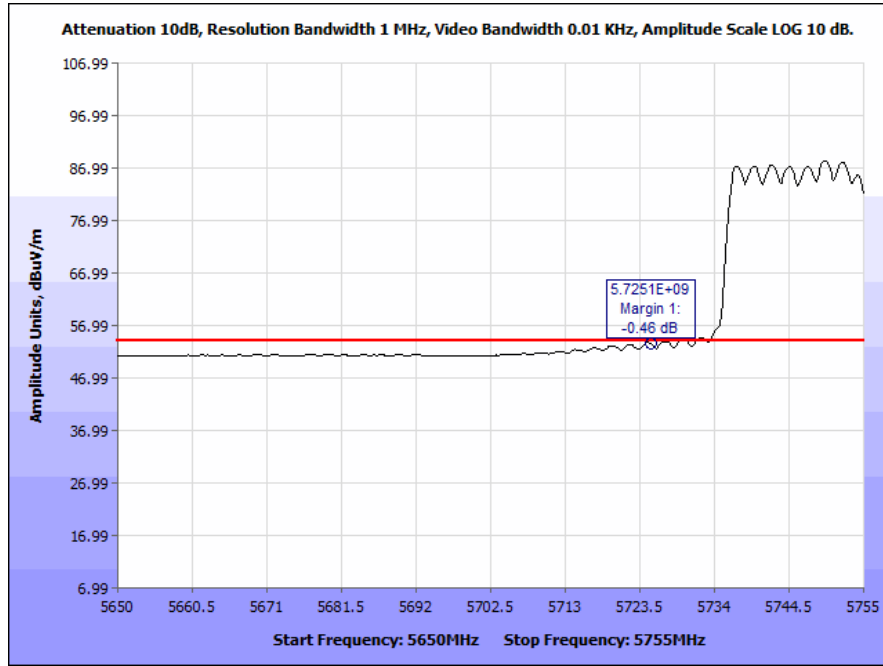


Plot 73. Radiated Band Edge, 802.11a, Low Channel (5715 & 5725 MHz), Average

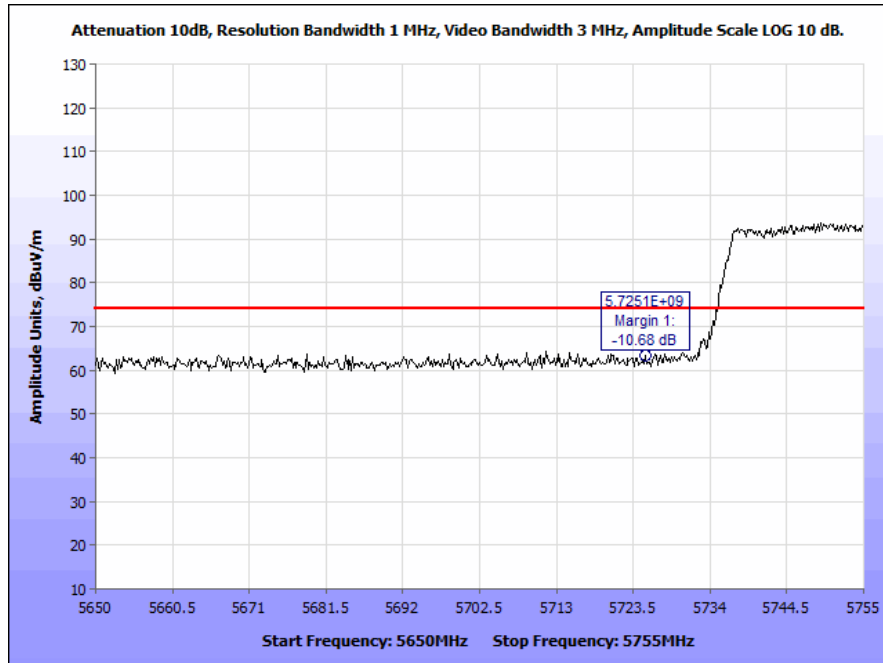

Plot 74. Radiated Band Edge, 802.11a, Low Channel (5715 & 5725 MHz), Peak

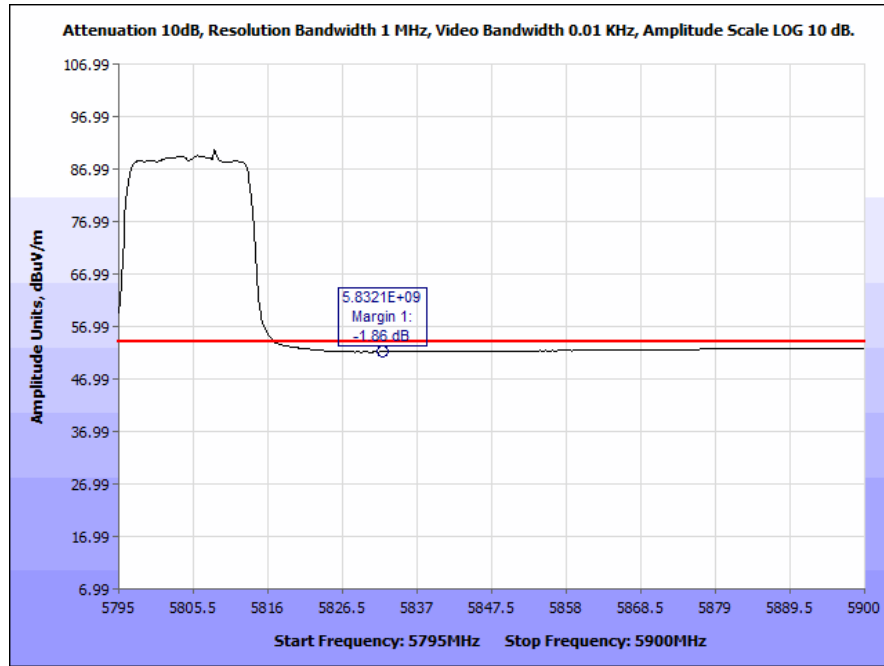


Plot 75. Radiated Band Edge, 802.11a, High Channel (5825 & 5835 MHz), Average

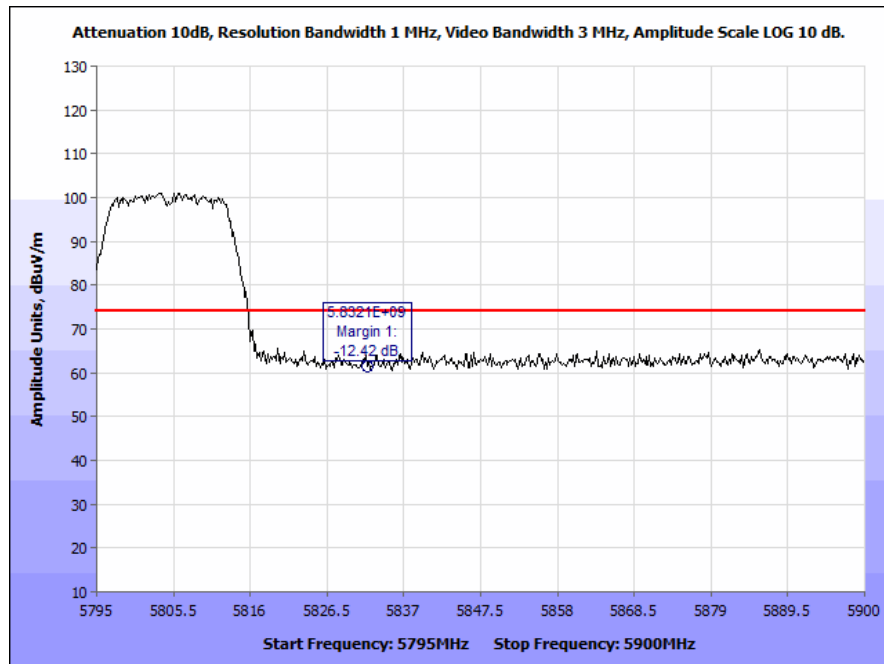


Plot 76. Radiated Band Edge, 802.11a, High Channel (5825 & 5835 MHz), Peak


Band Edge, 802.11n 20 MHz

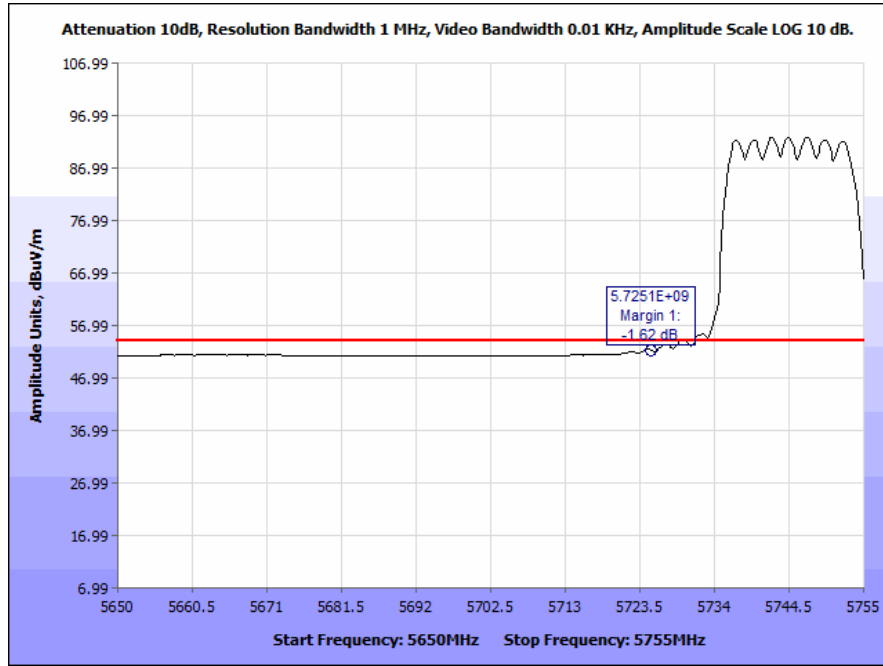


Plot 77. Radiated Band Edge, 802.11n 20 MHz, Low Channel (5715 & 5725 MHz), Average

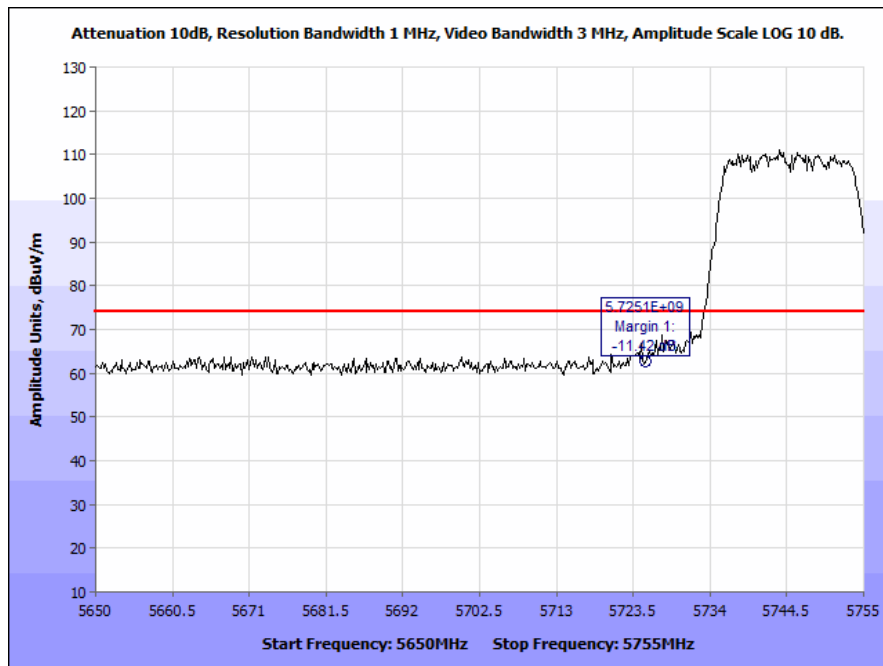

Plot 78. Radiated Band Edge, 802.11n 20 MHz, Low Channel (5715 & 5725 MHz), Peak

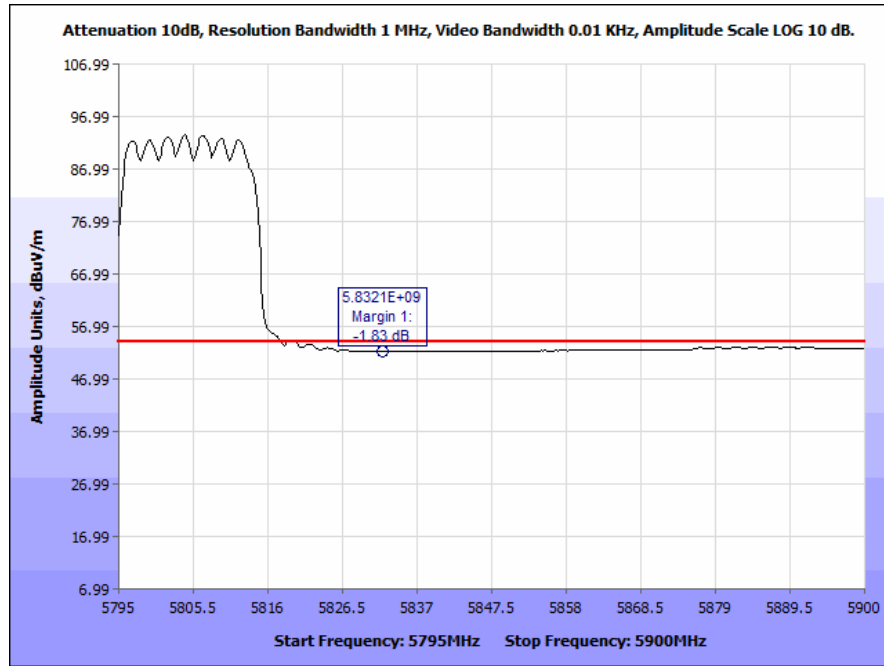


Plot 79. Radiated Band Edge, 802.11n 20 MHz, High Channel (5825 & 5835 MHz), Average

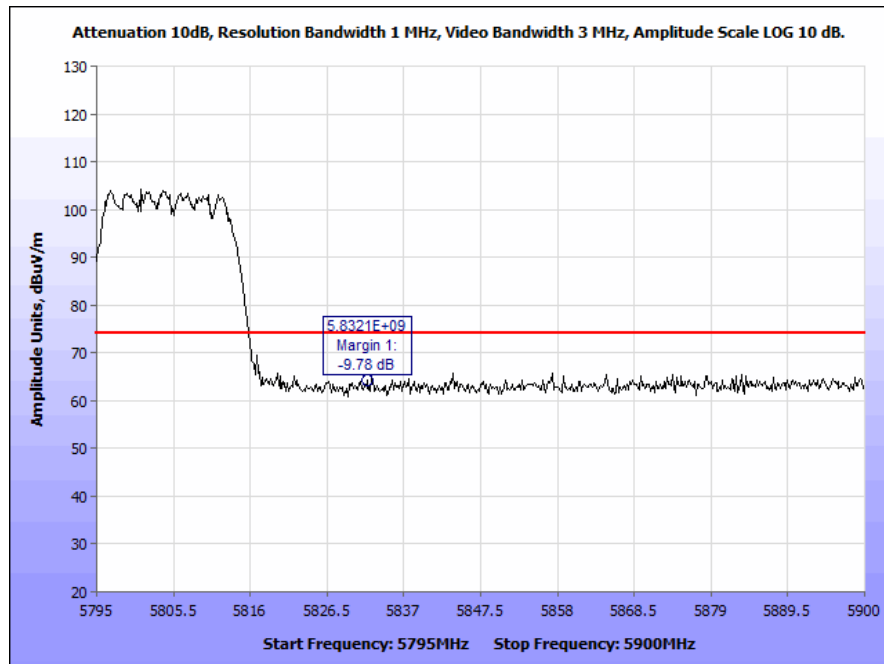


Plot 80. Radiated Band Edge, 802.11n 20 MHz, High Channel (5825 & 5835 MHz), Peak


Band Edge, 802.11n 40 MHz

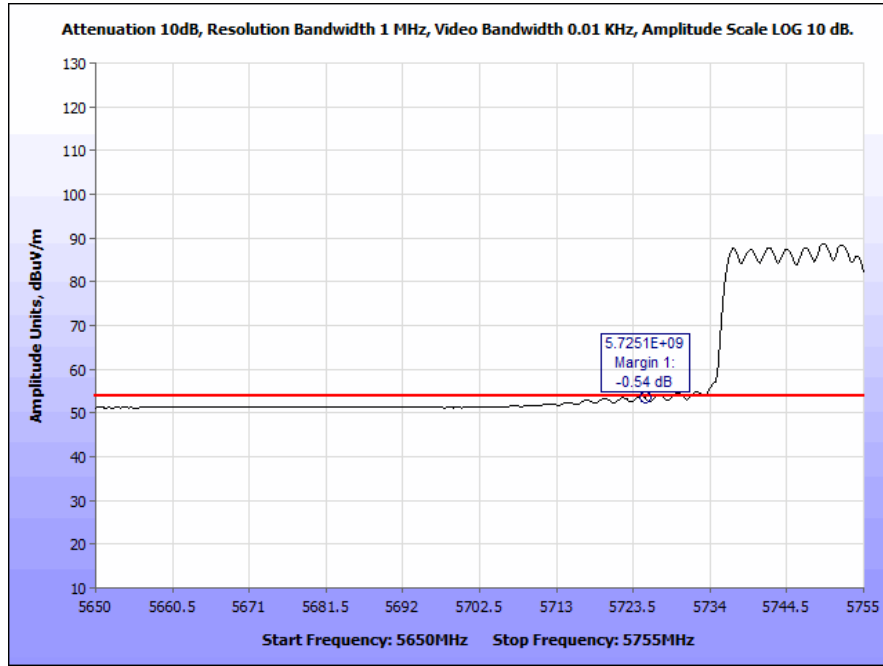


Plot 81. Radiated Band Edge, 802.11n 40 MHz, Low Channel (5715 & 5725 MHz), Average

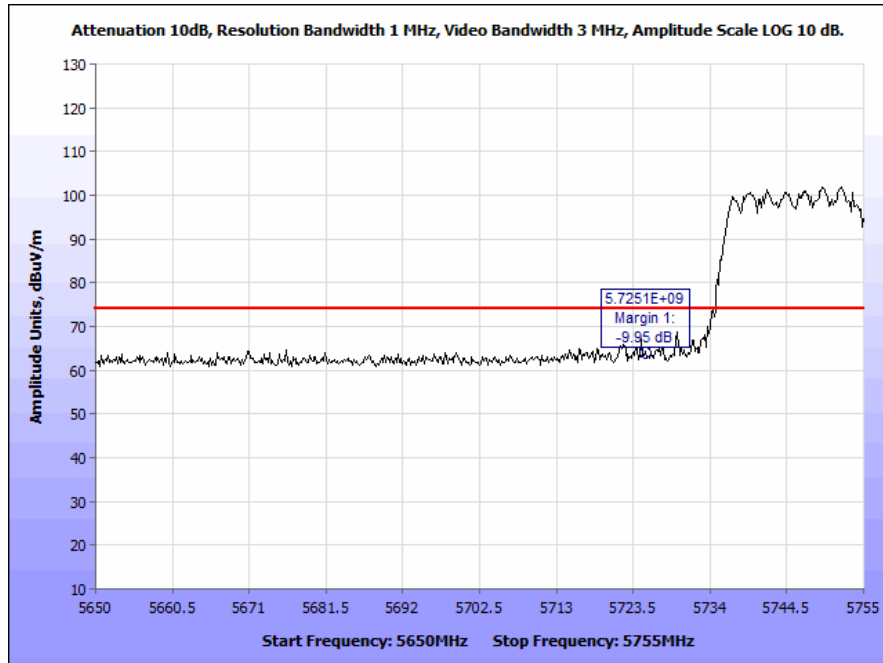

Plot 82. Radiated Band Edge, 802.11n 40 MHz, Low Channel (5715 & 5725 MHz), Peak

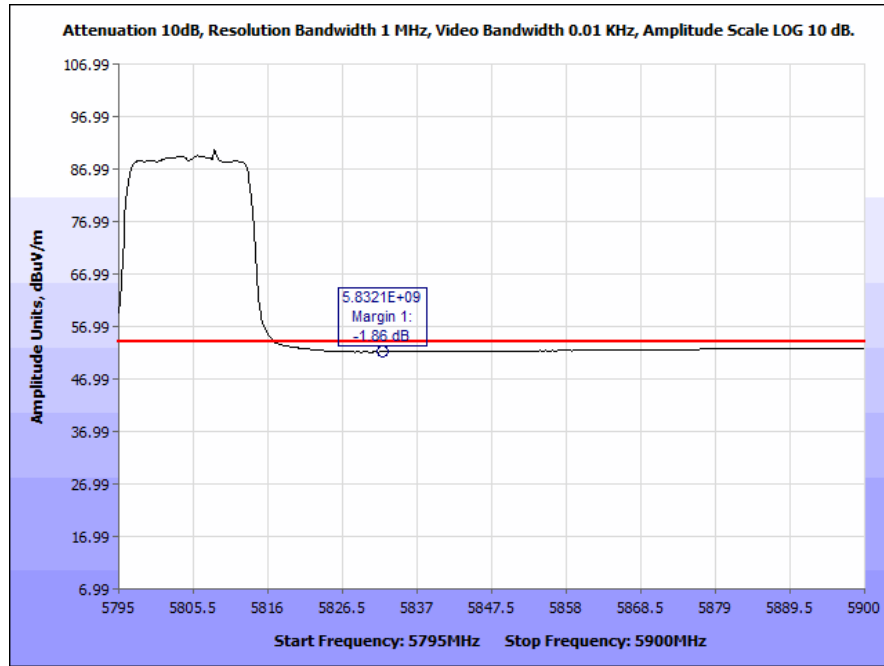


Plot 83. Radiated Band Edge, 802.11n 40 MHz, High Channel (5832 & 5835 MHz), Average

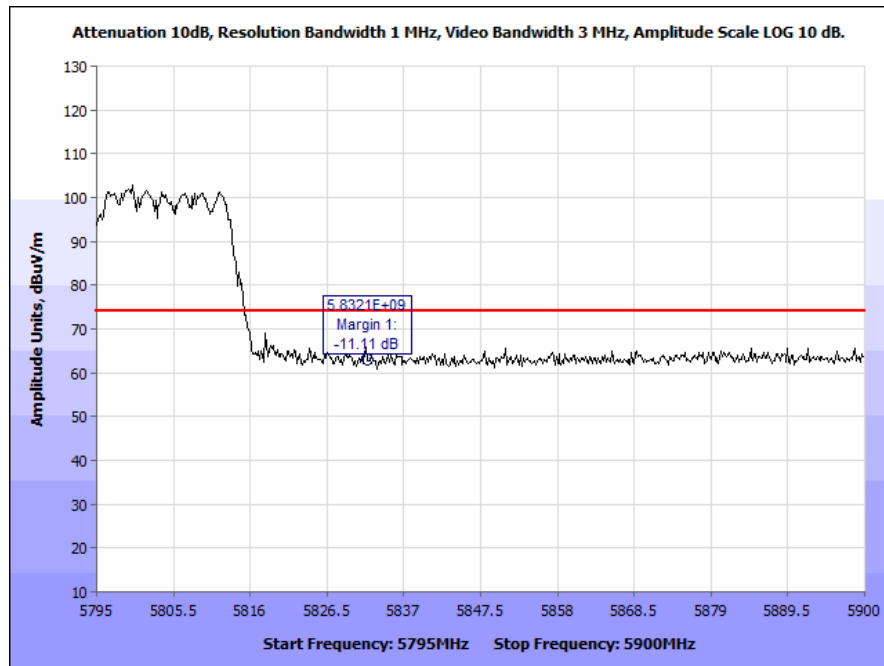


Plot 84. Radiated Band Edge, 802.11n 40 MHz, High Channel (5832 & 5835 MHz), Peak


Band Edge, 802.11n 80 MHz

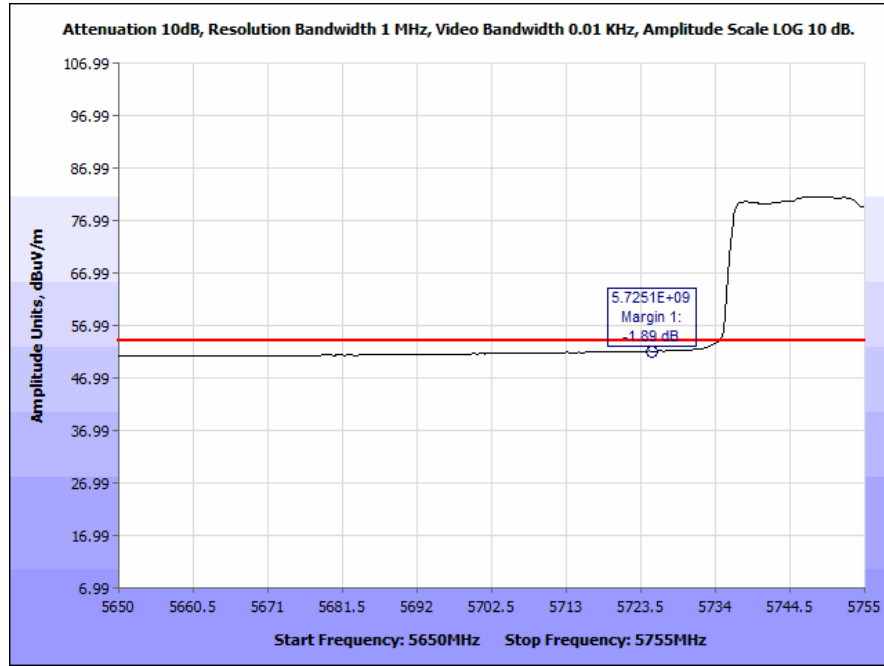


Plot 85. Radiated Band Edge, 802.11n 80 MHz (5715 & 5725 MHz), Average

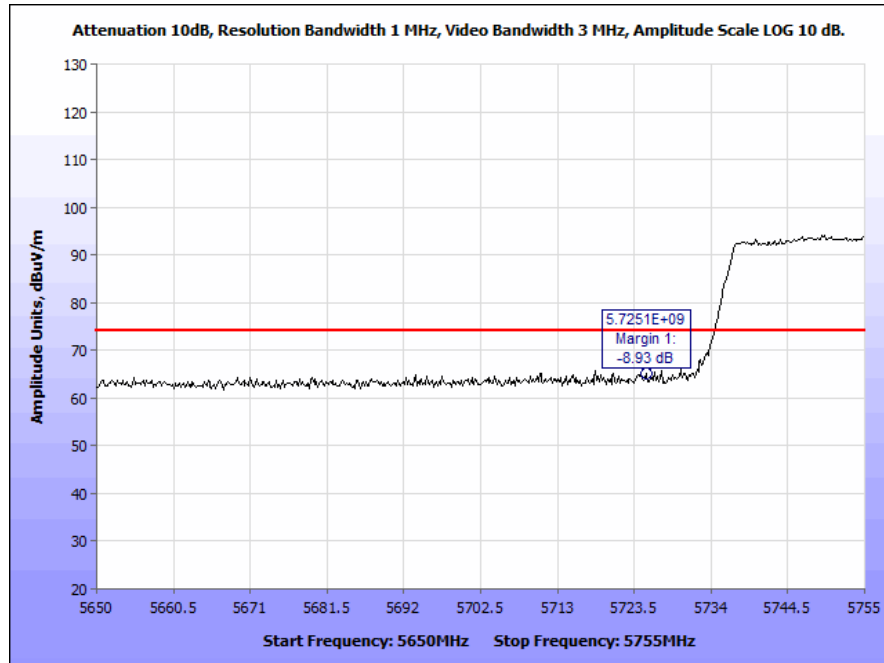

Plot 86. Radiated Band Edge, 802.11n 80 MHz (5715 & 5725 MHz), Peak

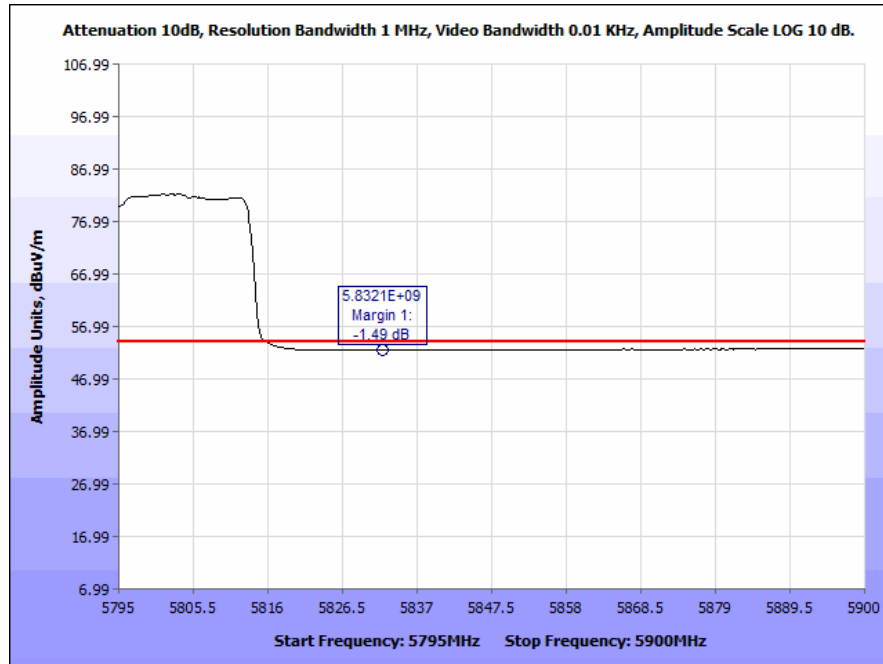

Plot 87. Radiated Band Edge, 802.11n 80 MHz (5832 & 5835 MHz), Average

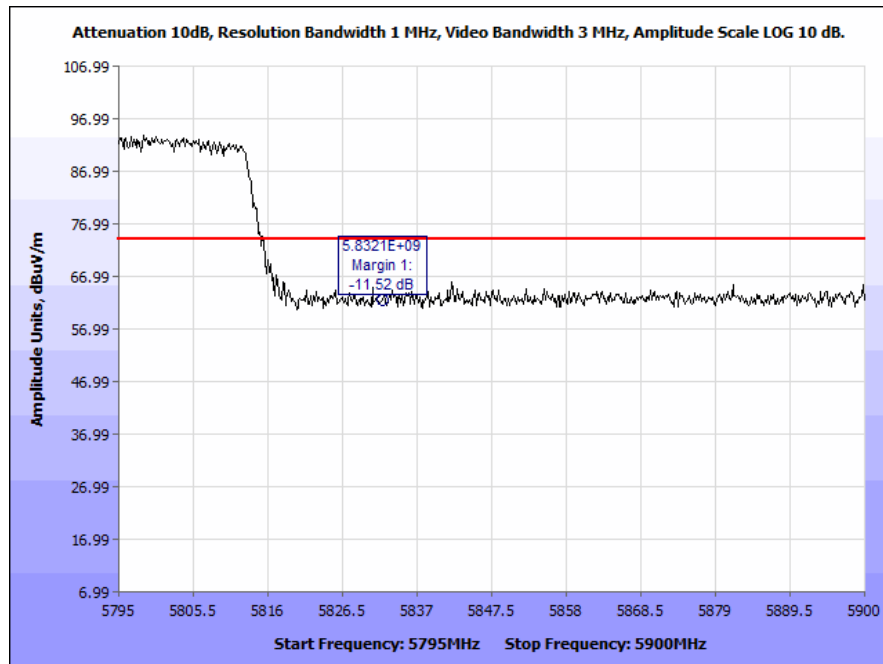

Plot 88. Radiated Band Edge, 802.11n 80 MHz (5832 & 5835 MHz), Peak

Electromagnetic Compatibility Criteria for Intentional Radiators

Co-location

Test Requirements: Devices designed to transmit simultaneously in multiple channels in single or multiple frequency bands or those using new “carrier aggregation techniques”, excluding cellular base stations or where specific guidance has been provided.

All devices that are capable of transmitting simultaneously in more than one Part-15 band between 5 and 6 GHz (*i.e.*, in two or more of the four U-NII bands or in the 5.8 GHz 15.247 band and at least one U-NII band) are subject to Permit But Ask provisions. This includes devices marketed as IEEE Std 802.11ac or “pre-standard” IEEE Std 802.11ac.


Test Procedure: The transmitter was placed on an 80cm wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions. A preamp was used in the range from 7-18GHz to improve noise floor. Plots were corrected for cable loss, antenna, and preamp gain.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.


For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Only noise floor was seen above 18 GHz.

The EUT uses 2 radios that are co-located. The EUT was set to transmit on both radios using the following matrix below.


Omni Antenna

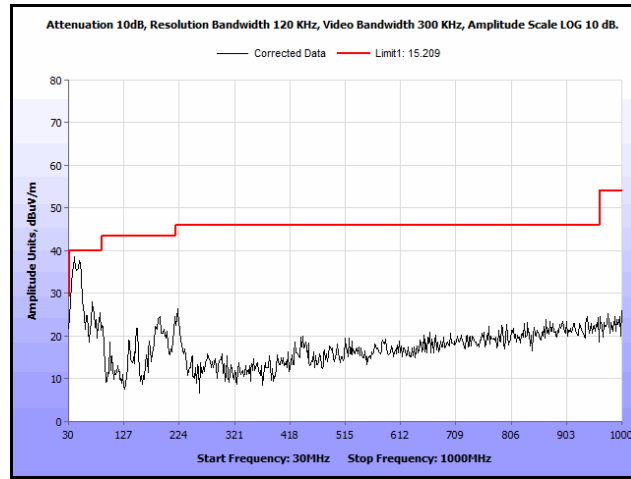


Plot 89. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 30 MHz – 1 GHz, Peak, Omni

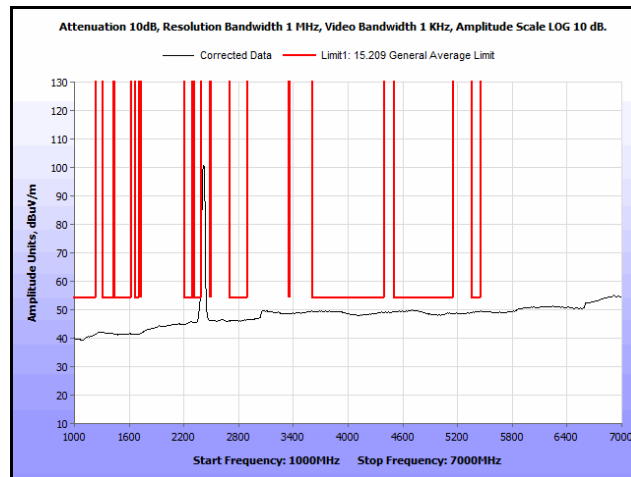


Plot 90. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 1 GHz – 7 GHz, Avg., Omni

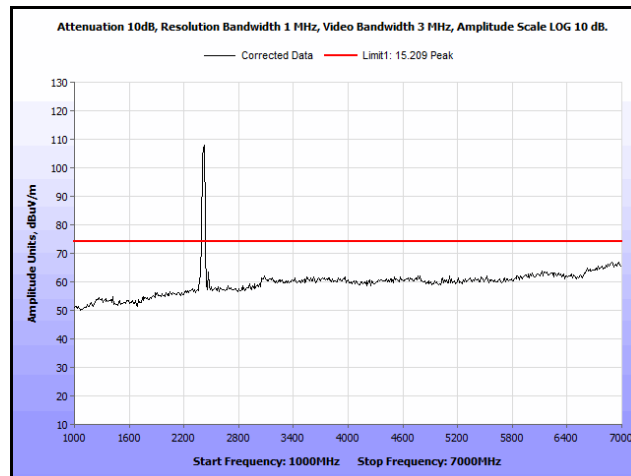


Plot 91. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 1 GHz – 7 GHz, Peak, Omni

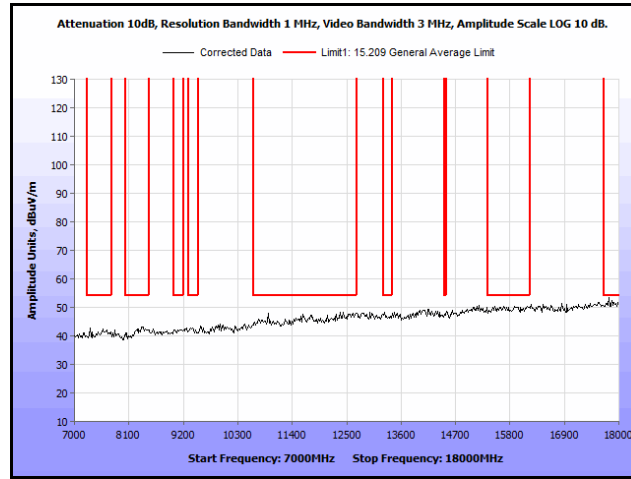


Plot 92. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2412 MHz, 7 GHz – 18 GHz, Peak, Omni

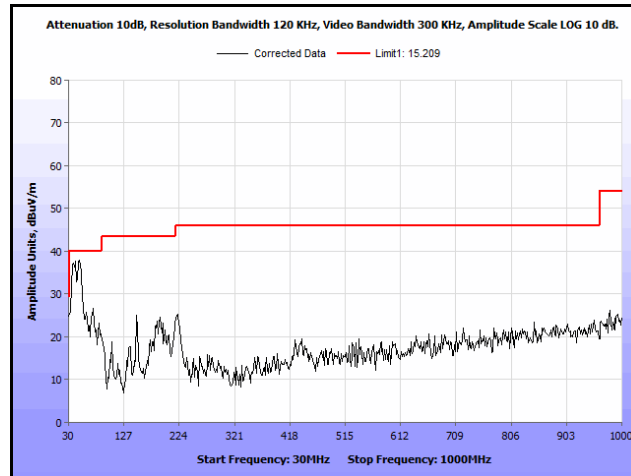


Plot 93. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 30 MHz – 1 GHz, Peak, Omni

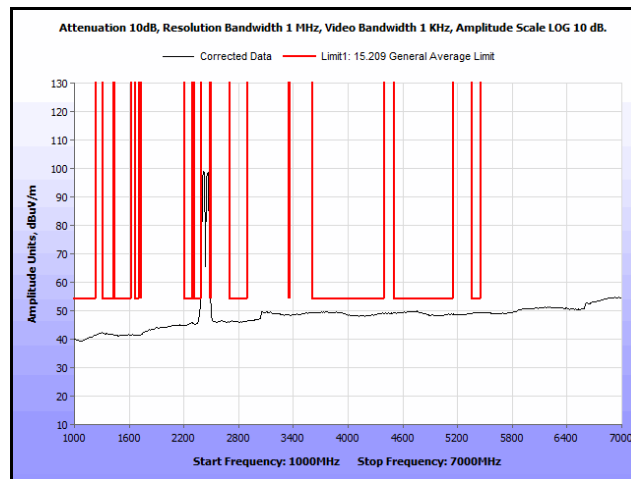


Plot 94. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 1 GHz – 7 GHz, Avg., Omni

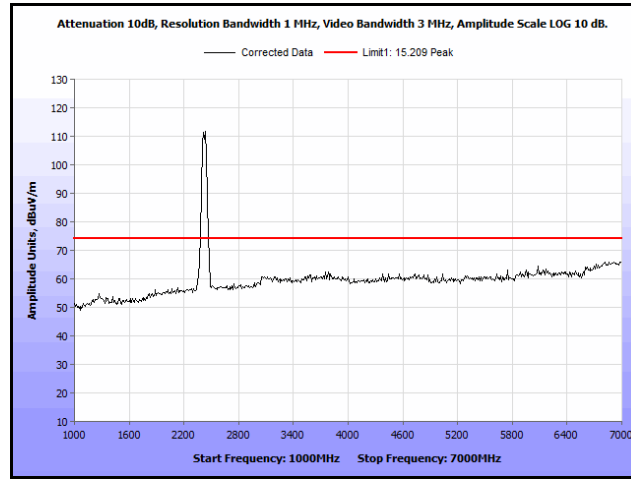


Plot 95. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 1 GHz – 7 GHz, Peak, Omni

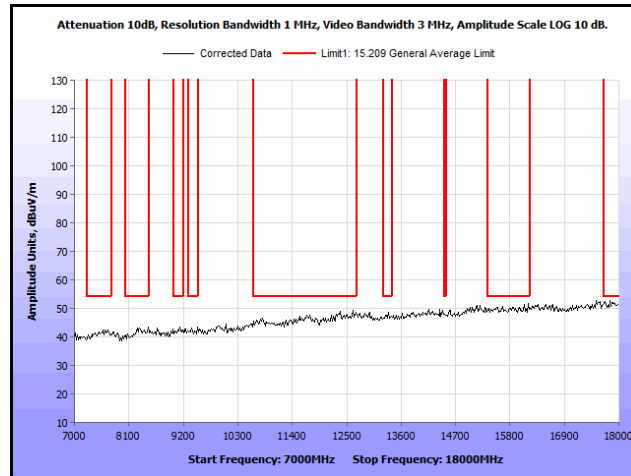


Plot 96. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2437 MHz, 7 GHz – 18 GHz, Peak, Omni

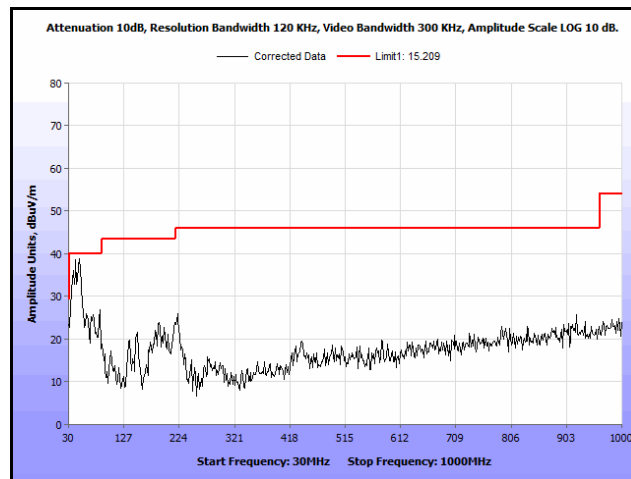


Plot 97. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 30 MHz – 1 GHz, Peak, Omni

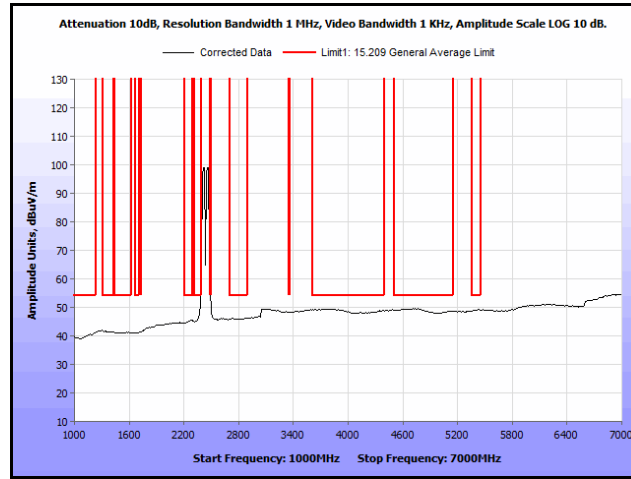


Plot 98. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 1 GHz – 7 GHz, Avg., Omni

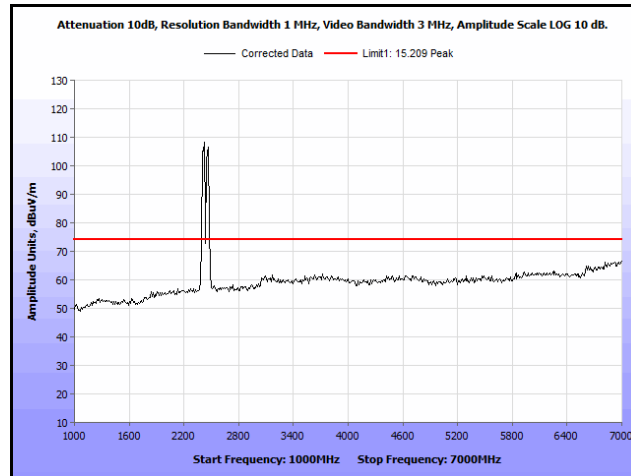


Plot 99. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 1 GHz – 7 GHz, Peak, Omni

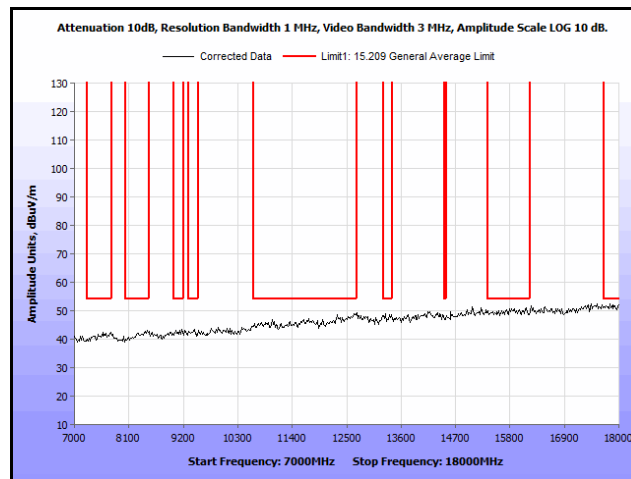


Plot 100. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 2462 MHz, 7 GHz – 18 GHz, Peak, Omni

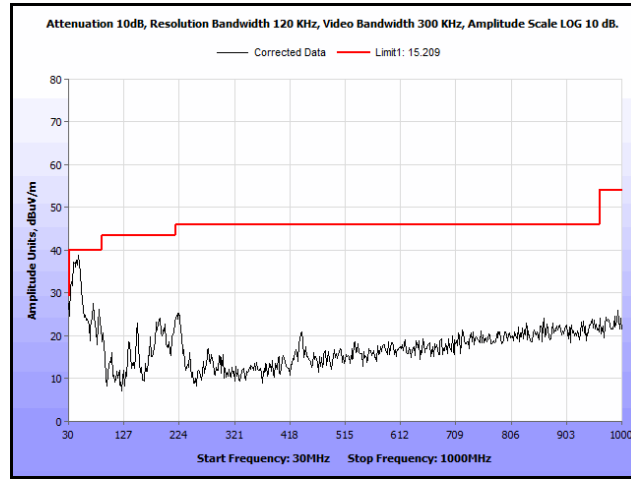


Plot 101. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 30 MHz – 1 GHz, Peak, Omni

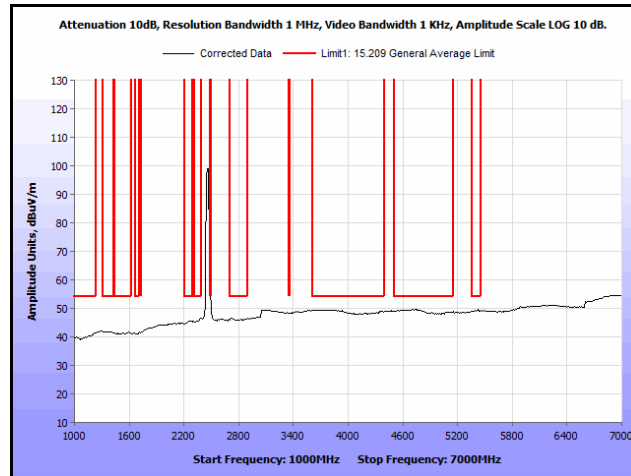


Plot 102. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 1 GHz – 7 GHz, Avg., Omni

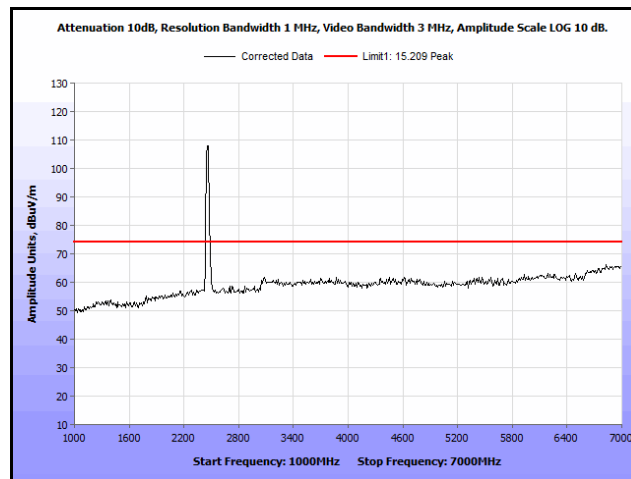


Plot 103. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 1 GHz – 7 GHz, Peak, Omni

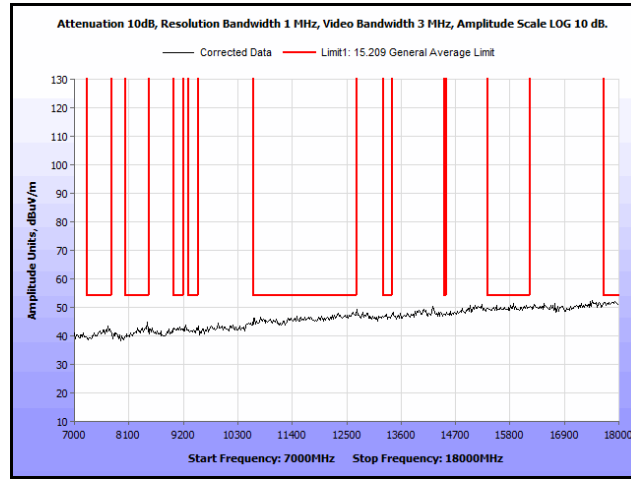


Plot 104. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2437 MHz, 7 GHz – 18 GHz, Peak, Omni

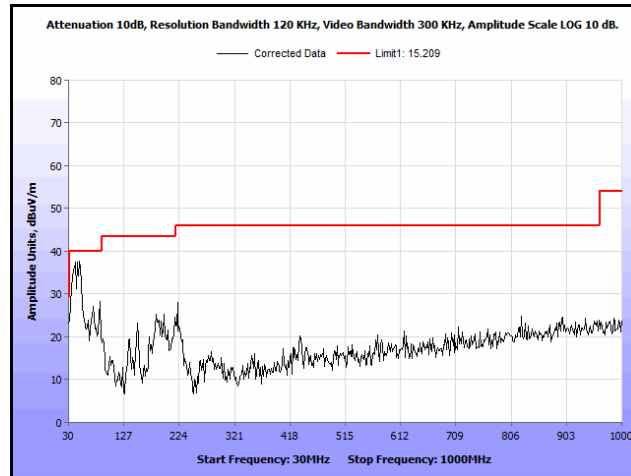


Plot 105. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 30 MHz – 1 GHz, Peak, Omni

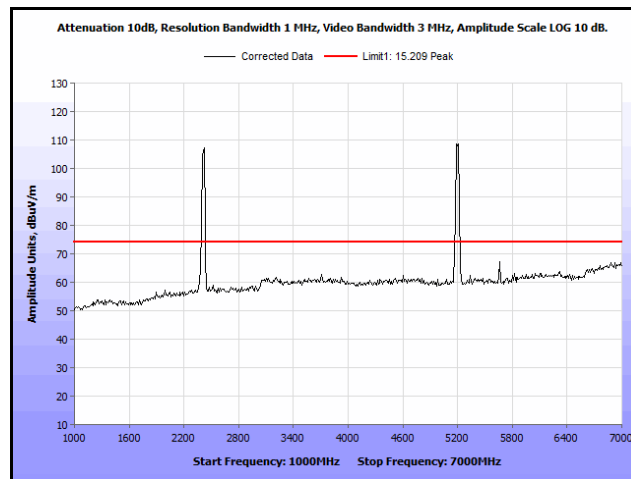


Plot 106. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 1 GHz – 7 GHz, Avg., Omni

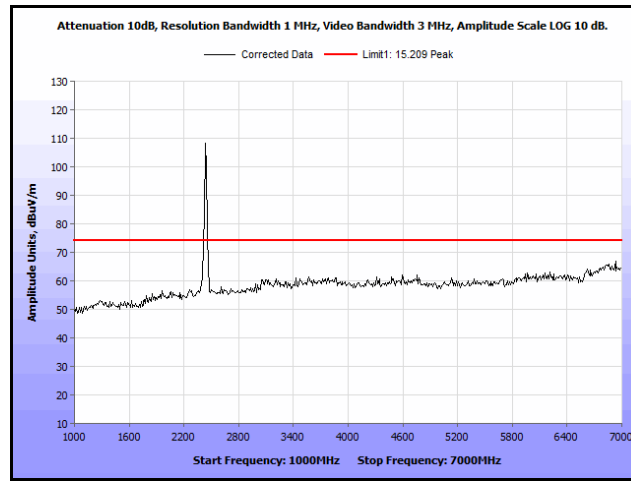


Plot 107. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 1 GHz – 7 GHz, Peak, Omni

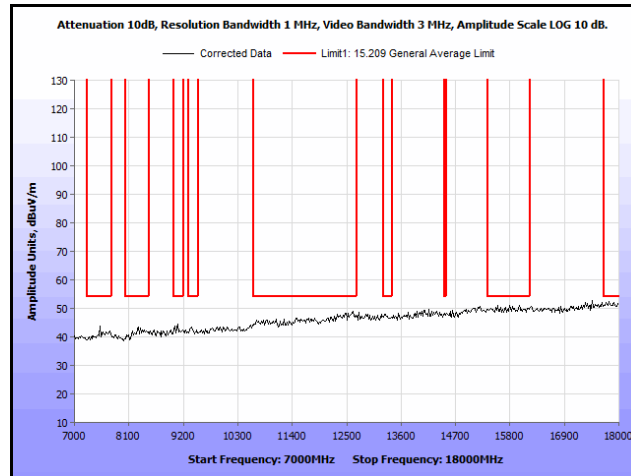


Plot 108. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 2462 MHz, 7 GHz – 18 GHz, Peak, Omni

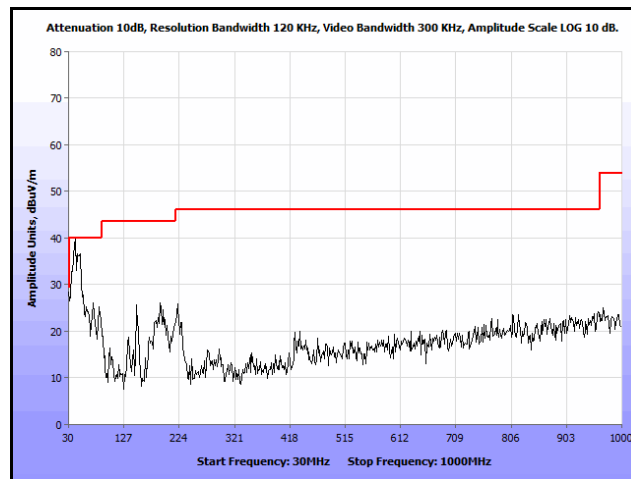


Plot 109. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 30 MHz – 1 GHz, Peak, Omni

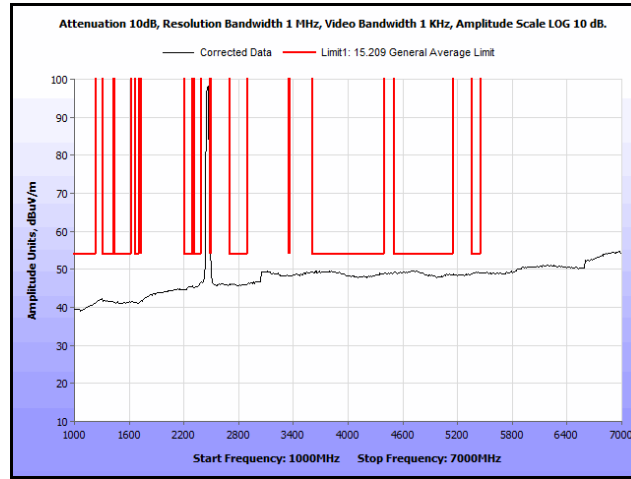

Plot 110. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 1 GHz – 7 GHz, Avg., Omni

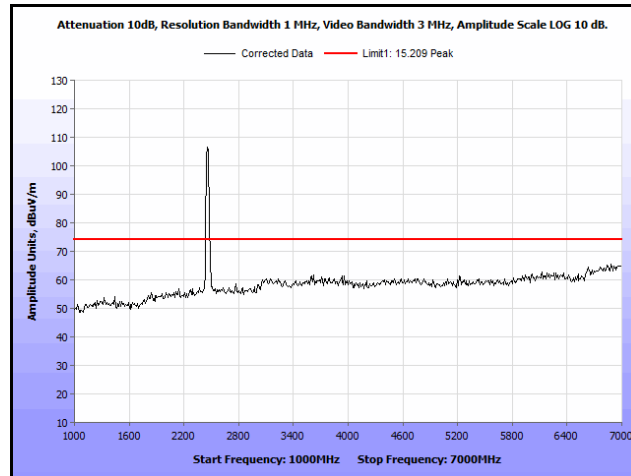


Plot 111. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 1 GHz – 7 GHz, Peak, Omni

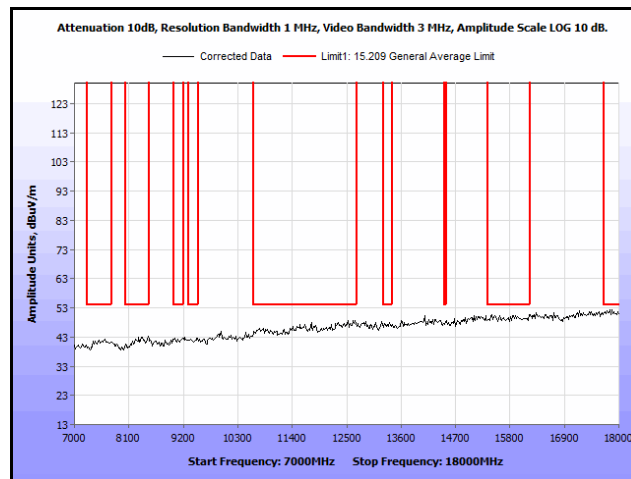


Plot 112. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 2462 MHz, 7 GHz – 18 GHz, Peak, Omni


Omni Antenna

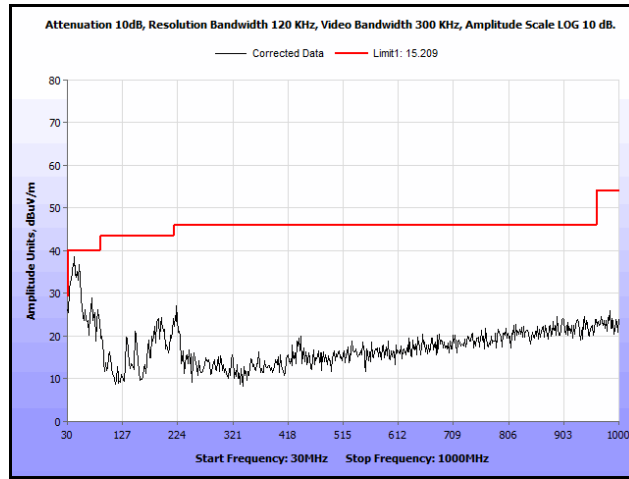


Plot 113. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni

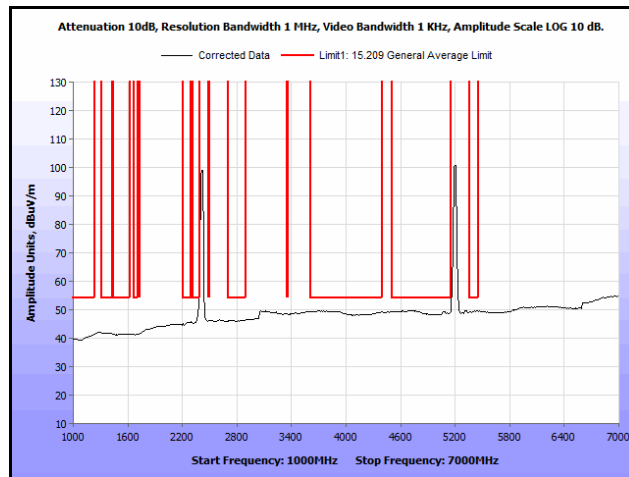


Plot 114. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni

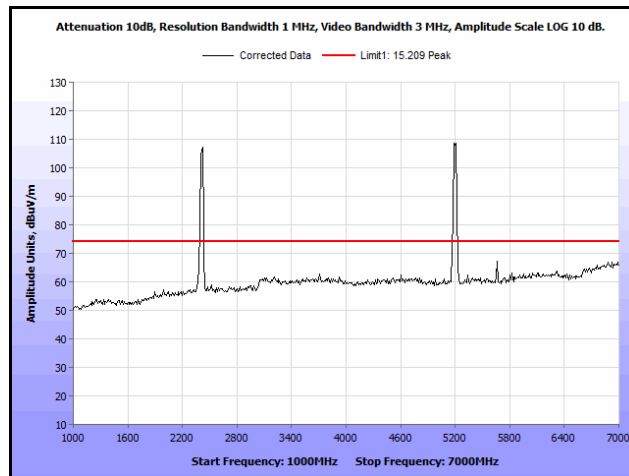


Plot 115. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni

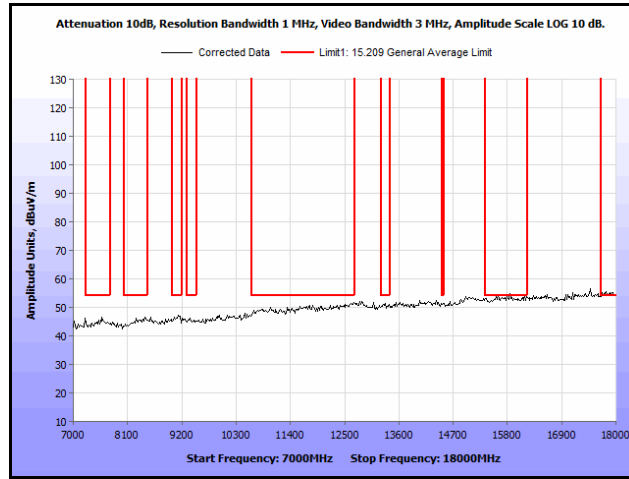


Plot 116. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni

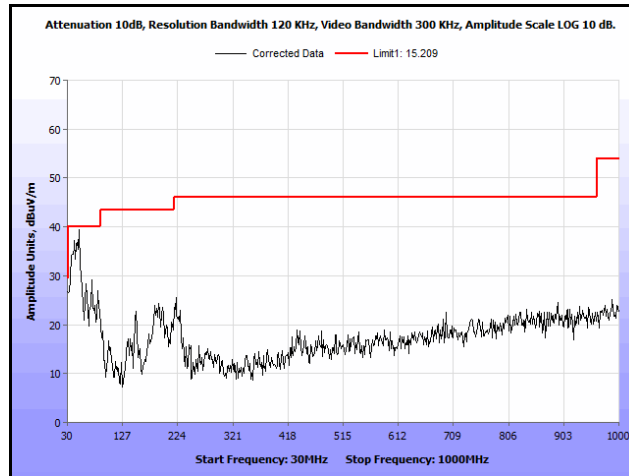


Plot 117. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni

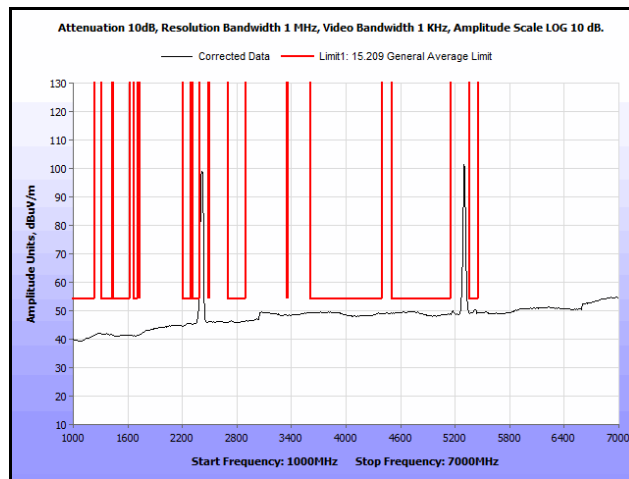


Plot 118. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni

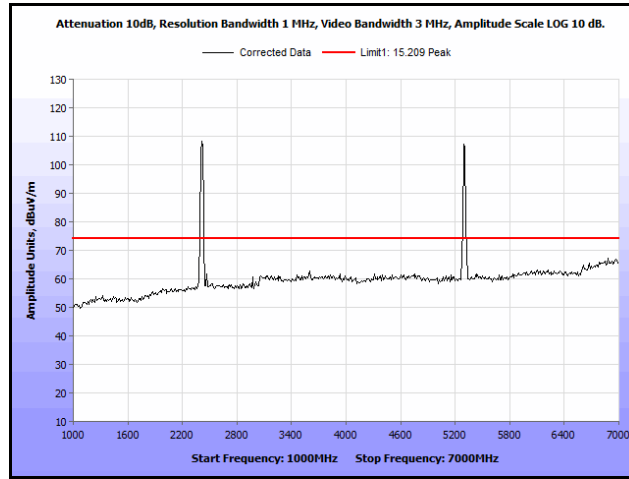


Plot 119. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni

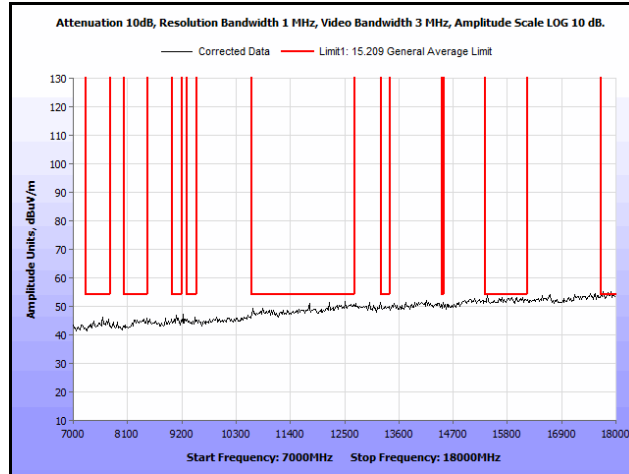


Plot 120. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni

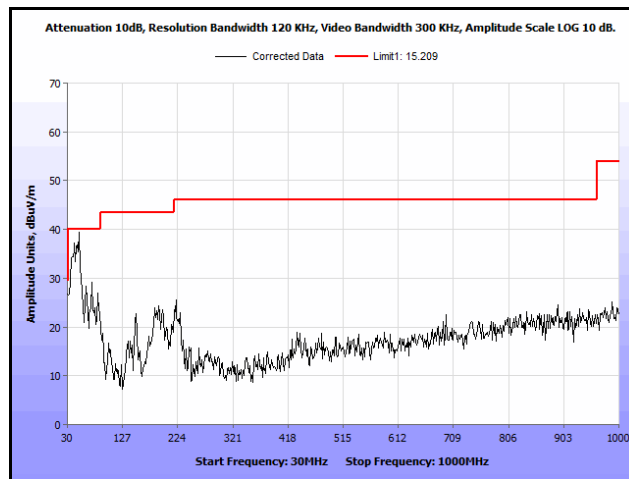


Plot 121. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni

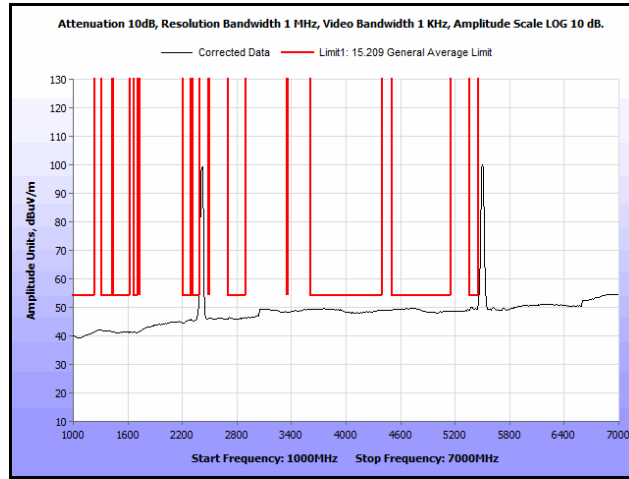


Plot 122. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni

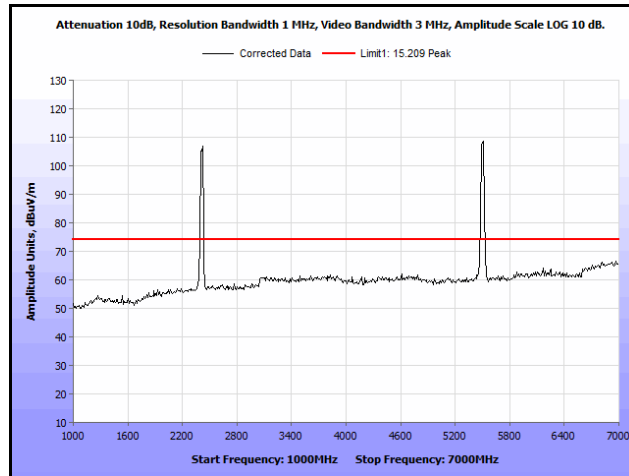


Plot 123. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni

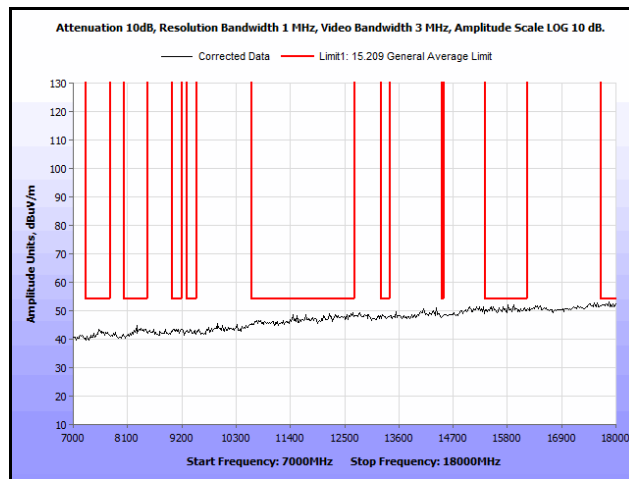


Plot 124. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni

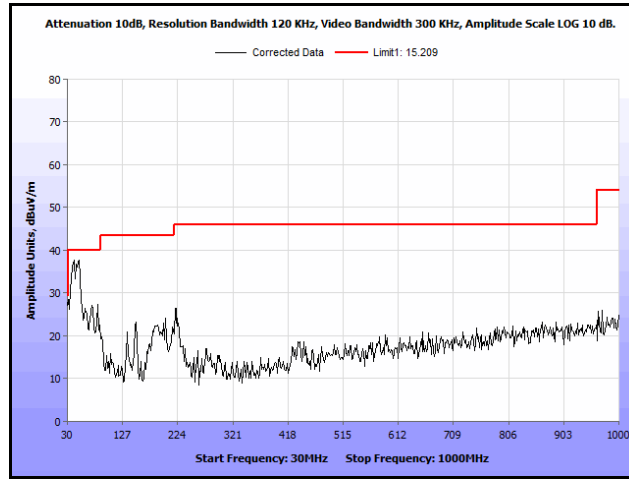


Plot 125. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

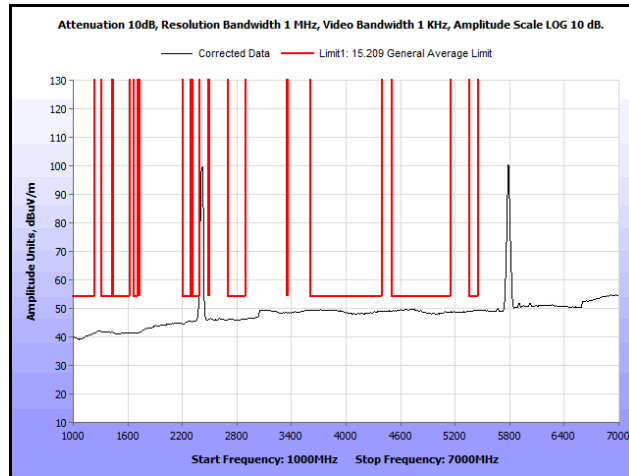


Plot 126. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

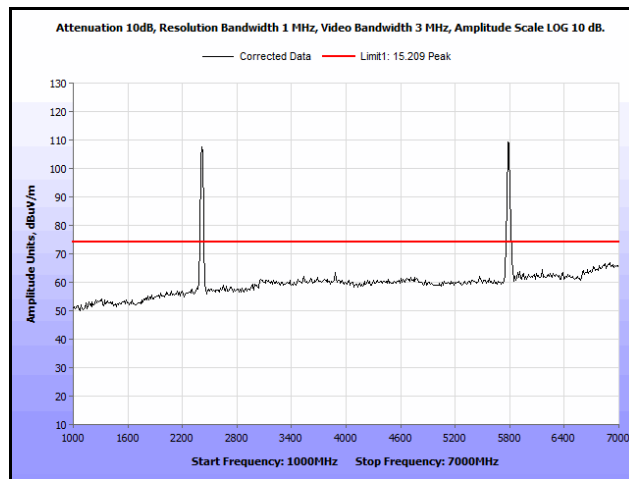


Plot 127. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

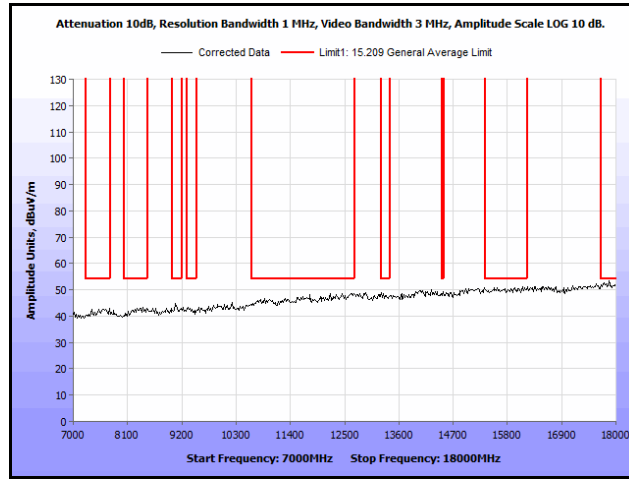


Plot 128. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni

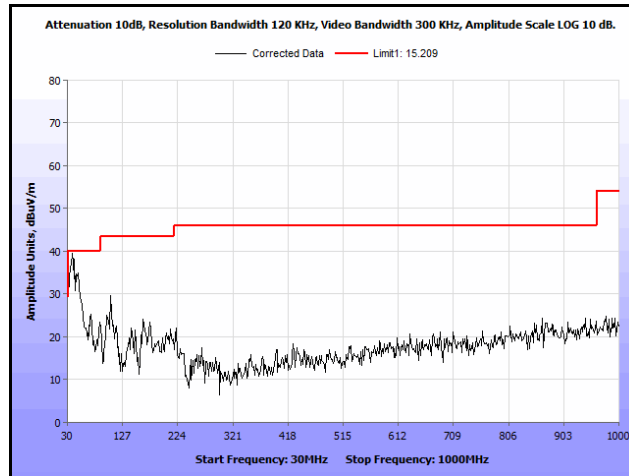


Plot 129. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni

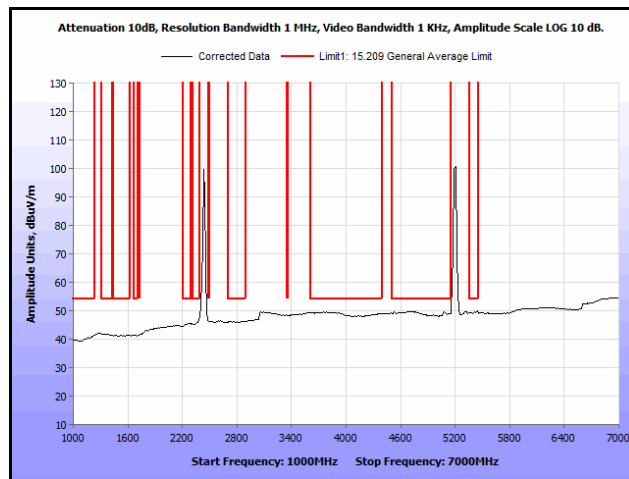


Plot 130. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni

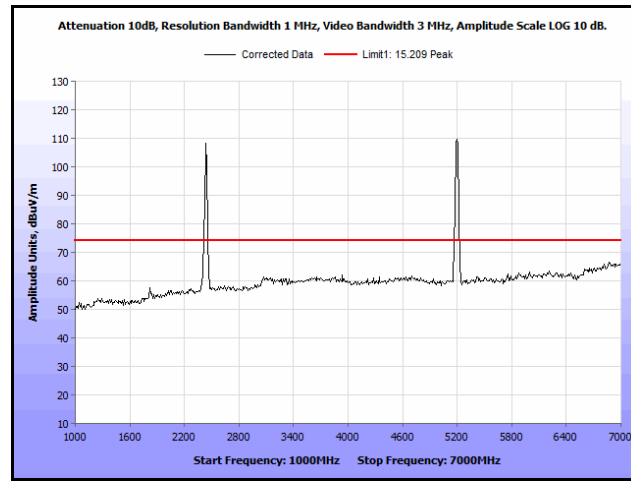


Plot 131. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni

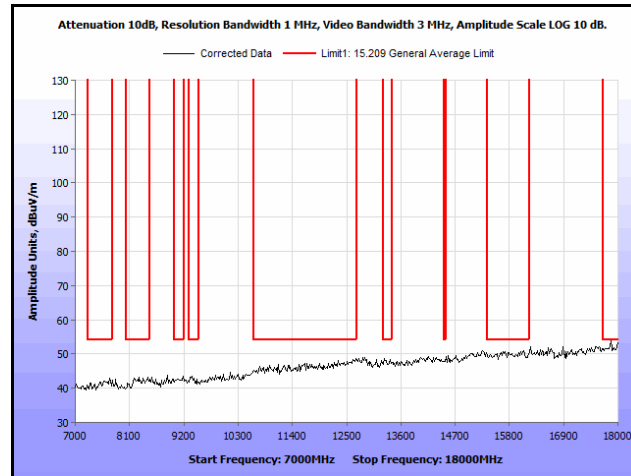


Plot 132. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni

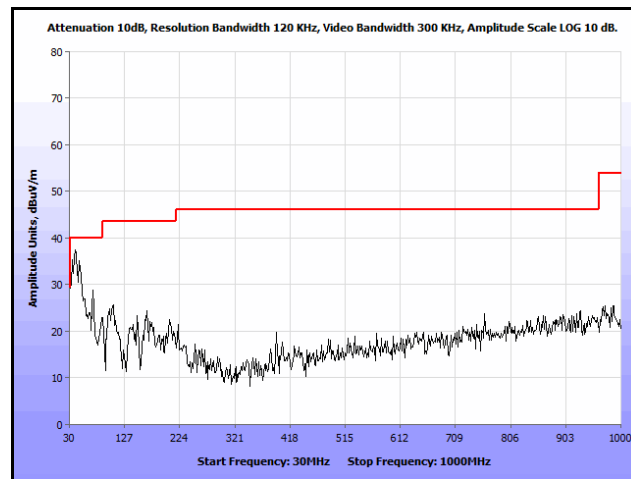


Plot 133. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni

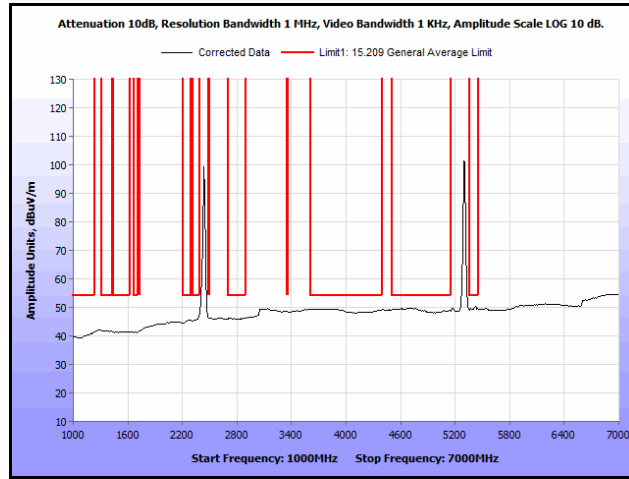


Plot 134. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni

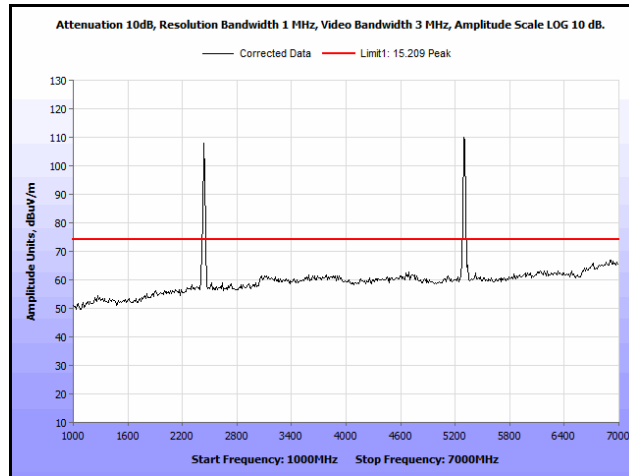


Plot 135. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni

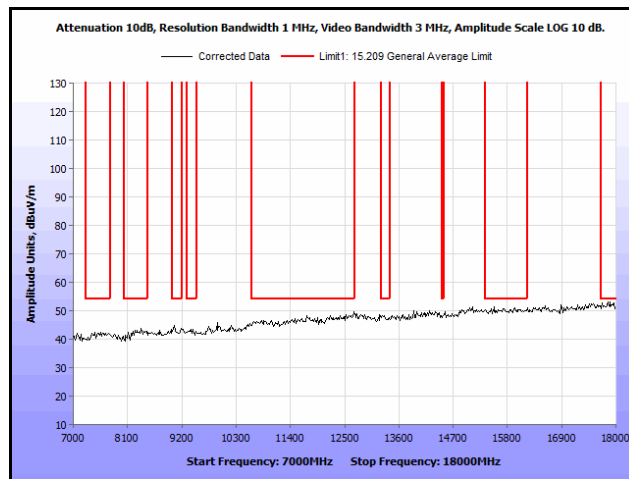


Plot 136. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni

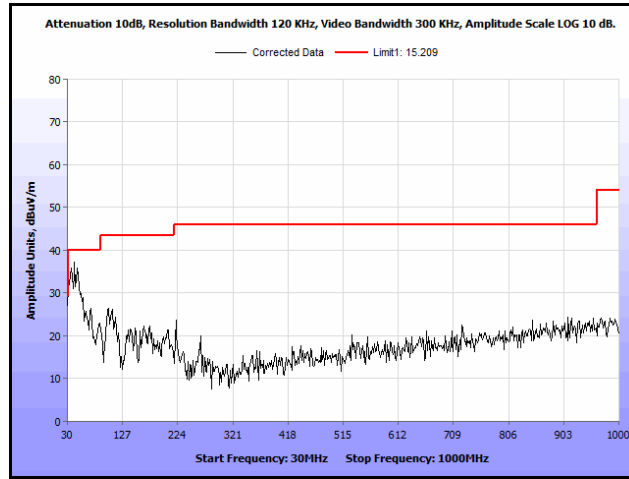


Plot 137. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni

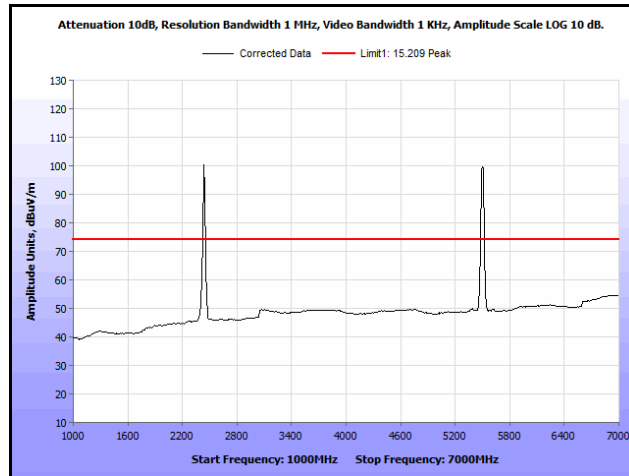


Plot 138. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni

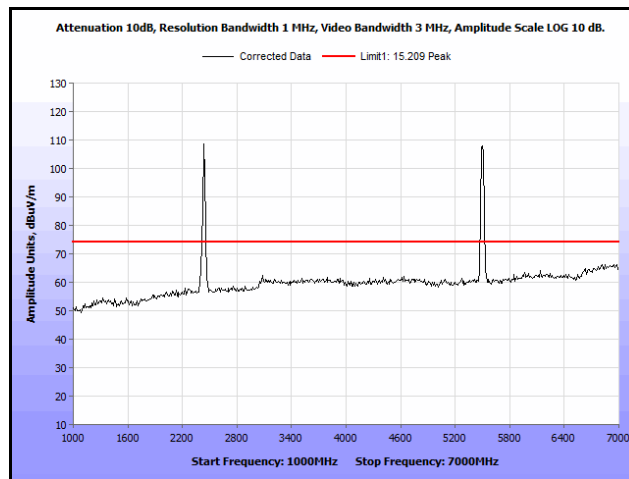


Plot 139. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni

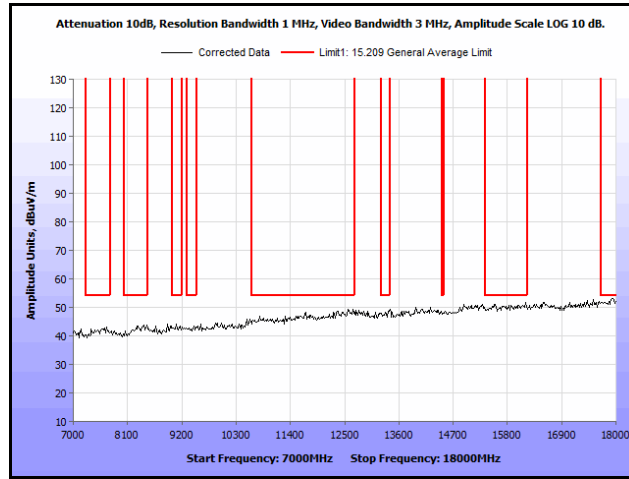


Plot 140. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni

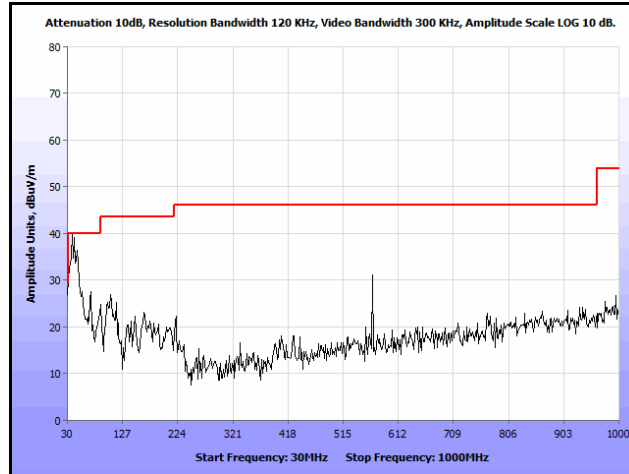


Plot 141. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

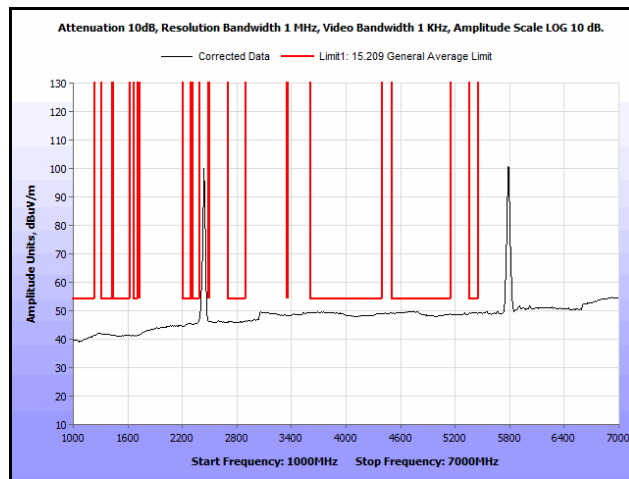


Plot 142. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

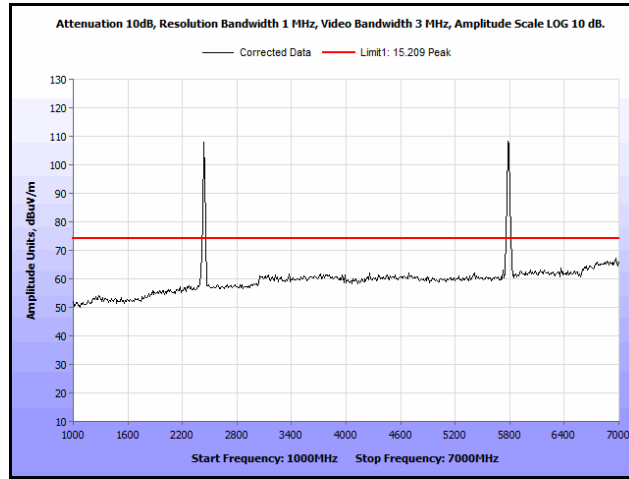


Plot 143. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

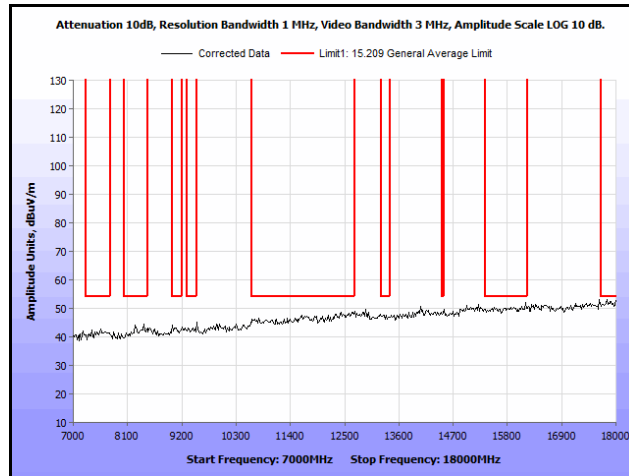


Plot 144. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni

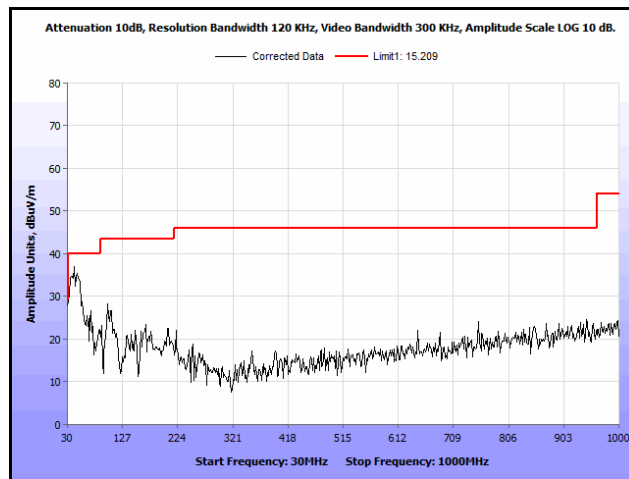


Plot 145. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni

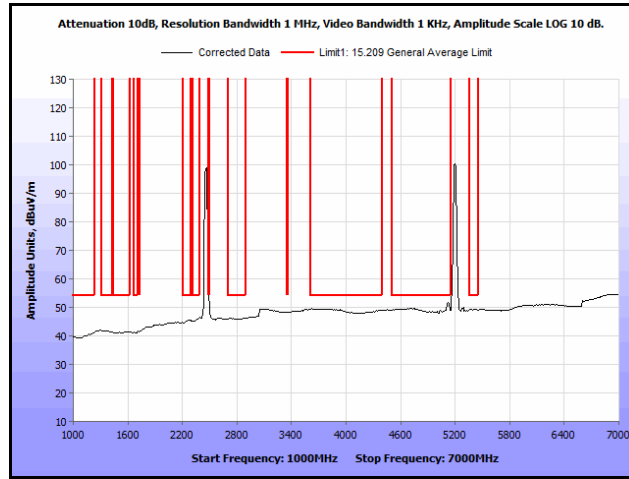


Plot 146. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni

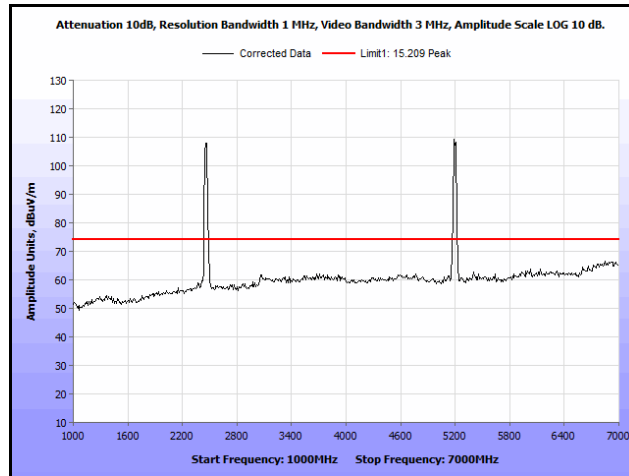


Plot 147. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni

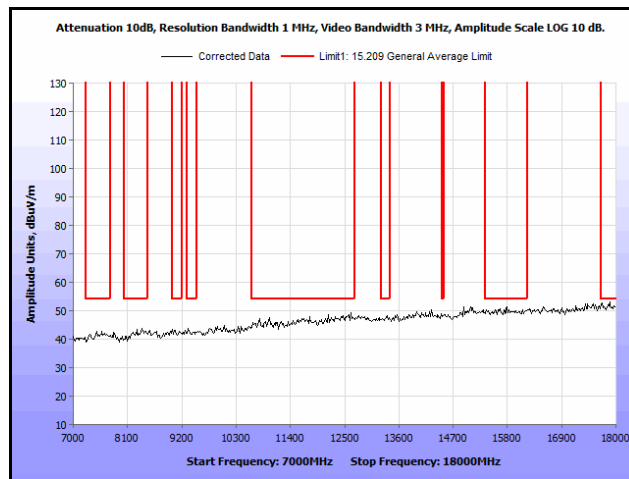


Plot 148. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni

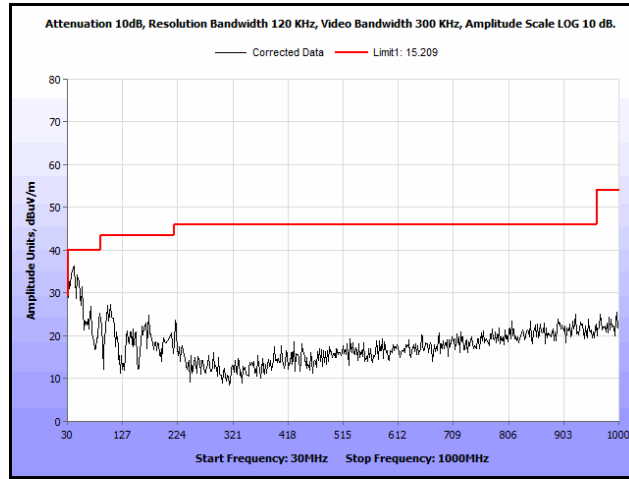


Plot 149. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni

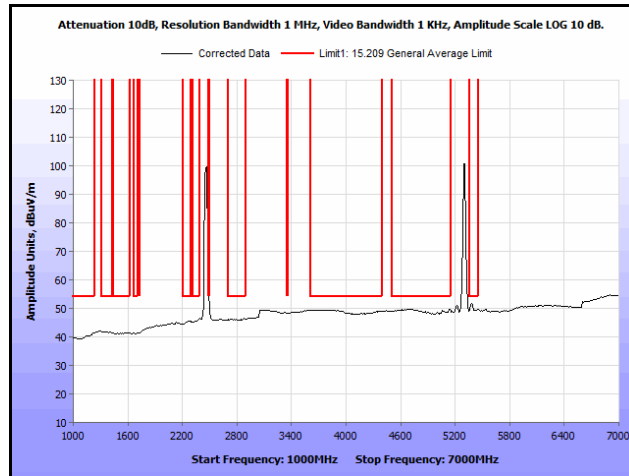


Plot 150. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni

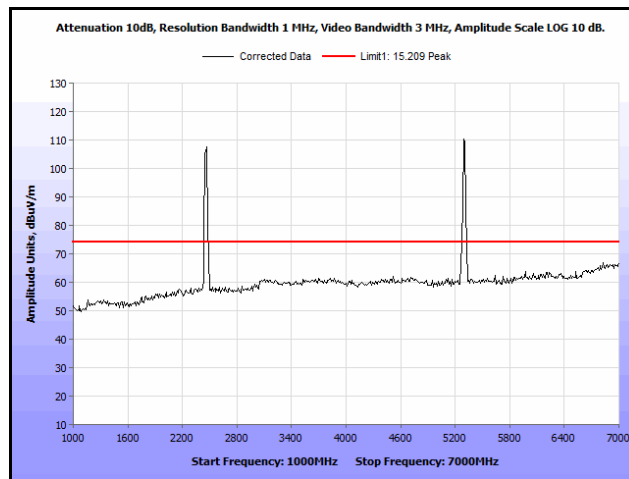


Plot 151. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni

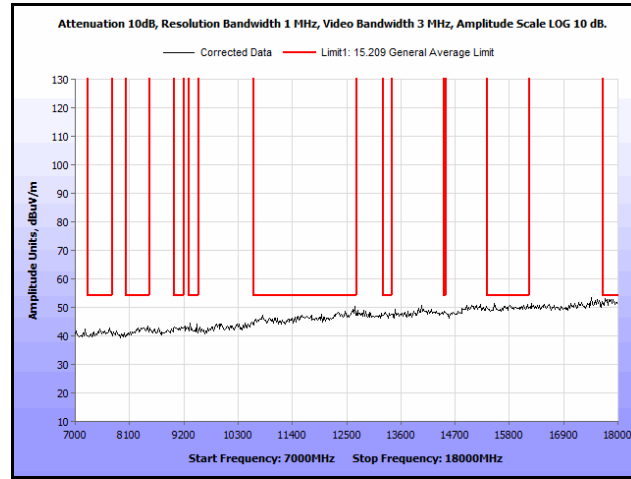


Plot 152. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni

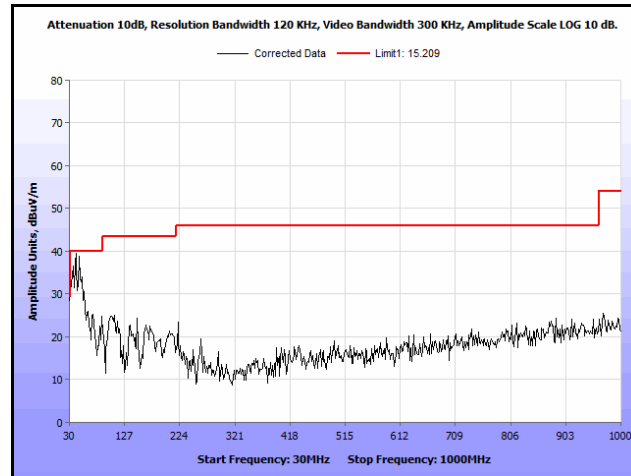


Plot 153. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni

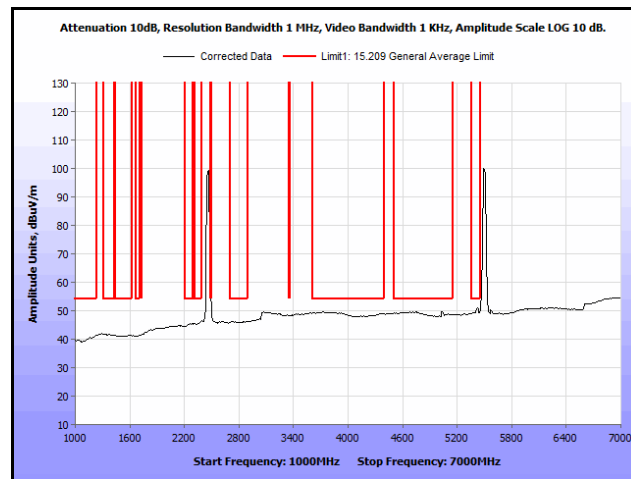


Plot 154. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni

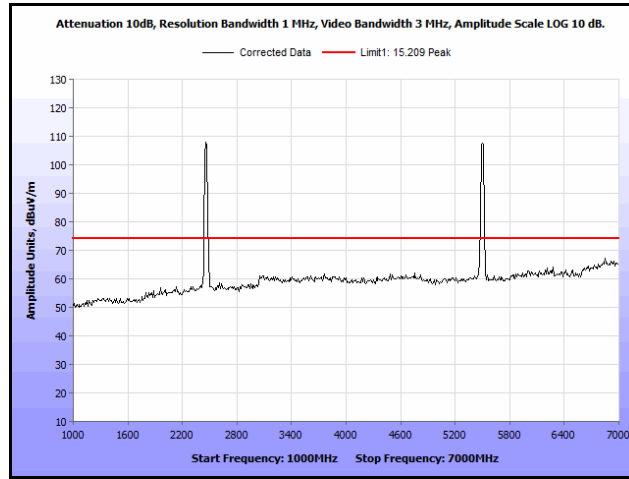


Plot 155. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni

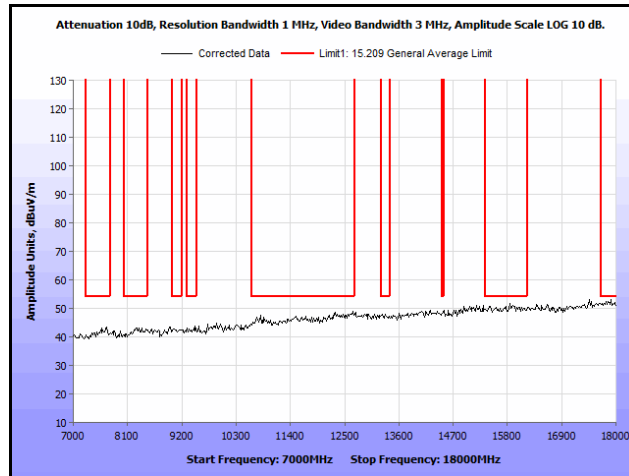


Plot 156. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni

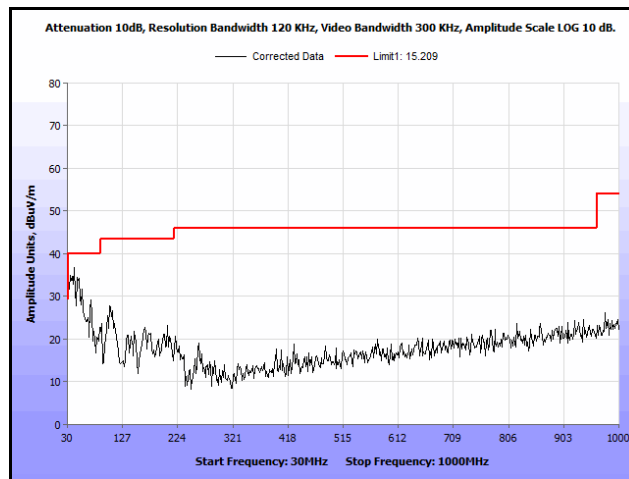


Plot 157. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

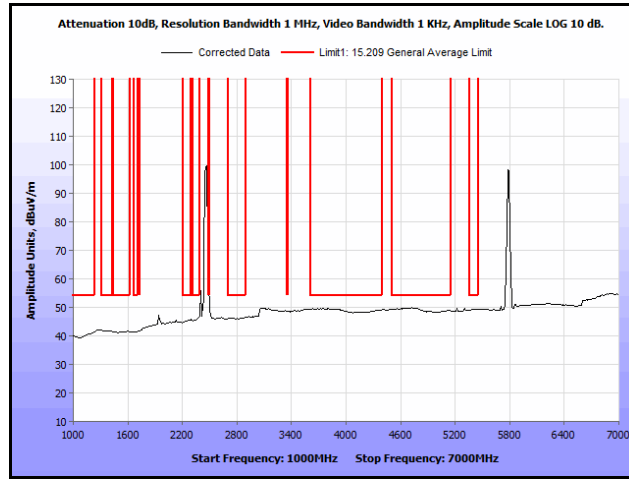

Plot 158. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

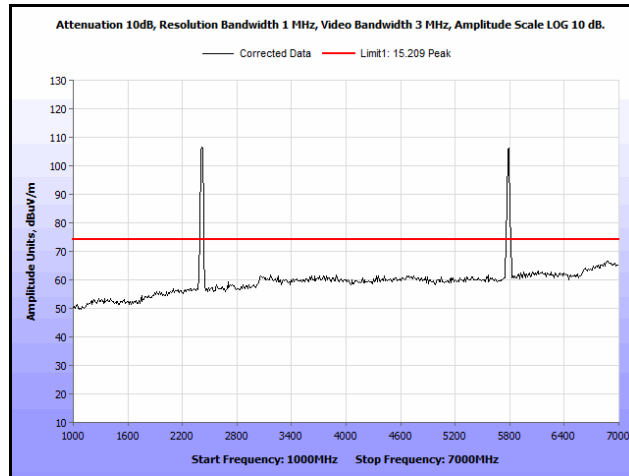


Plot 159. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

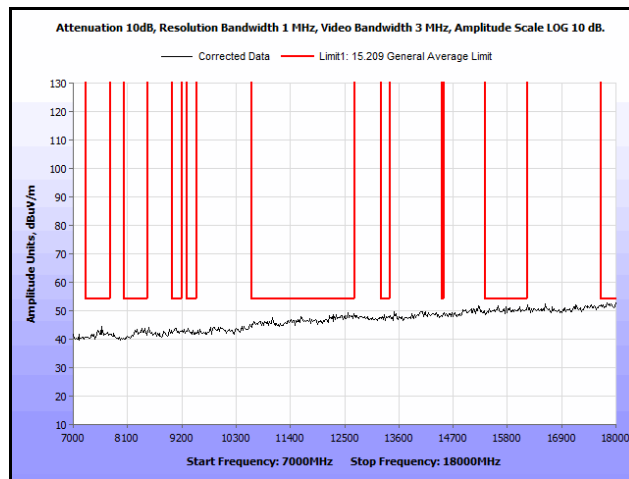


Plot 160. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni


Omni Antenna

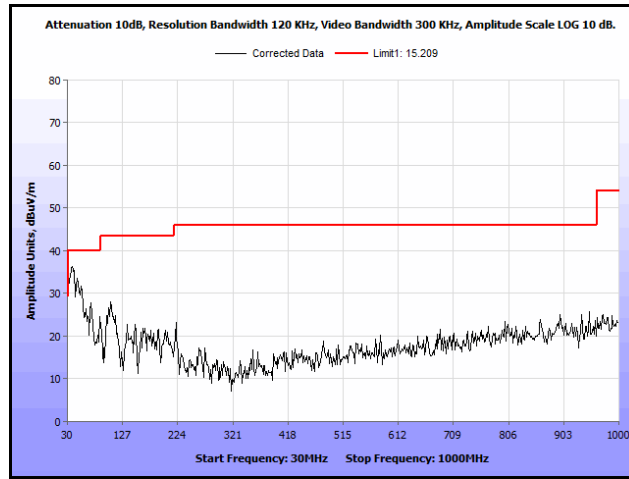


Plot 161. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Omni

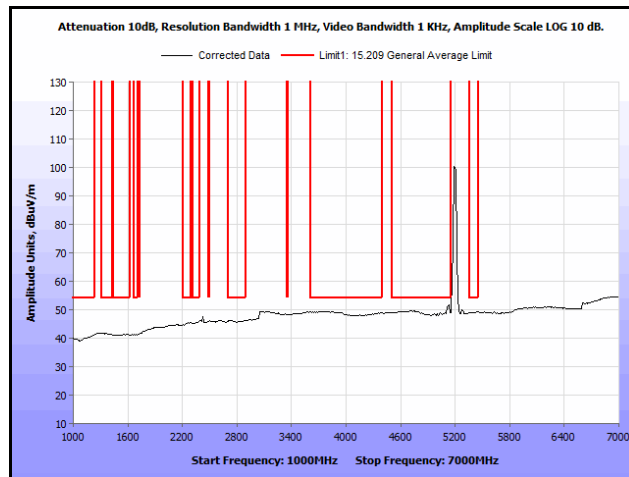


Plot 162. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Omni

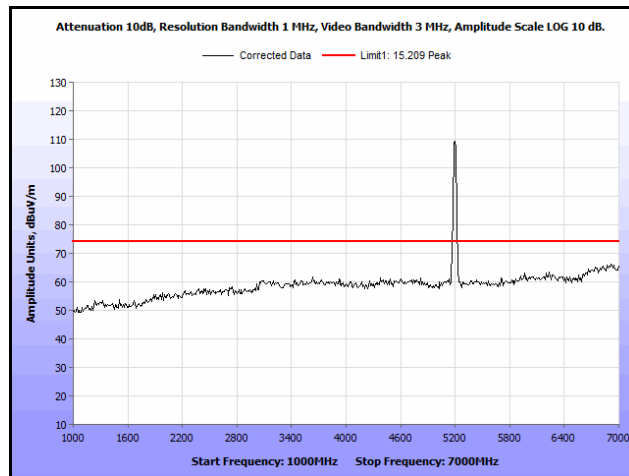


Plot 163. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Omni

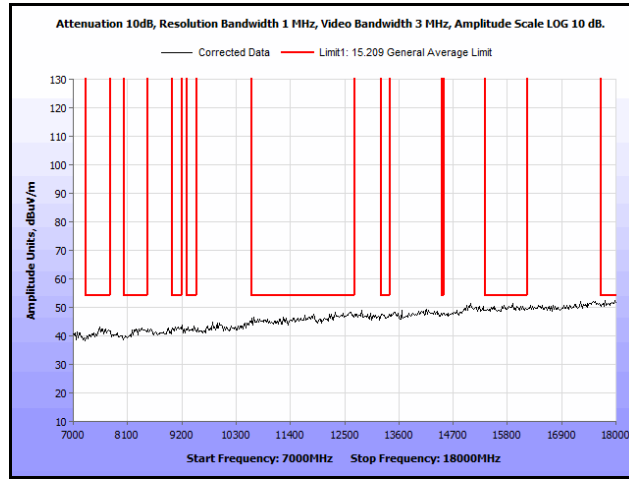


Plot 164. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Omni

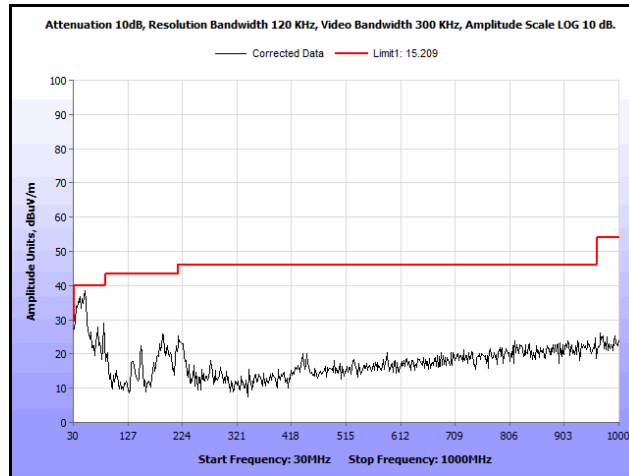


Plot 165. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni

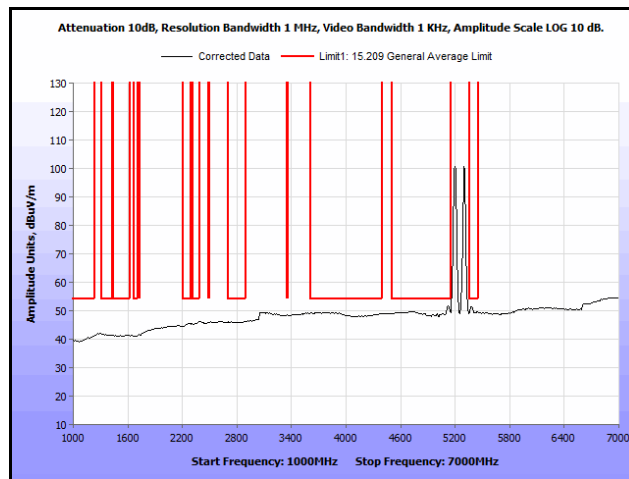


Plot 166. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni

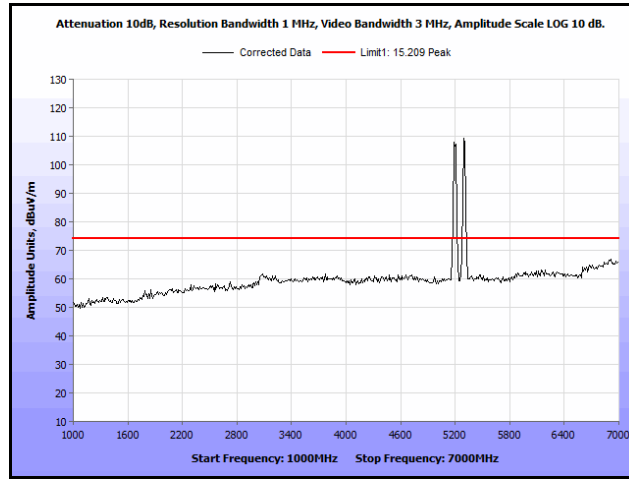


Plot 167. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni

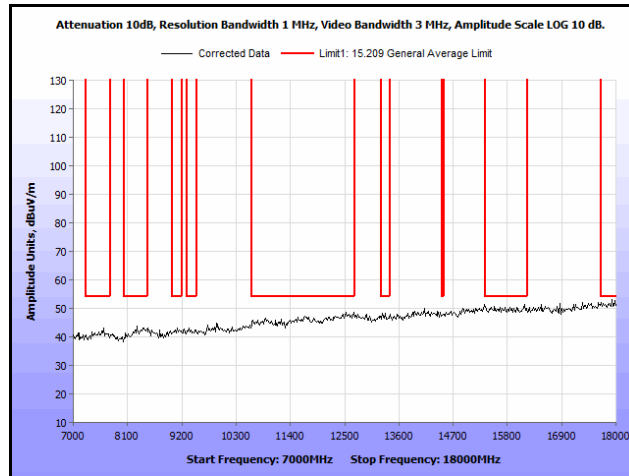


Plot 168. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni

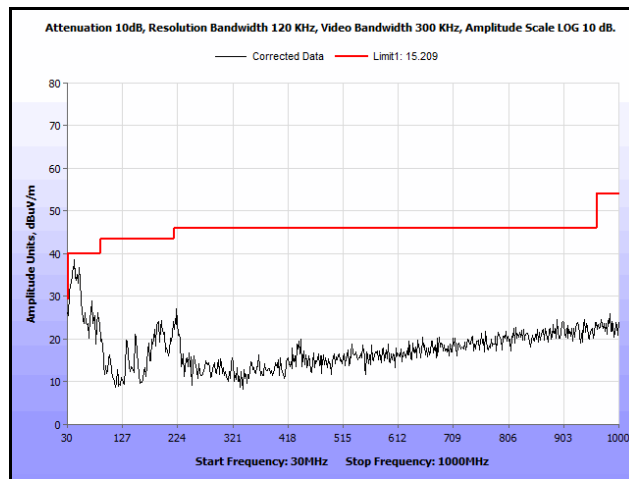


Plot 169. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni

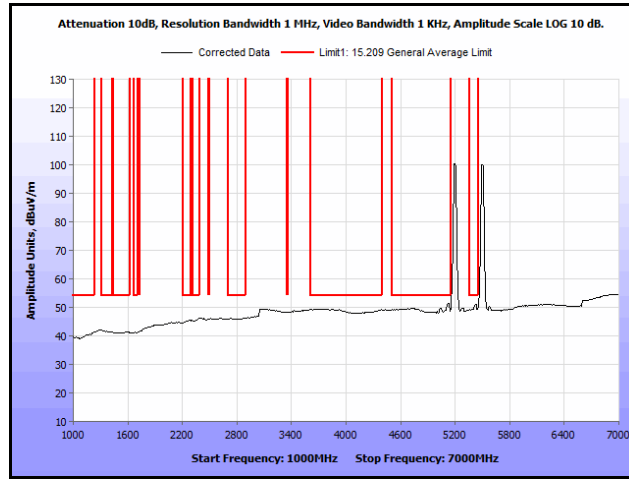


Plot 170. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni

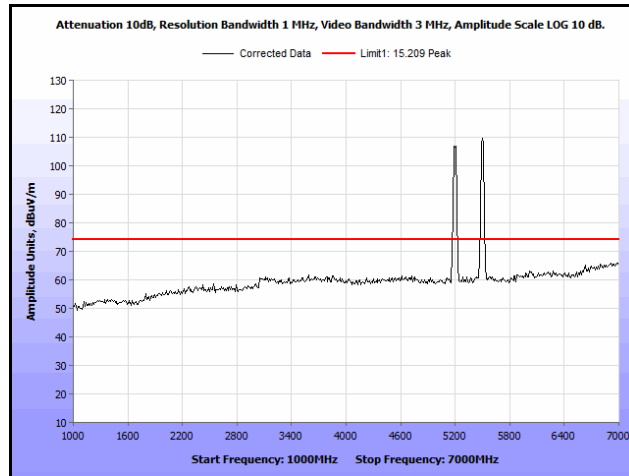


Plot 171. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni

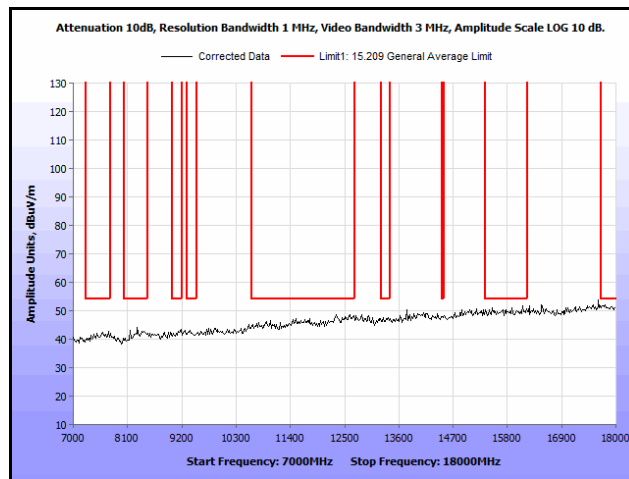


Plot 172. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni

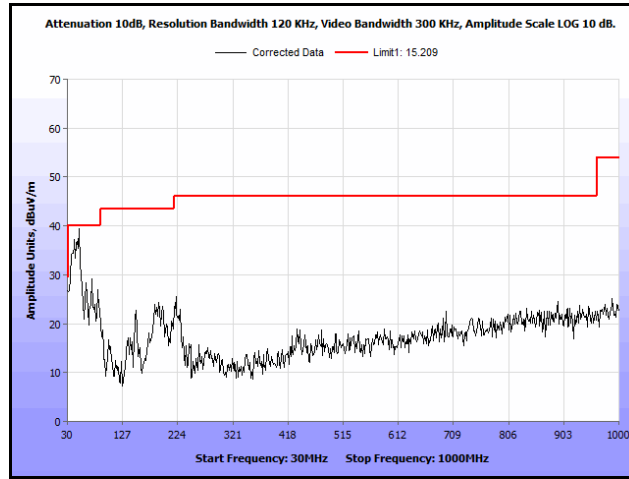


Plot 173. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

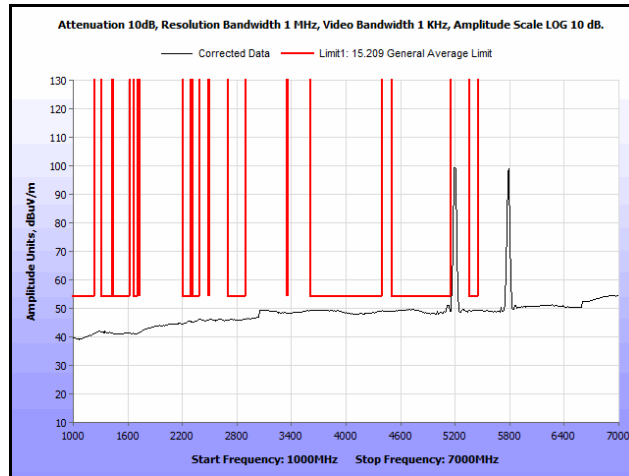


Plot 174. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

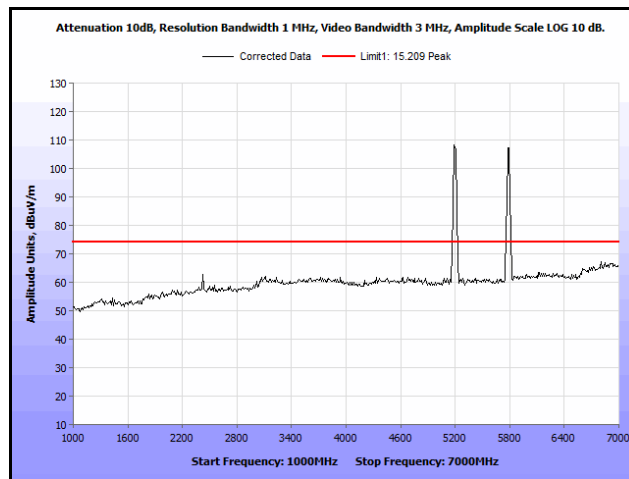


Plot 175. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

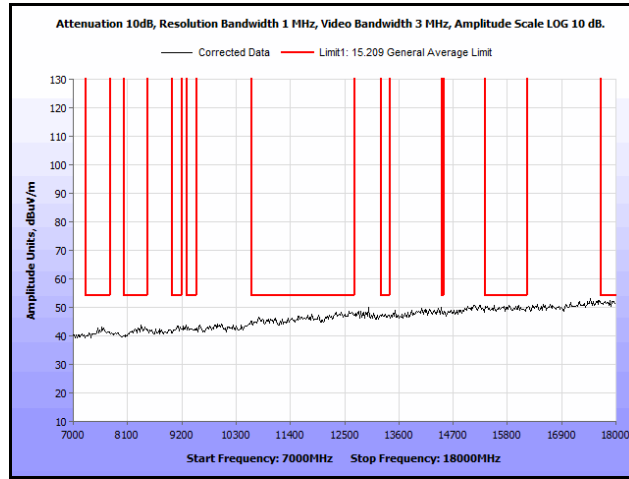


Plot 176. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5200 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni

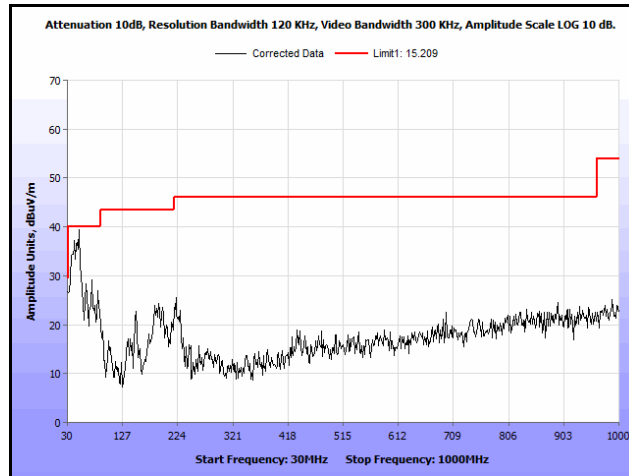


Plot 177. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Omni

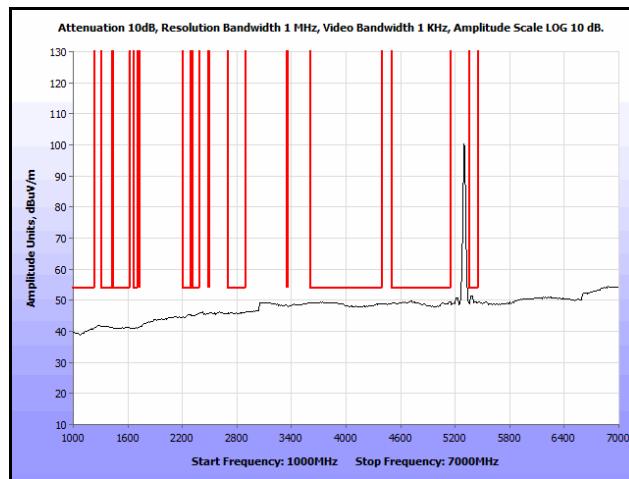


Plot 178. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Omni

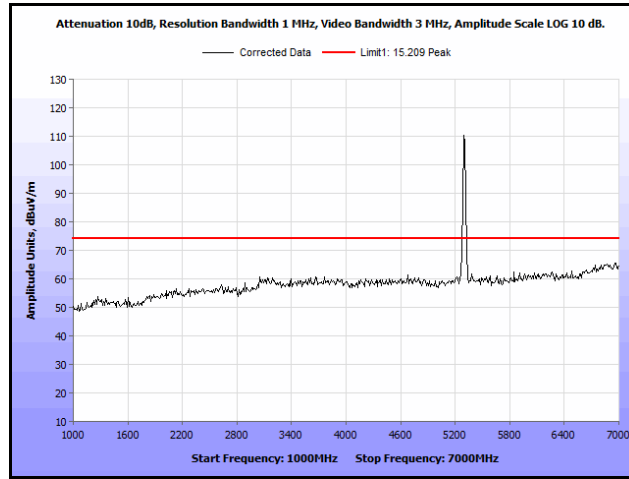


Plot 179. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Omni

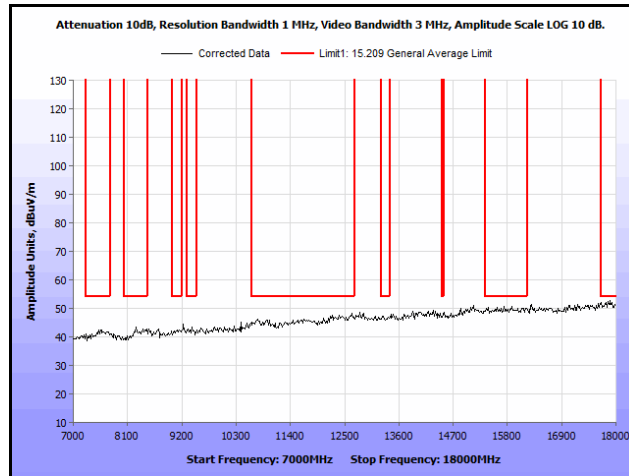


Plot 180. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Omni

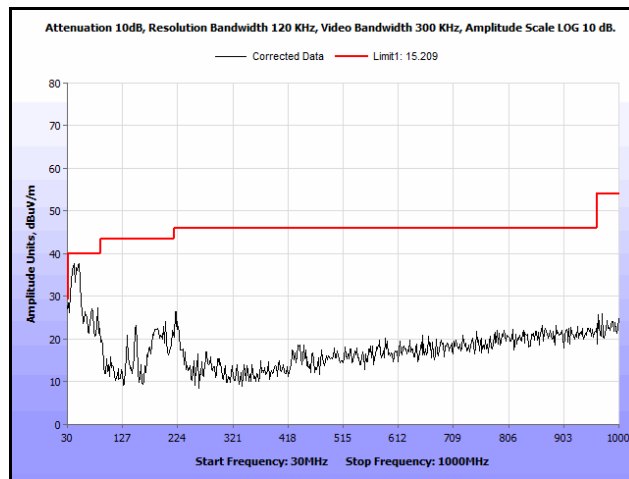


Plot 181. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni

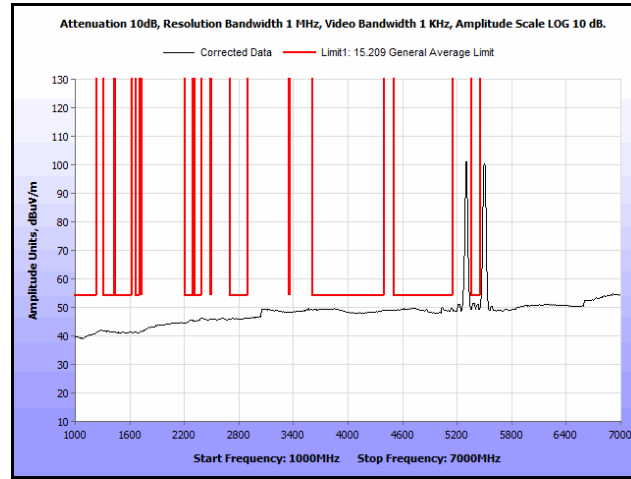


Plot 182. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni

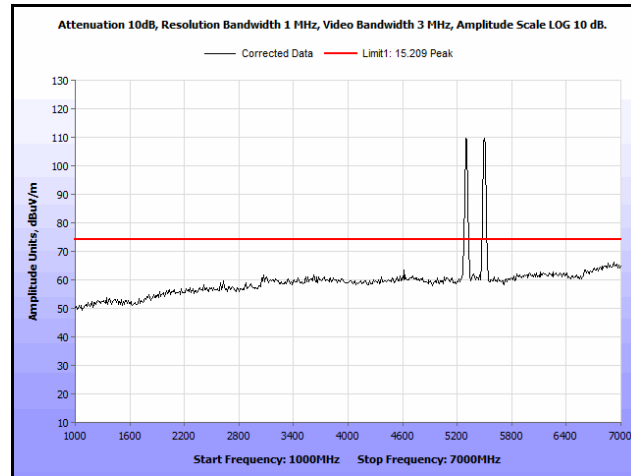


Plot 183. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni

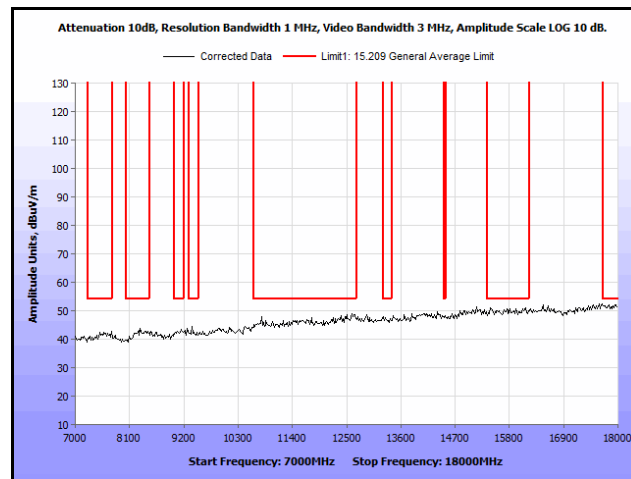


Plot 184. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni

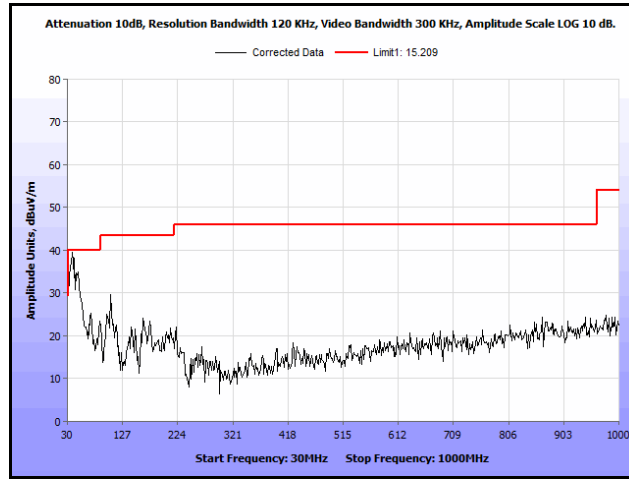


Plot 185. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

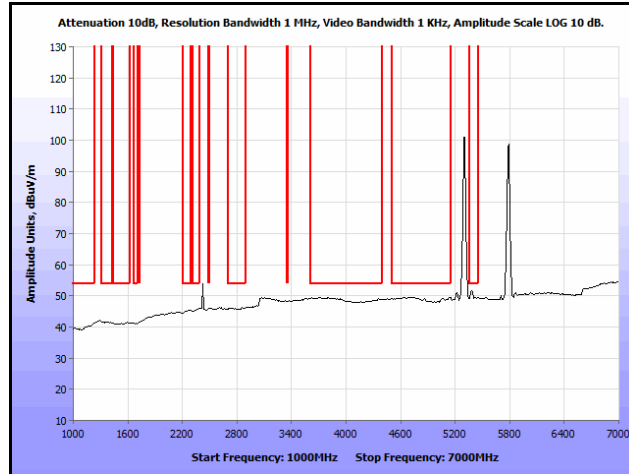


Plot 186. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

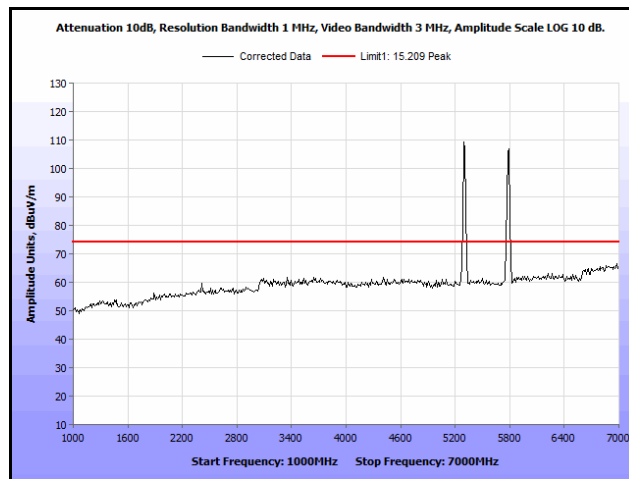


Plot 187. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

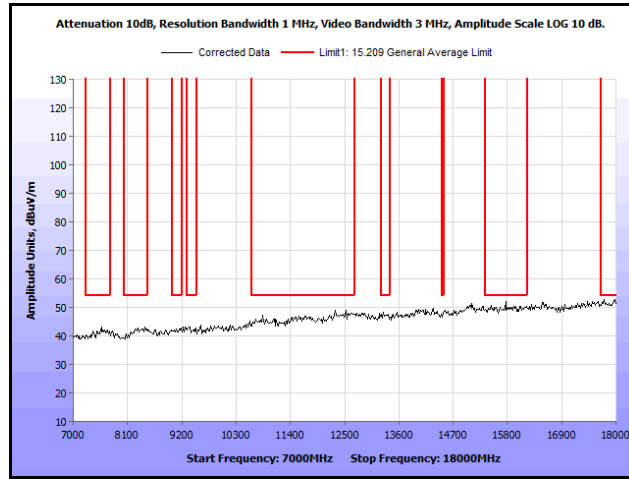


Plot 188. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5300 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni

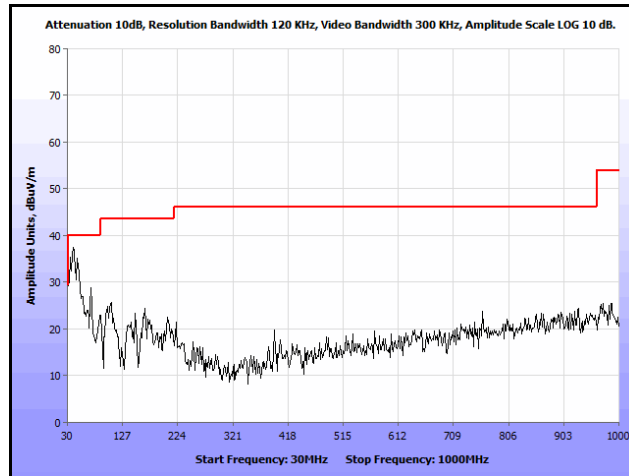


Plot 189. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Omni

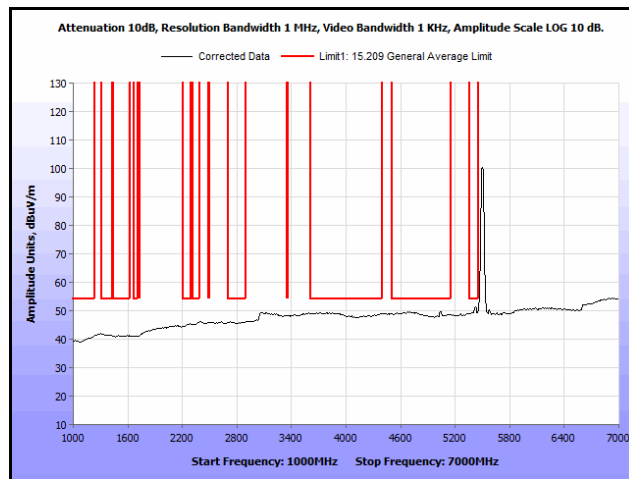


Plot 190. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Omni

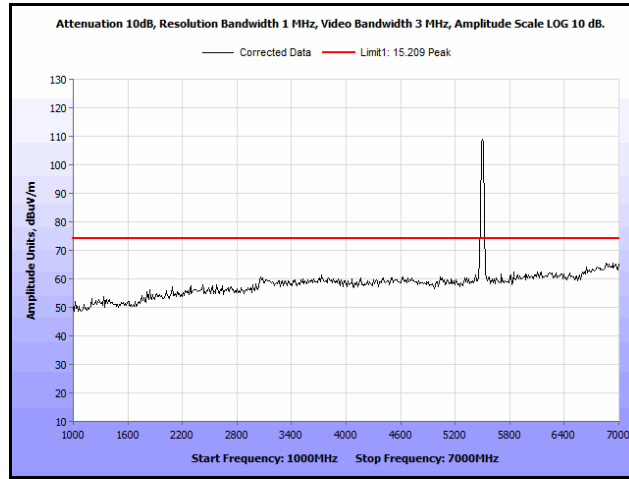


Plot 191. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Omni

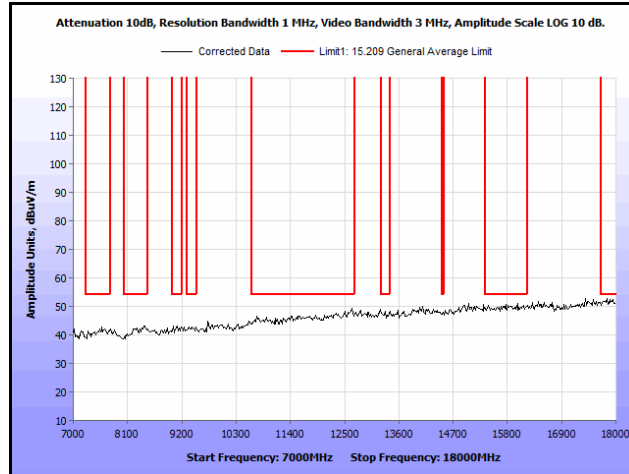


Plot 192. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Omni

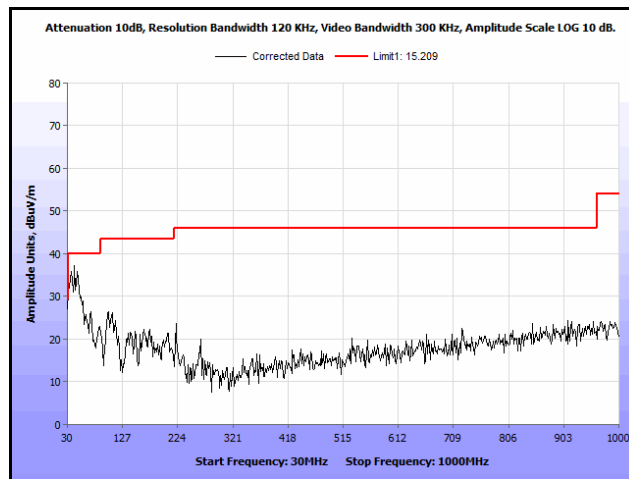


Plot 193. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

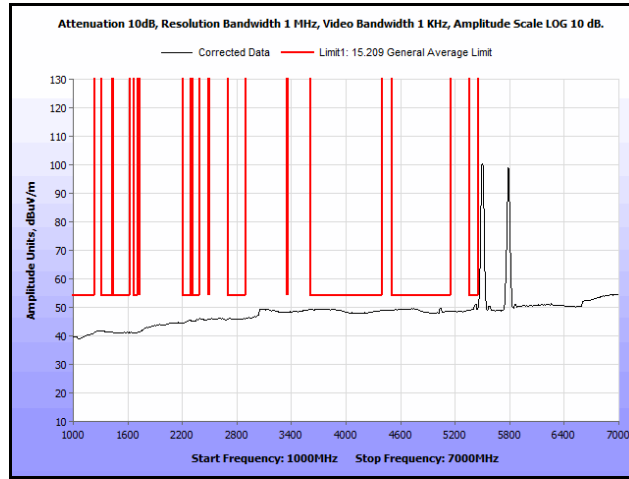


Plot 194. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

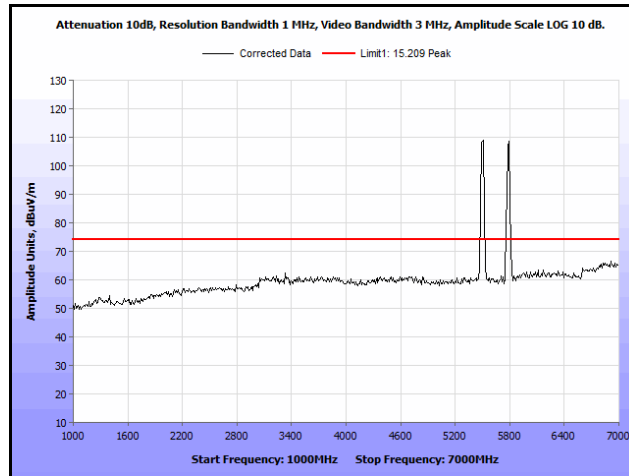


Plot 195. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

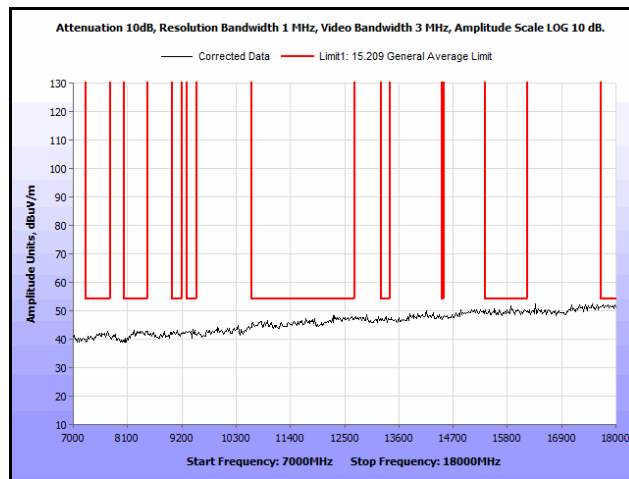


Plot 196. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5580 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni

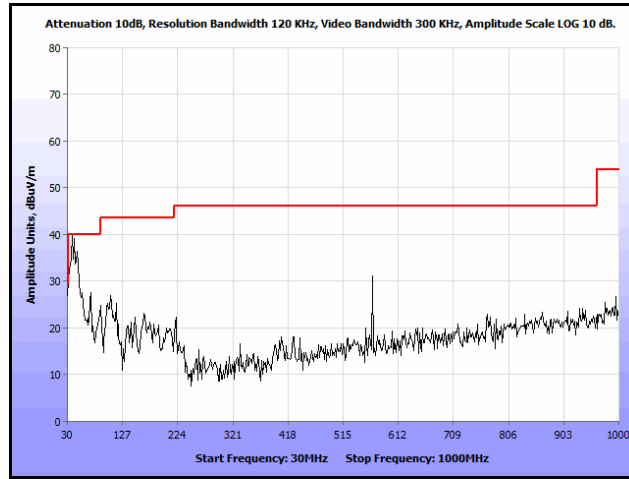


Plot 197. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Omni

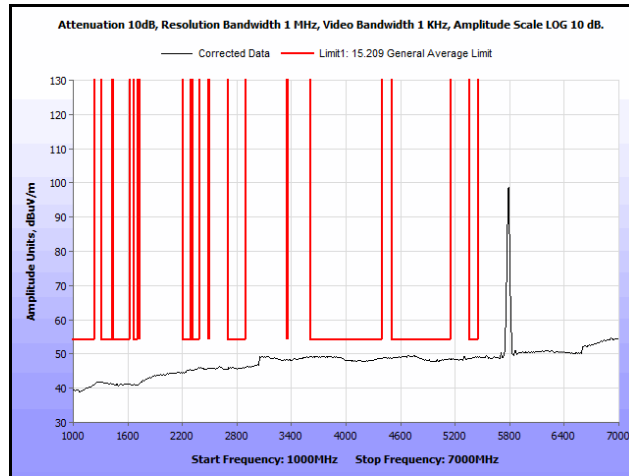

Plot 198. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Omni

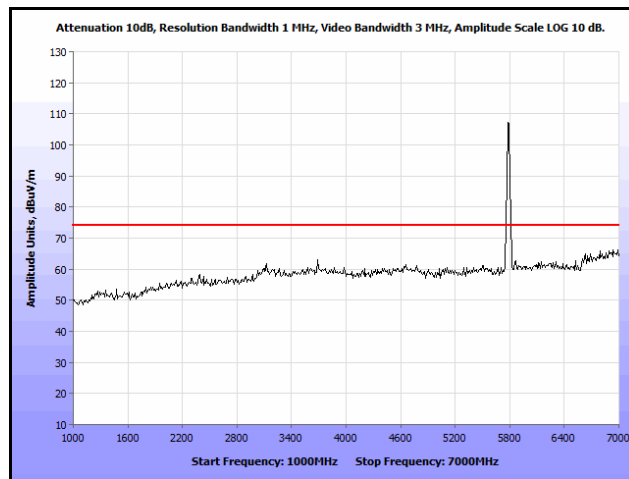


Plot 199. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Omni

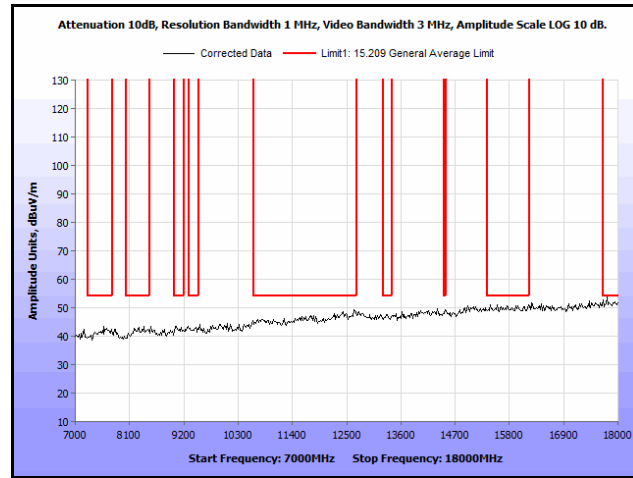


Plot 200. Radiated Spurs, Co-Location, 802.11n 20 MHz, 5785 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Omni


Patch Antenna

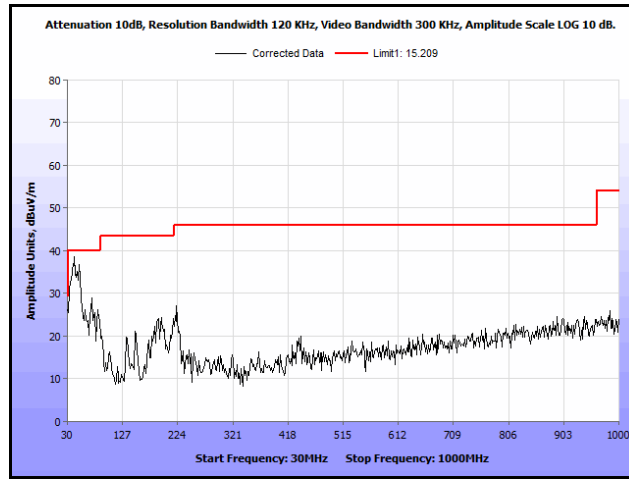


Plot 201. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Patch

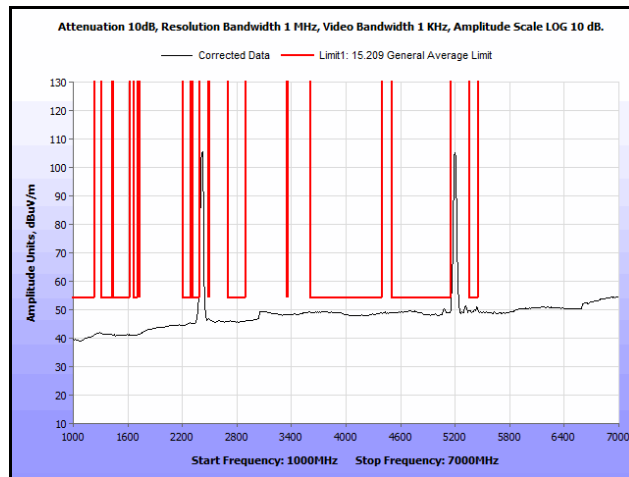


Plot 202. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Patch

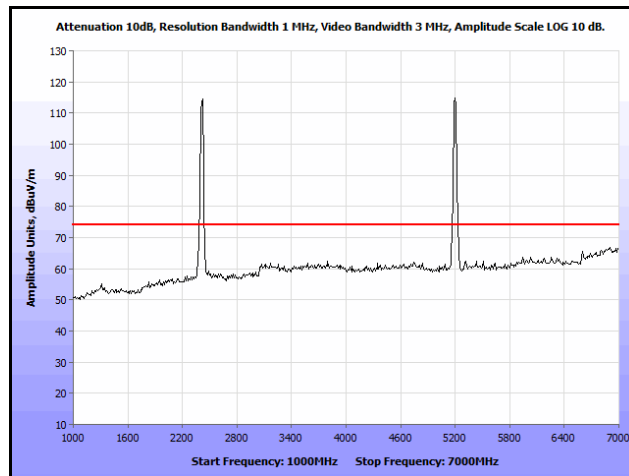


Plot 203. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Patch

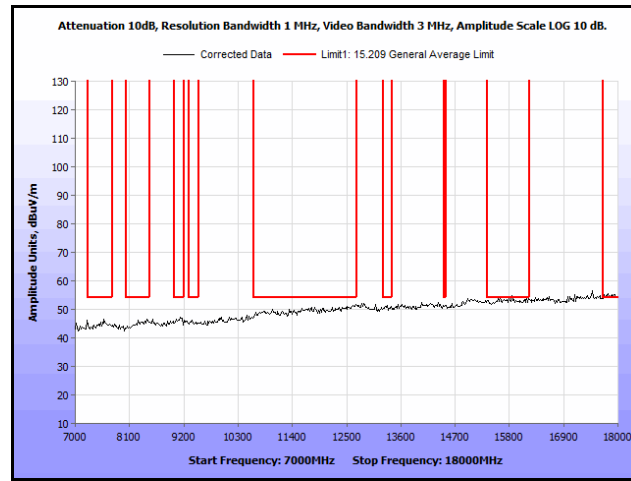


Plot 204. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Patch

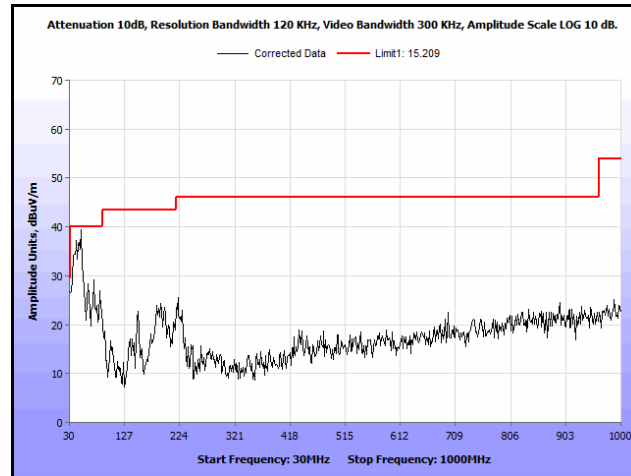


Plot 205. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Patch

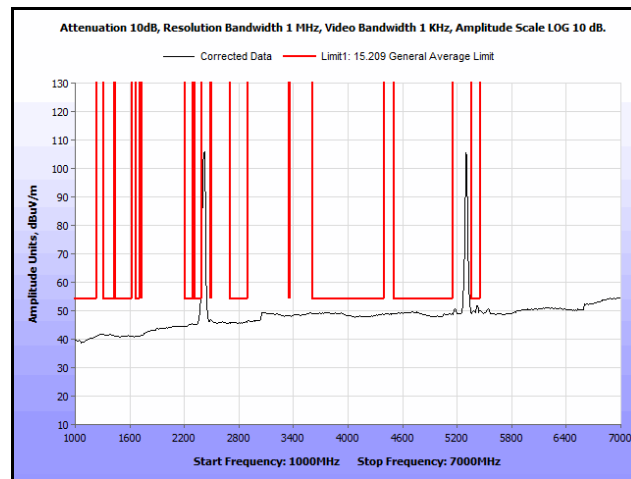


Plot 206. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Patch

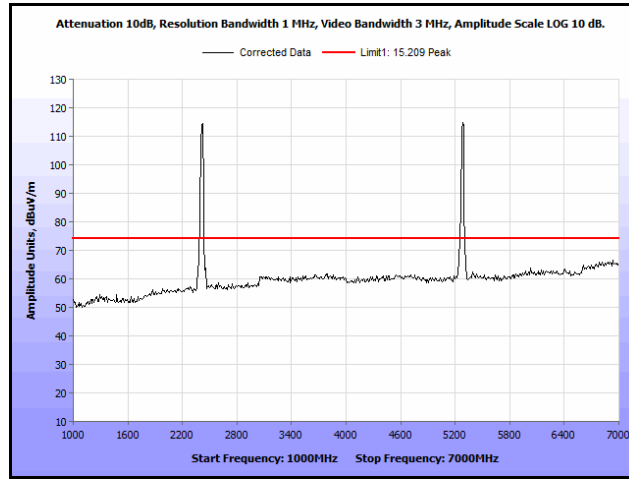


Plot 207. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Patch

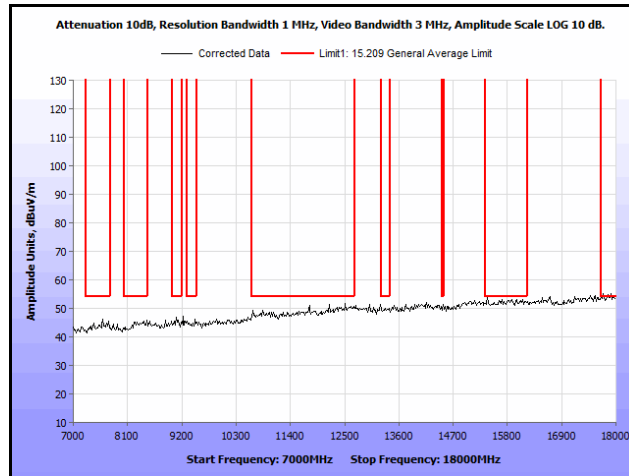


Plot 208. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Patch

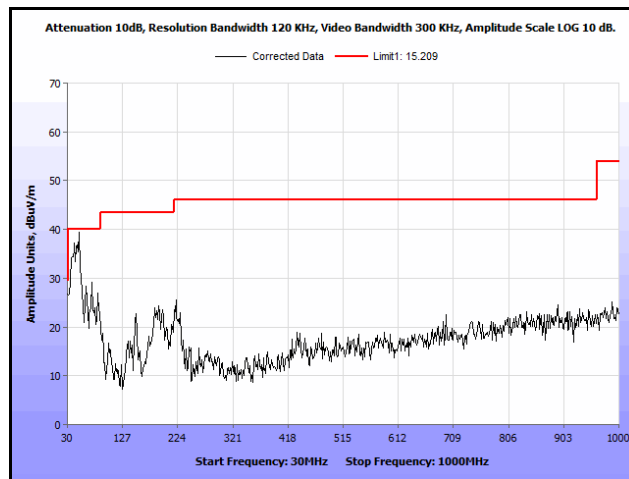


Plot 209. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Patch

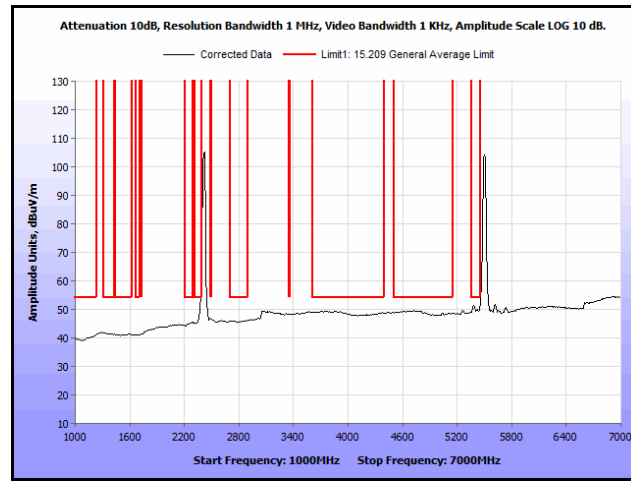


Plot 210. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Patch

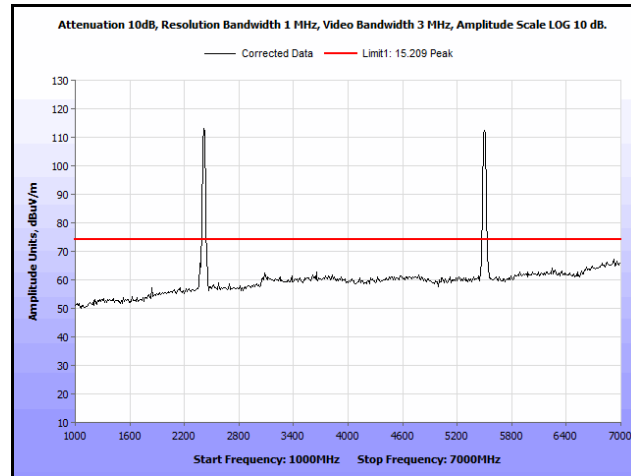


Plot 211. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Patch

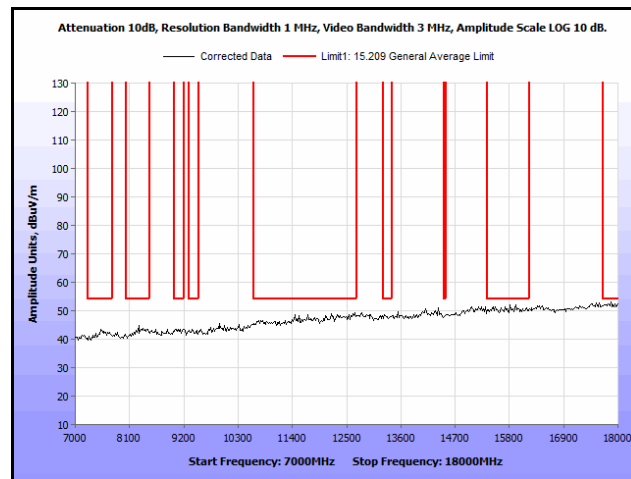


Plot 212. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Patch

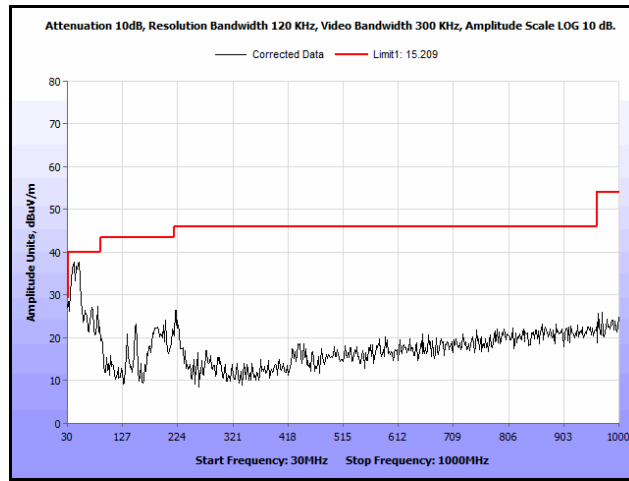


Plot 213. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Patch

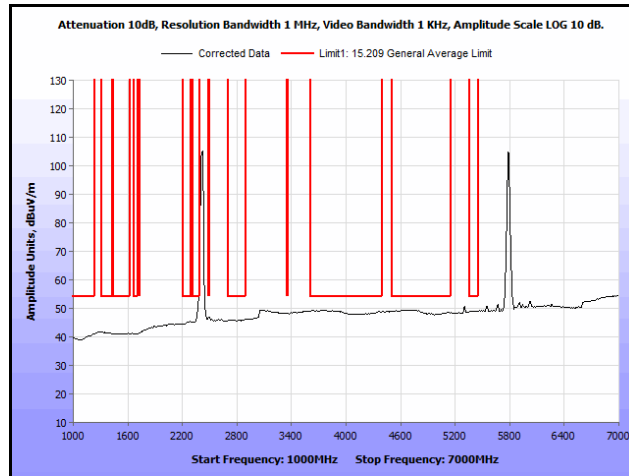


Plot 214. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Patch

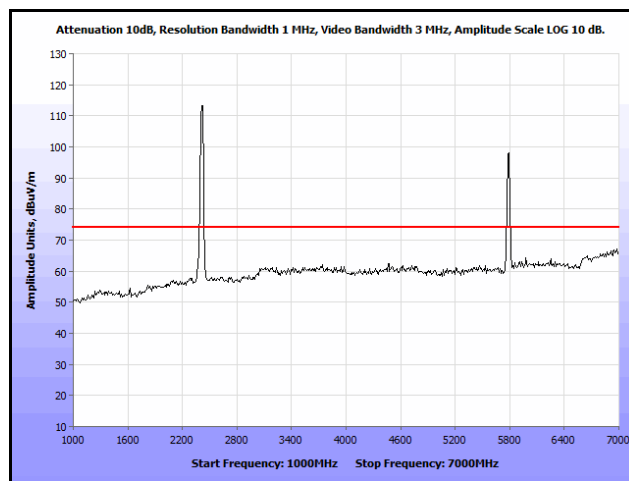


Plot 215. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Patch

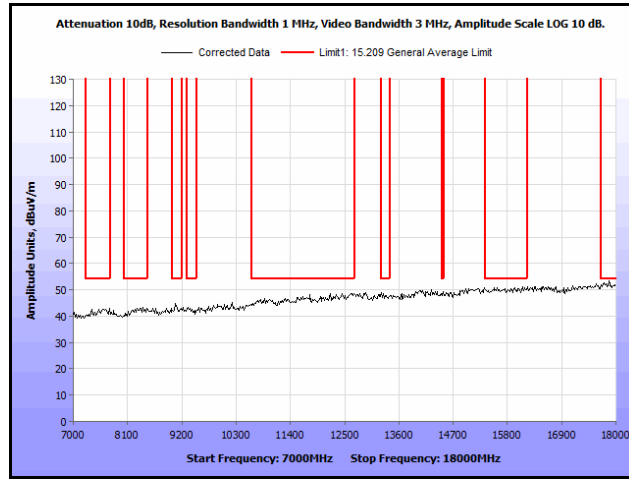


Plot 216. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2412 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Patch

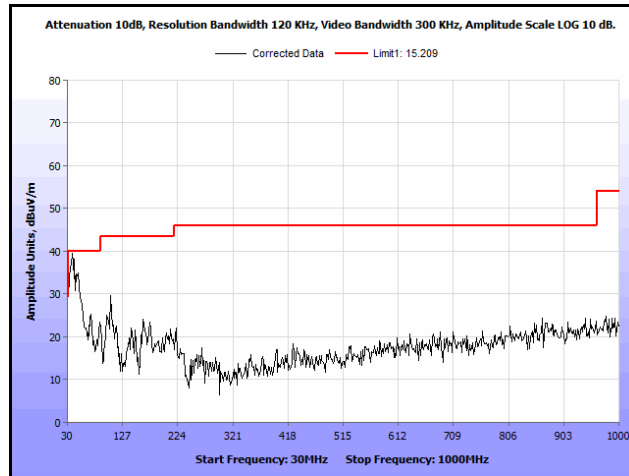


Plot 217. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Patch

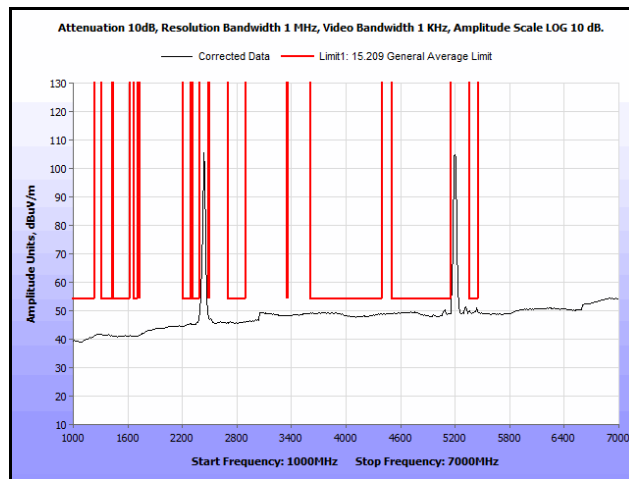


Plot 218. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Patch

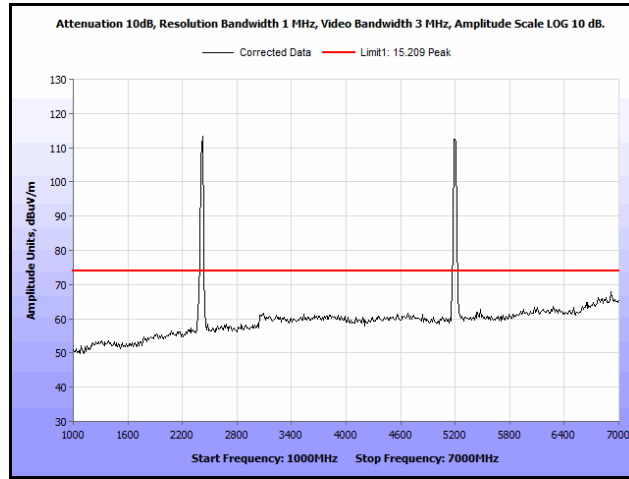


Plot 219. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Patch

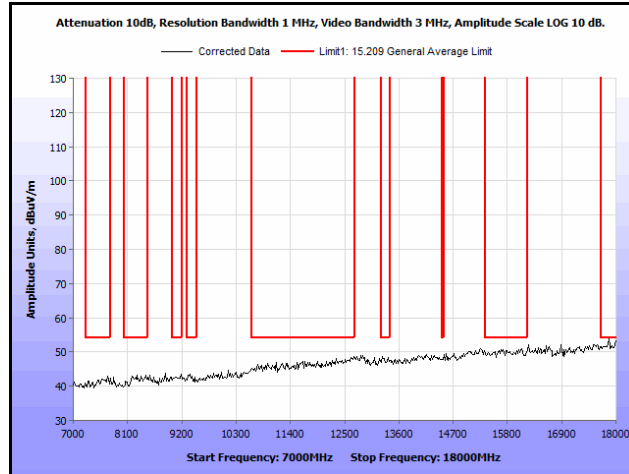


Plot 220. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Patch

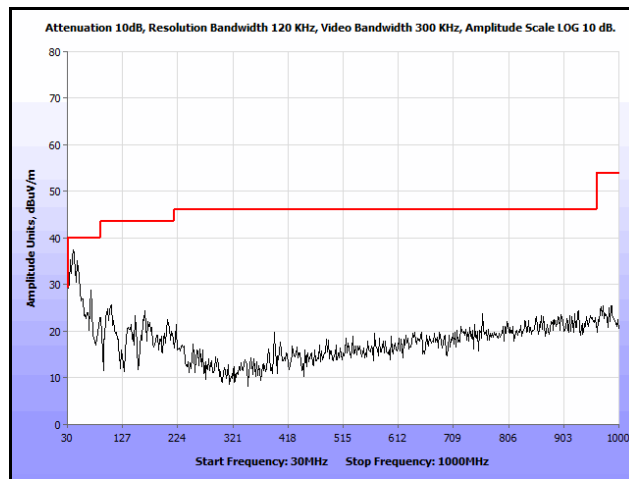


Plot 221. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Patch

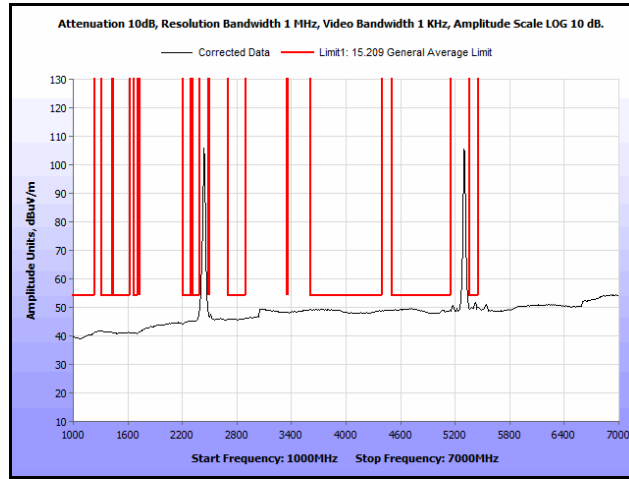


Plot 222. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Patch

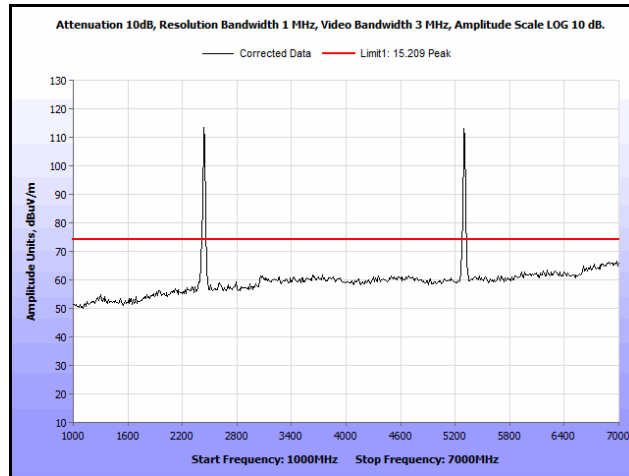


Plot 223. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Patch

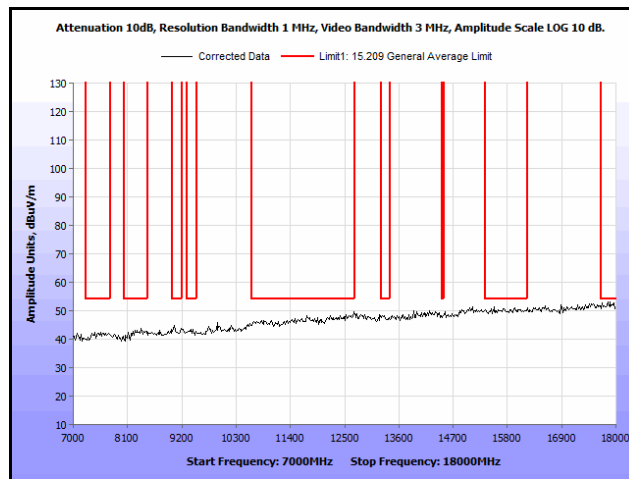


Plot 224. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Patch

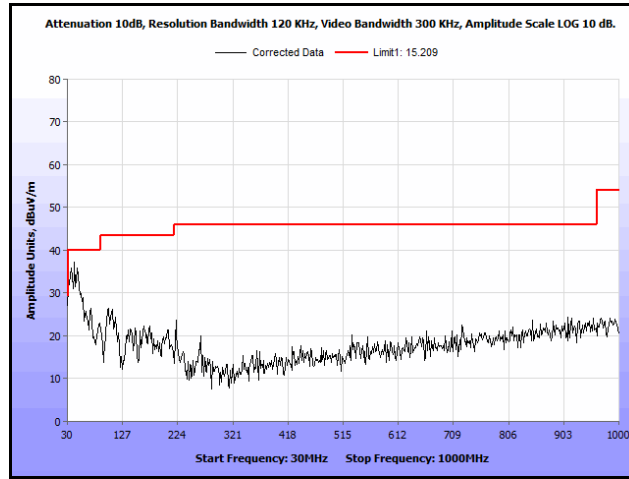


Plot 225. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Patch

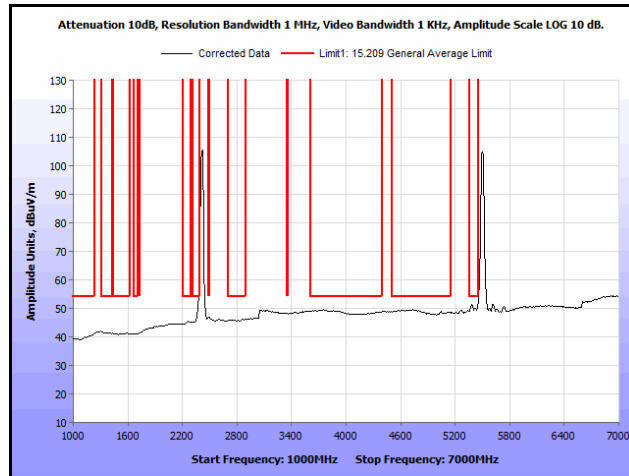


Plot 226. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Patch

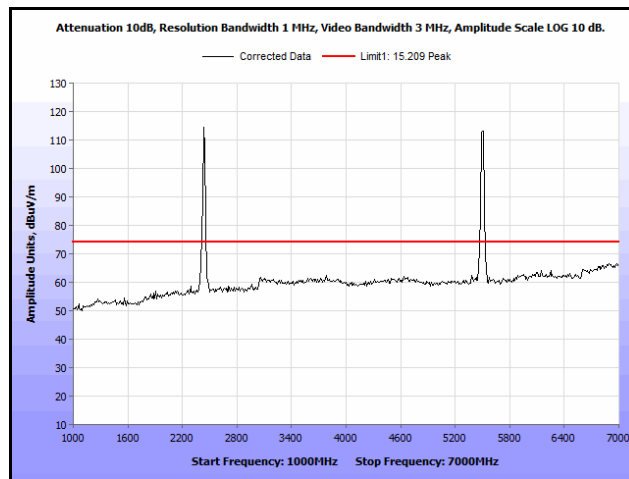


Plot 227. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Patch

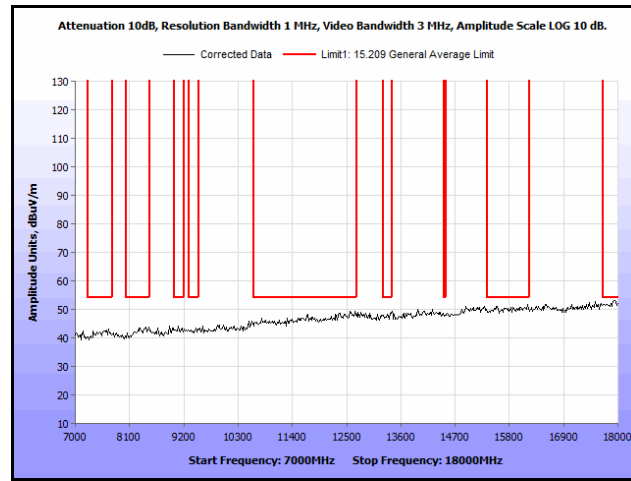


Plot 228. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Patch

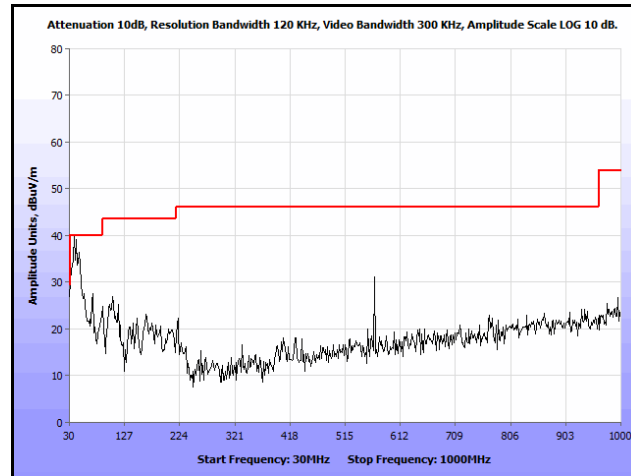


Plot 229. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Patch

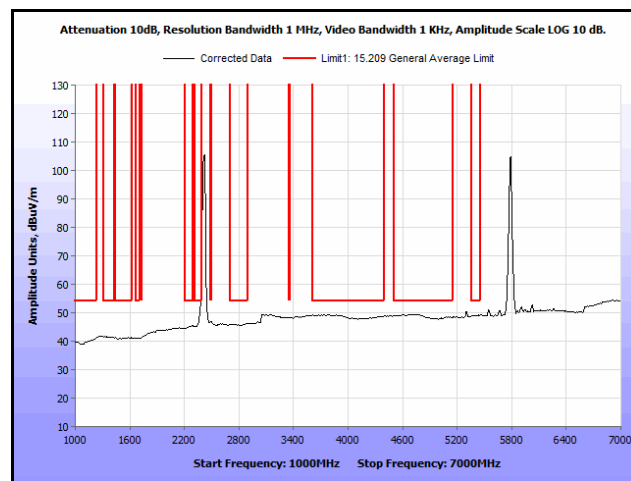


Plot 230. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Patch

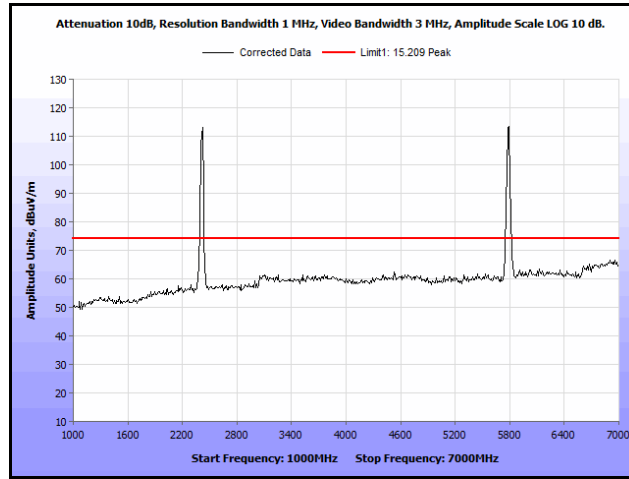


Plot 231. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Patch

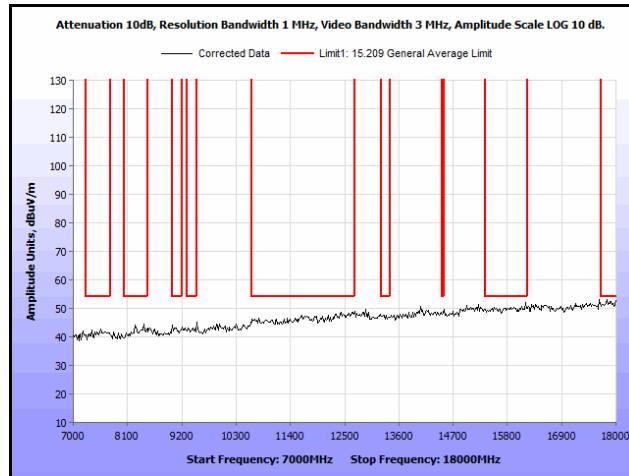


Plot 232. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2437 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Patch

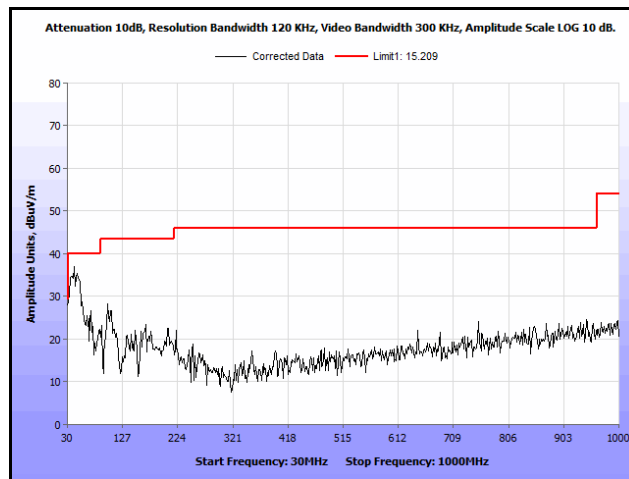


Plot 233. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 30 MHz – 1 GHz, Peak, Patch

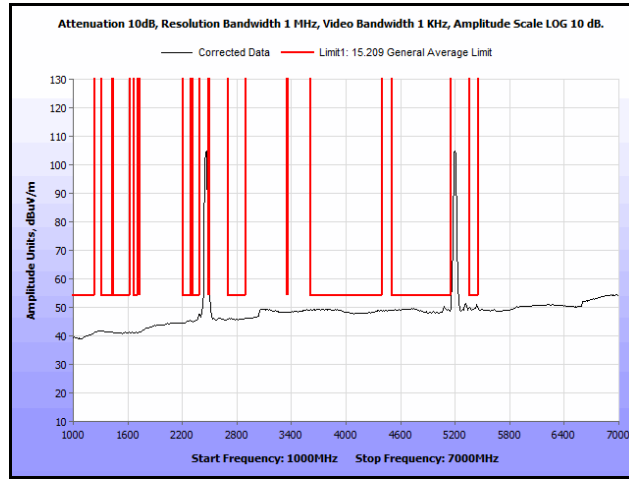


Plot 234. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Avg., Patch

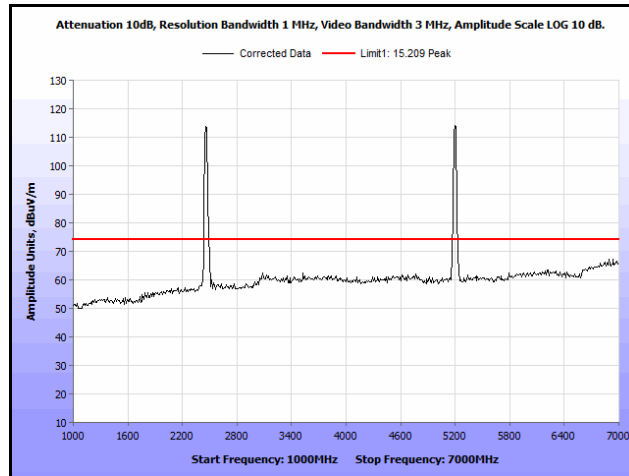


Plot 235. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 1 GHz – 7 GHz, Peak, Patch

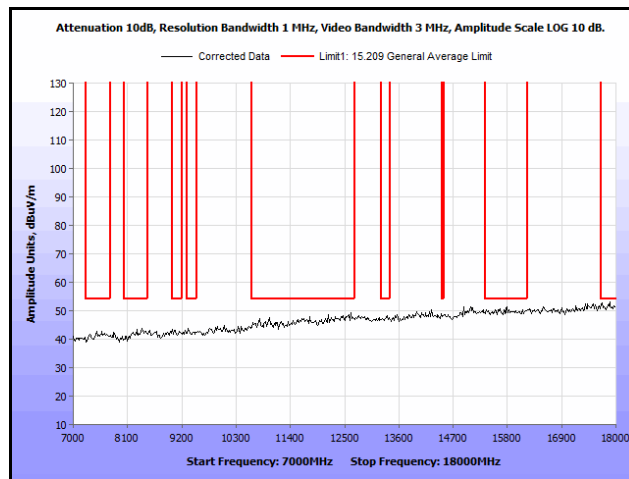


Plot 236. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5200 MHz, 7 GHz – 18 GHz, Peak, Patch

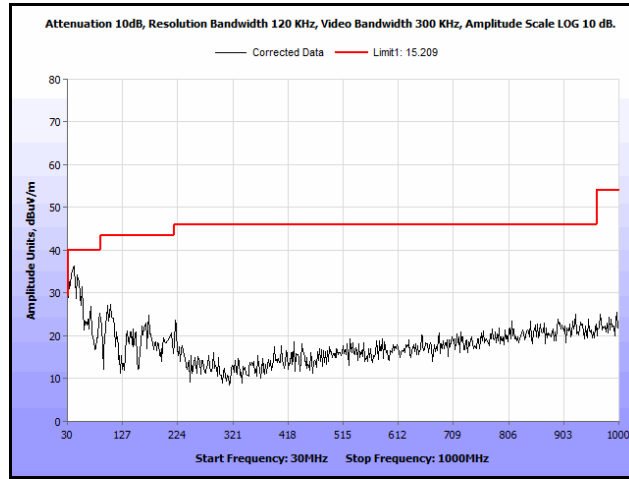


Plot 237. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 30 MHz – 1 GHz, Peak, Patch

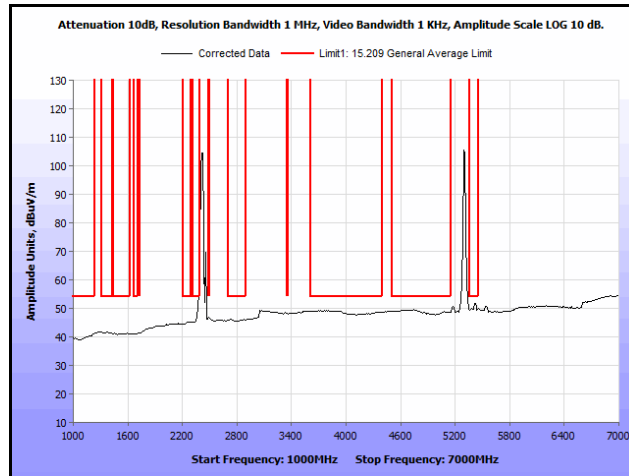


Plot 238. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Avg., Patch

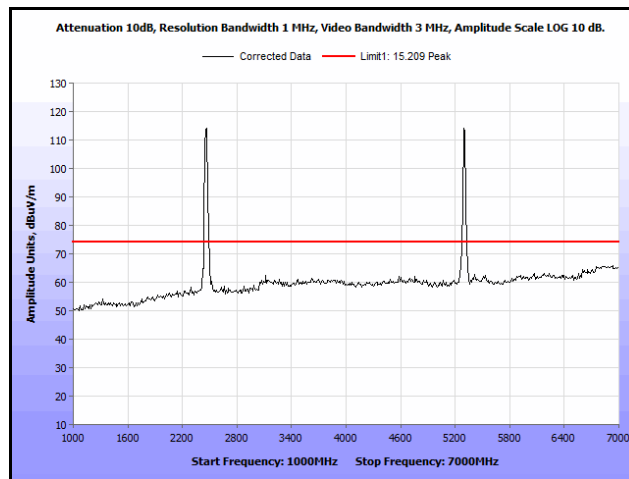


Plot 239. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 1 GHz – 7 GHz, Peak, Patch

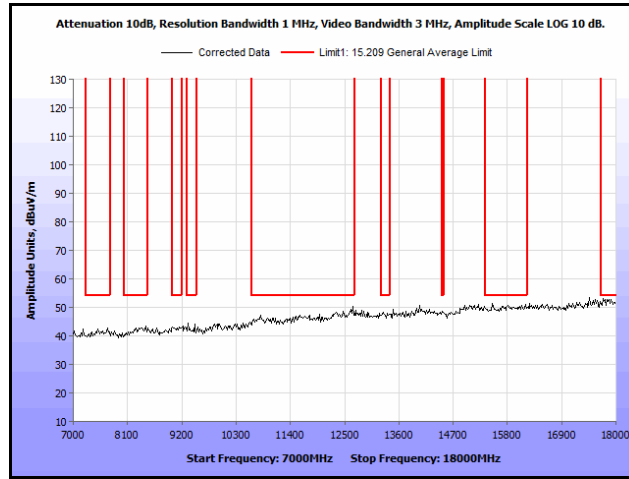


Plot 240. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5300 MHz, 7 GHz – 18 GHz, Peak, Patch

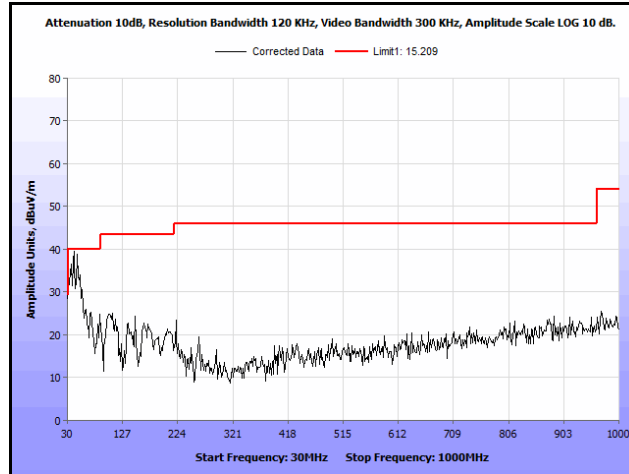


Plot 241. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 30 MHz – 1 GHz, Peak, Patch

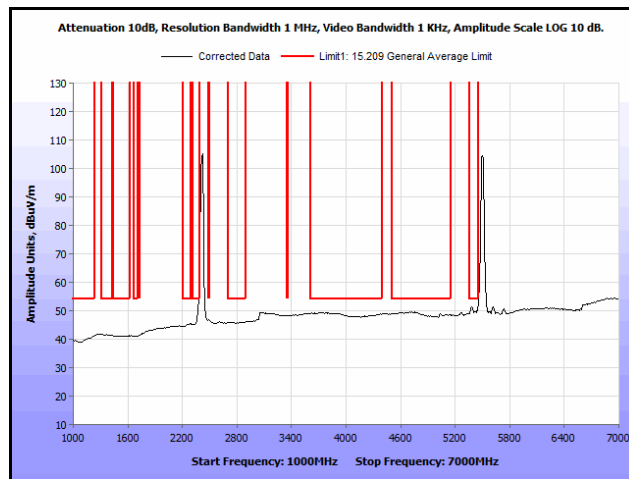


Plot 242. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Avg., Patch

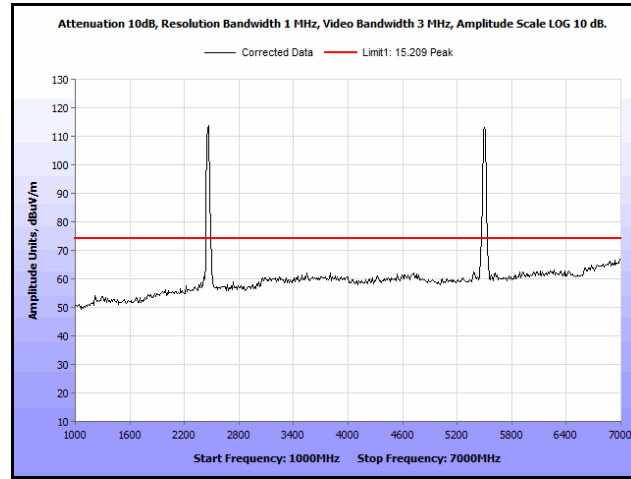


Plot 243. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 1 GHz – 7 GHz, Peak, Patch

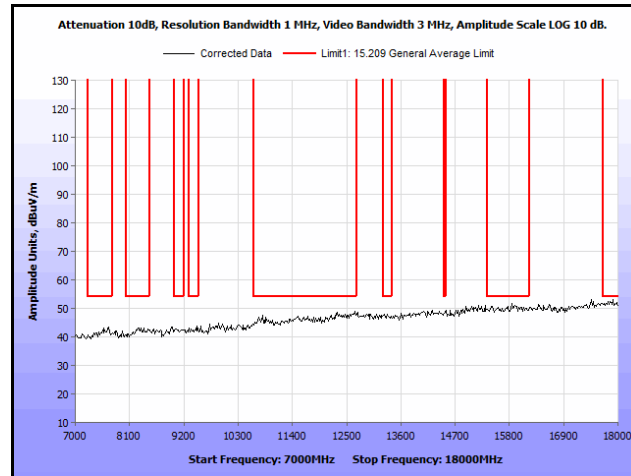


Plot 244. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5580 MHz, 7 GHz – 18 GHz, Peak, Patch

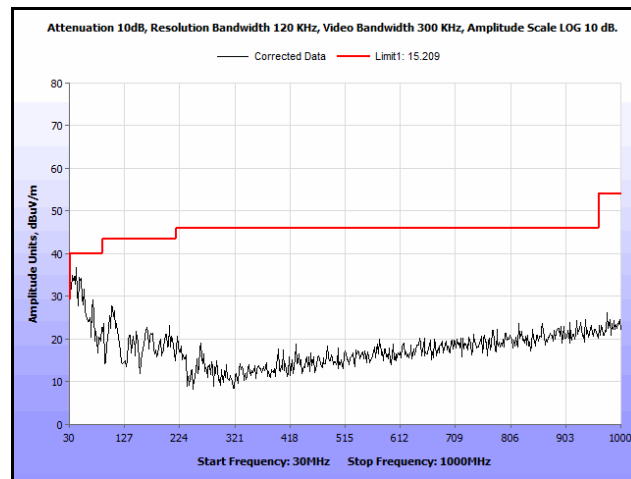


Plot 245. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 30 MHz – 1 GHz, Peak, Patch

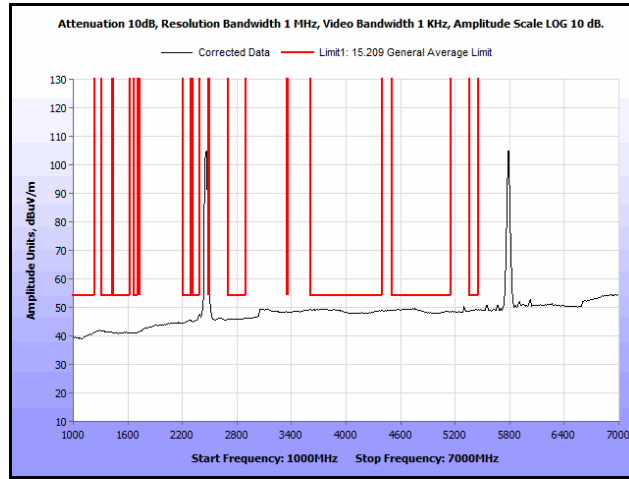

Plot 246. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Avg., Patch

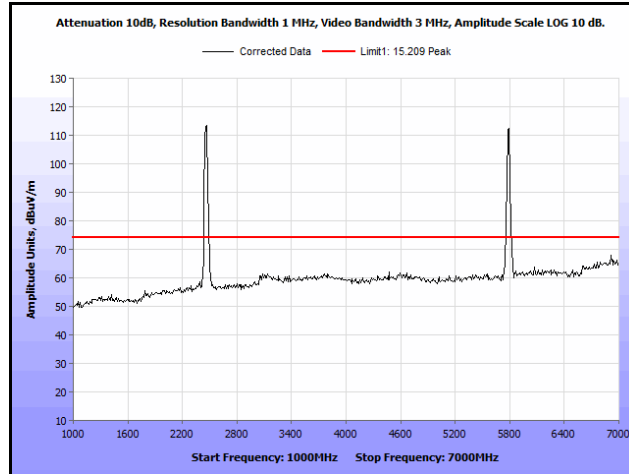

Plot 247. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 1 GHz – 7 GHz, Peak, Patch

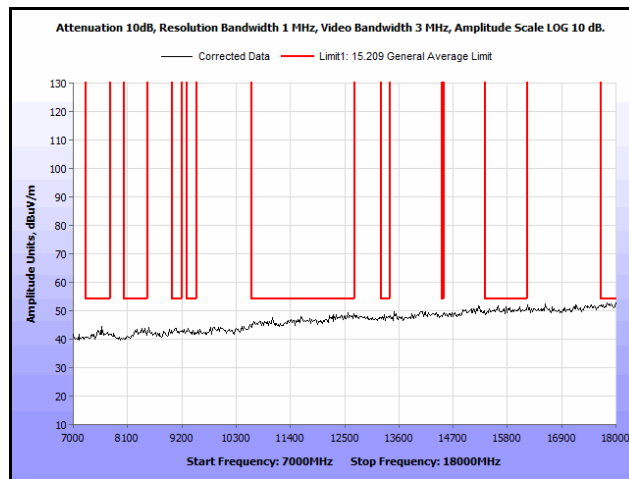

Plot 248. Radiated Spurs, Co-Location, 802.11n 20 MHz, 2462 MHz & 5785 MHz, 7 GHz – 18 GHz, Peak, Patch

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5745-5805 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density

P = Power Input to antenna (310 mW)

G = Max Antenna Gain = 7+10log(2) = 10 dBi (10 numeric)

R = Minimum Distance between User and Antenna (25 cm)

$$S = (310 * 10) / (4 * 3.14 * 25^2) = 0.394 \text{ mW/cm}^2$$

Since $S < 1 \text{ mW/cm}^2$, the minimum distance (R) is 25cm

Co-location:

Frequency Range	MPE Result (mW/cm ²)	Limit (mW/cm ²)
2.4GHz	0.43	1
5.745-5.825GHz	0.39	1

Test Requirements: $[MPE(f1) / \text{limit}(f1) + MPE(f2) / \text{limit}(f2)] < 1$

Test Results:

MPE(f1)	MPE(f2)	Calculation	MPE Result
Frequency (MHZ)	Frequency (MHZ)	$[MPE(f1) / \text{limit}(f1) + MPE(f2) / \text{limit}(f2)]$	(mW/cm ²)
2412 - 2462	5745-5825	$0.43 / 1 + 0.39 / 1 = (0.43 + 0.39)$	0.82


Therefore, the uncontrolled exposure limit is not exceeded at 25 cm.

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.407(g) Frequency Stability

- Test Requirements:** § 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
- Test Procedure:** The EUT was connected directly to a spectrum analyzer through an attenuator. The transmitter was set to low and high channels and the emissions were observed. The Low and High channels were transmitted and viewed from the 5150MHz and 5350MHz edge.
- Test Results:** The EUT was compliant with the requirements of §15.407(g).
- Test Engineer(s):** Andy Shen
- Test Date(s):** 09/10/14


Frequency Stability

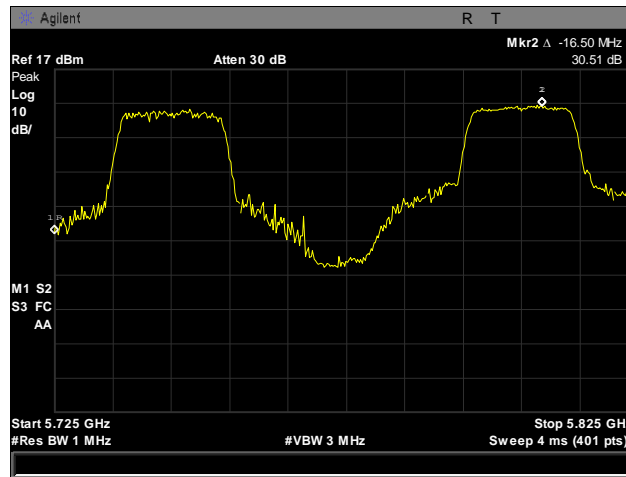


Plot 249. Frequency Stability, 5725 – 5825 MHz, -40°C, 120 V

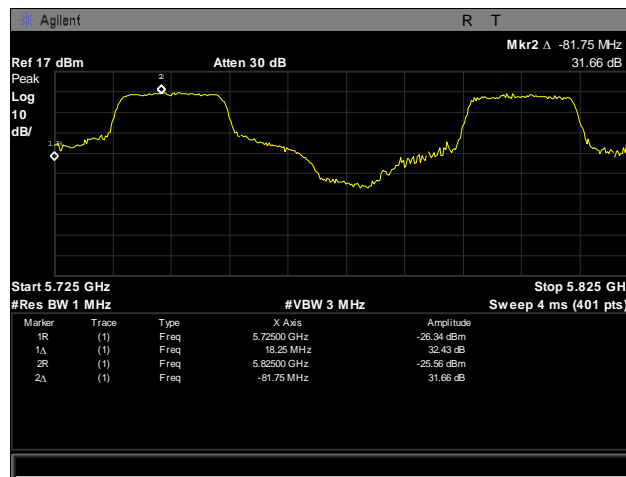


Plot 250. Frequency Stability, 5725 – 5825 MHz, -30°C, 120 V

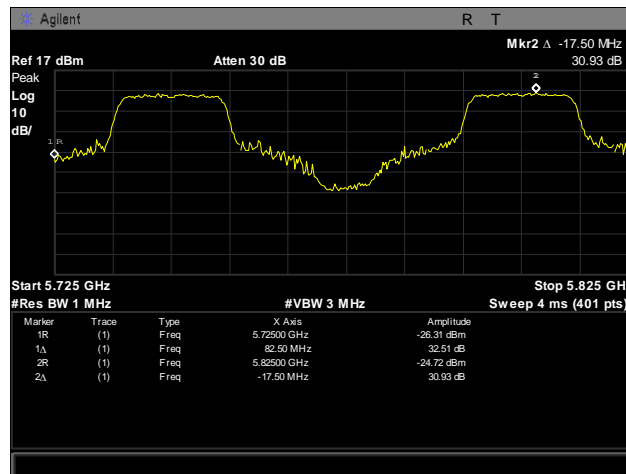


Plot 251. Frequency Stability, 5725 – 5825 MHz, -20°C, 120 V

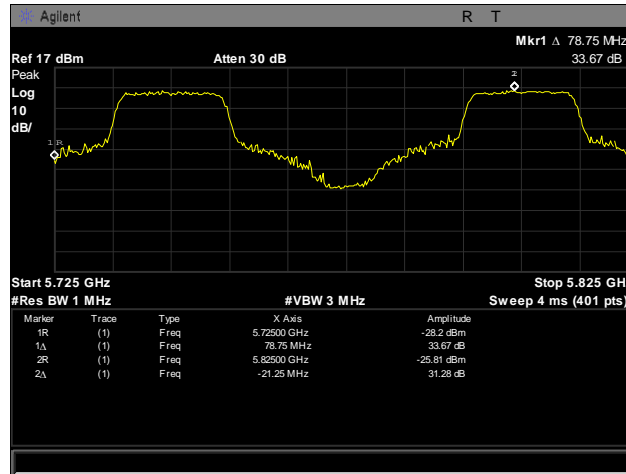


Plot 252. Frequency Stability, 5725 – 5825 MHz, -10°C, 120 V

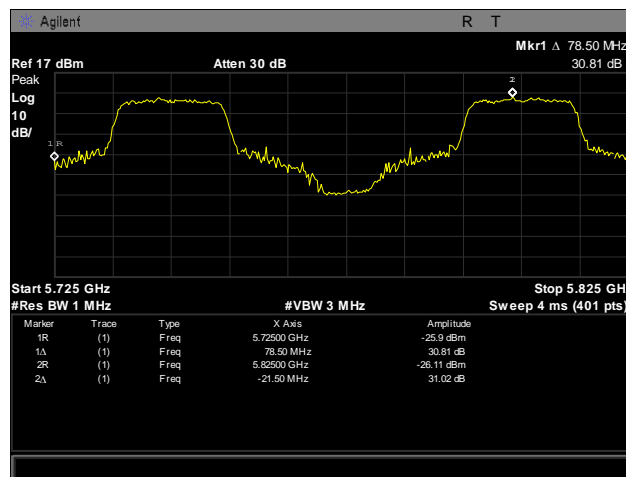


Plot 253. Frequency Stability, 5725 – 5825 MHz, 0°C, 120 V

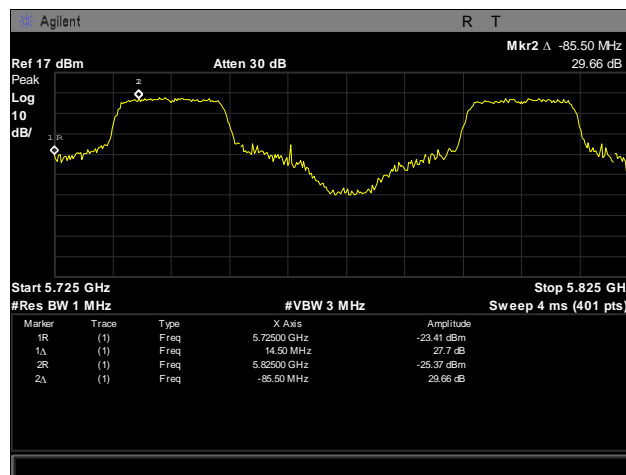


Plot 254. Frequency Stability, 5725 – 5825 MHz, 10°C, 120 V

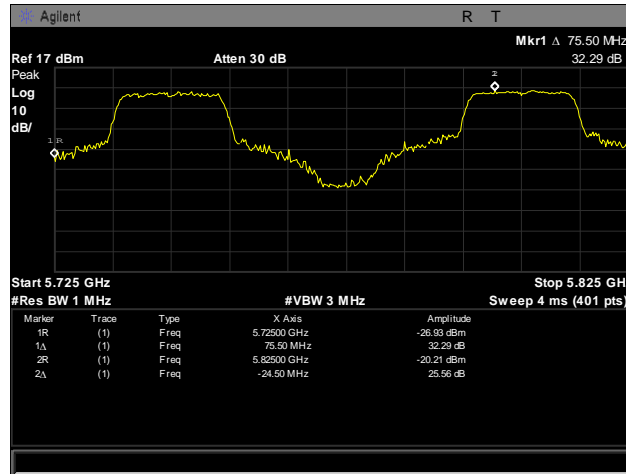


Plot 255. Frequency Stability, 5725 – 5825 MHz, 20°C, 120 V

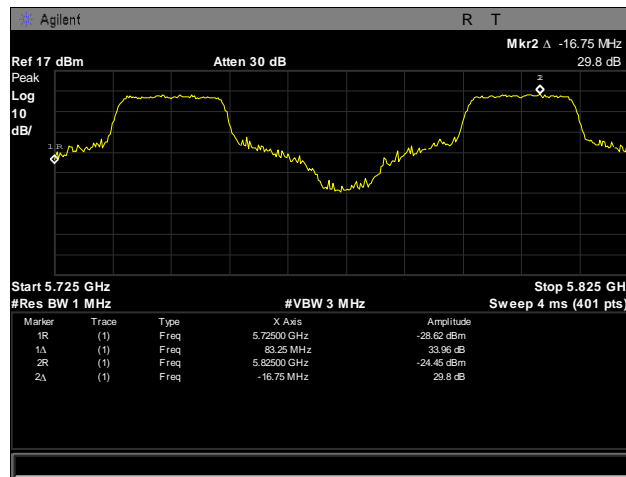


Plot 256. Frequency Stability, 5725 – 5825 MHz, 30°C, 120 V

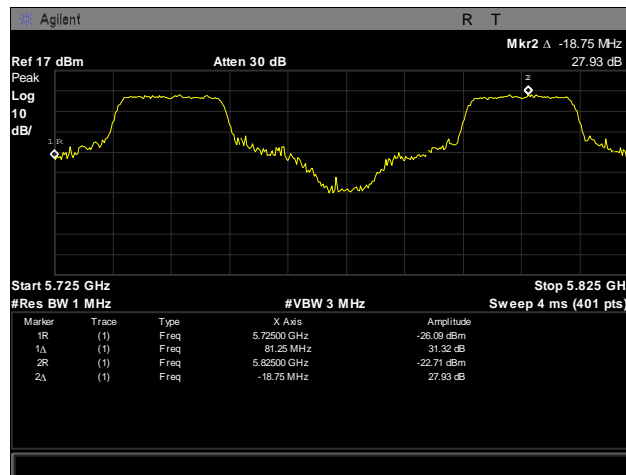

Plot 257. Frequency Stability, 5725 – 5825 MHz, 40°C, 120 V

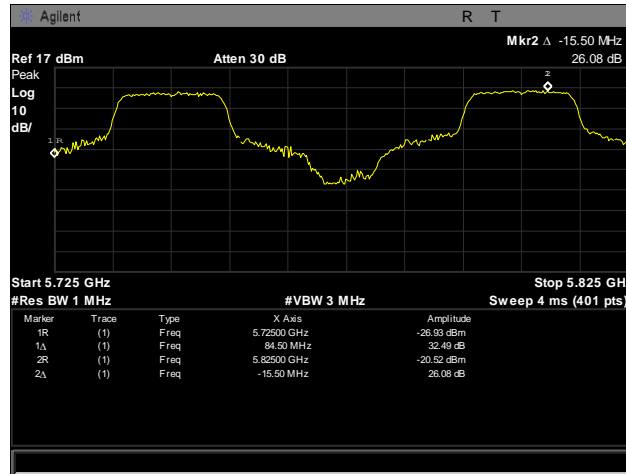

Plot 258. Frequency Stability, 5725 – 5825 MHz, 50°C, 120 V

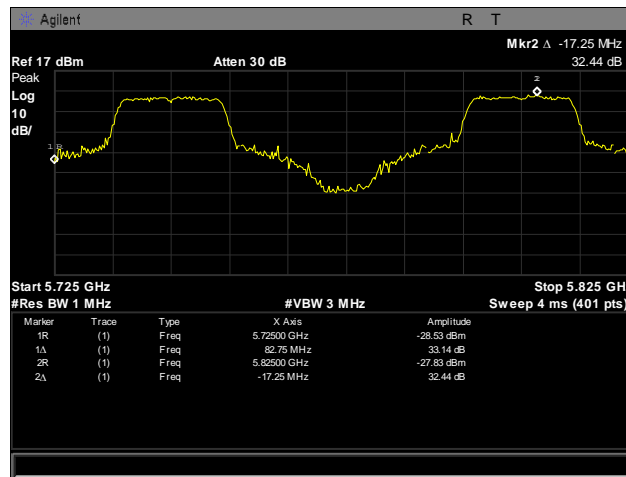

Plot 259. Frequency Stability, 5725 – 5825 MHz, 55°C, 120 V

V. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	8/29/2013	8/29/2015
1S2482	5 METER CHAMBER (NSA)	PANASHIELD	5 METER SEMI-ANECHOIC CHAMBER	8/12/2013	2/12/2015
1S2583	SPECTRUM ANALYZER	AGILENT/HP	E4447A	11/1/2013	5/1/2015
1S2460	1-26GHZ SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	2/27/2014	8/27/2015
1S2603	DOUBLE RIDGED WAVEGUIDE HORN	ETS-LINDGREN	3117	4/24/2013	4/24/2015
1S2523	PREAMPLIFIER	AGILENT TECHNOLOGIES	8449B	SEE NOTE	
1S2729	SONOMA AMPLIFIER	SONOMA INSTRUMENT	310N	SEE NOTE	
1S2460	1-26GHZ SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	2/27/2014	8/27/2015
N/A	NOTCH FILTER	MIRCRO-TRONICS	BRM50702	SEE NOTE	
N/A	HIGH PASS FILTER	MICRO-TRONICS	BRM50705	SEE NOTE	

Table 26. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

VI. Certification & User's Manual Information

Certification & User's Manual Information

L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.