



Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 11 / Ant. 3

Vertical

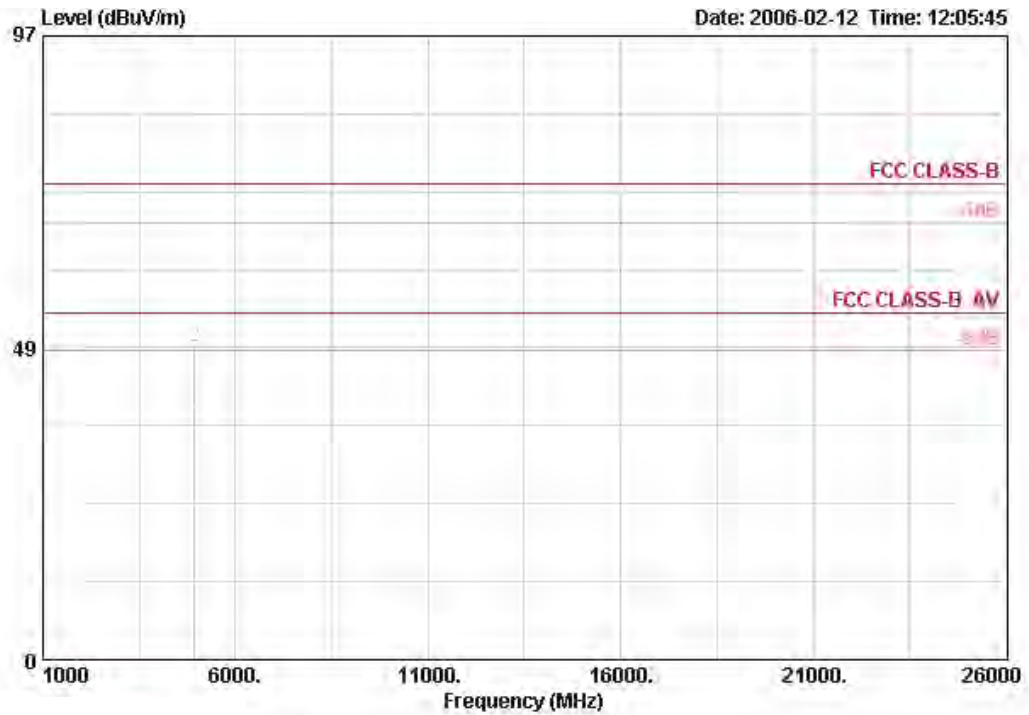

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	4924.860	36.78	-17.22	54.00	33.45	4.73	35.10	33.70	AVERAGE	146	356
2 @	4924.860	48.72	-25.28	74.00	33.45	4.73	35.10	45.64	PEAK	146	356


Horizontal

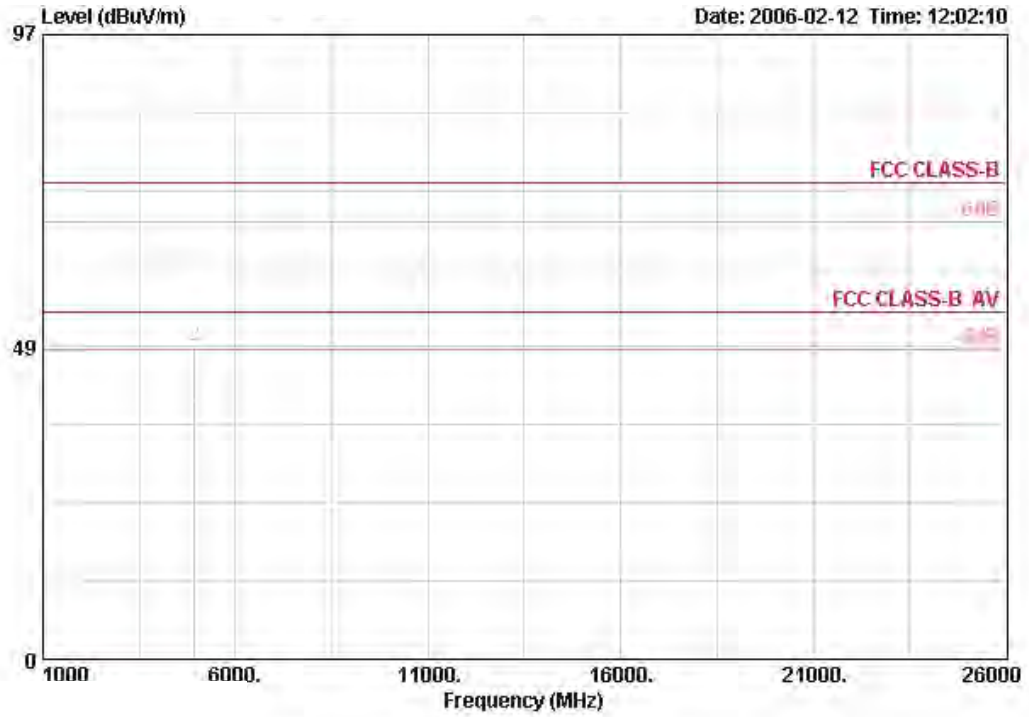

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	4924.340	37.19	-16.81	54.00	33.45	4.73	35.10	34.12	AVERAGE	157	318
2 @	4924.340	48.58	-25.42	74.00	33.45	4.73	35.10	45.51	PEAK	157	318


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Turbo Channel 6 / Ant. 3

Vertical

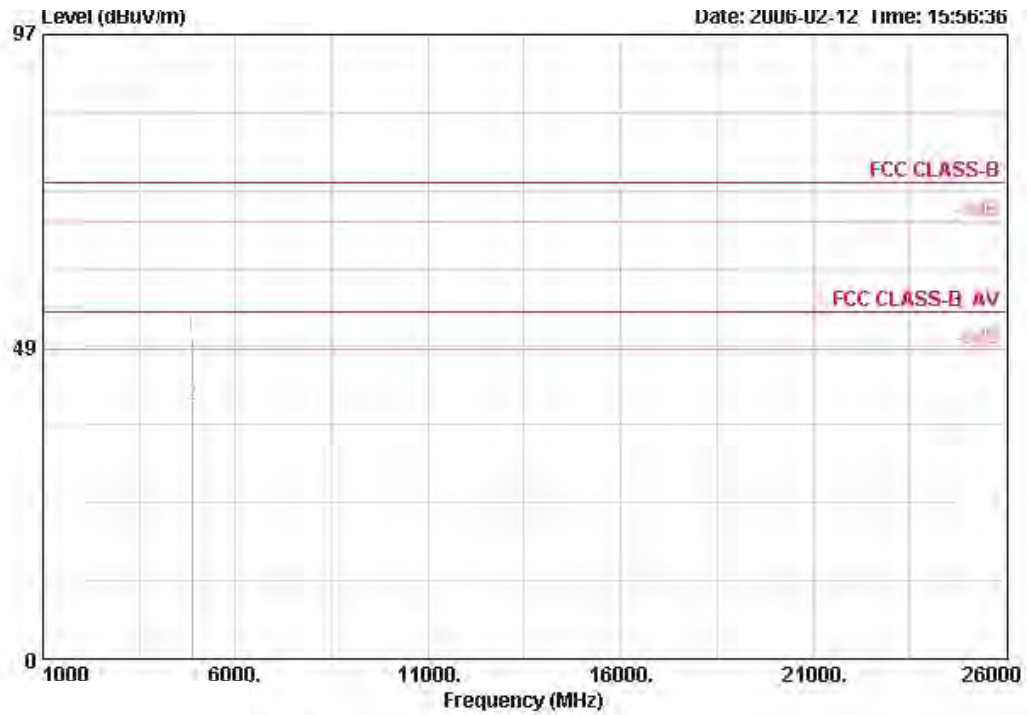

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	4874.300	50.06	-23.94	74.00	33.33	4.69	35.10	47.13	PEAK	127 340
2 @	4874.300	39.44	-14.56	54.00	33.33	4.69	35.10	36.51	AVERAGE	127 340

Horizontal

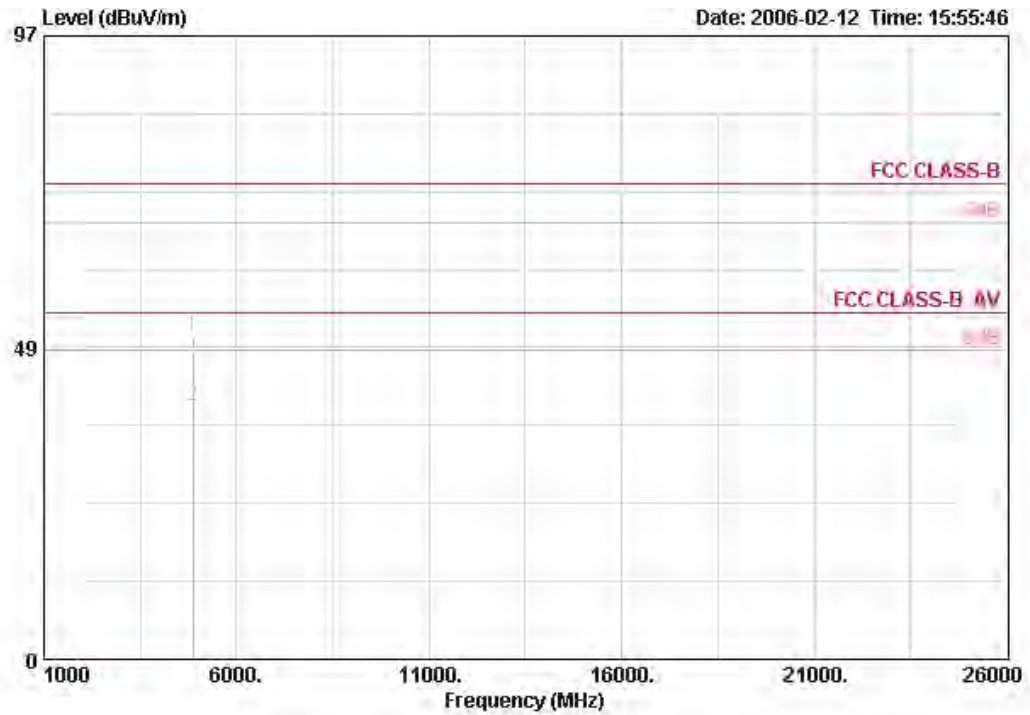

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line	Loss	Factor	Level	Pos	Pos			
MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	cm	deg			
1 @	4874.200	50.13	-23.87	74.00	33.33	4.69	35.10	47.20	PEAK	156	330
2 @	4874.200	39.47	-14.53	54.00	33.33	4.69	35.10	36.54	AVERAGE	156	330

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 1 / Ant. 4

Vertical

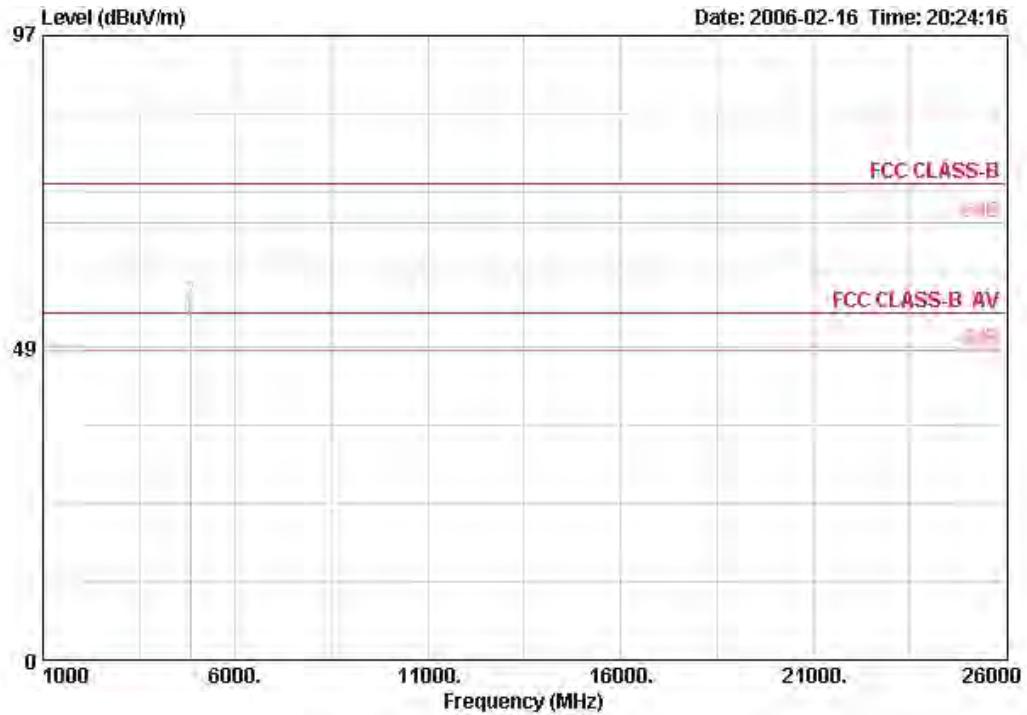

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4823.990	52.92	-1.08	54.00	33.22	4.68	35.10	50.12	AVERAGE	135	298
2 @	4823.990	55.43	-18.57	74.00	33.22	4.68	35.10	52.63	PEAK	135	298


Horizontal

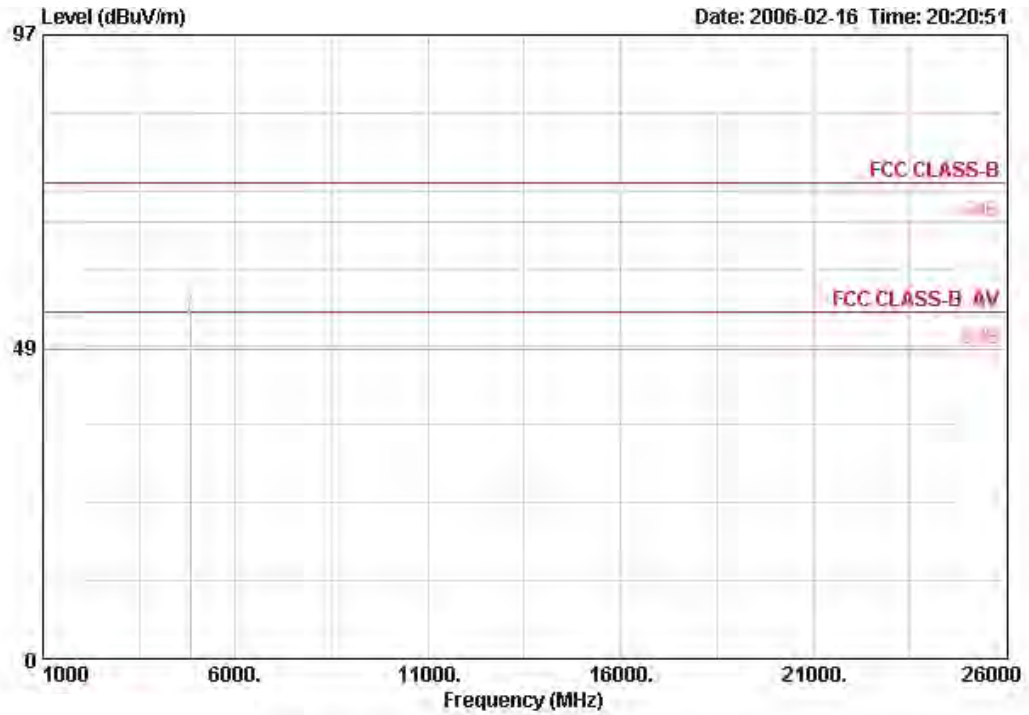

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV			cm	deg
1 @	4824.010	52.65	-1.35	54.00	33.22	4.68	35.10	49.86	AVERAGE		132	306
2 @	4824.010	54.52	-19.48	74.00	33.22	4.68	35.10	51.72	PEAK		132	306


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 6 / Ant. 4

Vertical

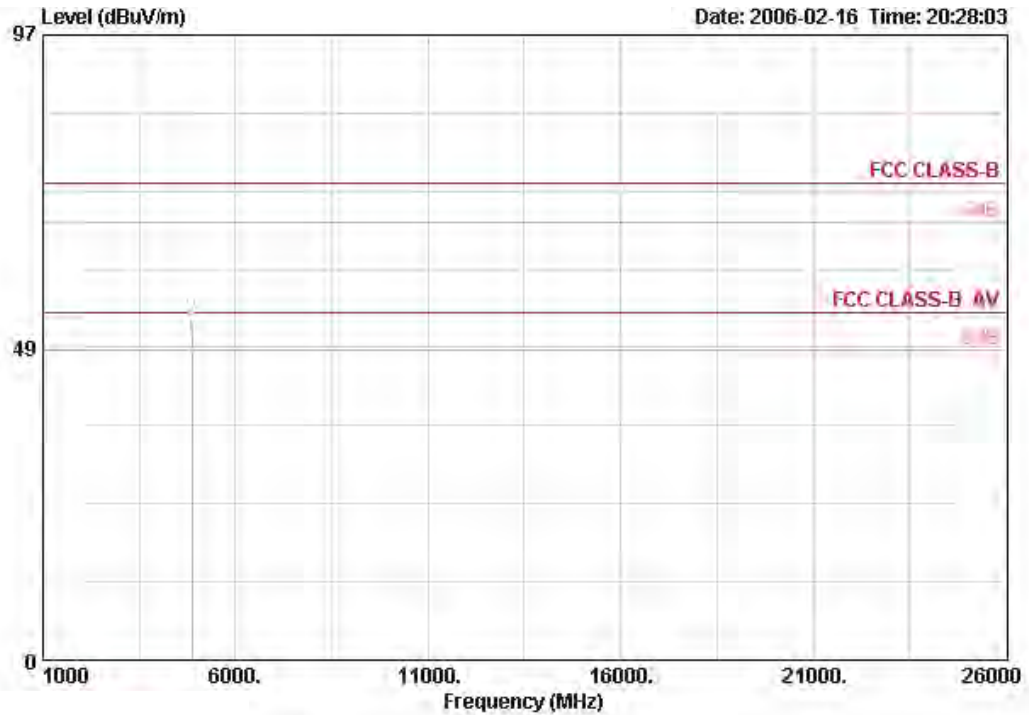

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1 @	4874.000	49.68	-4.32	54.00	33.33		4.69	35.10	46.76	AVERAGE	160	298
2 @	4874.000	52.98	-21.02	74.00	33.33		4.69	35.10	50.05	PEAK	160	298


Horizontal

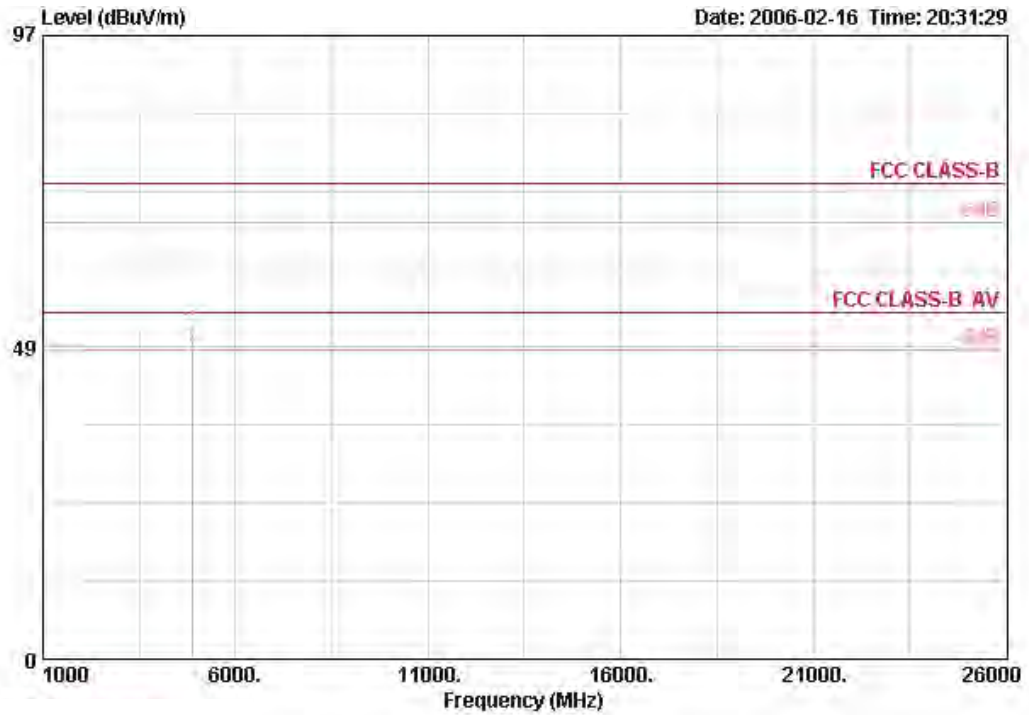

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1 @	4874.010	48.39	-5.61	54.00	33.33		4.69	35.10	45.46	AVERAGE	121	339
2 @	4874.010	51.84	-22.16	74.00	33.33		4.69	35.10	48.91	PEAK	121	339


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 11 / Ant. 4

Vertical

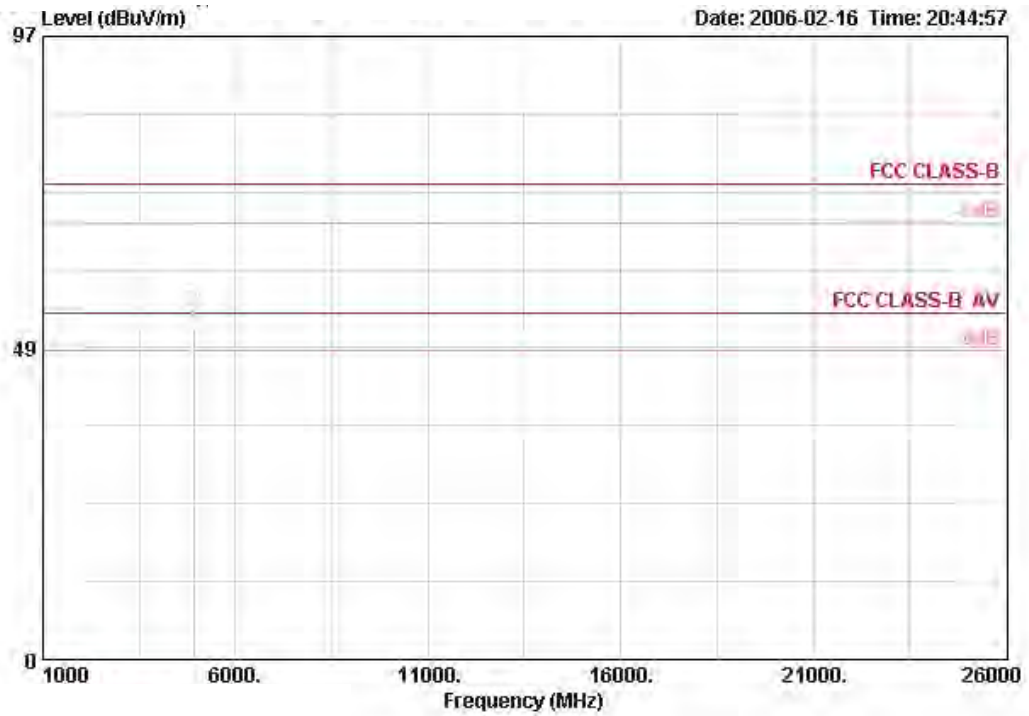

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4924.030	51.66	-2.34	54.00	33.45	4.73	35.10	48.56	AVERAGE	120	301
2 @	4924.030	54.26	-19.74	74.00	33.45	4.73	35.10	51.19	PEAK	120	301


Horizontal

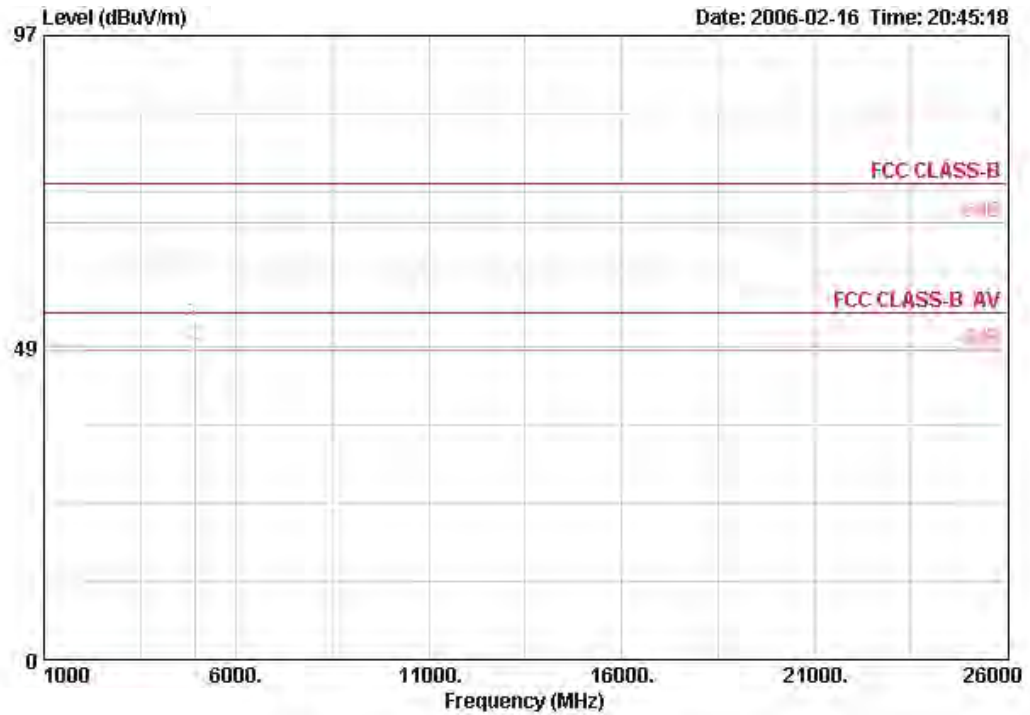

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1 @	4923.900	52.50	-21.50	74.00	33.45		4.73	35.10	49.42	PEAK	110	338
2 @	4923.990	48.86	-5.14	54.00	33.45		4.73	35.10	45.78	AVERAGE	110	338


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 1 / Ant. 4

Vertical

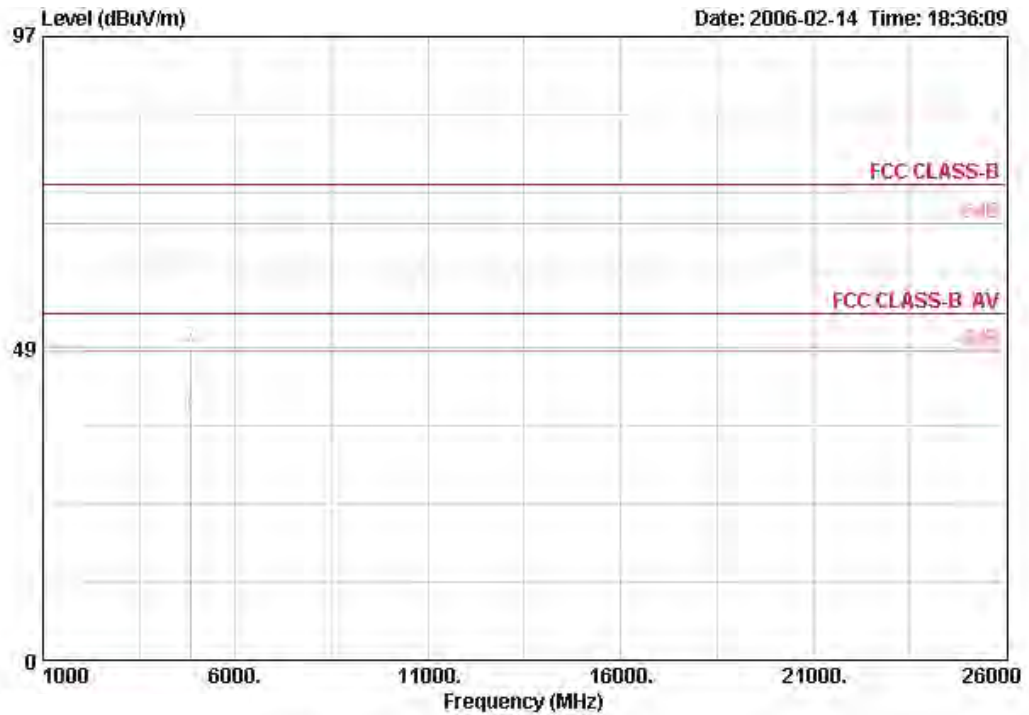

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV			cm	deg
1 @	4824.260	37.62	-16.38	54.00	33.22	4.68	35.10	34.82	AVERAGE		120	311
2 @	4824.260	48.63	-25.37	74.00	33.22	4.68	35.10	45.83	PEAK		120	311


Horizontal

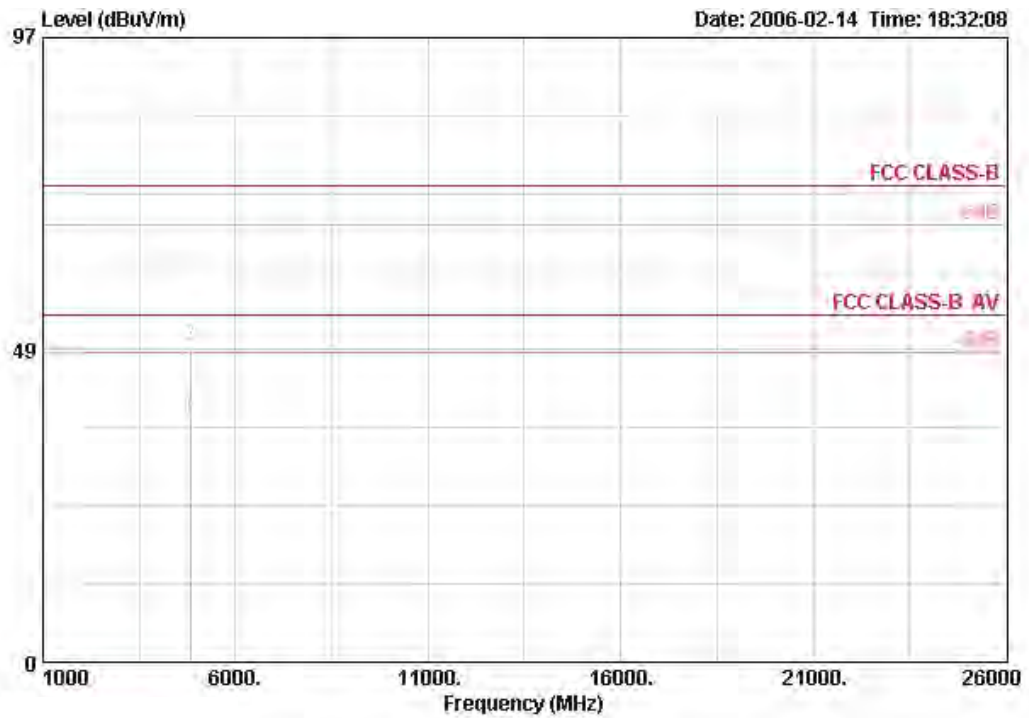

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV			cm	deg
1 @	4821.300	37.63	-16.37	54.00	33.22	4.68	35.10	34.83	AVERAGE		154	-50
2 @	4821.300	49.07	-24.93	74.00	33.22	4.68	35.10	46.28	PEAK		154	-50


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 6 / Ant. 4

Vertical

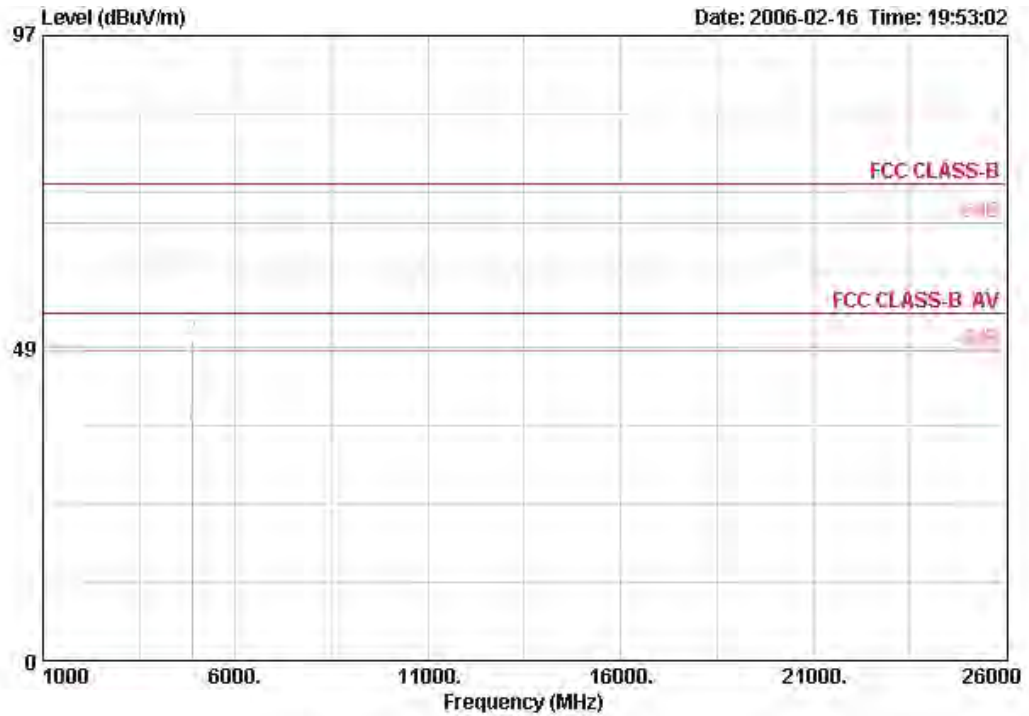

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4875.320	36.16	-17.84	54.00	33.33	4.69	35.10	33.23	AVERAGE	130	294
2 @	4875.880	49.56	-24.44	74.00	33.33	4.69	35.10	46.63	PEAK	130	294


Horizontal

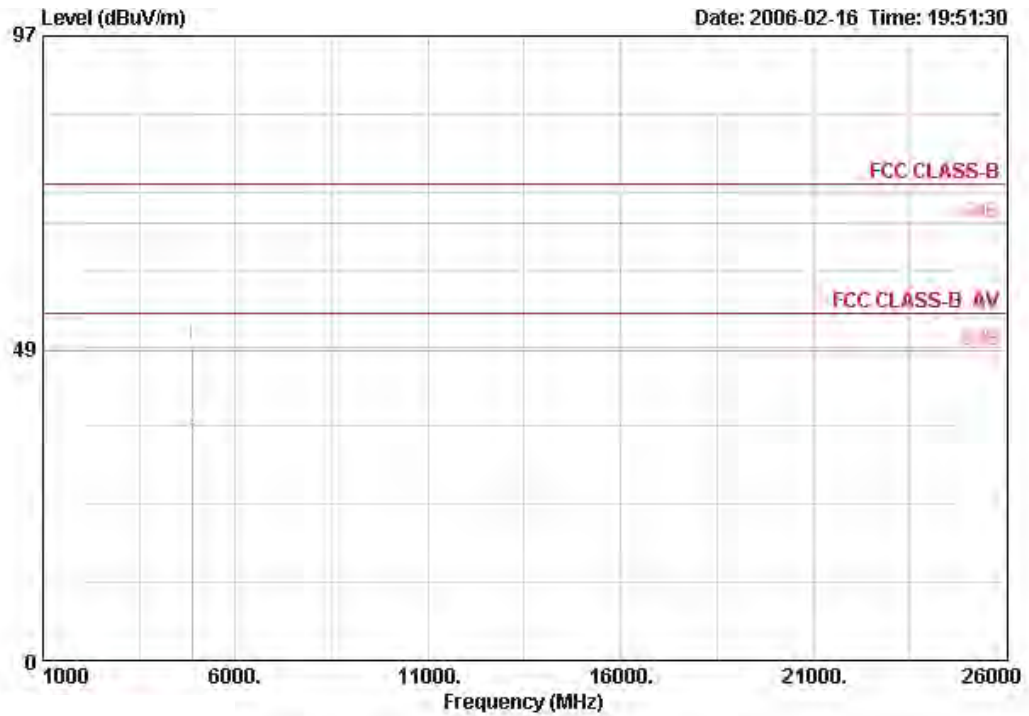

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4876.360	49.02	-24.98	74.00	33.33	4.69	35.10	46.09	PEAK	130	23
2	4876.740	35.61	-18.39	54.00	33.33	4.69	35.10	32.68	AVERAGE	130	23


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 11 / Ant. 4

Vertical

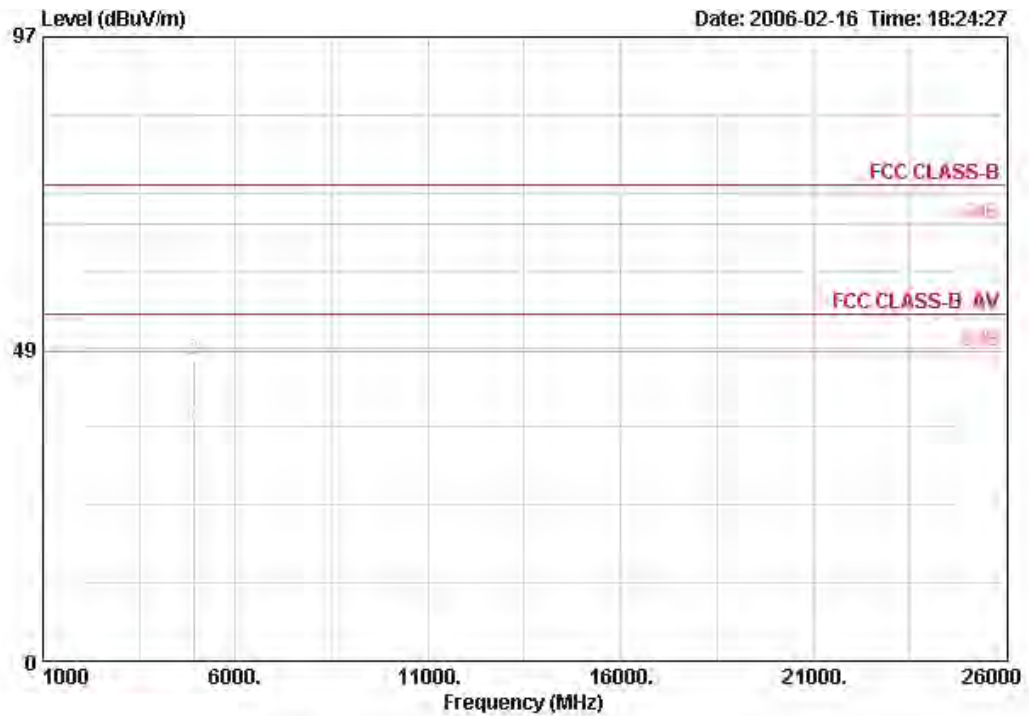

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	4922.720	36.22	-17.78	54.00	33.45	4.73	35.10	33.14	AVERAGE	139	311
2 @	4922.720	46.67	-27.33	74.00	33.45	4.73	35.10	43.60	PEAK	139	311


Horizontal

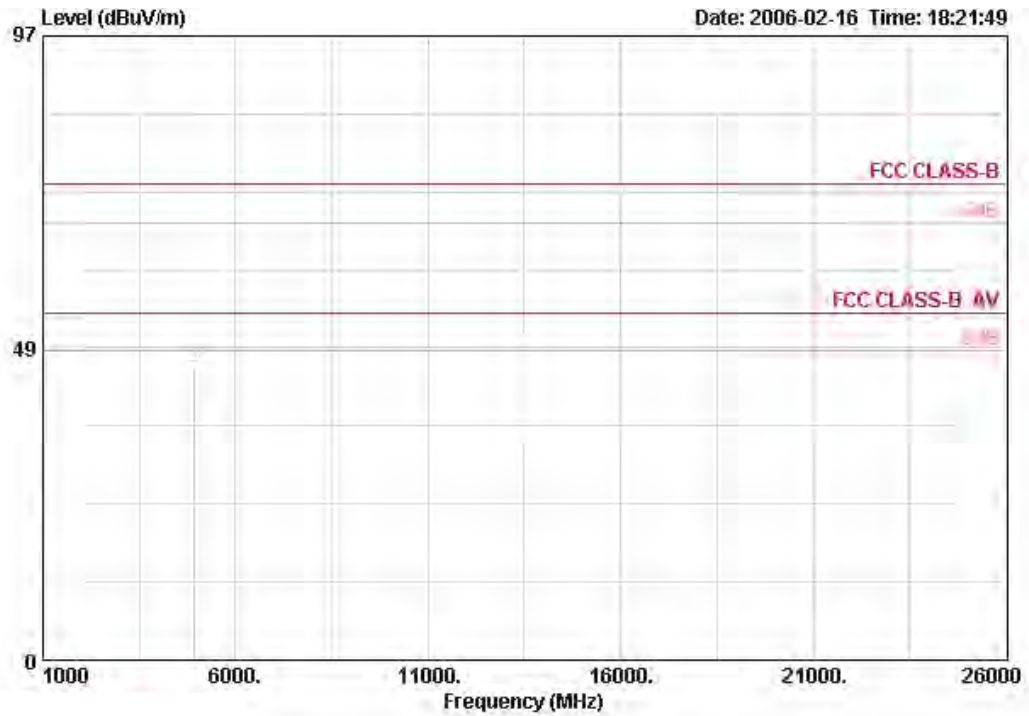

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4924.360	34.45	-19.55	54.00	33.45	4.73	35.10	31.38	AVERAGE	139	360
2 @	4924.360	45.39	-28.61	74.00	33.45	4.73	35.10	42.32	PEAK	139	360


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Turbo Channel 6 / Ant. 4

Vertical

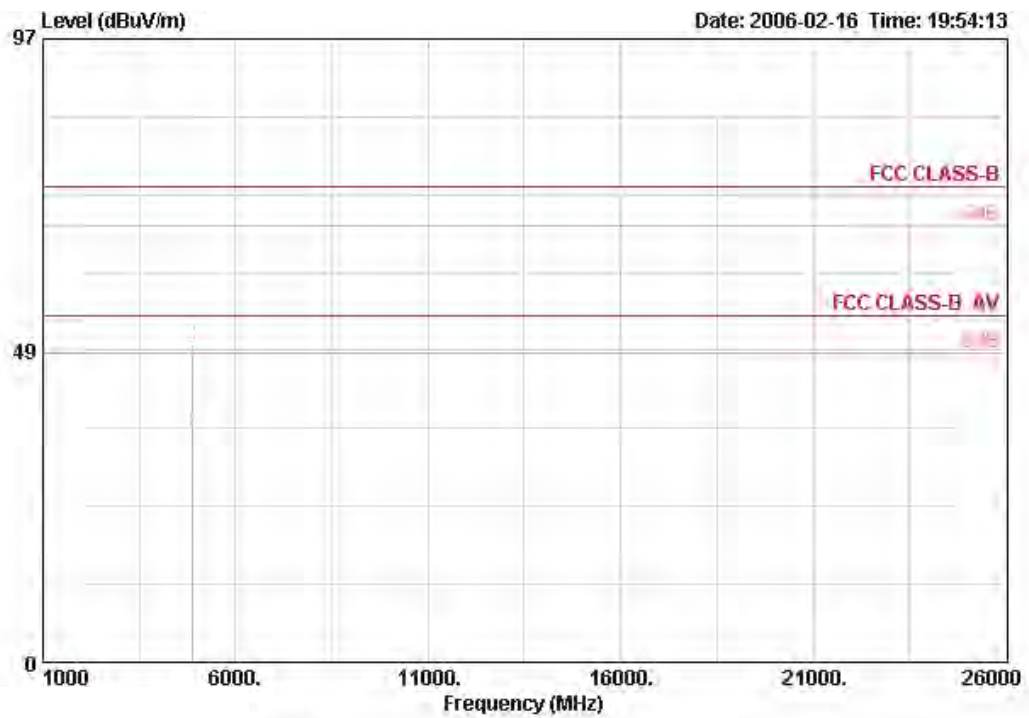

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp	Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB		dBuV		cm	deg
1 @	4877.080	35.77	-18.23	54.00	33.33		4.69	35.10		32.84	AVERAGE	130	294
2 @	4878.680	49.52	-24.48	74.00	33.33		4.69	35.10		46.60	PEAK	130	294

Horizontal

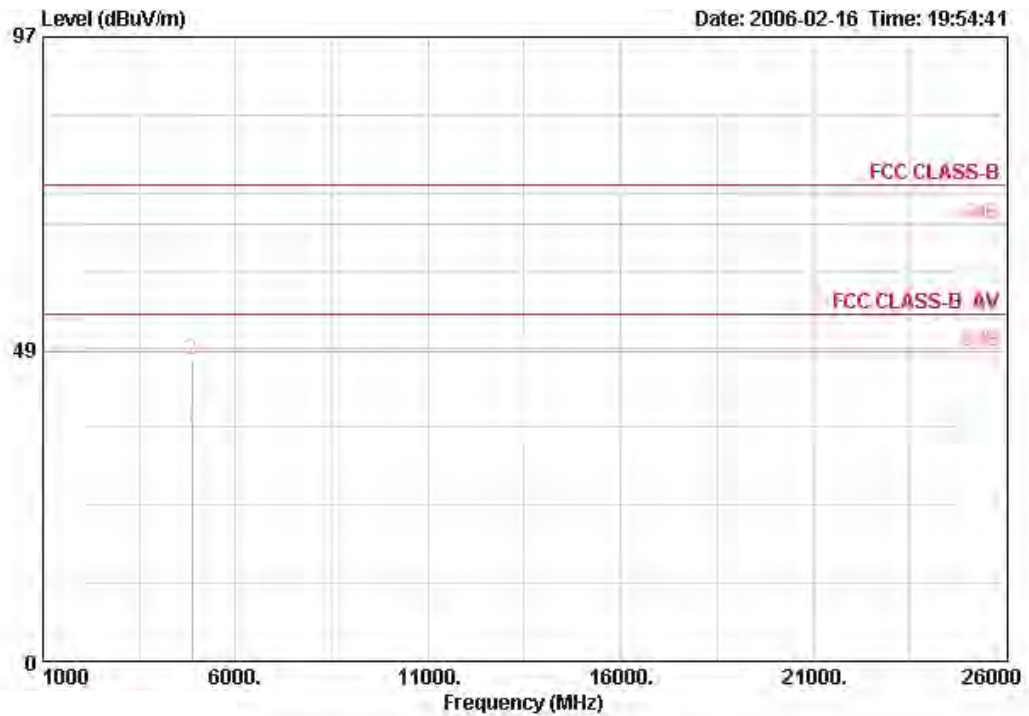

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4878.440	36.24	-17.76	54.00	33.33	4.69	35.10	33.31	AVERAGE	130	280
2 @	4878.440	46.87	-27.13	74.00	33.33	4.69	35.10	43.94	PEAK	130	280

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 1 / Ant. 5

Vertical

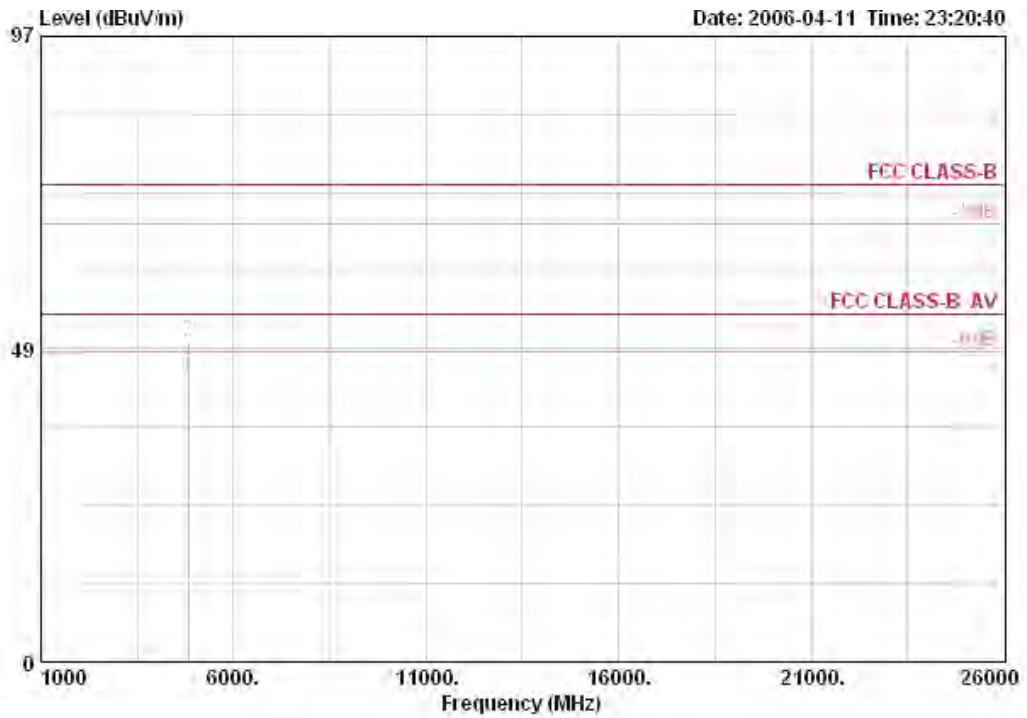

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV	cm	deg
1	4824.050	44.11	-9.89	54.00	33.22	4.68	35.10	41.31 AVERAGE	112	318
2	4824.050	49.71	-24.29	74.00	33.22	4.68	35.10	46.92 PEAK	112	318


Horizontal

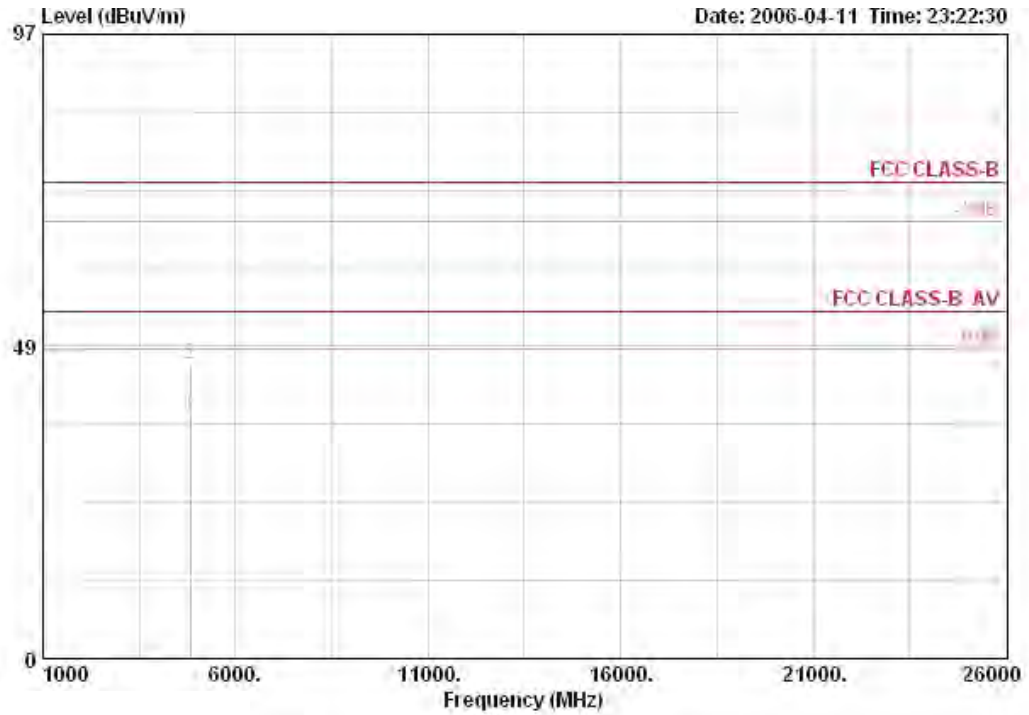

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4824.010	37.57	-16.43	54.00	33.22	4.68	35.10	34.77	AVERAGE	111	302
2	4824.010	45.70	-28.30	74.00	33.22	4.68	35.10	42.90	PEAK	111	302


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 6 / Ant. 5

Vertical

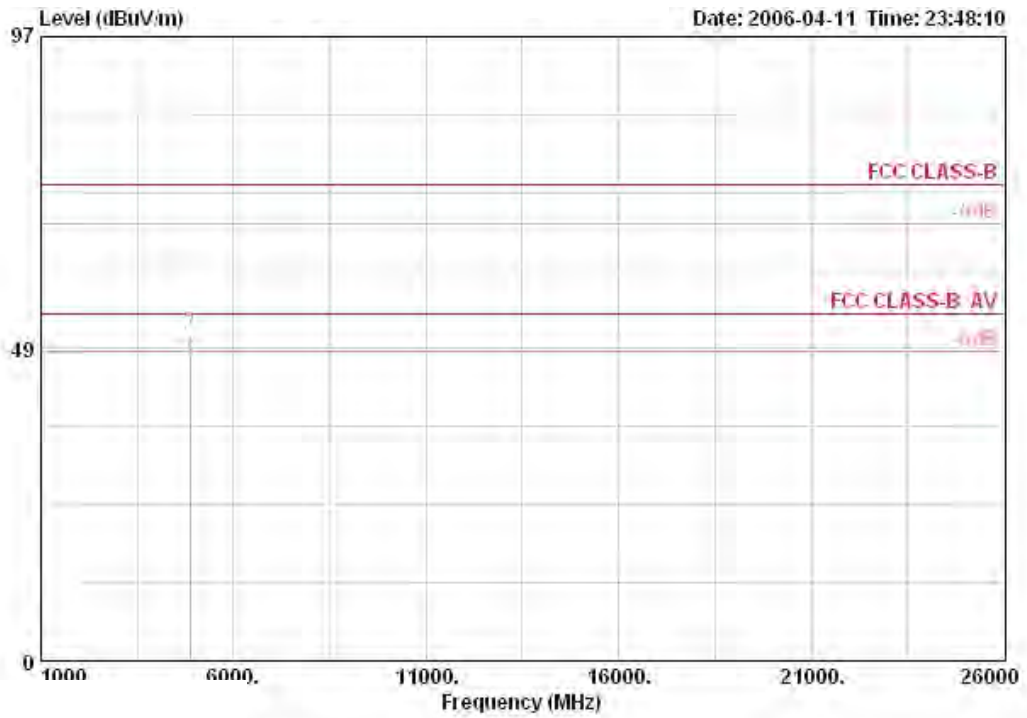

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4873.980	47.04	-6.96	54.00	33.33	4.69	35.10	44.11	AVERAGE	111	321
2	4873.980	50.78	-23.22	74.00	33.33	4.69	35.10	47.86	PEAK	111	321


Horizontal

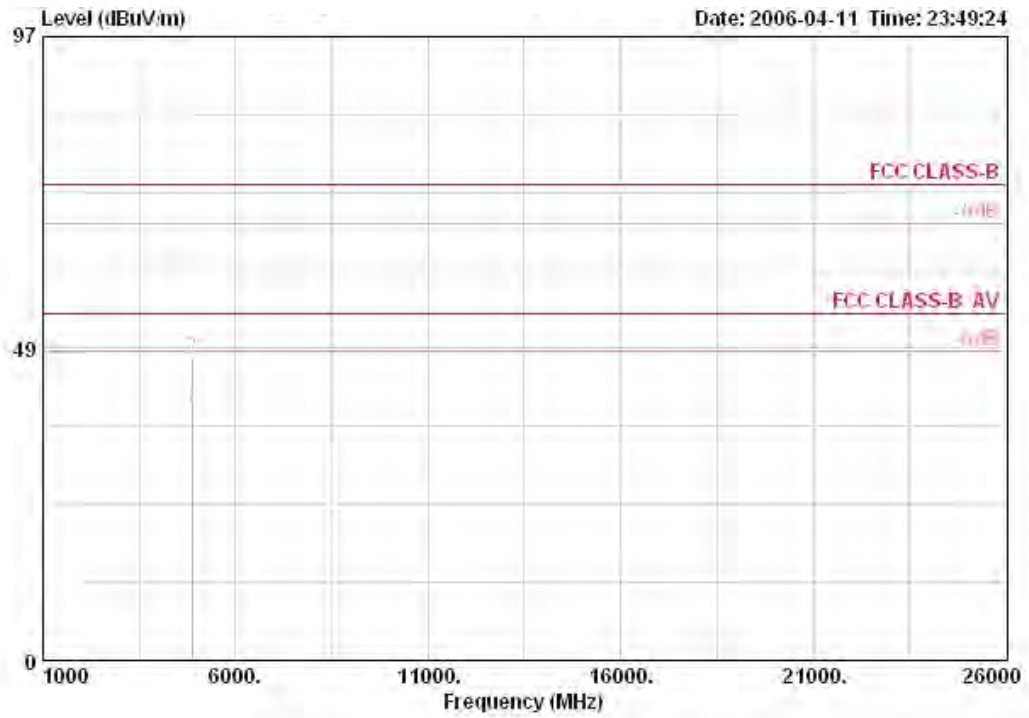

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Gain	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4874.040	39.40	-14.60	54.00	33.33	4.69	35.10	36.48	AVERAGE	138	290
2	4874.040	47.18	-26.82	74.00	33.33	4.69	35.10	44.25	PEAK	138	290


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11b Channel 11 / Ant. 5

Vertical

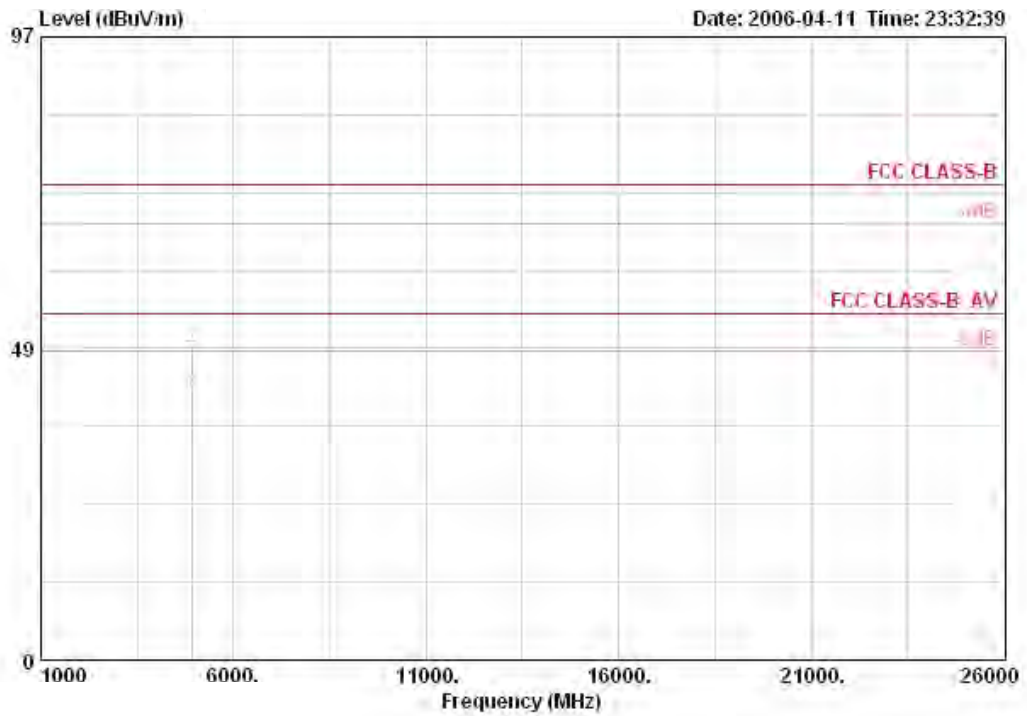

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4923.970	41.27	-12.73	54.00	33.45	4.73	35.10	38.20	AVERAGE	130	308
2	4923.970	48.60	-25.40	74.00	33.45	4.73	35.10	45.52	PEAK	130	308


Horizontal

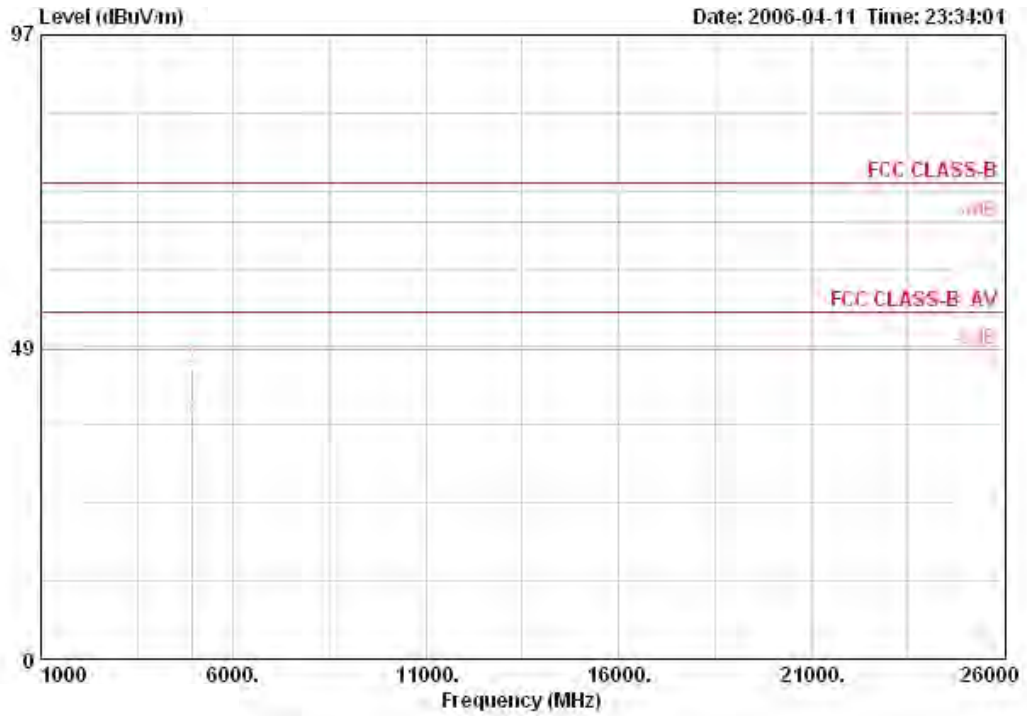

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Gain	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4923.960	36.95	-17.05	54.00	33.45	4.73	35.10	33.88	AVERAGE	162	307
2	4923.960	45.26	-28.74	74.00	33.45	4.73	35.10	42.19	PEAK	162	307


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 1 / Ant. 5

Vertical

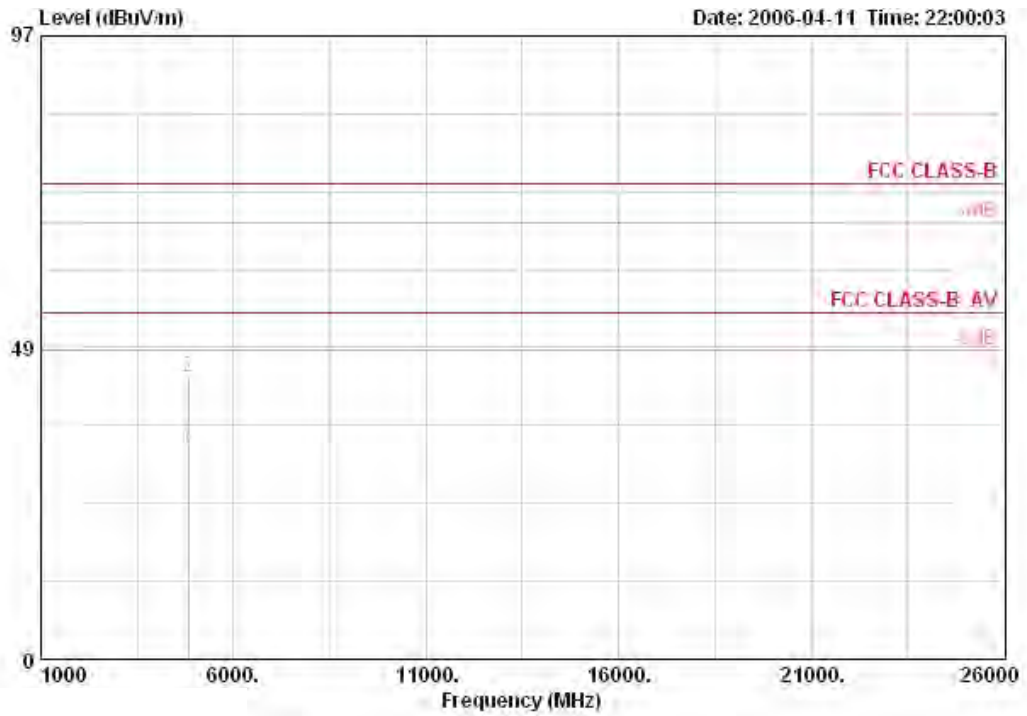

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4824.280	32.80	-21.20	54.00	33.22	4.68	35.10	30.00	AVERAGE	101	0
2	4824.280	43.83	-30.17	74.00	33.22	4.68	35.10	41.03	PEAK	101	0


Horizontal

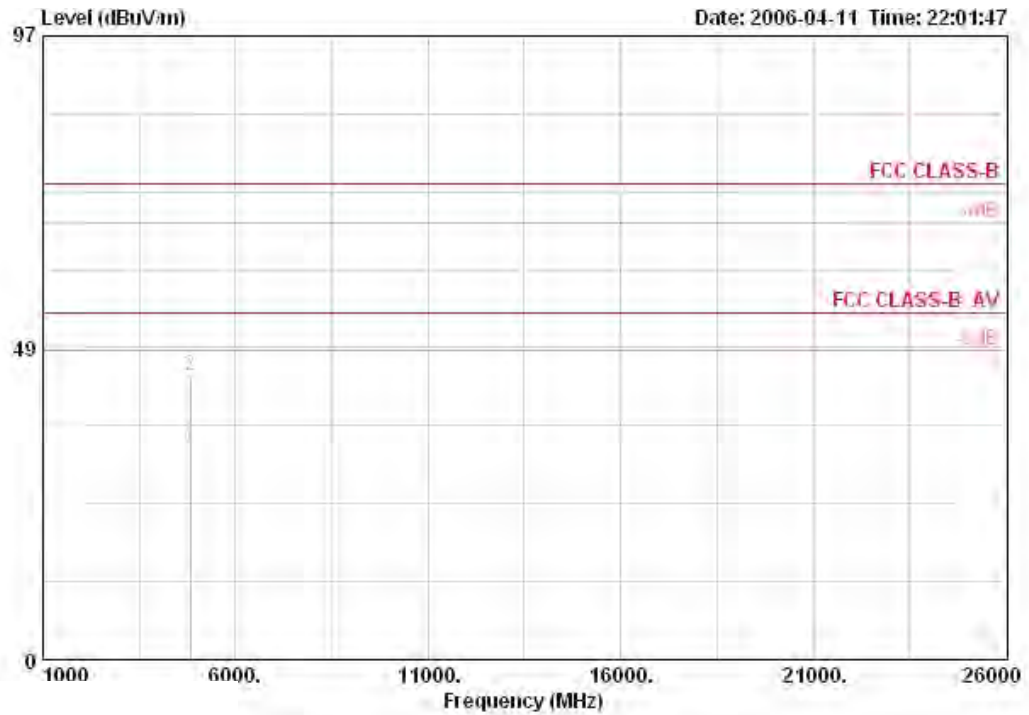

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4828.400	33.23	-20.77	54.00	33.22	4.68	35.10	30.44	AVERAGE		127	0
2	4828.400	44.09	-29.91	74.00	33.22	4.68	35.10	41.30	PEAK		127	0


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 6 / Ant. 5

Vertical

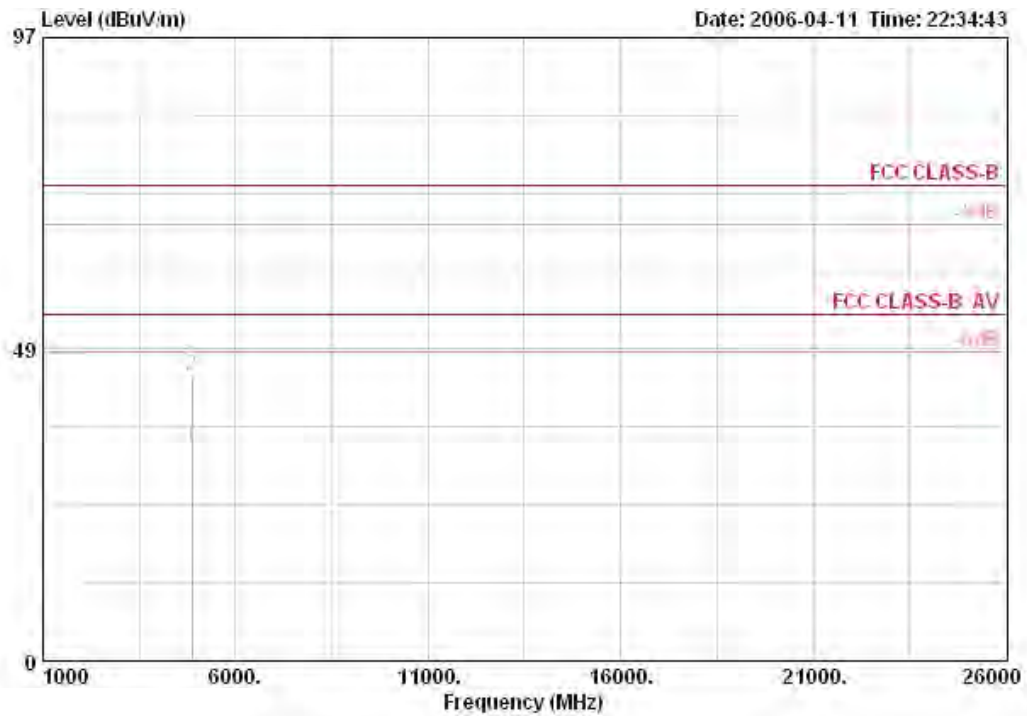

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1	4874.720	33.57	-20.43	54.00	33.33	4.69	35.10	30.64 AVERAGE	100	360
2	4874.720	44.28	-29.72	74.00	33.33	4.69	35.10	41.35 PEAK	100	360


Horizontal

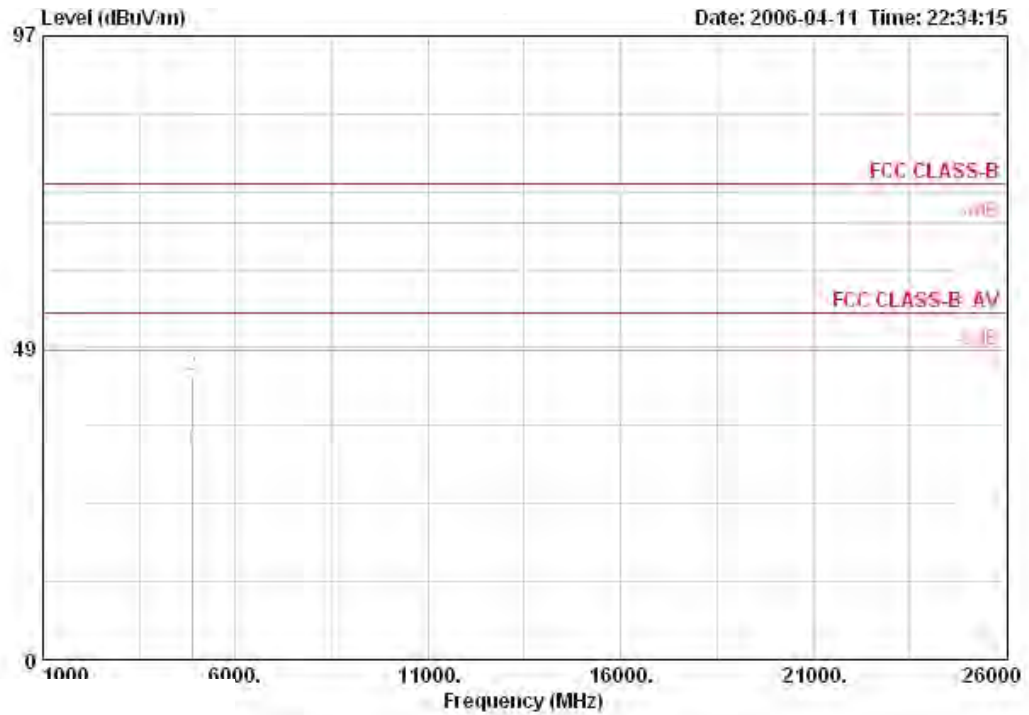

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4874.720	32.57	-21.43	54.00	33.33	4.69	35.10	29.65	AVERAGE		124	360
2	4874.720	44.12	-29.88	74.00	33.33	4.69	35.10	41.19	PEAK		124	360


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Channel 11 / Ant. 5

Vertical

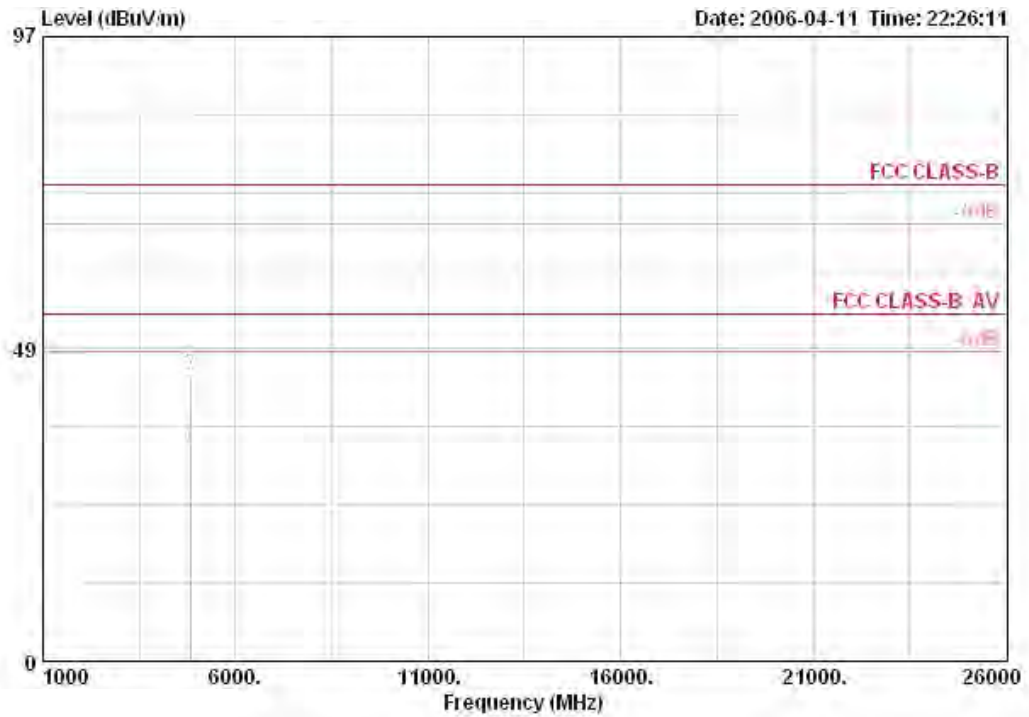

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4818.280	33.36	-20.64	54.00	33.22	4.68	35.10	30.56	AVERAGE	100	360
2	4818.280	44.34	-29.66	74.00	33.22	4.68	35.10	41.55	PEAK	100	360


Horizontal

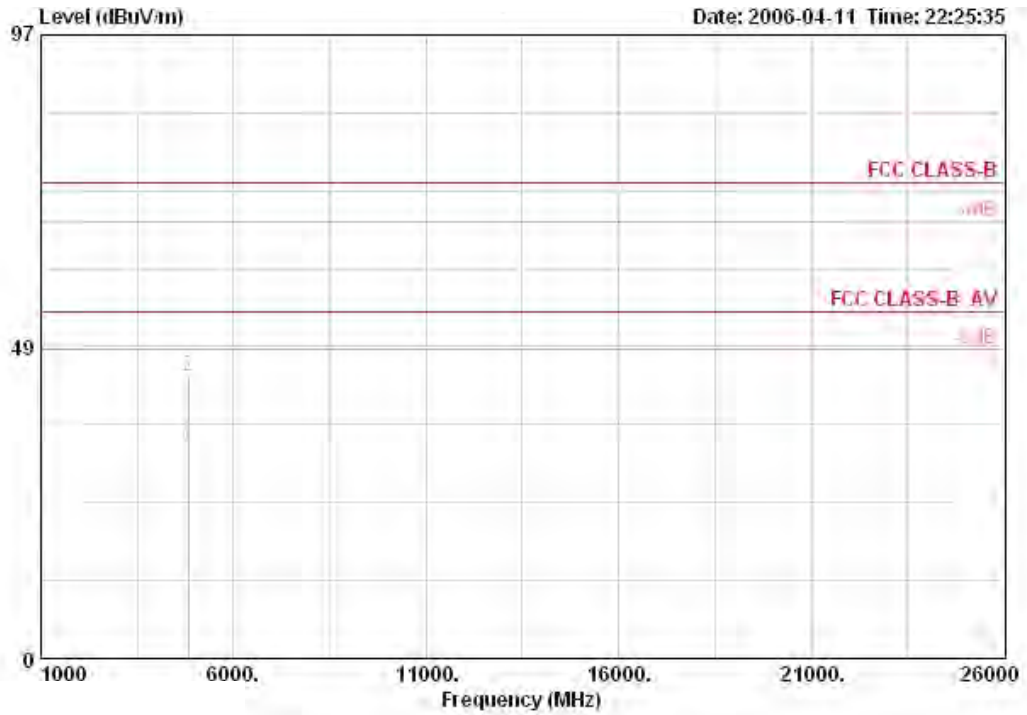

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4820.800	33.41	-20.59	54.00	33.22	4.68	35.10	30.62	AVERAGE		123	360
2	4820.800	43.87	-30.13	74.00	33.22	4.68	35.10	41.07	PEAK		123	360


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11g Turbo Channel 6 / Ant. 5

Vertical

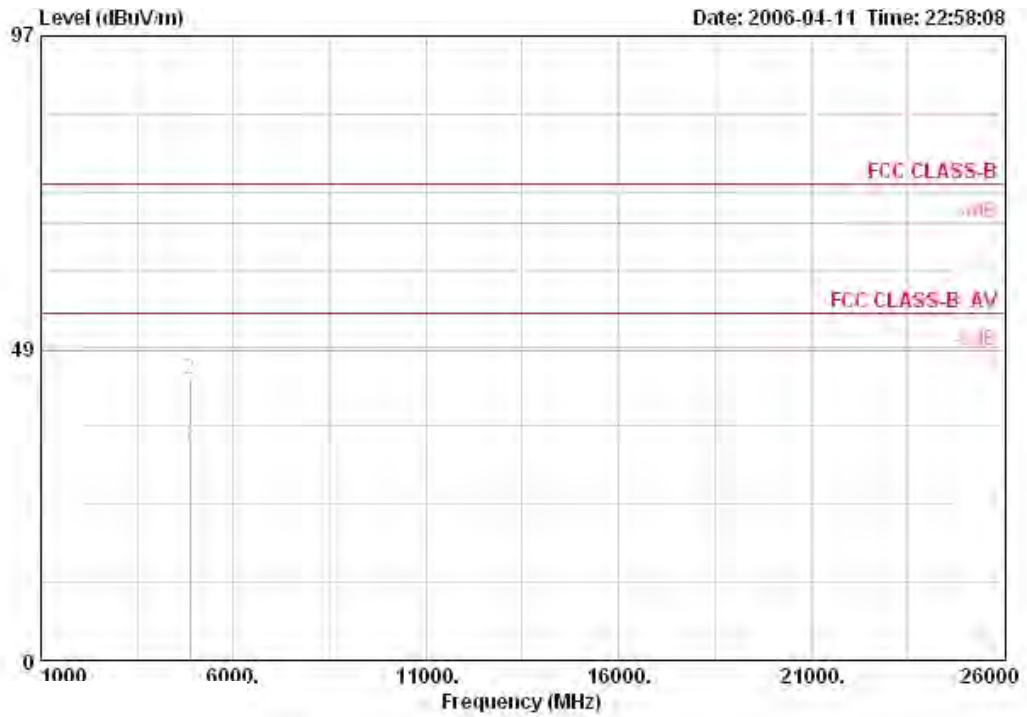

	Freq	Level	Over Limit	Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	4874.360	32.97	-21.03	54.00	33.33	4.69	35.10	30.05	AVERAGE		110	360
2	4874.360	43.73	-30.27	74.00	33.33	4.69	35.10	40.80	PEAK		110	360

Horizontal

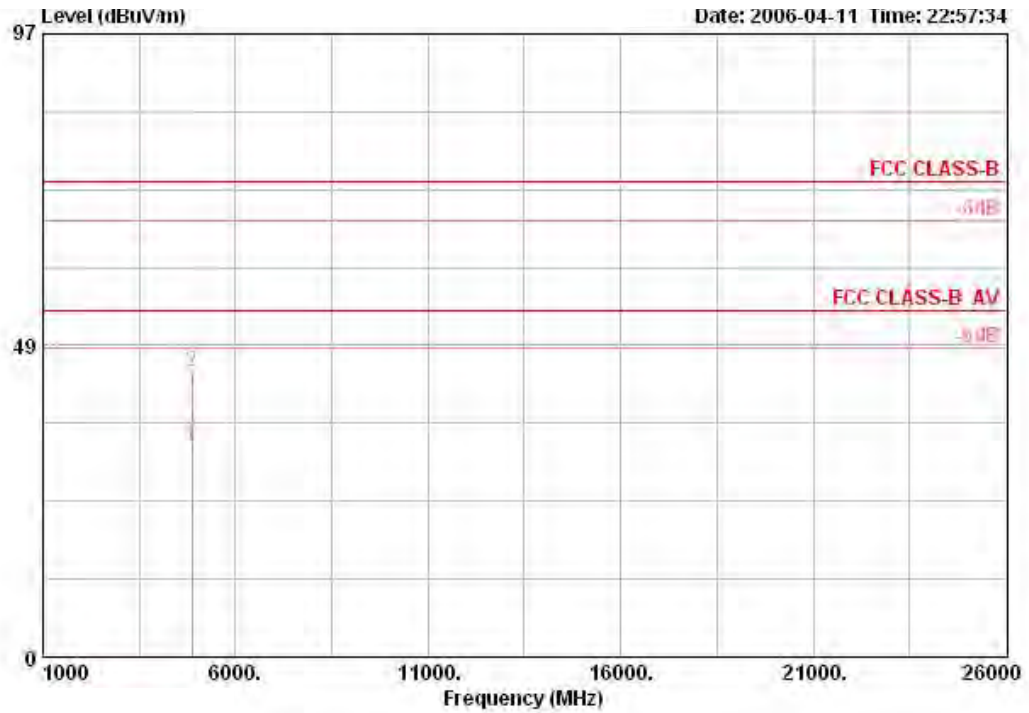

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line Factor	Loss Factor	Factor	Level Remark	Pos	Pos			
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dBuV	cm	deg			
1	4874.360	32.89	-21.11	54.00	33.33	4.69	35.10	29.96	AVERAGE	100	360
2	4874.360	44.29	-29.71	74.00	33.33	4.69	35.10	41.37	PERK	100	360

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 8/9


Vertical

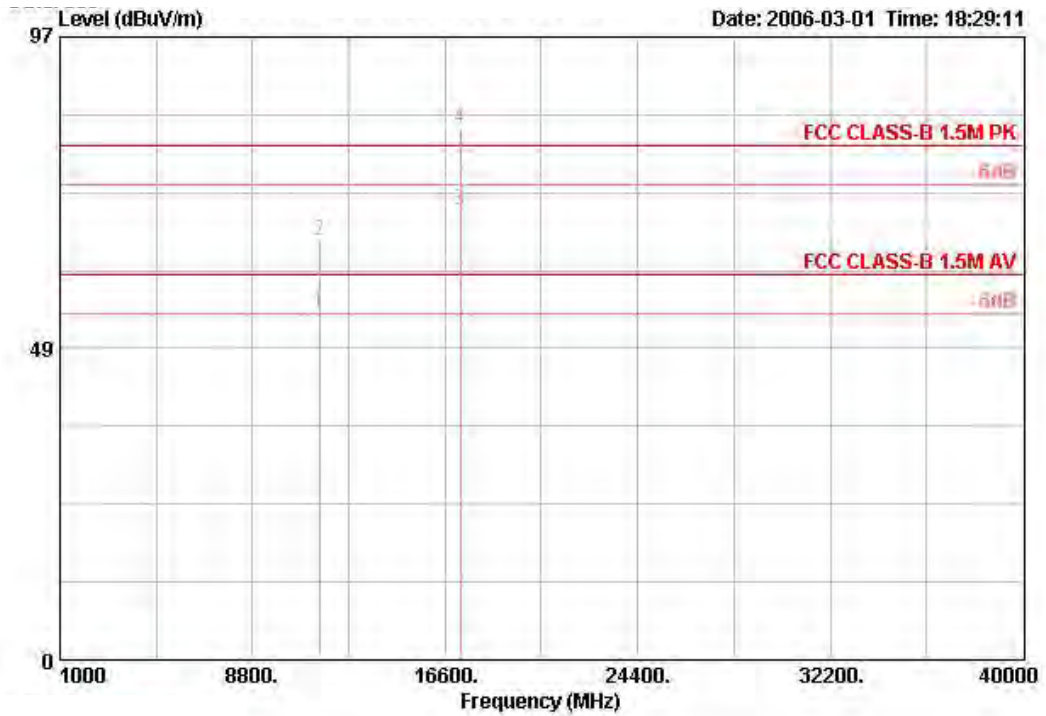

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11491.120	54.11	-5.89	60.00	39.20	6.96	35.10	43.05	AVERAGE	126	296
2	11491.120	65.36	-14.64	80.00	39.20	6.96	35.10	54.30	PEAK	126	296
3	17231.240	70.17			40.93	18.15	35.00	46.09	AVERAGE	128	256
4	17231.240	82.79			40.93	18.15	35.00	58.72	PEAK	128	256

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

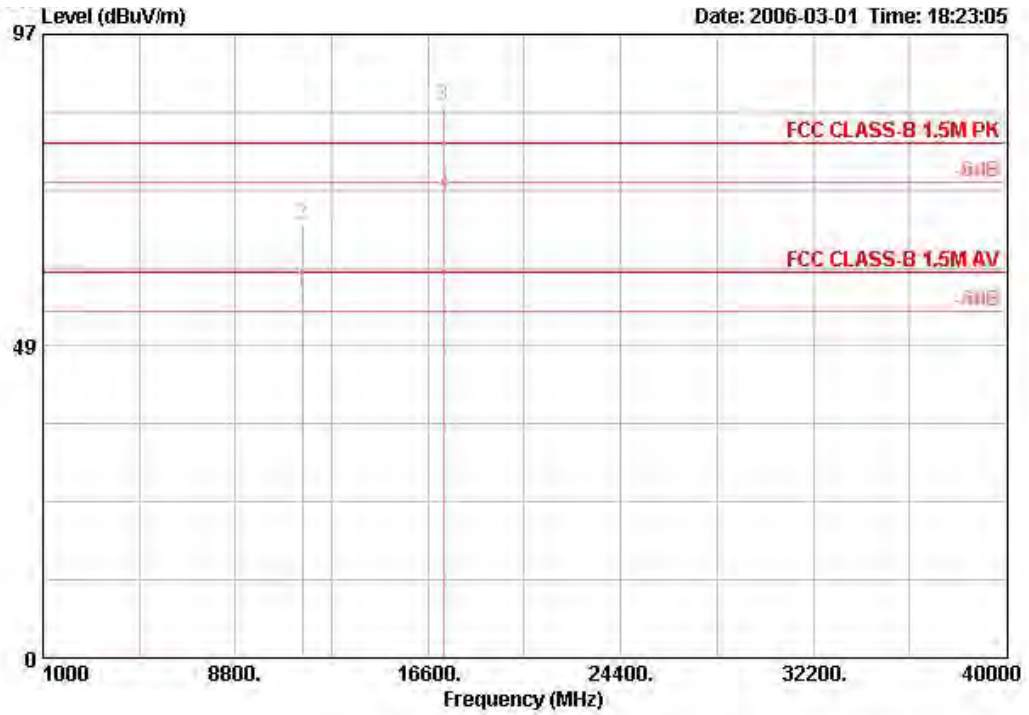


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11490.360	57.01	-2.99	60.00	39.20	6.96	35.10	45.95	AVERAGE	100	304
2	11490.360	67.37	-12.63	80.00	39.20	6.96	35.10	56.31	PEAK	100	304
3 @	17232.680	85.81			40.93	18.15	35.00	61.73	PEAK	139	270
4 @	17234.120	72.04			40.93	18.15	35.00	47.96	AVERAGE	139	270

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 8/9


Vertical

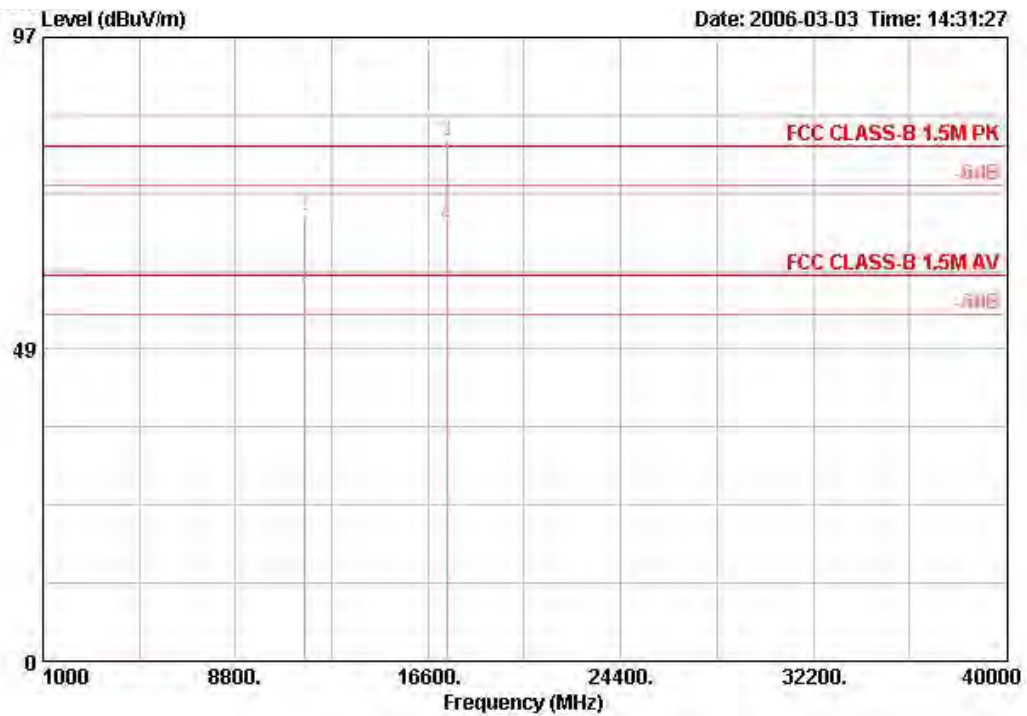

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	11570.560	57.86	-2.14	60.00	39.21	7.06	35.13	46.72	AVERAGE	110	230
2	11570.560	69.19	-10.81	80.00	39.21	7.06	35.13	58.05	PEAK	110	230
3 @	17350.560	80.79			41.44	17.41	35.04	56.98	PEAK	105	309
4 @	17358.080	67.72			41.44	17.41	35.04	43.91	AVERAGE	105	309

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

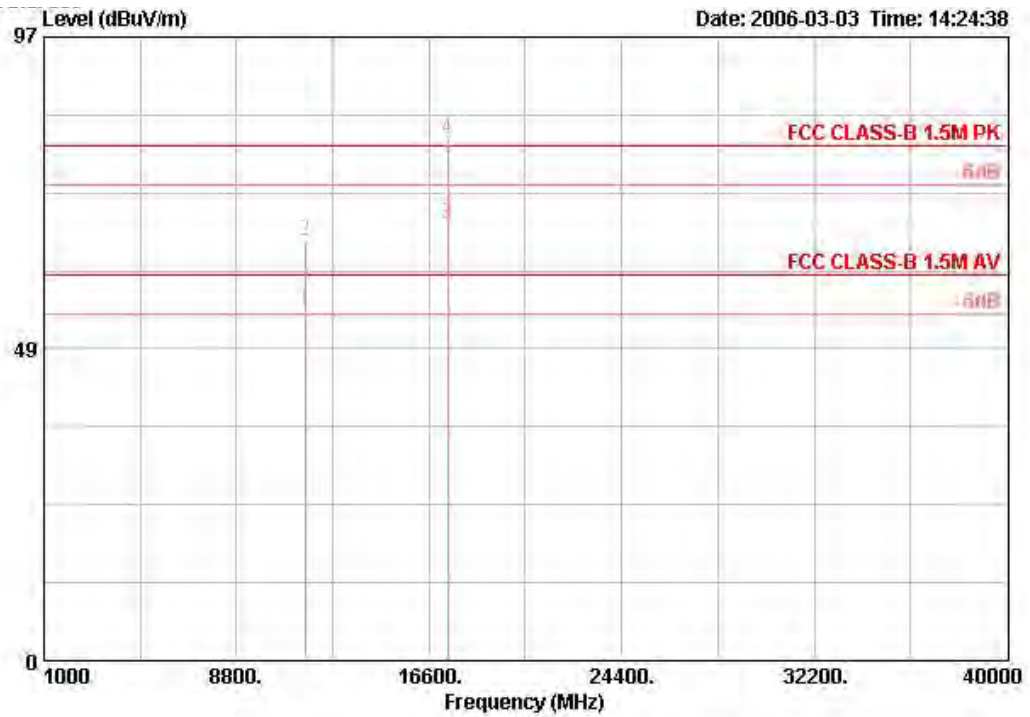


	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Loss	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	11569.560	54.56	-5.44	60.00	39.21	7.06	35.12	43.42	AVERAGE	100	266
2	11569.560	65.30	-14.70	80.00	39.21	7.06	35.12	54.15	PEAK	100	266
3	17356.080	68.06			41.44	17.41	35.04	44.25	AVERAGE	139	258
4	17356.080	81.20			41.44	17.41	35.04	57.39	PEAK	139	258

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 8/9


Vertical

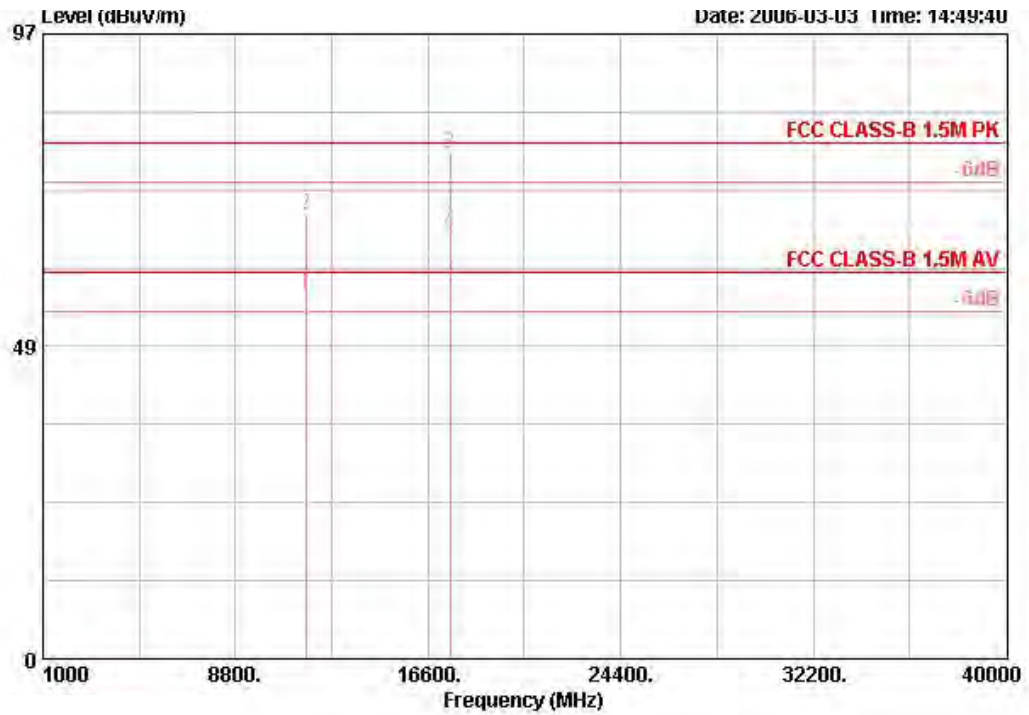

	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table			
Freq	Level	Limit	Line Factor	Loss	Factor	Level	Pos	Pos			
MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	cm	deg			
1 !	11652.320	56.51	-3.49	60.00	39.23	7.15	35.16	45.29	AVERAGE	100	335
2	11659.040	68.86	-11.14	80.00	39.23	7.15	35.16	57.64	PEAK	108	335
3 @	17474.440	78.51	-1.49	80.00	41.95	16.66	35.09	54.98	PEAK	100	312
4 @	17477.000	66.17		60.00	41.95	16.66	35.09	42.65	AVERAGE	100	312

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

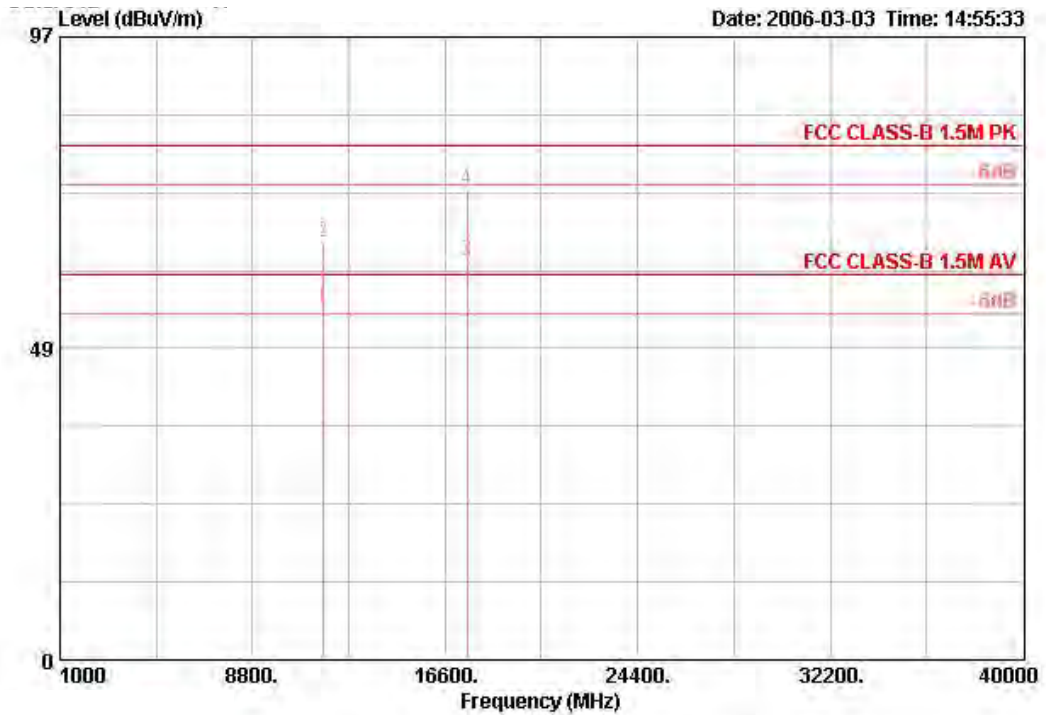


	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		cm	deg
1	11649.480	54.59	-5.41	60.00	39.23	7.15	35.16	43.37	AVERAGE		122	264
2	11649.480	65.12	-14.88	80.00	39.23	7.15	35.16	53.91	PEAK		122	264
3	17477.000	62.23			41.95	16.66	35.09	38.70	AVERAGE		125	283
4	17477.000	73.11	-6.89	80.00	41.95	16.66	35.09	49.59	PEAK		125	283

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 8/9


Vertical

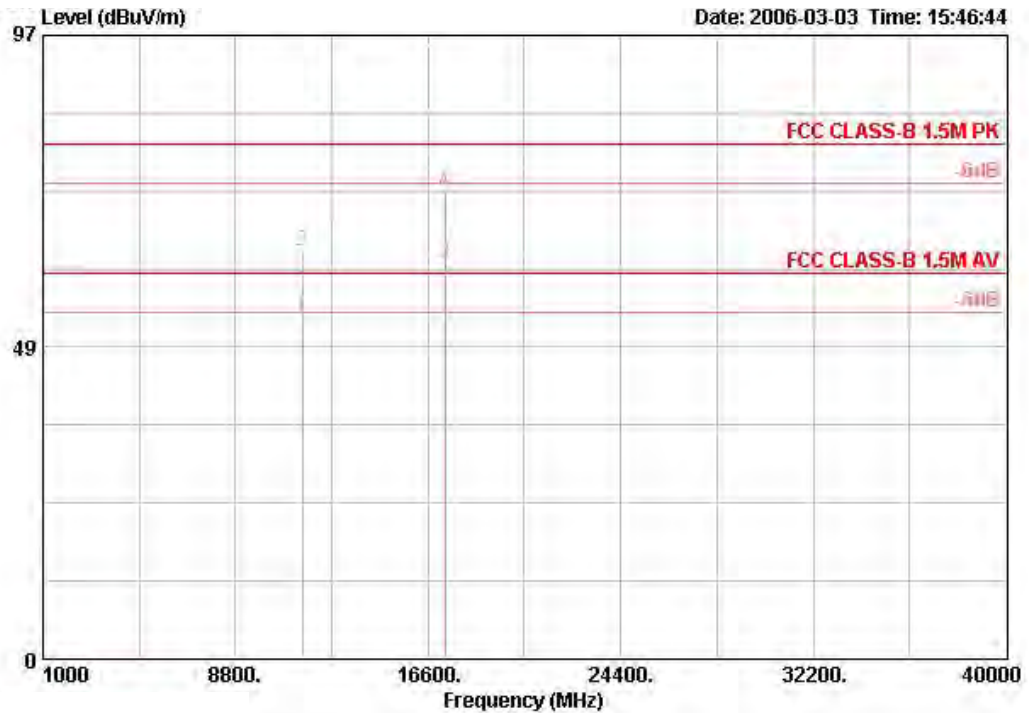

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	dBuV		cm	deg
1	11522.400	53.01	-6.99	60.00	39.20	7.01	35.11	41.91	AVERAGE		105	329
2	11522.400	63.54	-16.46	80.00	39.20	7.01	35.11	52.43	PEAK		105	329
3 @	17274.400	61.61			41.07	17.90	35.01	37.65	AVERAGE		107	310
4	17274.400	72.82	-7.18	80.00	41.07	17.90	35.01	48.85	PEAK		107	310

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

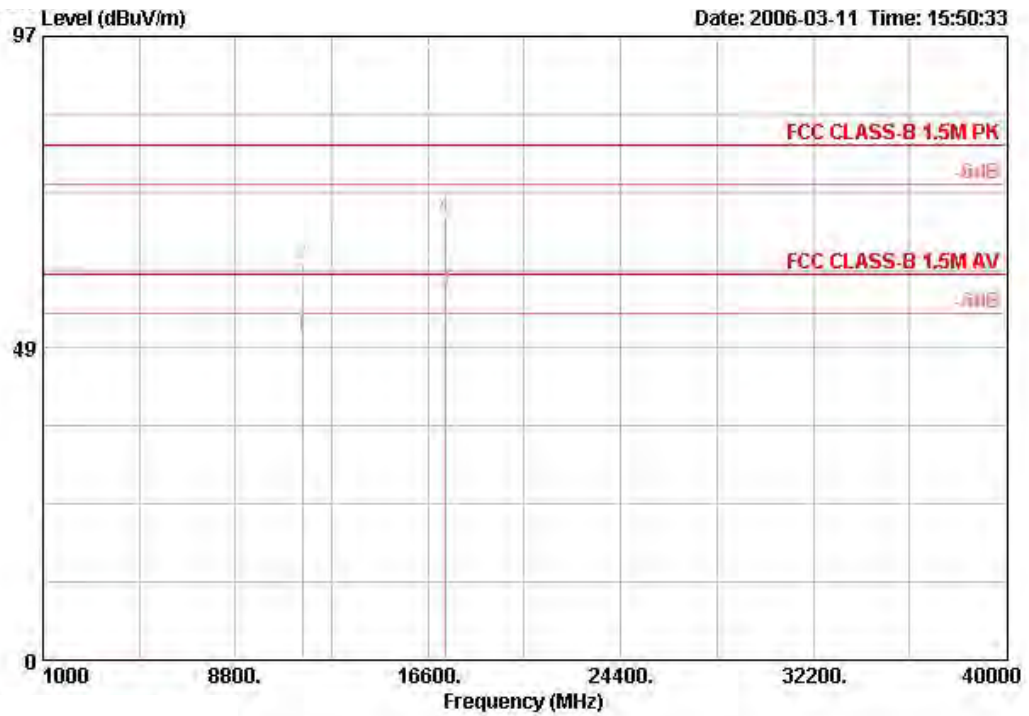

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	11520.000	50.22	-9.78	60.00	39.22	7.10	35.14	39.04	AVERAGE	125	300
2	11520.000	61.66	-18.34	80.00	39.22	7.10	35.14	50.48	PEAK	125	300
3 @	17280.100	57.45	-2.55	60.00	41.66	16.91	35.06	33.94	AVERAGE	108	250
4	17280.100	68.80	-11.20	80.00	41.66	16.91	35.06	45.29	PEAK	108	250