


NOTES: UNLESS OTHERWISE SPECIFIED)

- MUST CONFORM TO UL969 MARKING & LABELING SYSTEM PGDQ2; VAL-THERM-D OR EQUIVALENT.
- Recommended or equivalent:  
 Material: .010 UV gloss Weatherability Lexan  
 Adhesive: .002 adhesive (perm) 83# densified Kraft Liner  
 Colors: UV MSK-1019 Opaque Black  
         UV Bright Metallic Silver (PMS 877C)  
         UV MSK-1046 Super Opaque White
- ALL TEXT AND GRAPHICS ARE BLACK.
- CE, GITEKI & KOREAN MARK HAVE MINIMUM HEIGHT OF 5mm
- Factory Code: Shanghai = "S", Shenzhen = "SZ"


REV	DATE	DESCRIPTION
2	11/16/11	Initial Release
3	12/2/11	Updated FCC, IC and Giteki certs
A	1/27/12	Release to Production
B	8/1/12	Update factory code to "SZ"
C	12/12/13	Update FCC and IC IDs

RECT 80mm x 35 mm Rad 2.0mm

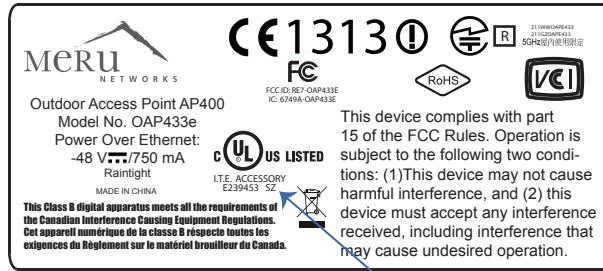

SCALE 1:1

See Note 5

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES			TITLE					
ANG	2 PLCS	3 PLCS	Label, Regulatory, OAP433e					
±1.5°	±.05	±.010						
DO NOT SCALE THIS DRAWING			THIRD ANGLE PROJECTION 					
1:1								
PROFILE NAME			ENG DATE	HS	DRAWING NUMBER	SHEET	REV/REL	DWG SIZE
			12/12/13		845-00576		C	C2/A1R

P

MERU NETWORKS PROPRIETARY  
 USE PURSUANT TO COMPANY INSTRUCTIONS

RAIN  
TIGHT  
SEAL  
BR



Outdoor Access Point AP400  
Model No. OAP433e  
Power Over Ethernet:  
-48 V $\pm$ 750 mA  
Raintight  
MADE IN CHINA

This Class B digital apparatus meets all the requirements of the Canadian Interference Causing Equipment Regulations. Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.


CE1313

FC



Contains Three (3) FCC ID: R27-AP433  
Contains Three (3) IC: 6745A-AP433




LTE, ACCESSORY  
E239453 5



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

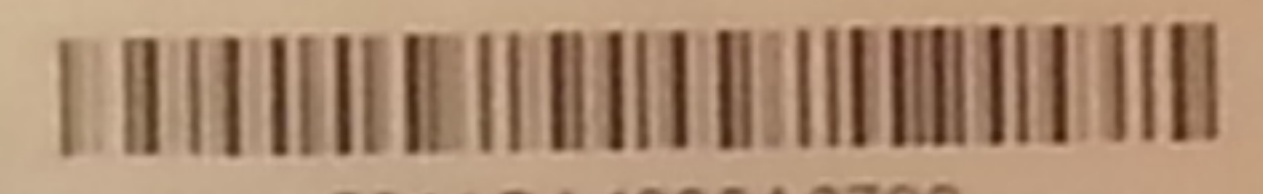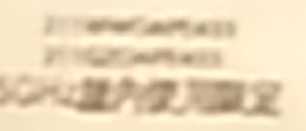

53110A4330A6733

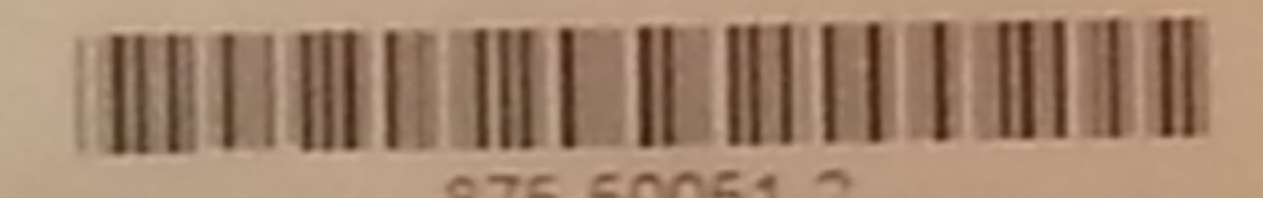

875-50051-2