



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*
3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

Electromagnetic Compatibility Criteria Test Report

for the

**Firetide
Model 2200**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

MET Report: EMCS80650-FCC247

April 3, 2008

Prepared For:

**Firetide
16795 Lark Ave, Suite 200
Los Gatos, CA 95032**



Firetide
2200

Electromagnetic Compatibility
Cover Page

CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria Test Report


for the

**Firetide
Model 2200**

Tested Under

the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators


Minh Ly, Project Engineer
Electromagnetic Compatibility Lab


Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 7, June 2007 under normal use and maintenance.


Shawn McMillen, Wireless Manager
Electromagnetic Compatibility Lab



Firetide
2200

Electromagnetic Compatibility
Report Status

CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Report Status Sheet

| Revision | Report Date | Reason for Revision |
|----------|------------------|---------------------|
| Ø | January 17, 2008 | Initial Issue. |



Table of Contents

| | | |
|-------------|---|-----------|
| I. | Executive Summary | 1 |
| | A. Purpose of Test | 2 |
| | B. Executive Summary | 2 |
| II. | Equipment Configuration | 3 |
| | A. Overview | 4 |
| | B. References | 5 |
| | C. Test Site | 6 |
| | D. Description of Test Sample | 6 |
| | E. Equipment Configuration | 9 |
| | F. Support Equipment | 10 |
| | G. Ports and Cabling Information | 11 |
| | H. Mode of Operation | 11 |
| | I. Method of Monitoring EUT Operation | 11 |
| | J. Modifications | 11 |
| | a) Modifications to EUT | 11 |
| | b) Modifications to Test Standard | 11 |
| | K. Disposition of EUT | 11 |
| III. | Electromagnetic Compatibility Criteria for Unintentional Radiators | 12 |
| | § 15.107(a) Conducted Emissions Limits | 13 |
| | § 15.109(a) Radiated Emission Limits | 17 |
| | § 15.09(a) Radiated Emissions Limits | 17 |
| IV. | Electromagnetic Compatibility Criteria for Intentional Radiators | 20 |
| | § 15.203 Antenna Requirement | 21 |
| | § 15.207(a) Conducted Emissions Limits | 22 |
| | § 15.247(a) 6 dB and 99% Bandwidth | 25 |
| | § 15.247(b) Peak Power Output and RF Exposure | 32 |
| | § 15.247(d) Spurious Emissions Requirements – Radiated and RF Conducted | 35 |
| | § 15.247(d) Peak Power Spectral Density | 63 |
| V. | Test Equipment | 68 |
| VI. | Certification & User’s Manual Information | 70 |
| | A. Certification Information | 71 |
| | B. Label and User’s Manual Information | 75 |
| VII. | ICES-003 Procedural & Labeling Requirements | 77 |



List of Tables

| | |
|---|----|
| Table 1. Executive Summary of EMC Part 15.247 Compliance Testing | 2 |
| Table 2. EUT Summary Table..... | 4 |
| Table 3. References | 5 |
| Table 4. Equipment Configuration - Intentional | 9 |
| Table 5. Equipment Configuration - Unintentional..... | 9 |
| Table 6. Support Equipment – Radiated Measurements | 10 |
| Table 7. Support Equipment – Conducted Measurements | 10 |
| Table 8. Ports and Cabling Information – Conducted Measurements & Frequency Stability..... | 11 |
| Table 9. Ports and Cabling Information – Radiated Measurements | 11 |
| Table 10. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)..... | 13 |
| Table 11. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)..... | 14 |
| Table 12. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)..... | 14 |
| Table 13. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) | 17 |
| Table 14. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz..... | 18 |
| Table 15. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) | 22 |
| Table 16. Conducted Emissions Test Results, Phase Line | 23 |
| Table 17. Conducted Emissions Test Results, Neutral Line..... | 23 |
| Table 18. Output Power Requirements from §15.247..... | 32 |
| Table 19. Restricted Bands of Operation..... | 35 |
| Table 20. Test Equipment List – Santa Clara..... | 69 |
| Table 21. Test Equipment List – Union City..... | 69 |

List of Figures

| | |
|---|---|
| Figure 1. Block Diagram of Test Configuration (Radiated Emissions)..... | 7 |
| Figure 2. Block Diagram of Test Configuration (Conducted Emissions) | 8 |

List of Photographs

| | |
|---|----|
| Photograph 1. Firetide Model 2200..... | 6 |
| Photograph 2. Conducted Emissions Test Setup | 16 |
| Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz..... | 19 |
| Photograph 4. Test Equipment and setup for various Radiated Measurements..... | 56 |
| Photograph 5. Test Equipment and setup for various Radiated Measurements..... | 57 |



List of Terms and Abbreviations

| | |
|--------------|--|
| AC | Alternating Current |
| ACF | Antenna Correction Factor |
| Cal | Calibration |
| <i>d</i> | Measurement Distance |
| dB | Decibels |
| dB μ A | Decibels above one microamp |
| dB μ V | Decibels above one microvolt |
| dB μ A/m | Decibels above one microamp per meter |
| dB μ V/m | Decibels above one microvolt per meter |
| DC | Direct Current μ |
| E | Electric Field |
| DSL | Digital Subscriber Line |
| ESD | Electrostatic Discharge |
| EUT | Equipment Under Test |
| <i>f</i> | Frequency |
| FCC | Federal Communications Commission |
| GR-1089-CORE | (GR) General Requirement(s) imposed by the NEBS standard, (CORE) Central Office Recovery Express (AT&T), (1089) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment |
| GRP | Ground Reference Plane |
| H | Magnetic Field |
| HCP | Horizontal Coupling Plane |
| Hz | Hertz |
| IEC | International Electrotechnical Commission |
| kHz | kilohertz |
| kPa | kilopascal |
| kV | kilovolt |
| LISN | Line Impedance Stabilization Network |
| MHz | Megahertz |
| μ H | microhenry |
| μ | microfarad |
| μ s | microseconds |
| NEBS | Network Equipment-Building System |
| PRF | Pulse Repetition Frequency |
| RF | Radio Frequency |
| RMS | Root-Mean-Square |
| TWT | Traveling Wave Tube |
| V/m | Volts per meter |
| VCP | Vertical Coupling Plane |



I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Firetide Model 2200, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Model 2200. Firetide should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Model 2200, has been **permanently** discontinued

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Firetide, purchase order number PO-1850. All tests were conducted using measurement procedure ANSI C63.4-2003.

| FCC Reference | IC Reference | Description | Compliance |
|--|-----------------------|---|------------|
| 47 CFR Part 15.247:2005 | RSS-210 Issue 6: 2005 | Applicable Standard | Compliant |
| Title 47 of the CFR, Part 15 §15.203 | N/A | Antenna Requirement | Compliant |
| Title 47 of the CFR, Part 15 §15.205 | RSS-210(A8.5) | Emissions at Restricted Band | Compliant |
| Title 47 of the CFR, Part 15 §15.207(a) | RSS-210(7.2.2) | Conducted Emission Voltage | Compliant |
| Title 47 of the CFR, Part 15 §15.247(a)(1) | RSS-210(A8.1) | Occupied Bandwidth | Compliant |
| Title 47 of the CFR, Part 15 §15.247(b) | RSS-210(A8.4) | RF Output Power | Compliant |
| Title 47 of the CFR, Part 15 §15.247(c) | RSS-210(A8.4) | Antenna Gain >6dBi | Compliant |
| Title 47 of the CFR, Part 15 §15.209, §15.247(d) | RSS-210(A8.5) | Radiated and Conducted Spurious Emissions | Compliant |
| Title 47 of the CFR, Part 15; §15.247(e) | RSS-210(A8.3) | Power Spectral Density | Compliant |
| Title 47 of the CFR, Part 15 §15.247(i) | RSSGen(5.5) | Maximum Permissible Exposure | Compliant |
| N/A | RSSGen(4.8) | Receiver Spurious Emissions | Compliant |

Table 1 Executive Summary of EMC Part 15.247 Compliance Testing



II. Equipment Configuration



A. Overview

MET Laboratories, Inc. was contracted by Firetide to perform testing on the Model 2200, under Firetide's purchase order number PO-1850.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Firetide, Model 2200.

The results obtained relate only to the item(s) tested.

| | | |
|---------------------------------------|---|---|
| Model(s) Tested: | 2200 | |
| Model(s) Covered: | 2200 | |
| EUT Specifications: | Primary Power: 100-240V | |
| | FCC ID: REP-2200-1, IC: 4988A-2200 | |
| | Type of Modulations: | DSSS (Direct Sequence Spread Spectrum) OFDM (Orthogonal Frequency Division multiplexing) |
| | Emission Designators: | 802.11b: 12M8D7D 802.11g: 16M9D7D |
| | Equipment Code: | DTS |
| | Peak RF Output Power: | 802.11 b: 24.93dBm 802.11 g: 25.34dBm |
| | EUT Frequency Ranges: | 2412 – 2462MHz |
| Analysis: | The results obtained relate only to the item(s) tested. | |
| Environmental Test Conditions: | Temperature: 15-35° C | |
| | Relative Humidity: 30-60% | |
| | Barometric Pressure: 860-1060 mbar | |
| Evaluated by: | Minh Ly | |
| Date(s): | April 3, 2008 | |

Table 2. EUT Summary Table



B. References

| | |
|--|---|
| CFR 47, Part 15, Subpart C | Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies |
| CFR 47, Part 15, Subpart B | Electromagnetic Compatibility: Criteria for Radio Frequency Devices |
| ICES-003, Issue 4 February 2004 | Electromagnetic Compatibility: Criteria for Radio Frequency Devices |
| RSS-210, Issue 7, June 2007 | Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment |
| ANSI C63.4:2003 | Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI/NCSL Z540-1-1994 | Calibration Laboratories and Measuring and Test Equipment - General Requirements |
| ANSI/ISO/IEC 17025:2000 | General Requirements for the Competence of Testing and Calibration Laboratories |

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Drive, Building 6, Santa Clara, California 95054 and 33439 Western Ave., Union City, CA 94587. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.


Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by A2LA (Certificate Number 591.02).

D. Description of Test Sample

The Firetide Model 2200, is an outdoor Customer Premises Equipment (CPE) equipped with an 802.11 b/g radio card.




Photograph 1. Firetide Model 2200

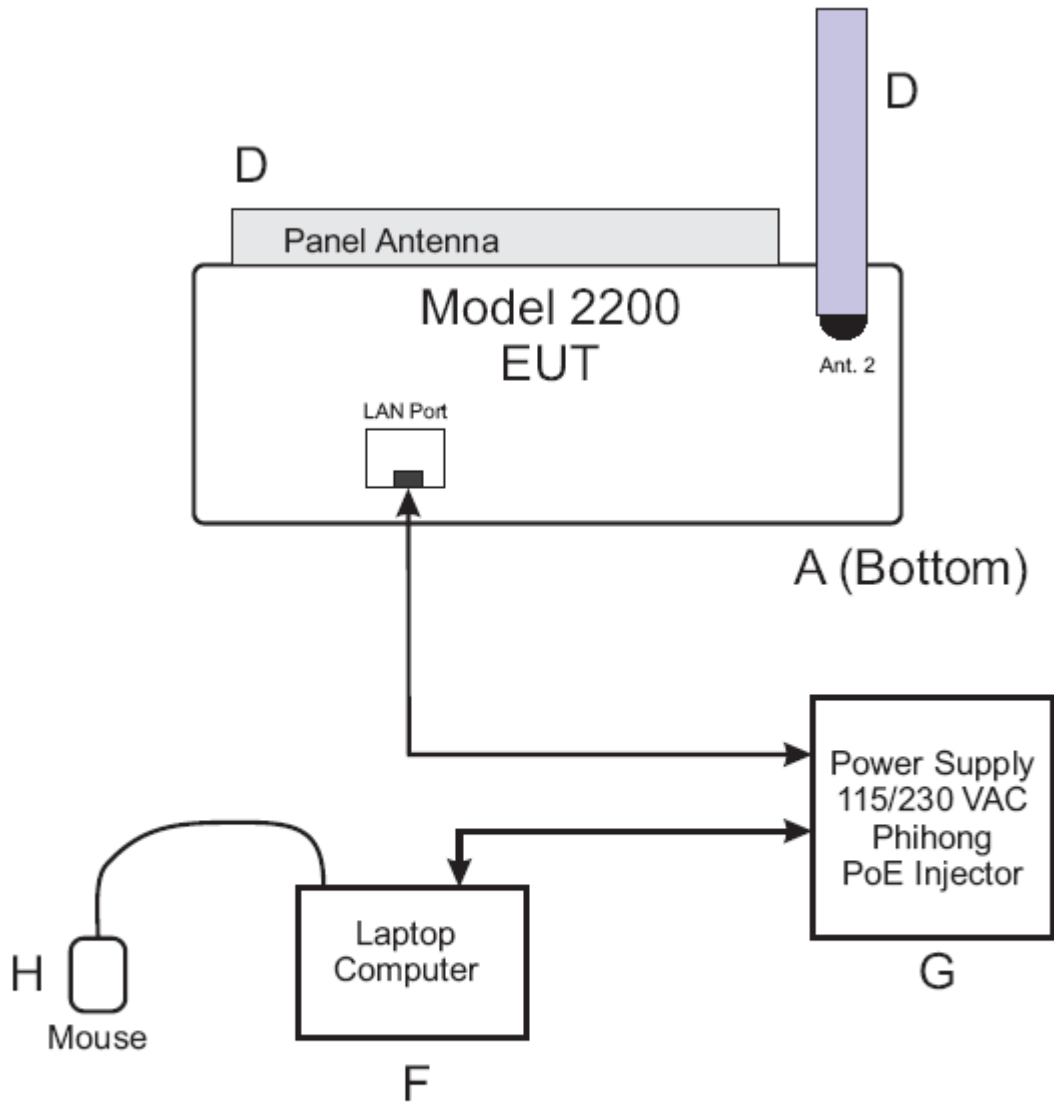

Block Diagram of
Test Configuration
(Radiated Emissions)

Figure 1. Block Diagram of Test Configuration (Radiated Emissions)

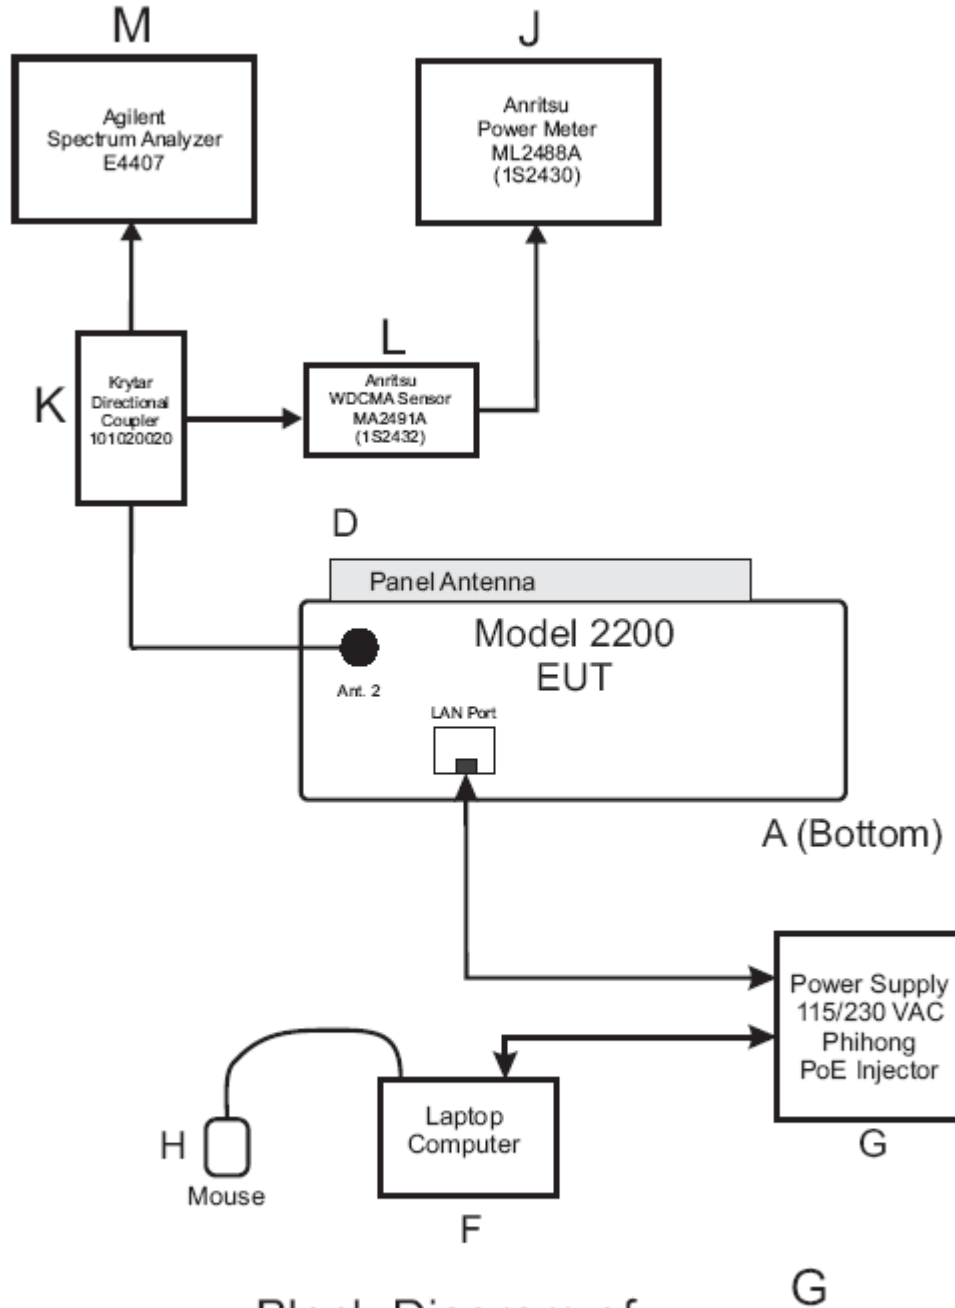

Block Diagram of
Test Configuration
(Conducted Emissions)

Figure 2. Block Diagram of Test Configuration (Conducted Emissions)



E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

| Reference I.D. | Name/Description | Model Number | Serial Number |
|----------------|----------------------------------|---------------|-----------------|
| A | UUT, Firetide Model 2200 | 2200 | M09080706000335 |
| D | Antenna, 8 dBi OMNI, 2.4 GHz | MFB24008 | N/A |
| D | Antenna, 13 dBi Patch, 2.4 GHz | C841-590014-A | N/A |
| F | Laptop Computer, IBM | T42 | 99-LH3M7 |
| G | AC/DC Power Supply, Phihong, PoE | POE20U-560 | P72405589B1 |
| H | Mouse, Logitech | M-BT96a | N/A |

Table 4. Equipment Configuration - Intentional

| Reference I.D. | Name/Description | Model Number | Serial Number |
|----------------|--------------------------------|---------------|-----------------|
| A | EUT, Firetide Model 2200 | 2200 | M09080705000233 |
| D | Antenna, 8 dBi OMNI, 2.4 GHz | MFB24008 | N/A |
| D | Antenna, 13 dBi Patch, 2.4 GHz | C841-590014-A | N/A |
| F | Laptop Computer, IBM | T42 | 99-LH3M7 |
| G | AC/DC Power Supply, Phihong | PSA18R-120P | P72405589B1 |
| H | Mouse, Logitech | M-BT96a | N/A |

Table 5. Equipment Configuration - Unintentional



F. Support Equipment

Firetide supplied support equipment necessary for the operation and testing of the Model 2200. All support equipment supplied is listed in the following Support Equipment List.

| Reference I.D. | Name/Description | Model Number | Serial Number |
|----------------|---------------------------------|--------------|---------------|
| F | Laptop Computer, IBM | T42 | 99-LH3M7 |
| G | AC/DC Power Supply, Pihong, PoE | POE20U-560 | P72405589B1 |
| H | Mouse, Logitech | M-BT96a | N/A |
| M | Agilent Spectrum Analyzer | E4407 | N/A |

Table 6. Support Equipment – Radiated Measurements

| Reference I.D. | Name/Description | Model Number | Serial Number |
|----------------|---------------------------------|--------------|---------------|
| F | Laptop Computer, IBM | T42 | 99-LH3M7 |
| G | AC/DC Power Supply, Pihong, PoE | POE20U-560 | P72405589B1 |
| H | Mouse, Logitech | M-BT96a | N/A |
| J | Anritsu Power Meter | ML2488A | N/A |
| K | Krytar Directional Coupler | 101020020 | N/A |
| L | Anritsu WDCMA Sensor | MA2491A | N/A |
| M | Agilent Spectrum Analyzer | E4407 | N/A |

Table 7. Support Equipment – Conducted Measurements



G. Ports and Cabling Information

| Reference I.D. | Port Name on EUT | Cable Description | Quantity | Length (m) | Shielded (Y/N) | Termination Box ID & Port ID |
|----------------|------------------|-------------------|----------|------------|----------------|------------------------------|
| 1 | LAN, Ethernet | Cat 5E | 1 | 3 | N | F |
| 2 | G | AC | 1 | N/A | N | G |
| 4 | Antenna 2 | Direct Connect | 1 | N/A | N | K |

Table 8. Ports and Cabling Information – Conducted Measurements & Frequency Stability

| Reference I.D. | Port Name on EUT | Cable Description | Quantity | Length (m) | Shielded (Y/N) | Termination Box ID & Port ID |
|----------------|------------------|-------------------|----------|------------|----------------|------------------------------|
| 1 | LAN, Ethernet | Cat 5E | 1 | 3 | N | F |
| 2 | G | AC | 1 | N/A | N | G |
| 3 | Antenna 1 | Direct Connect | 1 | N/A | N | B/C |
| 4 | Antenna 2 | Direct Connect | 1 | N/A | N | D/E |

Table 9. Ports and Cabling Information – Radiated Measurements

H. Mode of Operation

The EUT was operated in the following manner:

Telnet was used to access the radio in order to change the channel frequency, bit rate and to turn on/off the transmitter.

I. Method of Monitoring EUT Operation

A Spectrum Analyzer and a Power Meter were used to monitor the EUT's transmitter channel and power output.

J. Modifications

a) **Modifications to EUT**

No modifications were made to the EUT.

b) **Modifications to Test Standard**

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Firetide upon completion of testing.



III. Electromagnetic Compatibility Criteria for Unintentional Radiators



Electromagnetic Compatibility Criteria for Unintentional Radiators

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 10. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

15.107 (b) “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 10. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

| Frequency range (MHz) | 15.107(b), Class A Limits (dBµV) | | 15.107(a), Class B Limits (dBµV) | |
|--------------------------|-------------------------------------|---------|-------------------------------------|---------|
| | Quasi-Peak | Average | Quasi-Peak | Average |
| 0.15- 0.5 | 79 | 66 | 66 - 56 | 56 - 46 |
| 0.5 – 5.0 | 73 | 60 | 56 | 46 |
| 5.0 - 30 | 73 | 60 | 60 | 50 |

Note 1 — The lower limit shall apply at the transition frequencies.

Table 10. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)

Test Procedures: The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50Ω/50µH LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were measured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Caroline Reynolds

Test Date(s): January 3, 2008



Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

| FREQ. (MHz) | Corrected Amplitude (dBuV) QP | Limit (dBuV) QP | Results QP | Margin (dB) QP | Corrected Amplitude (dBuV) AVG | Limit (dBuV) AVG | Results AVG | Margin (dB) AVG |
|-------------|-------------------------------|-----------------|------------|----------------|--------------------------------|------------------|-------------|-----------------|
| 14.03 | 48.22 | 60 | Pass | -11.78 | 44.98 | 50 | Pass | -5.02 |
| 7.92 | 42.13 | 60 | Pass | -17.87 | 38.11 | 50 | Pass | -11.89 |
| 12.8 | 46.2 | 60 | Pass | -13.8 | 42.3 | 50 | Pass | -7.7 |
| 8.71 | 44.69 | 60 | Pass | -15.31 | 41.76 | 50 | Pass | -8.24 |
| 14.15 | 48.05 | 60 | Pass | -11.95 | 44.81 | 50 | Pass | -5.19 |
| 0.195 | 49.23 | 63.827 | Pass | -14.597 | 35.4 | 53.827 | Pass | -18.427 |

Table 11. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


| FREQ. (MHz) | Corrected Amplitude (dBuV) QP | Limit (dBuV) QP | Results QP | Margin (dB) QP | Corrected Amplitude (dBuV) AVG | Limit (dBuV) AVG | Results AVG | Margin (dB) AVG |
|-------------|-------------------------------|-----------------|------------|----------------|--------------------------------|------------------|-------------|-----------------|
| 14.03 | 48.35 | 60 | Pass | -11.65 | 45.15 | 50 | Pass | -4.85 |
| 7.99 | 36.53 | 60 | Pass | -23.47 | 36.95 | 50 | Pass | -13.05 |
| 12.8 | 46 | 60 | Pass | -14 | 42.27 | 50 | Pass | -7.73 |
| 8.71 | 46.1 | 60 | Pass | -13.9 | 41.52 | 50 | Pass | -8.48 |
| 14.15 | 48.18 | 60 | Pass | -11.82 | 44.71 | 50 | Pass | -5.29 |
| 11.89 | 45.91 | 60 | Pass | -14.09 | 43.59 | 50 | Pass | -6.41 |

Table 12. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


NOTE: Added 0.45uF capacitor to DC/DC converter to pass 10 to 20MHz range.



Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz)

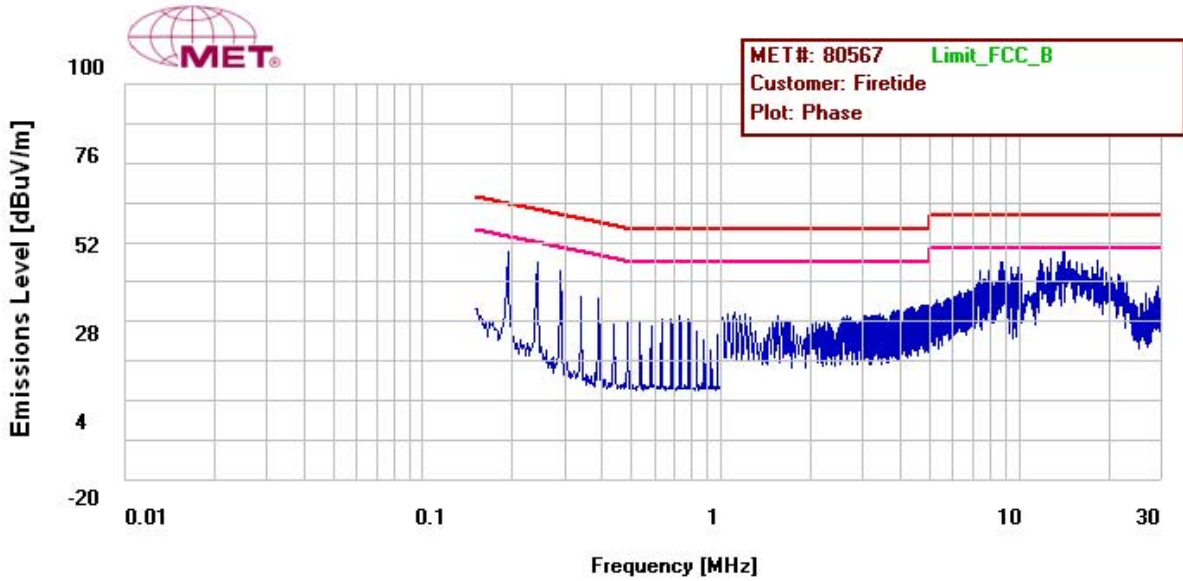


Conducted Emission, Phase Line Plots

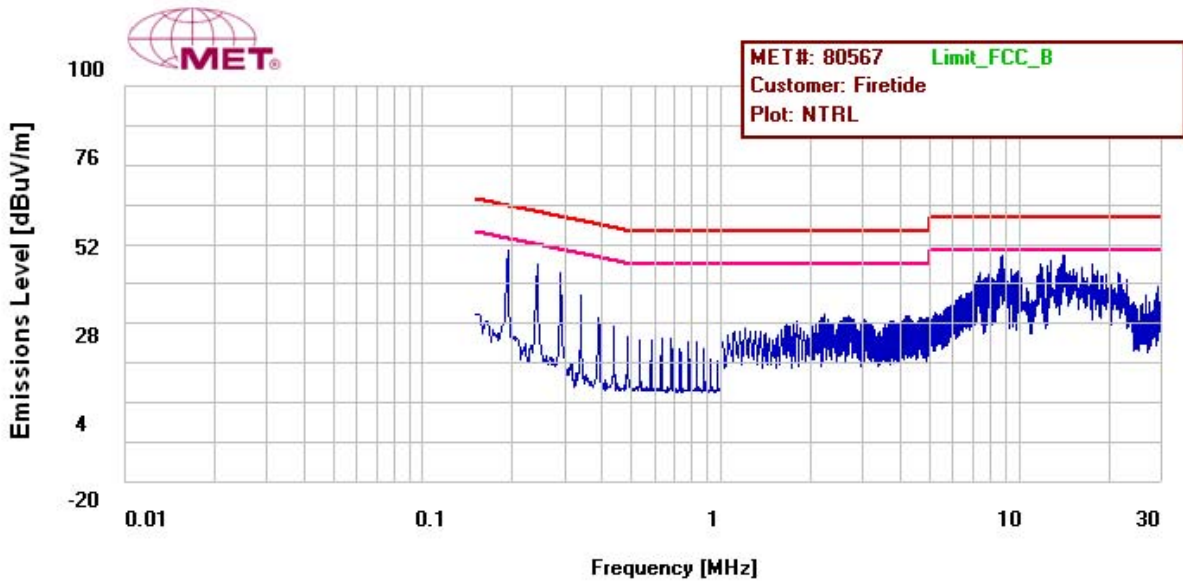

Conducted Emission, Neutral Line Plots

Conducted Emission Limits Test Setup

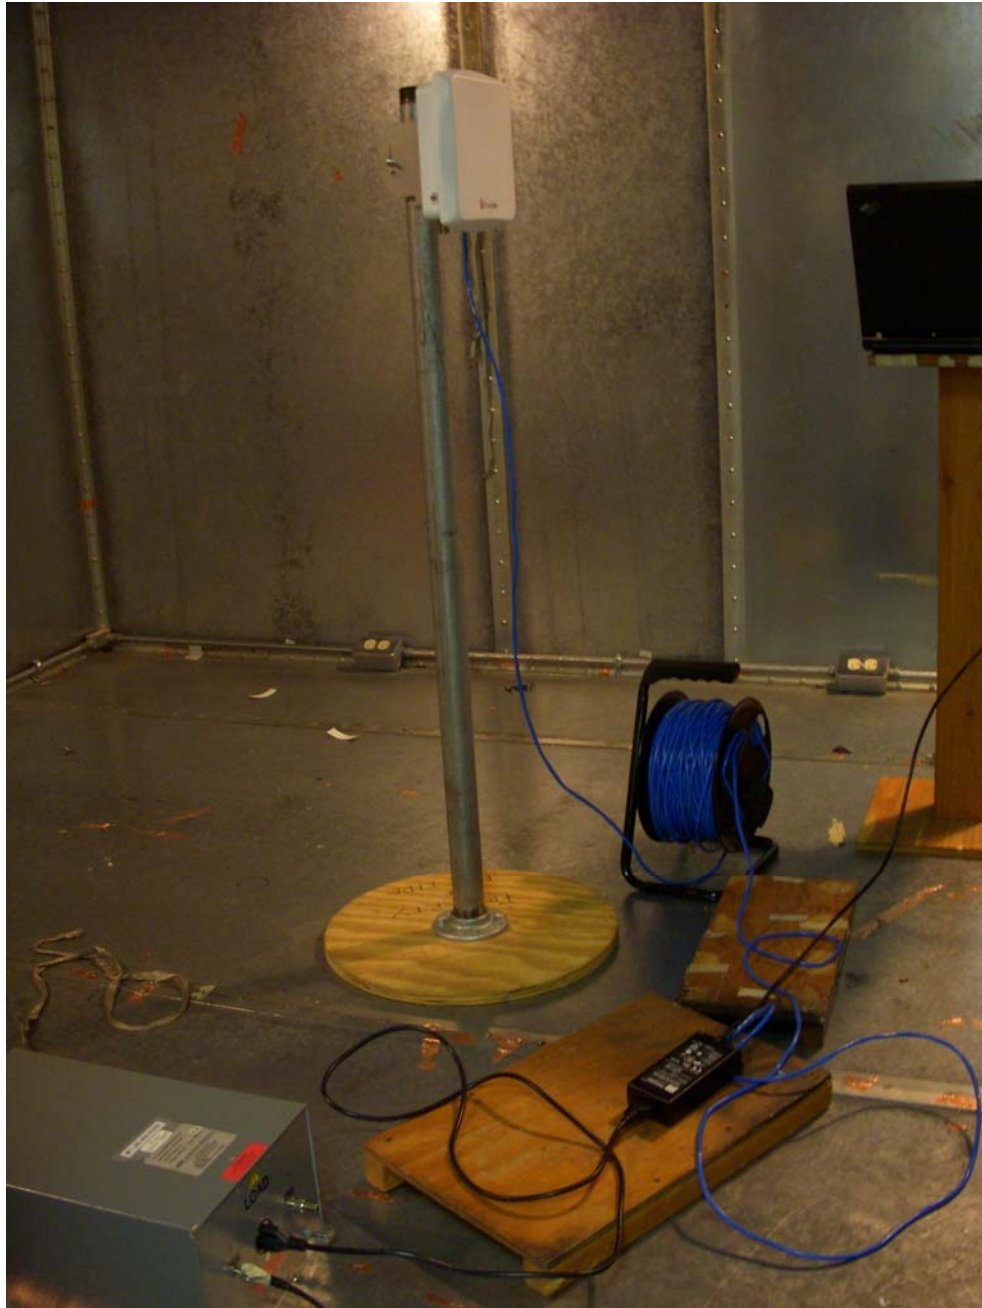

Photograph 2. Conducted Emissions Test Setup



Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 13.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 13.

| Frequency (MHz) | Field Strength (dBµV/m) | |
|-----------------|---|--|
| | §15.109 (b), Class A Limit (dBµV) @ 10m | §15.109 (a), Class B Limit (dBµV) @ 3m |
| 30 - 88 | 39.00 | 40.00 |
| 88 - 216 | 43.50 | 43.50 |
| 216 - 960 | 46.40 | 46.00 |
| Above 960 | 49.50 | 54.00 |

Table 13. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was found Compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits

Test Engineer(s): Caroline Reynolds

Test Date(s): January 7, 2008




Radiated Emissions Limits Test Results, Class B

| Frequency (MHz) | Antenna Polarity | EUT Azimuth (Degrees) | Antenna Height (cm) | Uncorrected Amplitude (dBuV) | ACF (dB/m) | CBL (dB) | Corrected Amplitude (dBuV) | Limit (dBuV) | Margin (dB) |
|-----------------|------------------|-----------------------|---------------------|------------------------------|------------|----------|----------------------------|--------------|-------------|
| 37.36 | V | 0 | 99 | 11.059 | 12.22 | 0.466 | 23.745 | 40 | -16.255 |
| 43.806 | V | 309 | 105 | 25.794 | 9.839 | 0.44 | 36.073 | 40 | -3.927 |
| 60.216 | V | 150 | 100 | 26.35 | 6.47 | 0.49 | 33.31 | 40 | -6.69 |
| 69.7 | V | 291 | 119 | 27.65 | 5.26 | 0.49 | 33.4 | 40 | -6.6 |
| 179.96 | V | 186 | 100 | 26.13 | 10.101 | 0.55 | 36.781 | 43.5 | -6.719 |
| 179.98 | H | 333 | 205 | 28 | 9.798 | 0.55 | 38.348 | 43.5 | -5.152 |
| 186.747 | V | 15 | 284 | 29.14 | 10.235 | 0.611 | 39.986 | 43.5 | -3.514 |


Table 14. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz

*NOTE: This was retest done after CEV-Modification in order to see any minor change affects from last Nov 26 REE test results. One frequency has very low margin.

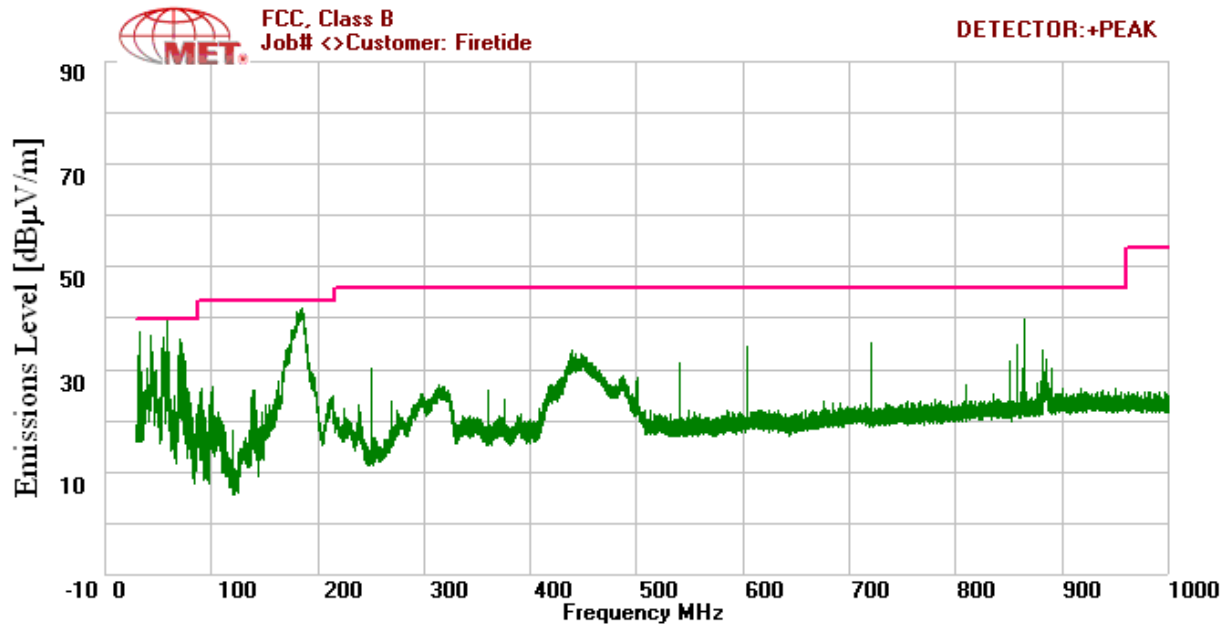

Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class B

Radiated Emission Limits Test Setup

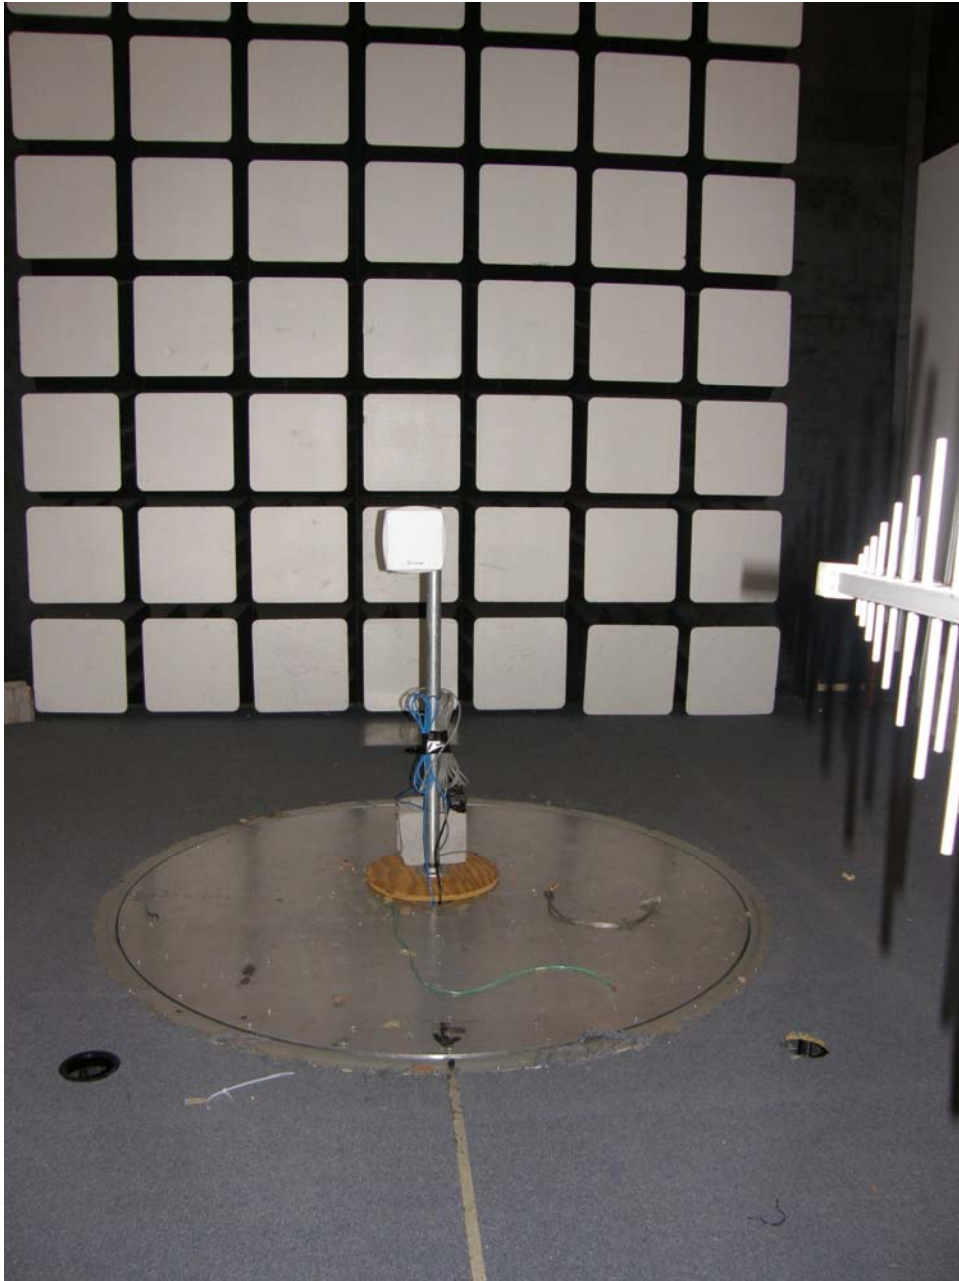

Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz



IV. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested meets the criteria of this rule by virtue of having professionally installed. The EUT is therefore compliant with §15.203.

| Gain/ Type | Manufacturer |
|-------------|--------------|
| 11dBi/Panel | Wha Yu |
| 13dBi/Panel | Wha Yu |
| 8dBi/Omni | MaxRad |

Test Engineer(s): Minh Ly



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency range (MHz) | § 15.207(a), Conducted Limit (dB μ V) | |
|-----------------------|---|---------|
| | Quasi-Peak | Average |
| * 0.15- 0.45 | 66 - 56 | 56 - 46 |
| 0.45 - 0.5 | 56 | 46 |
| 0.5 - 30 | 60 | 50 |

Table 15. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

Test Results: The EUT was found compliant with the requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Minh Ly

Test Date(s): March 19, 2008



Conducted Emissions - Voltage, AC Power, (110 VAC, 60 Hz)

| FREQ. (MHz) | Corrected Amplitude (dBuV) QP | Limit (dBuV) QP | Results QP | Margin (dB) QP | Corrected Amplitude (dBuV) AVG | Limit (dBuV) AVG | Results AVG | Margin (dB) AVG |
|------------------------|--|--------------------------------|-----------------------|---------------------------|---|---------------------------------|------------------------|----------------------------|
| 0.2 | 47.66 | 63.617 | Pass | -15.957 | 36.84 | 53.617 | Pass | -16.777 |
| 0.249 | 42.14 | 61.802 | Pass | -19.662 | 33.65 | 51.802 | Pass | -18.152 |
| 1.17 | 31.43 | 56 | Pass | -24.57 | 28.94 | 46 | Pass | -17.06 |

Table 16. Conducted Emissions Test Results, Phase Line


| FREQ. (MHz) | Corrected Amplitude (dBuV) QP | Limit (dBuV) QP | Results QP | Margin (dB) QP | Corrected Amplitude (dBuV) AVG | Limit (dBuV) AVG | Results AVG | Margin (dB) AVG |
|------------------------|--|--------------------------------|-----------------------|---------------------------|---|---------------------------------|------------------------|----------------------------|
| 0.2 | 47.62 | 63.617 | Pass | -15.997 | 35.19 | 53.617 | Pass | -18.427 |
| 0.249 | 41.74 | 61.802 | Pass | -20.062 | 29.79 | 51.802 | Pass | -22.012 |
| 8.489 | 36.05 | 60 | Pass | -23.95 | 34.71 | 50 | Pass | -15.29 |

Table 17. Conducted Emissions Test Results, Neutral Line


NOTE: Added 0.45uF capacitor to DC/DC converter to pass 10 to 20MHz range.



Conducted Emissions - Voltage, AC Power, (110 VAC, 60 Hz)

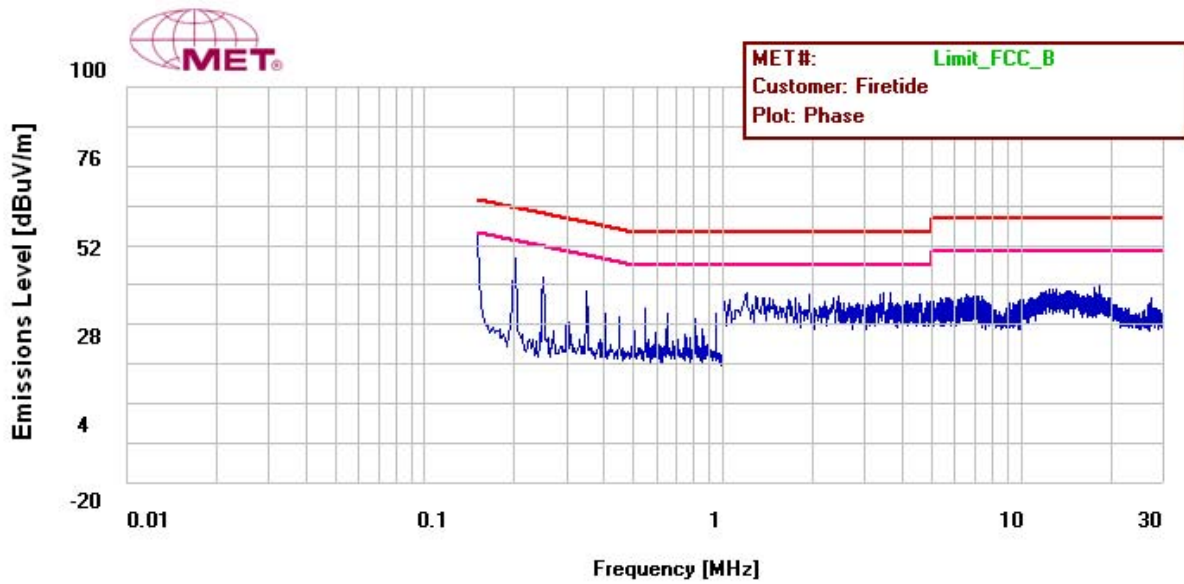

Plot 1. Conducted Emissions, Phase Line Plot

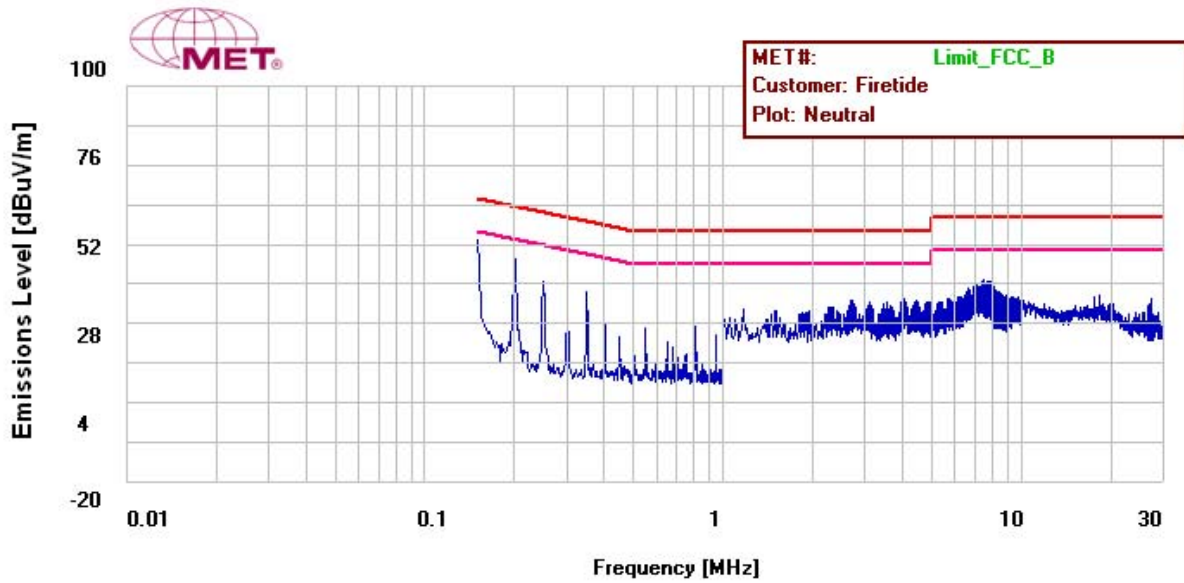

Plot 2. Conducted Emissions, Neutral Line Plot

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was set to the mid channel at the highest output power and connected to the spectrum analyzer through an attenuator and a directional coupler. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were repeated at the low and high channels.


Test Results Equipment complies with § 15.247 (a). The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

| 802.11b mode | | | |
|-----------------|-----------------|-------------------------------|------------------------------|
| Carrier Channel | Frequency (MHz) | Measured 6 dB Bandwidth (MHz) | Measured 99% Bandwidth (MHz) |
| Low | 2412 | 12.17 | 16.17 |
| Mid | 2437 | 12.42 | 16.83 |
| High | 2462 | 12.83 | 15.92 |

| 802.11g mode | | | |
|-----------------|-----------------|-------------------------------|------------------------------|
| Carrier Channel | Frequency (MHz) | Measured 6 dB Bandwidth (MHz) | Measured 99% Bandwidth (MHz) |
| Low | 2412 | 16.75 | 17.50 |
| Mid | 2437 | 16.92 | 18.92 |
| High | 2462 | 16.83 | 17.62 |

Test Engineer(s): Shawn McMillen


Test Date(s): January 26 & February 20, 2007




Block Diagram 1. Occupied Bandwidth Test Setup




Electromagnetic Compatibility Criteria for Intentional Radiators

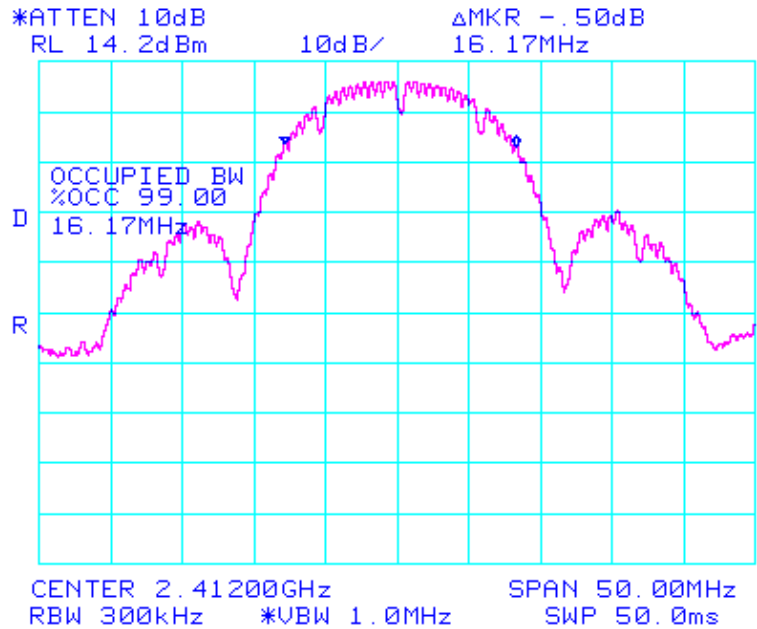


802.11/b Low Ch Occupied Band Width 99%.

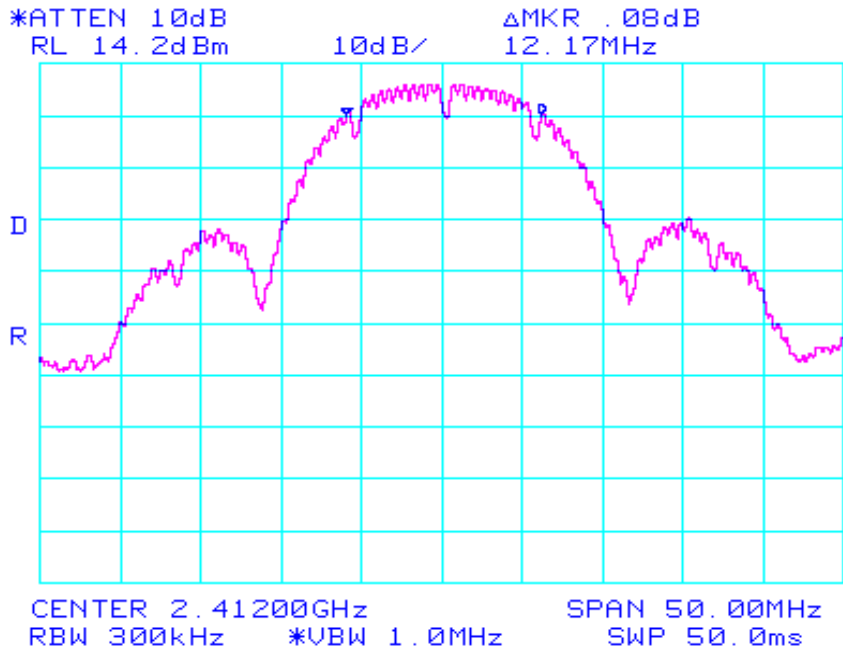


802.11/b Low Ch Occupied Band Width.

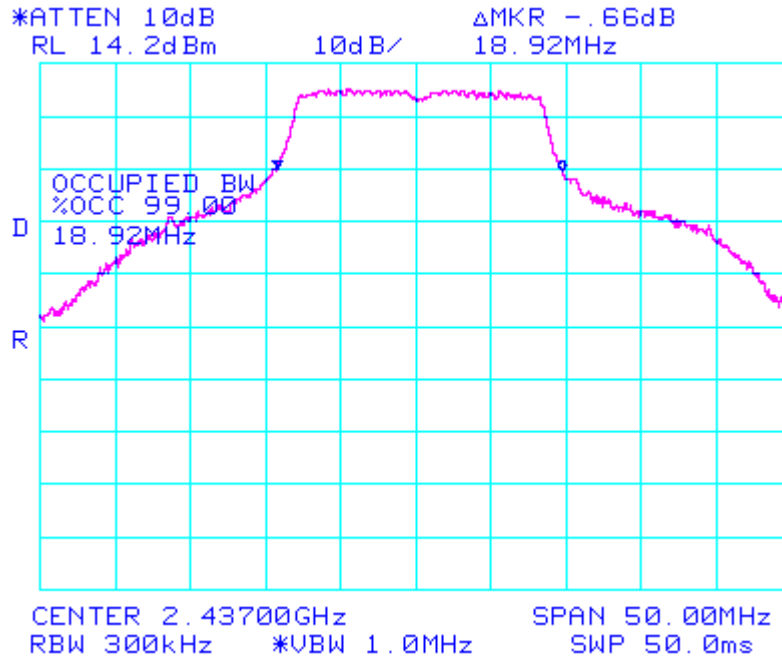


802.11/g Mid Ch Occupied Band Width 99%

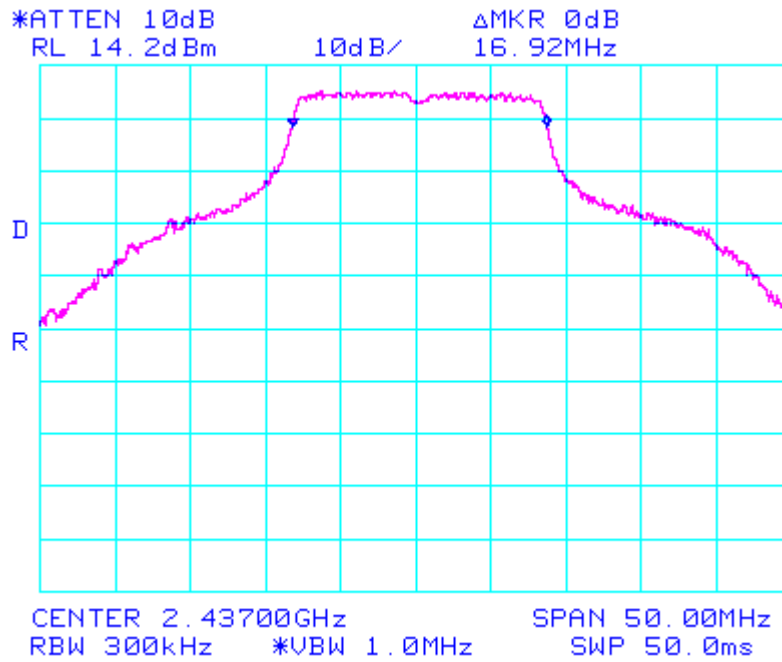

802.11/g Mid Ch Occupied Band Width

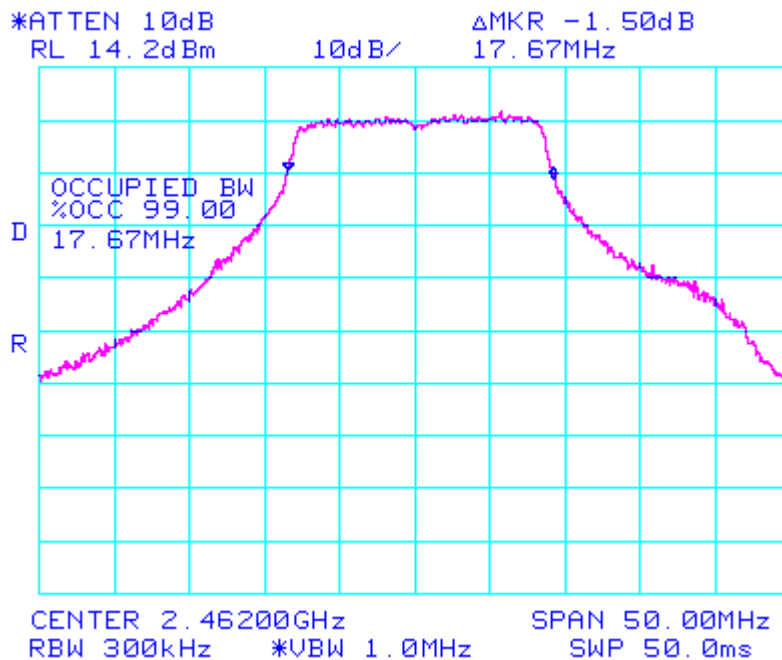

802.11/g High Ch Occupied Band Width 99%

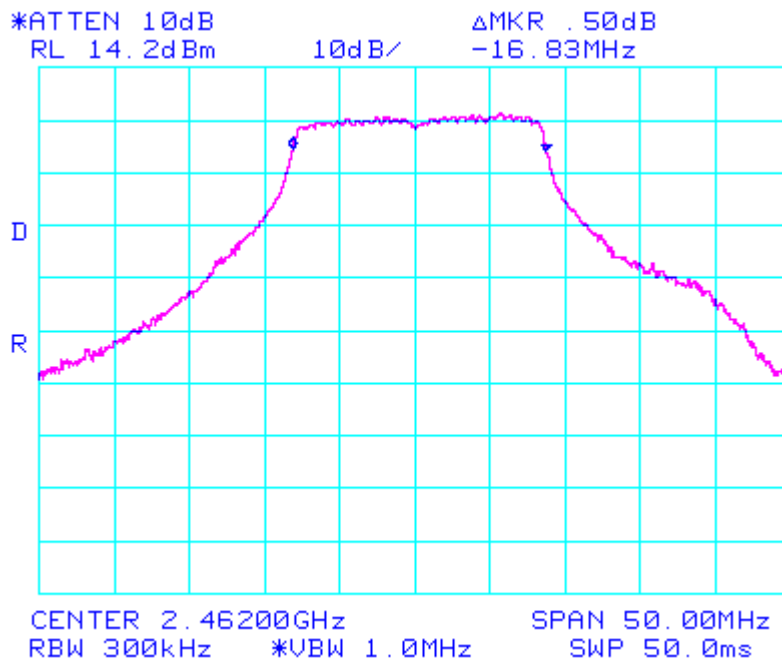

802.11/g High Ch Occupied Band Width



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

| Digital Transmission Systems (MHz) | Output Limit (Watts) |
|------------------------------------|----------------------|
| 902-928 | 1.000 |
| 2400-2483.5 | 1.000 |
| 5725- 5850 | 1.000 |

Table 18. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 18, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated Power Meter. The EUT was measured at the low, mid and high channels of each band at a data rate which gave the maximum power level.




Test Results: Equipment complies with the Peak Power Output limits of § 15.247(b).

| 802.11b | | |
|-----------------|-----------------|--------------------------------|
| Carrier Channel | Frequency (MHz) | Measured Peak Output Power dBm |
| Low | 2412 | 21.54 |
| Mid | 2437 | 24.93 |
| High | 2462 | 19.62 |

| 802.11g | | |
|-----------------|-----------------|--------------------------------|
| Carrier Channel | Frequency (MHz) | Measured Peak Output Power dBm |
| Low | 2412 | 22.1 |
| Mid | 2437 | 25.34 |
| High | 2462 | 20.6 |

Test Engineer(s): Minh Ly

Test Date(s): March 19, 2008



Block Diagram 2. Peak Power Output Test Setup



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 25.34dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **13 dBi (Panel Antenna)**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG} / 4\pi S$$

where, S = Power Density (mW/cm²)
P = Power Input to antenna (341.9794mW)
G = Antenna Gain (19.95numeric)

$$R = (341.9794 * 19.95 / 4 * 3.14 * 1.0)^{1/2} = (6823.387 / 12.56)^{1/2} = \mathbf{23.30cm}$$

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 25.34dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **8 dBi (Omni Antenna)**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG} / 4\pi S$$

where, S = Power Density (mW/cm²)
P = Power Input to antenna (341.9794mW)
G = Antenna Gain (6.30 numeric)

$$S = (341.9794 * 6.30 / 4 * 3.14 * 20^2) = (2157.744 / 5024) = \mathbf{0.43 mW/cm^2}$$



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions – Radiated and Conducted

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------------------|---------------------|----------------|------------------|
| 0.090–0.110----- | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| ¹ 0.495–0.505----- | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905----- | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128----- | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775----- | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775----- | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218----- | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825----- | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225----- | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294----- | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366----- | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675----- | 156.7–156.9 | 2655–2900 | 22.01–23.12 |
| 8.41425–8.41475----- | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293----- | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025----- | 240–285 | 3345.8–3358.36 | 43–36.5 |
| 12.57675–12.57725----- | 322–335.4 | 3600–4400 | (²) |

Table 19. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b – Panel Antenna)


| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBµV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBµV) | Limit @ 3m (dBµV) | Margin (dB) | Measurement Type |
|-----------------------------|--------------------------------|---------------------------------------|-------------|---------------------|-----------------|--------------------------------------|-------------------|-------------|------------------|
| 4824 | V | 44.35 | 35.1 | 33.5 | 5.2 | 48.0 | 74 | -26.1 | pk |
| 4824 | V | 32.62 | 35.1 | 33.5 | 5.2 | 36.2 | 54 | -17.8 | avg |
| 7236 | V | 43.93 | 35.1 | 37.0 | 6.5 | 52.3 | 74 | -21.7 | pk |
| 7236 | V | 32.75 | 35.1 | 37.0 | 6.5 | 41.2 | 54 | -12.9 | avg |
| 9648 | V | 43.95 | 35.6 | 38.5 | 7.8 | 54.7 | 74 | -19.4 | pk |
| Low Channel 2412MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBµV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBµV) | Limit @ 3m (dBµV) | Margin (dB) | Measurement Type |
| 4874 | V | 44.1 | 35.1 | 33.5 | 5.2 | 47.7 | 74 | -26.3 | pk |
| 4874 | V | 32.03 | 35.1 | 33.5 | 5.2 | 35.6 | 54 | -18.4 | avg |
| 7311 | V | 43.54 | 35.1 | 37.0 | 6.5 | 51.9 | 74 | -22.1 | pk |
| 7311 | V | 32.09 | 35.1 | 37.0 | 6.5 | 40.5 | 54 | -13.5 | avg |
| 9748 | V | 44.46 | 35.6 | 38.5 | 7.8 | 55.2 | 74 | -18.8 | pk |
| Mid Channel 2437MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBµV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBµV) | Limit @ 3m (dBµV) | Margin (dB) | Measurement Type |
| 4924 | V | 43.6 | 35.1 | 33.5 | 5.2 | 47.2 | 74 | -26.8 | pk |
| 4924 | V | 31.9 | 35.1 | 33.5 | 5.2 | 35.5 | 54 | -18.5 | avg |
| 7386 | V | 42.96 | 35.1 | 37.0 | 6.5 | 51.4 | 74 | -22.6 | pk |
| 7386 | V | 32.6 | 35.1 | 37.0 | 6.5 | 41.0 | 54 | -13.0 | avg |
| 9848 | V | 43.43 | 35.6 | 38.5 | 7.8 | 54.1 | 74 | -19.9 | pk |
| High Channel 2462MHz | | | | | | | | | |

Note: All other emissions were measured at the noise floor of the spectrum analyzer



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

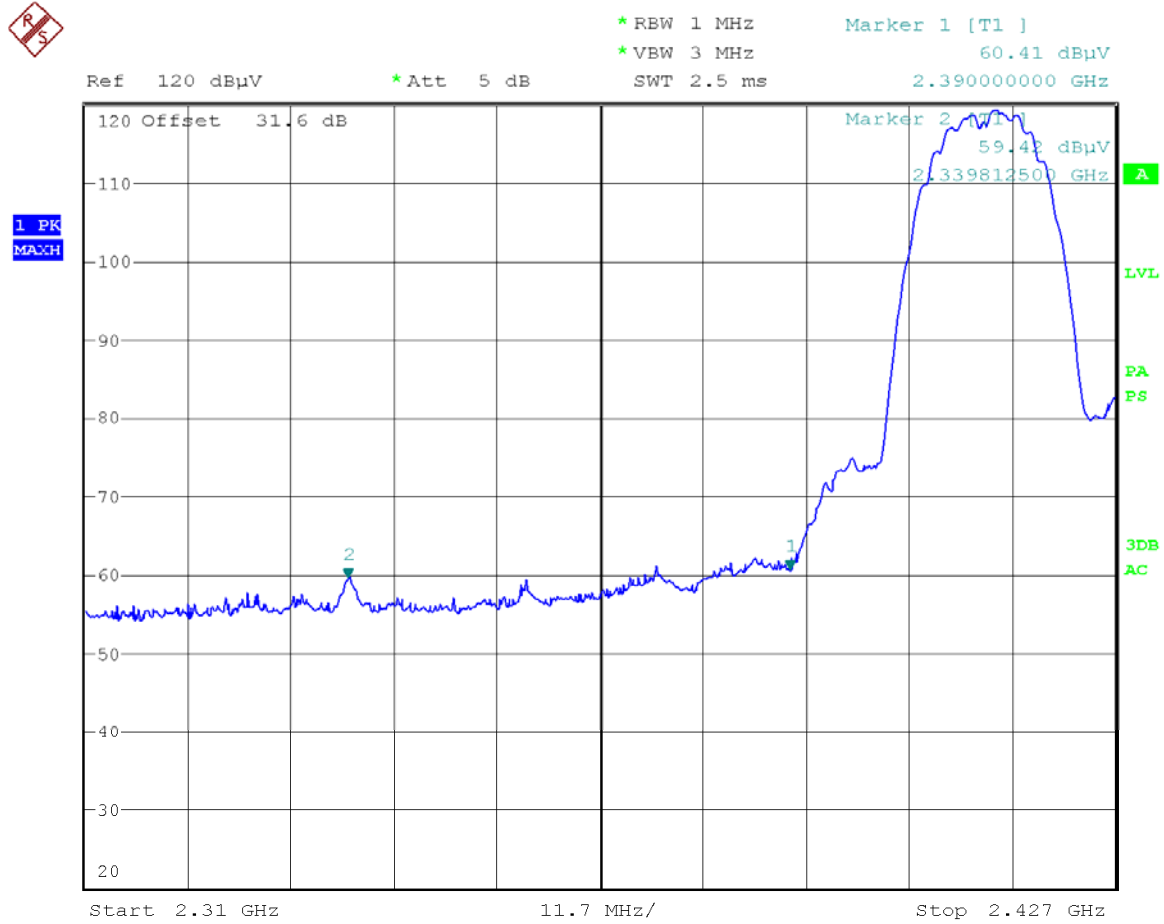

Date: 12.MAR.2008 11:57:27

802.11/b radiated restricted band 2310- 2390 MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007




Date: 12.MAR.2008 11:54:39

802.11/b radiated restricted band 2310- 2390 MHz Avg



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

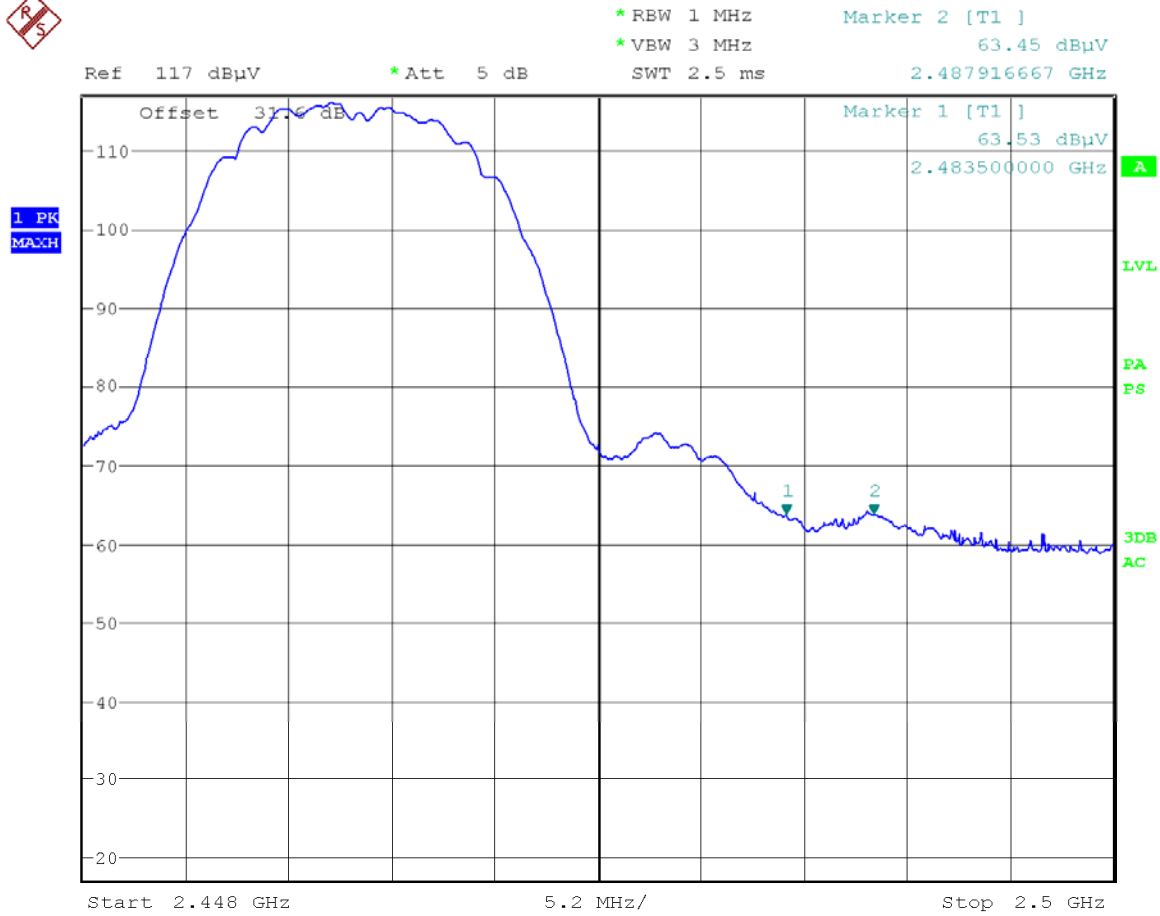


Date: 12.MAR.2008 11:42:41

802.11/b radiated restricted band 2483.5 – 2500MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

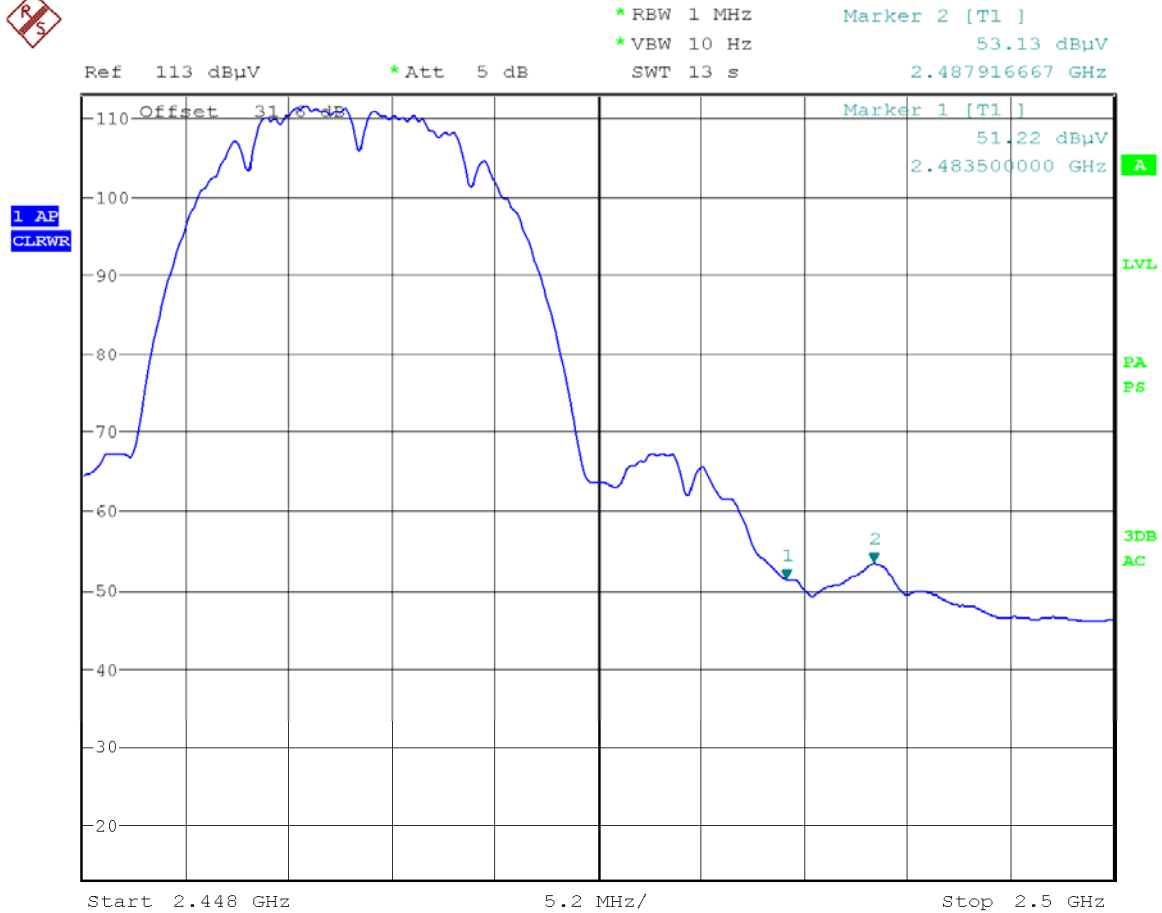

Date: 12.MAR.2008 11:41:16

802.11/b radiated restricted band 2483.5 – 2500MHz Avg



Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g – Panel Antenna)

| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBµV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBµV) | Limit @ 3m (dBµV) | Margin (dB) | Measurement Type |
|-----------------------------|--------------------------------|---------------------------------------|-------------|---------------------|-----------------|--------------------------------------|-------------------|-------------|------------------|
| 4824 | V | 44.72 | 35.1 | 33.5 | 5.2 | 48.3 | 74 | -25.7 | pk |
| 4824 | V | 39.74 | 35.1 | 33.5 | 5.2 | 43.3 | 54 | -10.7 | avg |
| 7236 | V | 43.42 | 35.1 | 37.0 | 6.5 | 51.8 | 74 | -22.2 | pk |
| 7236 | V | 32.68 | 35.1 | 37.0 | 6.5 | 41.1 | 54 | -12.9 | avg |
| 9648 | V | 44.05 | 35.6 | 38.5 | 7.8 | 54.8 | 74 | -19.3 | pk |
| Low Channel 2412MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBµV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBµV) | Limit @ 3m (dBµV) | Margin (dB) | Measurement Type |
| 4874 | V | 43.78 | 35.1 | 33.5 | 5.2 | 47.4 | 74 | -26.6 | pk |
| 4874 | V | 32.23 | 35.1 | 33.5 | 5.2 | 35.8 | 54 | -18.2 | avg |
| 7311 | V | 43.76 | 35.1 | 37.0 | 6.5 | 52.2 | 74 | -21.8 | pk |
| 7311 | V | 32.27 | 35.1 | 37.0 | 6.5 | 40.7 | 54 | -13.3 | avg |
| 9748 | V | 44.65 | 35.6 | 38.5 | 7.8 | 55.4 | 74 | -18.7 | pk |
| Mid Channel 2437MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBµV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBµV) | Limit @ 3m (dBµV) | Margin (dB) | Measurement Type |
| 4924 | V | 44.54 | 35.1 | 33.5 | 5.2 | 48.1 | 74 | -25.9 | pk |
| 4924 | V | 32.06 | 35.1 | 33.5 | 5.2 | 35.7 | 54 | -18.3 | avg |
| 7386 | V | 43.73 | 35.1 | 37.0 | 6.5 | 52.1 | 74 | -21.9 | pk |
| 7386 | V | 32.65 | 35.1 | 37.0 | 6.5 | 41.1 | 54 | -13.0 | avg |
| 9848 | V | 43.86 | 35.6 | 38.5 | 7.8 | 54.6 | 74 | -19.4 | pk |
| High Channel 2462MHz | | | | | | | | | |



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

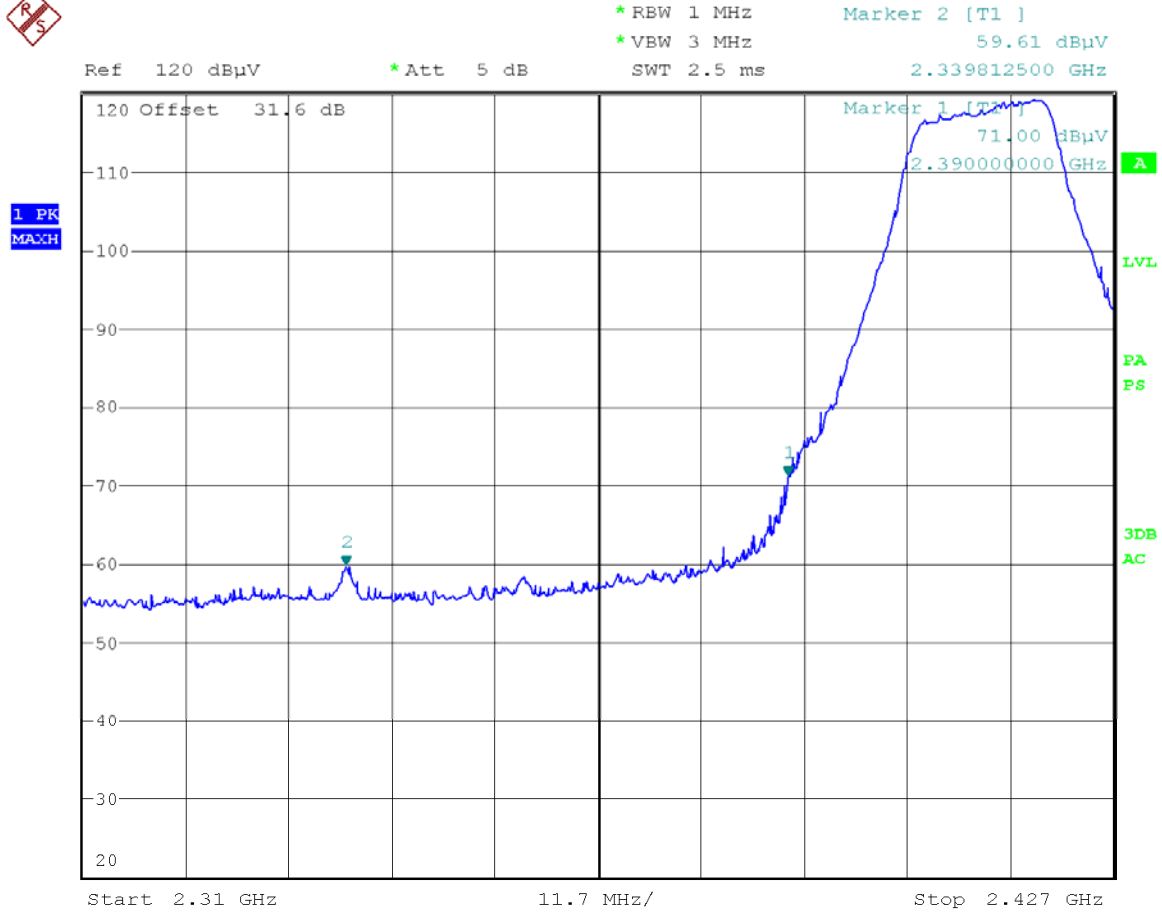


Date: 12.MAR.2008 11:51:01

802.11/g radiated restricted band 2310- 2390 MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

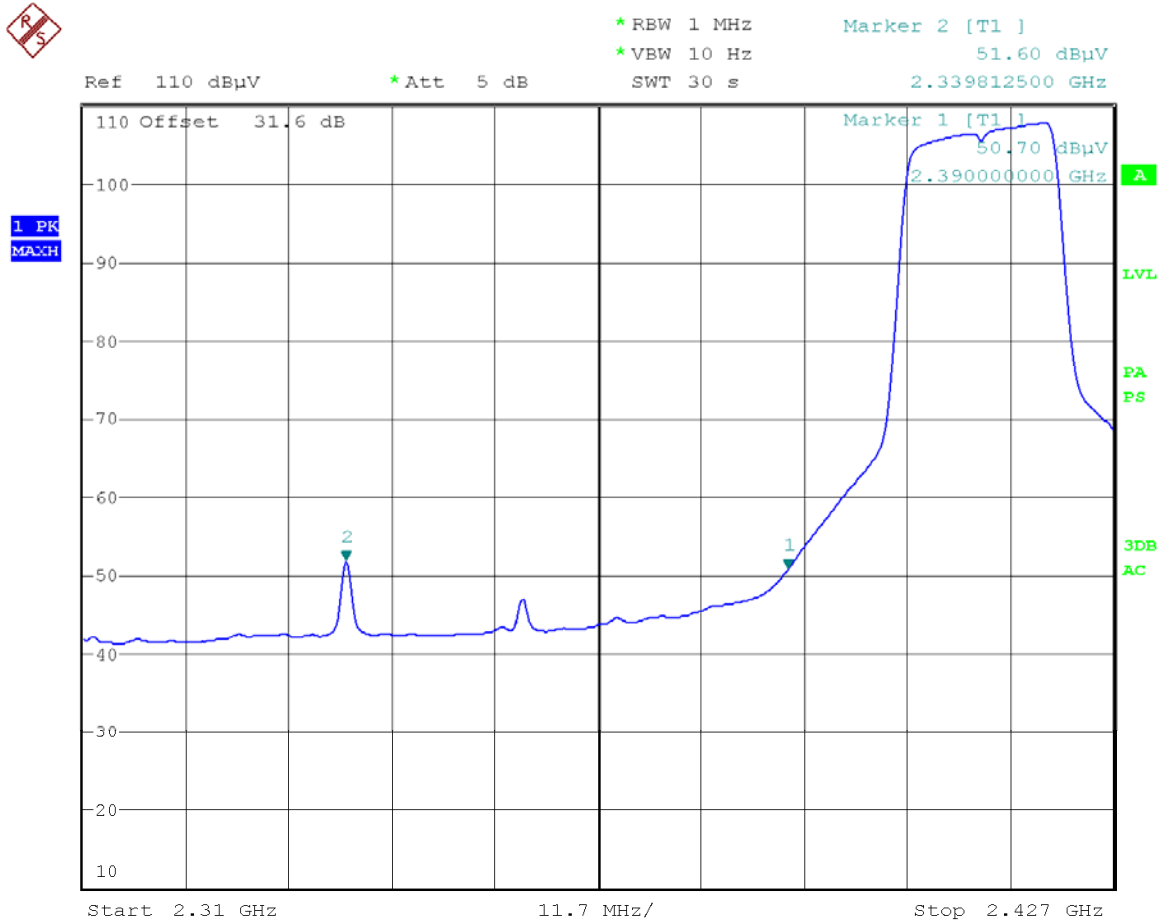


Date: 12.MAR.2008 11:49:52

802.11/g radiated restricted band 2310- 2390 MHz Avg



Firetide
2200

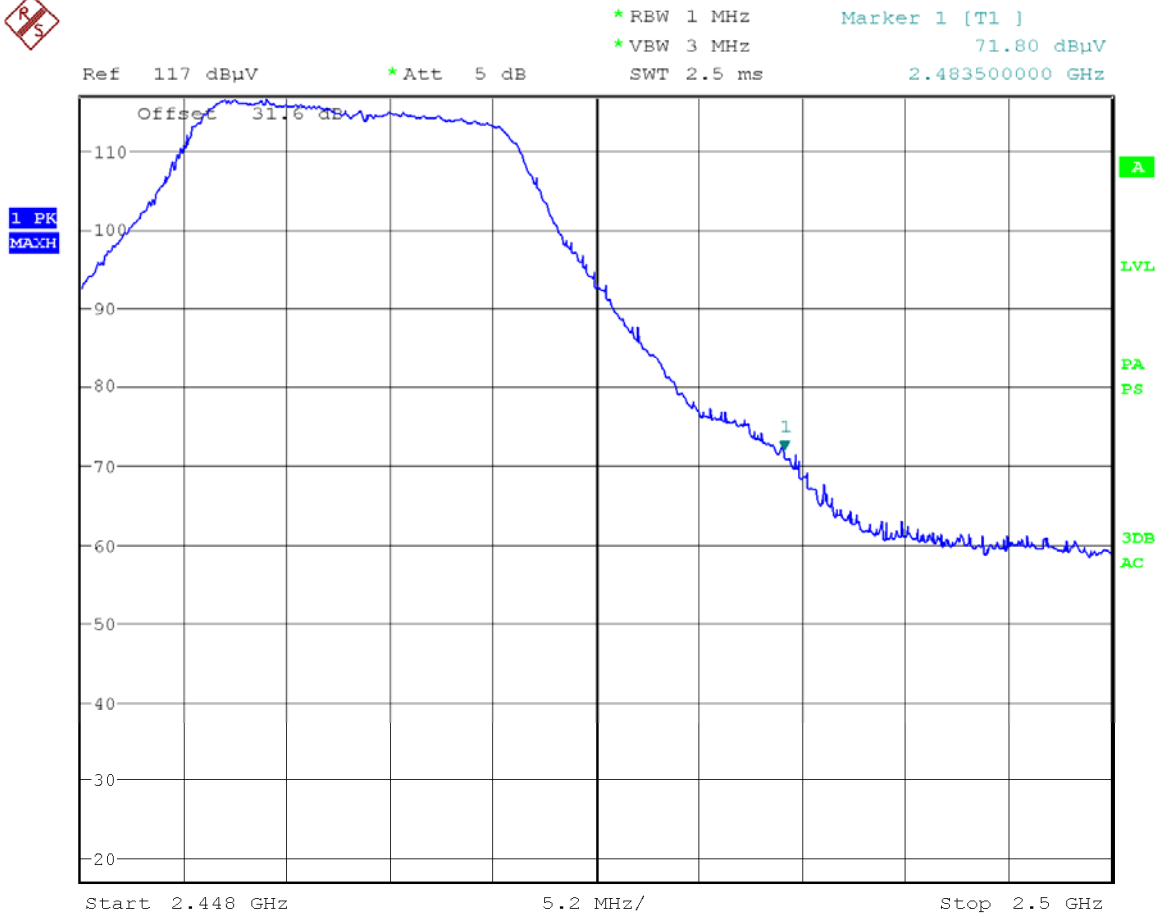


Date: 12.MAR.2008 11:44:00

802.11/g radiated restricted band 2483.5 – 2500MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

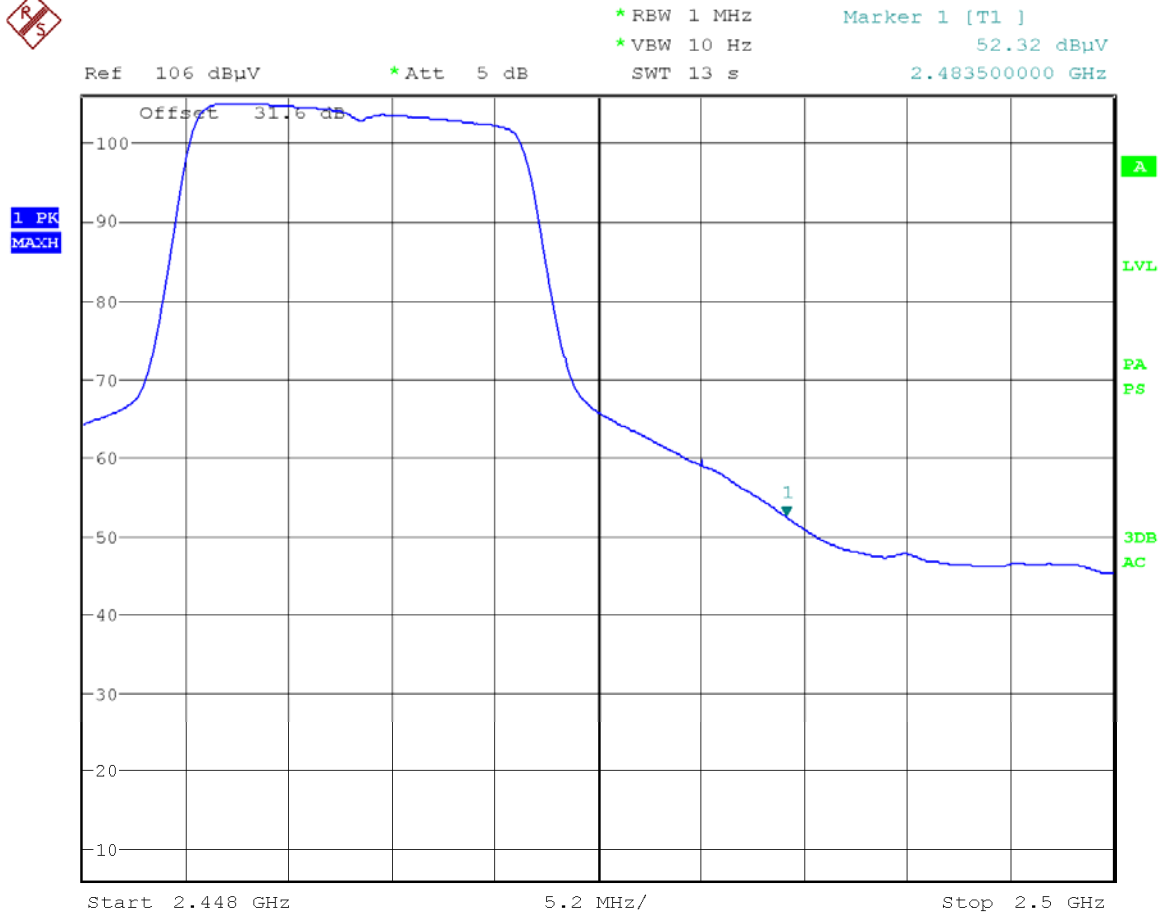

Date: 12.MAR.2008 11:44:58

802.11/g radiated restricted band 2483.5 – 2500MHz Avg



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b – 8dBi Omni Antenna)


| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBμV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBμV) | Limit @ 3m (dBμV) | Margin (dB) | Measurement Type |
|-----------------------------|--------------------------------|---------------------------------------|-------------|---------------------|-----------------|--------------------------------------|-------------------|-------------|------------------|
| 4824 | V | 44.14 | 35.1 | 33.5 | 5.2 | 47.7 | 74 | -26.3 | pk |
| 4824 | V | 31.95 | 35.1 | 33.5 | 5.2 | 35.6 | 54 | -18.5 | avg |
| 7236 | V | 44.03 | 35.1 | 37.0 | 6.5 | 52.4 | 74 | -21.6 | pk |
| 7236 | V | 32.24 | 35.1 | 37.0 | 6.5 | 40.6 | 54 | -13.4 | avg |
| 9648 | V | 43.98 | 35.6 | 38.5 | 7.8 | 54.7 | 74 | -19.3 | pk |
| Low Channel 2412MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBμV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBμV) | Limit @ 3m (dBμV) | Margin (dB) | Measurement Type |
| 4874 | V | 45.36 | 35.1 | 33.5 | 5.2 | 49.0 | 74 | -25.0 | pk |
| 4874 | V | 32.05 | 35.1 | 33.5 | 5.2 | 35.7 | 54 | -18.4 | avg |
| 7311 | V | 43.9 | 35.1 | 37.0 | 6.5 | 52.3 | 74 | -21.7 | pk |
| 7311 | V | 32.25 | 35.1 | 37.0 | 6.5 | 40.7 | 54 | -13.4 | avg |
| 9748 | V | 43.97 | 35.6 | 38.5 | 7.8 | 54.7 | 74 | -19.3 | pk |
| Mid Channel 2437MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBμV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBμV) | Limit @ 3m (dBμV) | Margin (dB) | Measurement Type |
| 4924 | V | 44.76 | 35.1 | 33.5 | 5.2 | 48.4 | 74 | -25.6 | pk |
| 4924 | V | 31.93 | 35.1 | 33.5 | 5.2 | 35.5 | 54 | -18.5 | avg |
| 7386 | V | 43.46 | 35.1 | 37.0 | 6.5 | 51.9 | 74 | -22.1 | pk |
| 7386 | V | 32.52 | 35.1 | 37.0 | 6.5 | 40.9 | 54 | -13.1 | avg |
| 9848 | V | 43.6 | 35.6 | 38.5 | 7.8 | 54.3 | 74 | -19.7 | pk |
| High Channel 2462MHz | | | | | | | | | |

Note: All other emissions were measured at the noise floor of the spectrum analyzer



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

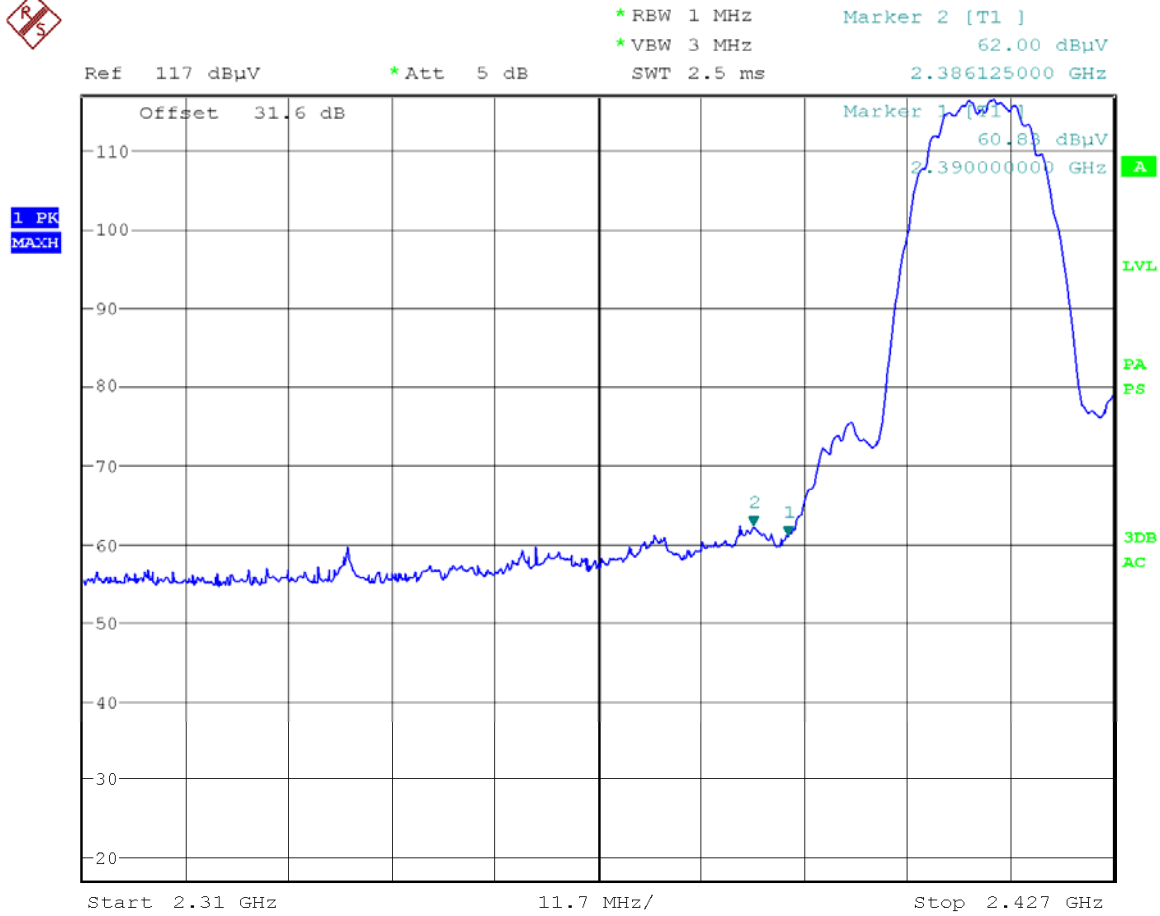


Date: 12.MAR.2008 12:15:50

802.11/b radiated restricted band 2310- 2390 MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

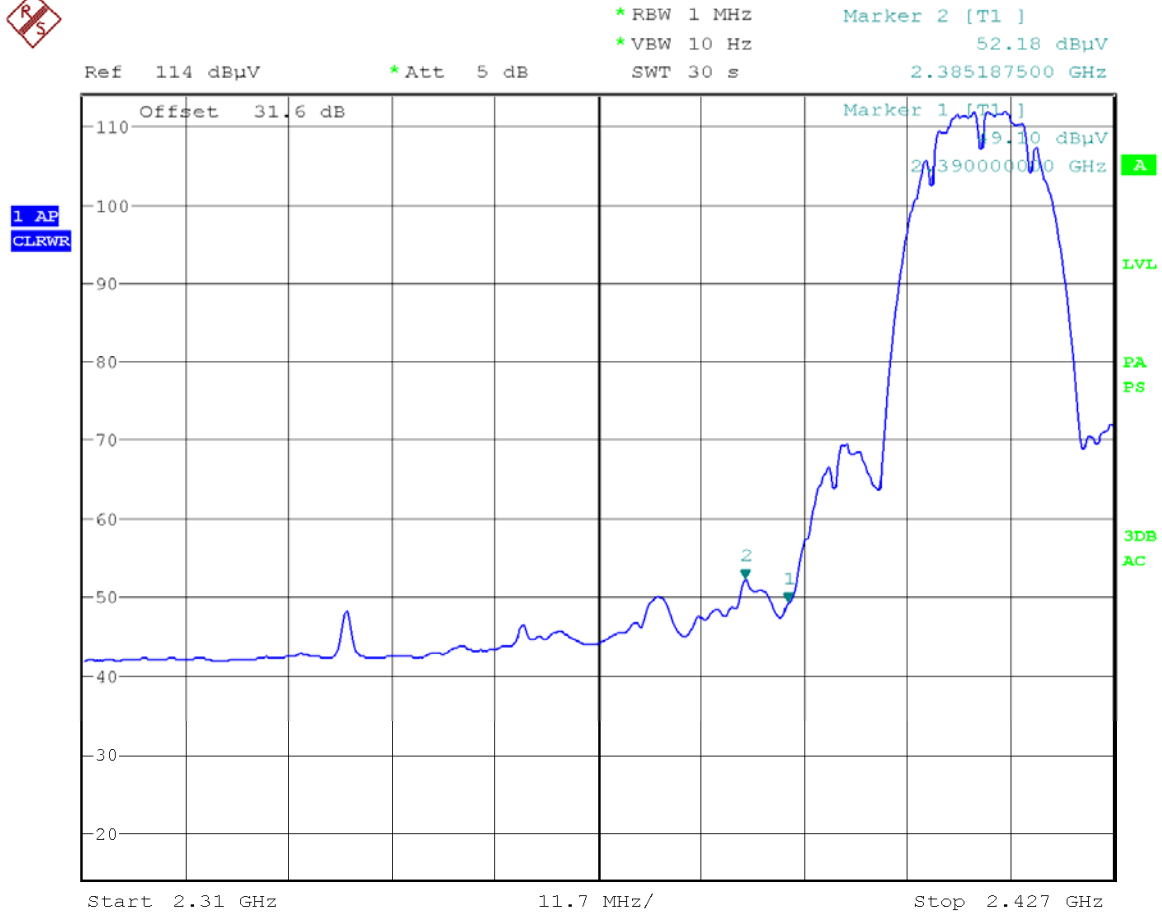


Date: 12.MAR.2008 12:14:57

802.11/b radiated restricted band 2310- 2390 MHz Avg



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

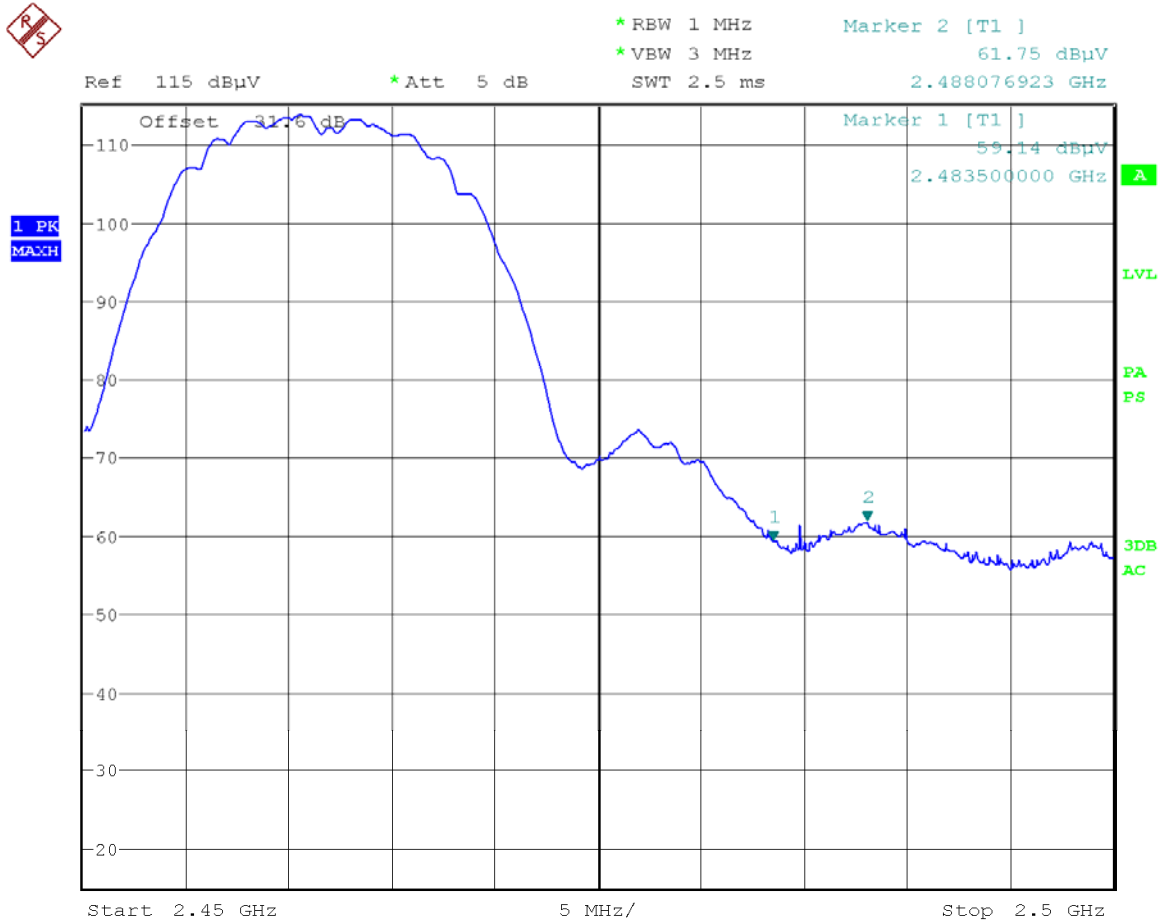


Date: 12.MAR.2008 12:20:05

802.11/b radiated restricted band 2483.5 – 2500MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

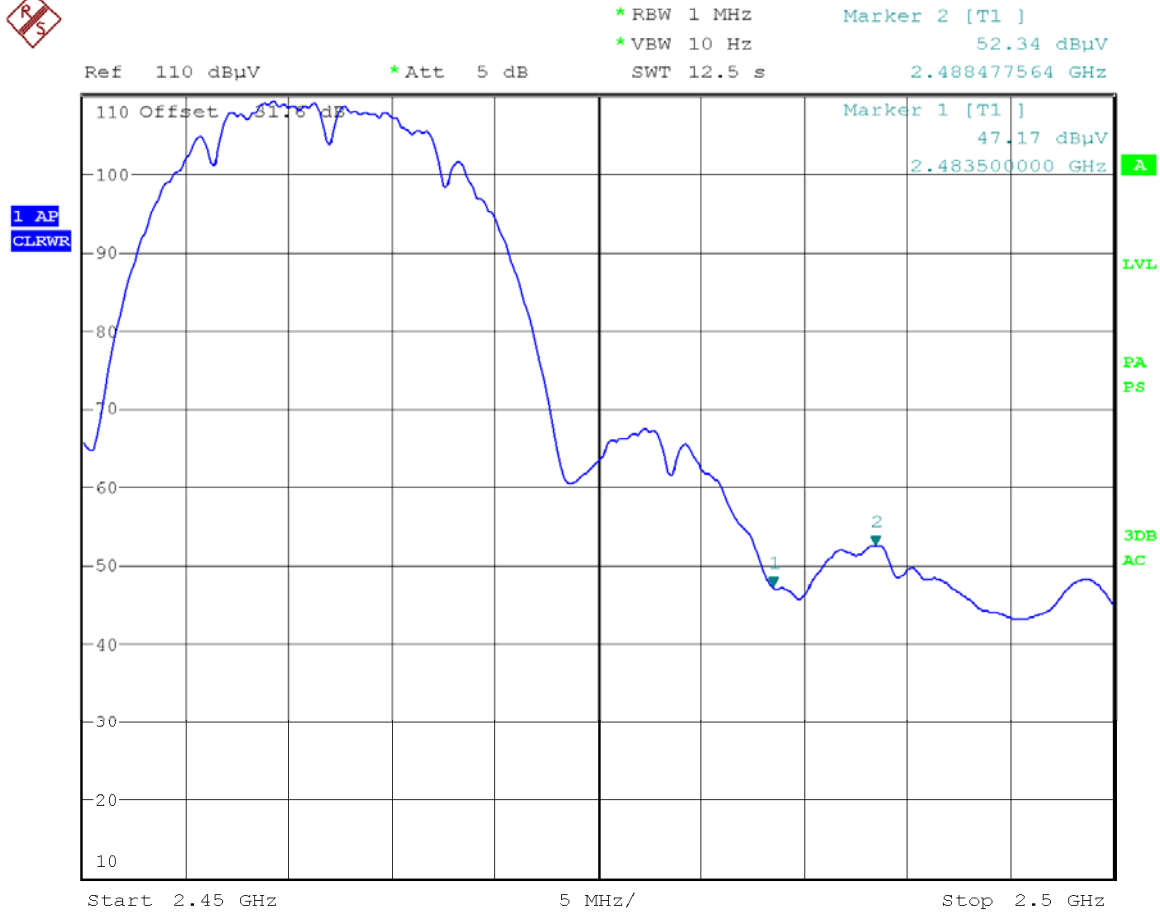

Date: 12.MAR.2008 12:19:11

802.11/b radiated restricted band 2483.5 – 2500MHz Avg



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g – 8dBi Omni Antenna)


| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBμV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBμV) | Limit @ 3m (dBμV) | Margin (dB) | Measurement Type |
|-----------------------------|--------------------------------|---------------------------------------|-------------|---------------------|-----------------|--------------------------------------|-------------------|-------------|------------------|
| 4824 | V | 43.85 | 35.1 | 33.5 | 5.2 | 47.5 | 74 | -26.6 | pk |
| 4824 | V | 32.25 | 35.1 | 33.5 | 5.2 | 35.9 | 54 | -18.2 | avg |
| 7236 | V | 43.69 | 35.1 | 37.0 | 6.5 | 52.1 | 74 | -21.9 | pk |
| 7236 | V | 32.6 | 35.1 | 37.0 | 6.5 | 41.0 | 54 | -13.0 | avg |
| 9648 | V | 43.66 | 35.6 | 38.5 | 7.8 | 54.4 | 74 | -19.6 | pk |
| Low Channel 2412MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBμV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBμV) | Limit @ 3m (dBμV) | Margin (dB) | Measurement Type |
| 4874 | V | 44 | 35.1 | 33.5 | 5.2 | 47.6 | 74 | -26.4 | pk |
| 4874 | V | 32.3 | 35.1 | 33.5 | 5.2 | 35.9 | 54 | -18.1 | avg |
| 7311 | V | 43.14 | 35.1 | 37.0 | 6.5 | 51.5 | 74 | -22.5 | pk |
| 7311 | V | 32.13 | 35.1 | 37.0 | 6.5 | 40.5 | 54 | -13.5 | avg |
| 9748 | V | 43.56 | 35.6 | 38.5 | 7.8 | 54.3 | 74 | -19.7 | pk |
| Mid Channel 2437MHz | | | | | | | | | |
| Frequency (MHz) | Receive Antenna Polarity (H/V) | Uncorrected Field strength (dBμV)@ 3m | Preamp (dB) | Antenna Factor (dB) | Cable Loss (dB) | Corrected Field Strength @ 3m (dBμV) | Limit @ 3m (dBμV) | Margin (dB) | Measurement Type |
| 4924 | V | 47.97 | 35.1 | 33.5 | 5.2 | 51.6 | 74 | -22.4 | pk |
| 4924 | V | 39.22 | 35.1 | 33.5 | 5.2 | 42.8 | 54 | -11.2 | avg |
| 7386 | V | 50.67 | 35.1 | 37.0 | 6.5 | 59.1 | 74 | -14.9 | pk |
| 7386 | V | 38.68 | 35.1 | 37.0 | 6.5 | 47.1 | 54 | -6.9 | avg |
| 9848 | V | 44.37 | 35.6 | 38.5 | 7.8 | 55.1 | 74 | -18.9 | pk |
| High Channel 2462MHz | | | | | | | | | |

Note: All other emissions were measured at the noise floor of the spectrum analyzer



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

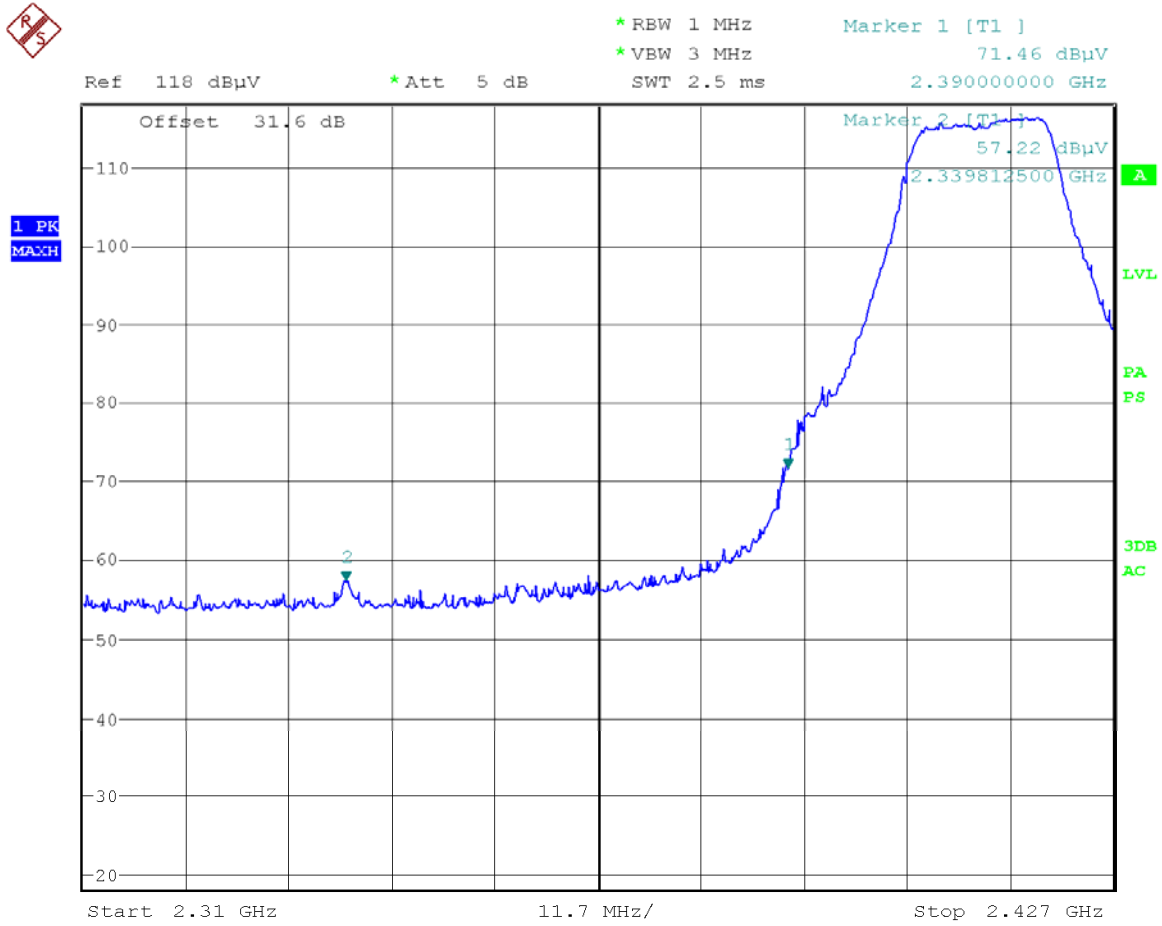


Date: 12.MAR.2008 12:12:43

802.11/g radiated restricted band 2310- 2390 MHz Peak



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

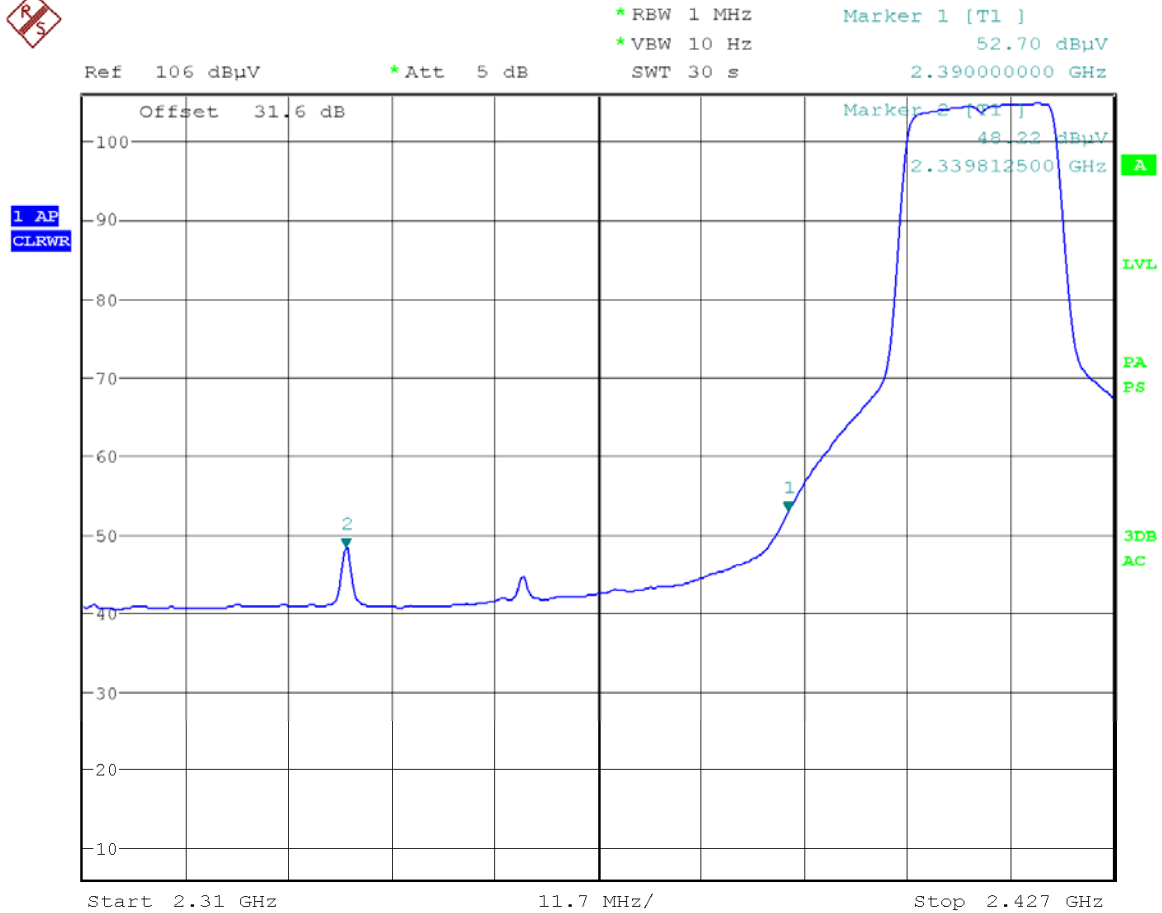


Date: 12.MAR.2008 12:10:01

802.11/g radiated restricted band 2310- 2390 MHz Avg



Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

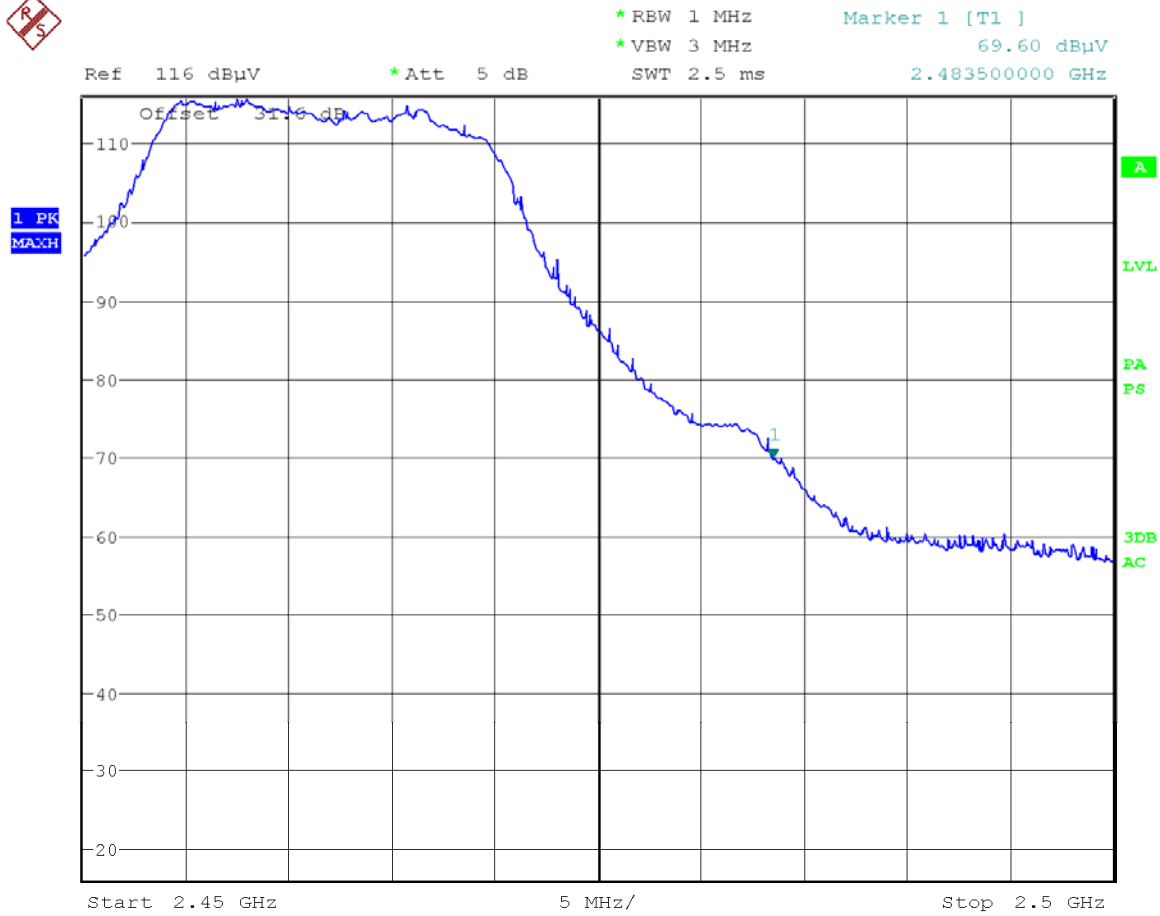


Date: 12.MAR.2008 12:23:44

802.11/g radiated restricted band 2483.5 – 2500MHz Peak




Firetide
2200

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, 15.247; RSS-210, Issue 7, June 2007

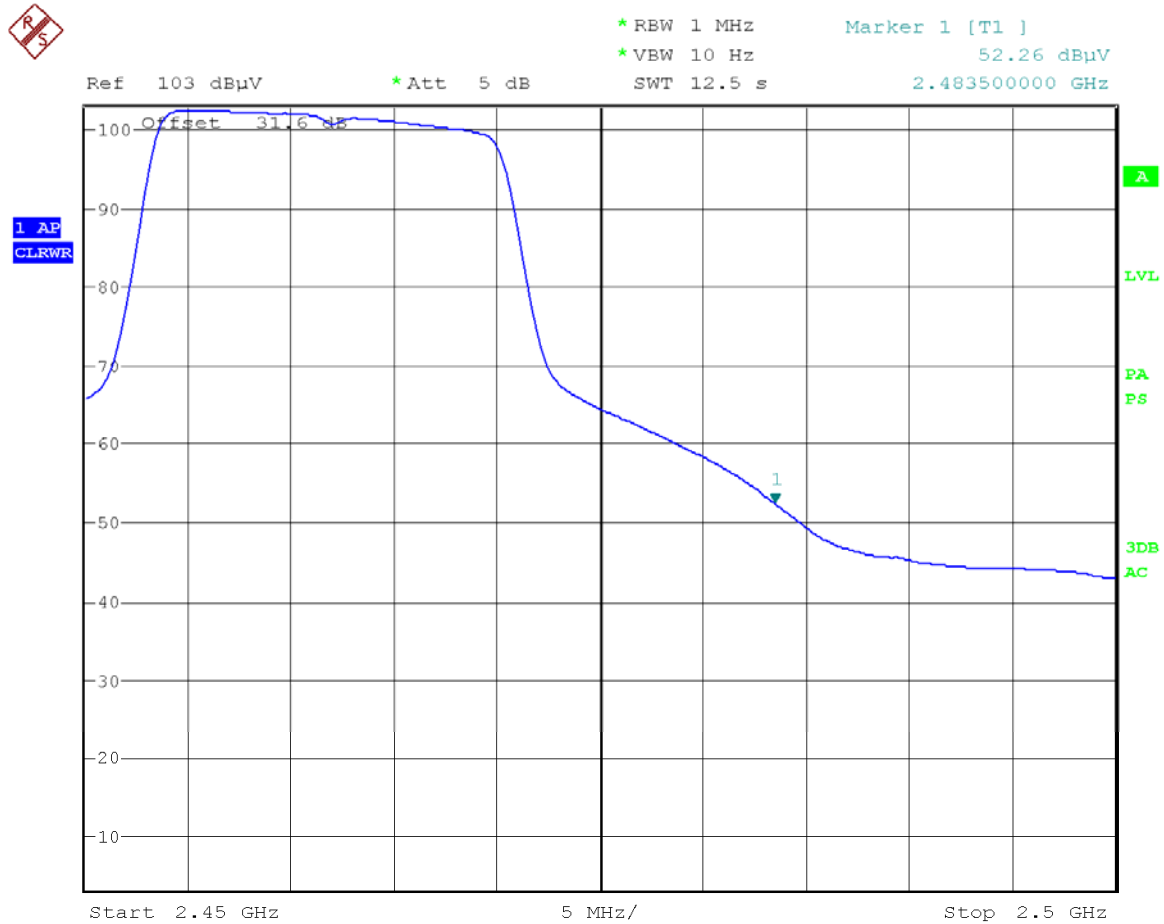


Date: 12.MAR.2008 12:22:35

802.11/g radiated restricted band 2483.5 – 2500MHz Avg

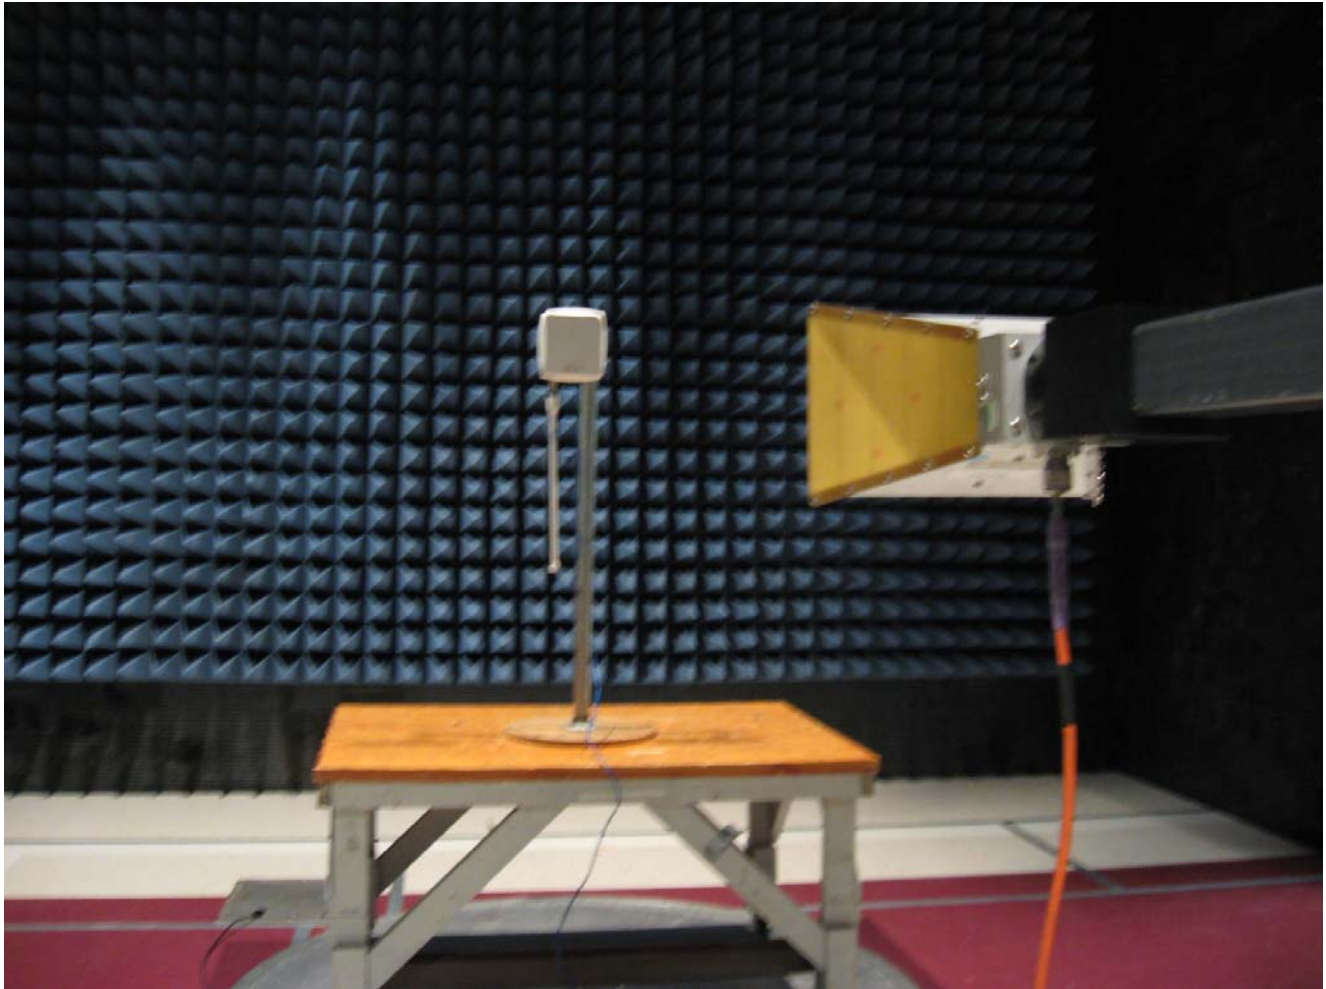

Photograph 4. Test Equipment and setup for various Radiated Measurements

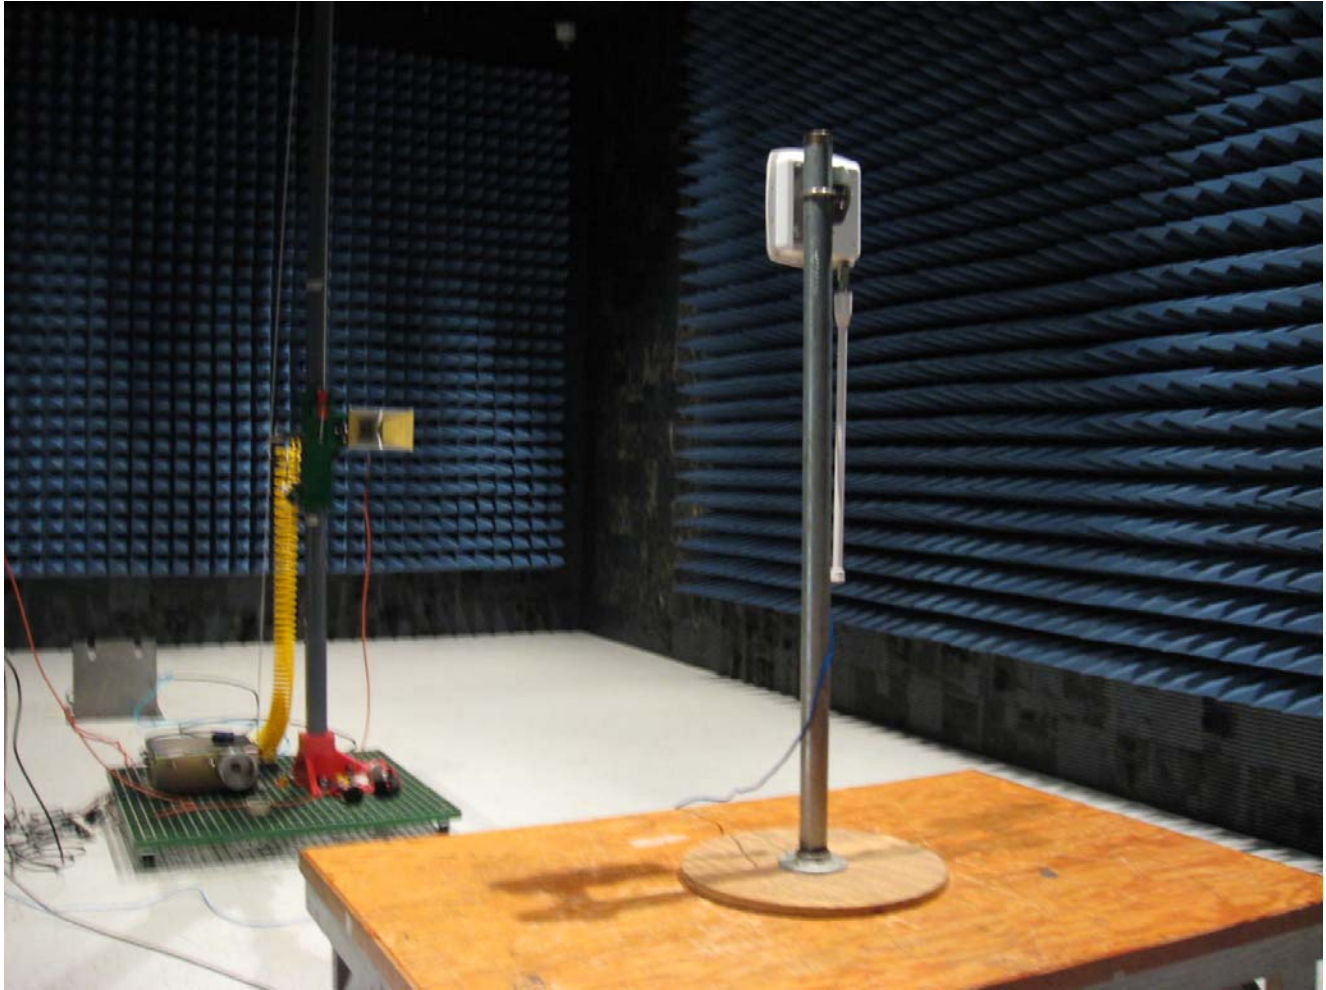

Photograph 5. Test Equipment and setup for various Radiated Measurements

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions Requirements –RF Conducted


Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For frequencies 1-18GHz, measurements were made at coupler port of a 20dB directional coupler. The output of the coupler was terminated by a 50Ω load. For frequencies 18-40GHz a HP11970A and HP11970K harmonic mixer was used. Each harmonic mixer was fed with a SMA to wave guide adapter.


Test Results: Equipment complies with the Spurious Emissions Requirements – Radiated and RF Conducted limits of § 15.247 (d). For Radiated Emissions result, refer to section “§15.209: Radiated Emission Limits”. See following pages for detailed test results with RF Conducted Spurious Emissions and §15.205.

Test Engineer(s): Shawn McMillen


Test Date(s): February 21 & March 8, 2007



Block Diagram 3. Spurious Conducted Emissions Test Setup

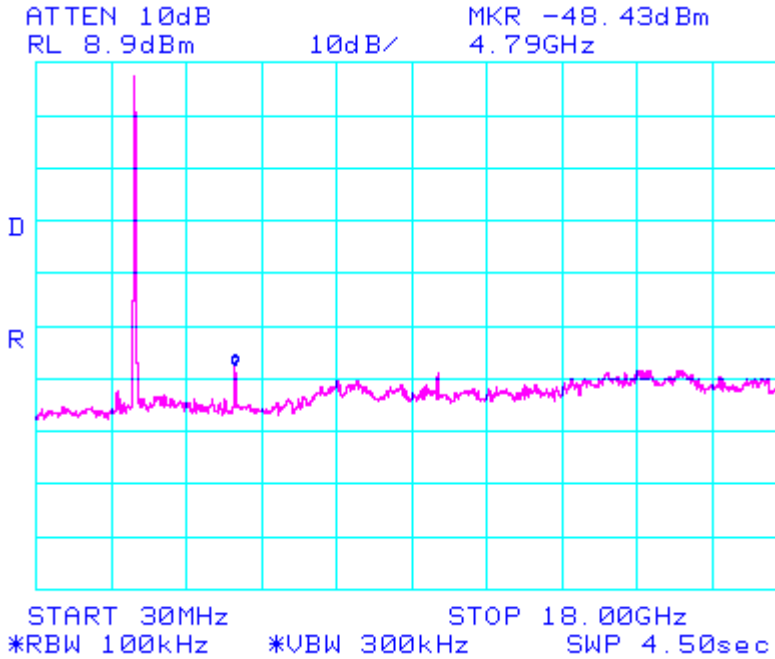

802.11/b – Low Channel Conducted Emissions 30MHz - 18GHz

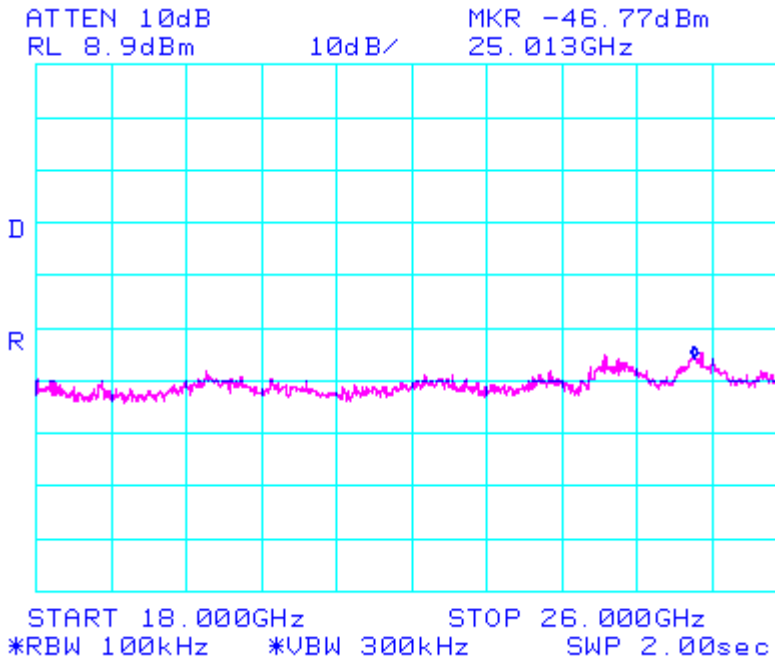

802.11/b – Low Channel Conducted Emissions 18-26GHz



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through a directional coupler. The power was monitored at the coupler port with a Peak Power Meter. The power level was set to the maximum level. The RBW was set to 3 kHz with a VRB at 3*RBW. The spectrum analyzer was set to sweep over a 100 second interval. Measurements were carried out at the low, mid and high channels.

Test Results: Equipment complies with the peak power spectral density limits of § 15.247 (e). The peak power spectral density was determined from plots on the following page(s).

| 802.11b | | | | |
|-----------------|-----------------|---------------------|-------------|-------------|
| Carrier Channel | Frequency (MHz) | Measured PPSD (dBm) | Limit (dBm) | Margin (dB) |
| Low | 2412 | -6.095 | 8 | 14.095 |
| Mid | 2437 | -3.784 | 8 | 11.784 |
| High | 2462 | -7.31 | 8 | 15.31 |

| 802.11g | | | | |
|-----------------|-----------------|---------------------|-------------|-------------|
| Carrier Channel | Frequency (MHz) | Measured PPSD (dBm) | Limit (dBm) | Margin (dB) |
| Low | 2412 | -10.43 | 8 | 18.43 |
| Mid | 2437 | -7.149 | 8 | 15.149 |
| High | 2462 | -10.29 | 8 | 18.29 |


Test Engineer: Minh Ly

Test Date: March 26, 2008




Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(e) Peak Power Spectral Density (802.11b/g)

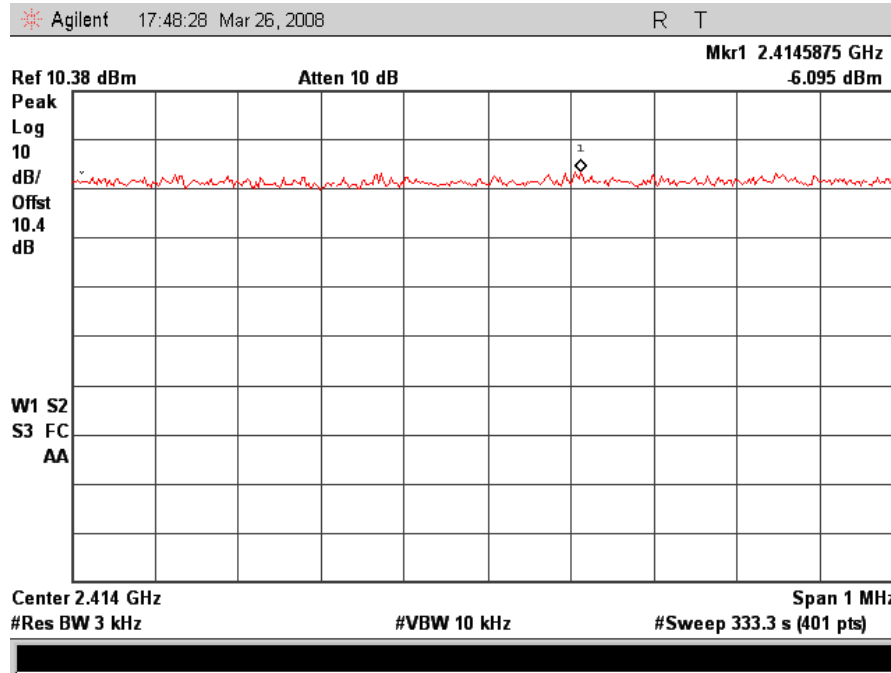


802.11/b – Low Ch Peak Power Spectral Density

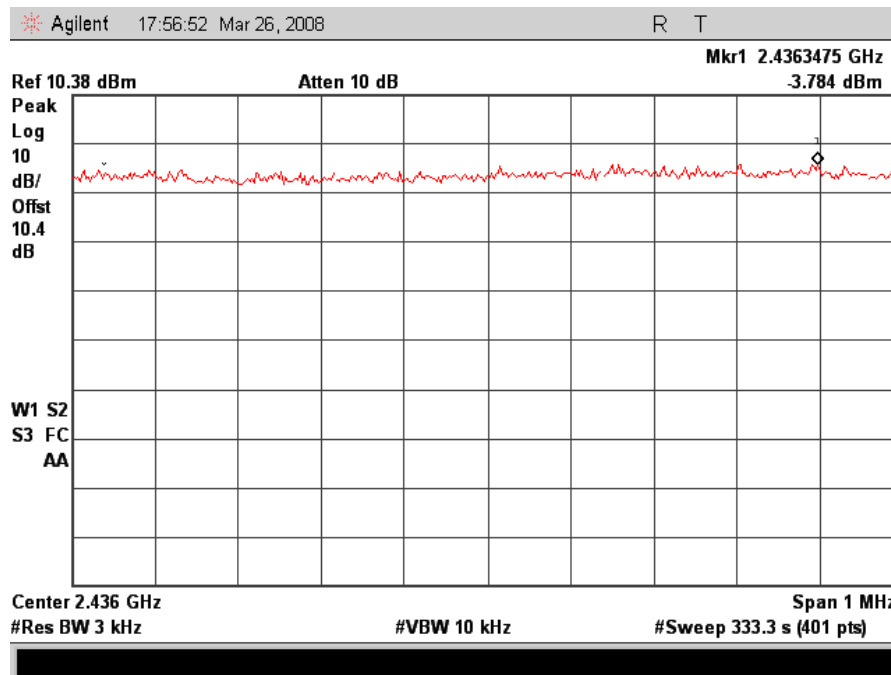


802.11/b – Mid Ch Peak Power Spectral Density

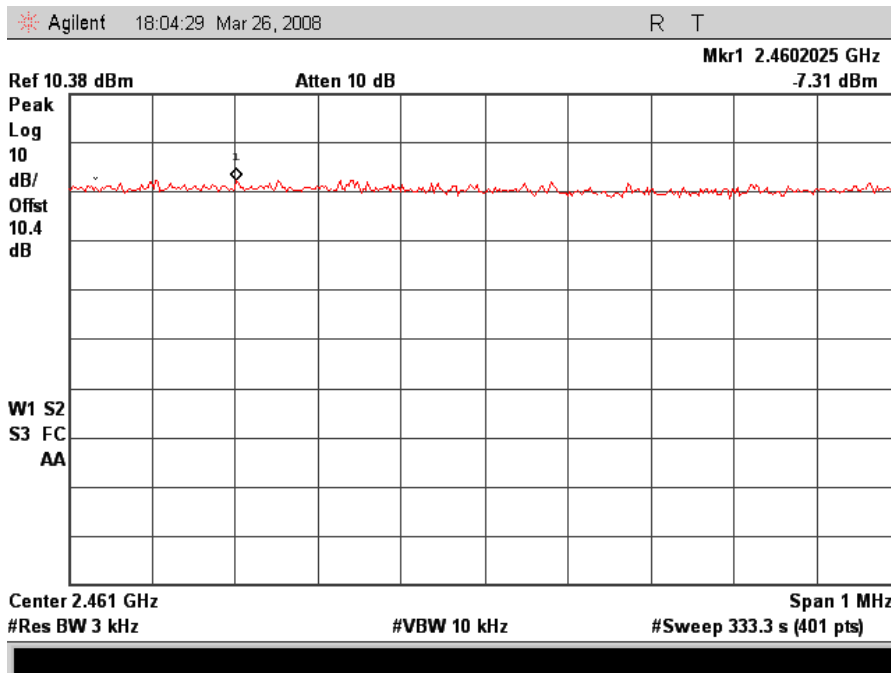


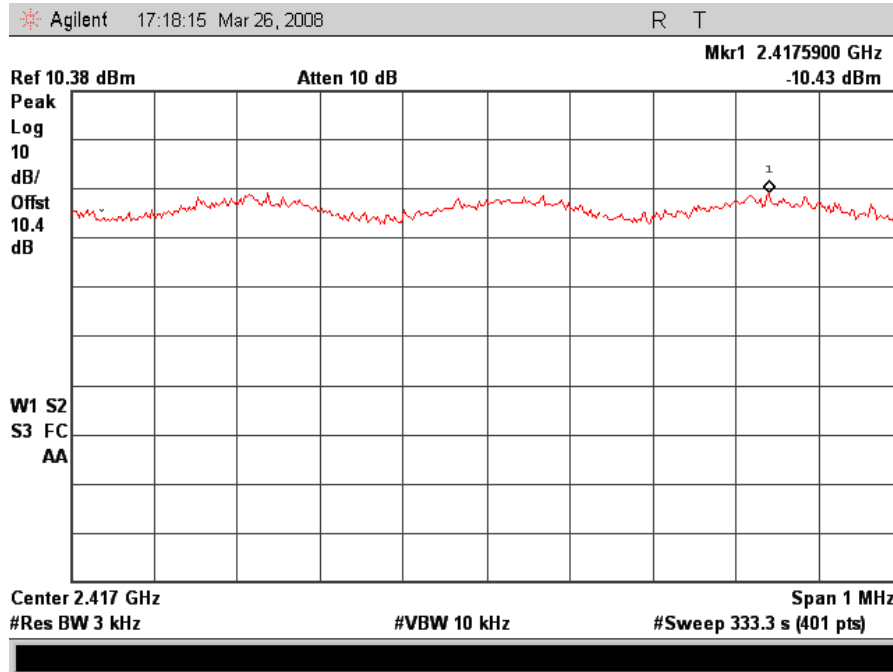


802.11/g – Low Ch Peak Power Spectral Density

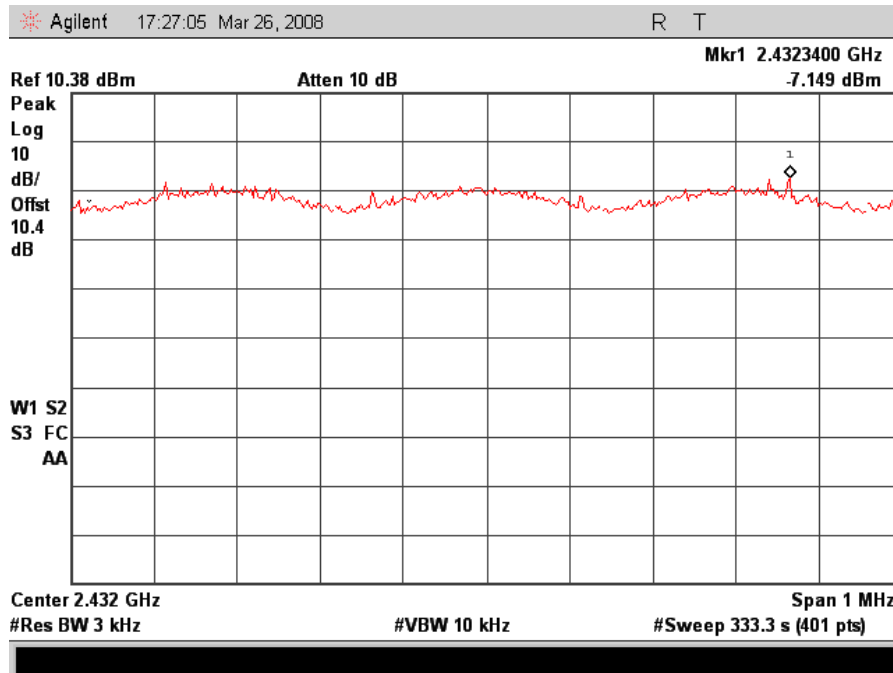

802.11/g – Mid Ch Peak Power Spectral Density

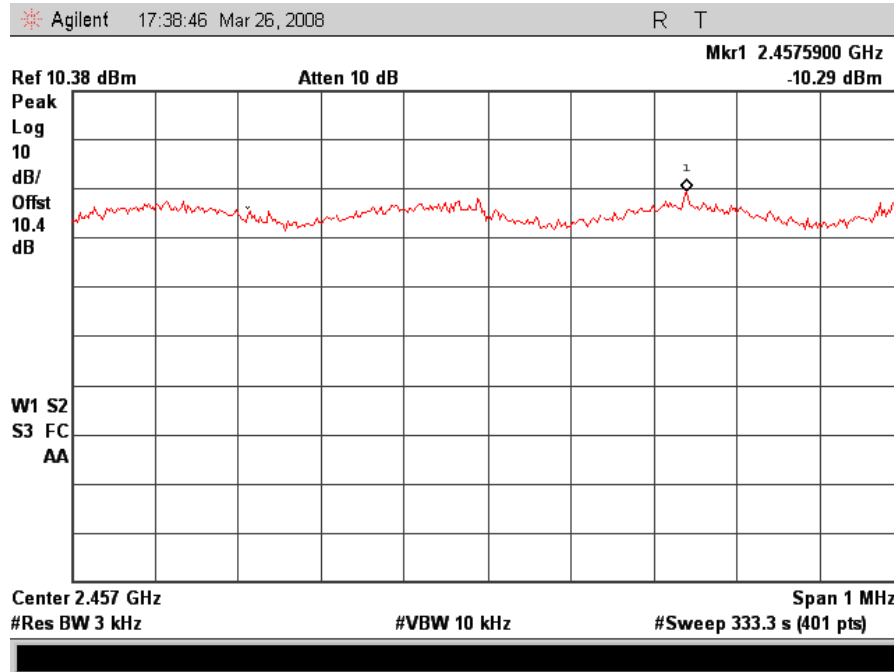

802.11/g – High Ch Peak Power Spectral Density



Block Diagram 4. Peak Power Spectral Density Test Setup



IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

| MET Asset # | Equipment | Manufacturer | Model | Last Cal Date | Cal Due Date |
|-------------|---------------------------------|-----------------|-----------|---------------|--------------|
| 1S2421 | EMI RECEIVER | ROHDE&SCHWARZ | ESIB 7 | 03/27/2007 | 03/27/2008 |
| 1S2184 | BILOG ANTENNA | CHASE | CBL6112A | 01/03/2007 | 01/03/2008 |
| 1S2121 | PRE-AMPLIFIER | HEWLETT PACKARD | 8449B | 10/25/2007 | 10/25/2008 |
| 1S2198 | ANTENNA, HORN | EMCO | 3115 | 08/31/2007 | 08/31/2008 |
| 1S2202 | ANTENNA, HORN, 1 METER | EMCO | 3116 | 04/10/2007 | 04/10/2010 |
| N/A | HIGH PASS FILTER | MICRO-TRONICS | HPM13146 | SEE NOTE | |
| 1S2263 | CHAMBER, 10 METER | RANTEC | N2-14 | 09/24/2007 | 09/24/2008 |
| 1S2482 | CHAMBER, 5 METER | PANASHIELD | 641431 | 11/18/2007 | 11/18/2008 |
| 1S2041 | COUPLER, BI DIRECTIONAL COAXIAL | NARDA | N/A | SEE NOTE | |
| 1S2460 | Analyzer, Spectrum 9 kHz-40GHz | Agilent | E4407B | 07/06/2005 | 07/06/2008 |
| 1S2430 | WIDEBAND POWER METER | ANRITSU COMPANY | ML2488A | 03/12/2007 | 03/12/2008 |
| 1S2432 | WIDEBAND POWER SENSOR | ANRITSU COMPANY | MA2491A | 03/12/2007 | 03/12/2008 |
| 1S2034 | COUPLER, DIRECTIONAL 1-20 GHz | KRYTAR | 101020020 | SEE NOTE | |
| 1S2041 | COUPLER, BI DIRECTIONAL COAXIAL | NARDA | N/A | SEE NOTE | |
| 1S2128 | Harmonic Mixer | Hewlett Packard | 11970A | 10/26/2006 | 10/26/2008 |
| 1S2129 | Harmonic Mixer | Hewlett Packard | 11970K | 10/26/2006 | 10/26/2008 |

Table 20. Test Equipment List – Santa Clara

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

| Test Name: Conducted Emissions | | | Test Date(s): 1/3/08 | | |
|--------------------------------|--------------------------------------|---------------------------|----------------------|---------------|--------------|
| MET Asset # | Equipment | Manufacturer | Model | Last Cal Date | Cal Due Date |
| 1U91 | ANALYZER, SPECTRUM | HEWLETT PACKARD | 8591EM | 10/24/07 | 10/24/08 |
| 1U92 | LIMITER | HEWLETT PACKARD | 11947A | 8/10/07 | 8/10/08 |
| 1U167 | LINE IMPEDANCE STABILIZATION NETWORK | FISCHER CUST. COMM. | FCC-LISN-50/250-16-2 | 8/20/07 | 8/20/08 |
| 1U34 | SHIELD ROOM # 3 | UNIVERSAL SHIELDING CORP. | N/A | 7/26/07 | 7/26/08 |
| Test Name: Radiated Emissions | | | Test Date(s): 1/7/08 | | |
| MET Asset # | Equipment | Manufacturer | Model | Last Cal Date | Cal Due Date |
| 1U150 | EMI TEST RECEIVER | RHODE & SCHWARZ | ESIB7 | 2/15/07 | 2/15/08 |
| 1U32 | Semi- Anechoic Chamber | LINDGREN ENCLOSURES | FACT 4 | 5/8/07 | 5/8/08 |
| 1U170 | BICONILOG ANTENNA | EMCO | 3142C | 7/10/07 | 7/10/08 |

Table 21. Test Equipment List – Union City



V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

- Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.
- Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.



End of Report