


Antenna type 2: external GP-Antenna.

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 5  
 Memo :  
 Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

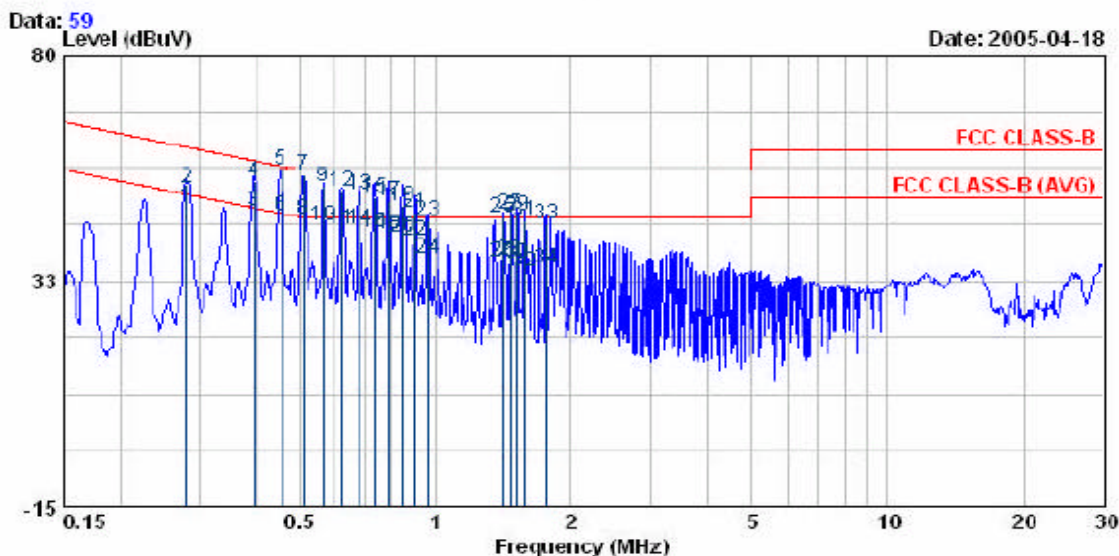


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.15	0.35	48.50	50.76	-2.26	AVERAGE
0.282	51.69	0.35	52.04	60.76	-8.72	QP
0.396	46.79	0.50	47.29	47.95	-0.66	AVERAGE
0.396	52.89	0.50	53.39	57.95	-4.56	QP
0.454	55.34	0.49	55.83	56.30	-0.47	QP
0.454	45.89	0.49	46.38	45.80	-0.42	AVERAGE
0.510	54.35	0.47	54.82	55.00	-1.18	QP
0.510	44.98	0.47	45.45	45.00	-0.55	AVERAGE
0.564	51.91	0.46	52.37	55.00	-2.63	QP
0.564	43.81	0.46	44.27	45.00	-0.73	AVERAGE
0.621	42.85	0.45	43.30	45.00	-1.70	AVERAGE
0.621	50.93	0.45	51.38	55.00	-3.62	QP
0.679	50.34	0.44	50.78	55.00	-4.22	QP
0.679	42.89	0.44	43.33	45.00	-1.67	AVERAGE
0.731	49.52	0.43	49.95	55.00	-5.05	QP
0.731	42.41	0.43	42.84	45.00	-2.16	AVERAGE
0.792	48.91	0.43	49.34	55.00	-5.66	QP
0.792	41.85	0.43	42.28	45.00	-2.72	AVERAGE
0.848	47.92	0.42	48.34	55.00	-6.66	QP
0.848	41.36	0.42	41.78	45.00	-3.22	AVERAGE
0.904	46.62	0.41	47.03	55.00	-7.97	QP
0.904	40.52	0.41	40.93	45.00	-4.07	AVERAGE
0.963	44.63	0.40	45.03	55.00	-10.97	QP
0.963	36.82	0.40	37.22	45.00	-7.78	AVERAGE
1.418	45.51	0.45	45.96	55.00	-9.04	QP
1.418	35.89	0.45	36.34	45.00	-8.66	AVERAGE
1.472	46.25	0.46	46.71	55.00	-8.29	QP
1.472	36.45	0.46	36.91	45.00	-8.09	AVERAGE
1.527	45.85	0.46	46.31	55.00	-8.69	QP
1.527	35.82	0.46	36.28	45.00	-8.72	AVERAGE
1.585	44.87	0.47	45.34	55.00	-9.66	QP
1.585	34.12	0.47	34.59	45.00	-10.41	AVERAGE
1.762	43.92	0.48	44.40	55.00	-11.60	QP
1.762	34.71	0.48	35.19	45.00	-9.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 5  
 Nemo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

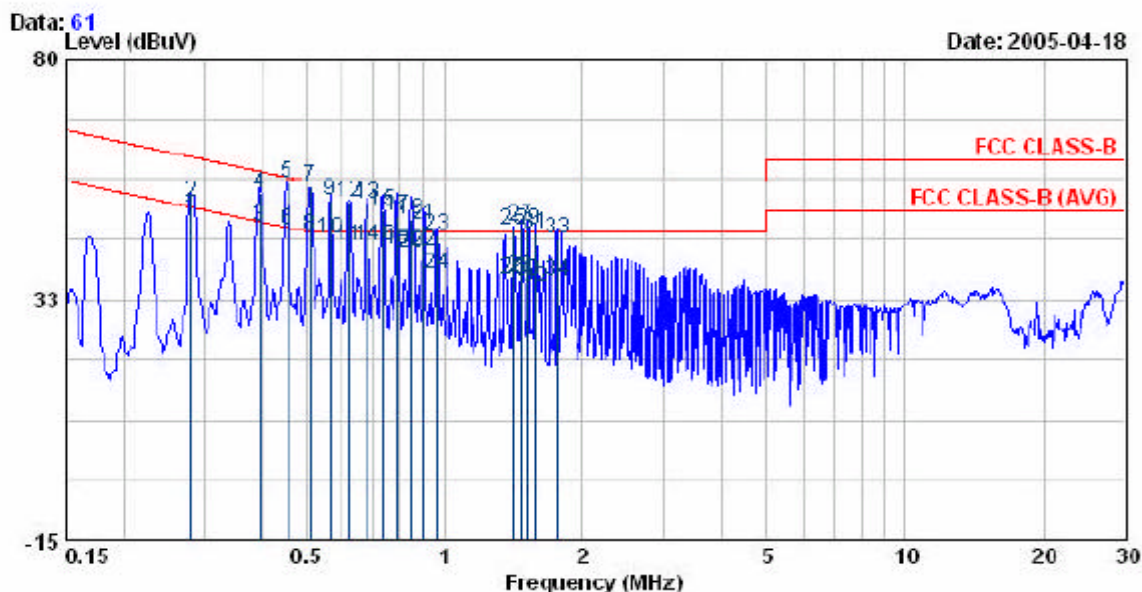


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.36	0.35	48.71	50.76	-2.05	AVERAGE
0.282	51.49	0.35	51.84	60.76	-8.92	QP
0.396	46.52	0.50	47.02	47.95	-0.93	AVERAGE
0.396	52.93	0.50	53.43	57.95	-4.52	QP
0.454	55.22	0.49	55.71	56.80	-1.09	QP
0.454	45.61	0.49	46.10	46.80	-0.70	AVERAGE
0.510	54.31	0.47	54.78	56.00	-1.22	QP
0.510	44.89	0.47	45.36	46.00	-0.64	AVERAGE
0.564	51.72	0.46	52.18	56.00	-3.82	QP
0.564	44.15	0.46	44.61	46.00	-1.39	AVERAGE
0.621	42.73	0.45	43.18	46.00	-2.82	AVERAGE
0.621	51.31	0.45	51.76	56.00	-4.24	QP
0.679	51.03	0.44	51.47	56.00	-4.53	QP
0.679	42.61	0.44	43.05	46.00	-2.95	AVERAGE
0.731	49.63	0.43	50.06	56.00	-5.94	QP
0.731	42.56	0.43	42.99	46.00	-3.01	AVERAGE
0.792	48.61	0.43	49.04	56.00	-6.96	QP
0.792	41.85	0.43	42.28	46.00	-3.72	AVERAGE
0.848	47.89	0.42	48.31	56.00	-7.69	QP
0.848	41.42	0.42	41.84	46.00	-4.16	AVERAGE
0.904	46.75	0.41	47.16	56.00	-8.84	QP
0.904	41.59	0.41	42.00	46.00	-4.00	AVERAGE
0.963	44.75	0.40	45.15	56.00	-10.85	QP
0.963	36.98	0.40	37.38	46.00	-8.62	AVERAGE
1.418	45.69	0.45	46.14	56.00	-9.86	QP
1.418	36.21	0.45	36.66	46.00	-9.34	AVERAGE
1.472	46.45	0.46	46.91	56.00	-9.09	QP
1.472	36.51	0.46	36.97	46.00	-9.03	AVERAGE
1.527	45.79	0.46	46.25	56.00	-9.75	QP
1.527	35.75	0.46	36.21	46.00	-9.79	AVERAGE
1.585	44.91	0.47	45.38	56.00	-10.62	QP
1.585	34.36	0.47	34.83	46.00	-11.17	AVERAGE
1.762	43.86	0.48	44.34	56.00	-11.66	QP
1.762	35.71	0.48	36.19	46.00	-9.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 8  
 Nemo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

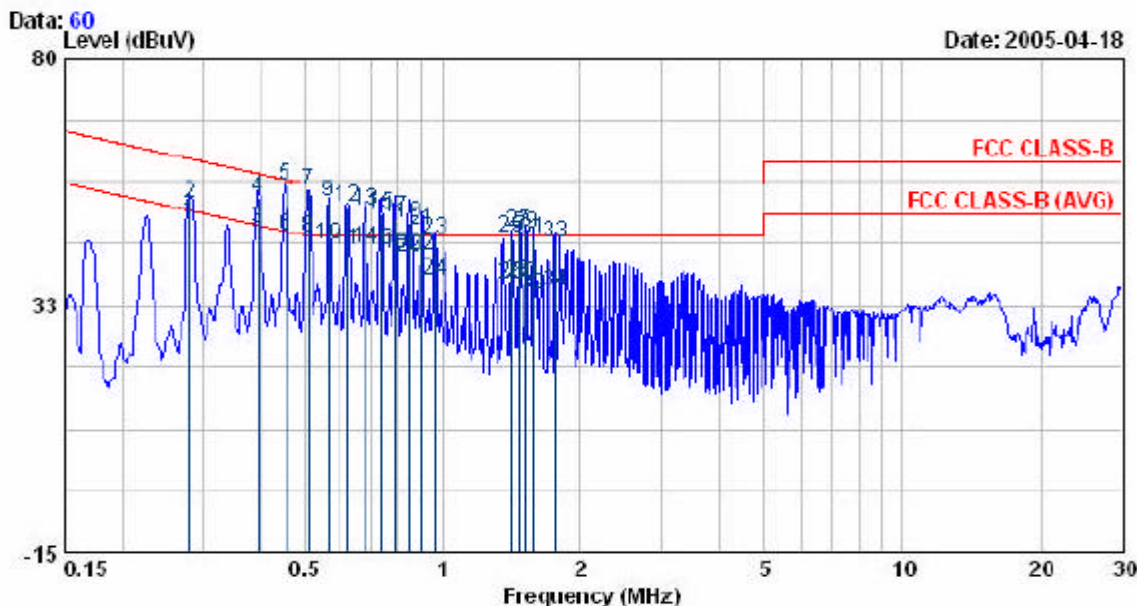


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.24	0.35	48.59	50.76	-2.17	AVERAGE
0.282	51.78	0.35	52.13	50.76	-8.63	QP
0.396	46.65	0.50	47.15	47.95	-0.80	AVERAGE
0.396	52.76	0.50	53.26	47.95	-4.69	QP
0.454	55.23	0.49	55.72	55.80	-1.08	QP
0.454	45.56	0.49	46.05	45.80	-0.75	AVERAGE
0.510	54.11	0.47	54.58	55.00	-1.42	QP
0.510	45.02	0.47	45.49	45.00	-0.51	AVERAGE
0.564	51.93	0.46	52.39	55.00	-3.61	QP
0.564	43.75	0.46	44.21	45.00	-1.79	AVERAGE
0.621	42.71	0.45	43.16	45.00	-2.84	AVERAGE
0.621	50.93	0.45	51.38	55.00	-4.62	QP
0.679	50.45	0.44	50.89	55.00	-5.11	QP
0.679	42.89	0.44	43.33	45.00	-2.67	AVERAGE
0.731	49.52	0.43	49.95	55.00	-6.05	QP
0.731	42.53	0.43	42.96	45.00	-3.04	AVERAGE
0.792	48.91	0.43	49.34	55.00	-6.66	QP
0.792	41.85	0.43	42.28	45.00	-3.72	AVERAGE
0.848	47.98	0.42	48.40	55.00	-7.60	QP
0.848	41.36	0.42	41.78	45.00	-4.22	AVERAGE
0.904	46.62	0.41	47.03	55.00	-8.97	QP
0.904	41.63	0.41	42.04	45.00	-3.96	AVERAGE
0.963	44.63	0.40	45.03	55.00	-10.97	QP
0.963	36.82	0.40	37.22	45.00	-8.78	AVERAGE
1.418	45.21	0.45	45.66	55.00	-10.34	QP
1.418	35.89	0.45	36.34	45.00	-9.66	AVERAGE
1.472	46.25	0.46	46.71	55.00	-9.29	QP
1.472	36.56	0.46	37.02	45.00	-8.98	AVERAGE
1.527	45.85	0.46	46.31	55.00	-9.69	QP
1.527	35.89	0.46	36.35	45.00	-9.65	AVERAGE
1.585	44.87	0.47	45.34	55.00	-10.66	QP
1.585	34.12	0.47	34.59	45.00	-11.41	AVERAGE
1.762	43.92	0.48	44.40	55.00	-11.60	QP
1.762	34.71	0.48	35.19	45.00	-10.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 8  
 Memo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

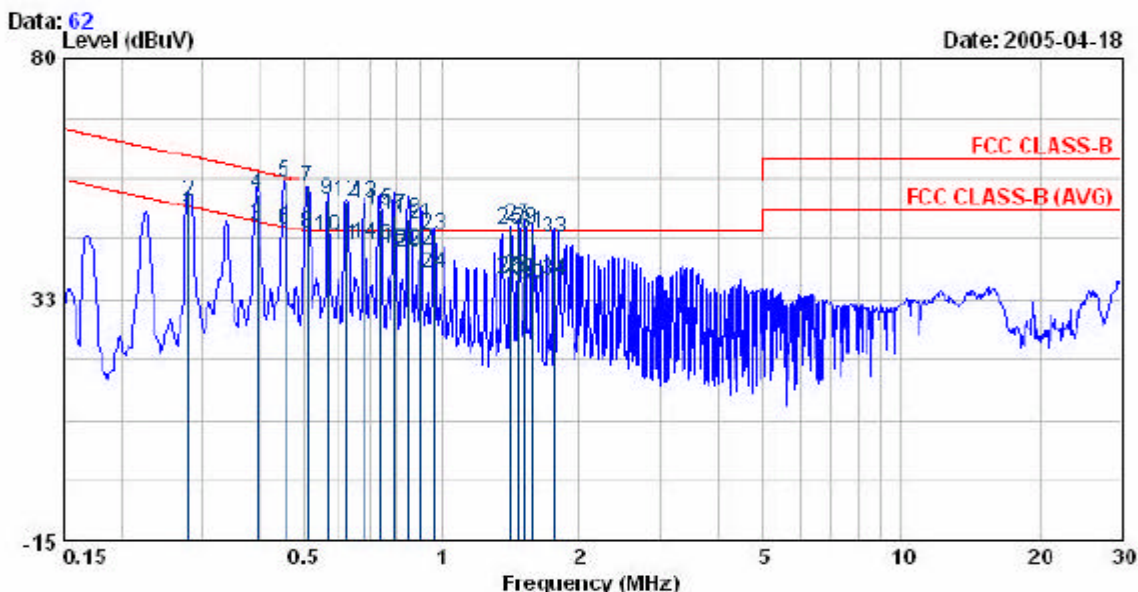


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.32	0.35	48.67	50.76	-2.09	AVERAGE
0.282	51.63	0.35	51.98	60.76	-9.78	QP
0.396	46.49	0.50	46.99	47.95	-0.96	AVERAGE
0.396	52.87	0.50	53.37	57.95	-4.58	QP
0.454	55.03	0.49	55.52	56.80	-1.28	QP
0.454	45.68	0.49	46.17	46.80	-0.63	AVERAGE
0.510	54.23	0.47	54.70	55.00	-1.30	QP
0.510	44.91	0.47	45.38	46.00	-0.62	AVERAGE
0.564	51.79	0.46	52.25	55.00	-3.75	QP
0.564	44.23	0.46	44.69	45.00	-1.31	AVERAGE
0.621	42.69	0.45	43.14	45.00	-2.86	AVERAGE
0.621	51.36	0.45	51.81	55.00	-4.19	QP
0.679	51.16	0.44	51.60	55.00	-4.40	QP
0.679	42.69	0.44	43.33	45.00	-2.57	AVERAGE
0.731	49.68	0.43	50.11	55.00	-5.89	QP
0.731	42.61	0.43	43.04	45.00	-2.96	AVERAGE
0.792	48.61	0.43	49.04	55.00	-6.96	QP
0.792	41.85	0.43	42.28	45.00	-3.72	AVERAGE
0.848	47.91	0.42	48.33	55.00	-7.57	QP
0.848	41.42	0.42	41.84	45.00	-4.16	AVERAGE
0.904	46.75	0.41	47.15	55.00	-8.84	QP
0.904	41.61	0.41	42.02	45.00	-3.98	AVERAGE
0.963	44.75	0.40	45.15	55.00	-10.85	QP
0.963	36.98	0.40	37.38	45.00	-8.62	AVERAGE
1.418	45.72	0.45	46.17	55.00	-9.83	QP
1.418	36.21	0.45	36.66	45.00	-9.34	AVERAGE
1.472	46.32	0.46	46.78	55.00	-9.22	QP
1.472	36.51	0.46	36.97	45.00	-9.03	AVERAGE
1.527	45.79	0.46	46.25	55.00	-9.75	QP
1.527	35.75	0.46	36.21	45.00	-9.79	AVERAGE
1.585	44.91	0.47	45.38	55.00	-10.62	QP
1.585	34.51	0.47	34.98	45.00	-11.02	AVERAGE
1.762	43.86	0.48	44.34	55.00	-11.66	QP
1.762	35.83	0.48	36.31	45.00	-9.69	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 9  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

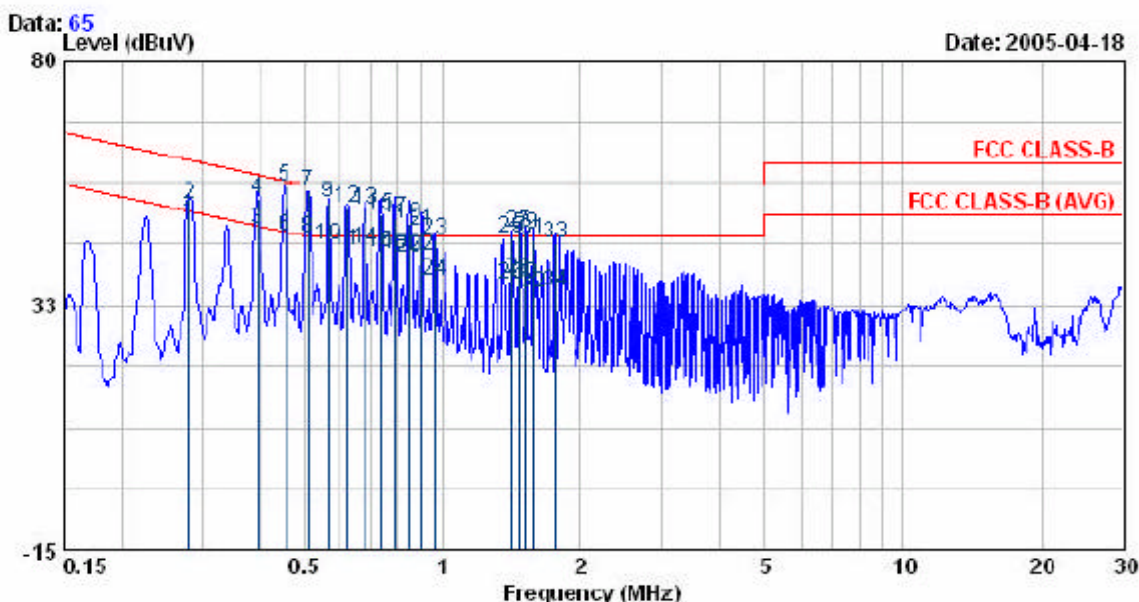


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.32	0.35	48.67	50.76	-2.09	AVERAGE
0.282	51.78	0.35	52.13	60.76	-8.63	QP
0.396	46.65	0.50	47.15	47.95	-0.80	AVERAGE
0.396	52.76	0.50	53.26	57.95	-4.69	QP
0.454	55.23	0.49	55.72	55.80	-1.08	QP
0.454	45.56	0.49	46.05	45.80	-0.75	AVERAGE
0.510	54.11	0.47	54.58	55.00	-1.42	QP
0.510	45.02	0.47	45.49	45.00	-0.51	AVERAGE
0.564	51.93	0.46	52.39	55.00	-3.61	QP
0.564	43.75	0.46	44.21	45.00	-1.79	AVERAGE
0.621	42.71	0.45	43.16	45.00	-2.84	AVERAGE
0.621	50.93	0.45	51.38	55.00	-4.62	QP
0.679	50.58	0.44	51.02	55.00	-4.98	QP
0.679	42.89	0.44	43.33	45.00	-2.67	AVERAGE
0.731	49.52	0.43	49.95	55.00	-6.05	QP
0.731	42.48	0.43	42.91	45.00	-3.09	AVERAGE
0.792	48.91	0.43	49.34	55.00	-6.66	QP
0.792	41.85	0.43	42.28	45.00	-3.72	AVERAGE
0.848	47.98	0.42	48.40	55.00	-7.60	QP
0.848	41.36	0.42	41.78	45.00	-4.22	AVERAGE
0.904	46.62	0.41	47.03	55.00	-8.97	QP
0.904	41.63	0.41	42.04	45.00	-3.96	AVERAGE
0.963	44.63	0.40	45.03	55.00	-10.97	QP
0.963	36.82	0.40	37.22	45.00	-8.78	AVERAGE
1.418	45.21	0.45	45.66	55.00	-10.34	QP
1.418	35.89	0.45	36.34	45.00	-9.66	AVERAGE
1.472	46.25	0.46	46.71	55.00	-9.29	QP
1.472	36.98	0.46	37.44	45.00	-8.56	AVERAGE
1.527	45.85	0.46	46.31	55.00	-9.69	QP
1.527	35.89	0.46	36.35	45.00	-9.65	AVERAGE
1.585	44.87	0.47	45.34	55.00	-10.66	QP
1.585	34.25	0.47	34.72	45.00	-11.28	AVERAGE
1.762	43.92	0.48	44.40	55.00	-11.60	QP
1.762	34.71	0.48	35.19	45.00	-10.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 9  
 Memo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

Data: 63 Level (dBuV) Date: 2005-04-18

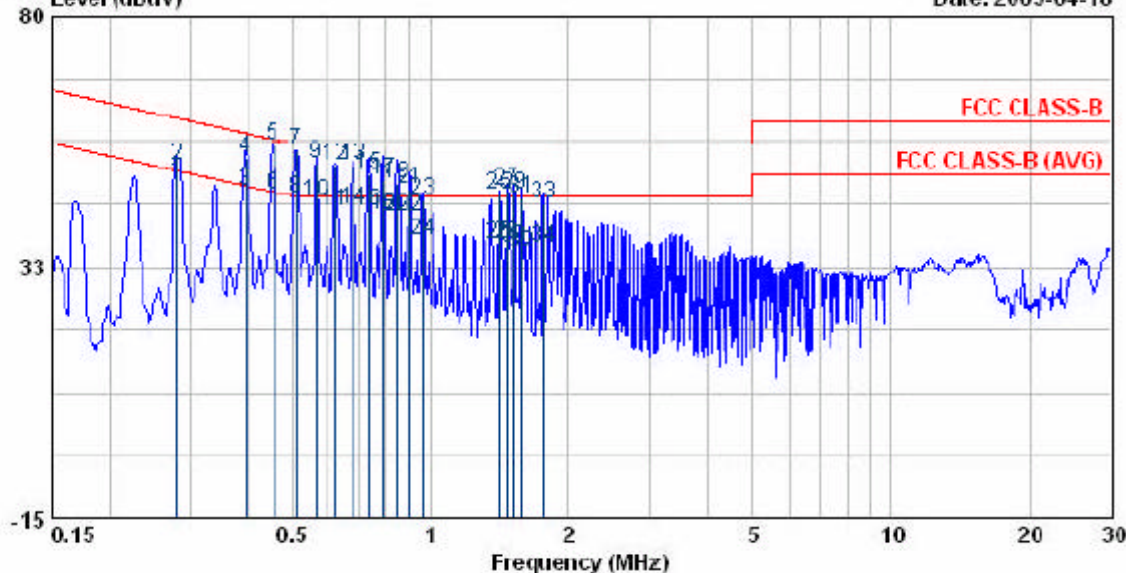


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.282	48.32	0.35	48.67	50.76	-2.09	AVERAGE
0.282	51.63	0.35	51.98	60.76	-8.78	QP
0.396	46.51	0.50	47.01	47.95	-0.94	AVERAGE
0.396	52.87	0.50	53.37	57.95	-4.58	QP
0.454	55.03	0.49	55.52	58.80	-1.28	QP
0.454	45.71	0.49	46.20	45.80	-0.60	AVERAGE
0.510	54.23	0.47	54.70	56.00	-1.30	QP
0.510	44.91	0.47	45.38	45.00	-0.62	AVERAGE
0.564	51.82	0.46	52.28	55.00	-3.72	QP
0.564	44.23	0.46	44.69	45.00	-1.31	AVERAGE
0.621	42.69	0.45	43.14	45.00	-2.86	AVERAGE
0.621	51.36	0.45	51.81	55.00	-4.19	QP
0.679	51.25	0.44	51.69	55.00	-4.31	QP
0.679	42.89	0.44	43.33	45.00	-2.67	AVERAGE
0.731	49.68	0.43	50.11	55.00	-5.89	QP
0.731	42.68	0.43	43.11	45.00	-2.89	AVERAGE
0.792	48.61	0.43	49.04	55.00	-6.96	QP
0.792	41.85	0.43	42.28	45.00	-3.72	AVERAGE
0.848	47.91	0.42	48.33	55.00	-7.67	QP
0.848	41.54	0.42	41.96	45.00	-4.04	AVERAGE
0.904	46.75	0.41	47.16	55.00	-8.84	QP
0.904	41.61	0.41	42.02	45.00	-3.98	AVERAGE
0.963	44.82	0.40	45.22	55.00	-10.78	QP
0.963	36.98	0.40	37.38	45.00	-8.62	AVERAGE
1.418	45.72	0.45	46.17	55.00	-9.83	QP
1.418	36.35	0.45	36.80	45.00	-9.20	AVERAGE
1.472	46.32	0.46	46.78	55.00	-9.22	QP
1.472	36.51	0.46	36.97	45.00	-9.03	AVERAGE
1.527	45.79	0.46	46.25	55.00	-9.75	QP
1.527	35.75	0.46	36.21	45.00	-9.79	AVERAGE
1.585	44.91	0.47	45.38	55.00	-10.62	QP
1.585	34.51	0.47	34.98	45.00	-11.02	AVERAGE
1.762	43.86	0.46	44.34	55.00	-11.66	QP
1.762	35.83	0.48	36.31	45.00	-9.69	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 11  
 Nero :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

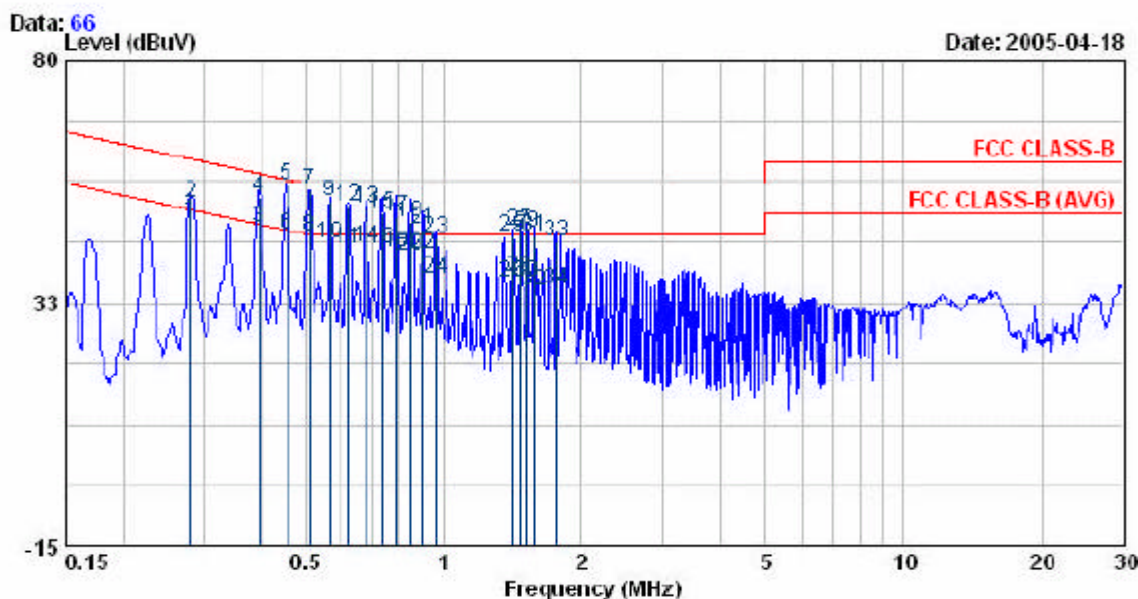


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.282	48.32	0.35	48.67	50.76	-2.09	AVERAGE
0.282	51.78	0.35	52.13	60.76	-8.63	QP
0.396	46.71	0.50	47.21	47.95	-0.74	AVERAGE
0.396	52.76	0.50	53.26	57.95	-4.69	QP
0.454	55.23	0.49	55.72	58.80	-1.08	QP
0.454	45.52	0.49	46.01	46.80	-0.79	AVERAGE
0.510	54.11	0.47	54.58	56.00	-1.42	QP
0.510	45.02	0.47	45.49	46.00	-0.51	AVERAGE
0.564	51.93	0.46	52.39	56.00	-3.61	QP
0.564	43.75	0.46	44.21	46.00	-1.79	AVERAGE
0.621	42.75	0.45	43.20	46.00	-2.80	AVERAGE
0.621	50.93	0.45	51.38	56.00	-4.62	QP
0.679	50.58	0.44	51.02	56.00	-4.98	QP
0.679	42.89	0.44	43.33	46.00	-2.67	AVERAGE
0.731	49.52	0.43	49.95	56.00	-6.05	QP
0.731	42.51	0.43	42.94	46.00	-3.06	AVERAGE
0.792	48.91	0.43	49.34	56.00	-6.66	QP
0.792	41.85	0.43	42.28	46.00	-3.72	AVERAGE
0.848	47.95	0.42	48.37	56.00	-7.63	QP
0.848	41.36	0.42	41.78	46.00	-4.22	AVERAGE
0.904	46.62	0.41	47.03	56.00	-8.97	QP
0.904	41.69	0.41	42.10	46.00	-3.90	AVERAGE
0.963	44.63	0.40	45.03	56.00	-10.97	QP
0.963	36.82	0.40	37.22	46.00	-8.78	AVERAGE
1.418	45.21	0.45	45.66	56.00	-10.34	QP
1.418	35.94	0.45	36.39	46.00	-9.61	AVERAGE
1.472	46.25	0.46	46.71	56.00	-9.29	QP
1.472	36.98	0.46	37.44	46.00	-8.56	AVERAGE
1.527	45.85	0.46	46.31	56.00	-9.69	QP
1.527	35.89	0.46	36.35	46.00	-9.65	AVERAGE
1.585	44.95	0.47	45.42	56.00	-10.58	QP
1.585	34.25	0.47	34.72	46.00	-11.28	AVERAGE
1.762	43.92	0.48	44.40	56.00	-11.60	QP
1.762	34.71	0.48	35.19	46.00	-10.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN (ISN) Factor + Cable Loss

EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 11  
 Memo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

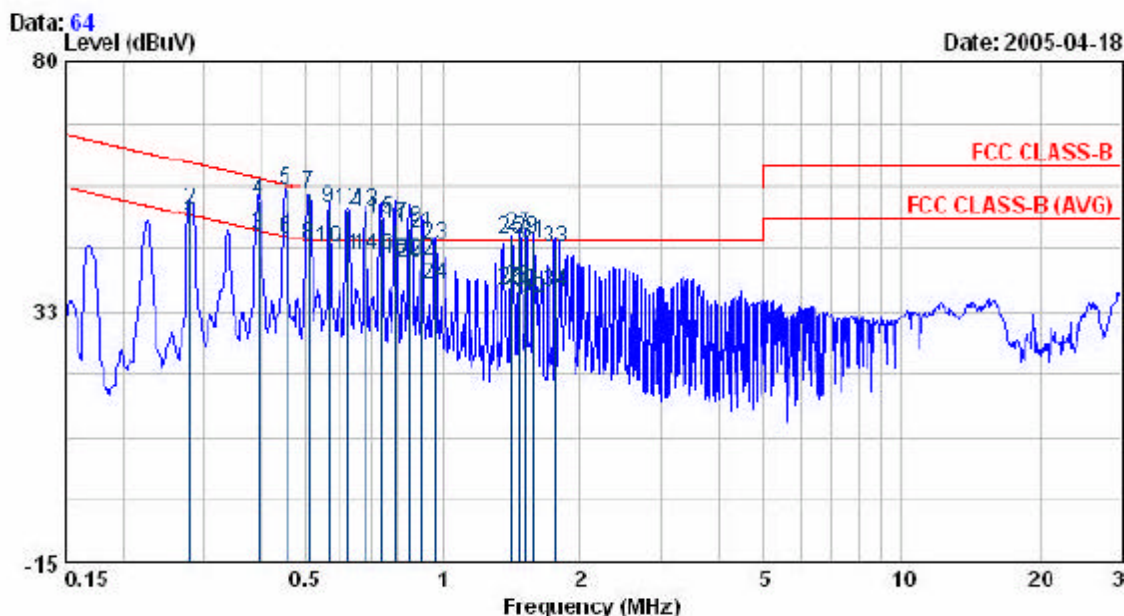


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.282	48.36	0.35	48.71	50.76	-2.05	AVERAGE
0.282	51.49	0.35	51.84	60.76	-8.92	QP
0.396	46.52	0.50	47.02	47.95	-0.93	AVERAGE
0.396	52.93	0.50	53.43	57.95	-4.52	QP
0.454	55.22	0.49	55.71	56.80	-1.09	QP
0.454	45.61	0.49	46.10	46.80	-0.70	AVERAGE
0.510	54.31	0.47	54.78	56.00	-1.22	QP
0.510	44.89	0.47	45.36	46.00	-0.64	AVERAGE
0.564	51.72	0.46	52.18	56.00	-3.82	QP
0.564	44.15	0.46	44.61	46.00	-1.39	AVERAGE
0.621	42.73	0.45	43.18	46.00	-2.82	AVERAGE
0.621	51.31	0.45	51.76	56.00	-4.24	QP
0.679	51.03	0.44	51.47	56.00	-4.53	QP
0.679	42.81	0.44	43.25	46.00	-2.75	AVERAGE
0.731	49.63	0.43	50.06	56.00	-5.94	QP
0.731	42.56	0.43	42.99	46.00	-3.01	AVERAGE
0.792	48.61	0.43	49.04	56.00	-6.96	QP
0.792	41.85	0.43	42.28	46.00	-3.72	AVERAGE
0.848	47.89	0.42	48.31	56.00	-7.69	QP
0.848	41.42	0.42	41.84	46.00	-4.16	AVERAGE
0.904	46.75	0.41	47.16	56.00	-8.84	QP
0.904	41.59	0.41	42.00	46.00	-4.00	AVERAGE
0.963	44.75	0.40	45.15	56.00	-10.85	QP
0.963	36.98	0.40	37.38	46.00	-8.62	AVERAGE
1.418	45.69	0.45	46.14	56.00	-9.86	QP
1.418	36.21	0.45	36.66	46.00	-9.34	AVERAGE
1.472	46.45	0.46	46.91	56.00	-9.09	QP
1.472	36.51	0.46	36.97	46.00	-9.03	AVERAGE
1.527	45.79	0.46	46.25	56.00	-9.75	QP
1.527	35.75	0.46	36.21	46.00	-9.79	AVERAGE
1.585	44.91	0.47	45.38	56.00	-10.62	QP
1.585	34.36	0.47	34.83	46.00	-11.17	AVERAGE
1.762	43.86	0.48	44.34	56.00	-11.66	QP
1.762	35.71	0.48	36.19	46.00	-9.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss



EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 13  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 26 °C  
 Humidity : 58 %

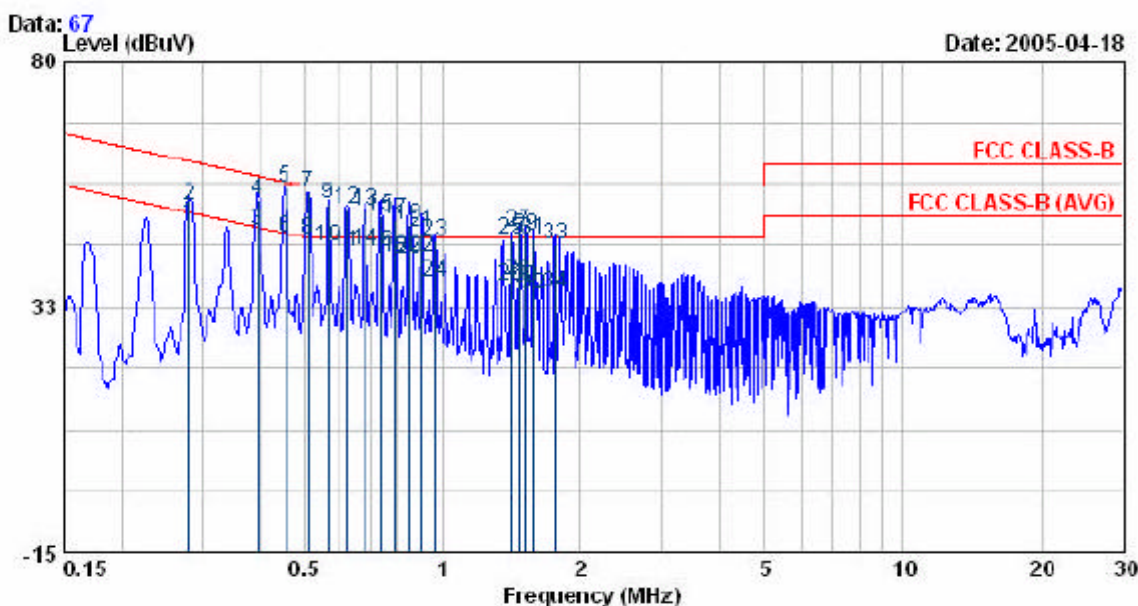


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.32	0.35	48.67	50.76	-2.09	AVERAGE
0.282	51.82	0.35	52.17	60.76	-8.59	QP
0.396	46.71	0.50	47.21	47.95	-0.74	AVERAGE
0.396	52.81	0.50	53.31	57.95	-4.64	QP
0.454	55.23	0.49	55.72	56.80	-1.08	QP
0.454	45.52	0.49	46.01	46.80	-0.79	AVERAGE
0.510	54.09	0.47	54.55	55.00	-1.44	QP
0.510	45.02	0.47	45.49	45.00	-0.51	AVERAGE
0.564	51.93	0.46	52.39	55.00	-3.61	QP
0.564	43.71	0.46	44.17	45.00	-1.83	AVERAGE
0.621	42.75	0.45	43.20	46.00	-2.80	AVERAGE
0.621	50.89	0.45	51.34	55.00	-4.66	QP
0.679	50.58	0.44	51.02	55.00	-4.98	QP
0.679	42.89	0.44	43.33	45.00	-2.67	AVERAGE
0.731	49.59	0.43	50.02	55.00	-5.98	QP
0.731	42.51	0.43	42.94	45.00	-3.06	AVERAGE
0.792	48.91	0.43	49.34	55.00	-6.66	QP
0.792	41.79	0.43	42.22	45.00	-3.78	AVERAGE
0.848	47.95	0.42	48.37	55.00	-7.63	QP
0.848	41.36	0.42	41.78	45.00	-4.22	AVERAGE
0.904	46.59	0.41	47.00	55.00	-9.00	QP
0.904	41.69	0.41	42.10	45.00	-3.90	AVERAGE
0.963	44.63	0.40	45.03	55.00	-10.97	QP
0.963	36.85	0.40	37.25	45.00	-8.75	AVERAGE
1.418	45.21	0.45	45.65	55.00	-10.34	QP
1.418	35.94	0.45	36.39	45.00	-9.61	AVERAGE
1.472	46.36	0.46	46.82	55.00	-9.18	QP
1.472	36.98	0.46	37.44	45.00	-8.56	AVERAGE
1.527	45.85	0.46	46.31	55.00	-9.69	QP
1.527	35.81	0.46	36.27	45.00	-9.73	AVERAGE
1.585	44.95	0.47	45.42	55.00	-10.58	QP
1.585	34.25	0.47	34.72	45.00	-11.28	AVERAGE
1.762	43.92	0.48	44.40	55.00	-11.60	QP
1.762	34.71	0.48	35.19	45.00	-10.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : Razor  
 Power : AC 110V  
 Test Mode : 802.11a CH 13  
 Nemo :

Pol/Phase : LINE  
 Temperature : 26 °C  
 Humidity : 58 %

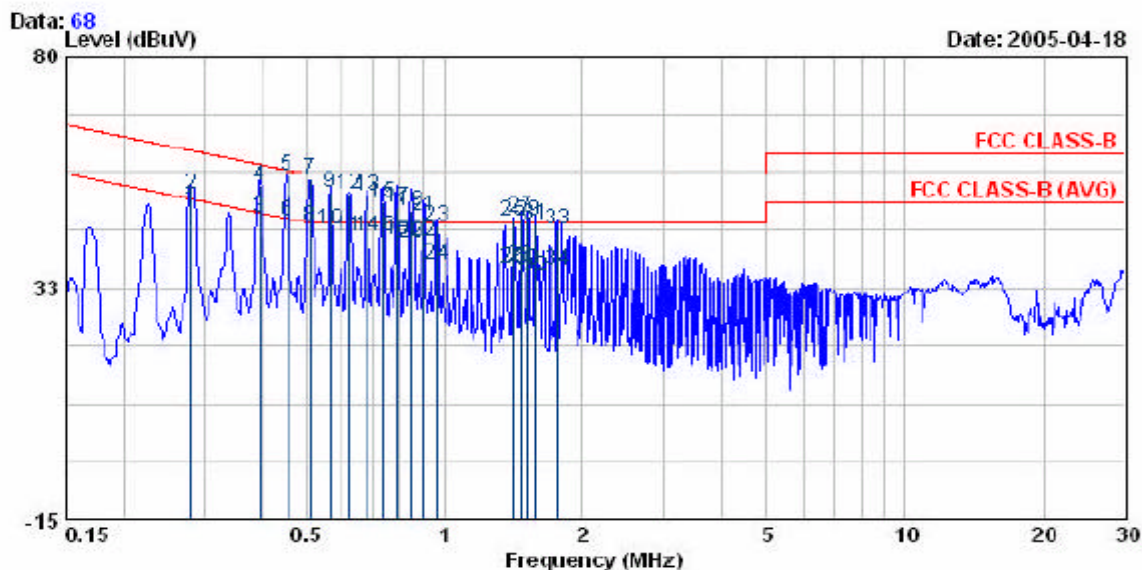

Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
0.282	48.36	0.35	48.71	50.76	-2.05	AVERAGE
0.282	51.49	0.35	51.84	60.76	-8.92	QP
0.396	46.58	0.50	47.08	47.95	-0.87	AVERAGE
0.396	52.93	0.50	53.43	57.95	-4.52	QP
0.454	55.22	0.49	55.71	56.80	-1.09	QP
0.454	45.63	0.49	46.12	46.80	-0.68	AVERAGE
0.510	54.31	0.47	54.78	56.00	-1.22	QP
0.510	44.79	0.47	45.26	46.00	-0.74	AVERAGE
0.564	51.72	0.46	52.18	56.00	-3.82	QP
0.564	44.15	0.46	44.61	46.00	-1.39	AVERAGE
0.621	42.73	0.45	43.18	46.00	-2.82	AVERAGE
0.621	51.36	0.45	51.81	56.00	-4.19	QP
0.679	51.03	0.44	51.47	56.00	-4.53	QP
0.679	42.81	0.44	43.25	46.00	-2.75	AVERAGE
0.731	49.71	0.43	50.14	56.00	-5.86	QP
0.731	42.56	0.43	42.99	46.00	-3.01	AVERAGE
0.792	48.61	0.43	49.04	56.00	-6.96	QP
0.792	41.85	0.43	42.28	46.00	-3.72	AVERAGE
0.848	47.91	0.42	48.33	56.00	-7.67	QP
0.848	41.42	0.42	41.84	46.00	-4.16	AVERAGE
0.904	46.79	0.41	47.20	56.00	-8.80	QP
0.904	41.59	0.41	42.00	46.00	-4.00	AVERAGE
0.963	44.75	0.40	45.15	56.00	-10.85	QP
0.963	36.91	0.40	37.31	46.00	-8.69	AVERAGE
1.418	45.69	0.45	46.14	56.00	-9.86	QP
1.418	36.21	0.45	36.66	46.00	-9.34	AVERAGE
1.472	46.45	0.46	46.91	56.00	-9.09	QP
1.472	36.55	0.46	37.01	46.00	-8.99	AVERAGE
1.527	45.79	0.46	46.25	56.00	-9.75	QP
1.527	35.75	0.46	36.21	46.00	-9.79	AVERAGE
1.585	44.91	0.47	45.38	56.00	-10.62	QP
1.585	34.41	0.47	34.88	46.00	-11.12	AVERAGE
1.762	43.86	0.48	44.34	56.00	-11.66	QP
1.762	35.71	0.48	36.19	46.00	-9.81	AVERAGE

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

Test engineer: 


5.5.1. Test Photographs

Antenna type 1: external Dipole Antenna.

Front View



Rear View

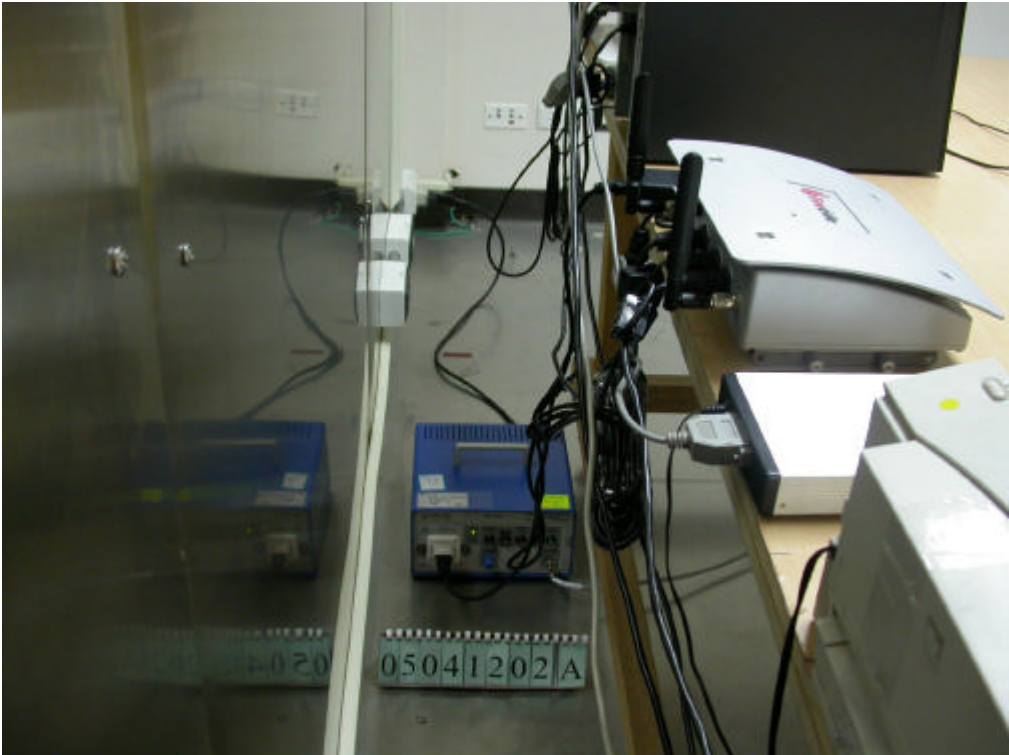

Antenna type 2: external GP-Antenna

Front View



Rear View

