



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

February 22, 2011

Firetide, Inc.
16795 Lark Ave. Suite 200
Los Gatos, CA 95032

Dear Bharath Channakeshava,

Enclosed is the EMC Wireless test report for compliance testing of the Firetide, Inc., 4200 Outdoor Unit and FWB-105 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 7, June 2007 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\\Firetide, Inc.\\EMCS81960B-FCC247 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.

Electromagnetic Compatibility Criteria Test Report

for the

**Firetide, Inc.
4200 Outdoor Unit and FWB-105**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

MET Report: EMCS81960B-FCC247 Rev. 3

February 22, 2011

Prepared For:

**Firetide, Inc.
16795 Lark Ave. Suite 200
Los Gatos, CA 95032**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

Firetide, Inc.
4200 Outdoor Unit and FWB-105

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators



Minh Ly, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 7, June 2007 under normal use and maintenance.



Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	June 2, 2010	Initial Issue.
1	July 23, 2010	Revised to include 23 dBi antenna information.
2	February 3, 2011	Revised to reflect engineer corrections.
3	February 22, 2011	Updated Type of Modulation section.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	6
	E. Equipment Configuration.....	8
	F. Support Equipment	8
	G. Ports and Cabling Information.....	8
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation	8
	J. Modifications	9
	a) Modifications to EUT.....	9
	b) Modifications to Test Standard.....	9
	K. Disposition of EUT.....	9
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	10
	§ 15.107(a) Conducted Emissions Limits.....	11
	§ 15.109(a) Radiated Emissions Limits.....	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	19
	§ 15.203 Antenna Requirement	19
	§ 15.207(a) Conducted Emissions Limits.....	21
	§ 15.247(a) 6 dB and 99% Bandwidth.....	24
	§ 15.247(b) Peak Power Output and RF Exposure	32
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge	36
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	60
	RSS-GEN Receiver Spurious Emissions.....	70
	§ 15.247(e) Peak Power Spectral Density	72
V.	Test Equipment	77
VI.	Certification & User's Manual Information.....	80
	A. Certification Information	81
	B. Label and User's Manual Information	85
VII.	ICES-003 Procedural & Labeling Requirements.....	87

List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	8
Table 5. Support Equipment.....	8
Table 6. Ports and Cabling Information	8
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	11
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	12
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	12
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 11. Radiated Emissions Limits, Test Results, FCC Limits, 30 MHz – 1 GHz.....	16
Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits	17
Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	21
Table 14. Conducted Emissions, 15.207, Test Results, Phase Line	22
Table 15. Conducted Emissions, 15.207, Test Results, Neutral Line.....	22
Table 16. Occupied Bandwidth, Test Results, 802.11a, 20 MHz.....	24
Table 17. Output Power Requirements from §15.247	32
Table 18. Peak Output Power, Test Results, 802.11b, 2.4 GHz	33
Table 19. Peak Output Power, Test Results, 802.11g, 2.4 GHz	33
Table 20. Peak Output Power, Test Results, 802.11a.....	33
Table 21. Restricted Bands of Operation.....	36
Table 22. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	37
Table 23. Harmonic Emissions, Radiated (802.11b – Panel Antenna).....	38
Table 24. Harmonic Emissions, Radiated (802.11g – Panel Antenna), 2.4 GHz	41
Table 25. Harmonic Emissions, Radiated (802.11b – 8dBi Omni Antenna), 2.4 GHz	44
Table 26. Harmonic Emissions, Radiated (802.11g – 8dBi Omni Antenna), Test Results, 2.4 GHz.....	47
Table 27. Radiated Harmonic Emissions, Low Channel (10dBi Omni 5GHz)	50
Table 28. Radiated Harmonic Emissions, Mid Channel (10dBi Omni 5GHz).....	50
Table 29. Radiated Harmonic Emissions, High Channel (10dBi Omni 5GHz)	50
Table 30. Radiated Harmonic Emissions, Low Channel, 23 dBi Panel	51
Table 31. Radiated Harmonic Emissions, Mid Channel, 23 dBi Panel	51
Table 32. Radiated Harmonic Emissions, High Channel, 23 dBi Panel.....	51
Table 33. Spurious Emission Limits for Receivers	70
Table 34. Peak Power Spectral Density, Test Results, 2.4 GHz.....	72
Table 35. Peak Power Spectral Density, Test Results, 802.11a	72
Table 36. Test Equipment List, Santa Clara Test Site.....	78
Table 37. Test Equipment List, Union City Test Site.....	79

List of Figures

Figure 1. Block Diagram of Test Configuration.....	7
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	25
Figure 3. Block Diagram, Peak Power Output Test Setup	32
Figure 4. Block Diagram, Conducted Receiver Spurious Emissions Test Setup	70

List of Photographs

Photograph 1. Firetide, Inc., 4200 Outdoor Unit and FWB-105	6
Photograph 2. Conducted Emissions, Test Setup	14
Photograph 3. Radiated Emission, Test Setup, 30 MHz – 1 GHz	18
Photograph 4. Test Equipment and Setup for Various Radiated Measurements	54
Photograph 5. Radiated Emissions, 1 GHz – 18 GHz @ 1m, 23 dBi Panel	55
Photograph 6. Radiated Emissions, 23 dBi Panel, Test Setup.....	56
Photograph 7. Radiated Emissions, 23 dBi Panel, Rear View, Test Setup.....	57
Photograph 8. Radiated Emissions, 30 MHz – 1 GHz	58
Photograph 9. Radiated Emissions, 1 GHz – 18 GHz @ 3m, 23 dBi Panel	59

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Firetide, Inc. 4200 Outdoor Unit and FWB-105, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the 4200 Outdoor Unit and FWB-105. Firetide, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the 4200 Outdoor Unit and FWB-105, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Firetide, Inc., purchase order number 2475. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	IC Reference	Description	Compliance
47 CFR Part 15.247:2005	RSS-210 Issue 7: 2007	Applicable Standard	Compliant
47 CFR Part 15.107 (a)	RSS-210 Issue 7: 2007	Conducted Emission Limits for a Class A Digital Device	Compliant
47 CFR Part 15.109 (a)	RSS-210 Issue 7: 2007	Radiated Emission Limits for a Class A Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Voltage	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	RF Output Power	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Radiated Spurious Emissions	Compliant
Title 47 of the CFR, Part 15 §15.205	RSS-210(A8.5)	Emissions at Restricted Band	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Conducted Spurious Emissions	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.3)	Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.5)	Maximum Permissible Exposure	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Firetide, Inc. to perform testing on the 4200 Outdoor Unit and FWB-105, under Firetide, Inc.'s purchase order number 2532.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Firetide, Inc., 4200 Outdoor Unit and FWB-105.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	4200 Outdoor Unit and FWB-105	
Model(s) Covered:	4200 Outdoor Unit and FWB-105	
EUT Specifications:	Primary Power: 115 VAC	
	FCC ID: REP-4200 IC: 4988A-4200	
	Type of Modulations:	OFDM DSSS
	Equipment Code:	DTS
	Peak RF Output Power:	26.53dBm (2.4GHz); 29.57dBm (5GHz)
	EUT Frequency Ranges:	2412-2462MHz; 5745-5825MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Minh Ly	
Report Date(s):	February 22, 2011	

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210, Issue 7, June 2007	Low-power License-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 5 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Firetide, Inc. 4200 Outdoor Unit and FWB-105, Equipment Under Test (EUT), is an Outdoor Wireless Access Point (802.11 a/g modes) with diversity (I.E Two antenna ports).



Photograph 1. Firetide, Inc., 4200 Outdoor Unit and FWB-105

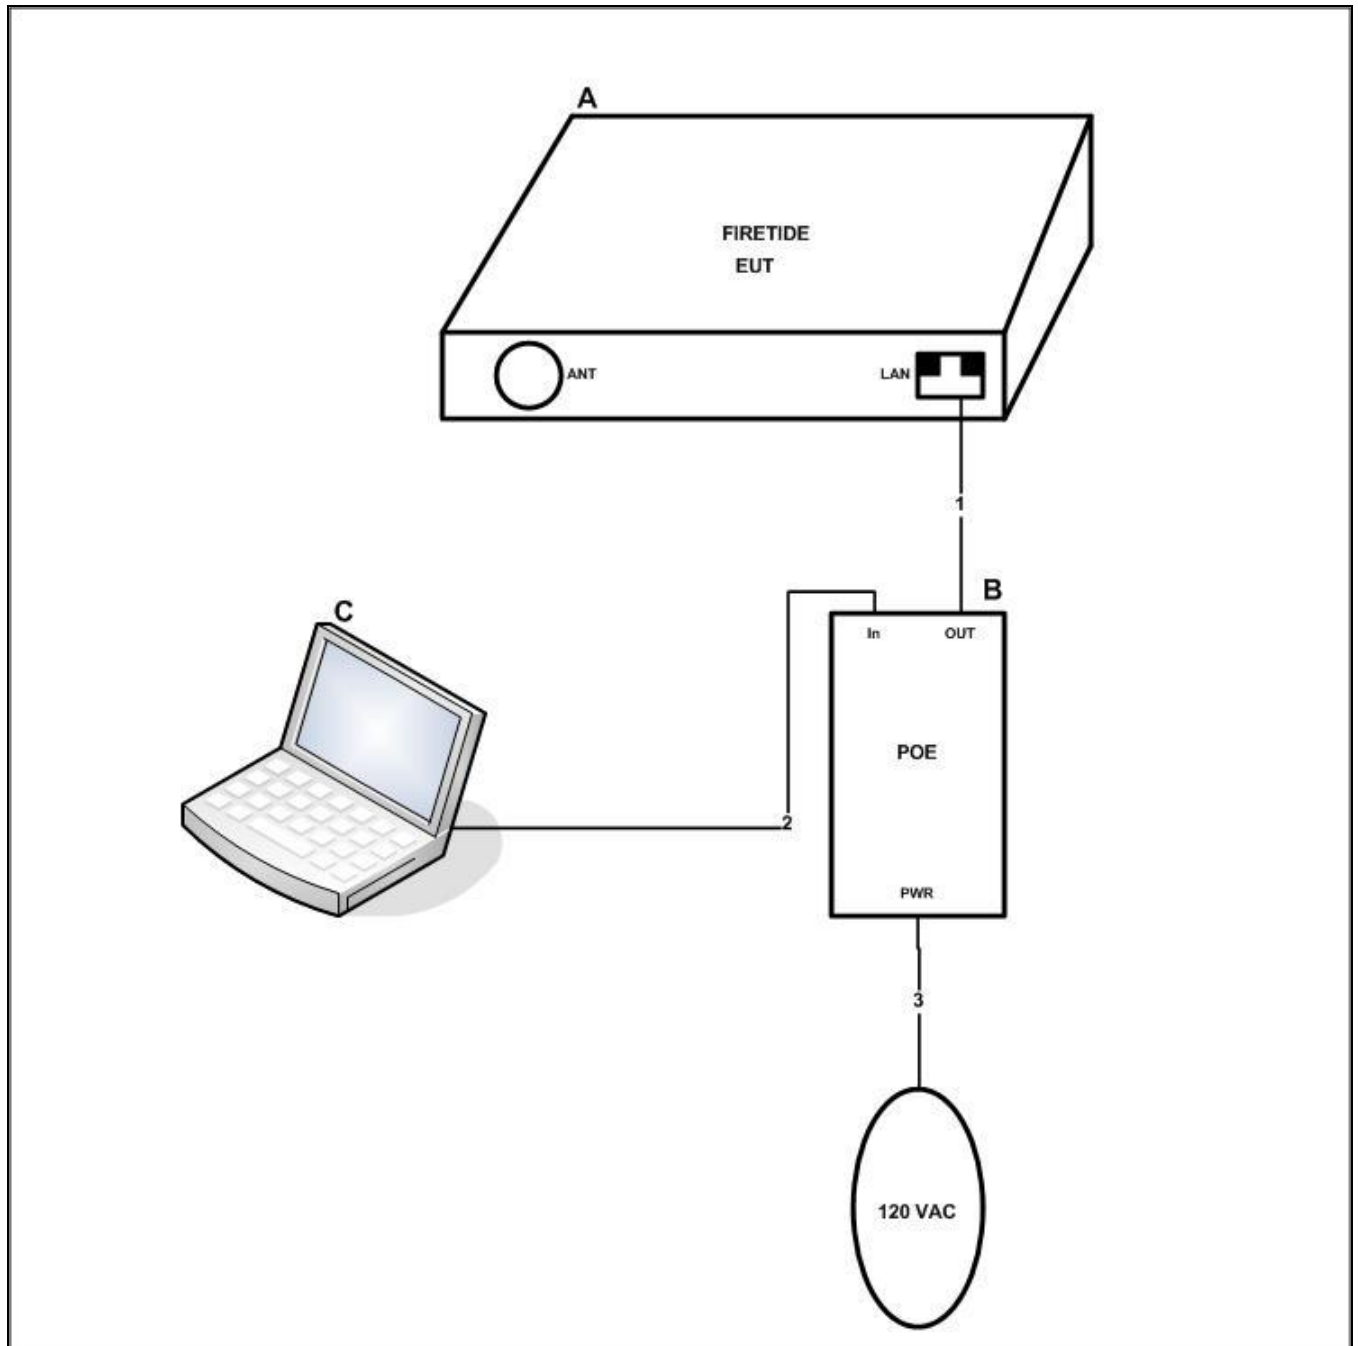


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	Hot Client 4200 AP	4200	M03240806000187
B	POE P/S (PHIHONG)	PSA16U-480 (POE)	P72821496A1
N/A	5.15-5.875GHz Dipole	MA—W055-10	122
N/A	5.1-5.8 GHz Panel	200-0053-001	21253

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
C	Laptop	DELL	D500	CN-044212-48643

Table 5. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port ID
1	Ethernet	POE P/S	1	7	No	B
2	Ethernet	RJ45	1	50	No	C

Table 6. Ports and Cabling Information

H. Mode of Operation

EUT is controlled via a laptop computer. EUT has atheros ART firmware loaded.

I. Method of Monitoring EUT Operation

IP Connectivity. EUT has a fixed IP address of 192.168.1.20.

J. Modifications

a) Modifications to EUT

Added 0.47 uF at C29 to fix 30M to 300MHz range. Added 33 pF at C9 and C18 to fix 500M and 541MHz.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Firetide, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a), Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.
 Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.
 * -- Limits per Subsection 15.207(a).

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Caroline Reynolds

Test Date(s): 01/07/08

Conducted Emissions - Voltage, AC Power, (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.195	49.23	63.827	Pass	-14.597	35.4	53.827	Pass	-18.427
7.92	42.13	60	Pass	-17.87	38.11	50	Pass	-11.89
8.71	44.69	60	Pass	-15.31	41.76	50	Pass	-8.24
12.8	46.2	60	Pass	-13.8	42.3	50	Pass	-7.7
14.03	48.22	60	Pass	-11.78	44.98	50	Pass	-5.02
14.15	48.05	60	Pass	-11.95	44.81	50	Pass	-5.19

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
7.99	36.53	60	Pass	-23.47	36.95	50	Pass	-13.05
8.71	46.1	60	Pass	-13.9	41.52	50	Pass	-8.48
11.89	45.91	60	Pass	-14.09	43.59	50	Pass	-6.41
12.8	46	60	Pass	-14	42.27	50	Pass	-7.73
14.03	48.35	60	Pass	-11.65	45.15	50	Pass	-4.85
14.15	48.18	60	Pass	-11.82	44.71	50	Pass	-5.29

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

NOTE: Added 0.45uF capacitor to DC/DC converter to pass 10 to 20MHz range.

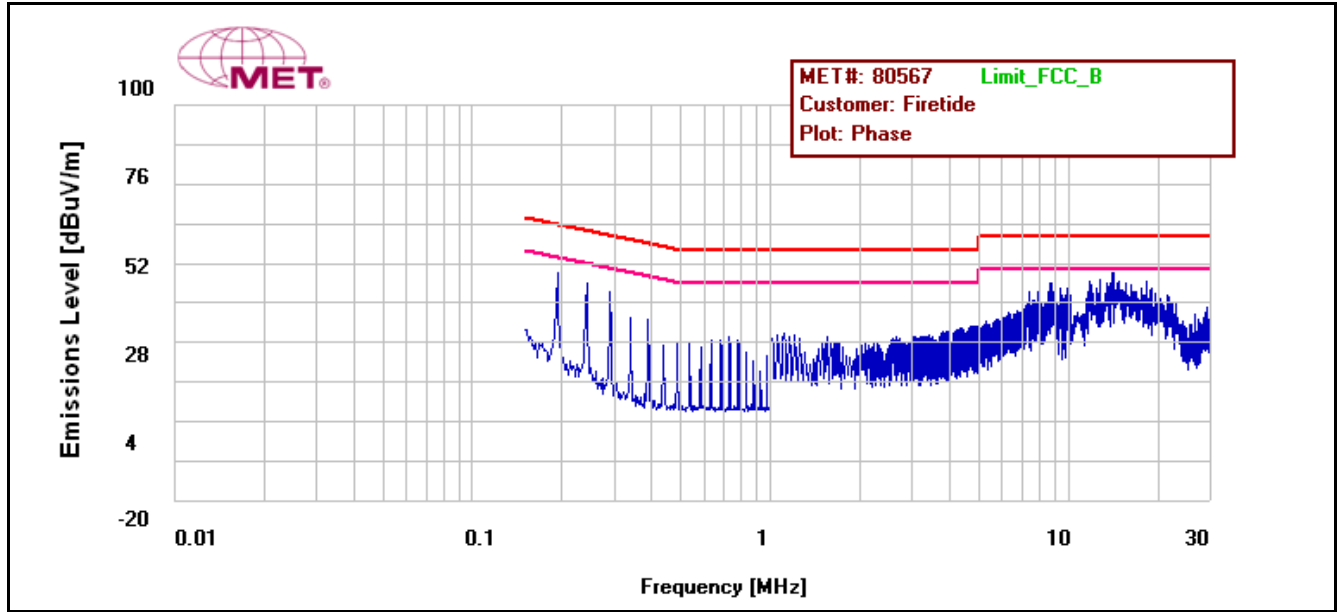

Plot 1. Conducted Emission, Phase Line Plot

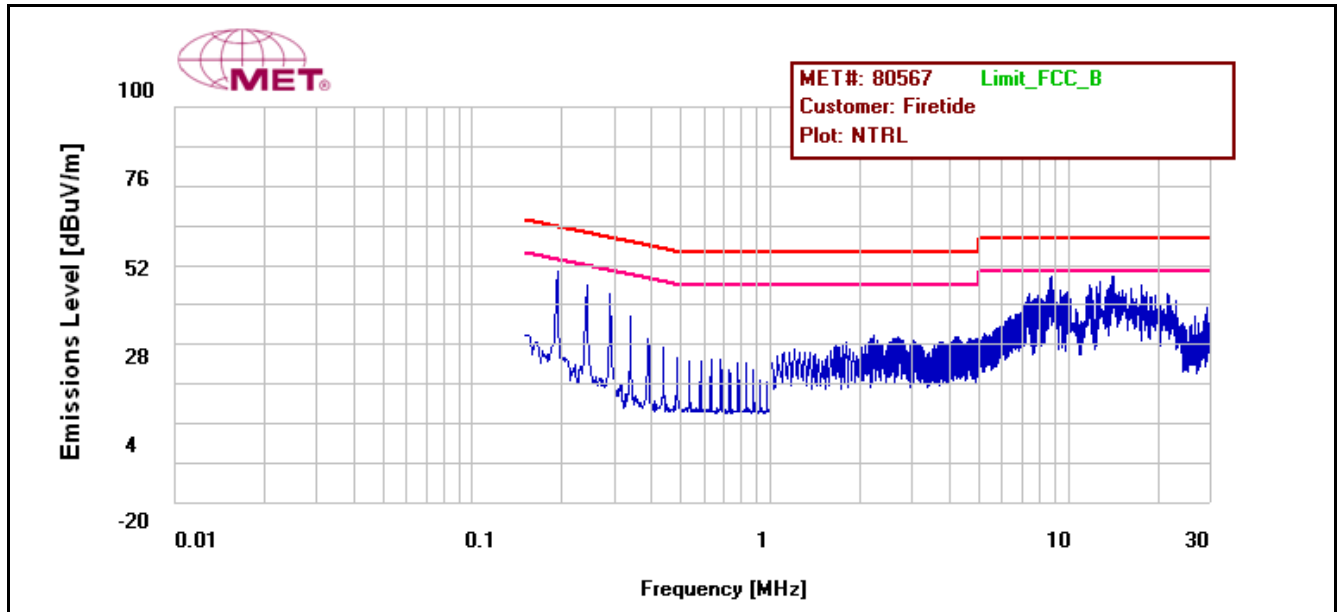

Plot 2. Conducted Emission, Neutral Line Plot

Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions, Test Setup

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Caroline Reynolds

Test Date(s): 01/07/08

Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	CBL (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
37.36	V	0	99	11.059	12.22	0.466	23.745	40	-16.255
43.806	V	309	105	25.794	9.839	0.44	36.073	40	-3.927
60.216	V	150	100	26.35	6.47	0.49	33.31	40	-6.69
69.7	V	291	119	27.65	5.26	0.49	33.4	40	-6.6
179.96	V	186	100	26.13	10.101	0.55	36.781	43.5	-6.719
179.98	H	333	205	28	9.798	0.55	38.348	43.5	-5.152
186.747	V	15	284	29.14	10.235	0.611	39.986	43.5	-3.514

Table 11. Radiated Emissions Limits, Test Results, FCC Limits, 30 MHz – 1 GHz

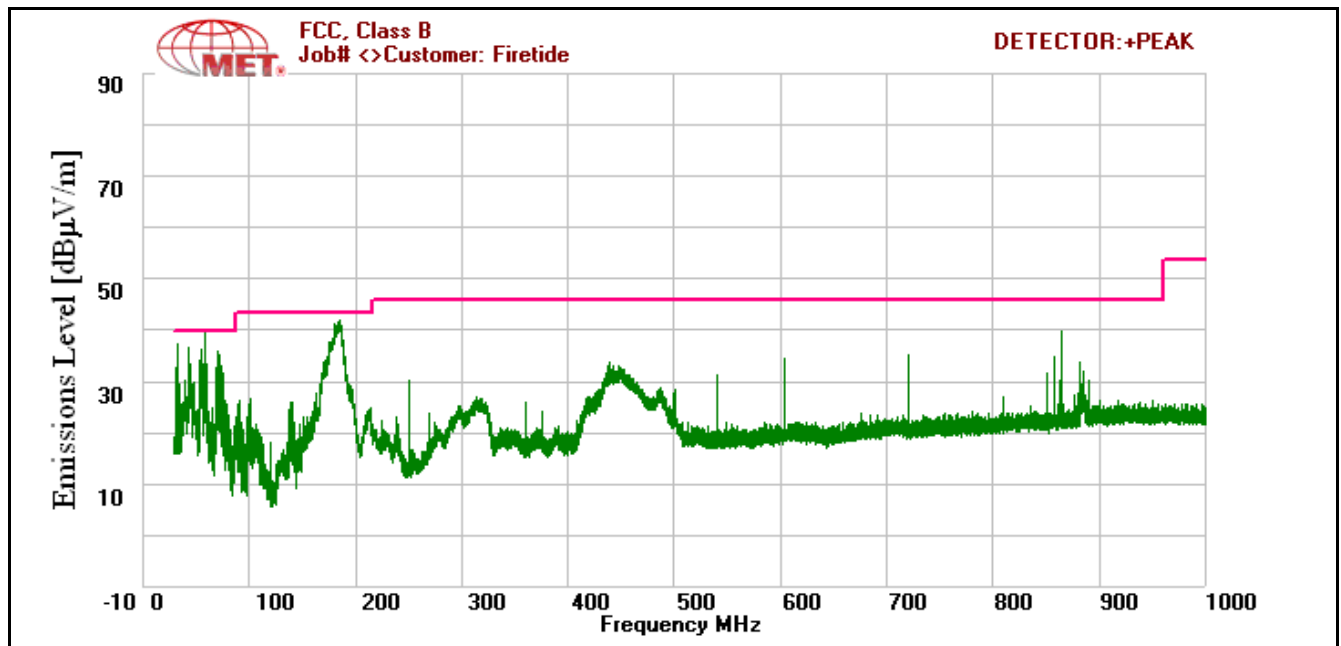


Plot 3. Radiated Emissions, FCC Limits, 30 MHz – 1 GHz

Radiated Emissions Limits Test Results, Class B


Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
37.36	V	0	99	11.059	12.22	0	0.466	-10.46	13.285	30	-16.715
43.806	V	309	105	25.794	9.839	0	0.44	-10.46	25.613	30	-4.387
60.216	V	150	100	26.35	6.47	0	0.49	-10.46	22.85	30	-7.15
69.7	V	291	119	27.65	5.26	0	0.49	-10.46	22.94	30	-7.06
179.96	V	186	100	26.13	10.101	0	0.55	-10.46	26.321	30	-3.679
179.98	H	333	205	28	9.798	0	0.55	-10.46	27.888	30	-2.112
186.747	V	15	284	29.14	10.235	0	0.611	-10.46	29.526	30	-0.474

Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits

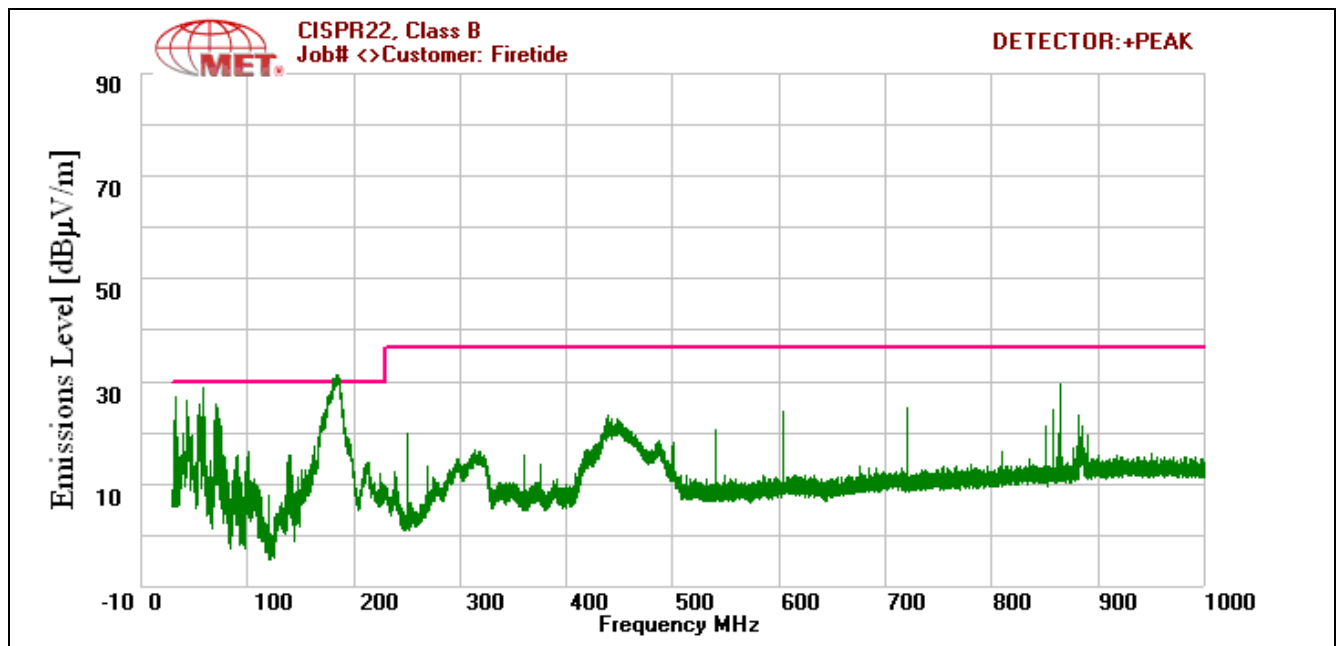

Plot 4. Radiated Emissions, ICES-003 Limits

Radiated Emission Limits Test Setup

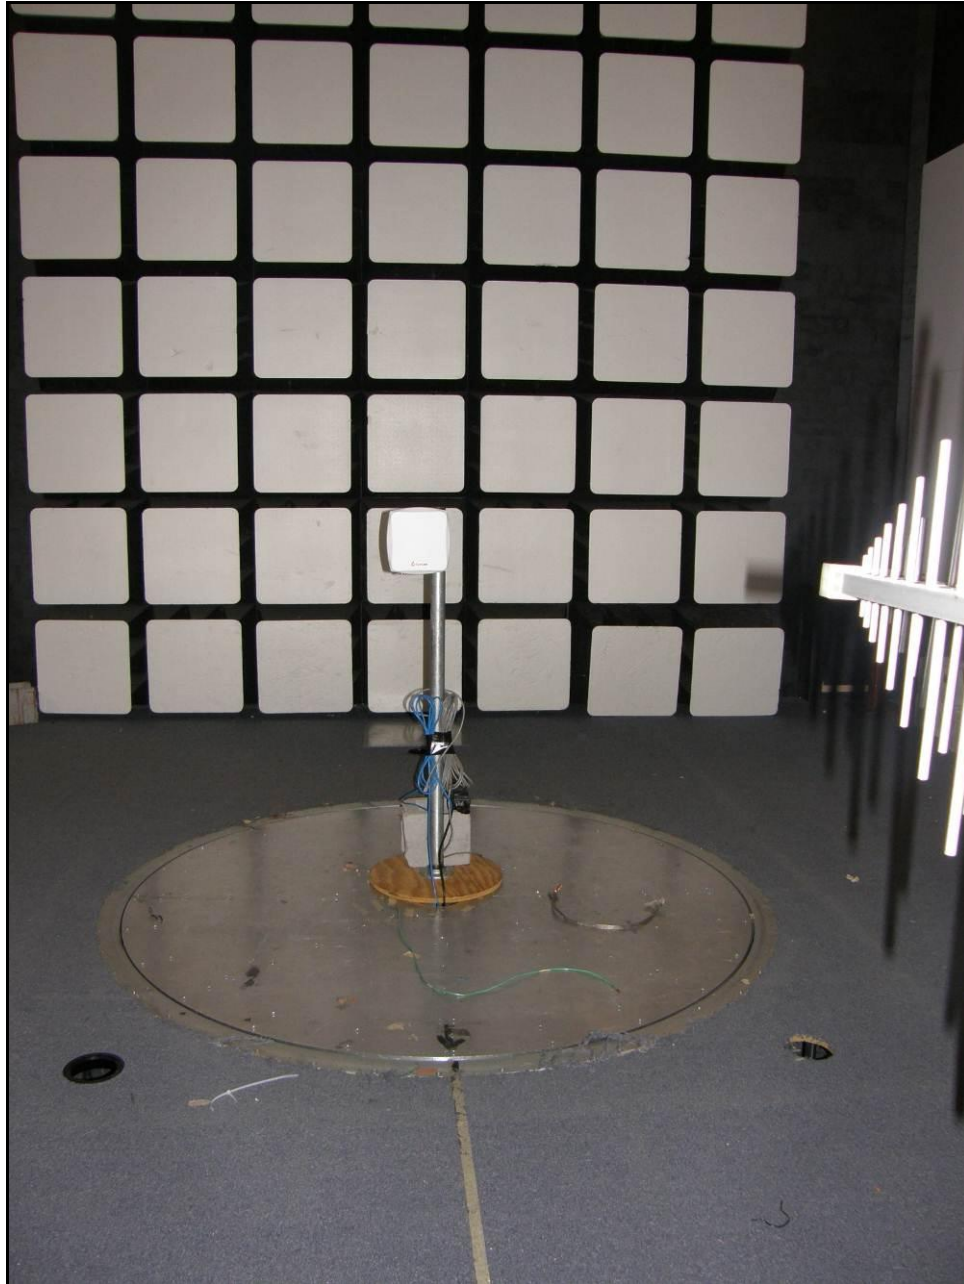

Photograph 3. Radiated Emission, Test Setup, 30 MHz – 1 GHz

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The unit will be professionally installed.

Test Engineer(s): Minh Ly

Test Date(s): 11/02/09 and 07/14/10

Gain/Type	Manufacturer
5dBi Omni (2.4GHz)	Wha Yu
8dBi Omni (2.4GHz)	MaxRad
8dBi/Panel (2.4GHz)	HyperlinkTechnologies
11dBi/Panel(2.4GHz)	Wha Yu
13dBi/Panel (2.4GHz)	Wha Yu
5dBi Omni (5GHz)	Wha Yu
10dBi Omni (5GHz)	MARS
23 dBi Panel (5GHz)	Firetide

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on.

Test Results: The EUT was compliant with this requirement. Measured emissions were below applicable limits.

Test Engineer(s): Caroline Reynolds

Test Date(s): 03/19/08

Conducted Emissions - Voltage, AC Power, (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.2	47.66	63.617	Pass	-15.957	36.84	53.617	Pass	-16.777
0.249	42.14	61.802	Pass	-19.662	33.65	51.802	Pass	-18.152
1.17	31.43	56	Pass	-24.57	28.94	46	Pass	-17.06

Table 14. Conducted Emissions, 15.207, Test Results, Phase Line


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.2	47.62	63.617	Pass	-15.997	35.19	53.617	Pass	-18.427
0.249	41.74	61.802	Pass	-20.062	29.79	51.802	Pass	-22.012
8.489	36.05	60	Pass	-23.95	34.71	50	Pass	-15.29

Table 15. Conducted Emissions, 15.207, Test Results, Neutral Line

NOTE: Added 0.45uF capacitor to DC/DC converter to pass 10 to 20MHz range.

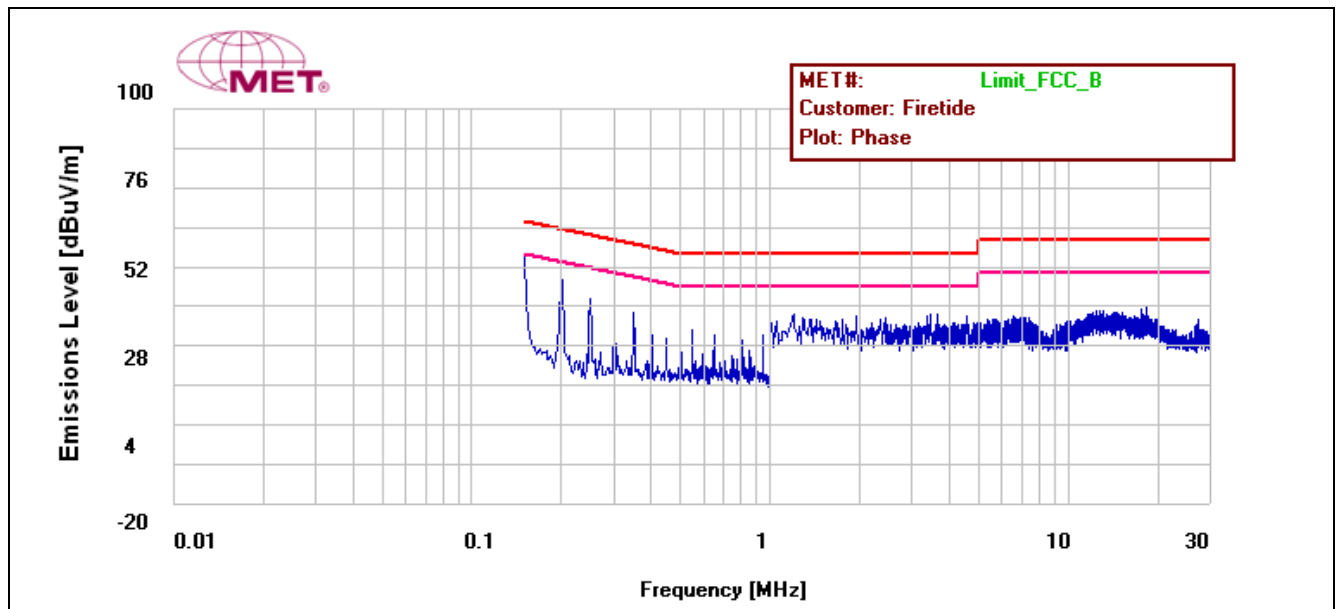

Plot 5. Conducted Emissions, Phase Line

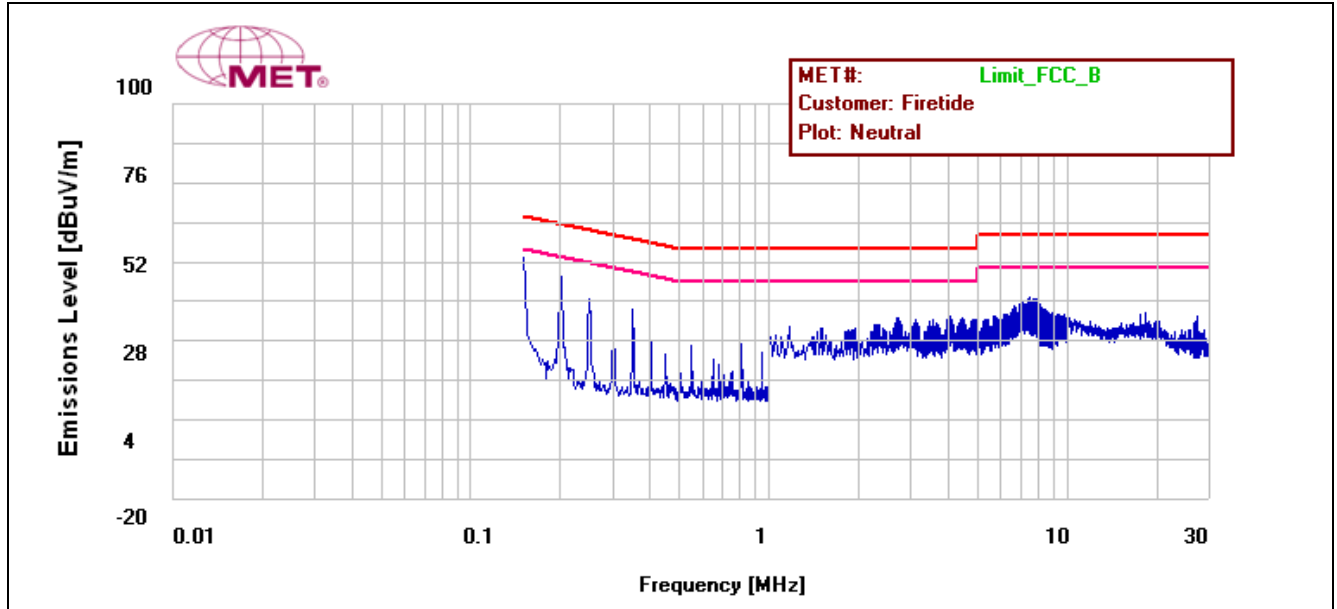

Plot 6. Conducted Emissions, Neutral Line

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a).

The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

802.11b mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	12.17	16.17
Mid	2437	12.42	16.83
High	2462	12.83	15.92

802.11g mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	16.75	17.50
Mid	2437	16.92	18.92
High	2462	16.83	17.62

802.11a mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	5745	16.53	16.61
Mid	5785	16.59	16.71
High	5825	16.47	16.61

Table 16. Occupied Bandwidth, Test Results, 802.11a, 20 MHz

Test Engineer(s): Shawn McMillen

Test Date(s): February 20, 2007 & November 02, 2009







Figure 2. Block Diagram, Occupied Bandwidth Test Setup

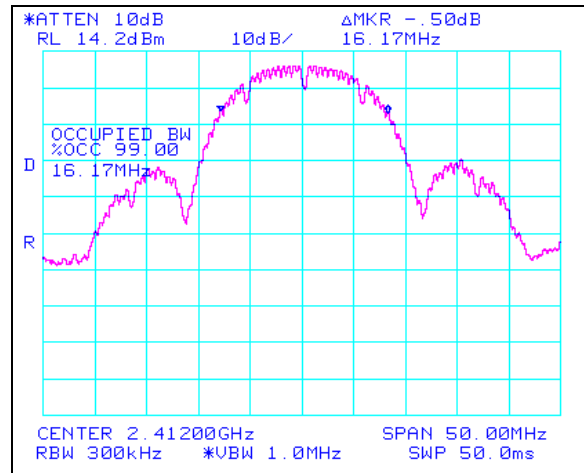


Plot 7. 802.11/b Low Ch Occupied Band Width 99%, 2.4 GHz

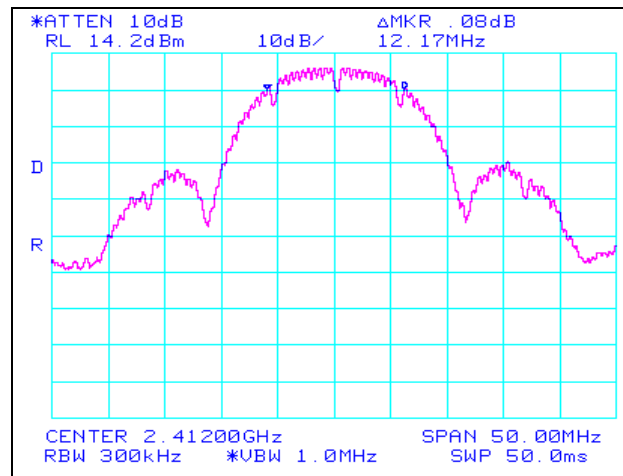


Plot 8. 802.11/b Low Ch Occupied Band Width, , 2.4 GHz

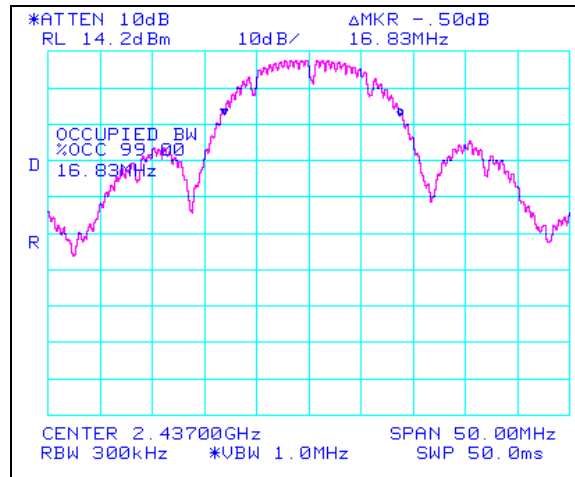


Plot 9. 802.11/b Mid Ch Occupied Band Width 99%, 2.4 GHz

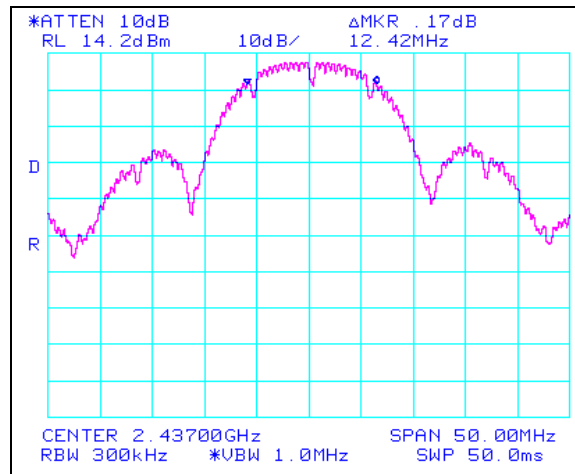


Plot 10. 802.11/b Mid Ch Occupied Band Width, 2.4 GHz

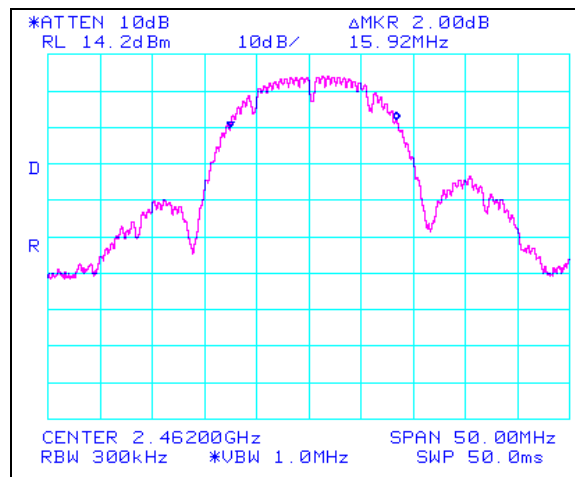


Plot 11. 802.11/b High Ch Occupied Band Width 99%, 2.4 GHz

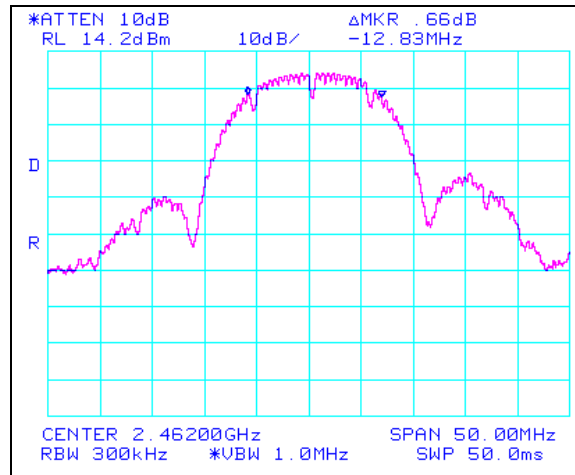


Plot 12. 802.11/b High Ch Occupied Band Width, 2.4 GHz

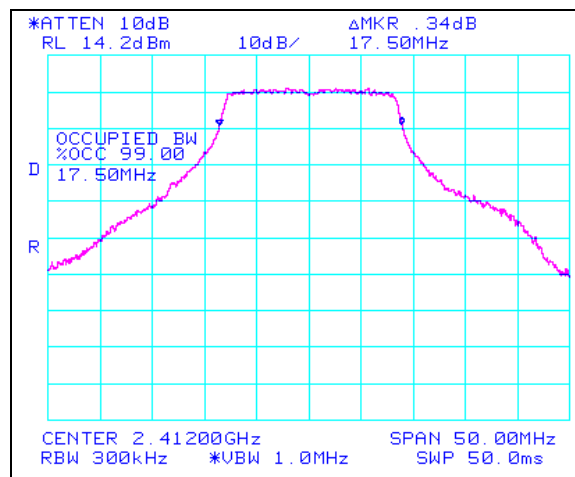


Plot 13. 802.11/g Low Ch Occupied Band Width 99%, 2.4 GHz

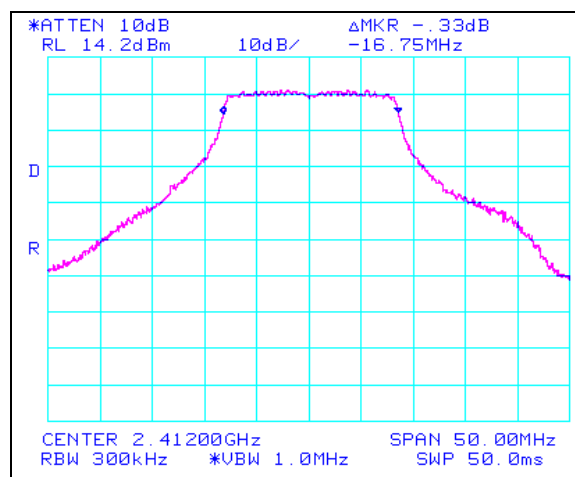


Plot 14. 802.11/g Low Ch Occupied Band Width, 2.4 GHz

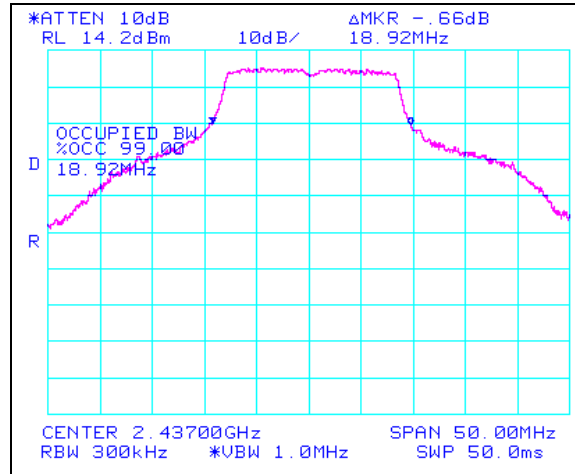


Plot 15. 802.11/g Mid Ch Occupied Band Width 99%, 2.4 GHz

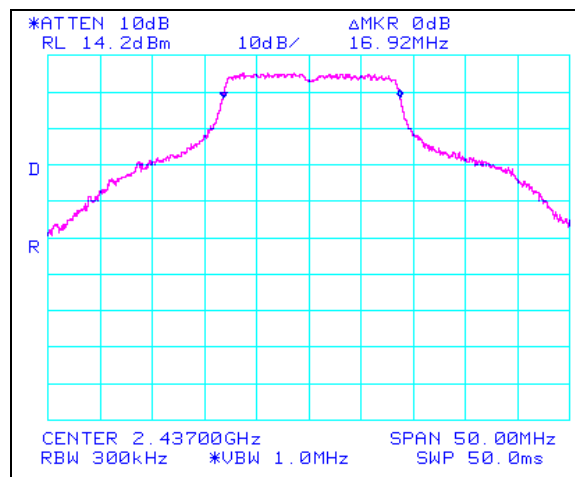

Plot 16. 802.11/g Mid Ch Occupied Band Width, 2.4 GHz

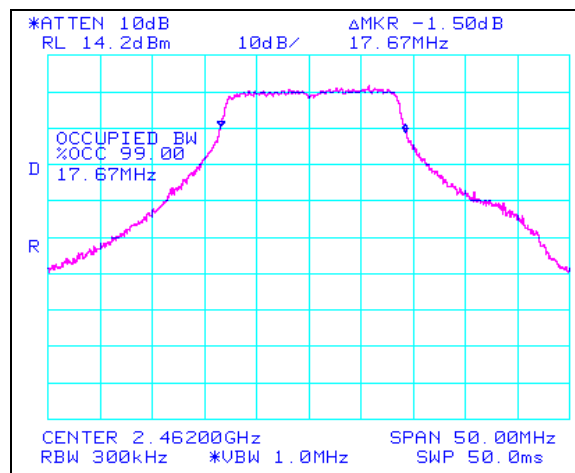


Plot 17. 802.11/g High Ch Occupied Band Width 99%, 2.4 GHz

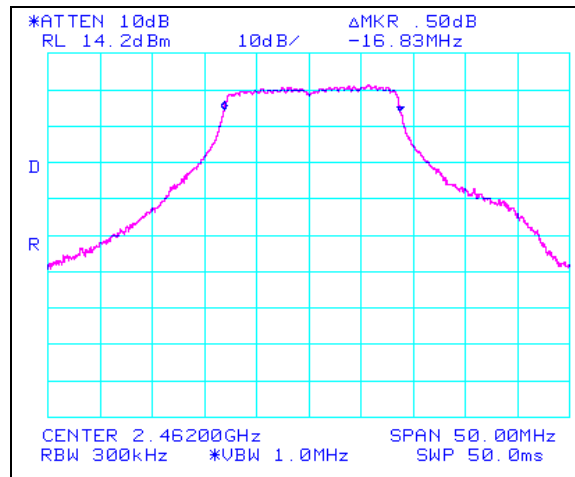


Plot 18. 802.11/g High Ch Occupied Band Width, 2.4 GHz


Occupied Bandwidth, 20 MHz, 802.11a

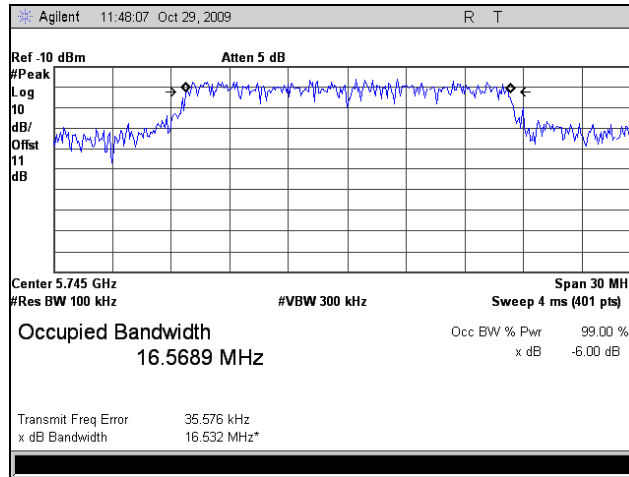


Plot 19. Occupied Band Width, Low Channel, 802.11a, 20 MHz, FCC Limits

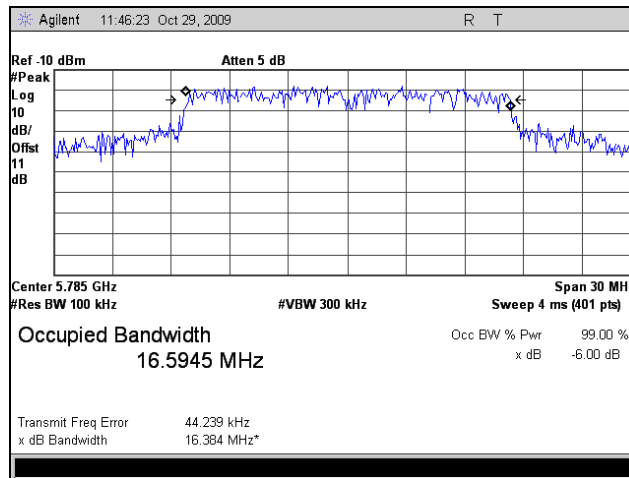


Plot 20. Occupied Band Width, Mid Channel, 802.11a, 20 MHz, FCC Limits

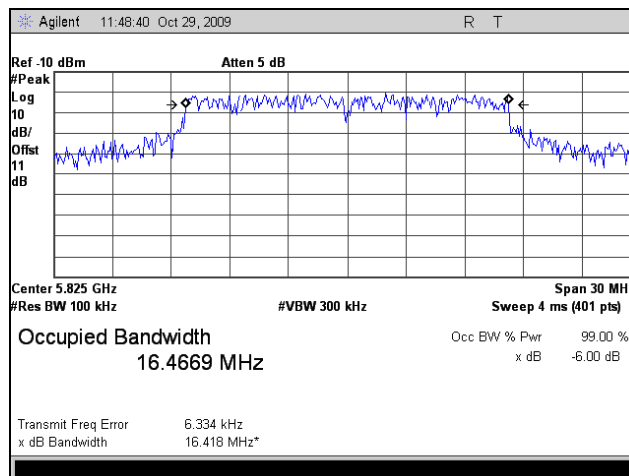


Plot 21. Occupied Band Width, High Channel, 802.11a, 20 MHz, FCC Limits

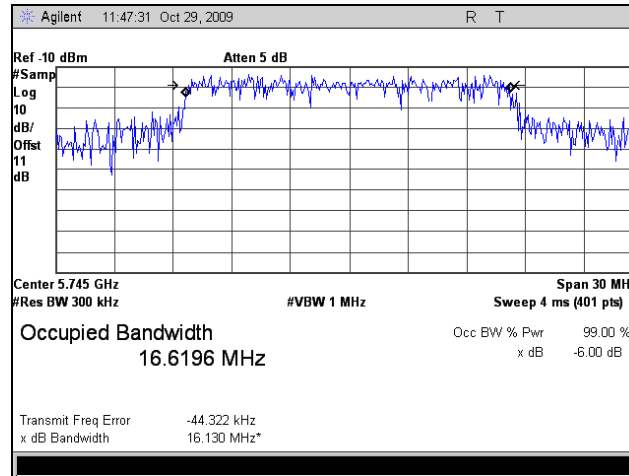

Plot 22. Occupied Band Width, Low Channel, 802.11a, 20 MHz, IC Limits

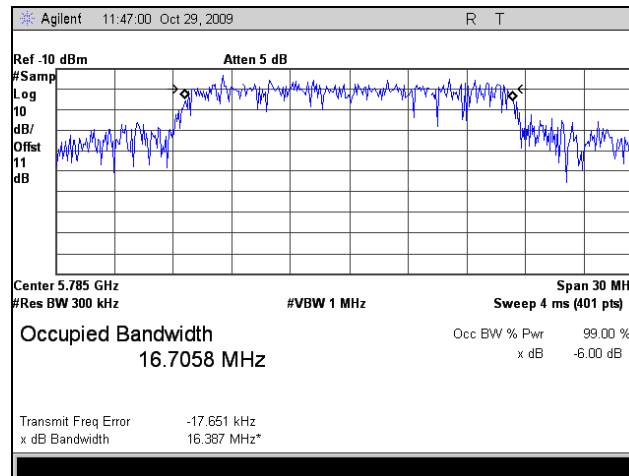

Plot 23. Occupied Band Width, Mid Channel, 802.11a, 20 MHz, IC Limits

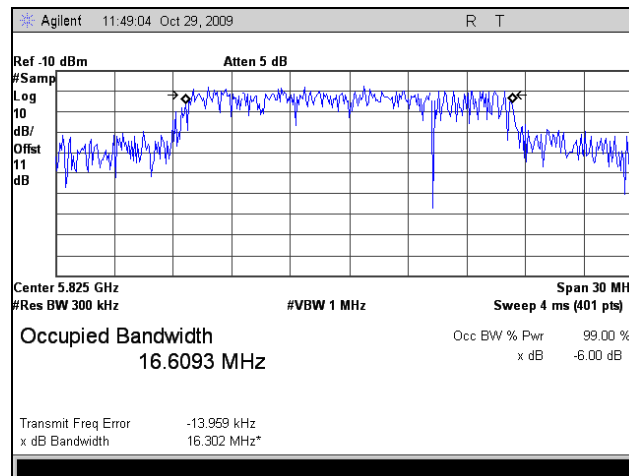

Plot 24. Occupied Band Width, High Channel, 802.11a, 20 MHz, IC Limits

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 17. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 17, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level.

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b).

Test Engineer(s): Anderson Soungpanya

Test Date(s): 07/14/10




Figure 3. Block Diagram, Peak Power Output Test Setup

802.11b		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	21.54
Mid	2437	24.93
High	2462	19.62

Table 18. Peak Output Power, Test Results, 802.11b, 2.4 GHz


802.11g		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	22.1
Mid	2437	25.34
High	2462	20.6

Table 19. Peak Output Power, Test Results, 802.11g, 2.4 GHz


802.11a		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	5745	25.52
Mid	5785	29.57
High	5825	28.40

Table 20. Peak Output Power, Test Results, 802.11a


Peak Power Output, 802.11a, 20 MHz

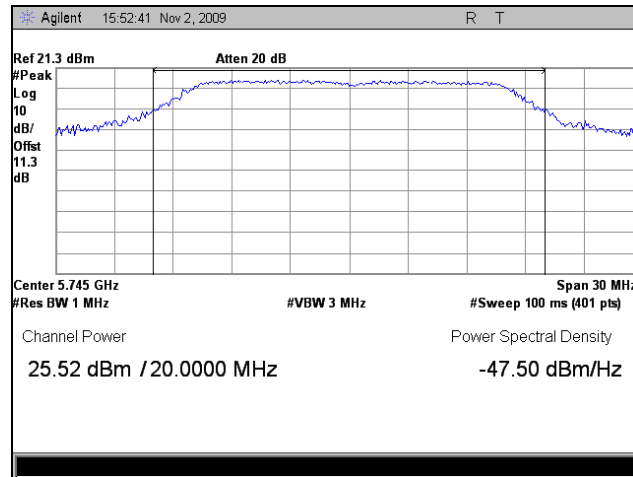

Plot 25. Peak Output Power, Low Channel

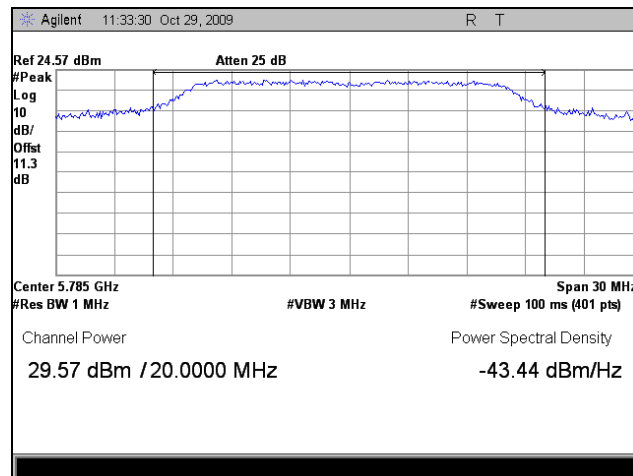

Plot 26. Peak Output Power, Mid Channel

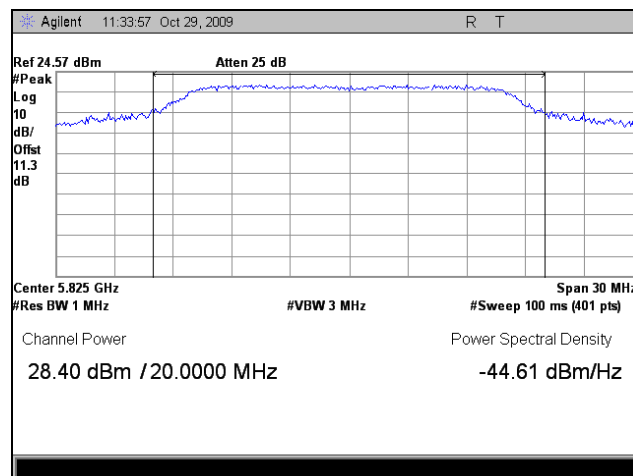

Plot 27. Peak Output Power, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2400 – 2483.5MHz; highest conducted power = 21.34 dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **13dBi Panel**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (905.73mW)
G = Antenna Gain (10 numeric)

$$S = (136.14 * 19.96 / 4 * 3.14 * 20.0^2) = (2716.44 / 5024) = \mathbf{0.540mW/cm^2 @ 20cm separation}$$

MPE Limit Calculation: EUT's operating frequencies @ 5745-5825MHz; highest conducted power = 29.57dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **23dBi Panel**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (905.73mW)
G = Antenna Gain (199.53 numeric)

$$R = \sqrt{(905.73 * 10 / 4 * 3.14 * 1)} = \sqrt{(180717.4 / 12.56)} = 119.95 \text{ cm}$$

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 21. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 22.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 22. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The transmitter was set to the mid channel at the highest output power and placed on a 0.8 m high wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast with 1 m to 4 m height to determine worst case orientation for maximum emissions. Measurement were repeated the measurement at the low and highest channels.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

EUT Field Strength Final Amplitude = Raw Amplitude – Preamp gain + Antenna Factor + Cable Loss

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

Test Engineer(s): Minh Ly

Test Date(s): 11/02/09 and 07/14/10


Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b – Panel Antenna)


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB μ V)@ 3m	Preamplifier (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB μ V)	Limit @ 3m (dB μ V)	Margin (dB)	Measurement Type
4824	V	44.35	35.1	33.5	5.2	48.0	74	-26.1	pk
4824	V	32.62	35.1	33.5	5.2	36.2	54	-17.8	avg
7236	V	43.93	35.1	37.0	6.5	52.3	74	-21.7	pk
7236	V	32.75	35.1	37.0	6.5	41.2	54	-12.9	avg
9648	V	43.95	35.6	38.5	7.8	54.7	74	-19.4	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB μ V)@ 3m	Preamplifier (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB μ V)	Limit @ 3m (dB μ V)	Margin (dB)	Measurement Type
4874	V	44.1	35.1	33.5	5.2	47.7	74	-26.3	pk
4874	V	32.03	35.1	33.5	5.2	35.6	54	-18.4	avg
7311	V	43.54	35.1	37.0	6.5	51.9	74	-22.1	pk
7311	V	32.09	35.1	37.0	6.5	40.5	54	-13.5	avg
9748	V	44.46	35.6	38.5	7.8	55.2	74	-18.8	pk
Mid Channel 2437MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB μ V)@ 3m	Preamplifier (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB μ V)	Limit @ 3m (dB μ V)	Margin (dB)	Measurement Type
4924	V	43.6	35.1	33.5	5.2	47.2	74	-26.8	pk
4924	V	31.9	35.1	33.5	5.2	35.5	54	-18.5	avg
7386	V	42.96	35.1	37.0	6.5	51.4	74	-22.6	pk
7386	V	32.6	35.1	37.0	6.5	41.0	54	-13.0	avg
9848	V	43.43	35.6	38.5	7.8	54.1	74	-19.9	pk
High Channel 2462MHz									

Table 23. Harmonic Emissions, Radiated (802.11b – Panel Antenna)


Note: All other emissions were measured at the noise floor of the spectrum analyzer

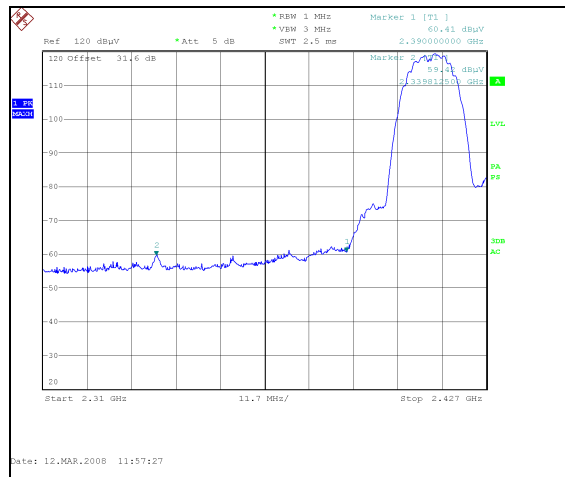


Plot 28. 802.11/b radiated restricted band 2310- 2390 MHz Peak, 2.4 GHz

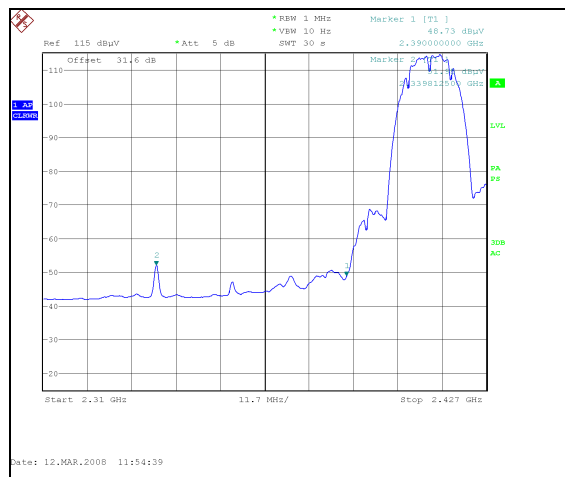

Plot 29. 802.11/b radiated restricted band 2310- 2390 MHz Avg., 2.4 GHz

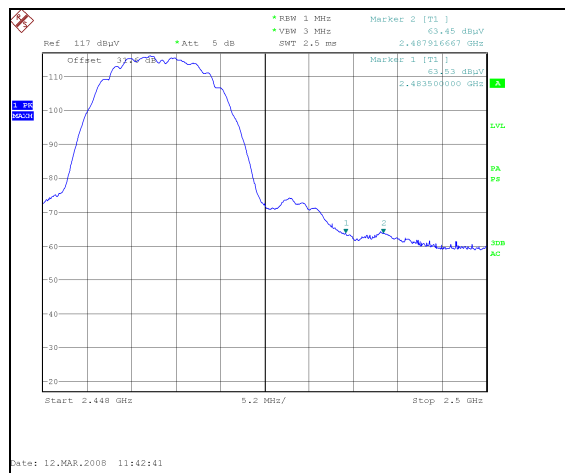

Plot 30. 802.11/b radiated restricted band 2483.5 – 2500MHz Peak, 2.4 GHz

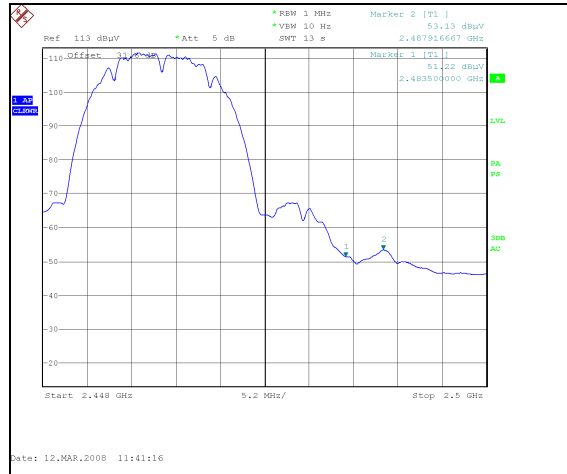


Plot 31. 802.11/b radiated restricted band 2483.5 – 2500MHz Avg., 2.4 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g – Panel Antenna)

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4824	V	44.72	35.1	33.5	5.2	48.3	74	-25.7	pk
4824	V	39.74	35.1	33.5	5.2	43.3	54	-10.7	avg
7236	V	43.42	35.1	37.0	6.5	51.8	74	-22.2	pk
7236	V	32.68	35.1	37.0	6.5	41.1	54	-12.9	avg
9648	V	44.05	35.6	38.5	7.8	54.8	74	-19.3	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4874	V	43.78	35.1	33.5	5.2	47.4	74	-26.6	pk
4874	V	32.23	35.1	33.5	5.2	35.8	54	-18.2	avg
7311	V	43.76	35.1	37.0	6.5	52.2	74	-21.8	pk
7311	V	32.27	35.1	37.0	6.5	40.7	54	-13.3	avg
9748	V	44.65	35.6	38.5	7.8	55.4	74	-18.7	pk
Mid Channel 2437MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4924	V	44.54	35.1	33.5	5.2	48.1	74	-25.9	pk
4924	V	32.06	35.1	33.5	5.2	35.7	54	-18.3	avg
7386	V	43.73	35.1	37.0	6.5	52.1	74	-21.9	pk
7386	V	32.65	35.1	37.0	6.5	41.1	54	-13.0	avg
9848	V	43.86	35.6	38.5	7.8	54.6	74	-19.4	pk
High Channel 2462MHz									


Table 24. Harmonic Emissions, Radiated (802.11g – Panel Antenna), 2.4 GHz

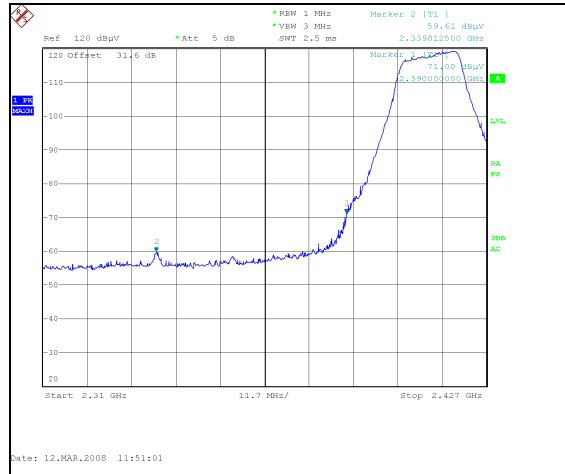


Plot 32. 802.11/g radiated restricted band 2310- 2390 MHz Peak, 2.4 GHz

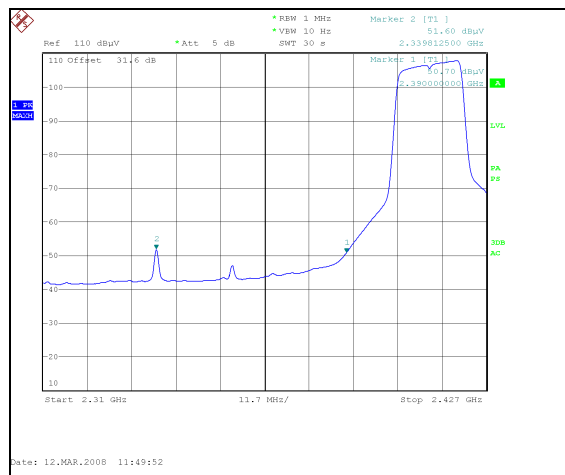

Plot 33. 802.11/g radiated restricted band 2310- 2390 MHz Avg., 2.4 GHz

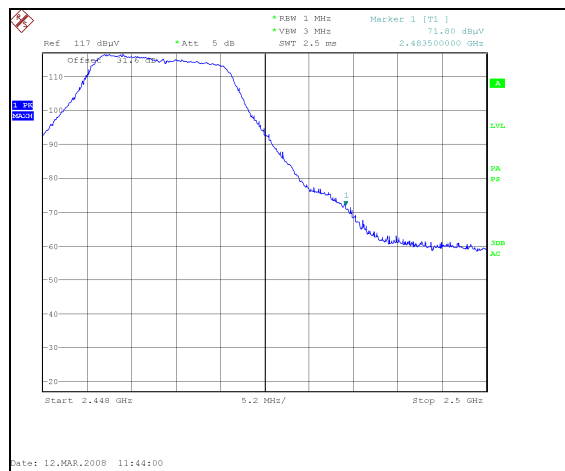

Plot 34. 802.11/g radiated restricted band 2483.5 – 2500MHz Peak, 2.4 GHz

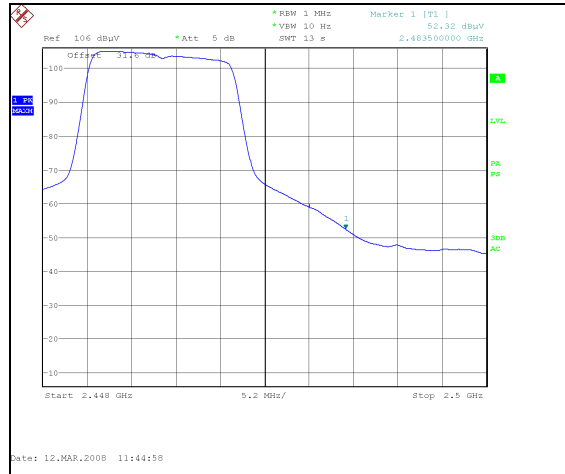

Plot 35. 802.11/g radiated restricted band 2483.5 – 2500MHz Avg., 2.4 GHz


Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b – 8dBi Omni Antenna)


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4824	V	44.14	35.1	33.5	5.2	47.7	74	-26.3	pk
4824	V	31.95	35.1	33.5	5.2	35.6	54	-18.5	avg
7236	V	44.03	35.1	37.0	6.5	52.4	74	-21.6	pk
7236	V	32.24	35.1	37.0	6.5	40.6	54	-13.4	avg
9648	V	43.98	35.6	38.5	7.8	54.7	74	-19.3	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4874	V	45.36	35.1	33.5	5.2	49.0	74	-25.0	pk
4874	V	32.05	35.1	33.5	5.2	35.7	54	-18.4	avg
7311	V	43.9	35.1	37.0	6.5	52.3	74	-21.7	pk
7311	V	32.25	35.1	37.0	6.5	40.7	54	-13.4	avg
9748	V	43.97	35.6	38.5	7.8	54.7	74	-19.3	pk
Mid Channel 2437MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4924	V	44.76	35.1	33.5	5.2	48.4	74	-25.6	pk
4924	V	31.93	35.1	33.5	5.2	35.5	54	-18.5	avg
7386	V	43.46	35.1	37.0	6.5	51.9	74	-22.1	pk
7386	V	32.52	35.1	37.0	6.5	40.9	54	-13.1	avg
9848	V	43.6	35.6	38.5	7.8	54.3	74	-19.7	pk
High Channel 2462MHz									

Table 25. Harmonic Emissions, Radiated (802.11b – 8dBi Omni Antenna), 2.4 GHz


Note: All other emissions were measured at the noise floor of the spectrum analyzer

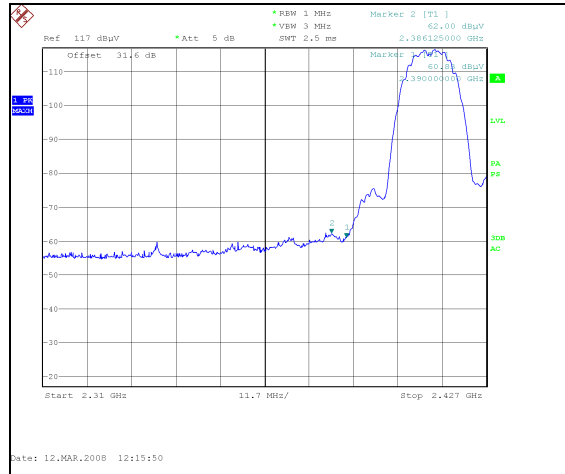


Plot 36. 802.11/b radiated restricted band 2310- 2390 MHz Peak, 2.4 GHz

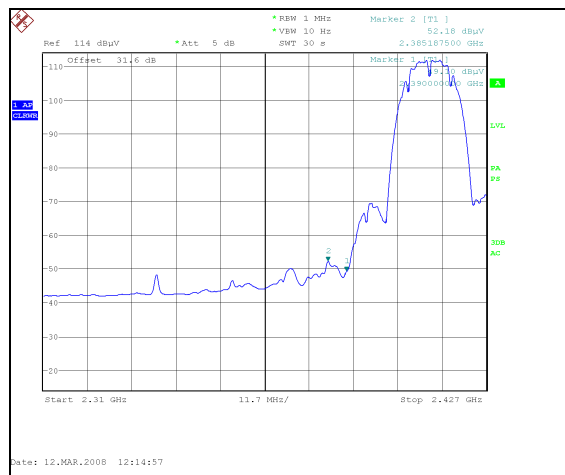

Plot 37. 802.11/b radiated restricted band 2310- 2390 MHz Avg., 2.4 GHz

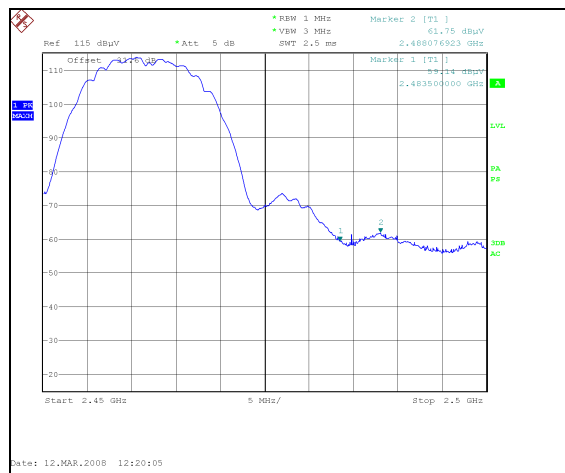

Plot 38. 802.11/b radiated restricted band 2483.5 – 2500MHz Peak, 2.4 GHz

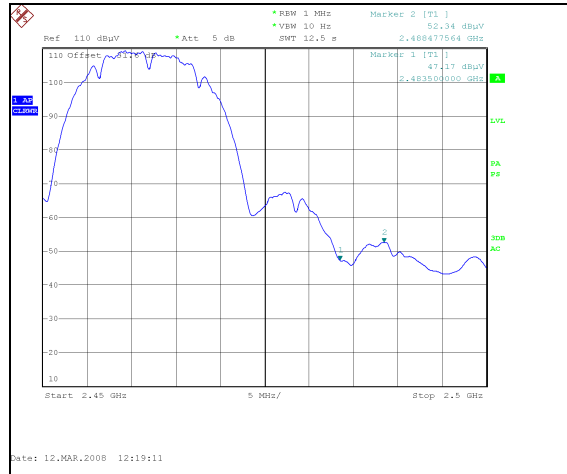

Plot 39. 802.11/b radiated restricted band 2483.5 – 2500MHz Avg., 2.4 GHz


Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g – 8dBi Omni Antenna)


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB μ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB μ V)	Limit @ 3m (dB μ V)	Margin (dB)	Measurement Type
4824	V	43.85	35.1	33.5	5.2	47.5	74	-26.6	pk
4824	V	32.25	35.1	33.5	5.2	35.9	54	-18.2	avg
7236	V	43.69	35.1	37.0	6.5	52.1	74	-21.9	pk
7236	V	32.6	35.1	37.0	6.5	41.0	54	-13.0	avg
9648	V	43.66	35.6	38.5	7.8	54.4	74	-19.6	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB μ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB μ V)	Limit @ 3m (dB μ V)	Margin (dB)	Measurement Type
4874	V	44	35.1	33.5	5.2	47.6	74	-26.4	pk
4874	V	32.3	35.1	33.5	5.2	35.9	54	-18.1	avg
7311	V	43.14	35.1	37.0	6.5	51.5	74	-22.5	pk
7311	V	32.13	35.1	37.0	6.5	40.5	54	-13.5	avg
9748	V	43.56	35.6	38.5	7.8	54.3	74	-19.7	pk
Mid Channel 2437MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB μ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB μ V)	Limit @ 3m (dB μ V)	Margin (dB)	Measurement Type
4924	V	47.97	35.1	33.5	5.2	51.6	74	-22.4	pk
4924	V	39.22	35.1	33.5	5.2	42.8	54	-11.2	avg
7386	V	50.67	35.1	37.0	6.5	59.1	74	-14.9	pk
7386	V	38.68	35.1	37.0	6.5	47.1	54	-6.9	avg
9848	V	44.37	35.6	38.5	7.8	55.1	74	-18.9	pk
High Channel 2462MHz									

Table 26. Harmonic Emissions, Radiated (802.11g – 8dBi Omni Antenna), Test Results, 2.4 GHz


Note: All other emissions were measured at the noise floor of the spectrum analyzer

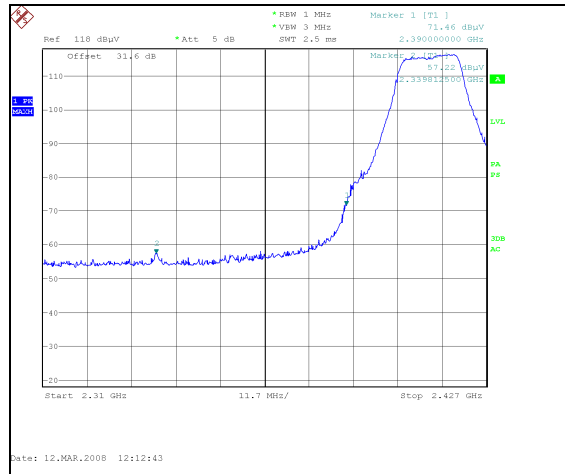


Plot 40. 802.11/g radiated restricted band 2310- 2390 MHz Peak, 2.4 GHz

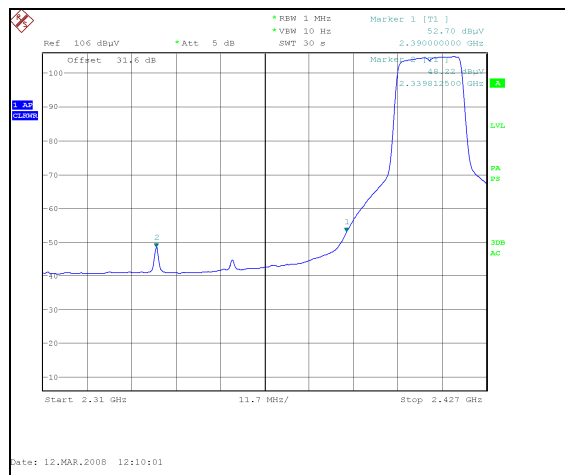

Plot 41. 802.11/g radiated restricted band 2310- 2390 MHz Avg., 2.4 GHz

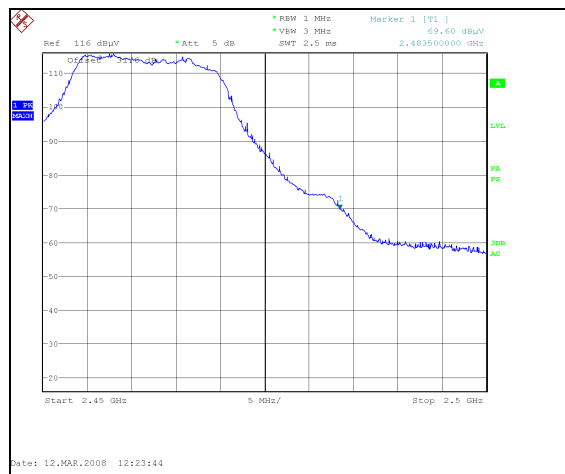

Plot 42. 802.11/g radiated restricted band 2483.5 – 2500MHz Peak, 2.4 GHz

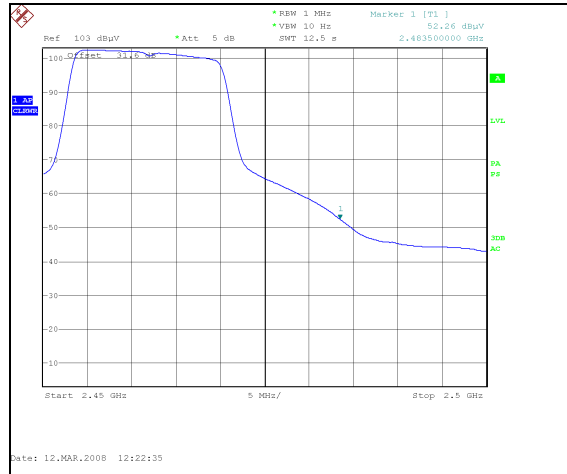

Plot 43. 802.11/g radiated restricted band 2483.5 – 2500MHz Avg., 2.4 GHz

Harmonic Emissions Requirements – Radiated

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	40.85	34.86	39.79	8.11	53.89	Peak	74	-20.11
11.49	V	32.71	34.86	39.79	8.11	45.75	Average	54	-8.25
17.235	V	41.25	34.01	42.82	10.50	60.55	Peak	74	-13.45
17.235	V	30.86	34.01	42.82	10.50	50.16	Average	54	-3.84

Table 27. Radiated Harmonic Emissions, Low Channel (10dBi Omni 5GHz)

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	45.58	34.91	39.88	8.28	58.83	Peak	74	-15.17
11.57	V	35.67	34.91	39.88	8.28	48.92	Avg.	54	-5.08
17.355	V	30.08	33.93	43.15	10.50	49.80	Peak	74	-24.20
17.355	V	19.38	33.93	43.15	10.50	39.10	Avg.	54	-14.90

Table 28. Radiated Harmonic Emissions, Mid Channel (10dBi Omni 5GHz)

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	46.22	34.96	39.94	8.52	59.72	Peak	74	-14.28
11.65	V	34.75	34.96	39.94	8.52	48.25	Avg.	54	-5.75
17.475	V	41.3	33.89	43.59	10.51	61.50	Peak	74	-12.50
17.475	V	31.02	33.89	43.59	10.51	51.22	Avg.	54	-2.78

Table 29. Radiated Harmonic Emissions, High Channel (10dBi Omni 5GHz)

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 1 m (dBuV/m)	P. Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	Distance Correction Factor 1m to 3m (dBuV/m)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg. (Peak) / (Avg.)	Limit @ 3 m (dBuV/m)	Delta (dB)
11.49	V	59.4	34.66	38.14	7.97	-9.54	61.32	Peak	74	-12.68
11.49	V	44.42	34.66	38.14	7.97	-9.54	46.34	Avg.	54	-7.66
17.235	V	52.04	33.81	40.88	10.73	-9.54	60.31	Peak	74	-13.69
17.235	V	37.25	33.81	40.88	10.73	-9.54	45.52	Avg.	54	-8.48

Table 30. Radiated Harmonic Emissions, Low Channel, 23 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 1 m (dBuV/m)	P. Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	Distance Correction Factor 1m to 3m (dBuV/m)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg. (Peak) / (Avg.)	Limit @ 3 m (dBuV/m)	Delta (dB)
11.57	V	60.61	34.70	38.23	8.07	-9.54	62.66	Peak	74	-11.34
11.57	V	46.73	34.70	38.23	8.07	-9.54	48.78	Avg.	54	-5.22
17.355	V	49.38	33.73	41.03	10.80	-9.54	57.94	Peak	74	-16.06
17.355	V	35.65	33.73	41.03	10.80	-9.54	44.21	Avg.	54	-9.79

Table 31. Radiated Harmonic Emissions, Mid Channel, 23 dBi Panel


Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 1 m (dBuV/m)	P. Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	Distance Correction Factor 1m to 3m (dBuV/m)	EUT Field Strength Final Amp. (dBuV/m)	Limit Detector Peak / Avg. (Peak) / (Avg.)	Limit @ 3 m (dBuV/m)	Delta (dB)
11.65	V	57.16	34.75	38.32	8.20	-9.54	59.39	Peak	74	-14.61
11.65	V	43.29	34.75	38.32	8.20	-9.54	45.52	Avg.	54	-8.48
17.475	V	50.73	33.69	41.14	10.86	-9.54	59.50	Peak	74	-14.50
17.475	V	36.46	33.69	41.14	10.86	-9.54	45.23	Avg.	54	-8.77


Table 32. Radiated Harmonic Emissions, High Channel, 23 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.


Radiated Spurious Emissions, 802.11a, 20 MHz

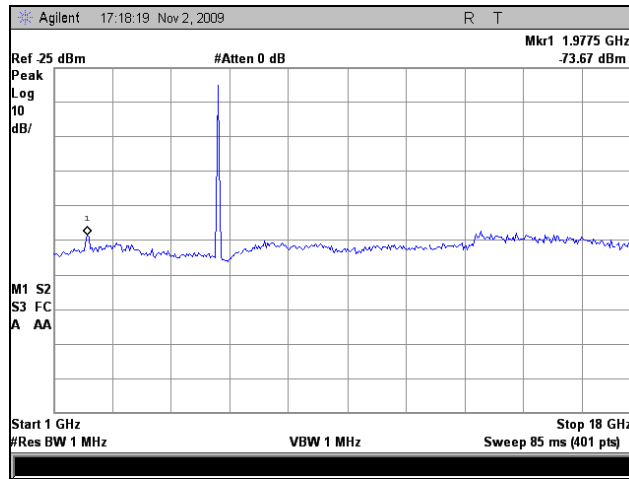


Plot 44. Radiated Spurious Emissions, Low Channel, 802.11a, 1 GHz – 18 GHz

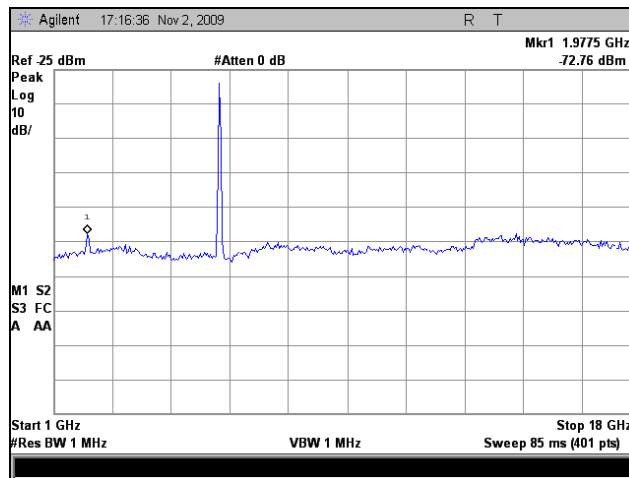


Plot 45. Radiated Spurious Emissions, Mid Channel, 802.11a, 1 GHz – 18 GHz

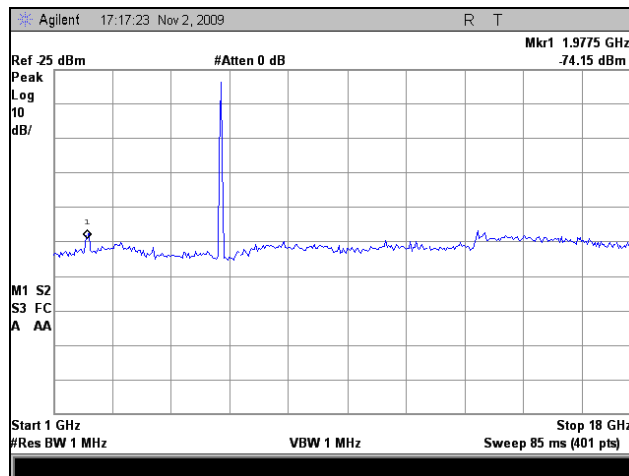


Plot 46. Radiated Spurious Emissions, High Channel, 802.11a, 1 GHz – 18 GHz

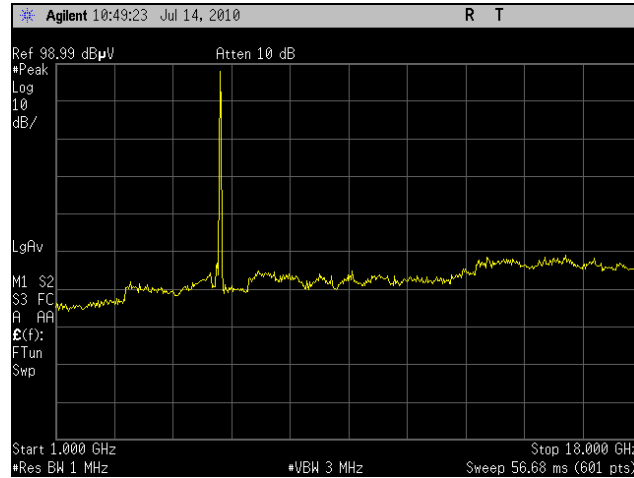

Plot 47. Radiated Spurious Emissions, Low Channel, 802.11a, 1 GHz – 18 GHz, 23 dBi Panel

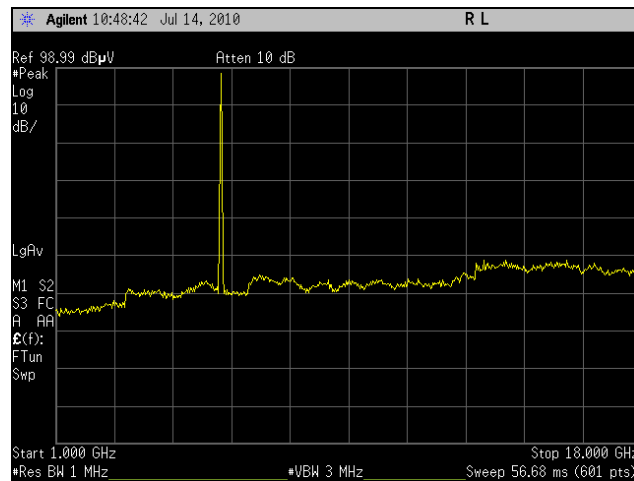


Plot 48. Radiated Spurious Emissions, Mid Channel, 802.11a, 1 GHz – 18 GHz, 23 dBi Panel

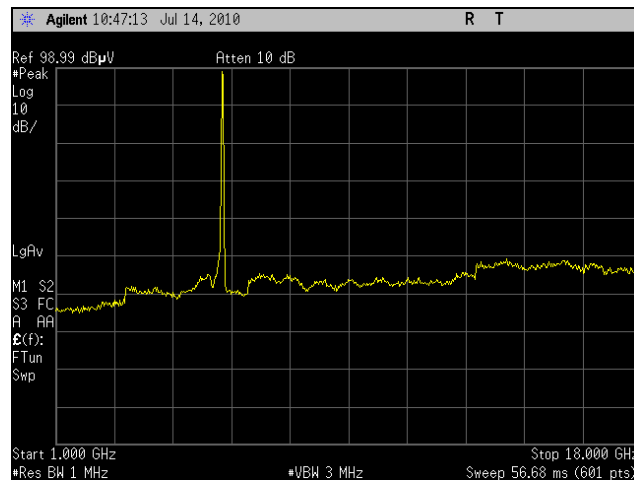

Plot 49. Radiated Spurious Emissions, High Channel, 802.11a, 1 GHz – 18 GHz, 23 dBi Panel

Radiated Spurious Emissions – Test Setup Photographs

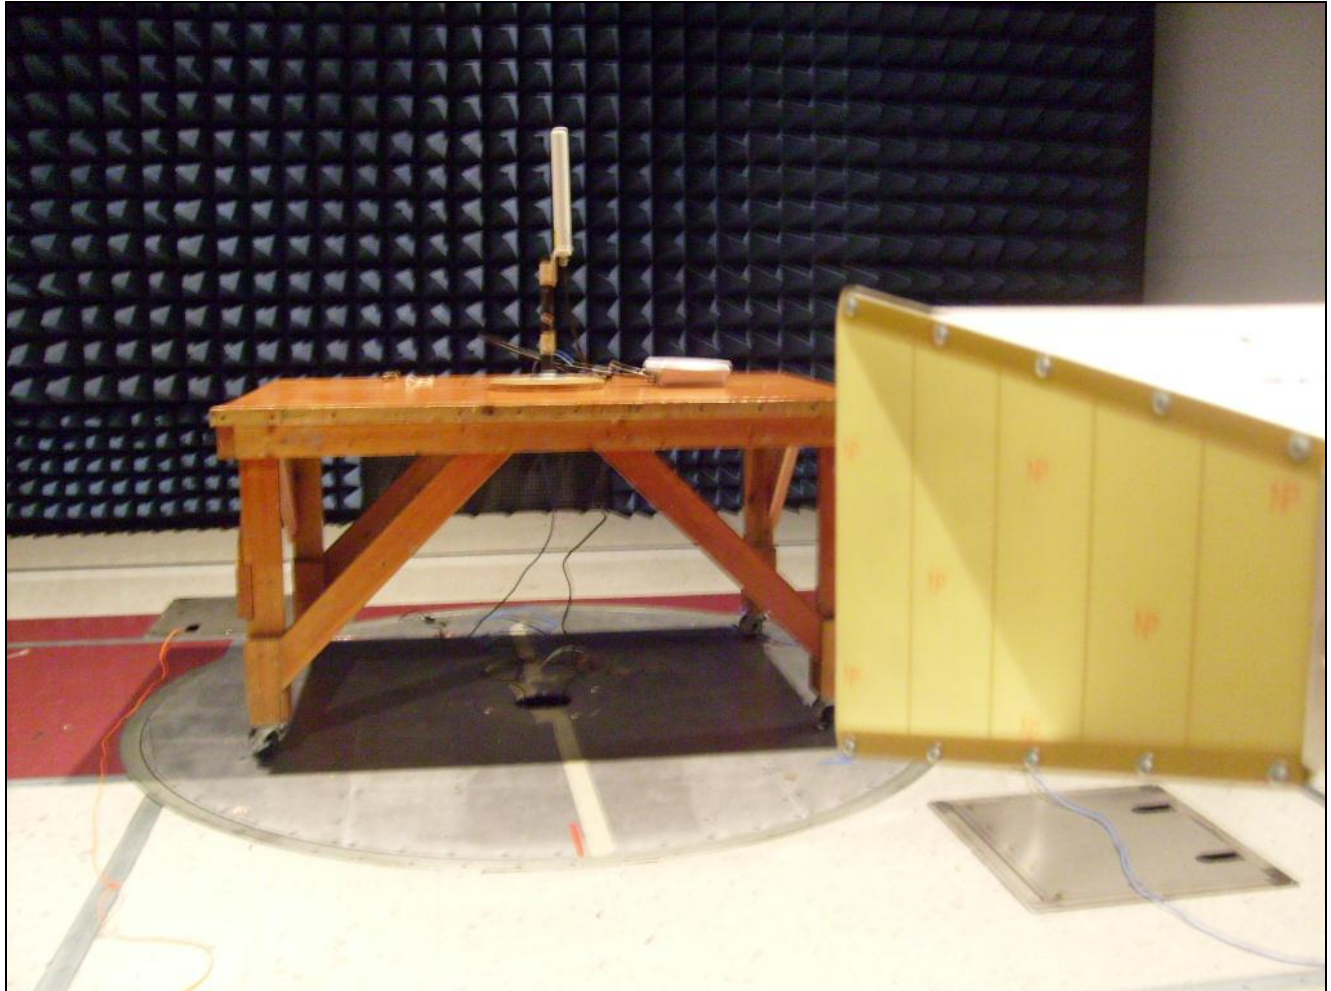


Photograph 4. Test Equipment and Setup for Various Radiated Measurements




Photograph 5. Radiated Emissions, 1 GHz – 18 GHz @ 1m, 23 dBi Panel



Photograph 6. Radiated Emissions, 23 dBi Panel, Test Setup

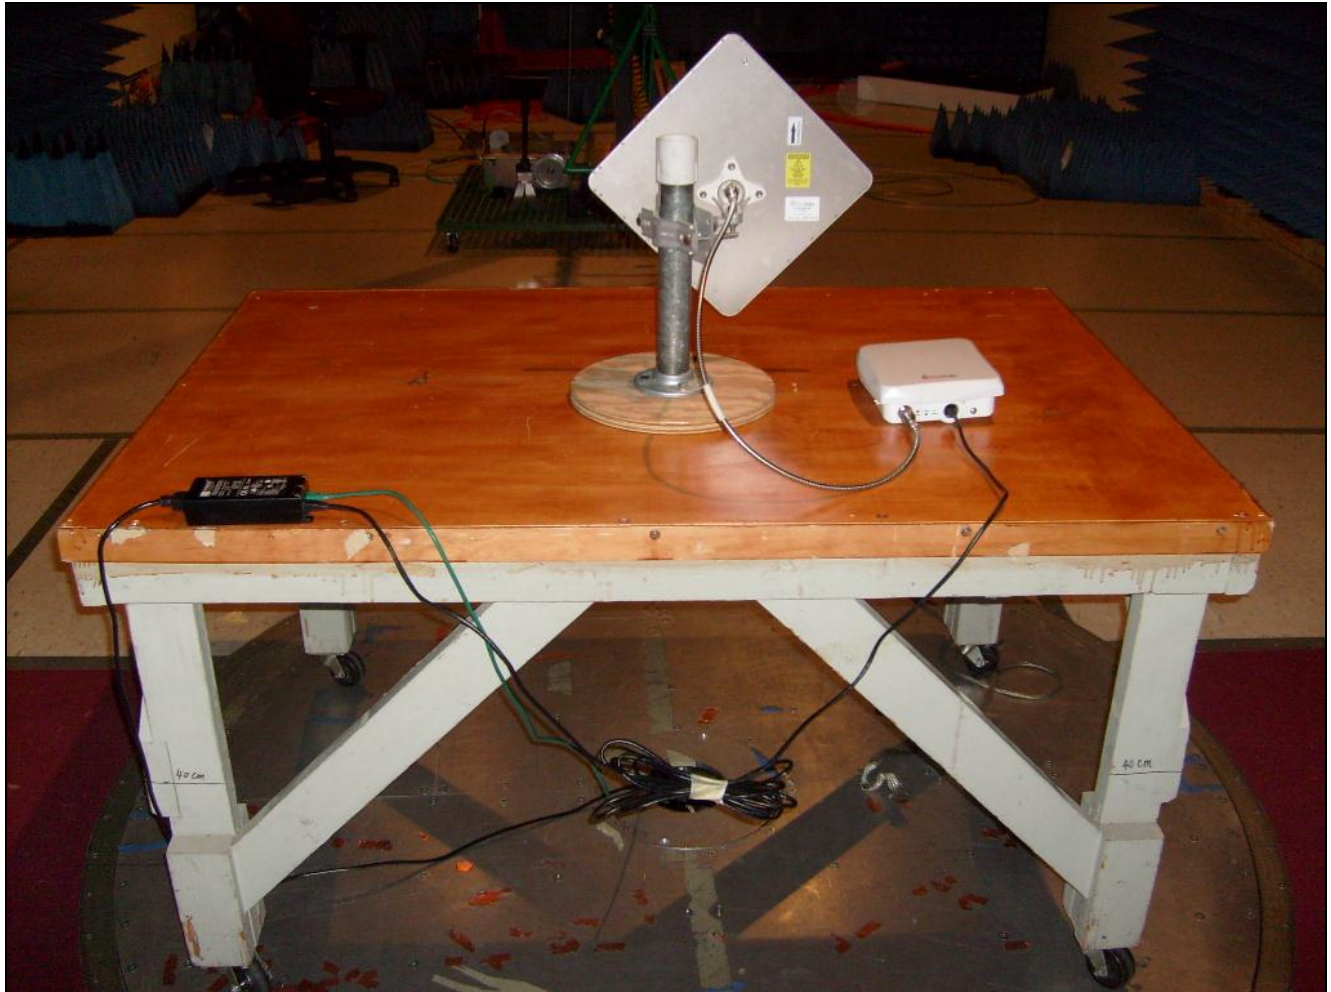

Photograph 7. Radiated Emissions, 23 dBi Panel, Rear View, Test Setup

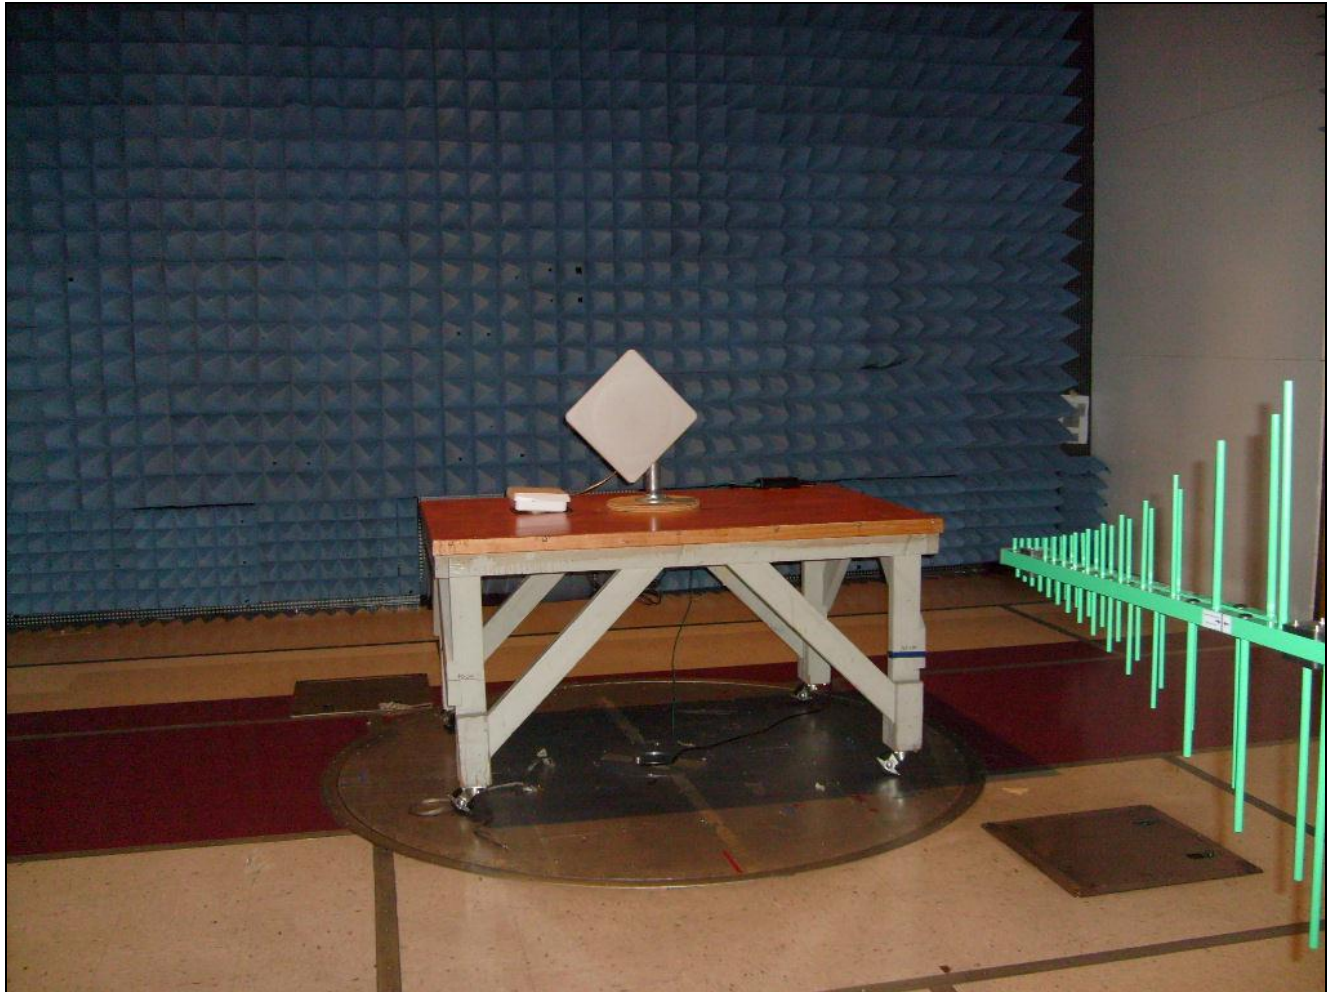

Photograph 8. Radiated Emissions, 30 MHz – 1 GHz



Photograph 9. Radiated Emissions, 1 GHz – 18 GHz @ 3m, 23 dBi Panel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

See following pages for detailed test results with RF Conducted Spurious Emissions.


Test Results: The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.

Test Engineer(s): Shawn McMillen


Test Date(s): 11/02/09

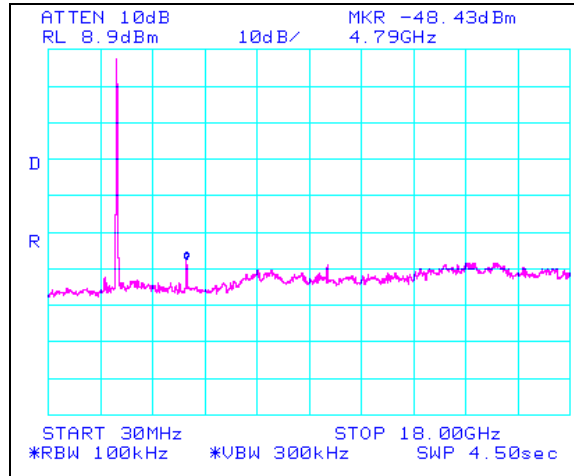


Plot 50. 802.11/b – Low Channel Conducted Emissions 30MHz - 18GHz, 2.4 GHz

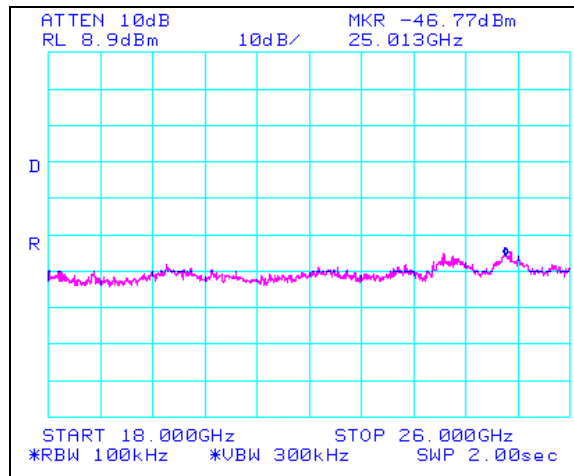


Plot 51. 802.11/b – Low Channel Conducted Emissions 18-26GHz, 2.4 GHz

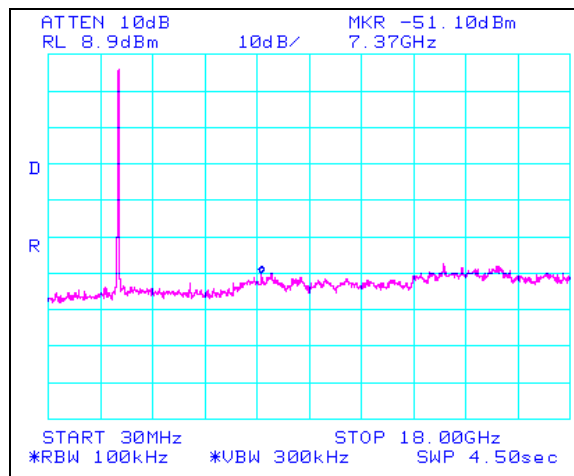


Plot 52. 802.11/b – High Channel Conducted Emissions 30MHz- 18GHz, 2.4 GHz

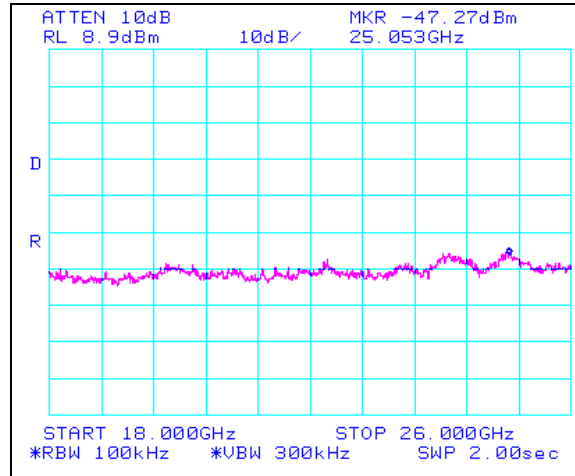


Plot 53. 802.11/b – High Channel Conducted Emissions 18-26GHz, 2.4 GHz

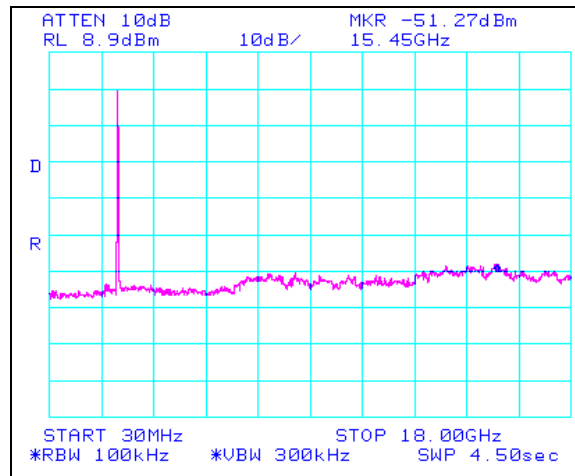


Plot 54. 802.11/g – Low Channel Conducted Emissions 30MHz- 18GHz, 2.4 GHz

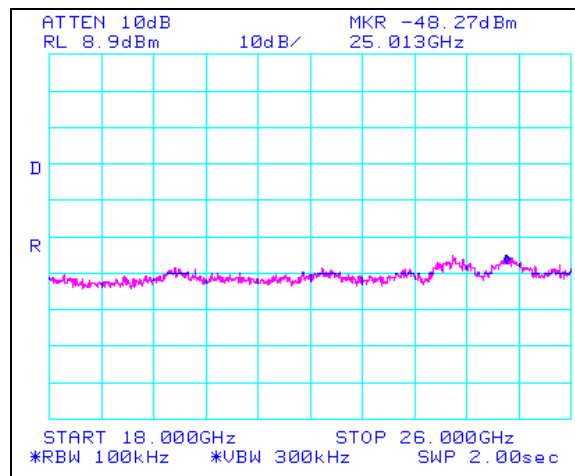

Plot 55. 802.11/g – Low Channel Conducted Emissions 18-26GHz, 2.4 GHz

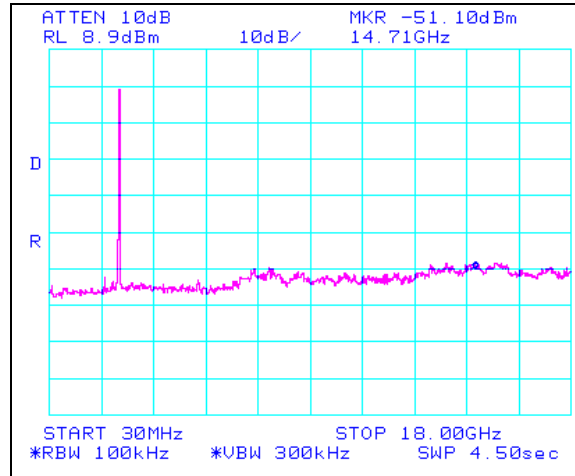


Plot 56. 802.11/g – High Channel Conducted Emissions 30MHz – 18GHz, 2.4 GHz

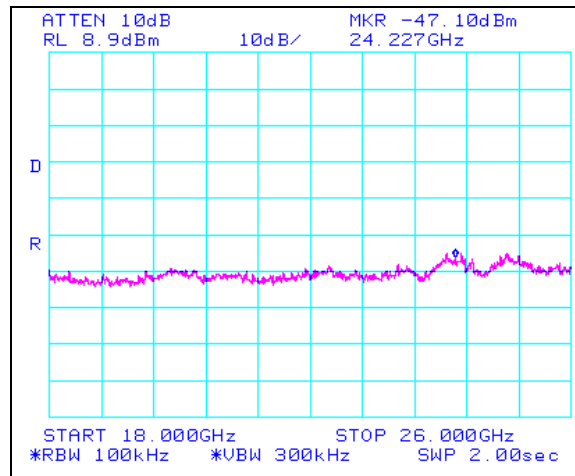


Plot 57. 802.11/g – High Channel Conducted Emissions 18-26GHz, 2.4 GHz


RF Conducted Spurious Emissions Requirements, 802.11a, 20 MHz

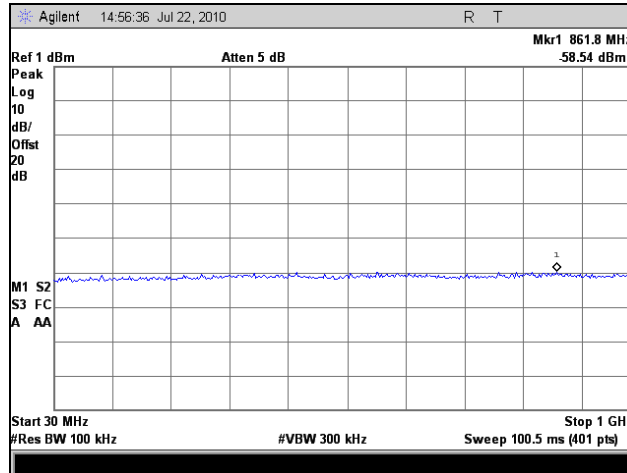


Plot 58. Conducted Emissions, Low Channel, 802.11a, 30 MHz – 1 GHz

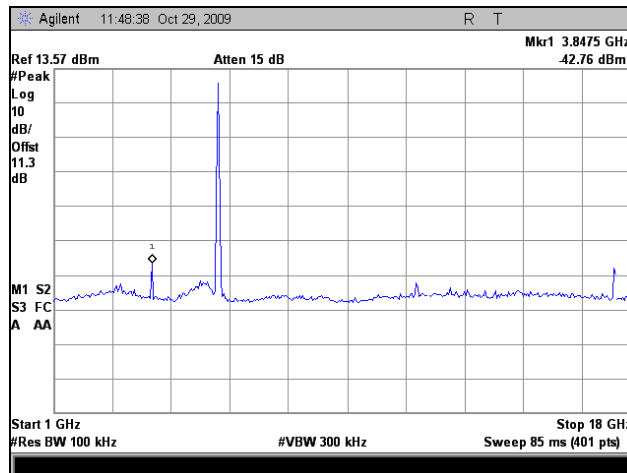


Plot 59. Conducted Emissions, Low Channel, 802.11a, 1 GHz – 18 GHz

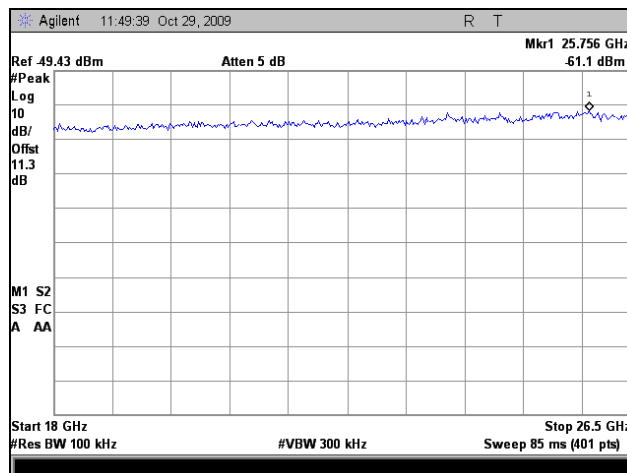


Plot 60. Conducted Emissions, Low Channel 802.11a, 18 GHz – 26 GHz

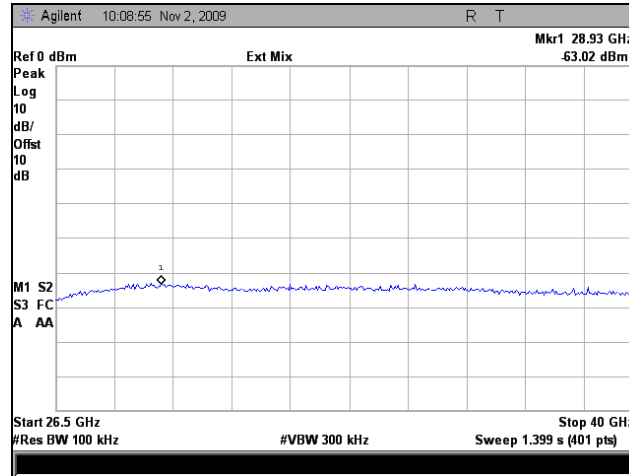


Plot 61. Conducted Emissions, Low Channel, 802.11a, 26 GHz – 40 GHz

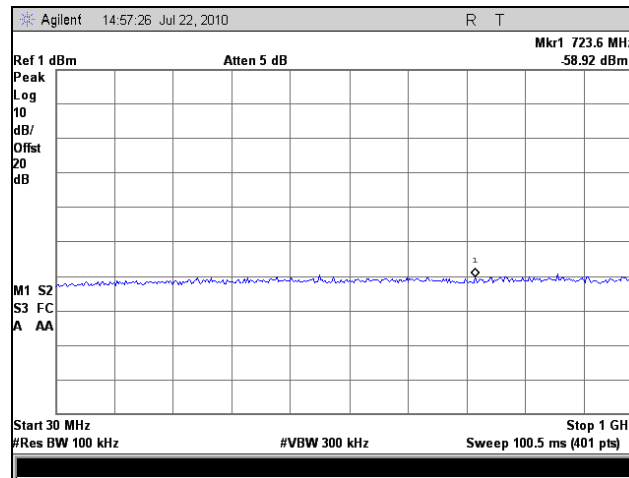


Plot 62. Conducted Emissions, Mid Channel, 802.11a, 30 MHz – 1 GHz

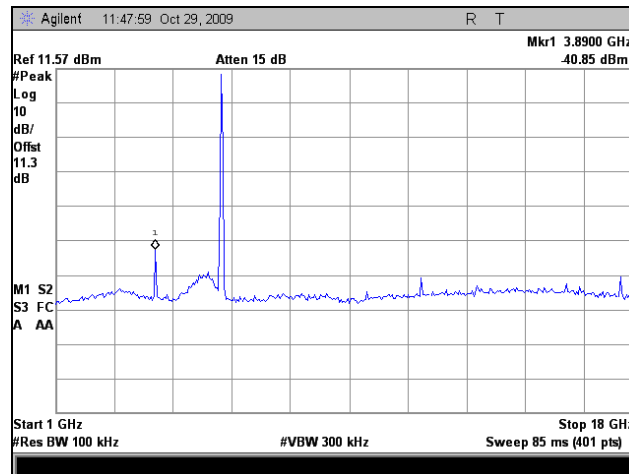


Plot 63. Conducted Emissions, Mid Channel, 802.11a, 1 GHz – 18 GHz

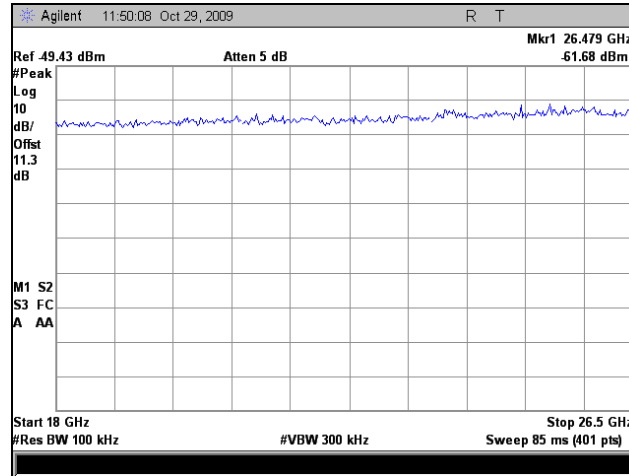


Plot 64. Conducted Emissions, Mid Channel 802.11a, 18 GHz – 26 GHz

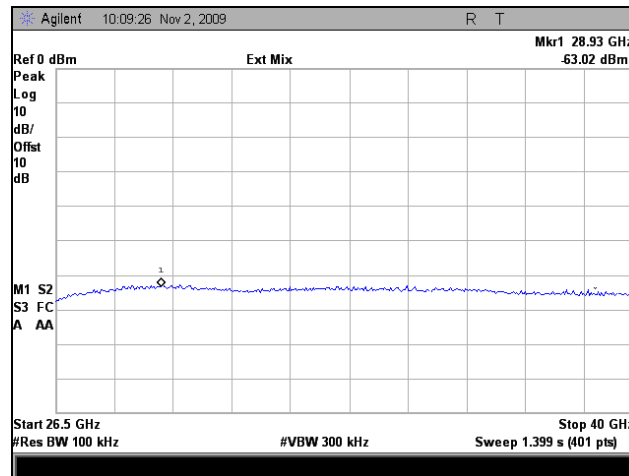


Plot 65. Conducted Emissions, Mid Channel, 802.11a, 26 GHz – 40 GHz

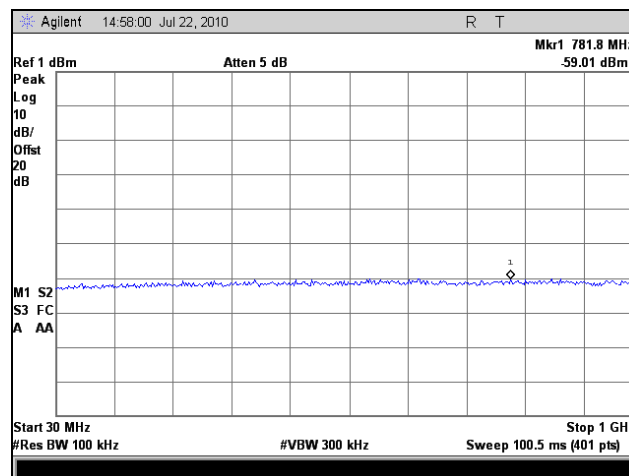


Plot 66. Conducted Emissions, High Channel, 802.11a, 30 MHz – 1 GHz

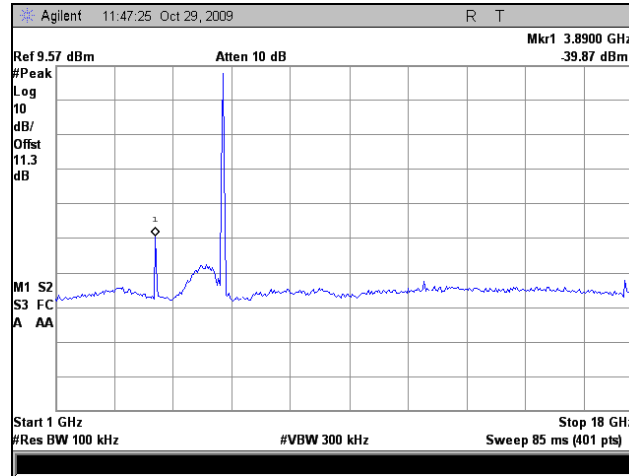

Plot 67. Conducted Emissions, High Channel, 802.11a, 1 GHz – 18 GHz

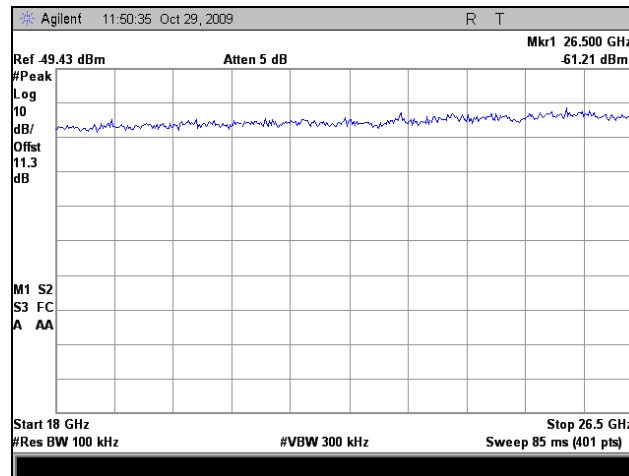


Plot 68. Conducted Emissions, High Channel 802.11a, 18 GHz – 26 GHz

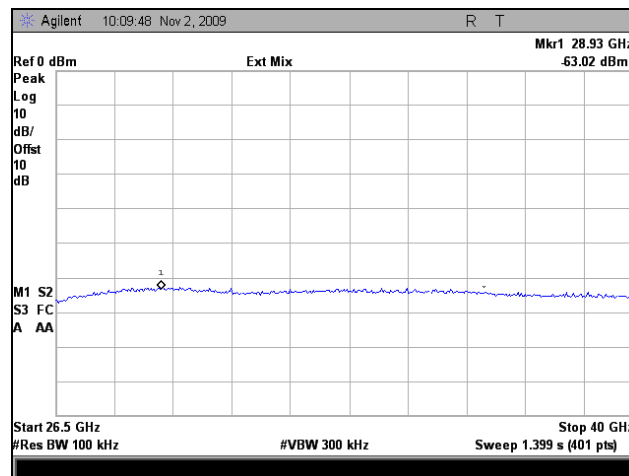


Plot 69. Conducted Emissions, High Channel, 802.11a, 26 GHz – 40 GHz


Conducted Band Edge, 802.11a

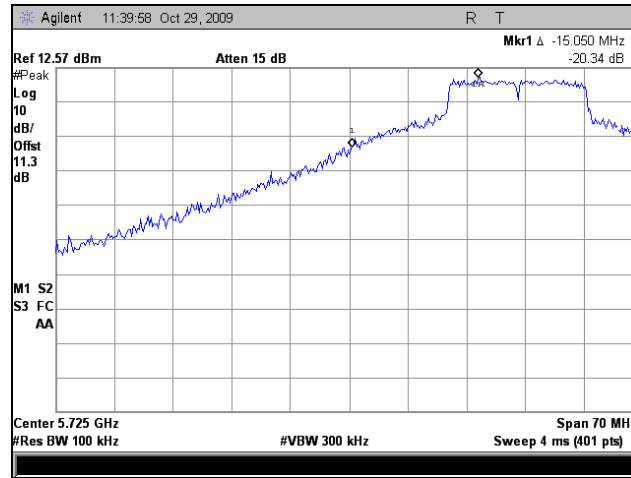


Plot 70. Lower Conducted Band Edge, Low Channel, 5 GHz

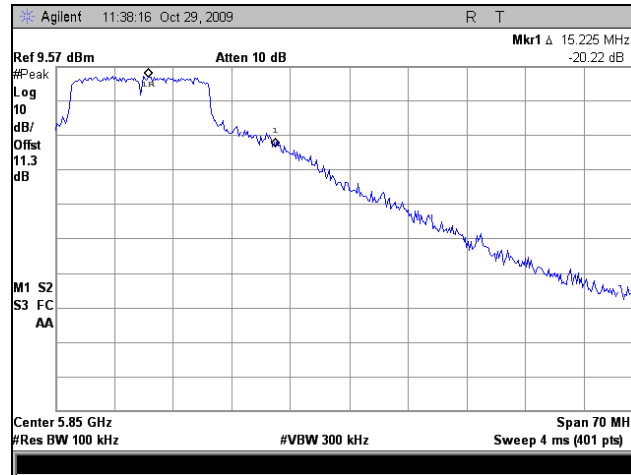


Plot 71. Upper Conducted Band Edge, High Channel, 5 GHz

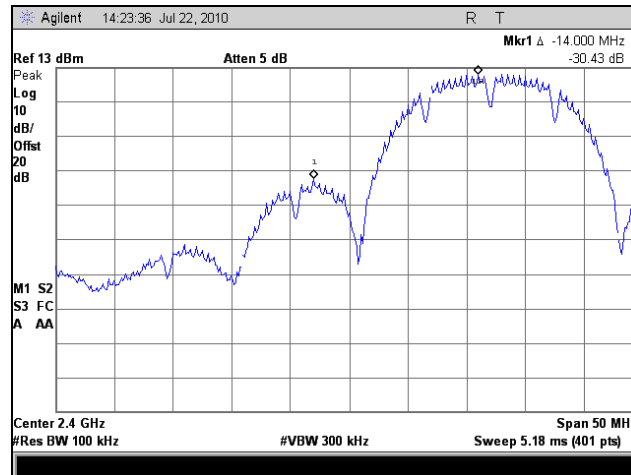


Plot 72. Lower Conducted Band Edge, High Channel, 2.4 GHz, 802.11b

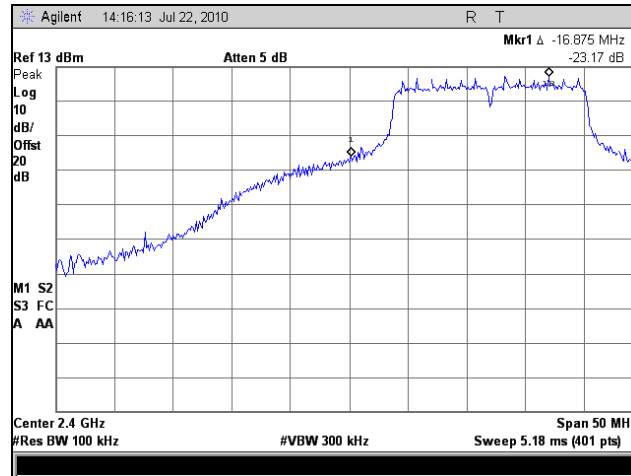

Plot 73. Lower Conducted Band Edge, High Channel, 2.4 GHz, 802.11g

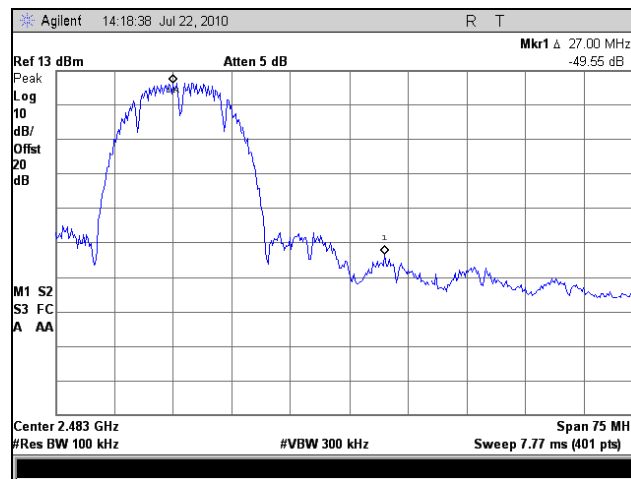

Plot 74. Upper Conducted Band Edge, High Channel, 2.4 GHz, 802.11b

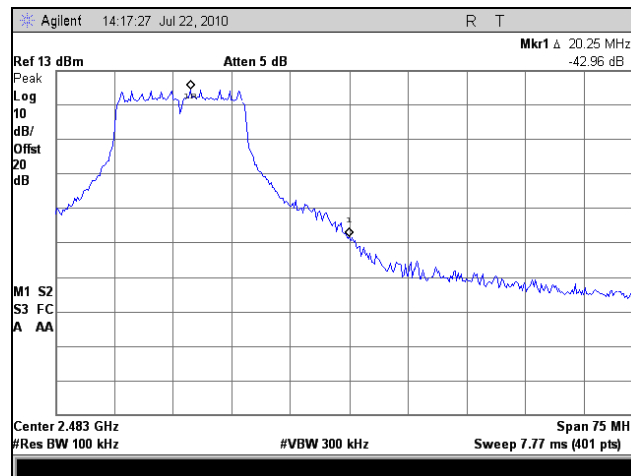

Plot 75. Upper Conducted Band Edge, High Channel, 2.4 GHz, 802.11g

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN Receiver Spurious Emissions Requirements

Test Requirements: The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 33.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 33. Spurious Emission Limits for Receivers

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test Procedures: The EUT was programmed for receive mode only. Conducted measurements were taken at the antenna port of the EUT. 100 kHz resolution bandwidth was used from 30 MHz - 1 GHz and 300 kHz resolution was used for measurements done above 1 GHz. All plots are corrected for cable loss.

Test Results: Equipment is compliant with the Receiver Spurious Emissions Requirements of RSS-GEN.

Test Engineer(s): Minh Ly

Test Date(s): 11/02/09






Figure 4. Block Diagram, Conducted Receiver Spurious Emissions Test Setup

Receiver Spurious Emissions

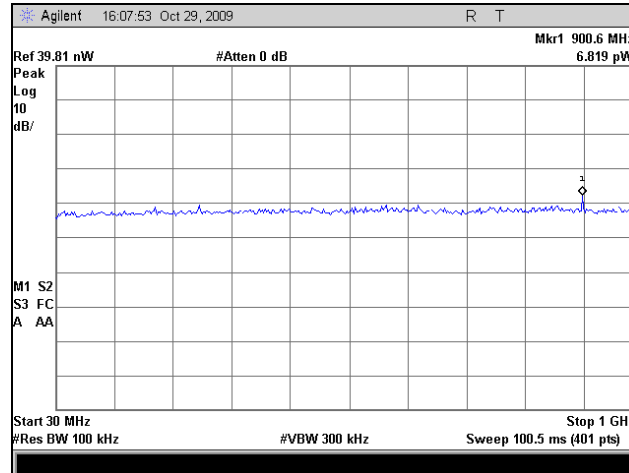

Plot 76. Conducted Spurious Emissions, 30 MHz – 1 GHz

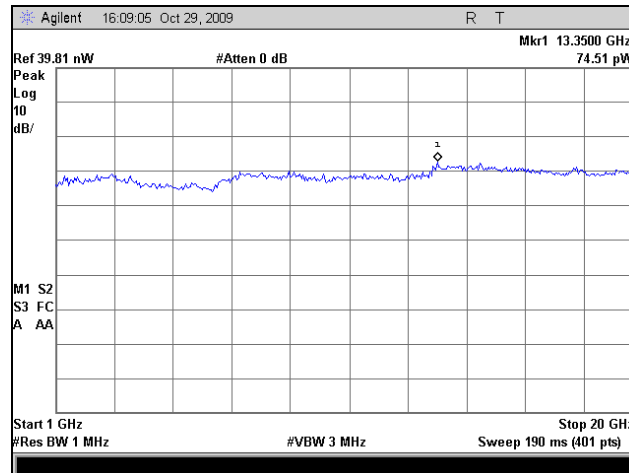

Plot 77. Conducted Spurious Emissions, 1 GHz – 20 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level throughout each of the 100 sweeps of power averaging. The RBW was set to 3 kHz and a VBW set to 9 kHz or greater. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e).

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Minh Ly

Test Date: 11/02/09

802.11b				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.095	8	14.095
Mid	2437	-3.784	8	11.784
High	2462	-7.31	8	15.31


802.11g				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.43	8	18.43
Mid	2437	-7.149	8	15.149
High	2462	-10.29	8	18.29

Table 34. Peak Power Spectral Density, Test Results, 2.4 GHz


Peak Power Spectral Density, 802.11a					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11a	Low	5745	-0.696	8	-8.696
	Mid	5779	-2.446	8	-10.446
	High	5827	-4.352	8	-12.352

Table 35. Peak Power Spectral Density, Test Results, 802.11a


§ 15.247(e) Peak Power Spectral Density (802.11b/g)

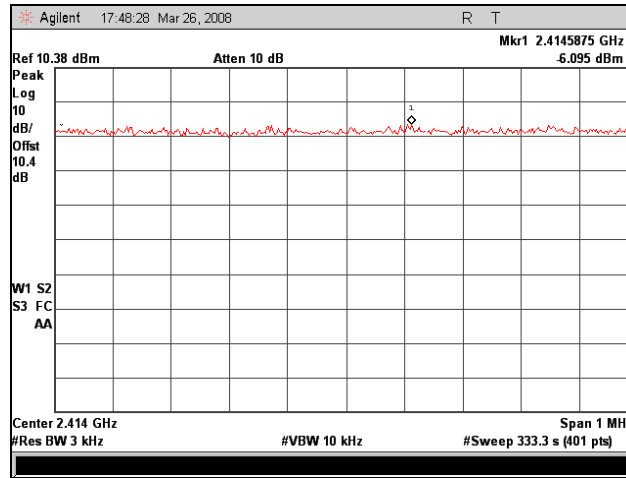


Plot 78. 802.11/b – Low Ch Peak Power Spectral Density, 2.4 GHz

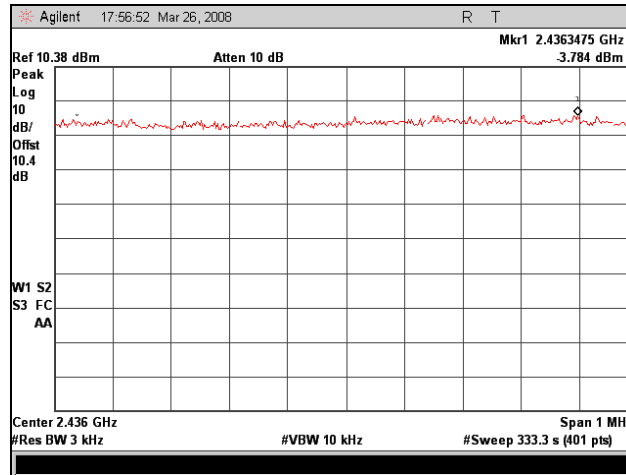


Plot 79. 802.11/b – Mid Ch Peak Power Spectral Density, 2.4 GHz

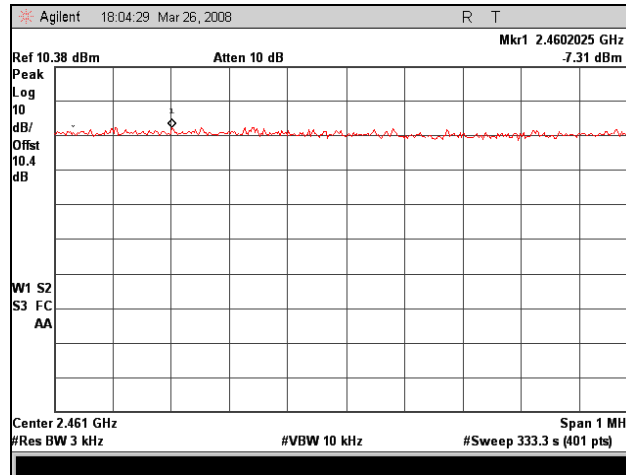


Plot 80. 802.11/b – High Ch Peak Power Spectral Density, 2.4 GHz

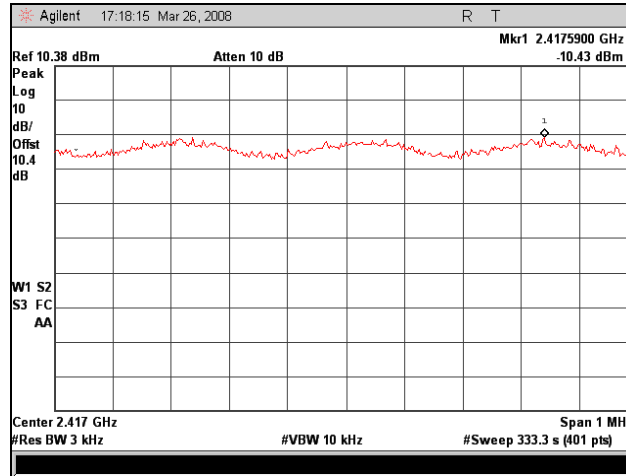

Plot 81. 802.11/g – Low Ch Peak Power Spectral Density, 2.4 GHz

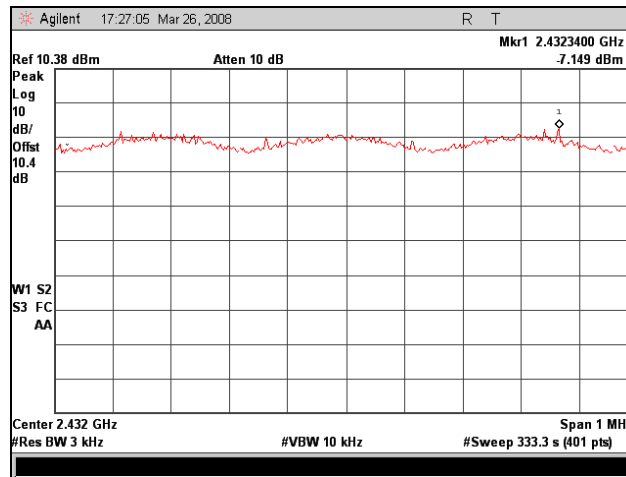


Plot 82. 802.11/g – Mid Ch Peak Power Spectral Density, 2.4 GHz

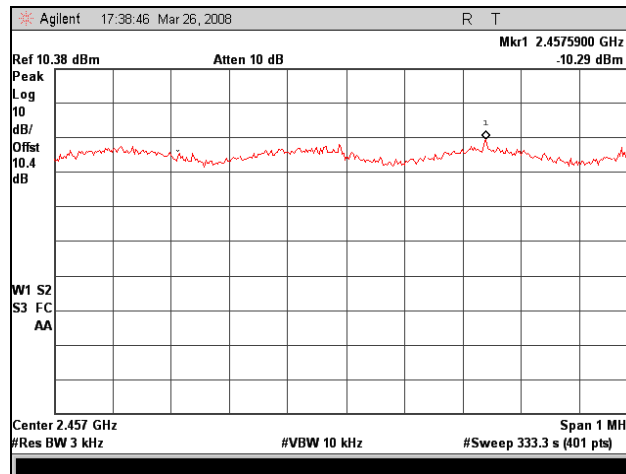


Plot 83. 802.11/g – High Ch Peak Power Spectral Density, 2.4 GHz


Peak Power Spectral Density, 802.11a

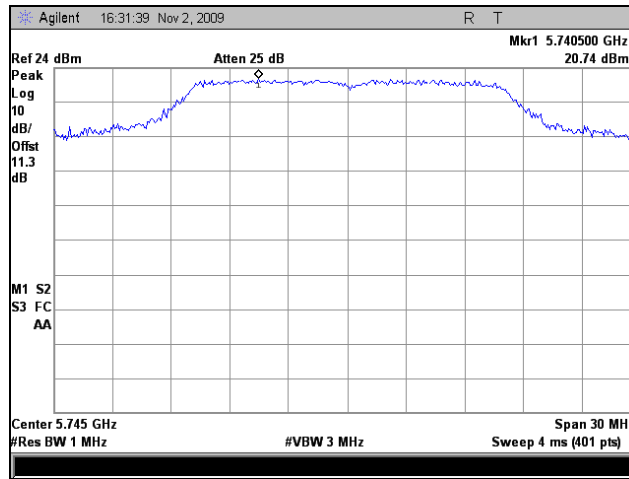


Plot 84. Peak Power Spectral Density, Low Channel, Determination

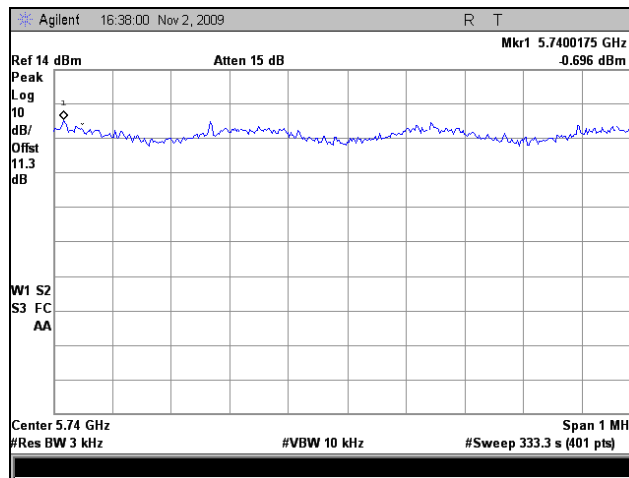


Plot 85. Peak Power Spectral Density, Low Channel

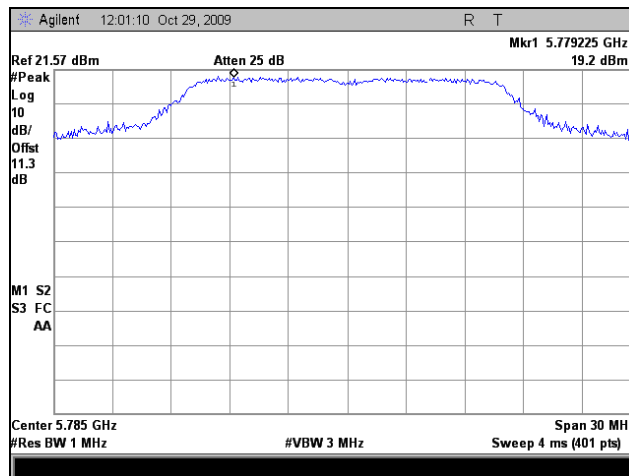


Plot 86. Peak Power Spectral Density, Mid Channel, Determination

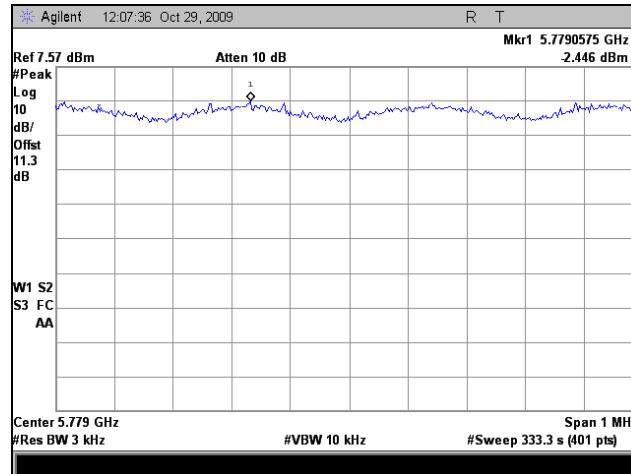

Plot 87. Peak Power Spectral Density, Mid Channel

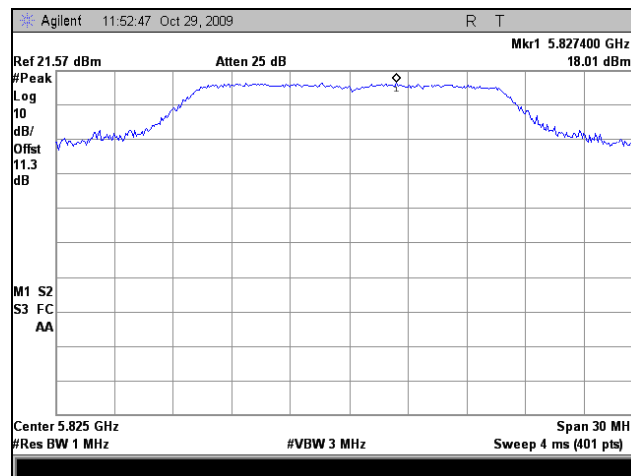

Plot 88. Peak Power Spectral Density, High Channel, Determination

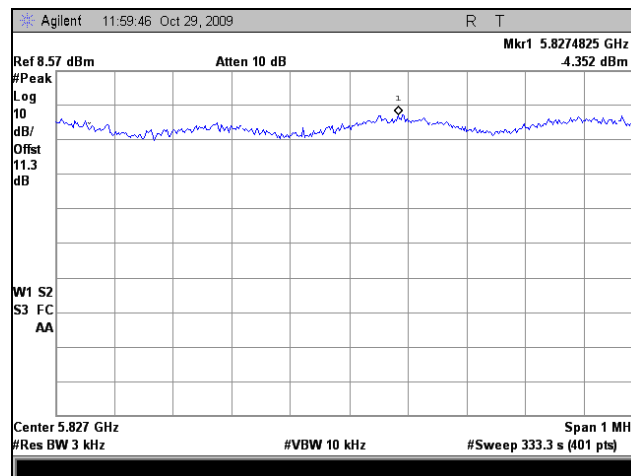

Plot 89. Peak Power Spectral Density, High Channel

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

10/23/07,, 01/26/07, 02/20/07, 02/21/07, 03/08/2007. 01/08/08,					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	03/27/2007	03/27/2008
1S2184	BILOG ANTENNA	CHASE	CBL6112A	01/03/2008	01/03/2009
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	10/25/2007	10/25/2008
1S2198	ANTENNA, HORN	EMCO	3115	08/31/2007	08/31/2008
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2263	CHAMBER, 10 METER	RANTEC	N2-14	09/24/2007	09/24/2008
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2460	ANALYZER, SPECTRUM 9 KHZ-40GHZ	AGILENT	E4407B	07/06/2005	07/06/2008
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	03/12/2007	03/12/2008
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	03/12/2007	03/12/2008
1S2034	COUPLER, DIRECTIONAL 1-20 GHZ	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2128	HARMONIC MIXER	HEWLETT PACKARD	11970A	10/26/2006	10/26/2008
1S2129	HARMONIC MIXER	HEWLETT PACKARD	11970K	10/26/2006	10/26/2008
Test Dates: 10/29/09, 10/30/09, 11/02/09					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	05/27/2009	05/27/2010
1S2399	TURNTABLE CONTROLLER	SUNOL SCIENCE	SC99V	SEE NOTE	
1S2512	TRANSIENT LIMITER	AGILENT	11947A	SEE NOTE	
1S2485	BILOG ANTENNA	TESEQ	CBL6112A	03/20/2009	03/20/2010
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	SEE NOTE	
1S2198	ANTENNA, HORN	EMCO	3115	09/03/2009	09/03/2010
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2482	CHAMBER, 5 METER	PANASHIELD	641431	11/22/2008	11/22/2009
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2460	ANALYZER, SPECTRUM 9 KHZ-40GHZ	AGILENT	E4407B	04/14/2009	04/14/2010
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2520	THERMO-HYGROMETER	FISHER SCIENTIFIC	11-611-7D	11/14/2007	11/14/2009
1S2128	HARMONIC MIXER	HEWLETT PACKARD	11970A	11/22/2008	11/22/2010
1S2129	HARMONIC MIXER	HEWLETT PACKARD	11970K	11/22/2008	11/22/2010

Table 36. Test Equipment List, Santa Clara Test Site

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1U150	EMI TEST RECEIVER	RHODE & SCHWARZ	ESIB7	2/15/07	2/15/08
1U32	SEMI- ANECHOIC CHAMBER	LINDGREN ENCLOSURES	FACT 4	5/8/07	5/8/08
1U170	BICONILOG ANTENNA	EMCO	3142C	7/10/07	7/10/08

Table 37. Test Equipment List, Union City Test Site

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

- Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.
- Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.

End of Report