



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

January 6, 2011

Firetide, Inc.  
16795 Lark Ave. Suite 200  
Los Gatos, CA 95032

Dear Steve Gu,

Enclosed is the EMC Wireless test report for compliance testing of the Firetide, Inc., Firetide Indoor MIMO Access Points, Model 5100 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device, and FCC Part 15.407 and Industry Canada RSS-210, Annex 9, Issue 7, June 2007 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Firetide, Inc.\EMCS82555A-FCC407 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**Firetide, Inc.  
Firetide Indoor MIMO Access Points, Model 5100**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class A Digital Devices  
&  
FCC Part 15.407 & RSS-210, Annex 9  
for Intentional Radiators

**MET Report: EMCS82555A-FCC407 Rev. 1**

January 6, 2011

**Prepared For:**

**Firetide, Inc.  
16795 Lark Ave. Suite 200  
Los Gatos, CA 95032**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 W. Patapsco Ave.  
Baltimore, MD 21230



## Electromagnetic Compatibility Criteria Test Report

for the

**Firetide, Inc.**  
**Firetide Indoor MIMO Access Points, Model 5100**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class A Digital Devices  
&  
FCC Part 15.407 & RSS-210, Annex 9  
for Intentional Radiators

Minh Ly, Project Engineer  
Electromagnetic Compatibility Lab

Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of FCC Rules Parts 15B, Part 15.407 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210 Annex 9 under normal use and maintenance.

Shawn McMillen, Wireless Manager  
Electromagnetic Compatibility Lab



## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	October 25, 2010	Initial Issue.
1	January 6, 2011	Revised to reflect engineer corrections.



## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview .....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	7
	F. Support Equipment .....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	9
	I. Method of Monitoring.....	9
	J. Modifications .....	9
	a) Modifications to EUT.....	9
	b) Modifications to Test Standard.....	9
	K. Disposition of EUT .....	9
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>10</b>
	§ 15.107(a) Conducted Emissions Limits.....	11
	§ 15.109(a) Radiated Emissions Limits.....	18
<b>IV.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>24</b>
	§ 15.203 Antenna Requirement .....	25
	§ 15.207 Conducted Emissions Limits .....	26
	§ 15.403(c) 26dB Bandwidth .....	27
	§ 15.407(a)(3) RF Power Output.....	28
	§ 15.407(f) RF Exposure .....	29
	§ 15.407(a)(3) Peak Power Spectral Density.....	30
	§ 15.407(a)(6) Peak Excursion Ratio .....	31
	§ 15.407(b) Undesirable Emissions.....	32
	§ 15.407(g) Frequency Stability .....	33
	RSS-GEN Receiver Spurious .....	34
<b>V.</b>	<b>Test Equipment .....</b>	<b>35</b>
<b>VI.</b>	<b>Certification &amp; User's Manual Information.....</b>	<b>37</b>
	A. Certification Information .....	38
	B. Label and User's Manual Information .....	42



## List of Tables

Table 1. Executive Summary of EMC Part 15.407 & RSS-210 Annex 9 Compliance Testing .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	7
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information .....	7
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a) .....	11
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), FSP040-DGAA5 .....	12
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), FSP040-DGAA5.....	13
Table 10. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE30U-560.....	14
Table 11. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE30U-560 .....	15
Table 12. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	18
Table 13. Radiated Emissions Limits, Test Results, FSP040-DGAA5 .....	19
Table 14. Radiated Emissions Limits, Test Results, PoE30U-560.....	21
Table 15. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	26
Table 16. Output Power Requirements from §15.407.....	28
Table 17. Test Equipment List .....	36

## List of Figures

Figure 1. Setup Block Diagram.....	8
------------------------------------	---



## List of Photographs

Photograph 1. Front View of EUT .....	6
Photograph 2. Rear View of EUT .....	6
Photograph 3. Conducted Emissions, Test Setup 1, FSP040-DGAA5 .....	16
Photograph 4. Conducted Emissions, Test Setup 2, FSP040-DGAA5 .....	16
Photograph 5. Conducted Emissions, Test Setup 1, PoE30U-560 .....	17
Photograph 6. Conducted Emissions, Test Setup 2, PoE30U-560 .....	17
Photograph 7. Radiated Emission, Test Setup, 30 MHz – 1 GHz .....	23
Photograph 8. Radiated Emission, Test Setup, Above 1 GHz .....	23

## List of Plots

Plot 1. Conducted Emission, Phase Line Plot, FSP040-DGAA5 .....	12
Plot 2. Conducted Emission, Neutral Line Plot, FSP040-DGAA5 .....	13
Plot 3. Conducted Emission, Phase Line Plot, PoE30U-560 .....	14
Plot 4. Conducted Emission, Neutral Line Plot, PoE30U-560 .....	15
Plot 5. Radiated Emissions, 30 MHz - 1 GHz, FSP040-DGAA5 .....	19
Plot 6. Radiated Emissions, Above 1 GHz, FSP040-DGAA5 .....	20
Plot 7. Radiated Emissions, 30 MHz – 1 GHz, PoE30U-560 .....	21
Plot 8. Radiated Emissions, 1 GHz – 10 GHz, PoE30U-560 .....	22



## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one <b>microamp</b>
dB $\mu$ V	Decibels above one <b>microvolt</b>
dB $\mu$ A/m	Decibels above one <b>microamp per meter</b>
dB $\mu$ V/m	Decibels above one <b>microvolt per meter</b>
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	microhenry
$\mu$	microfarad
$\mu$ s	microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts <b>per meter</b>
VCP	Vertical Coupling Plane





# I. Executive Summary



## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Firetide, Inc. Firetide Indoor MIMO Access Points, Model 5100, with the requirements of FCC Part 15, §15.407 and Industry Canada RSS-210 Annex 9. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Firetide Indoor MIMO Access Points, Model 5100. Firetide, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Firetide Indoor MIMO Access Points, Model 5100, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, §15.407 and Industry Canada RSS-210, Annex 9, in accordance with Firetide, Inc., quote number 2747. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Industry Canada Reference	Description	Results
47 CFR Part 15.107 (a)	ICES-003 Issue 4 February 2004	Conducted Emission Limits for a Class A Digital Device	Compliant
47 CFR Part 15.109 (a)	ICES-003 Issue 4 February 2004	Radiated Emission Limits for a Class A Digital Device	Compliant
15.203	RSS-GEN 7.1.4	Antenna Requirements	Compliant
15.207	RSS-GEN 7.2.2; RSS-210 2.2	AC Conducted Emissions 150KHz – 30MHz	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.403 (i)	A8.2	26dB Occupied Bandwidth	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.407 (a)(3)	A9.2(3)	Conducted Transmitter Output Power	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.407 (a)(3)	A9.2(3)	Power Spectral Density	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.407 (a)(6)	N/A	Peak Excursion	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.407 (b)(4), (6)	A9.3(4)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.407(f)	RSS-GEN	RF Exposure	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
15.407(g)	2.1	Frequency Stability	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83

**Table 1. Executive Summary of EMC Part 15.407 & RSS-210 Annex 9 Compliance Testing**



## II. Equipment Configuration



## A. Overview

MET Laboratories, Inc. was contracted by Firetide, Inc. to perform testing on the Firetide Indoor MIMO Access Points, Model 5100, under Firetide, Inc.' quote number 9FIR2707R3.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Firetide, Inc. Firetide Indoor MIMO Access Points, Model 5100.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	Firetide Indoor MIMO Access Points, Model 5100	
<b>Model(s) Covered:</b>	Firetide Indoor MIMO Access Points, Model 5100	
<b>EUT Specifications:</b>	Primary Power: 120 VAC, 60 Hz	
	FCC ID: REP-5100-1 IC ID: 4988A-5100	
	Type of Modulations:	OFDM
	Emission Designators:	D7D
	Equipment Code:	NII
	Peak RF Output Power:	0.0476 W
	EUT Frequency Ranges:	5180 – 5240 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Minh Ly	
<b>Report Date(s):</b>	January 6, 2011	

**Table 2. EUT Summary**



## B. References

<b>RSS-210, Issue 7, June 2007</b>	Low-power License-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All radio testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All digital testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The Firetide, Inc. Indoor MIMO Access Points, Model 5100, Equipment Under Test (EUT), utilizes Wistron DNMA-83 mini PCI radios.



Photograph 1. Front View of EUT



Photograph 2. Rear View of EUT



## E. Equipment Configuration

All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	Firetide Indoor AP	5100	5100	W4P071034500416	1
B	AC/DC Power Adapter	FSP040-DGAA5	9NA0402400	H00000043	NA
C	PoE Injector (PhiHong)	PoE30U-560	PoE30U-560	P71300181A1	NA

Table 4. Equipment Configuration

## F. Support Equipment

Ref. ID	Name / Description	Manufacturer	Model Number	Customer Supplied Calibration Data
D	Laptop computer	Dell	vostro 1000	N/A

Table 5. Support Equipment

## G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port Name
1	DC Power	DC power input from SELV	1	1	N	N/A
2	Ethernet	IP connection to host computer	1	10	N	N/A

Table 6. Ports and Cabling Information

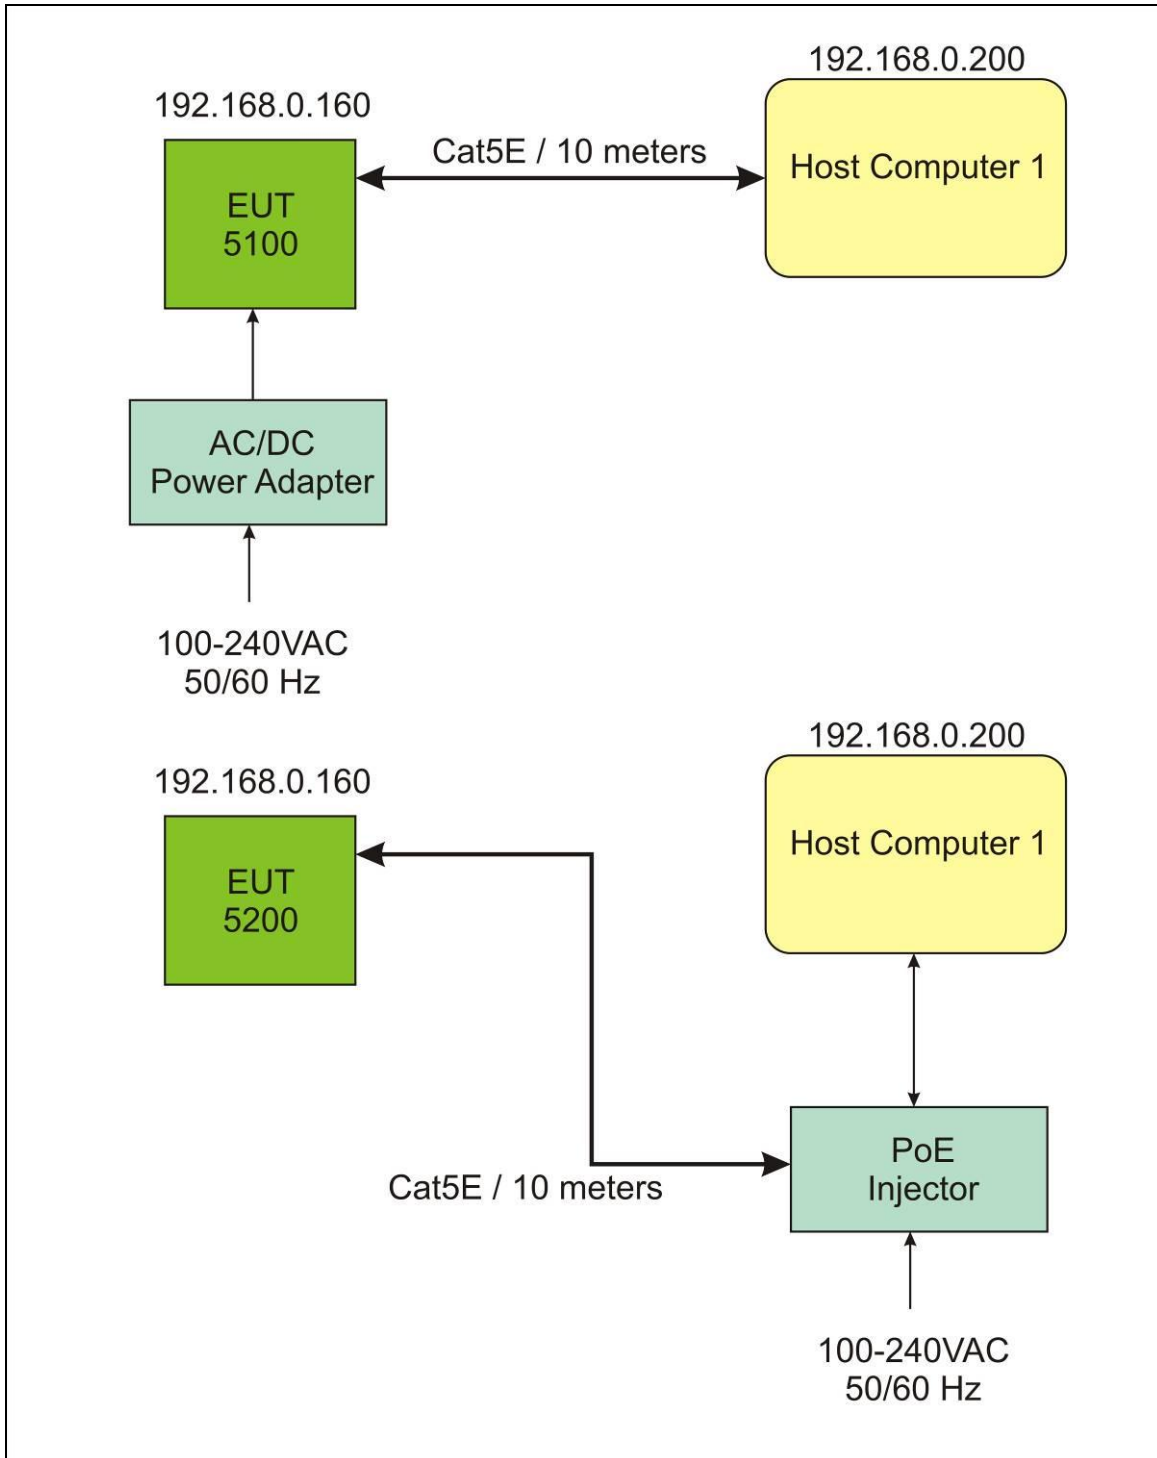


Figure 1. Setup Block Diagram





## **H. Mode of Operation**

Operation can be monitored using by pinging the EUT or running ART.

## **I. Method of Monitoring**

IP connectivity is maintained with the EUT. If IP connectivity is lost, EUT connectivity shall be re-established upon power up or re-boot.

## **J. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **K. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Firetide, Inc. upon completion of testing.



### **III. Electromagnetic Compatibility Criteria for Unintentional Radiators**



## Electromagnetic Compatibility Criteria

### § 15.107 Conducted Emissions Limits

**Test Requirement(s):** **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

**15.207(a)**, Except as shown in paragraphs (b) and (c) of this section\*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		*Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.  
\* -- Limits per Subsection 15.207(a).

**Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)**

**Test Results:** The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Kenshi Chung


**Test Date(s):** 08/17/10



**Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)**

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass	Notes
AC - Line	0.1550	47.91	79	-31.09	Pass	28.07	66	-37.93	Pass	Measured Emission was below applicable limits
AC - Line	0.4162	38.65	79	-40.35	Pass	29.87	66	-36.13	Pass	Measured Emission was below applicable limits
AC - Line	0.710	36.25	73	-36.75	Pass	30.74	60	-29.26	Pass	Measured Emission was below applicable limits
AC - Line	1.243	38.08	73	-34.92	Pass	32.55	60	-27.45	Pass	Measured Emission was below applicable limits
AC - Line	1.775	36.4	73	-36.6	Pass	30.85	60	-29.15	Pass	Measured Emission was below applicable limits
AC - Line	28.85	22.9	73	-50.1	Pass	14.92	60	-45.08	Pass	Measured Emission was below applicable limits

**Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), FSP040-DGAA5**

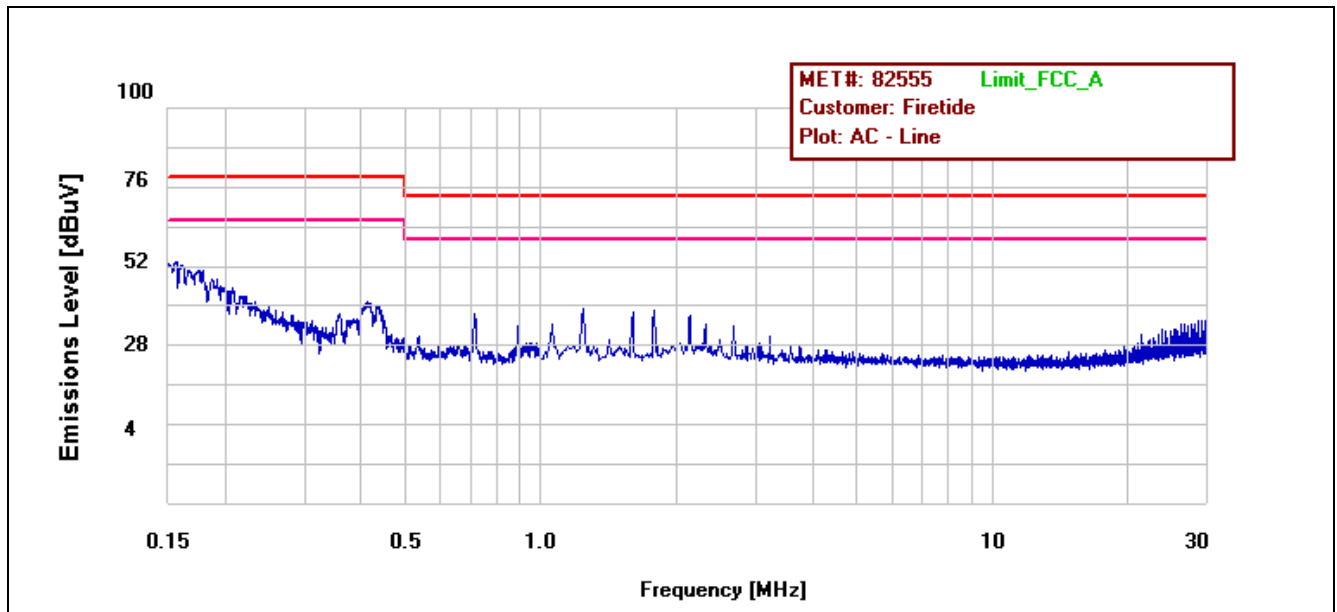


**Plot 1. Conducted Emission, Phase Line Plot, FSP040-DGAA5**



**Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)**

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass	Notes
AC - Neutral	0.1503	48.23	79	-30.77	Pass	33.29	66	-32.71	Pass	Measured Emission was below applicable limits
AC - Neutral	0.4167	40.44	79	-38.56	Pass	36.21	66	-29.79	Pass	Measured Emission was below applicable limits
AC - Neutral	0.708	37.25	73	-35.75	Pass	35.74	60	-24.26	Pass	Measured Emission was below applicable limits
AC - Neutral	1.241	39.23	73	-33.77	Pass	38.1	60	-21.9	Pass	Measured Emission was below applicable limits
AC - Neutral	1.772	35.97	73	-37.03	Pass	34.35	60	-25.65	Pass	Measured Emission was below applicable limits
AC - Neutral	29.325	25.22	73	-47.78	Pass	18.79	60	-41.21	Pass	Measured Emission was below applicable limits

**Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), FSP040-DGAA5**

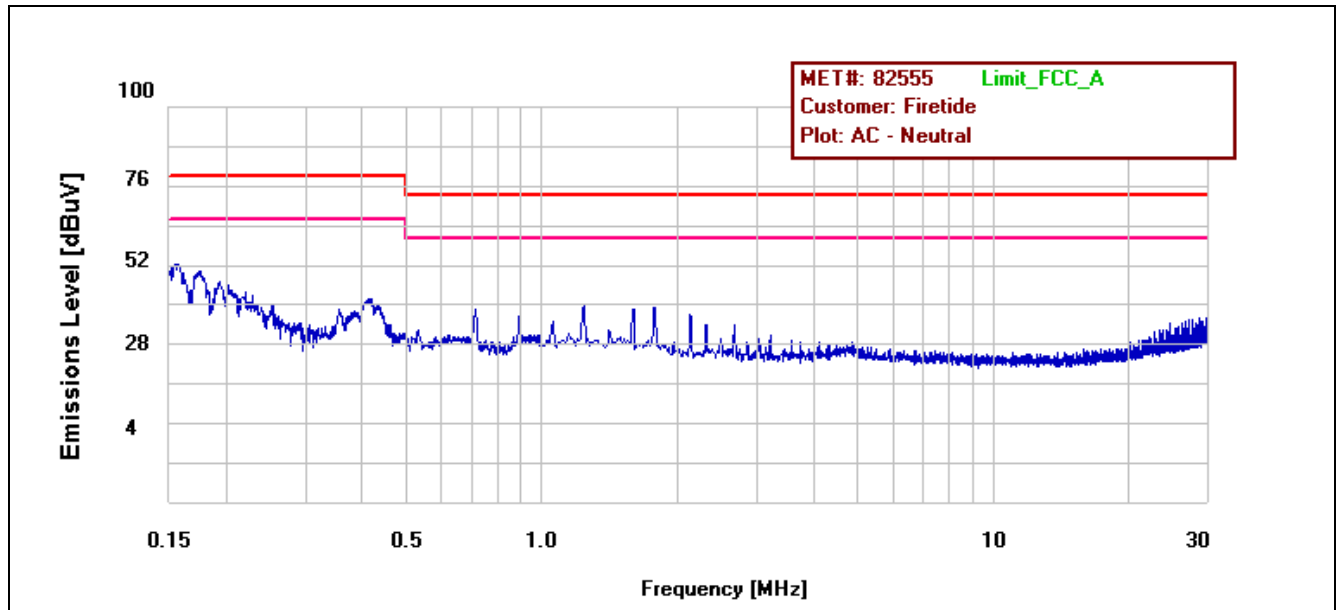


**Plot 2. Conducted Emission, Neutral Line Plot, FSP040-DGAA5**



**Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)**

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass	Notes
AC - Line	0.1867	38.09	79	-40.91	Pass	33.08	66	-32.92	Pass	Measured Emission was below applicable limits
AC - Line	0.2360	32.25	79	-46.75	Pass	26.9	66	-39.1	Pass	Measured Emission was below applicable limits
AC - Line	1.497	26.01	73	-46.99	Pass	20.09	60	-39.91	Pass	Measured Emission was below applicable limits
AC - Line	4.592	26.87	73	-46.13	Pass	20.41	60	-39.59	Pass	Measured Emission was below applicable limits
AC - Line	14.450	46.87	73	-26.13	Pass	40.56	60	-19.44	Pass	Measured Emission was below applicable limits

**Table 10. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), PoE30U-560**

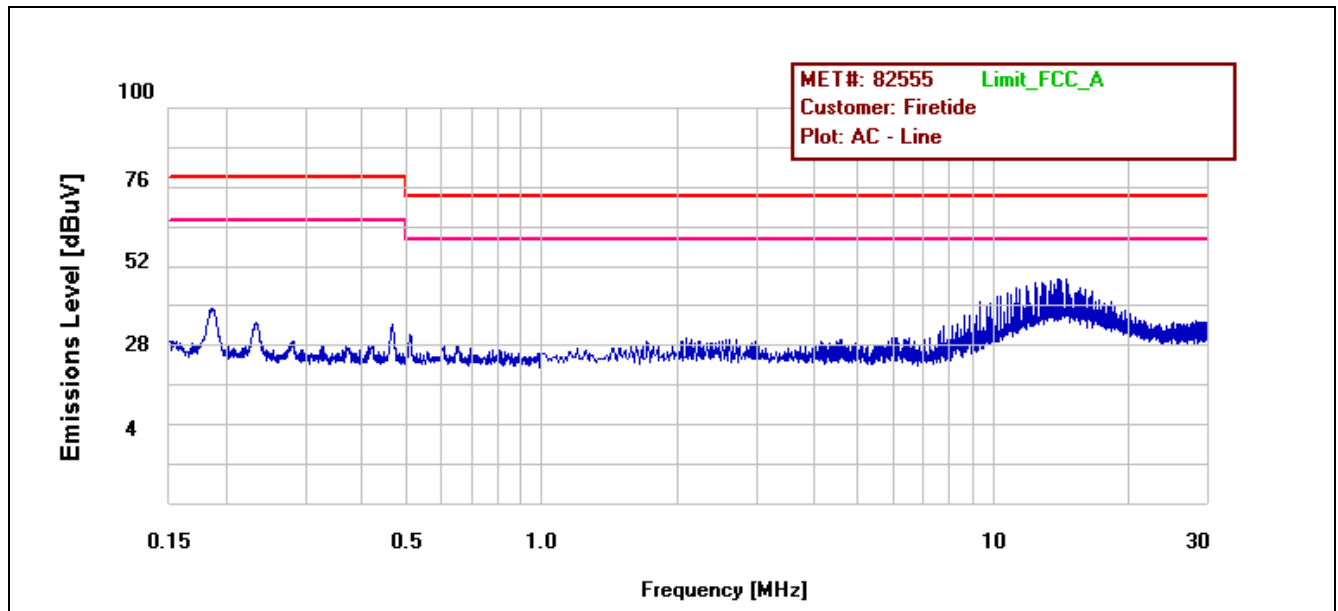


**Plot 3. Conducted Emission, Phase Line Plot, PoE30U-560**



**Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)**

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass	Notes
AC - Neutral	0.1886	37.58	79	-41.42	Pass	36.53	66	-29.47	Pass	Measured Emission was below applicable limits
AC - Neutral	0.2352	32.94	79	-46.06	Pass	31.3	66	-34.7	Pass	Measured Emission was below applicable limits
AC - Neutral	1.0325	28.79	73	-44.21	Pass	25.82	60	-34.18	Pass	Measured Emission was below applicable limits
AC - Neutral	4.603	29.56	73	-43.44	Pass	27.05	60	-32.95	Pass	Measured Emission was below applicable limits
AC - Neutral	13.90	35.4	73	-37.6	Pass	29.24	60	-30.76	Pass	Measured Emission was below applicable limits

**Table 11. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), PoE30U-560**

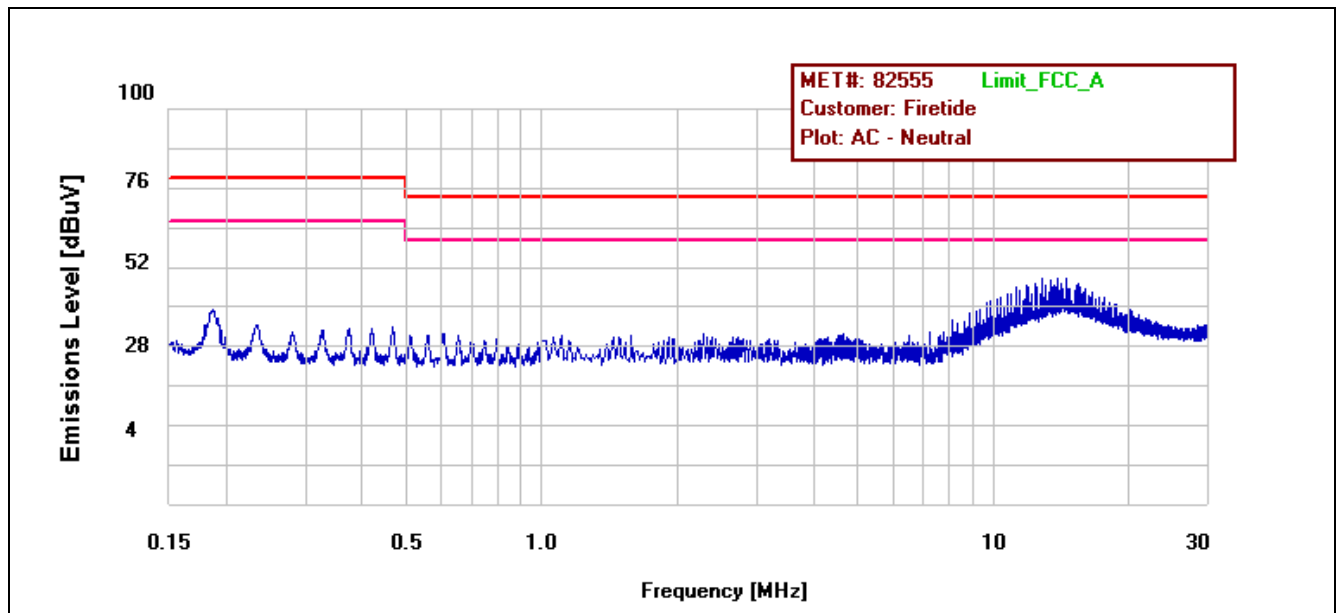


**Plot 4. Conducted Emission, Neutral Line Plot, PoE30U-560**

### Conducted Emission Limits Test Setup



Photograph 3. Conducted Emissions, Test Setup 1, FSP040-DGAA5

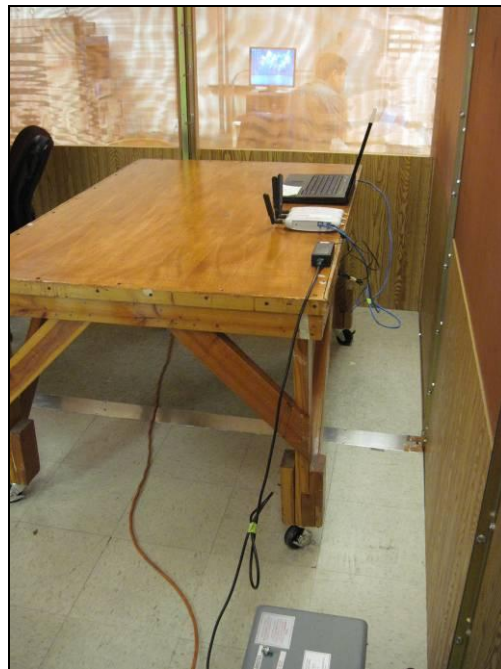

Photograph 4. Conducted Emissions, Test Setup 2, FSP040-DGAA5





**Photograph 5. Conducted Emissions, Test Setup 1, PoE30U-560**



**Photograph 6. Conducted Emissions, Test Setup 2, PoE30U-560**



## Radiated Emission Limits

### § 15.109 Radiated Emissions Limits

**Test Requirement(s):** **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 12.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 12.

Frequency (MHz)	Field Strength (dBµV/m)	
	§15.109 (b), Class A Limit (dBµV) @ 10m	§15.109 (a), Class B Limit (dBµV) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 12. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:** The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:** The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Kenshi Chung and Anderson Soungpanya

**Test Date(s):** 08/13/10 and 08/16/10




### Radiated Emissions Limits Test Results, Class A


Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
374.998	H	179	293	53.309	15.2	40	3.198	0	31.707	46.4	-14.693
625.008	H	19	138	48.63	19.201	40	4.192	0	32.023	46.4	-14.377
749.972	H	290	115	50.359	19.301	40	4.561	0	34.221	46.4	-12.179
749.969	V	225	206	42.982	19.301	40	4.561	0	26.844	46.4	-19.556
749.972	V	82	271	45.349	19.301	40	4.561	0	29.211	46.4	-17.189
799.958	V	264	187	40.421	19.999	40	4.755	0	25.175	46.4	-21.225
225.802	V	51	100	51.718	9.848	40	2.381	0	23.947	46.4	-22.453
42.302	V	170	374	50.364	11.579	40	1.002	0	22.945	39	-16.055
226.24	H	0	400	56.209	9.874	40	2.371	0	28.454	46.4	-17.946
1133.4	V	18.40	108.9	74.71	24.791	51.978	0	-10.46	37.063	49.5	-12.437

**Table 13. Radiated Emissions Limits, Test Results, FSP040-DGAA5**

Note: The EUT was tested at 3 m.

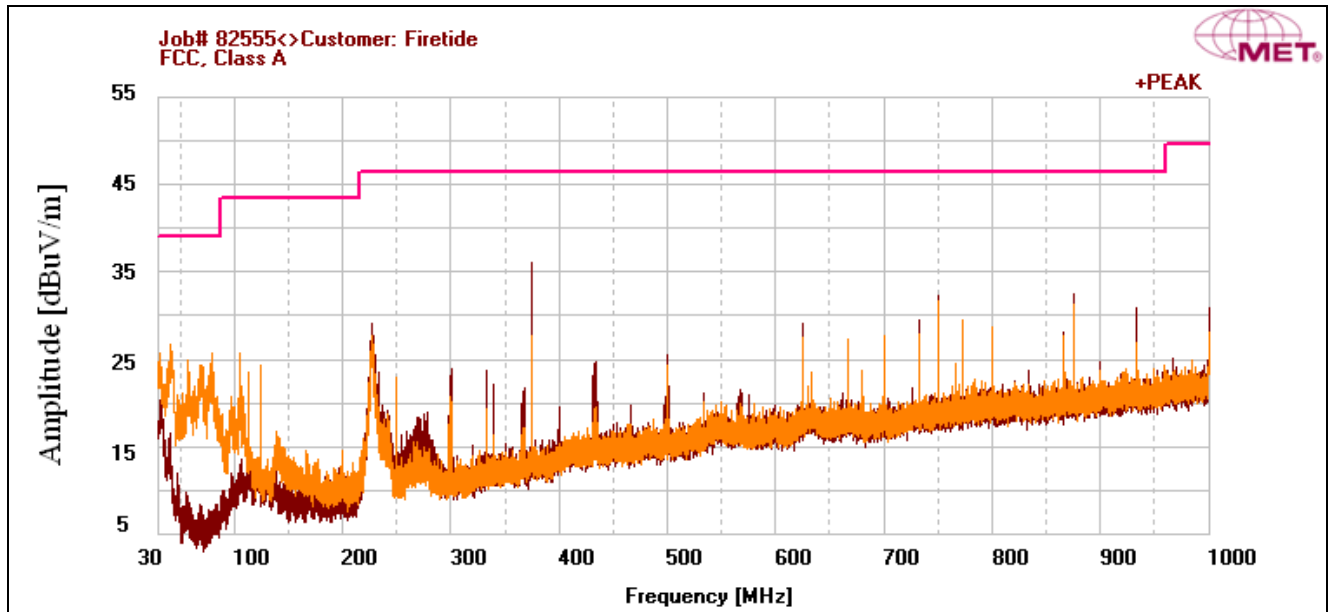

**Plot 5. Radiated Emissions, 30 MHz - 1 GHz, FSP040-DGAA5**

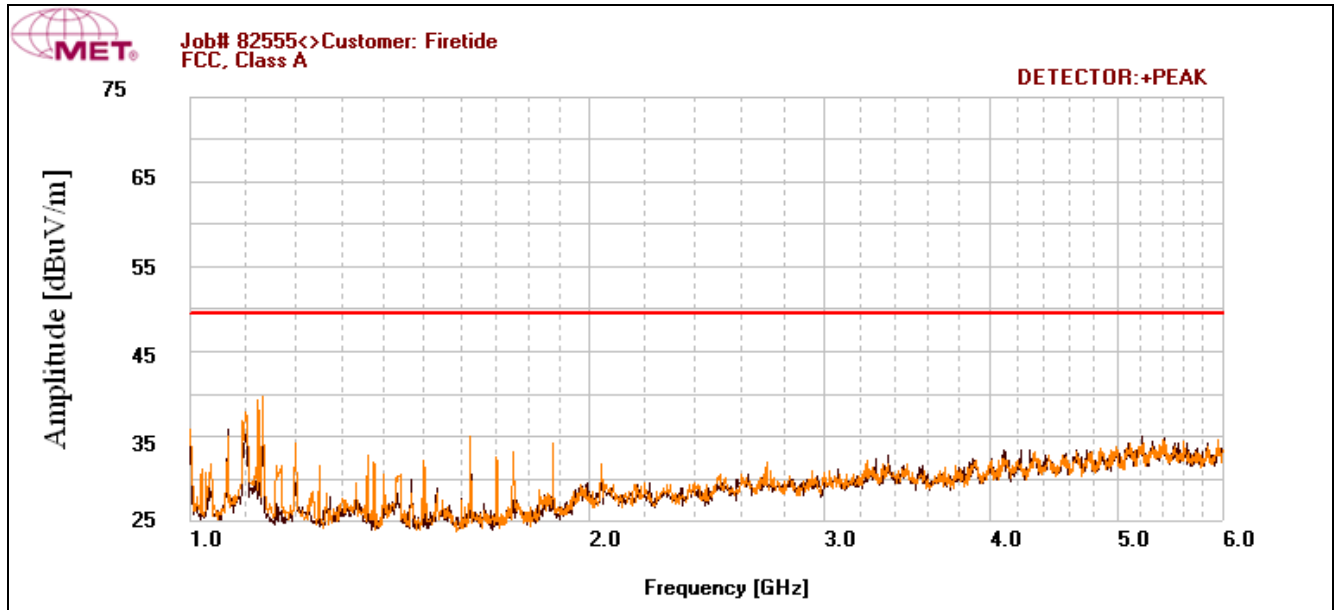

Plot 6. Radiated Emissions, Above 1 GHz, FSP040-DGAA5




### Radiated Emissions Limits Test Results, Class A


Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
47.78	V	0	100	34.15	8.444	0	1.757	-10.46	33.891	39	-5.109
227.39	V	322	100	17.21	11.296	0	3.817	-10.46	21.863	46.4	-24.537
228.2	H	0	100	30.37	11.056	0	3.814	-10.46	34.78	46.4	-11.62
300	H	322	100	25.65	13.9	0	3.57	-10.46	32.66	46.4	-13.74
333.33	H	164	100	20.86	14.767	0	3.763	-10.46	28.93	46.4	-17.47
800	H	330	100	19.91	20.9	0	6.23	-10.46	26.164	54	-27.836
1125	V	360	100	78.15	27.485	76.893	7.882	-10.46	28.626	54	-25.374
1000	H	0	100	81.6	27.216	77.23	7.5	-10.46	23.614	54	-30.386
1125	H	0	100	75.6	27.485	76.893	7.882	-10.46	26.164	54	-27.836

Table 14. Radiated Emissions Limits, Test Results, PoE30U-560

Note: The EUT was tested at 3 m.

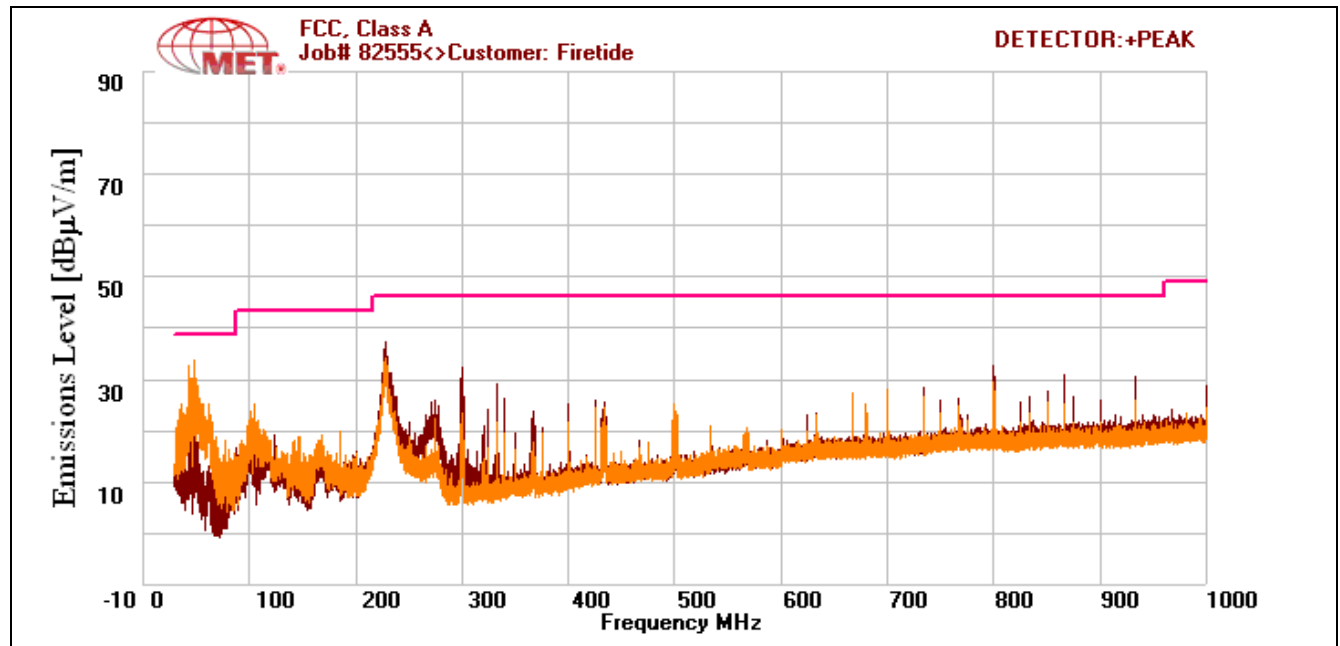

Plot 7. Radiated Emissions, 30 MHz – 1 GHz, PoE30U-560

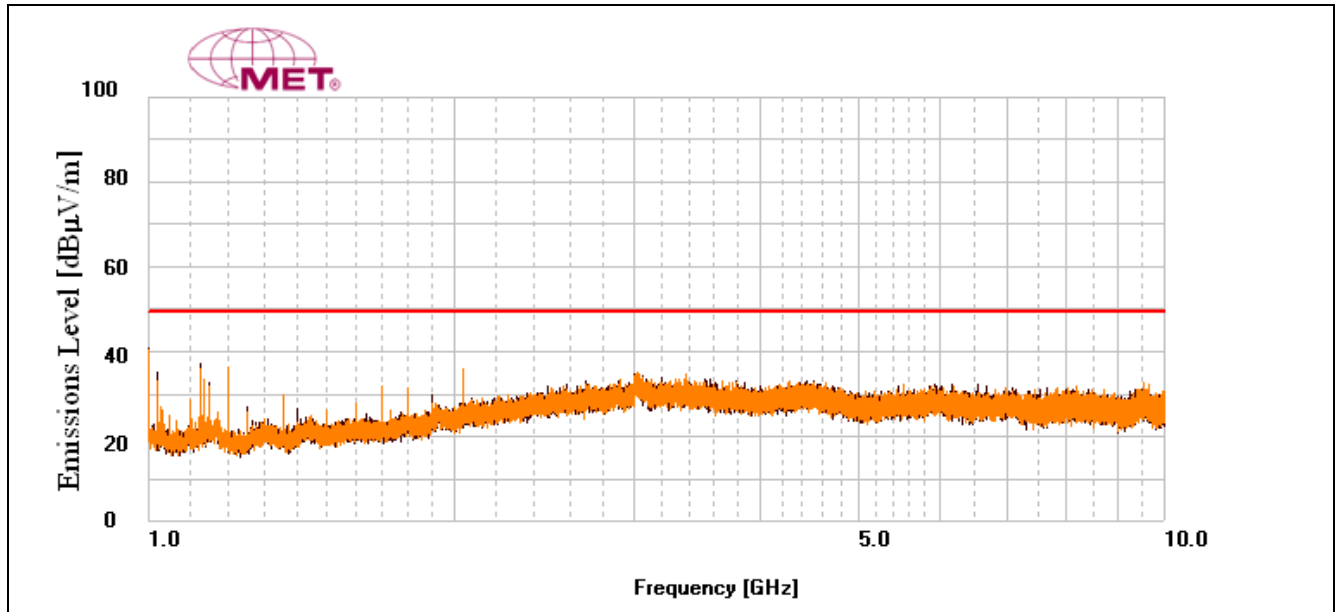

Plot 8. Radiated Emissions, 1 GHz – 10 GHz, PoE30U-560

## Radiated Emission Limits Test Setup



Photograph 7. Radiated Emission, Test Setup, 30 MHz – 1 GHz



Photograph 8. Radiated Emission, Test Setup, Above 1 GHz





## **IV. Electromagnetic Compatibility Criteria for Intentional Radiators**





## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The unit is professionally installed. Therefore, the EUT as tested is compliant with the criteria of §15.203.

Frequency	Gain/Type	Manufacturer
(5 GHz)	3 dBi Omni	Master Wave Technology CO., LTD

**Test Engineer(s):** Anderson Soungpanya

**Test Date(s):** 08/25/10



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

**Test Requirement(s):** § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 15. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter.

**Test Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.403(c) 26dB Bandwidth

**Test Requirements:** § 15.403 (i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to low, mid and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

**Test Results** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(a)(3) RF Power Output

**Test Requirements:** §15.407(a)(3): The maximum output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit
5150-5250	50mW
5250-5350	250mW
5470-5725	250mW
5725-5825	1W

**Table 16. Output Power Requirements from §15.407**

§15.407(a)(1): For the band 5.150 – 5.250 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz.

**Test Procedure:** The EUT was connected to a Spectrum Analyzer. The power was measured on three channels.

**Test Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## § 15.407(f) RF Exposure

**RF Exposure Requirements:** §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

Equation from page 18 of OET 65, Edition 97-01

$$S = P G / 4\pi R^2$$

where,

S = Power Density mW/m<sup>2</sup>

P = Power (mW)

R = Distance to the center of radiation of the antenna

G = Maximum antenna gain

Maximum antenna gain for EUT = 3 dBi

MPE Limit Calculation: EUT's operating frequency is 5150 - 5250 MHz. Highest conducted power = 16.52dBm. Therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup>**.

$$S = (44.87 * 1.99 / 4 * 3.14 * 20.0^2) = (89.53 / 5024) = \mathbf{0.017mW/cm^2} @ 20cm separation$$



Firetide, Inc.

Firetide Indoor MIMO Access Points, Model 5100

Electromagnetic Compatibility  
for Intentional Radiators

CFR Title 47, Part 15B, 15.407; RSS-210 Annex 9 & ICES-003

---

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(a)(3) Peak Power Spectral Density

**Test Requirements:** § 15.407(a)(3): The peak power spectral density shall not exceed 17 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23dBi without any corresponding reduction in the transmitter peak output power or peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, Omni directional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement #2 from the FCC Public Notice DA 02-2138 was used.

**Test Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(a)(6) Peak Excursion Ratio

**Test Requirements:** § 15.407(a)(6): The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

**Test Procedure:** The EUT was connected directly to the spectrum analyzer through cabling and attenuation. The 1<sup>st</sup> trace on the spectrum analyzer was set to RBW=1MHz, VBW=3MHz. The peak detector mode was used and the trace max held. The 2<sup>nd</sup> trace on the spectrum analyzer was set according to measurement method #1 from the FCC Public Notice DA 02-2138 for making conducted power measurements.

**Test Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b) Undesirable Emissions

**Test Requirements:** § 15.407(b)(4), (b)(6), (b)(7), §15.205: Emissions outside the frequency band.

§ 15.407(b)(4): For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The transmitter was placed on a wooden stand inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. Only noise floor was measured above 18GHz.

For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Emissions were explored up to 40 GHz.

The equation,  $EIRP = E + 20 \log D - 104.8$  was used to convert an EIRP limit to a field strength limit.

E = field strength (dBuV/m)

D = Reference measurement distance (m)

**Test Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.





## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(g) Frequency Stability

- Test Requirements:** § 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.
- Test Procedure:** The EUT was connected directly to a spectrum analyzer through a attenuator. The resolution band width of the spectrum analyzer was set to 100 KHz. A delta marker was used to verify that the carrier's peak to band edge remained at least 20dBc.
- Test Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### RSS-GEN Receiver Spurious

**Test Requirement:** If the device has a detachable antenna of known antenna impedance, then the antenna conducted method is permitted in lieu of a radiated measurement.

If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30 – 1000 MHz, or 5 nanowatts above 1 GHz.

**Test Procedure:** The EUT was directly connected to a spectrum analyzer. Testing was performed when the EUT was receiving. Testing was performed conducted.

**Results:** Refer to FCC ID: NKR-DNMA83/IC: 4441A-DNMA83.



## IV. Test Equipment



## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2501	EMI RECEIVER	ROHDE&SCHWARZ	ESU40	06/03/2010	06/03/2011
1S2484	BILOG ANTENNA	TESEQ	CBL6112D	1/27/2009	1/27/2011
1S2399	TURNTABLE CONTROLLER	SUNOL SCIENCE	SC99V	NOT REQUIRED	
1S2522	DIGITAL THERMO/HYGROMETER	CONTROL COMPANY	11-661-7D	11/11/2009	11/11/2010
1S2482	5M CHAMBER	PANASHIELD	N/A	10/16/2009	10/16/2010
1S2603	DOUBLE RIDGED WAVEGUIDE HORN	ETS-LINGREN	3117	04/09/2009	04/09/2011
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	SEE NOTE	
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	05/26/2009	06/26/2010
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	05/26/2009	06/26/2010
1S2034	COUPLER, DIRECTIONAL 1-20 GHZ	KRYTAR	101020020	SEE NOTE	
1S2583	SPECTRUM ANALYZER	AGILENT	E4447A	01/26/2010	01/26/2011
1S2460	ANALYZER, SPECTRUM 9 KHZ-40GHZ	AGILENT	E4407B	07/13/2010	07/213/2011
1S2229	TEMPERATURE CHAMBER	TENNY ENGINEERING	T63C	02/19/2010	02/19/2011
1S2128	HARMONIC MIXER	HEWLETT PACKARD	11970A	11/22/2008	11/22/2010
1S2129	HARMONIC MIXER	HEWLETT PACKARD	11970K	11/22/2008	11/22/2010

**Table 17. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



## V. Certification & User's Manual Information



---

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



---

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.





---

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



---

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



---

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



# End of Report