



Electromagnetic Compatibility Criteria Test Report

for the

**Firetide
Model 6200 Outdoor Unit**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Part 15.247, Subpart C
for Intentional Radiators

MET Report: EMC21543-FCC247

March 8, 2007

Prepared For:

**Firetide
16795 Lark Ave, Suite 200
Los Gatos, CA 95032**

Prepared By:
MET Laboratories, Inc.
4855 Patrick Henry Dr., Building 6
Santa Clara, CA 95054



**Electromagnetic Compatibility Criteria
Test Report**


for the

**Firetide
Model 6200 Outdoor Unit**


Tested Under

the FCC Certification Rules
contained in
Title 47 of the CFR, Part 15.247, Subpart C
for Intentional Radiators


Shawn McMillen, Project Engineer
Electromagnetic Compatibility Lab


Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15 Subpart B & Part 15.247, of the FCC Rules under normal use and maintenance.


Tony Permsombut, Manager
Electromagnetic Compatibility Lab



Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	March 8, 2007	Initial Issue.



Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview	4
	B. References	5
	C. Test Site	6
	D. Description of Test Sample	6
	E. Equipment Configuration	10
	F. Support Equipment	11
	G. Ports and Cabling Information	12
	H. Mode of Operation	13
	I. Method of Monitoring EUT Operation	13
	J. Modifications	13
	a) Modifications to EUT	13
	b) Modifications to Test Standard	13
	K. Disposition of EUT	13
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	14
	§ 15.107(a) Conducted Emissions Limits	15
	§ 15.109(a) Radiated Emission Limits	19
	§ 15.09(a) Radiated Emissions Limits	19
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators	23
	§ 15.203 Antenna Requirement	24
	§ 15.207(a) Conducted Emissions Limits	25
	§ 15.247(a) 6 dB and 99% Bandwidth	31
	§ 15.247(b) Peak Power Output and RF Exposure	41
	§ 15.247(d) Spurious Emissions Requirements – Radiated and RF Conducted	44
	§ 15.247(e) Peak Power Spectral Density	82
V.	Test Equipment	89
VI.	Certification & User’s Manual Information	91
	A. Certification Information	92
	B. Label and User’s Manual Information	96



List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. Frequency Allocation for 802.11a/b/g.....	5
Table 3. Equipment Configuration (Radiated Emissions).....	10
Table 4. Support Equipment (Unintentional)	11
Table 5. Support Equipment (Intentional).....	11
Table 6. Ports and Cabling Information (Unintentional).....	12
Table 7. Ports and Cabling Information (Intentional)	12
Table 8. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b).....	15
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	16
Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	16
Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	19
Table 12. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz.....	20
Table 13. Radiated Emissions from 1 GHz to 5 GHz	21
Table 14. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	25
Table 15. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	26
Table 16. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	26
Table 17. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	28
Table 18. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	28
Table 19. Output Power Requirements from §15.247.....	41
Table 20. Restricted Bands of Operation.....	44

List of Figures

Figure 1. Block Diagram of Test Configuration (Radiated Emissions).....	7
Figure 2. Block Diagram of Test Configuration (Conducted Measurement)	8
Figure 3. Block Diagram of Test Configuration (Frequency Stability).....	9

List of Photographs

Photograph 1. Firetide 6200 Outdoor Unit.....	6
Photograph 2. Conducted Emissions Test Setup	18
Photograph 3. Radiated Emission Limits Test Setup	22
Photograph 4. Conducted Emissions Test Setup Photograph.....	30
Photograph 5. Test Equipment and setup for various Radiated Measurements.....	67
Photograph 6. Test Equipment and setup for various Radiated Measurements.....	68
Photograph 7. Test Equipment and setup for various Radiated Measurements.....	68
Photograph 8. Test Equipment and setup for various Radiated Measurements.....	69



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current μ
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GR-1089-CORE	(GR) General Requirement(s) imposed by the NEBS standard, (CORE) Central Office Recovery Express (AT&T), (1089) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Firetide 6200 Outdoor Unit, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the 6200 Outdoor Unit. Firetide should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the 6200 Outdoor Unit, has been **permanently** discontinued

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Firetide, purchase order number 1650. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	RSS-210 and RSS-GEN	Description	Results
Transmitter Mode (TX)			
§15.207	6.6	AC Power Line Conducted Emissions	Compliant
§15.203/15.247(c)	A8.4	Antenna Requirement	Compliant
§15.247(a)(3)	A8.2	6dB Occupied Bandwidth	Compliant
§15.247(b)(3)	A8.4	Maximum Peak Conducted Output Power	Compliant
§15.247(d), §15.205, §15.209	A8.5	Spurious Radiated and Conducted Emissions	Compliant
§15.247(e)	A8.2/RSS-102	Peak Power Spectral Density and RF Exposure	Compliant
Receiver Mode (RX)			
15.107	7.4	AC Power Line Conducted Emissions	Compliant
15.109	7.3	Radiated Spurious Emissions	Compliant

Table 1 Executive Summary of EMC Part 15.247 Compliance Testing



II. Equipment Configuration



A. Overview

MET Laboratories, Inc. was contracted by Firetide to perform testing on the 6200 Outdoor Unit, under Firetide's purchase order number 1650.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Firetide, 6200 Outdoor Unit.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	6200 Outdoor Unit	
Model(s) Covered:	6200 Outdoor Unit	
EUT Specifications:	Primary Power: 100-240V	
	FCC ID: REP-6200-1	
	Type of Modulations:	-Orthogonal Frequency Division Multiplexing (OFDM) - Direct Sequence Spread Spectrum (DSSS)
	Emission Designators:	802.11b: 12M8D7D
		802.11g: 16M9D7D
		802.11a: 16M3D7D
	Equipment Code:	DTS
	Peak RF Output Power:	802.11 b: 24.33dBm
		802.11 g: 26.53dBm
		802.11 a: 25.6dBm
EUT Frequency Ranges:	2412 – 2462 MHz	
	5745 – 5850 MHz	
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature (15-35° C)	
	Relative Humidity (30-60%)	
	Barometric Pressure (860-1060 mbar)	
Evaluated by:	Shawn McMillen	
Date(s):	March 8, 2007	



Channel Number	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
149	5745
153	5765
157	5785
161	5805
165	5825

Table 2. Frequency Allocation for 802.11a/b/g

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories


C. Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Dr., Building 6, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by A2LA (Certificate Number 591.02).

D. Description of Test Sample

The Firetide Hotport Wireless Mesh Node Router, Model 6200, Equipment Under Test (EUT) for the remainder of this document, is a wireless communications system operating in the 2.4GHz & 5GHz spectrum.

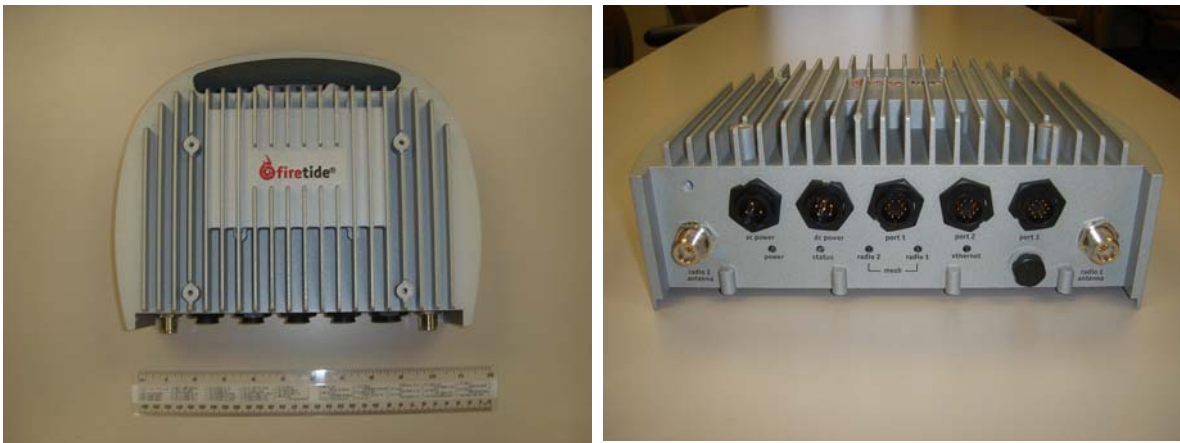

Photograph 1. Firetide 6200 Outdoor Unit

Unintentional Emission
&
Intentional Radiated

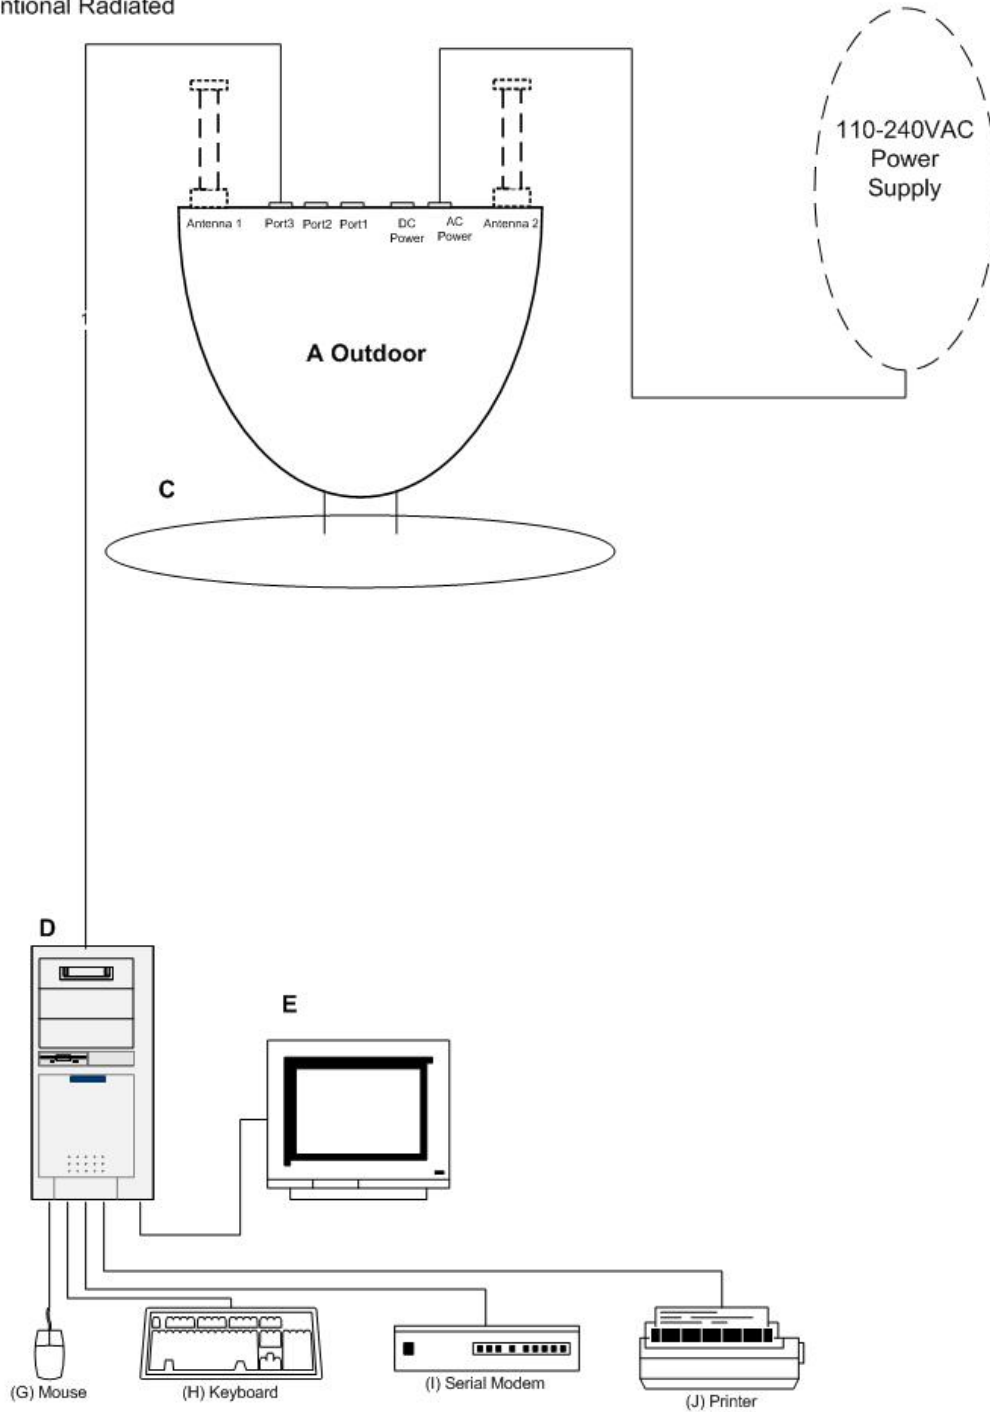


Figure 1. Block Diagram of Test Configuration (Radiated Emissions)

Outdoor Conducted Measurement

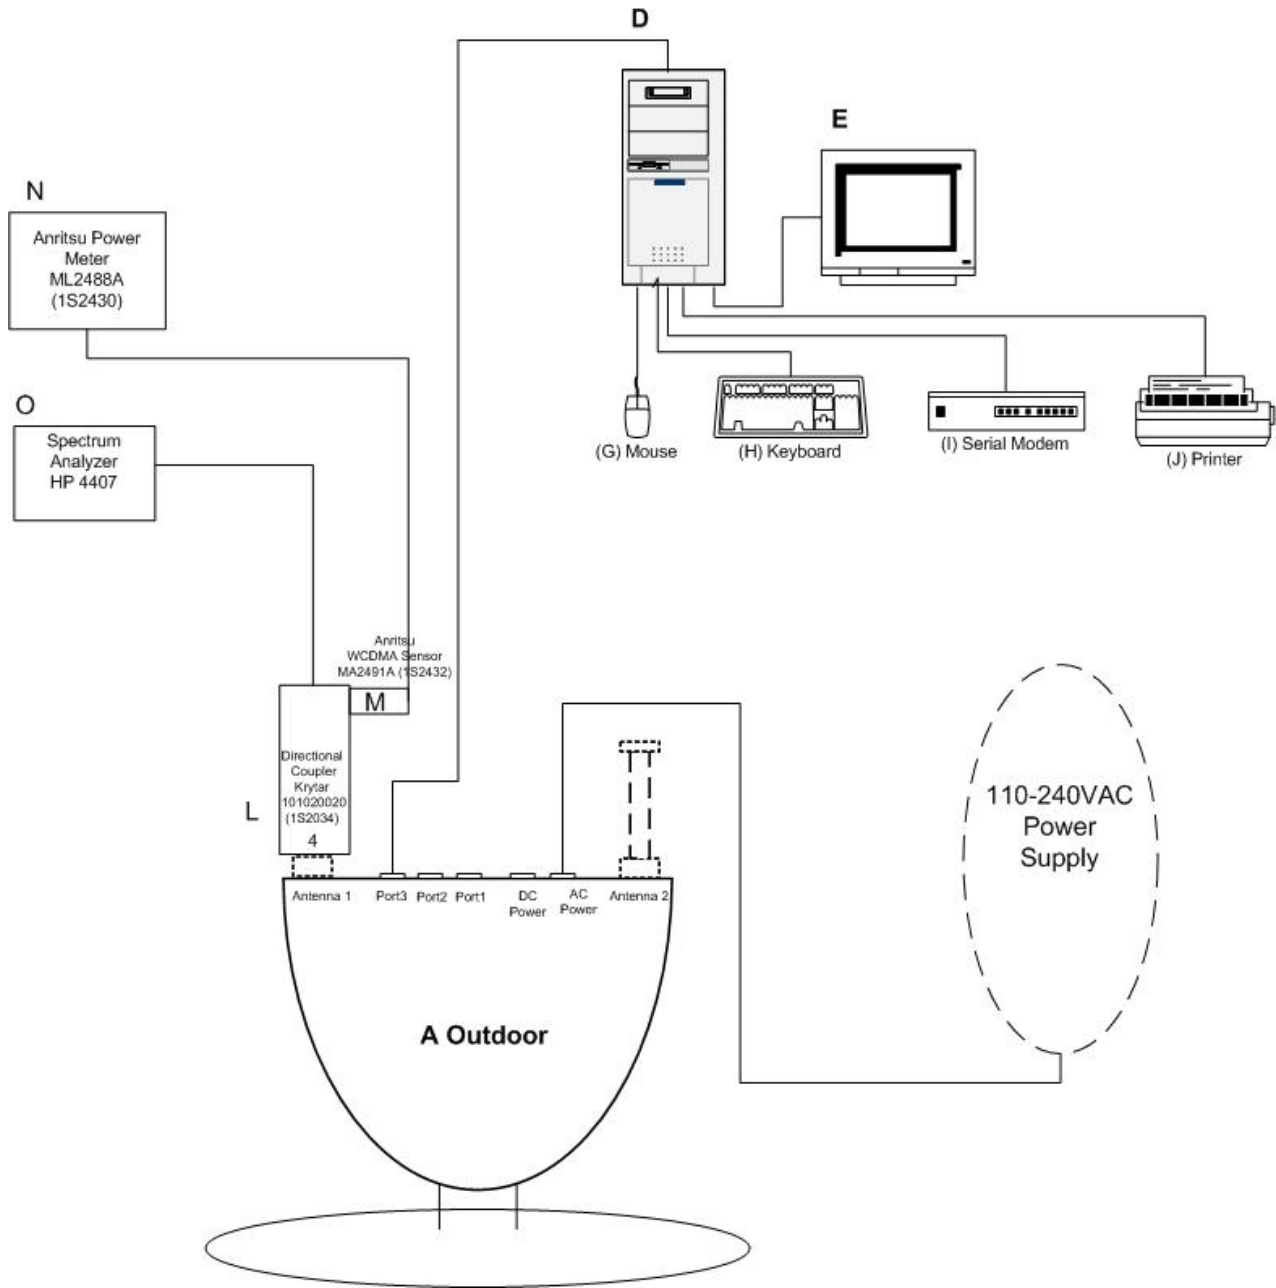


Figure 2. Block Diagram of Test Configuration (Conducted Measurement)

Outdoor Frequency Stability

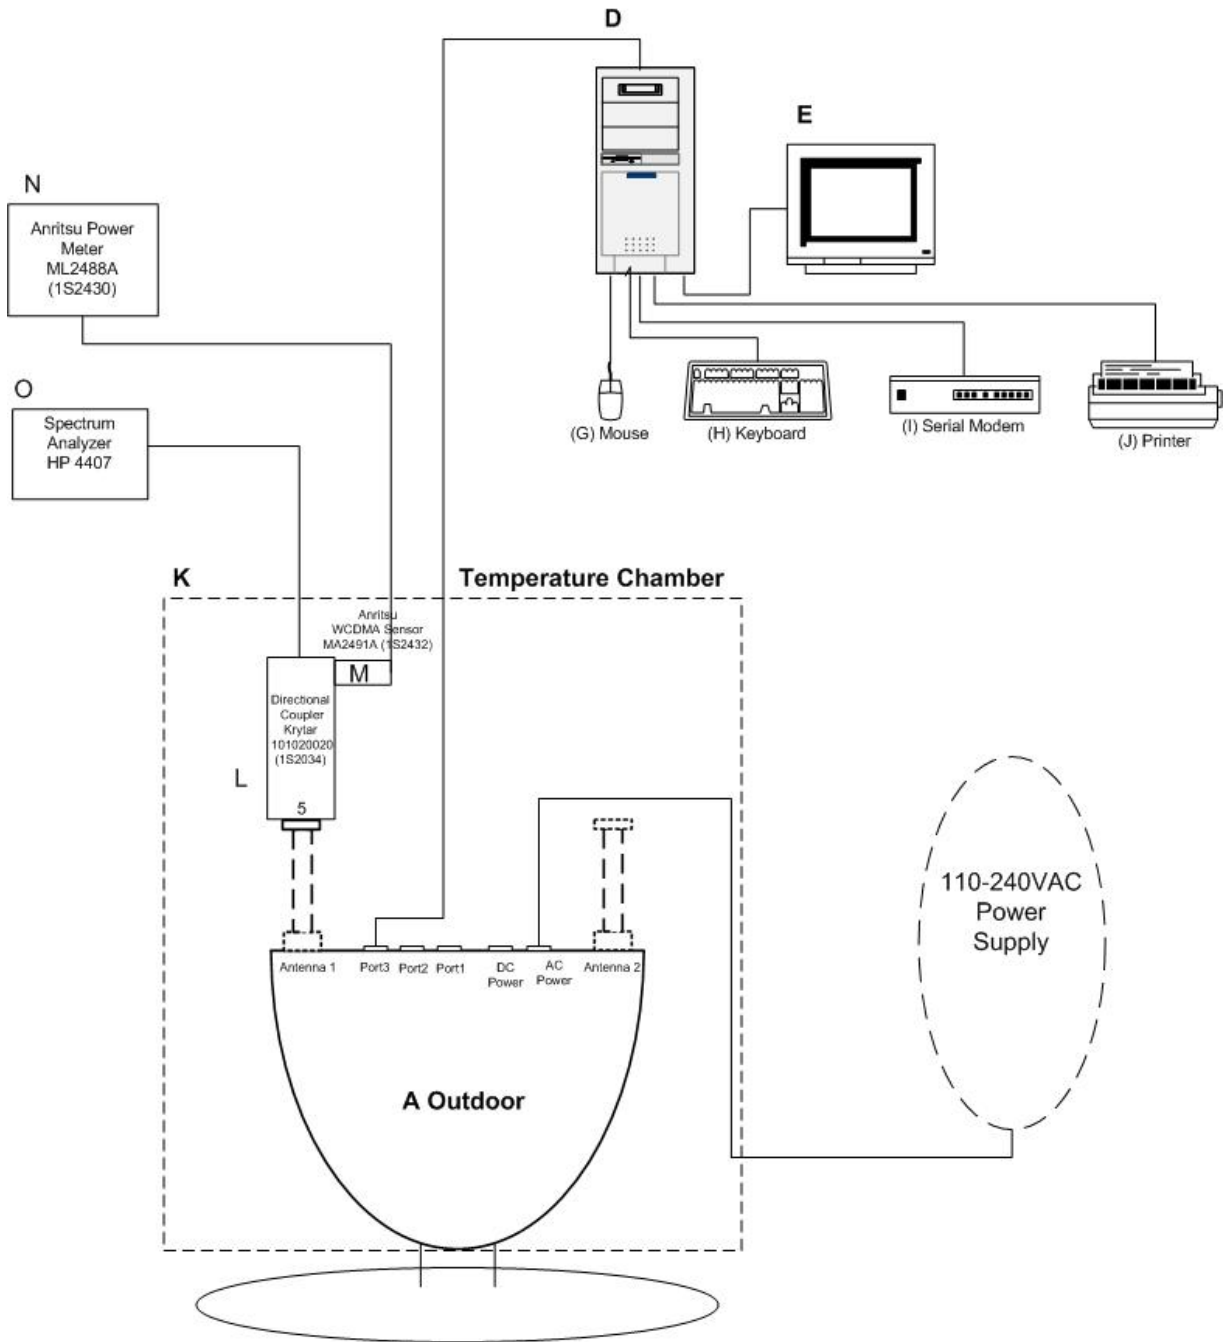


Figure 3. Block Diagram of Test Configuration (Frequency Stability)



E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A Outdoor	Outdoor Unit (Firetide)	6200	N/A
A Outdoor, Antenna 1&2	Antenna 2.4 GHz OMNI 5 dBi	N/A	200-0035-001
	Antenna 5.1-5.8 GHz OMNI 5 dBi	N/A	200-0037-001
	Antenna 2.4 GHz OMNI 8 dBi	N/A	200-0048-001
	Antenna 2.4 GHz OMNI 7.5 dBi	N/A	200-0059-001
	Antenna 2.4 GHz OMNI 7.5 dBi	N/A	200-0045-001
	Antenna 2.4 / 5.1-5.8 GHz (dual band) OMNI 6/8 dBi	N/A	200-0057-001
	Antenna 5.1-5.8 GHz OMNI 10 dBi	N/A	200-0050-001
	Antenna 5.1-5.8 GHz OMNI 10 dBi	N/A	200-0058-001
	Antenna 2.4 GHz Sector 15.5 dBi	N/A	
	Antenna 5.1-5.8 GHz Sector 16 dBi	N/A	200-0056-001
	Antenna 2.4 GHz PANEL 16 dBi	N/A	200-0051-001
	Antenna 5.1-5.8 GHz PANEL 23 dBi	N/A	200-0053-001
B	AC Adapter (Hon-Kwang)	HK-XW60-A15	KXXXXXXXXXG

Table 3. Equipment Configuration (Radiated Emissions)



F. Support Equipment

Firetide supplied support equipment necessary for the operation and testing of the 6200 Outdoor Unit. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
C	Mounting Station	MET Labs	N/A	N/A
D	Computer	Dell	Optiplex GX 100	N/A
E	Monitor	Dell	E551	N/A
F	Spectrum Analyzer	HP	8591E	N/A
G	Mouse	Microsoft	WheelMouse 3.0	N/A
H	Keyboard	Dell	RT7D5JTW	N/A
I	Serial Modem	Ramp Networks	WebRamp 200FX	N/A
J	Printer	HP	Deskjet 895Cse	N/A

Table 4. Support Equipment (Unintentional)

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
C	Mounting Station	MET Labs	N/A	N/A
D	Computer	Dell	Optiplex GX100	N/A
E	Monitor	Dell	E551	N/A
F	Spectrum Analyzer	HP	8591E	N/A
G	Mouse	Microsoft	WheelMouse 3.0	N/A
H	Keyboard	Dell	RT7D5JTW	N/A
I	Serial Modem	Ramp Networks	WebRamp 200FX	N/A
J	Printer	HP	Deskjet 895Cse	N/A
K	Temperature Chamber	Tenny Engineering	T630	N/A
L	Directional Coupler	Krytar	101020020	N/A
M	WCDMA Sensor	Aritsu	MA2491A	N/A
N	Power Meter	Aritsu	ML2488A	N/A
O	Spectrum Analyzer	HP	4407	N/A
P	VariAC	Staco	3PN2210	N/A

Table 5. Support Equipment (Intentional)

* The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

** The AC/DC Adapter was used to power the EUT for testing purpose only, will not be sold with radio.



G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
Emission Testing						
1	A Outdoor, Ethernet	CAT5	1	2.5	Yes	D
2	A Outdoor, Power Input	AC	1	1	No	110-240VAC Power Supply
Emission Testing (External Power Supply)						
1	A Outdoor, Ethernet	CAT5	1	2.5	Yes	D
2	A Outdoor, Power Input	AC	1	1	No	B
3	B	AC	1	1	No	110-240VAC Power Supply

Table 6. Ports and Cabling Information (Unintentional)

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
Conductive Measurements						
1	A Outdoor, Ethernet	CAT5	1	2.5	Yes	D
2	A Outdoor, AC Power Input	AC	1	1	No	110-240VAC Power Supply
3	A Outdoor, Antenna 1	Direct Connect	1	N/A	N/A	L
Frequency Satiability						
1	A Outdoor, Ethernet	CAT5	1	2.5	Yes	D
2	A Outdoor, AC Power Input	AC	1	1	No	110-240VAC Power Supply
3	A Outdoor, Antenna 1	Direct Connect	1	N/A	N/A	L
Radiated						
1	A Outdoor, Ethernet	CAT5	1	2.5	Yes	D
2	A Outdoor, Power Input	AC	1	1	No	110-240VAC Power Supply
3	A Antenna 1	Direct Connect	1	N/A	N/A	50Ohms Load terminator
4	A Antenna 2	Direct Connect	1	N/A	N/A	50Ohms Load terminator

Table 7. Ports and Cabling Information (Intentional)



H. Mode of Operation

The EUT was operated in the following manner:

Telnet was used to access the radio in order to change the channel frequency, bit rate and to turn on/off the transmitter.

I. Method of Monitoring EUT Operation

A Spectrum Analyzer and a Power Meter were used to monitor the EUT's transmitter channel and power output.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Firetide upon completion of testing.



III. Electromagnetic Compatibility Criteria for Unintentional Radiators



Electromagnetic Compatibility Criteria for Unintentional Radiators

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 8. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

15.107 (b) “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 8. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dBµV)		15.107(a), Class B Limits (dBµV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Table 8. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)

Test Procedures: The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50Ω/50µH LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were measured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s): Billy Kwan

Test Date(s): January 18, 2007



Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
4.624	45.28	73	PASS	-27.72	44.52	60	PASS	-15.48
0.814	30.27	73	PASS	-42.73	26.09	60	PASS	-33.91
23.128	34.15	73	PASS	-38.85	32.49	60	PASS	-27.51

Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)


Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
4.624	45.07	73	PASS	-27.93	44.26	60	PASS	-15.74
0.813	32.93	73	PASS	-40.07	28.34	60	PASS	-31.66
23.127	33.97	73	PASS	-39.03	30.54	60	PASS	-29.46


Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)



Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz)

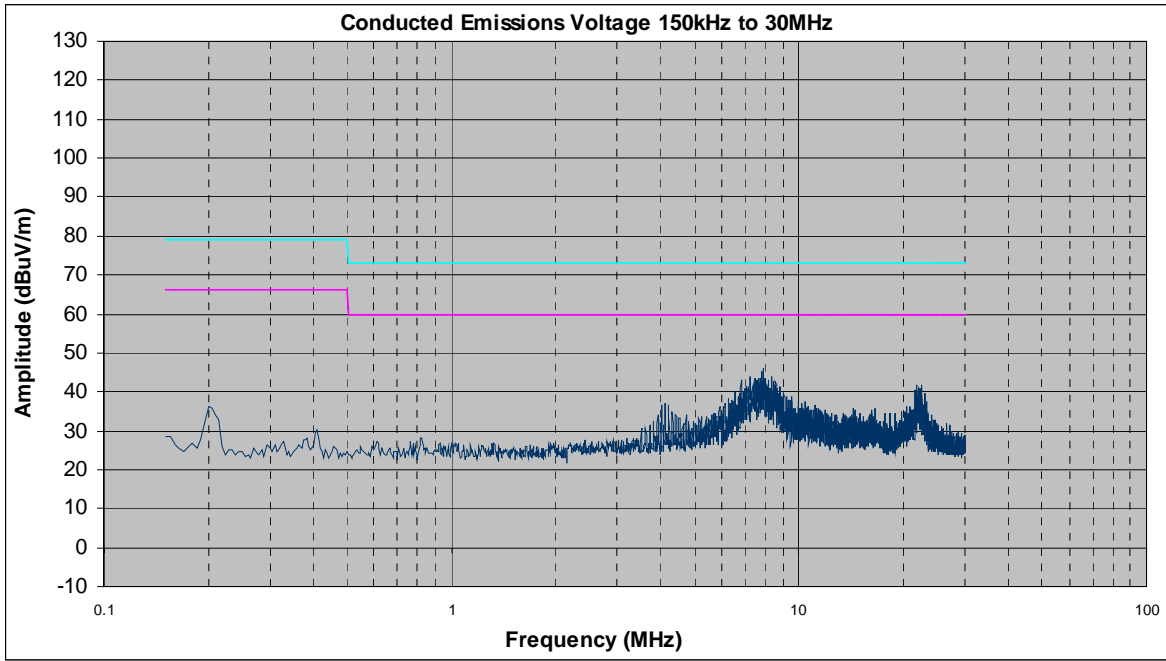

Conducted Emission, Phase Line Plots

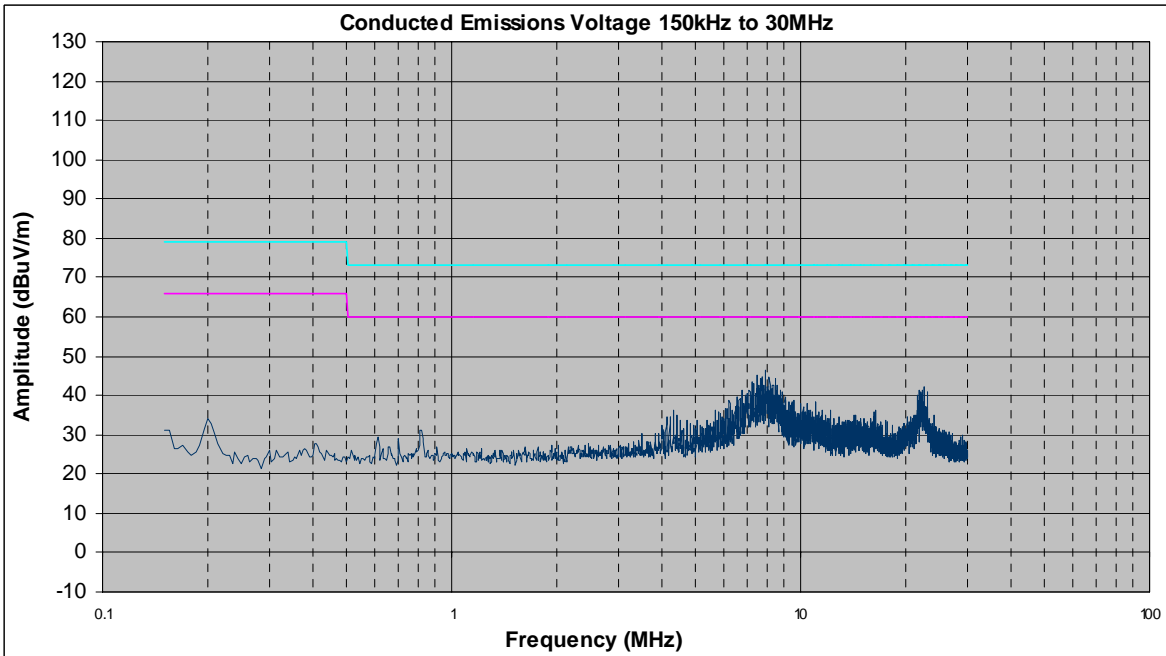

Conducted Emission, Neutral Line Plots

Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions Test Setup



Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 11.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 11.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was found Compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits

Test Engineer(s): Billy Kwan

Test Date(s): January 18, 2007




Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude QP Detector (dBuv)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
64.8	V	158	2.31	26.26	5.80	1.33	33.39	39.00	-5.61
*133.36	V	330	1	27.52	11.87	2.07	41.47	43.50	-2.03
270	H	142	3.43	19.41	13.20	2.73	35.34	46.40	-11.06
270	V	219	1	15.03	13.70	2.73	31.46	46.40	-14.94
400	V	321	1	19.41	16.10	3.50	39.01	46.40	-7.39
400	H	45	2.07	20.22	15.80	3.50	39.52	46.40	-6.88

Table 12. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz

* - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

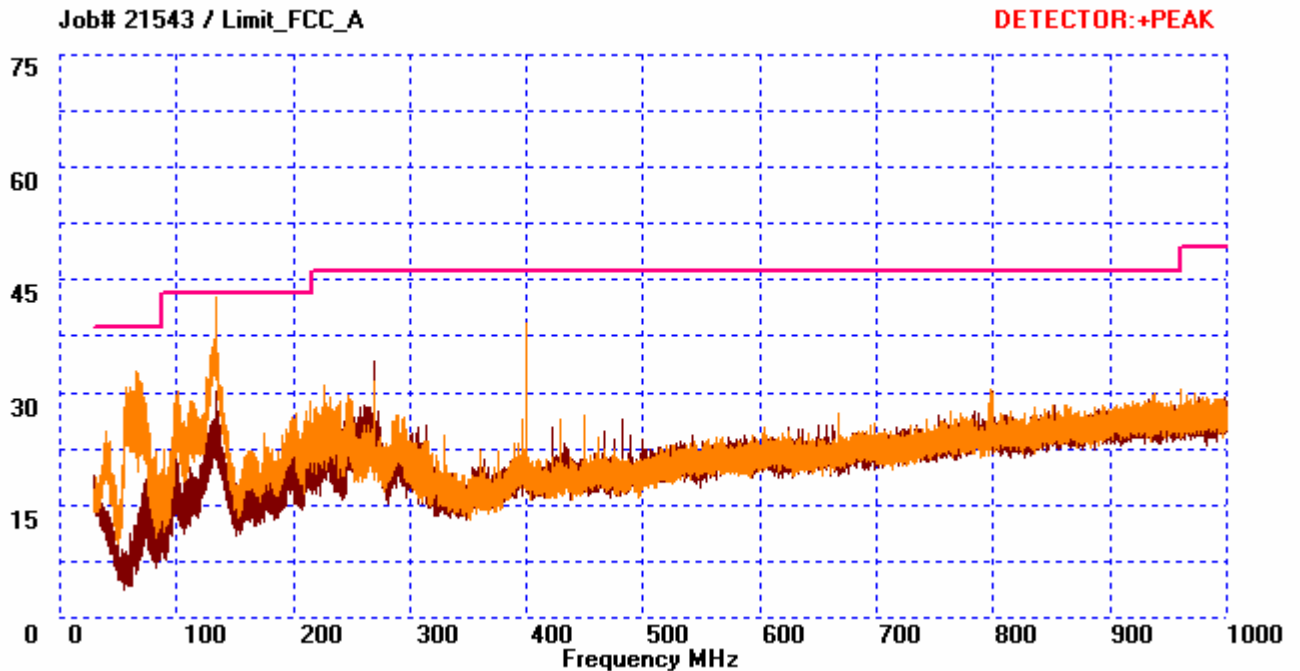

Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class A



Radiated Emissions Limits Test Results, Class A

Freq. (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 3 m (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit per FCC pt.15 @ 3 m (dBuV/m)	Delta (dB)
1.0472	235	H	1	44.93	35.16	24.49	2.17	10.46	25.97	49.5	-23.53
1.056	176	V	1	27.24	35.17	24.96	2.17	10.46	8.75	49.5	-40.75
1.0832	60	H	1	39.93	35.18	24.56	2.19	10.46	21.04	49.5	-28.46
1.125	95	H	1.22	44.39	35.21	24.65	2.22	10.46	25.59	49.5	-23.91
1.178	148	V	1.5	43.82	35.23	25.32	2.25	10.46	25.71	49.5	-23.79
1.252	120	H	1.71	43.73	35.23	24.96	2.31	10.46	25.30	49.5	-24.20
1.374	0	V	1.15	54.87	35.19	25.96	2.42	10.46	37.60	49.5	-11.90
1.3748	336	H	2.02	47.05	35.19	25.30	2.42	10.46	29.12	49.5	-20.38
5	0	H	1	30.43	35.07	34.70	5.34	10.46	24.94	49.5	-24.56
5	0	V	1	30.65	35.07	34.90	5.34	10.46	25.36	49.5	-24.14

Table 13. Radiated Emissions from 1 GHz to 5 GHz

Note: When transmit mode or receive mode were activated, there are no differences to emissions. For above 1 GHz measurement up to 5th harmonic of the highest operating frequency, emissions are noise floor during receive mode.



Photograph 3. Radiated Emission Limits Test Setup



IV. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested meets the criteria of this rule by virtue of having professionally installed. The EUT is therefore compliant with §15.203.

Antennas		
Model No. / Gain	Frequency Band	Vendor
C812-510010-A / 5dBi	2.4	Wha Yu
MA-WA24-1X / 16dBi	2.4	Mars
MFB24008 / 8dBi	2.4	Maxrad
MA-WO24-8X / 7.5dBi	2.4	Mars
SF-245W / 7.5dBi	2.4	NCG Comet
MA-WD24-6XB / 15.5dBi	2.4	Mars
MMO24580608 / 6dBi & 8dBi	2.4/5.1-5.8 (Dual Band)	Maxrad
MMO58010NF / 10dBi	5.1-5.8	Maxrad
MA-WO55-10 / 10dBi	5.1-5.8	Mars
C812-510012-A / 5dBi	5.1-5.8	Wha Yu
MA-WD50-6X / 16dBi	5.1-5.8	Mars
MA-WA58-1X MNT / 23dBi	5.1-5.8	Mars

Test Engineer(s): Shawn McMillen



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 14. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

Test Results: The EUT was found to be compliant with the requirement(s) of this section. Measured emissions were below applicable limits

Test Engineer(s): Billy Kwan

Test Date(s): January 19 & March 5, 2007



Conducted Emissions - Voltage, AC Power, Phase Line -Internal Power Supply

Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.202	34.55	63.53	PASS	-28.98	27.39	53.53	PASS	-26.14
4.424	39.52	56	PASS	-16.48	39.17	46	PASS	-6.83
11.754	35.4	60	PASS	-24.6	20.55	50	PASS	-29.45

Table 15. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)


Conducted Emissions - Voltage, AC Power, Neutral Line- Internal Power Supply

Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.202	32.03	63.53	PASS	-31.5	26.08	53.53	PASS	-27.45
4.423	36.07	56	PASS	-19.93	35.29	46	PASS	-10.71
11.693	34.17	60	PASS	-25.83	19.24	50	PASS	-30.76


Table 16. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)



Conducted Emissions - Voltage, Worst Case Emissions, 15.207 - Internal Power Supply

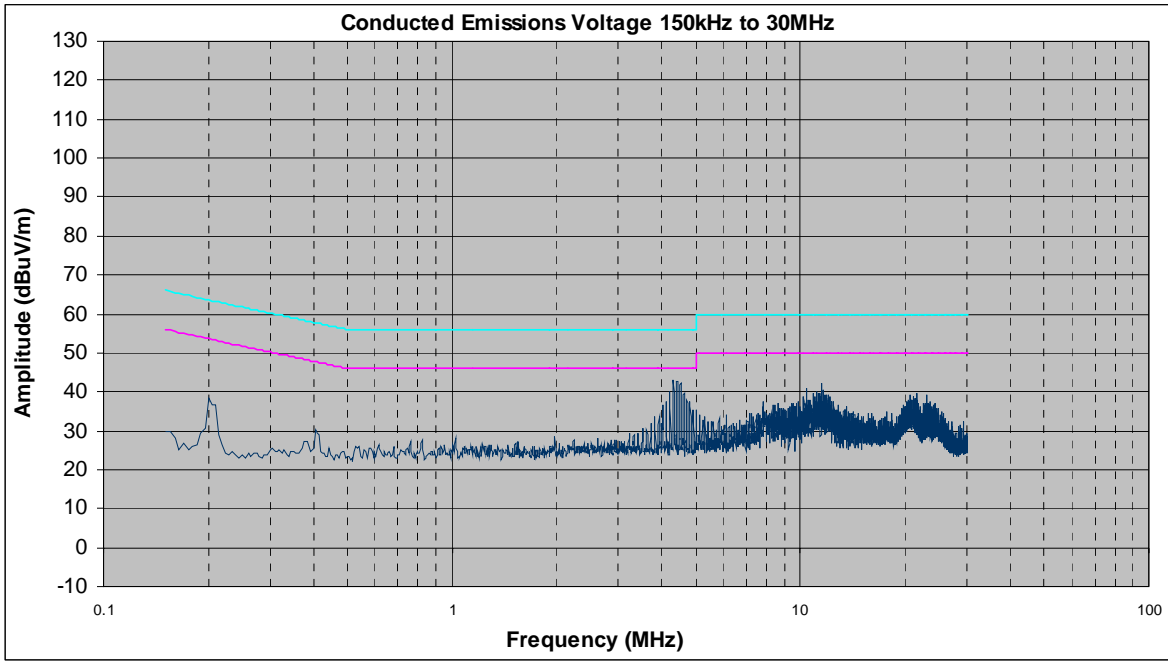

Conducted Emission, Phase Line Plots

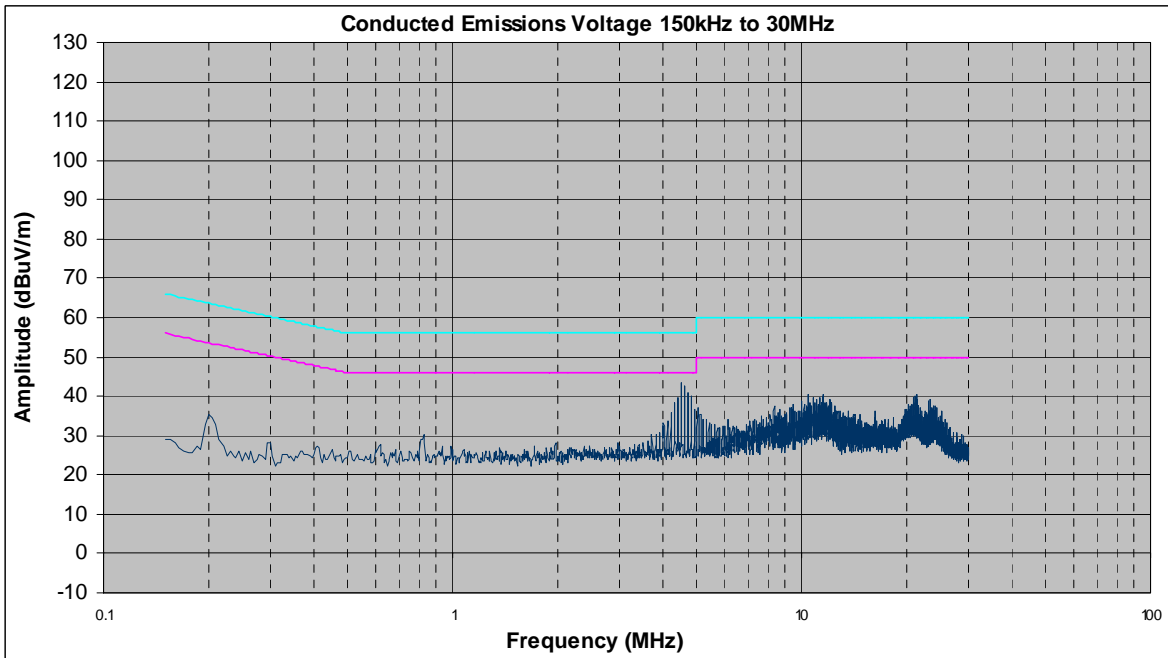

Conducted Emission, Neutral Line Plots



Conducted Emissions - Voltage, AC Power, Phase Line–External Power Supply

Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.185	42.56	64.26	PASS	-21.7	35.54	54.26	PASS	-18.72
0.372	44.29	58.46	PASS	-14.17	39.89	48.46	PASS	-8.57
24.054	37.1	60	PASS	-22.9	32.96	50	PASS	-17.04

Table 17. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)


Conducted Emissions - Voltage, AC Power, Neutral Line –External Power Supply

Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.185	43.28	64.26	PASS	-20.98	35.54	54.26	PASS	-18.72
0.372	45.42	58.46	PASS	-13.04	42.33	48.46	PASS	-6.13
24.05	36.65	60	PASS	-23.35	31.36	50	PASS	-18.64


Table 18. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)



Conducted Emissions - Voltage, Worst Case Emissions, 15.207-External Power Supply

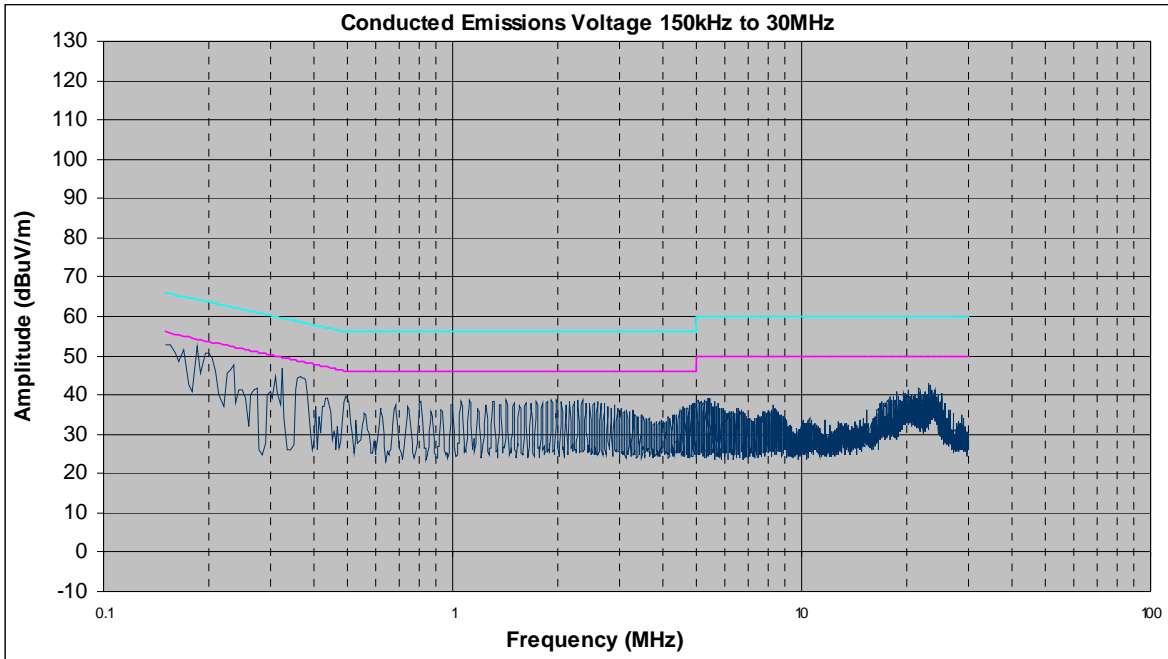

Conducted Emission, Phase Line Plots

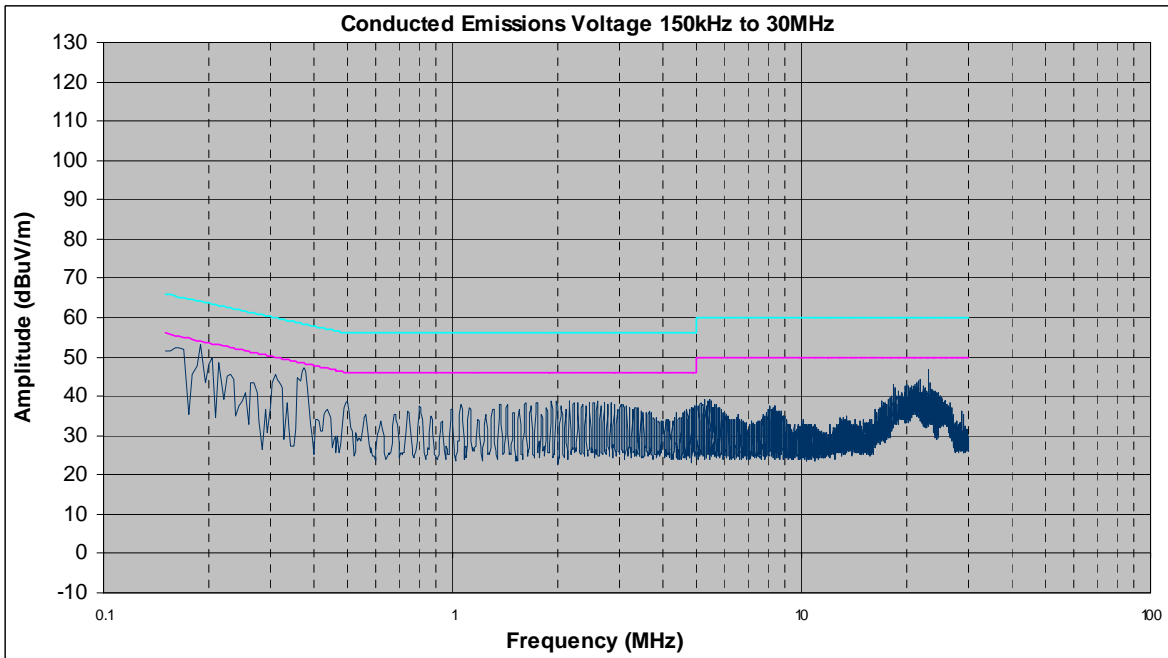

Conducted Emission, Neutral Line Plots



Photograph 4. Conducted Emissions Test Setup Photograph



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was set to the mid channel at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were repeated at the low and high channels.

Test Results Equipment complies with § 15.247 (a). The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

802.11b mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	12.17	16.17
Mid	2437	12.42	16.83
High	2462	12.83	15.92


802.11g mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	16.75	17.50
Mid	2437	16.92	18.92
High	2462	16.83	17.62

802.11a mode			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	5745	15.90	16.62
Mid	5785	16.39	16.58
High	5825	16.35	16.61




Test Engineer(s): Shawn McMillen


Test Date(s): January 18 & February 20, 2007




Block Diagram 1. Occupied Bandwidth Test Setup

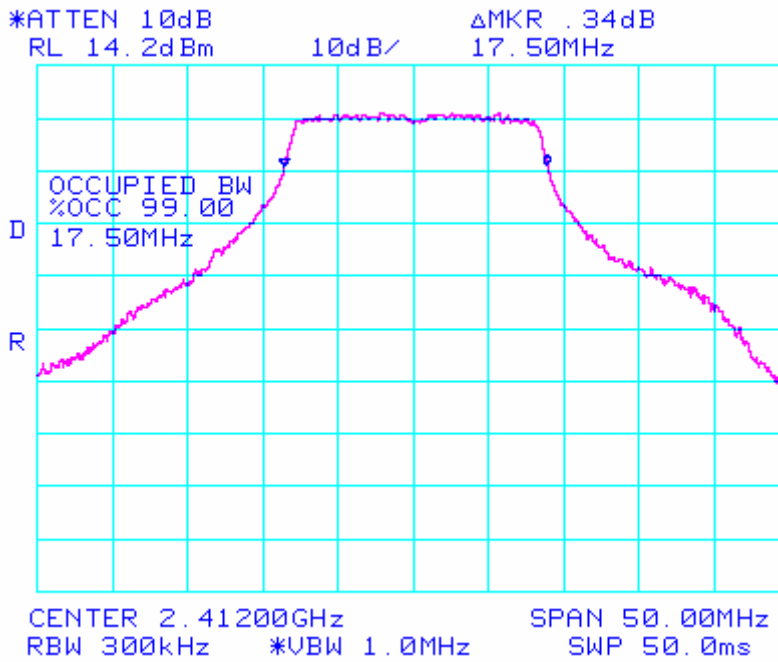


802.11/g Low Ch Occupied Band Width 99%

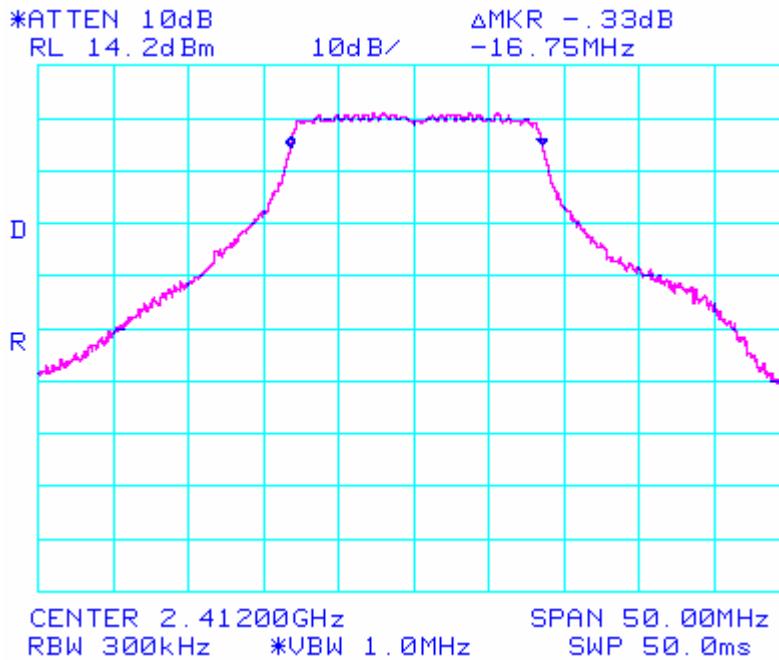


802.11/g Low Ch Occupied Band Width

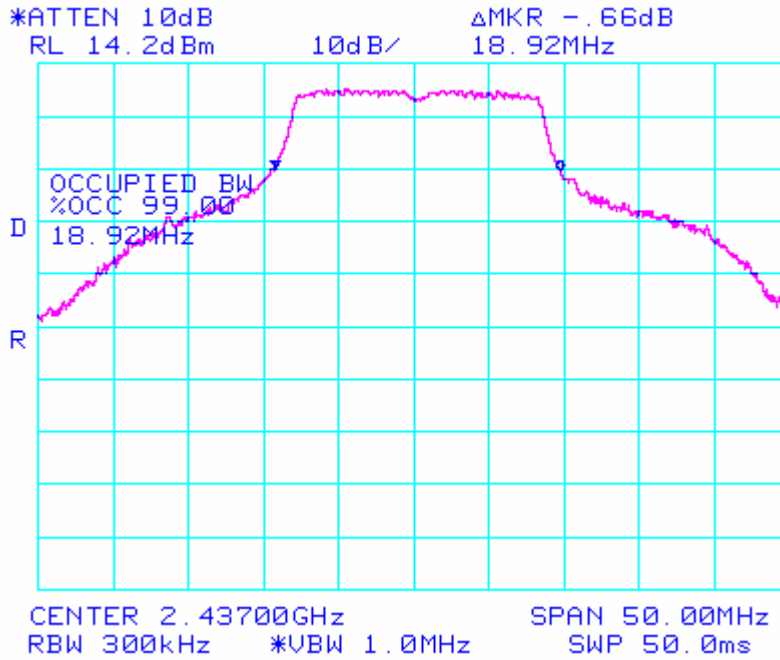


802.11/g Mid Ch Occupied Band Width 99%

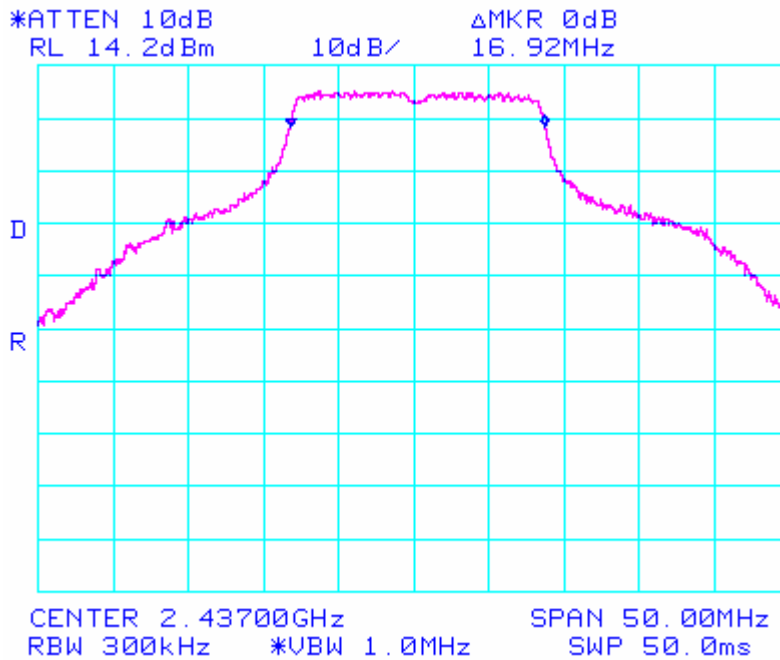


802.11/g Mid Ch Occupied Band Width

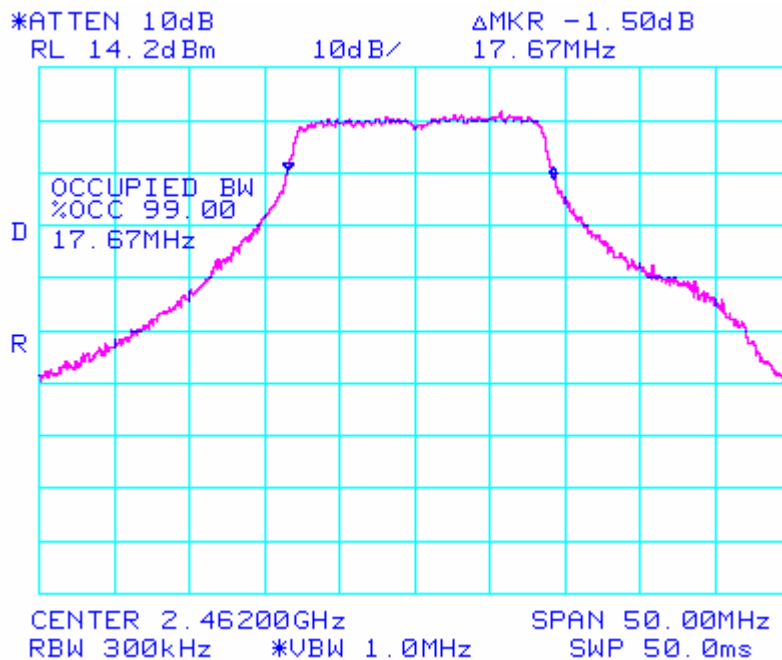


802.11/g High Ch Occupied Band Width 99%

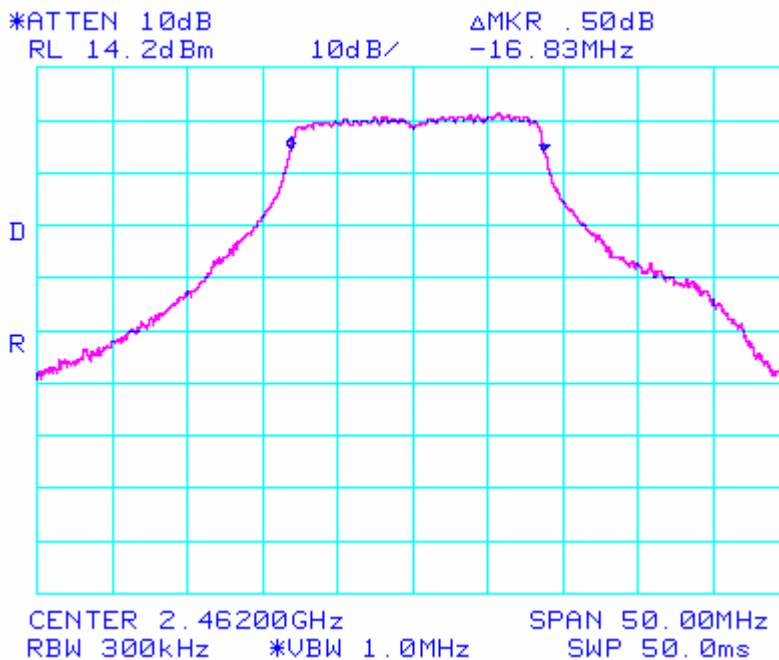


802.11/g High Ch Occupied Band Width

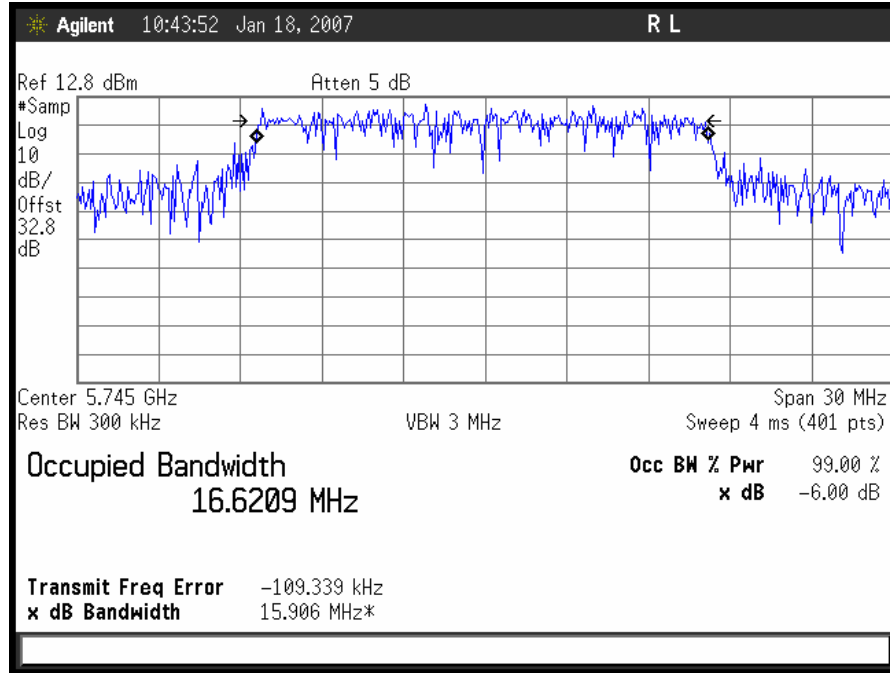

802.11/a Low Ch Occupied Band Width

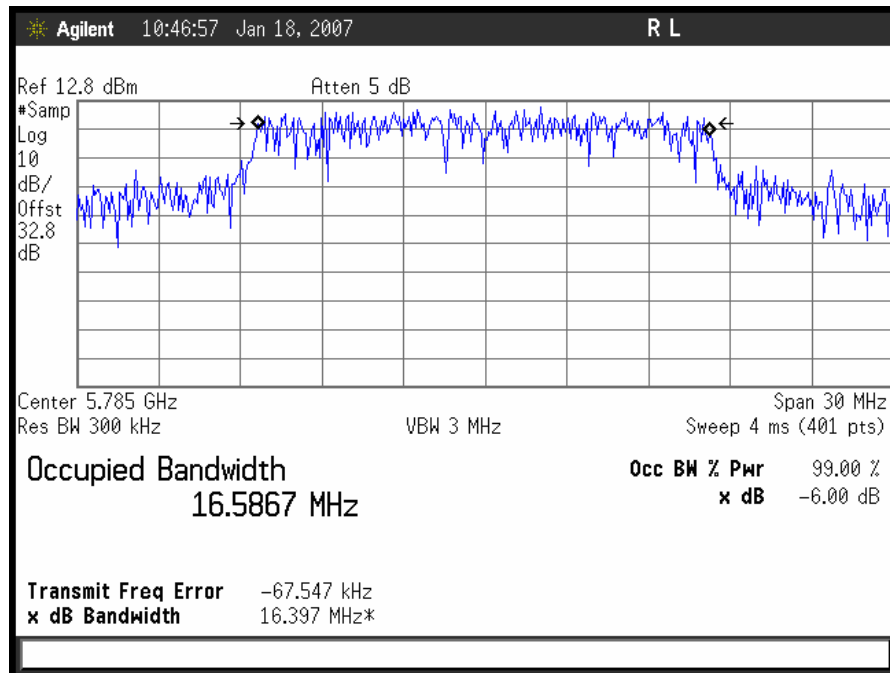

802.11/a Mid Ch Occupied Band Width

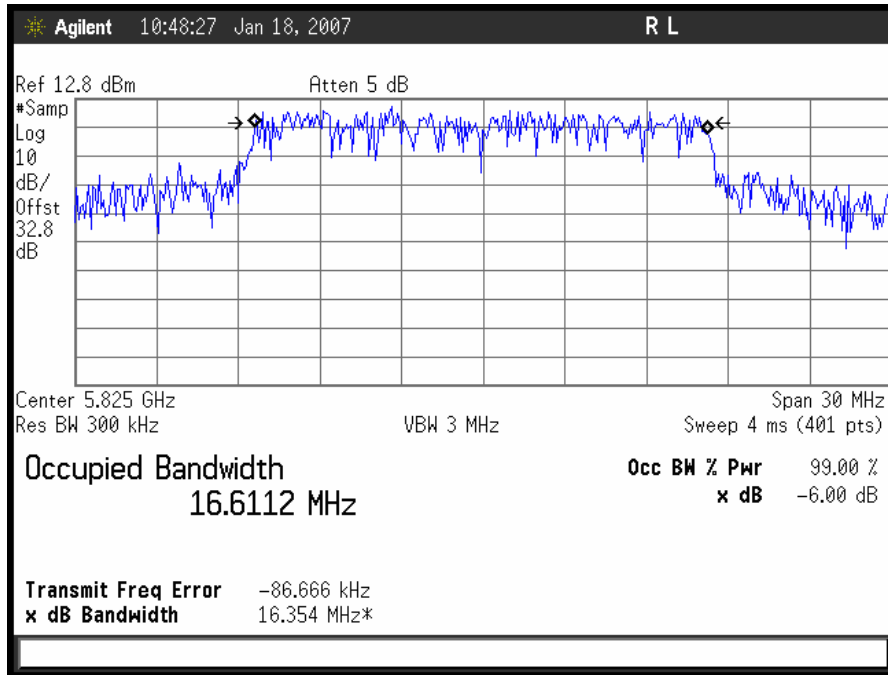

802.11/a High Ch Occupied Band Width



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 19. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 19, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated Peak Power Meter. The EUT was measured at the low, mid and high channels of each band at a data rate which gave the maximum power level.



Test Results: Equipment complies with the Peak Power Output limits of § 15.247(b).


802.11b		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)
Low	2412	24.3
Mid	2437	23.9
High	2462	23.7

802.11g		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)
Low	2412	22.7
Mid	2437	26.5
High	2462	22.4

802.11a		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)
Low	5745	25.4
Mid	5785	25.6
High	5825	25.6

Test Engineer(s): Shawn McMillen

Test Date(s): January 18 & February 27, 2007



Block Diagram 2. Peak Power Output Test Setup



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2400-2483.5 MHz; highest conducted power = 26.5dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 16 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG} / 4\pi S$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (446.7mW)
G = Antenna Gain (39.8 numeric)

$$R = (446.7 * 39.8 / 4 * 3.14 * 1.0)^{1/2} = (17778.6 / 12.56)^{1/2} = 37.6\text{cm}$$

MPE Limit Calculation: EUT's operating frequencies @ 5725 - 5850 MHz; highest conducted power = 25.6dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 23 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG} / 4\pi S$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (363.1mW)
G = Antenna Gain (199.5 numeric)

$$R = (363.1 * 199.5 / 4 * 3.14 * 1.0)^{1/2} = (72438.4 / 12.56)^{1/2} = 75.9\text{cm}$$



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions – Radiated and Conducted

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 20. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6




Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) Omni Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4824	V	45.5	35.1	33.5	5.2	49.1	74	24.9	pk
4824	V	35.2	35.1	33.5	5.2	38.8	54	15.2	avg
7236	V	50.2	35.1	37.0	6.5	58.6	74	15.4	pk
7236	V	42.4	35.1	37.0	6.5	50.8	54	3.2	avg
9648	V	45.2	35.6	38.5	7.8	55.9	74	18.1	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4874	V	44.6	35.1	33.5	5.2	48.2	74	25.8	pk
4874	V	33.0	35.1	33.5	5.2	36.6	54	17.4	avg
7311	V	48.7	35.1	37.0	6.5	57.1	74	16.9	pk
7311	V	40.5	35.1	37.0	6.5	48.9	54	5.1	avg
9748	V	47.1	35.6	38.5	7.8	57.8	74	16.2	pk
Mid Channel 2437									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4924	V	44.4	35.1	33.5	5.2	48.0	74	26.0	pk
4924	V	32.6	35.1	33.5	5.2	36.2	54	17.8	avg
7386	V	47.9	35.1	37.0	6.5	56.3	74	17.7	pk
7386	V	31.1	35.1	37.0	6.5	39.5	54	14.5	avg
9848	V	45.3	35.6	38.5	7.8	56.0	74	18.0	pk
High Channel 2462MHz									


Note: All other emissions were measured at the noise floor of the spectrum analyzer

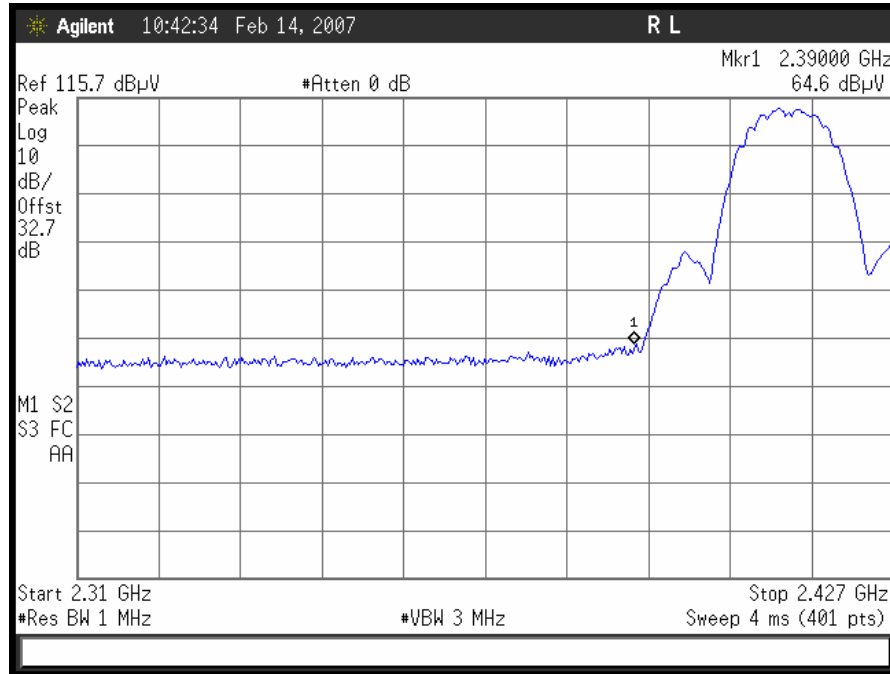

802.11/b radiated restricted band 2310- 2390 MHz Peak

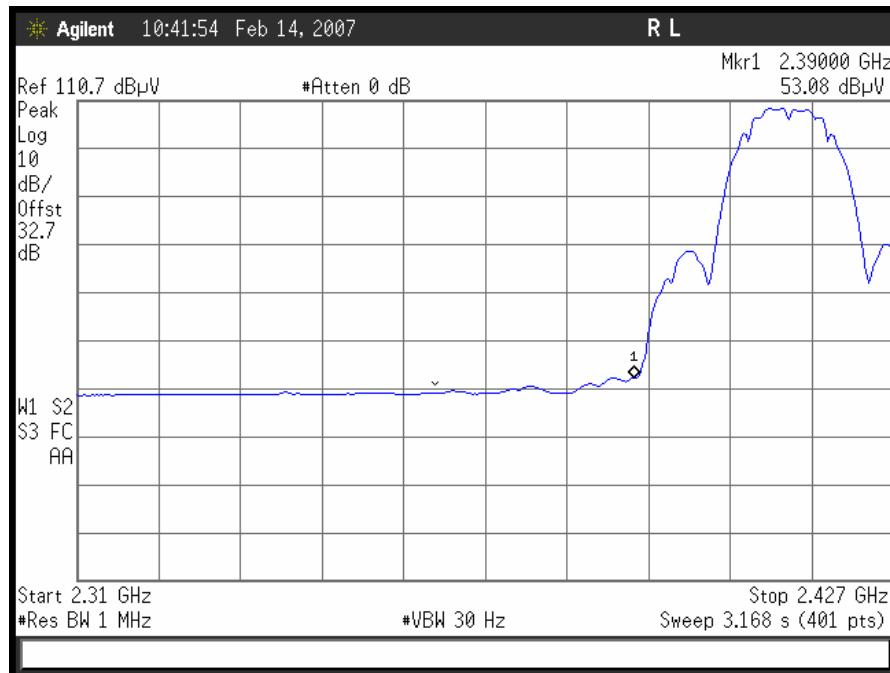

802.11/b radiated restricted band 2310- 2390 MHz Avg

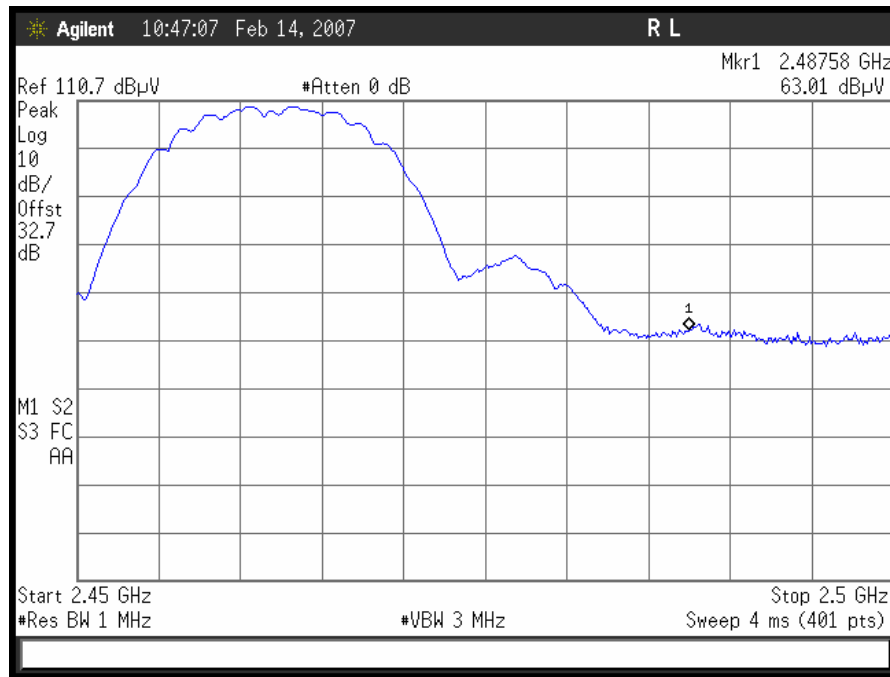

802.11/b radiated restricted band 2483.5 – 2500MHz Peak



802.11/b radiated restricted band 2483.5 – 2500MHz Avg




Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) Panel Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4824	V	49.4	35.1	33.5	5.2	53.0	74	21.0	pk
4824	V	37.1	35.1	33.5	5.2	40.7	54	13.3	avg
7236	V	54.8	35.1	37.0	6.5	63.2	74	10.8	pk
7236	V	41.0	35.1	37.0	6.5	49.4	54	4.6	avg
9648	V	52.1	35.6	38.5	7.8	62.8	74	11.2	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4874	V	49.5	35.1	33.5	5.2	53.1	74	20.9	pk
4874	V	37.8	35.1	33.5	5.2	41.4	54	12.6	avg
7311	V	52.8	35.1	37.0	6.5	61.2	74	12.8	pk
7311	V	40.7	35.1	37.0	6.5	49.1	54	4.9	avg
9748	V	55.4	35.6	38.5	7.8	66.1	74	7.9	pk
Mid Channel 2437									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4924	V	50.0	35.1	33.5	5.2	53.6	74	20.4	pk
4924	V	37.8	35.1	33.5	5.2	41.4	54	12.6	avg
7386	V	54.7	35.1	37.0	6.5	63.1	74	10.9	pk
7386	V	39.7	35.1	37.0	6.5	48.1	54	5.9	avg
9848	V	54.8	35.6	38.5	7.8	65.5	74	8.5	pk
High Channel 2462MHz									


Note: All other emissions were measured at the noise floor of the spectrum analyzer

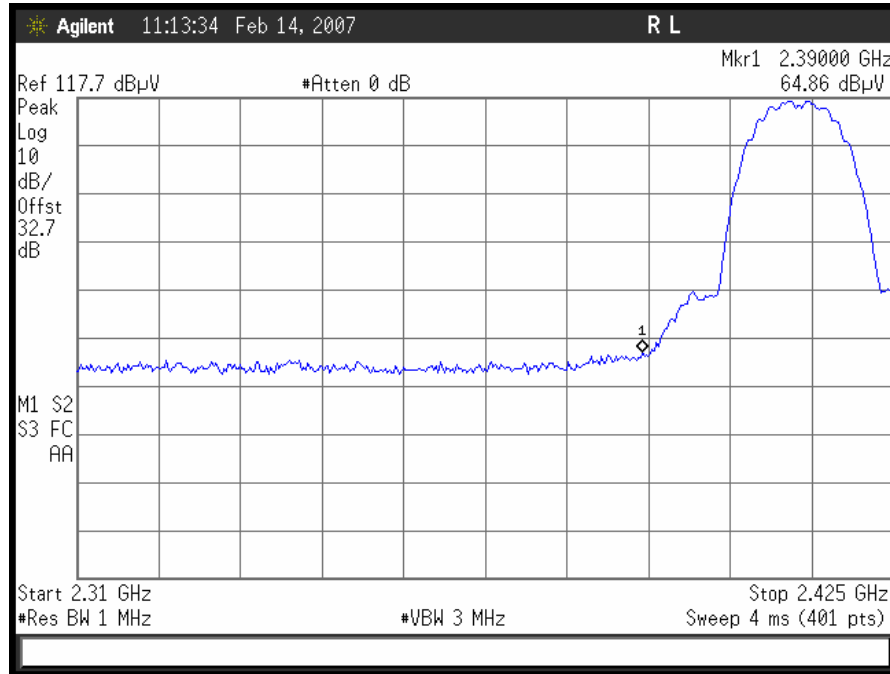


802.11/b radiated restricted band 2310- 2390 MHz Peak



802.11/b radiated restricted band 2310- 2390 MHz Avg

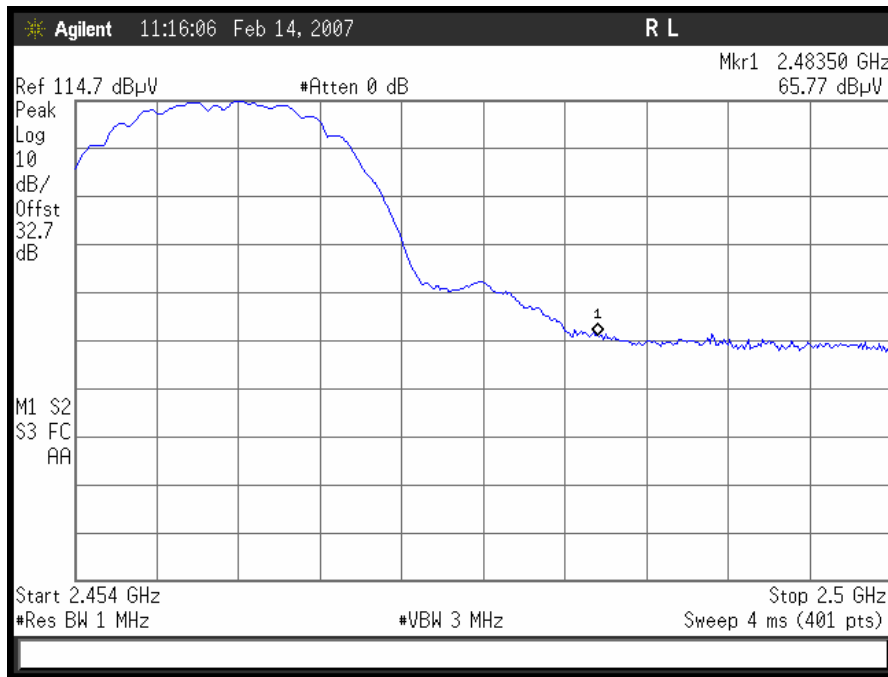

802.11/b radiated restricted band 2483.5 – 2500MHz Peak

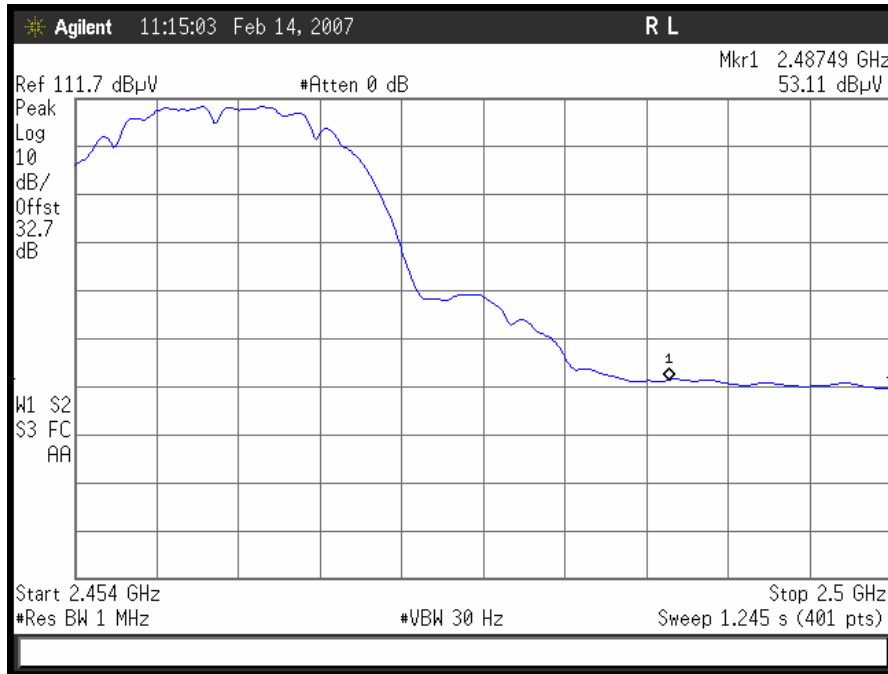

802.11/b radiated restricted band 2483.5 – 2500MHz Avg




Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11b) Sector Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4824	V	49.3	35.1	33.5	5.2	52.9	74	21.1	pk
4824	V	37.2	35.1	33.5	5.2	40.8	54	13.2	avg
7236	V	55.1	35.1	37.0	6.5	63.5	74	10.5	pk
7236	V	41.0	35.1	37.0	6.5	49.4	54	4.6	avg
9648	V	54.7	35.6	38.5	7.8	65.4	74	8.6	pk
Low Channel 2412MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4874	V	48.8	35.1	33.5	5.2	52.4	74	21.6	pk
4874	V	37.5	35.1	33.5	5.2	41.1	54	12.9	avg
7311	V	55.0	35.1	37.0	6.5	63.4	74	10.6	pk
7311	V	40.8	35.1	37.0	6.5	49.2	54	4.8	avg
9748	V	50.9	35.6	38.5	7.8	61.6	74	12.4	pk
Mid Channel 2437									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4924	V	49.2	35.1	33.5	5.2	52.8	74	21.2	pk
4924	V	37.2	35.1	33.5	5.2	40.8	54	13.2	avg
7386	V	52.3	35.1	37.0	6.5	60.7	74	13.3	pk
7386	V	39.8	35.1	37.0	6.5	48.2	54	5.8	avg
9848	V	51.9	35.6	38.5	7.8	62.6	74	11.4	pk
High Channel 2462MHz									


Note: All other emissions were measured at the noise floor of the spectrum analyzer

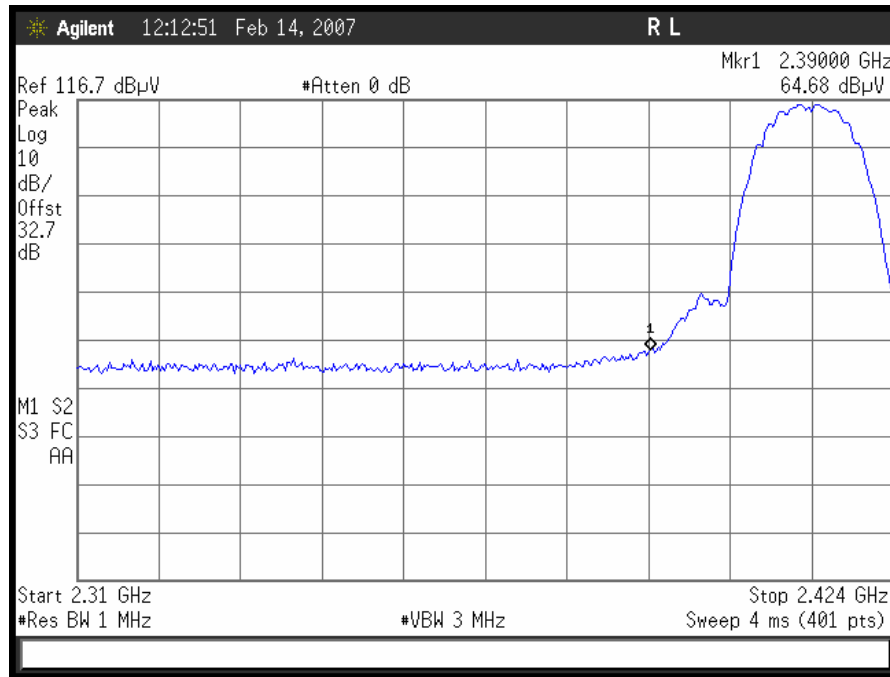


802.11/b radiated restricted band 2310- 2390 MHz Peak



802.11/b radiated restricted band 2310- 2390 MHz Avg

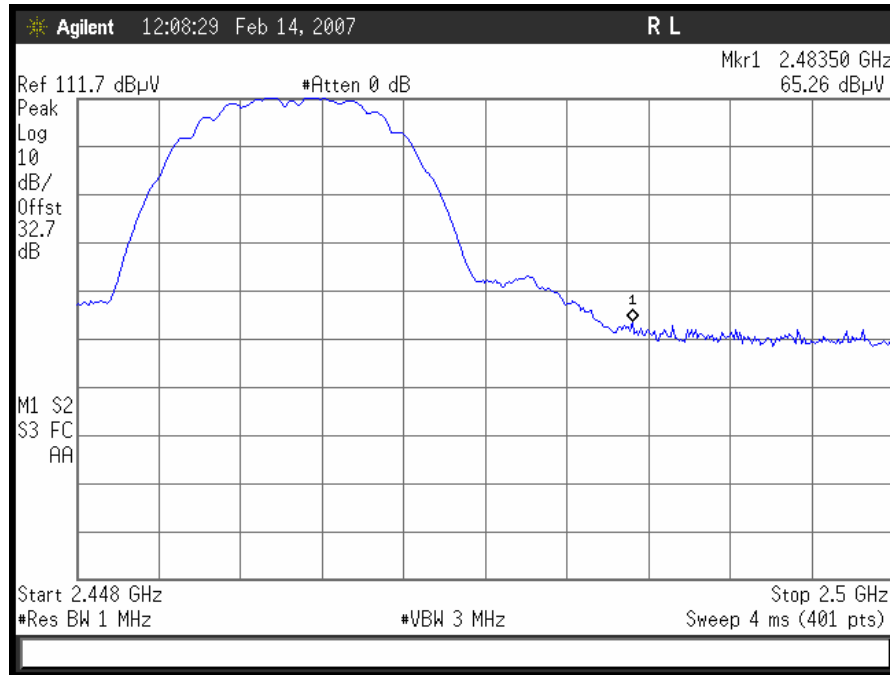

802.11/b radiated restricted band 2483.5 – 2500MHz Peak

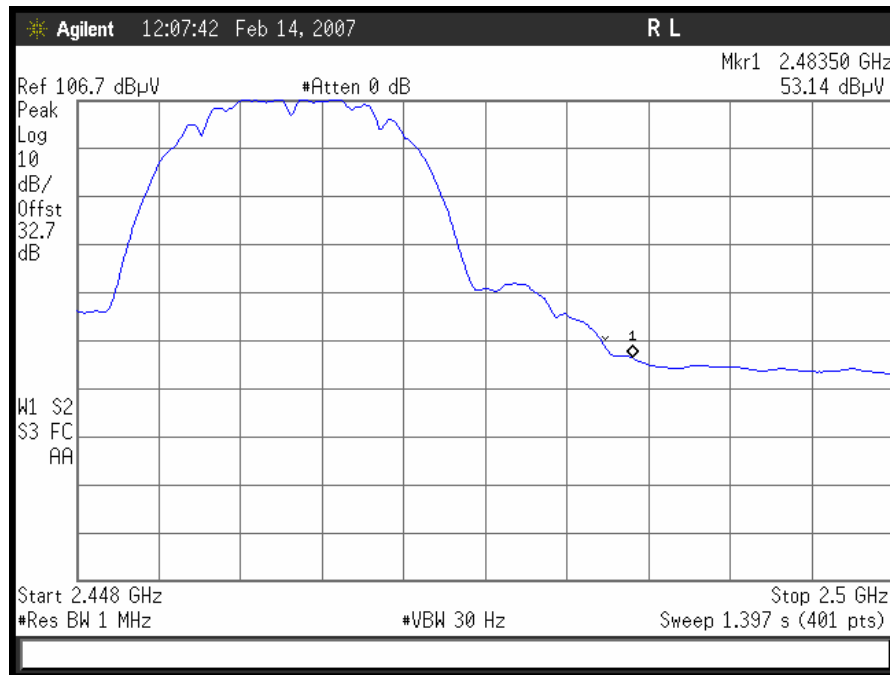


802.11/b radiated restricted band 2483.5 – 2500MHz Avg




Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) Omni Antenna


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4824	V	45.4	35.1	33.5	5.2	49.0	74	25.0	pk
4824	V	32.2	35.1	33.5	5.2	35.8	54	18.2	avg
7236	V	45.8	35.1	37.0	6.5	54.2	74	19.8	pk
7236	V	34.3	35.1	37.0	6.5	42.7	54	11.3	avg
9648	V	44.3	35.6	38.5	7.8	55.0	74	19.0	pk
Low Channel 2414MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4874	V	43.6	35.1	33.5	5.2	47.2	74	26.8	pk
4874	V	32.1	35.1	33.5	5.2	35.7	54	18.3	avg
7311	V	45.9	35.1	37.0	6.5	54.3	74	19.7	pk
7311	V	32.6	35.1	37.0	6.5	41.0	54	13.0	avg
9748	V	45.9	35.6	38.5	7.8	56.6	74	17.4	pk
Mid Channel 2445									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4924	V	43.7	35.1	33.5	5.2	47.3	74	26.7	pk
4924	V	32.3	35.1	33.5	5.2	35.9	54	18.1	avg
7386	V	45.0	35.1	37.0	6.5	53.4	74	20.6	pk
7386	V	33.4	35.1	37.0	6.5	41.8	54	12.2	avg
9848	V	45.7	35.6	38.5	7.8	56.4	74	17.6	pk
High Channel 2460MHz									

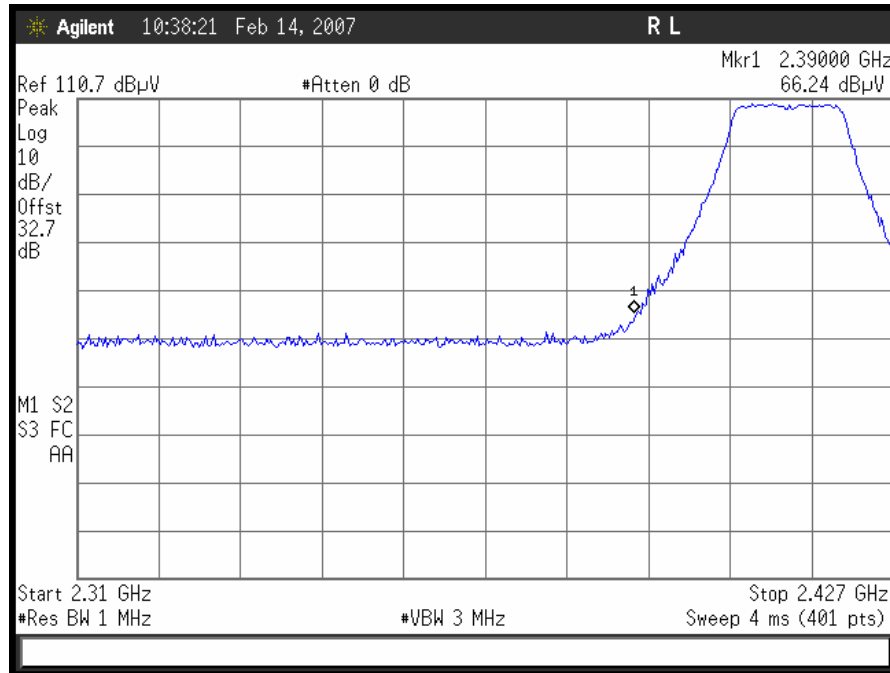


802.11/g radiated restricted band 2310- 2390 MHz Peak

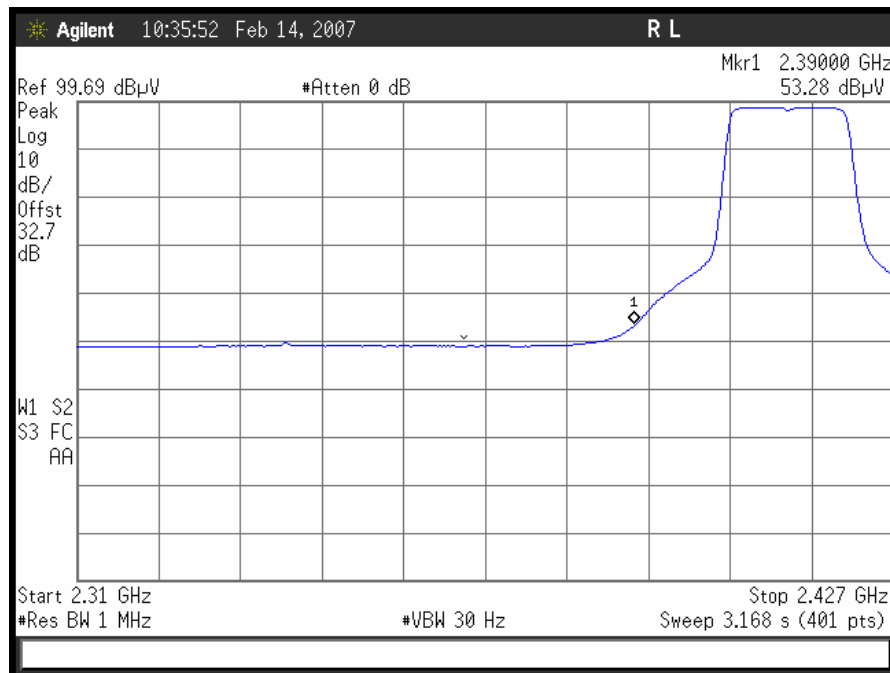

802.11/g radiated restricted band 2310- 2390 MHz Avg

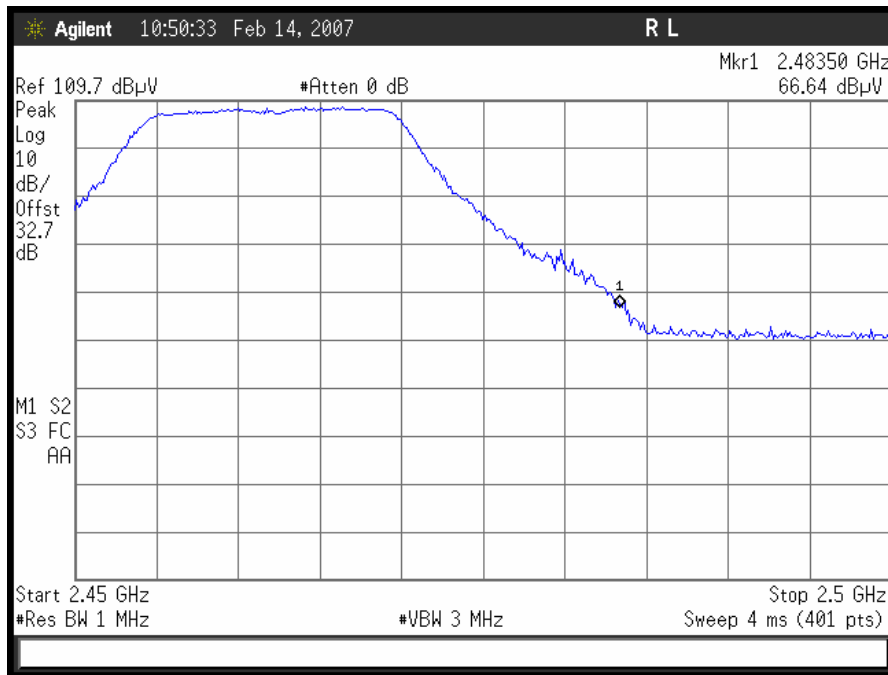

802.11/g radiated restricted band 2483.5 – 2500MHz Peak

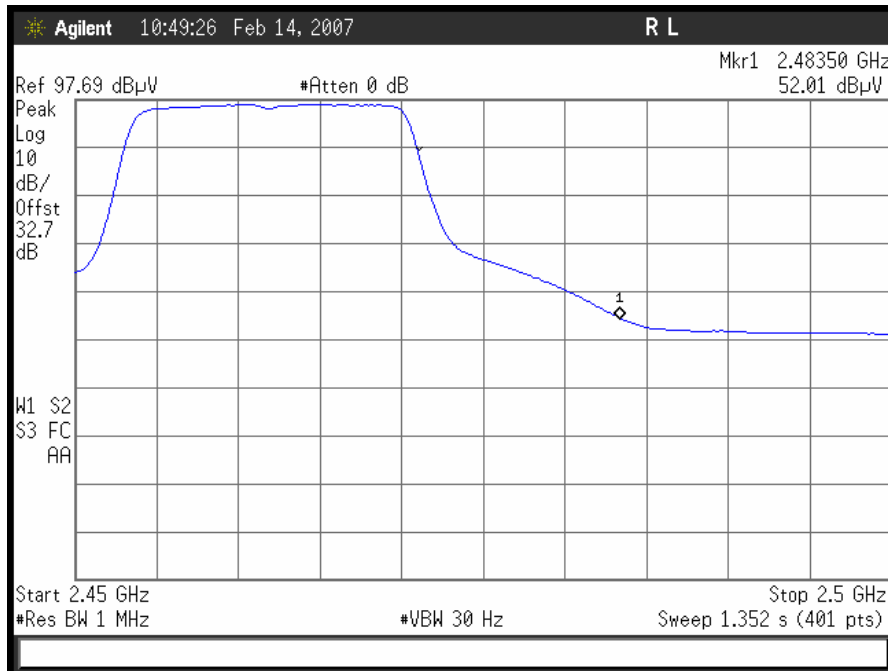


802.11/g radiated restricted band 2483.5 – 2500MHz Avg




Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) Panel Antenna


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4824	V	44.5	35.1	33.5	5.2	48.1	74	25.9	pk
4824	V	32.2	35.1	33.5	5.2	35.8	54	18.2	avg
7236	V	48.2	35.1	37.0	6.5	56.6	74	17.4	pk
7236	V	36.0	35.1	37.0	6.5	44.4	54	9.6	avg
9648	V	48.8	35.6	38.5	7.8	59.5	74	14.5	pk
Low Channel 2414MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4874	V	49.0	35.1	33.5	5.2	52.6	74	21.4	pk
4874	V	36.9	35.1	33.5	5.2	40.5	54	13.5	avg
7311	V	55.1	35.1	37.0	6.5	63.5	74	10.5	pk
7311	V	40.8	35.1	37.0	6.5	49.2	54	4.8	avg
9748	V	54.8	35.6	38.5	7.8	65.5	74	8.5	pk
Mid Channel 2445									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
4924	V	48.9	35.1	33.5	5.2	52.5	74	21.5	pk
4924	V	37.1	35.1	33.5	5.2	40.7	54	13.3	avg
7386	V	55.0	35.1	37.0	6.5	63.4	74	10.6	pk
7386	V	39.8	35.1	37.0	6.5	48.2	54	5.8	avg
9848	V	52.2	35.6	38.5	7.8	62.9	74	11.1	pk
High Channel 2460MHz									

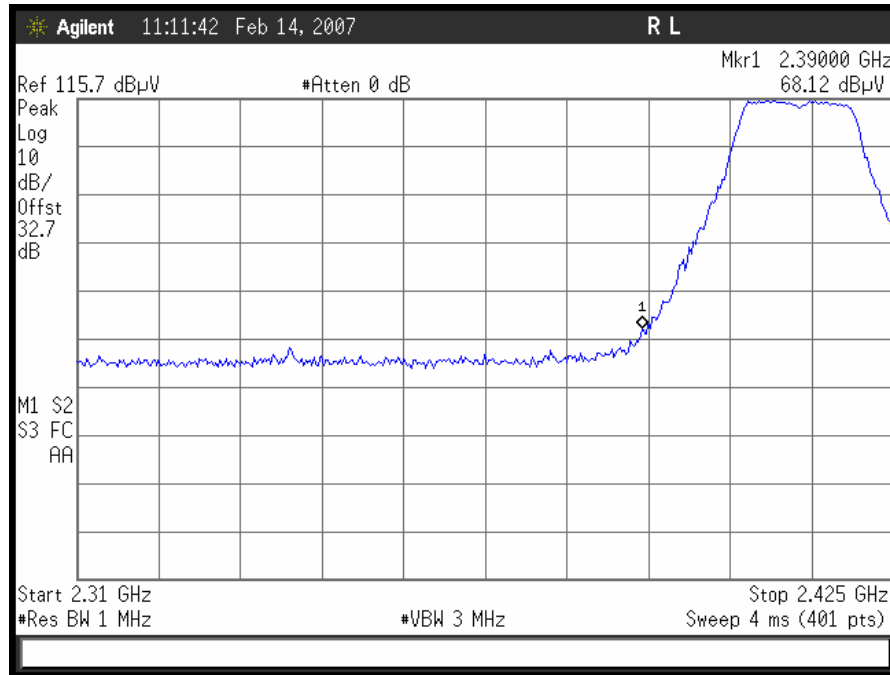


802.11/g radiated restricted band 2310- 2390 MHz Peak

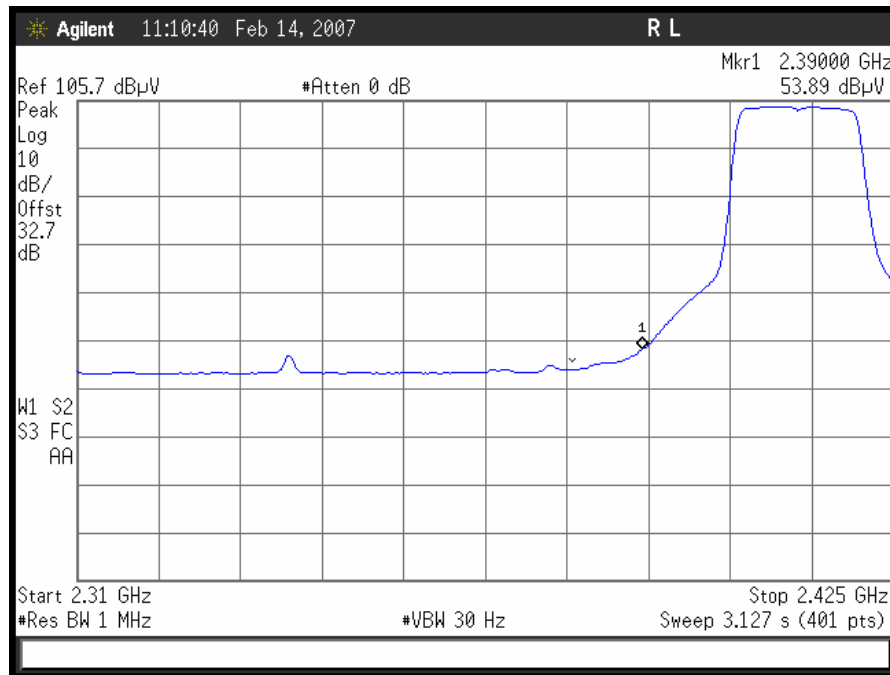

802.11/g radiated restricted band 2310- 2390 MHz Avg

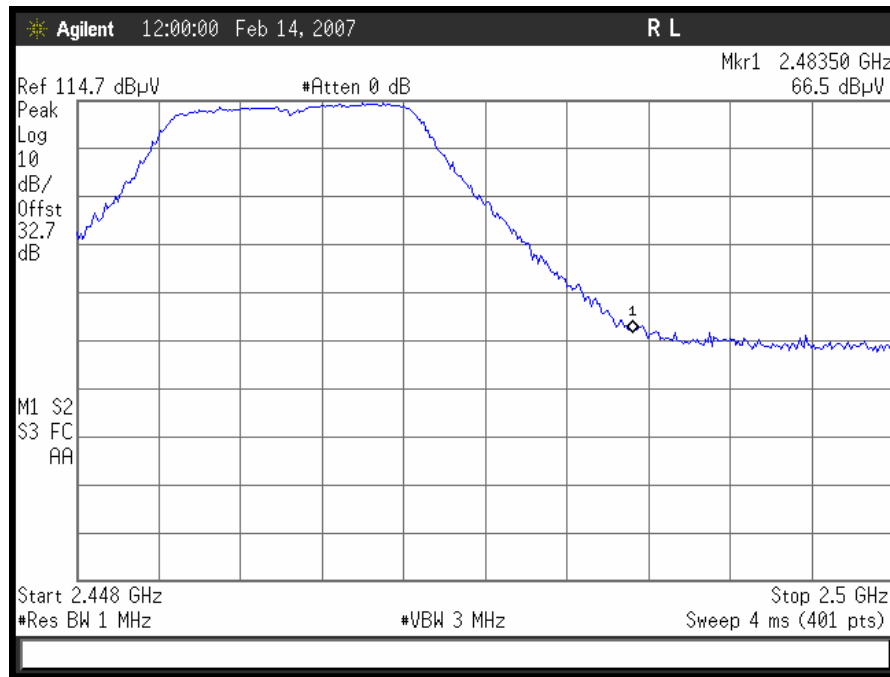

802.11/g radiated restricted band 2483.5 – 2500MHz Peak

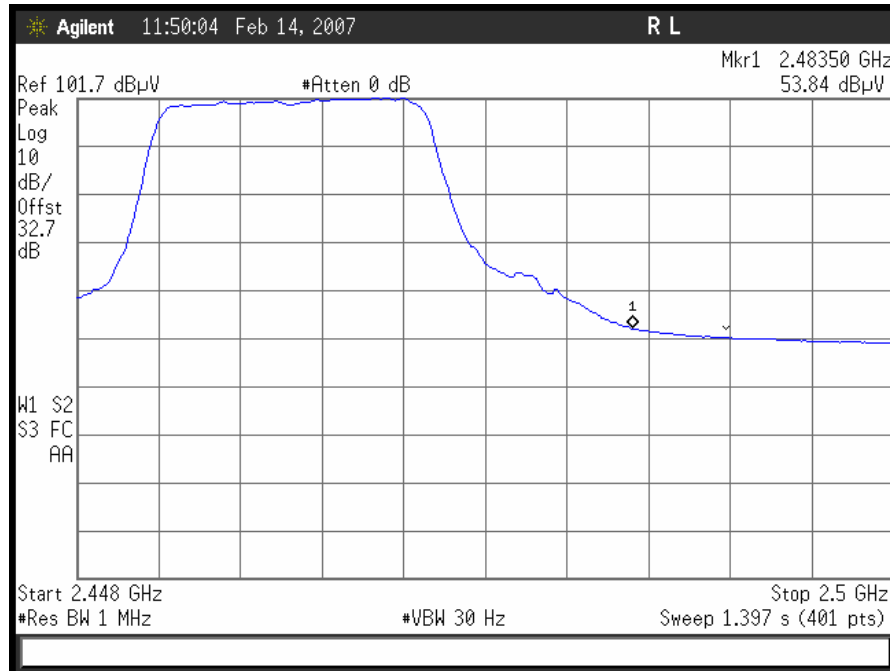


802.11/g radiated restricted band 2483.5 – 2500MHz Avg




Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) Sector Antenna


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4824	V	49.1	35.1	33.5	5.2	52.7	74	21.3	pk
4824	V	35.3	35.1	33.5	5.2	38.9	54	15.1	avg
7236	V	38.8	35.1	37.0	6.5	47.2	74	26.8	pk
7236	V	51.7	35.1	37.0	6.5	60.1	54	-6.1	avg
9648	V	44.9	35.6	38.5	7.8	55.6	74	18.4	pk
Low Channel 2414MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4874	V	42.0	35.1	33.5	5.2	45.6	74	28.4	pk
4874	V	34.2	35.1	33.5	5.2	37.8	54	16.2	avg
7311	V	58.1	35.1	37.0	6.5	66.5	74	7.5	pk
7311	V	38.6	35.1	37.0	6.5	47.0	54	7.0	avg
9748	V	43.7	35.6	38.5	7.8	54.4	74	19.6	pk
Mid Channel 2445									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
4924	V	47.5	35.1	33.5	5.2	51.1	74	22.9	pk
4924	V	37.1	35.1	33.5	5.2	40.7	54	13.3	avg
7386	V	52.5	35.1	37.0	6.5	60.9	74	13.1	pk
7386	V	39.8	35.1	37.0	6.5	48.2	54	5.8	avg
9848	V	41.7	35.6	38.5	7.8	52.4	74	21.6	pk
High Channel 2460MHz									

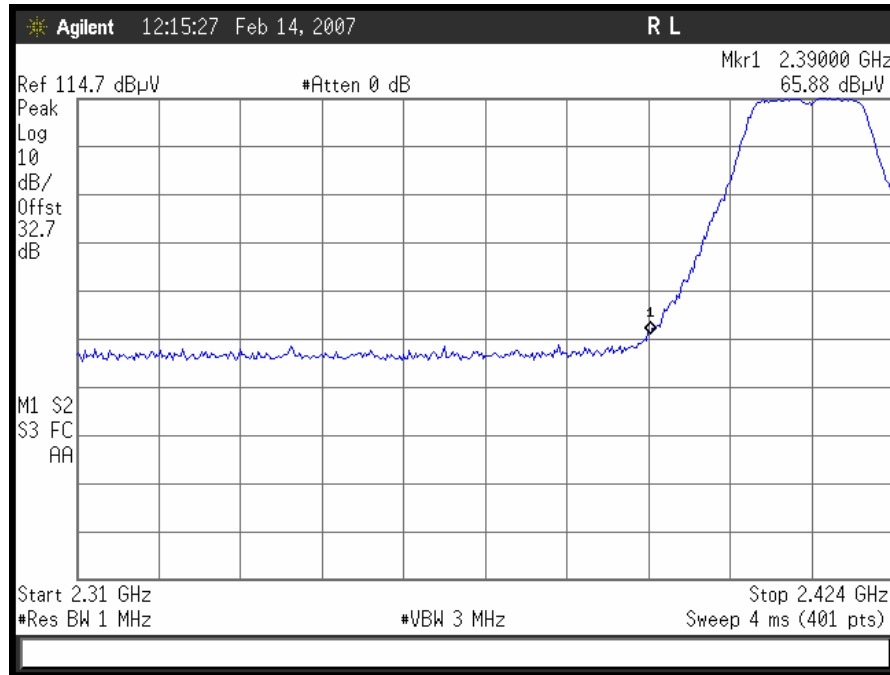


802.11/g radiated restricted band 2310- 2390 MHz Peak

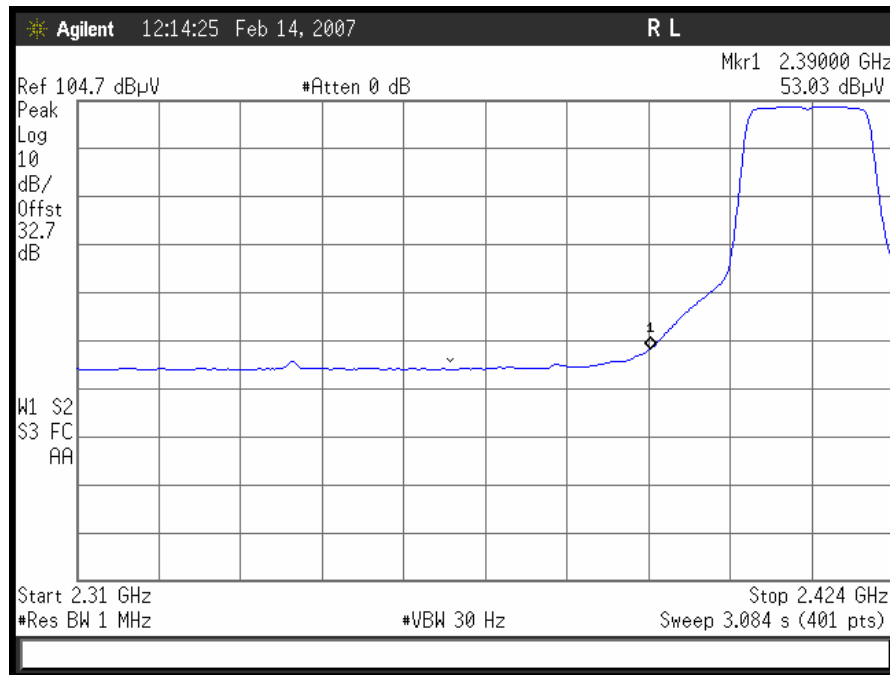

802.11/g radiated restricted band 2310- 2390 MHz Avg

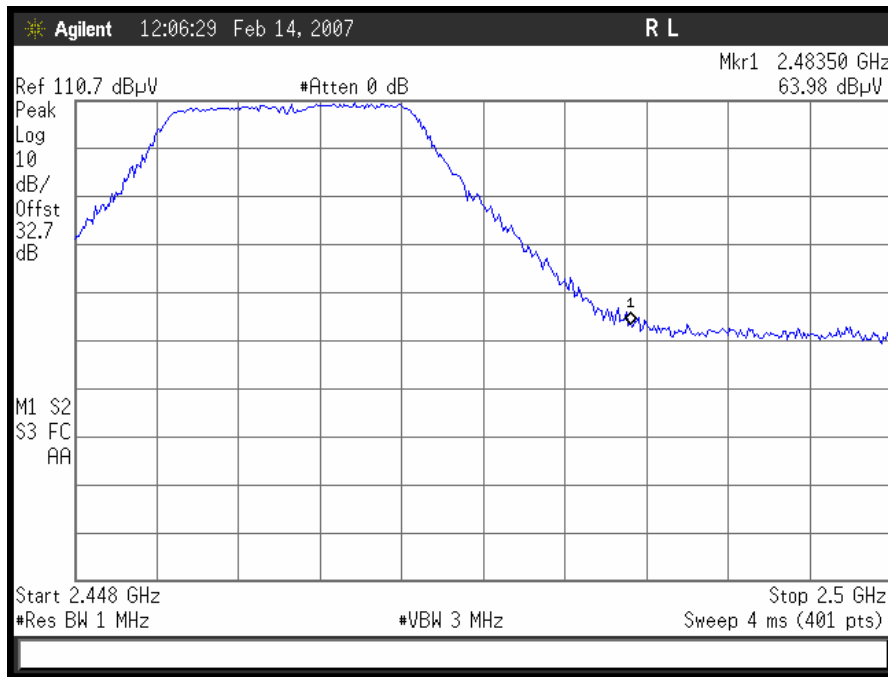

802.11/g radiated restricted band 2483.5 – 2500MHz Peak

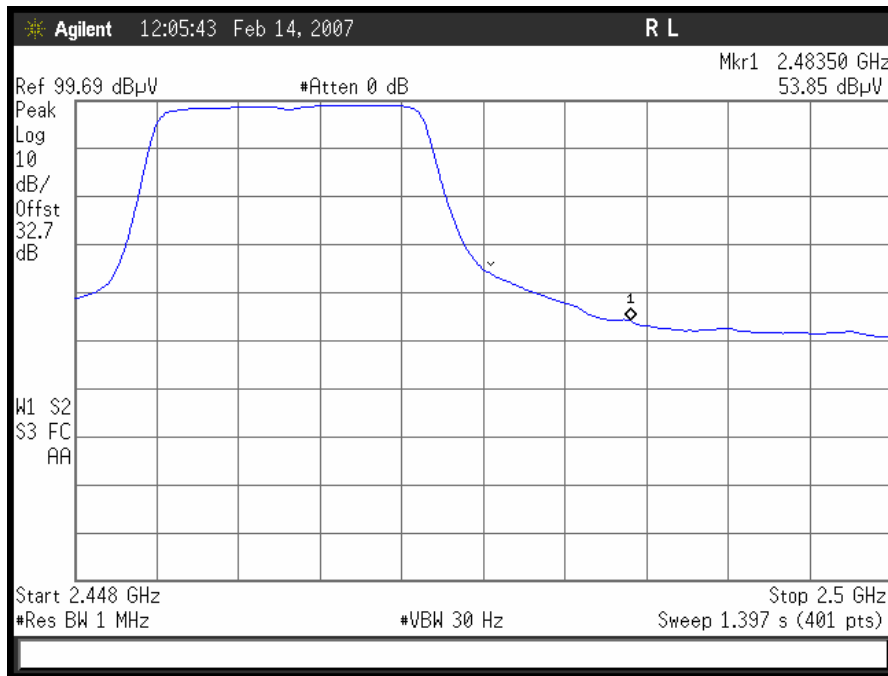

802.11/g radiated restricted band 2483.5 – 2500MHz Avg



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) 5dbi Omni

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11490	V	37.0	34.7	39	9.4	50.7	74	-23.3	pk
11490	V	30.2	34.7	39	9.4	43.9	54	-10.1	avg
17235	V	42.0	33.0	44.5	11.8	65.3	74	-8.8	pk
Low Channel 5745MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11570	V	37.5	34.7	39	9.4	51.2	74	-22.8	pk
11570	V	31.7	34.7	39	9.4	45.4	54	-8.6	avg
17355	V	39.0	33.0	44.5	11.8	62.3	74	-11.7	pk
Mid Channel 5785									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11650	V	41.0	34.7	39	9.4	54.7	74	-19.3	pk
11650	V	30.9	34.7	39	9.4	44.6	54	-9.4	avg
17475	V	38.1	33.0	44.5	11.8	61.4	74	-12.6	pk
High Channel 5825MHz									



§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) 10dbi Omni

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
11490	V	42.2	34.7	39	9.4	55.9	74	-18.1	pk
11490	V	30.8	34.7	39	9.4	44.5	54	-9.5	avg
17235	V		33.0	44.5	11.8	23.3	74	-50.7	pk
Low Channel 5745MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
11570	V	46.1	34.7	39	9.4	59.8	74	-14.2	pk
11570	V	33.8	34.7	39	9.4	47.5	54	-6.5	avg
17355	V		33.0	44.5	11.8	23.3	74	-50.7	pk
Mid Channel 5785									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBµV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBµV)	Limit @ 3m (dBµV)	Margin (dB)	Measurement Type
11650	V	43.4	34.7	39	9.4	57.1	74	-17.0	pk
11650	V	31.7	34.7	39	9.4	45.4	54	-8.6	avg
17475	V		33.0	44.5	11.8	23.3	74	-50.7	pk
High Channel 5825MHz									



§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) 16dbi Sector


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11490	V	45.1	34.7	39	9.4	58.8	74	-15.2	pk
11490	V	31.5	34.7	39	9.4	45.2	54	-8.8	avg
17235	V		33.0	44.5	11.8	23.3	74	-50.7	pk
Low Channel 5745MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11570	V	41.9	34.7	39	9.4	55.6	74	-18.4	pk
11570	V	30.3	34.7	39	9.4	44.0	54	-10.0	avg
17355	V	41.6	33.0	44.5	11.8	64.9	74	-9.1	pk
Mid Channel 5785									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11650	V	45.8	34.7	39	9.4	59.5	74	-14.5	pk
11650	V	35.6	34.7	39	9.4	49.3	54	-4.7	avg
17475	V	42.1	33.0	44.5	11.8	65.4	74	-8.6	pk
High Channel 5825MHz									



§ 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) 23dbi Panel

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11490	V	41.3	34.7	39	9.4	55.0	74	-19.0	pk
11490	V	29.5	34.7	39	9.4	43.2	54	-10.8	avg
17235	V		33.0	44.5	11.8	23.3	74	-50.7	pk
Low Channel 5745MHz									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11570	V	41.8	34.7	39	9.4	55.5	74	-18.5	pk
11570	V	29.5	34.7	39	9.4	43.2	54	-10.8	avg
17355	V		33.0	44.5	11.8	23.3	74	-50.7	pk
Mid Channel 5785									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dBμV)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dBμV)	Limit @ 3m (dBμV)	Margin (dB)	Measurement Type
11650	V	40.9	34.7	39	9.4	54.6	74	-19.4	pk
11650	V	29.5	34.7	39	9.4	43.2	54	-10.8	avg
17475	V		33.0	44.5	11.8	23.3	74	-50.7	pk
High Channel 5825MHz									


Note: All other emissions were measured at the noise floor of the spectrum analyzer

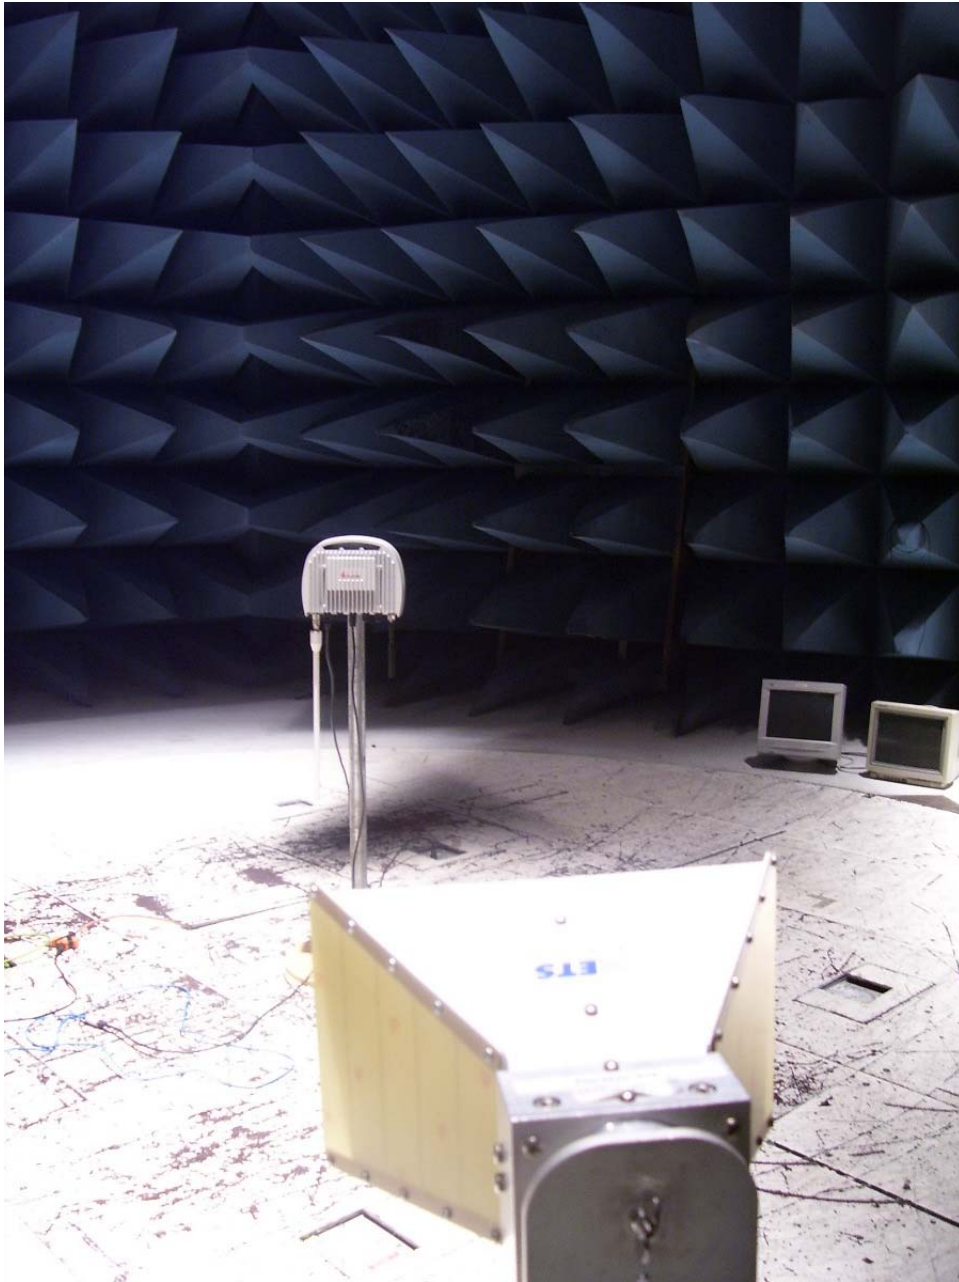


Photograph 5. Test Equipment and setup for various Radiated Measurements



Photograph 6. Test Equipment and setup for various Radiated Measurements

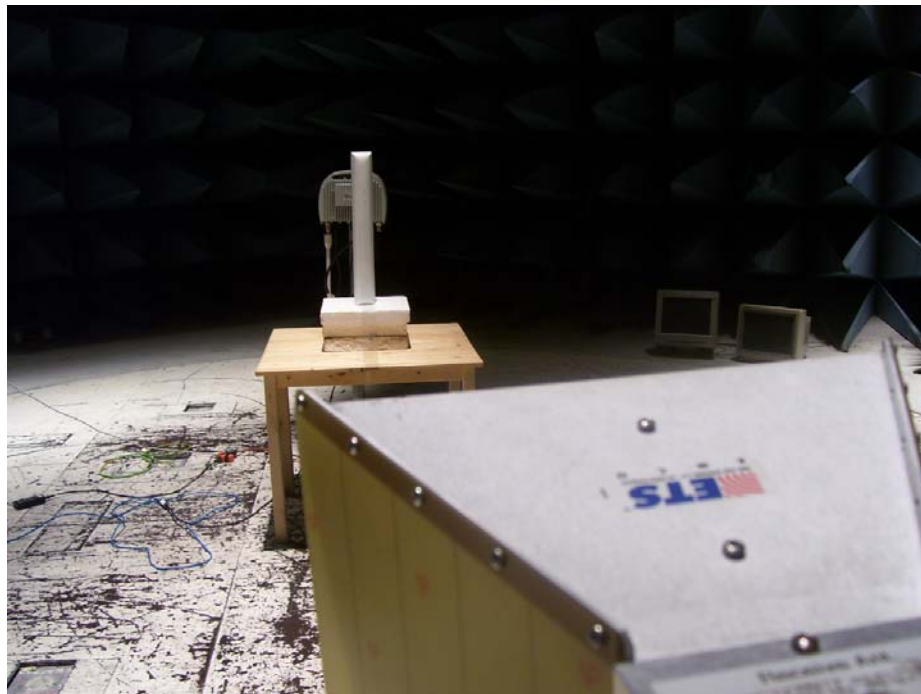

Photograph 7. Test Equipment and setup for various Radiated Measurements

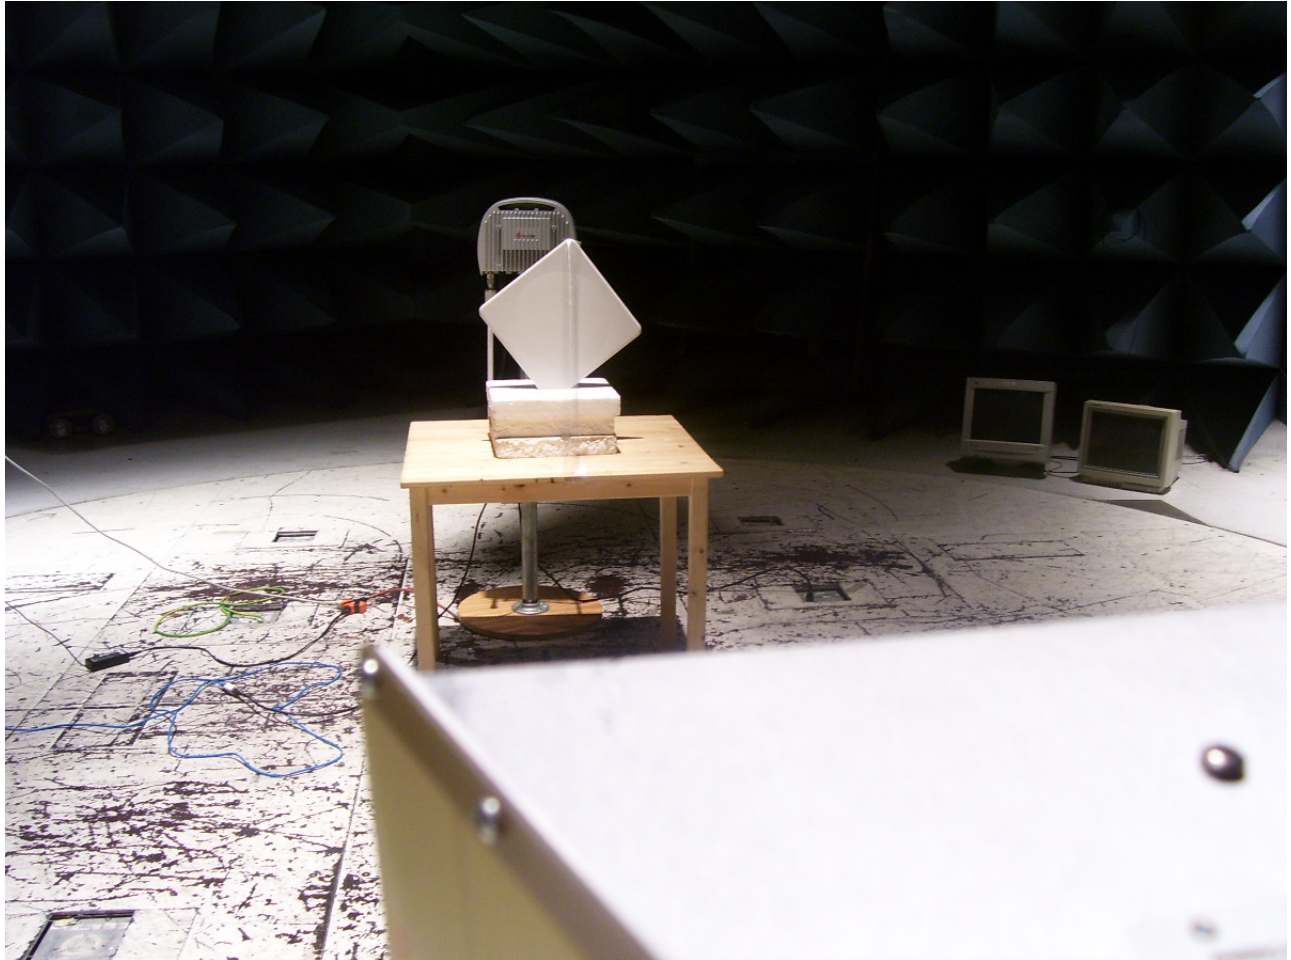

Photograph 8. Test Equipment and setup for various Radiated Measurements



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions Requirements –RF Conducted


Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For frequencies 1-18GHz, measurements were made at coupler port of a 20dB directional coupler. The output of the coupler was terminated by a 50Ω load. For frequencies 18-40GHz a HP11970A and HP11970K harmonic mixer was used. Each harmonic mixer was fed with a SMA to wave guide adapter.


Test Results: Equipment complies with the Spurious Emissions Requirements – Radiated and RF Conducted limits of § 15.247 (c). For Radiated Emissions result, refer to section “§15.209: Radiated Emission Limits”. See following pages for detailed test results with RF Conducted Spurious Emissions and §15.205.

Test Engineer(s): Shawn McMillen


Test Date(s): January 18, & February 20, 2007




Block Diagram 3. Spurious Conducted Emissions Test Setup

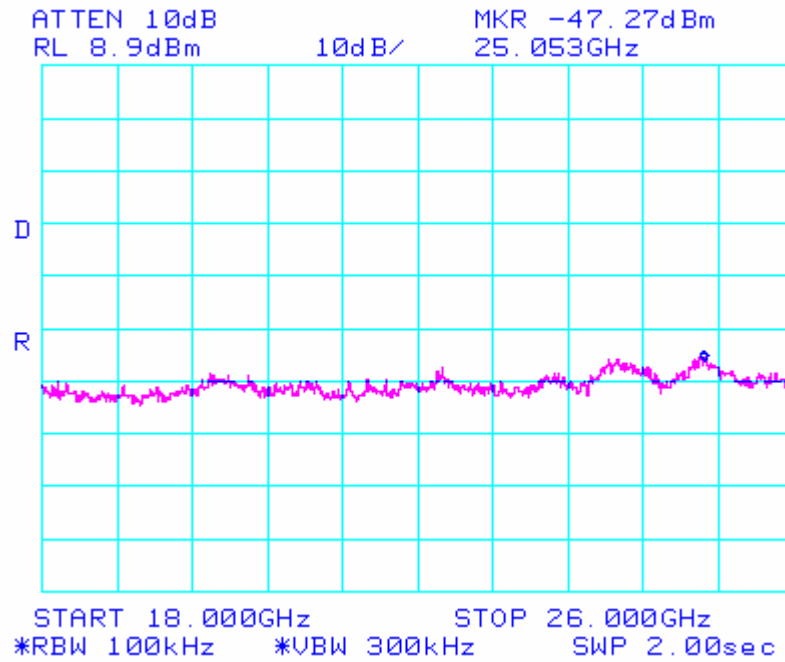


802.11/b – High Channel Conducted Emissions 18-26GHz

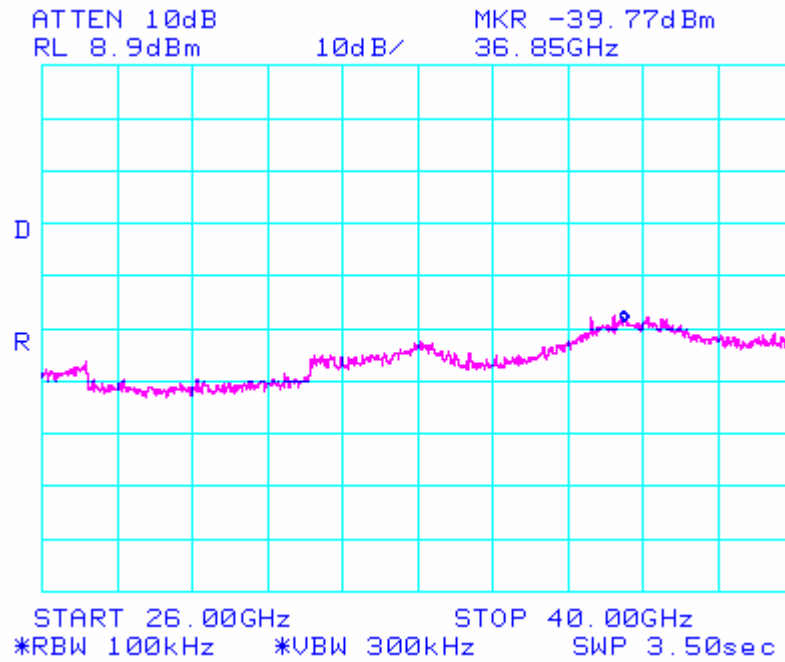


802.11/b – High Channel Conducted Emissions 26-40GHz

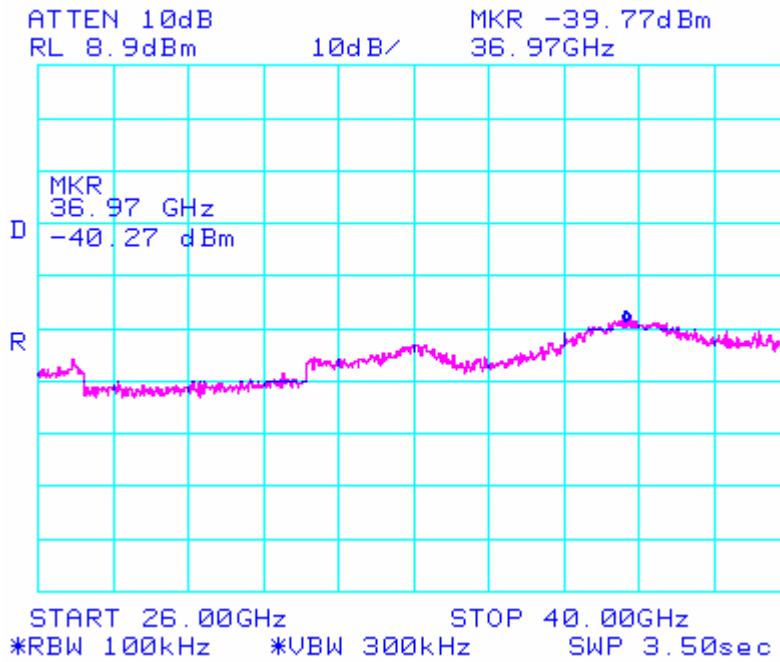


802.11/g – Low Channel Conducted Emissions 26-40GHz

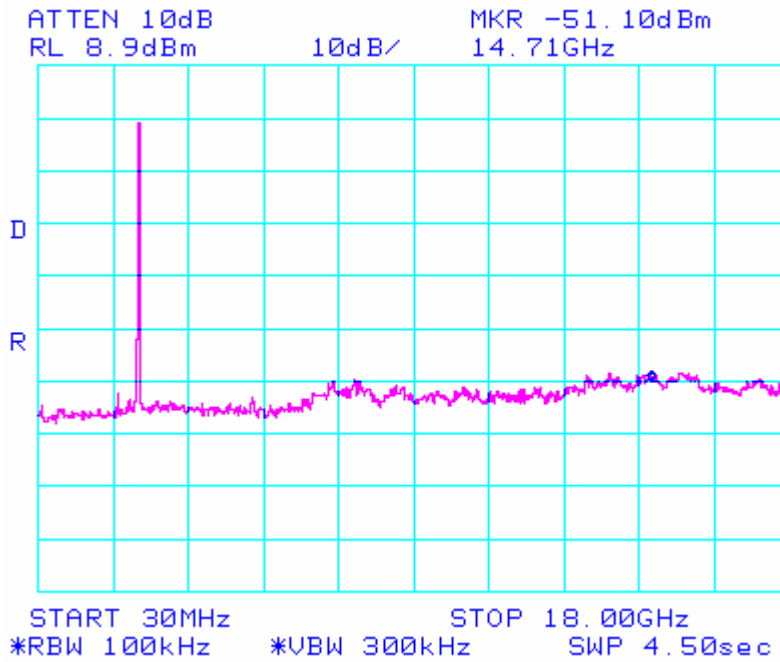


802.11/g – High Channel Conducted Emissions 30MHz- 18GHz

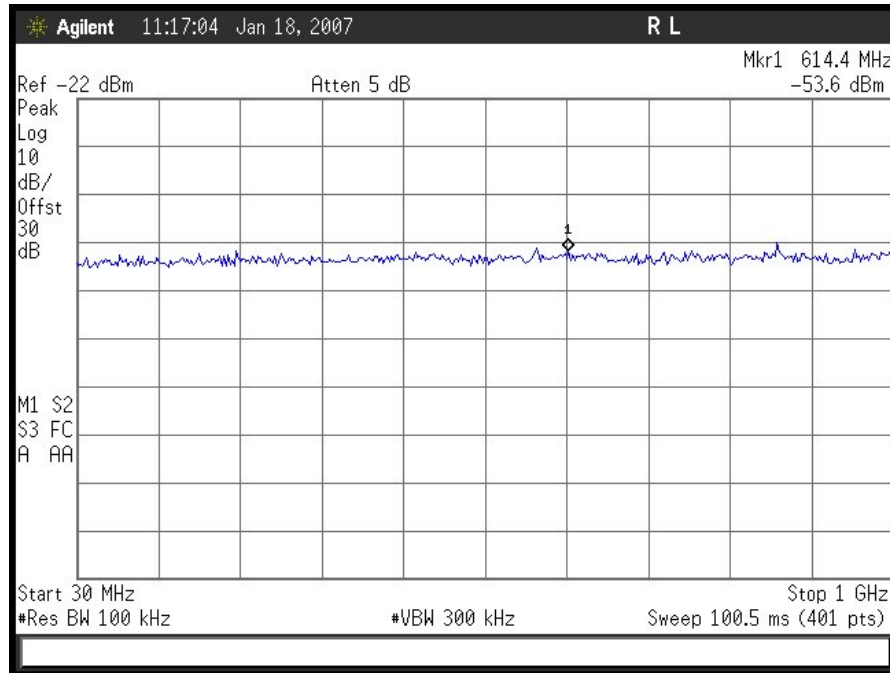


802.11/a – Low Channel Conducted Emissions 30MHz- 1GHz

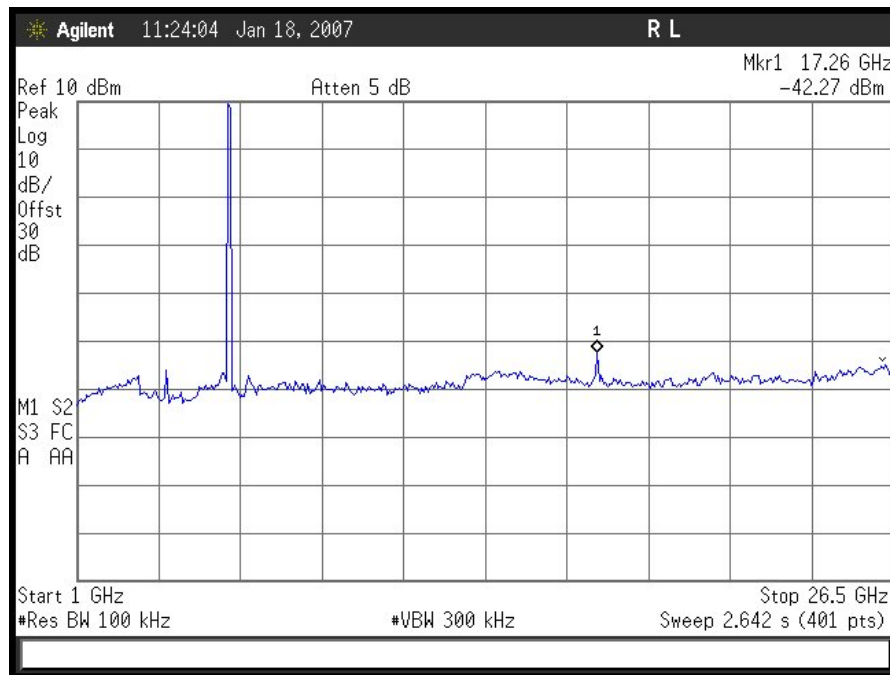


802.11/a – Low Channel Conducted Emissions 1-26.5GHz

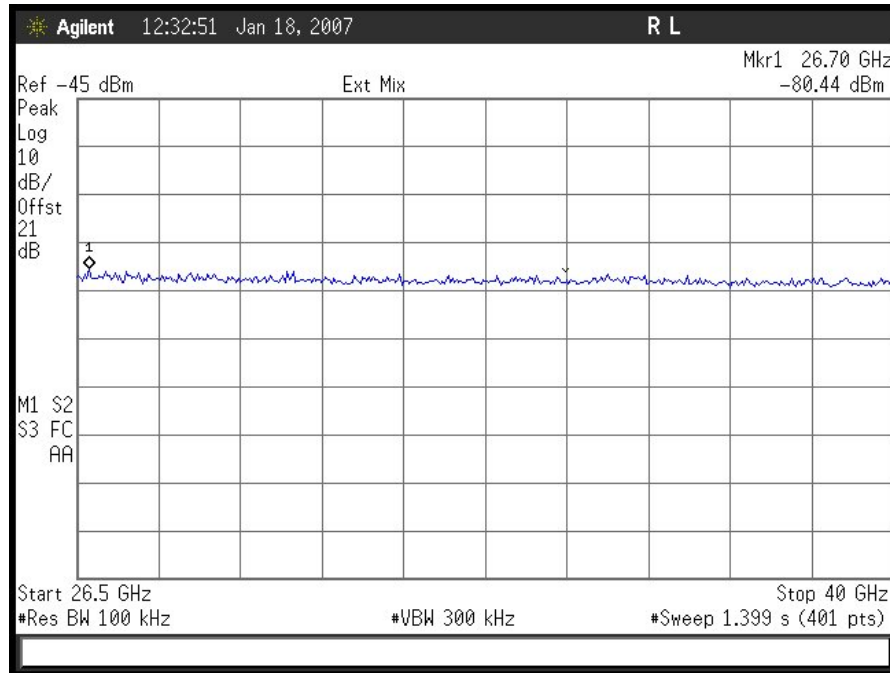


802.11/a – Low Channel Conducted Emissions 26.5- 40GHz

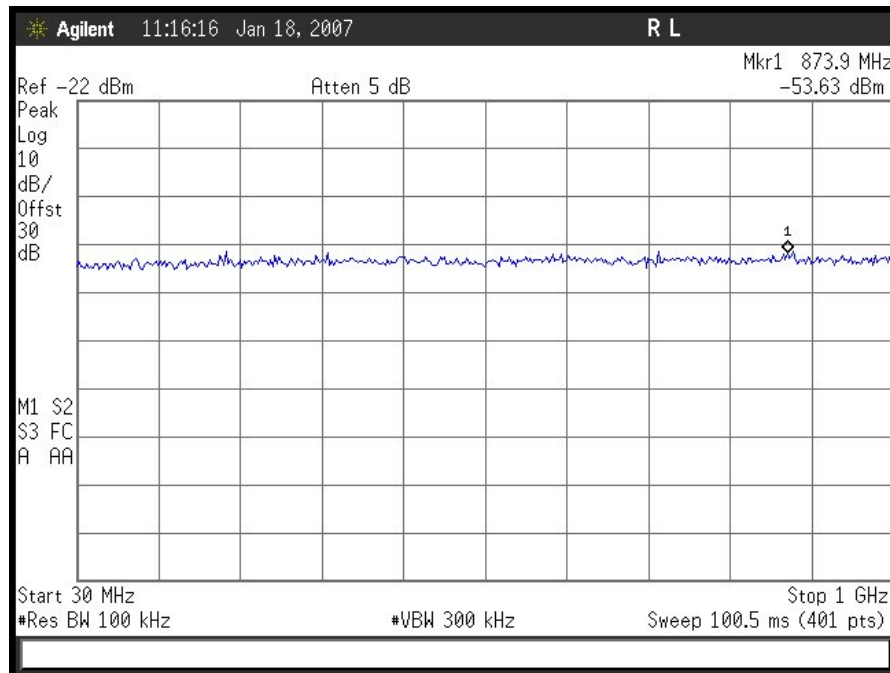


802.11/a – Mid Channel Conducted Emissions 30MHz- 1GHz

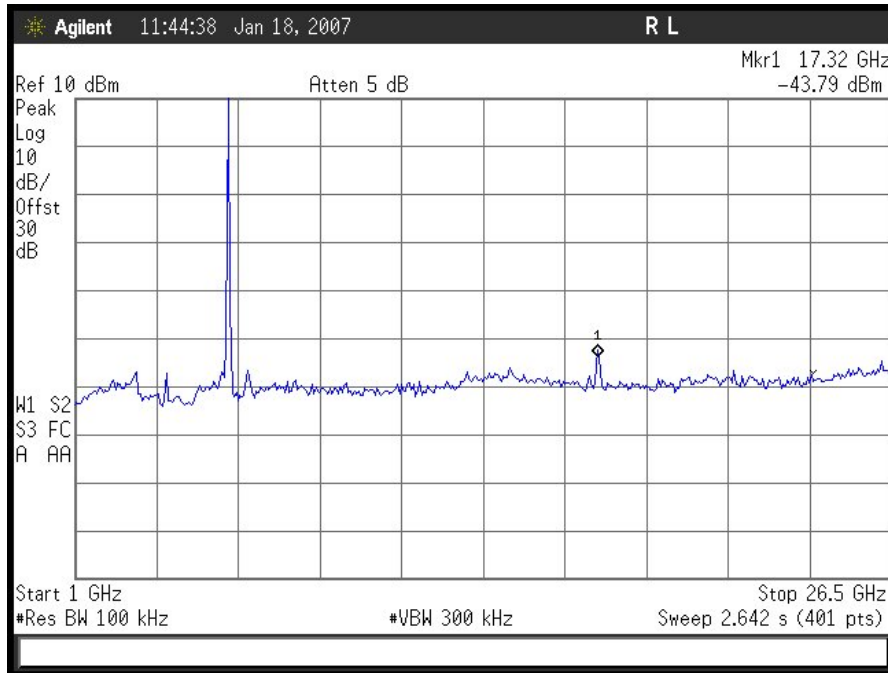


802.11/a – Mid Channel Conducted Emissions 1-26.5GHz

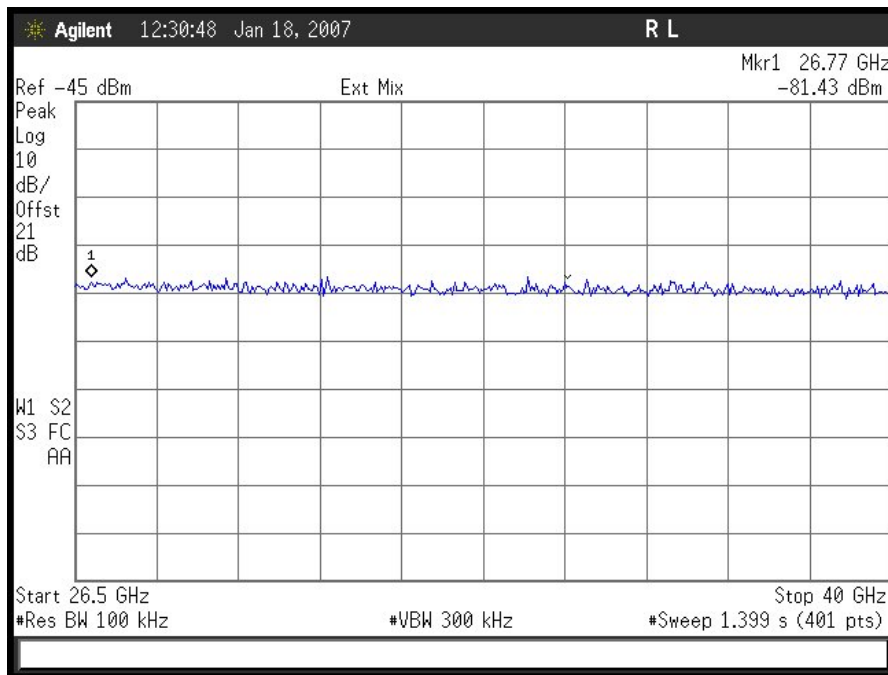


802.11/a – Mid Channel Conducted Emissions 26.5- 40GHz

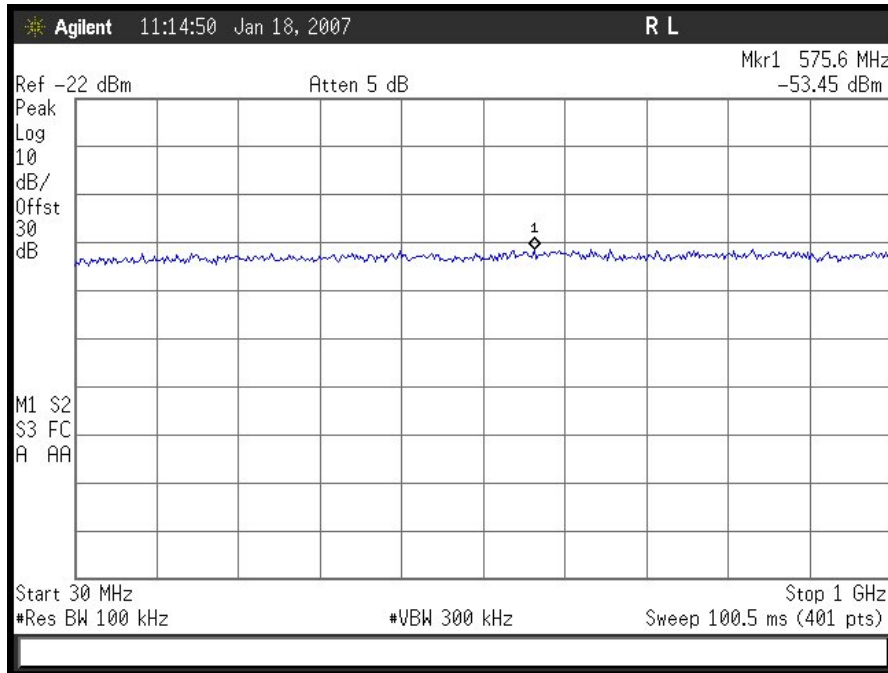

802.11/a – High Channel Conducted Emissions 30MHz- 1GHz

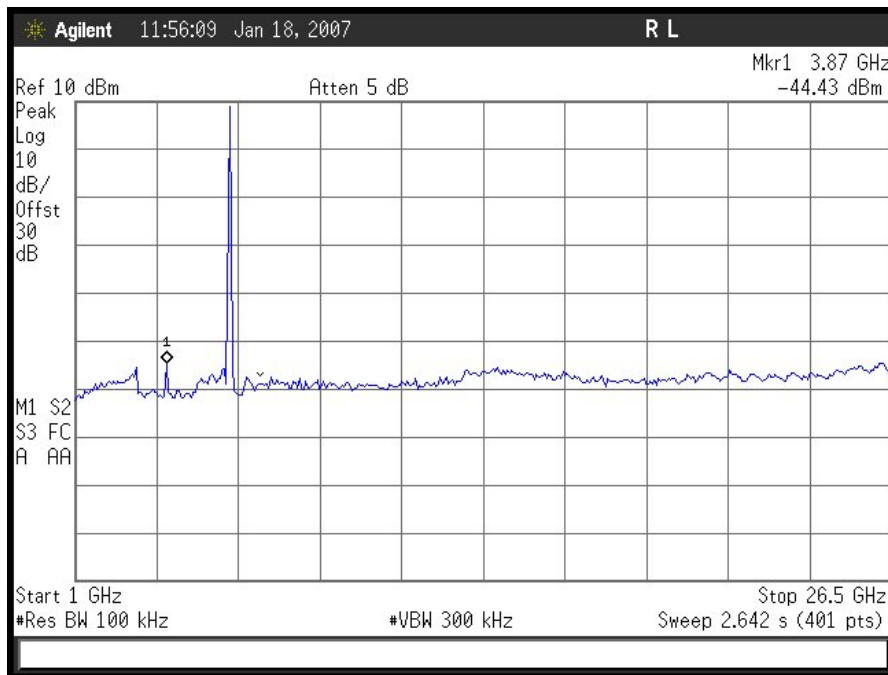

802.11/a – High Channel Conducted Emissions 1-26.5GHz

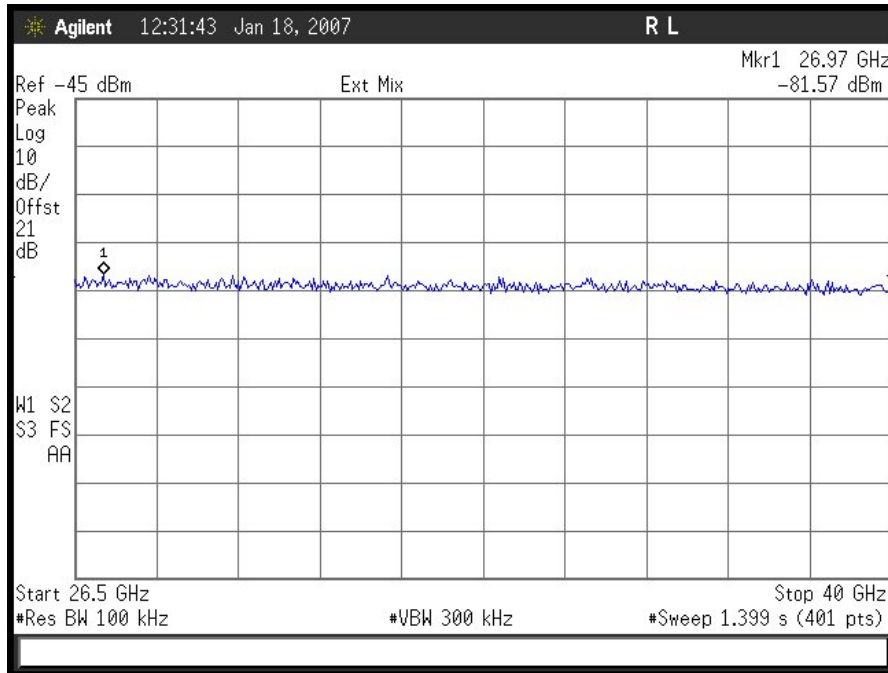

802.11/a – High Channel Conducted Emissions 26.5- 40GHz



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through a directional couple. The power was monitored at the coupler port with a Peak Power Meter. The power level was set to the maximum level. The RBW and VBW were set to 3 kHz and a SPAN of 3.0 MHz with a 100 second sweep to the Spectrum Analyzer. Measurements were carried out at the low, mid and high channels.

Test Results: Equipment complies with the peak power spectral density limits of § 15.247 (e). The peak power spectral density was determined from plots on the following page(s).


802.11b				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-4.80	8	12.80
Mid	2437	-2.97	8	10.97
High	2462	-4.27	8	12.27

802.11g				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.03	8	20.03
Mid	2437	-3.90	8	11.90
High	2462	-12.20	8	20.20


802.11a				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-1.56	8	9.56
Mid	5785	-2.41	8	10.41
High	5825	-2.73	8	10.73

Test Engineer: Shawn McMillen


Test Date: January 18 & February 20, 2007

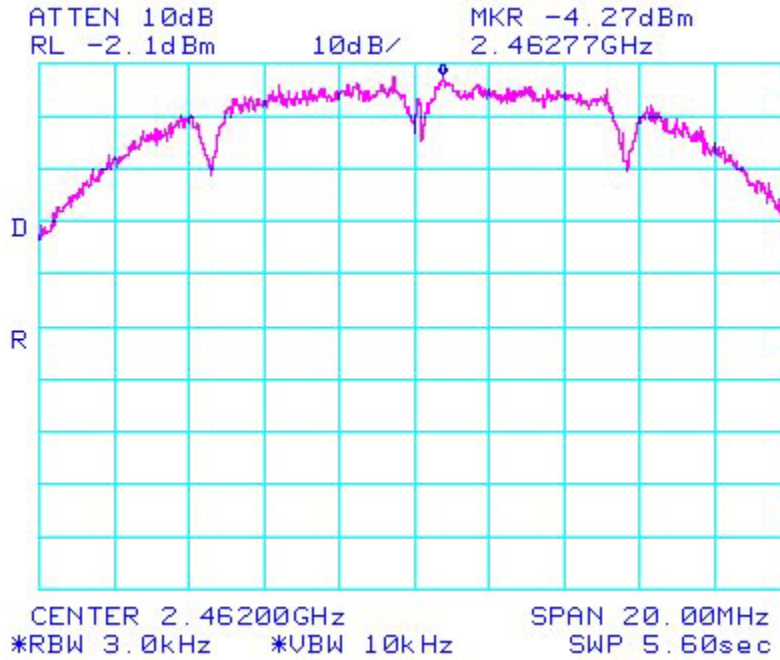


802.11/b – High Ch Peak Power Spectral Density

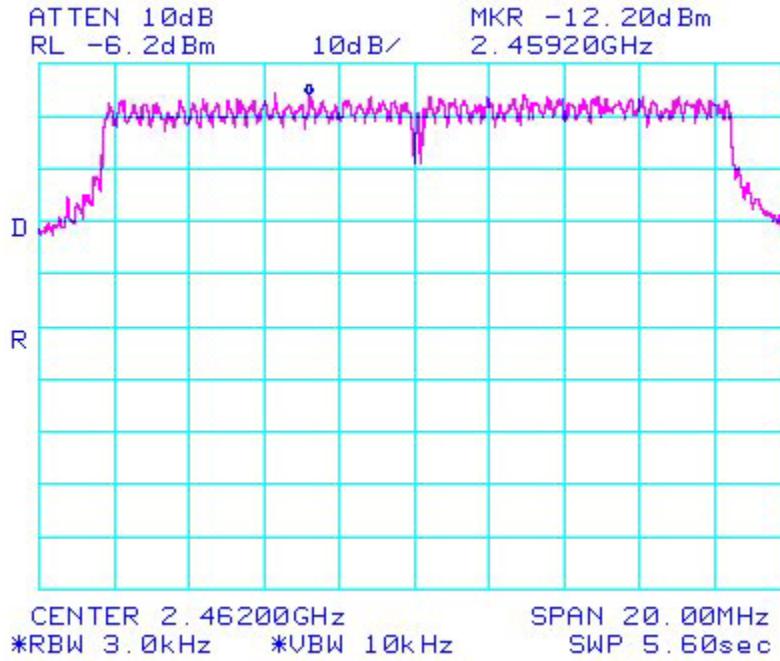


802.11/g – High Ch Peak Power Spectral Density

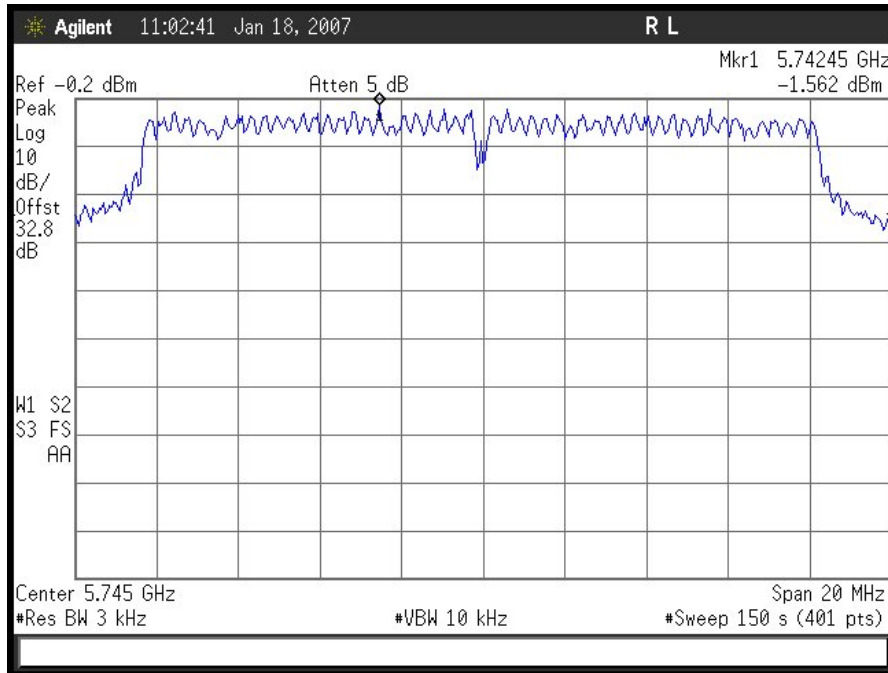


802.11/a – Low Ch Peak Power Spectral Density

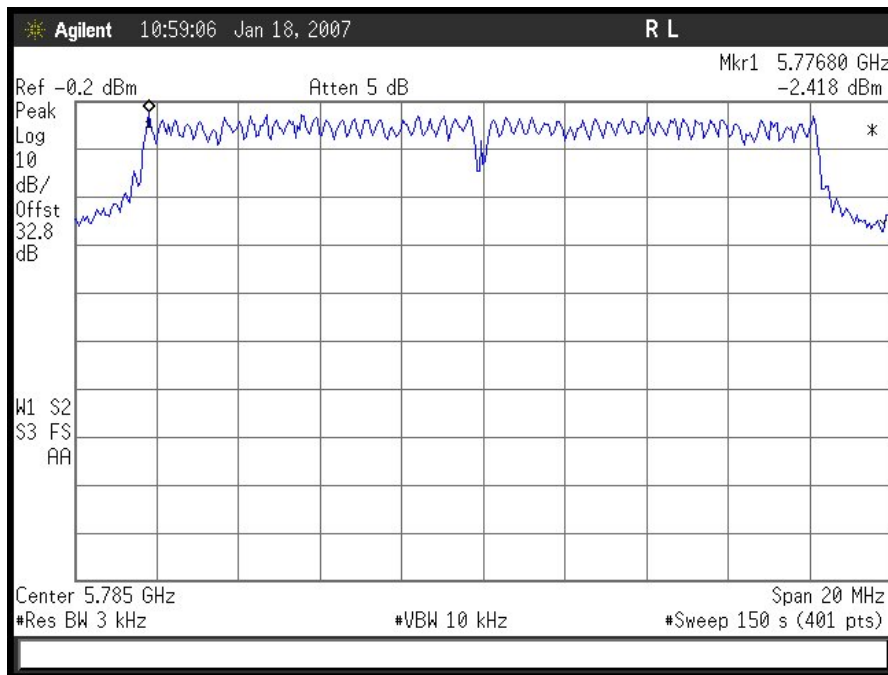

802.11/a – Mid Ch Peak Power Spectral Density

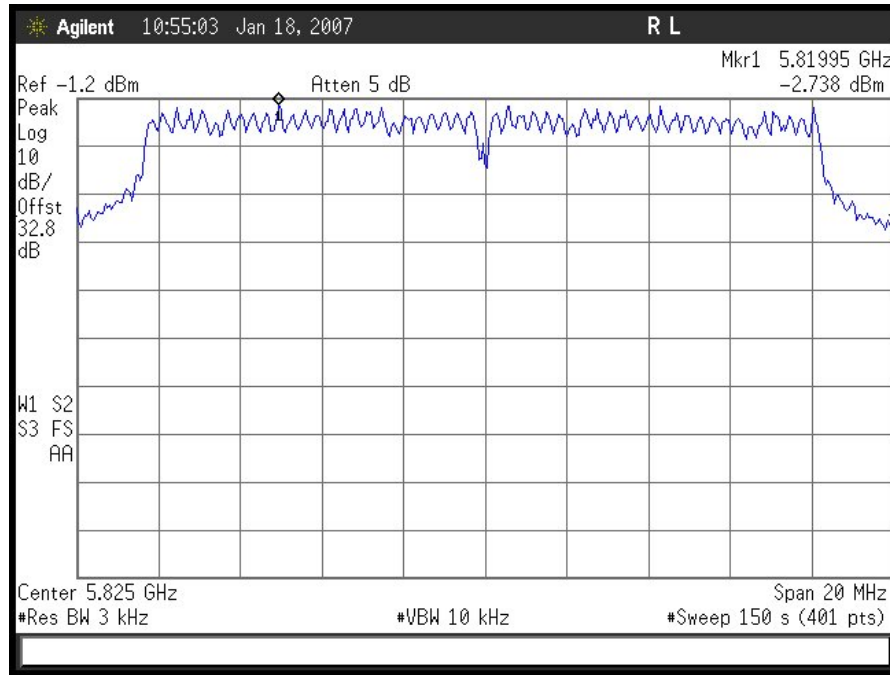

802.11/a – High Ch Peak Power Spectral Density



Block Diagram 4. Peak Power Spectral Density Test Setup



IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	2/9/2006	2/9/2007
1S2184	BILOG ANTENNA	CHASE	CBL6112A	1/3/2007	1/3/2008
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	11/28/2006	11/28/2007
1S2198	ANTENNA, HORN	EMCO	3115	8/17/2006	8/17/2007
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	3/23/2004	3/23/2007
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2263	CHAMBER, 10 METER	RANTEC	N2-14	8/15/2006	8/15/2007
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	1/12/2007	2/12/2007
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	1/12/2007	2/12/2007
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2008
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2128	Harmonic Mixer	Hewlett Packard	11970A	10/07/2003	10/07/2006
1S2129	Harmonic Mixer	Hewlett Packard	11970K	10/07/2003	10/07/2006

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



End of Report