



# RADIO TEST REPORT

Test Report No. : 11201776H-C-R2

**Applicant** : KEYENCE CORPORATION  
**Type of Equipment** : Handheld Mobile Computer  
**Model No.** : BT-W75GA  
**FCC ID** : RF41395A  
**Test regulation** : FCC Part 15 Subpart E: 2016  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11201776H-C-R1. 11201776H-C-R1 is replaced with this report.

**Date of test:** April 13 to 27, 2016

**Representative test engineer:**

Kazuya Yoshioka  
Engineer

Consumer Technology Division

**Approved by:**

Takayuki Shimada  
Engineer

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)



---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information.....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.).....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results.....</b>	<b>7</b>
<b>SECTION 4: Operation of E.U.T. during testing.....</b>	<b>10</b>
<b>SECTION 5: Conducted Emission.....</b>	<b>12</b>
<b>SECTION 6: Radiated Spurious Emission and Band Edge Compliance.....</b>	<b>13</b>
<b>SECTION 7: Antenna Terminal Conducted Tests.....</b>	<b>15</b>
<b>APPENDIX 1: Test data .....</b>	<b>16</b>
Conducted Emission .....	16
26 dB Emission Bandwidth and 99 % Occupied Bandwidth.....	17
6 dB Bandwidth .....	27
Maximum Conducted Output Power .....	30
Maximum Power Spectral Density .....	35
Radiated Spurious Emission .....	44
Conducted Spurious Emission .....	74
<b>APPENDIX 2: Test instruments .....</b>	<b>75</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>77</b>
Conducted Emission .....	77
Radiated Spurious Emission .....	78
Worst Case Position .....	79

## **SECTION 1: Customer information**

Company Name : KEYENCE CORPORATION  
Address : 1-3-14, Higashinakajima Higashiyodogawa-ku Osaka 533-8555 Japan  
Telephone Number : +81-6-6379-1111  
Facsimile Number : +81-6-6325-6818  
Contact Person : Tsuyoshi Aoyama

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Handheld Mobile Computer  
Model No. : BT-W75GA  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC 2.8 V – 4.2 V (Battery)  
DC 5.3 V (Cradle)  
Receipt Date of Sample : April 11, 2016  
Country of Mass-production : Japan  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Model: BT-W75GA (referred to as the EUT in this report) is a Handheld Mobile Computer.

#### **General Specification**

Clock frequency(ies) in the system : 38.4 MHz (X'tal)  
Operating Temperature : -20 deg. C - +50 deg. C

**Radio Specification**

Radio Type : Transceiver  
Power Supply (inner) : DC 1.8 V / DC 3.3 V

	IEEE802.11b	IEEE802.11g/n (20 M band)	IEEE802.11a/n (20 M band) *1)	IEEE802.11n (40 M band) *1)
Frequency of operation	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	5180 MHz - 5240 MHz 5280 MHz - 5320 MHz 5500 MHz - 5580 MHz 5660 MHz - 5700 MHz 5745 MHz - 5825 MHz	5190 MHz - 5230 MHz 5310 MHz 5510 MHz - 5550 MHz 5670 MHz 5755 MHz - 5795 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK)	
Channel spacing	5MHz		20MHz	40MHz
Antenna type	Multilayer Monopole Antenna			
Antenna Connector type	Soldering			
Antenna Gain	2.1 dBi (2.4 GHz)		2.4 dBi (5 GHz)	

	Bluetooth Ver.2.1 with EDR function
Frequency of operation	2402 MHz - 2480 MHz
Type of modulation	FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Channel spacing	1 MHz
Antenna type	Multilayer Monopole Antenna
Antenna Connector type	Soldering
Antenna Gain	2.1 dBi

\*1) This test report applies to WLAN (5GHz band) part.  
\*Wireless LAN and Bluetooth do not transmit simultaneously.

**Variant model**

This model has a variant model: BT-W70GA.

BT-W70GA is a Laser-type handy scanner. BT-W75GA is a Camera-type handy scanner.


The schematic differences between BT-W70GA and BT-W75GA are the following diagrams.

Circuit design related with WLAN/Bluetooth is same between 2 models.

These difference cause no influence to radio specification.

There was no degradation of EMC characteristic.

Therefore we can consider them electrically identical.

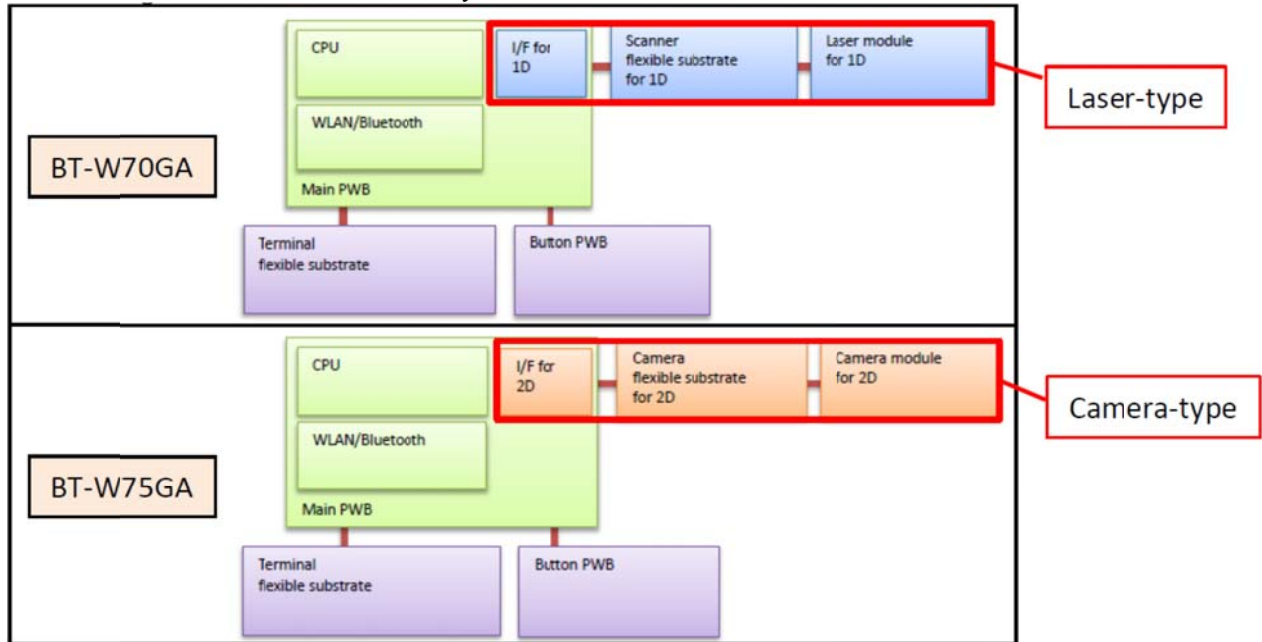

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart E  
FCC part 15 final revised on April 6, 2016.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart E  
Unlicensed National Information Infrastructure Devices  
Section 15.407 General technical requirements

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013	FCC: 15.407 (b) (6) / 15.207	QP 18.3 dB, 0.65740 MHz, N AV 15.9 dB, 0.65740 MHz, N	Complied	-
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
26 dB Emission Bandwidth	FCC: KDB Publication Number 789033	FCC: 15.407 (a) (1) (2) (3)	See data	N/A	Conducted
	IC: -	IC: -			
Maximum Conducted Output Power	FCC: KDB Publication Number 789033	FCC: 15.407 (a) (1) (2) (3)		Complied	Conducted
	IC: -	IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)			
Maximum Power Spectral Density	FCC: KDB Publication Number 789033	FCC : 15.407 (a) (1) (2) (3)		Complied	Conducted
	IC: -	IC: RSS-247 6.2.1 (1) 6.2.2 (1) 6.2.3 (1) 6.2.4 (1)			
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033	FCC: 15.407 (b), 15.205 and 15.209	0.2 dB 7333.190 MHz, AV, Hori. 5350.000 MHz, AV, Hori.	Complied	Conducted (< 30 MHz) / Radiated (> 30 MHz) *1)
	IC: -	IC: RSS-247 6.2.1 (2) 6.2.2 (2) 6.2.3 (2) 6.2.4 (2)			
6 dB Emission Bandwidth	FCC: ANSI C63.10-2013	FCC: 15.407 (e)	See data	Complied	Conducted
	IC: -	IC: RSS-247 6.2.4 (1)			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\* For DFS tests, please see the test report number 11201776H-D issued by UL Japan, Inc.

\*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

#### **FCC Part 15.31 (e)**

The test was performed with the New Battery (DC 4.2 V) and the EUT constantly provides the stable voltage to RF part through the regulator regardless of input voltage from New Battery. Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Band Width	RSS-Gen 6.6	IC: -	N/A	N/A	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .  
Ise EMC Lab.

Antenna terminal test Uncertainty (+/-)							
Power meter		Conducted emission and Power density			Conducted emission		Channel power
Below 1 GHz	Above 1 GHz	Below 1 GHz	1 GHz - 3 GHz	3 GHz - 18 GHz	18 GHz - 26.5 GHz	26.5 GHz - 40 GHz	
0.9 dB	1.0 dB	1.4 dB	1.7 dB	2.8 dB	2.8 dB	2.9 dB	

Frequency range	Conducted emission using AMN(LISN) (+dB)
0.009 – 0.15MHz	3.5 dB
0.15 – 30MHz	2.9 dB

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(±dB)		(10 m*)(±dB)	
	30 – 200 MHz	200 – 1000MHz	30 – 200 MHz	200 – 1000MHz
Horizontal	4.9 dB	5.2 dB	4.9 dB	5.0 dB
Vertical	4.6 dB	5.9 dB	5.0 dB	5.0 dB

Radiated emission				
(3 m*)(±dB)		(1 m*)(±dB)	(0.5 m*)(±dB)	(10 m*)(±dB)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.1 dB	5.3 dB	5.1 dB	5.1 dB	5.3 dB

\*Measurement distance

#### Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.



### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Mode(s)**

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals -” of TCB Council Workshop October 2009.

<b>Mode</b>	<b>Remarks*</b>
IEEE 802.11a (11a)	18 Mbps, PN9
IEEE 802.11n SISO 20 MHz BW (11n-20)	MCS 0, PN9
IEEE 802.11n SISO 40 MHz BW (11n-40)	MCS 1, PN9
*Transmitting duty was 100 % on all tests.	
*The worst condition was determined based on the test result of Maximum Conducted Output Power.	
*Power of the EUT was set by the software as follows; Power settings: 13 dBm Software: calibrateG *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

\*The details of Operation mode(s)

<b>Test Item</b>	<b>Operating Mode</b>	<b>Tested Frequency</b>			
		<b>Lower Band</b>	<b>Middle Band</b>	<b>Additional Band</b>	<b>Upper Band</b>
Conducted emission, Radiated Spurious Emission (Below 1 GHz), Conducted Spurious Emission	11n-40 Tx *1)	-	-	5670 MHz	-
26 dB Emission Bandwidth	11a Tx 11n-20 Tx	-	5280 MHz 5300 MHz 5320 MHz	5500 MHz 5580 MHz 5700 MHz	-
	11n-40 Tx	-	5310 MHz	5510 MHz 5550 MHz 5670 MHz	-
99 % Occupied Bandwidth, Maximum Conducted Output Power, Maximum Power Spectral Density	11a Tx 11n-20 Tx	5180 MHz 5220 MHz 5240 MHz	5280 MHz 5300 MHz 5320 MHz	5500 MHz 5580 MHz 5700 MHz	5745 MHz 5785 MHz 5825 MHz
	11n-40 Tx	5190 MHz 5230 MHz	5310 MHz	5510 MHz 5550 MHz 5670 MHz	5755 MHz 5795 MHz
6 dB Bandwidth	11a Tx 11n-20 Tx	-	-	-	5745 MHz 5785 MHz 5825 MHz
	11n-40 Tx	-	-	-	5755 MHz 5795 MHz
Radiated Spurious Emission (Above 1 GHz)	11n-20 Tx *2)	5180 MHz 5240 MHz	5320 MHz	5500 MHz 5580 MHz 5700 MHz	5745 MHz 5785 MHz 5825 MHz
	11n-40 Tx	5190 MHz 5230 MHz	5310 MHz	5510 MHz 5550 MHz 5670 MHz	5755 MHz 5795 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test.					
*2) Since 11a and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power.					

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 4.2 Configuration and peripherals

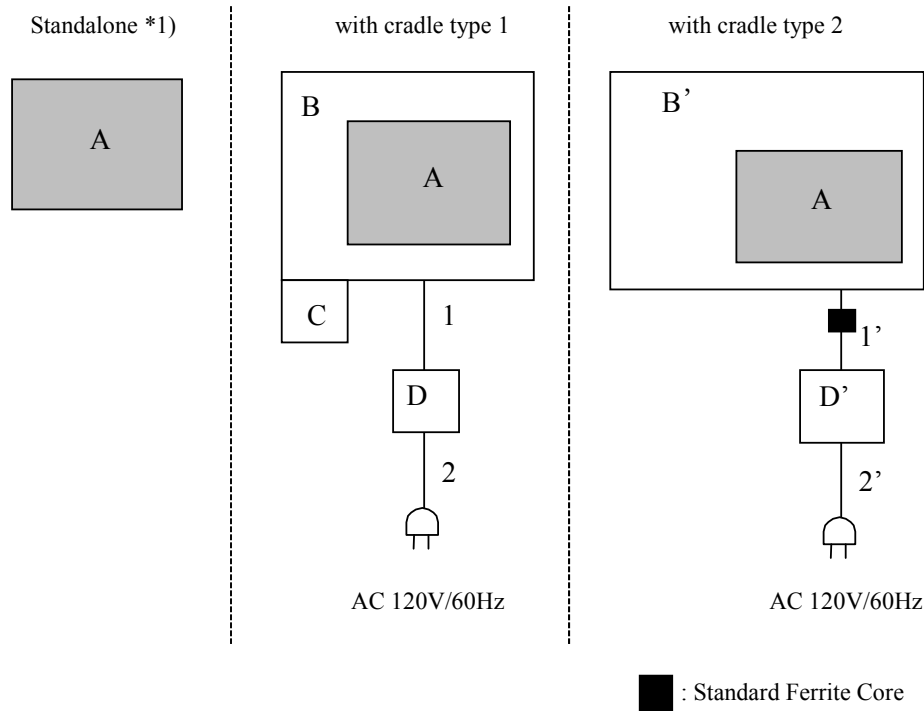

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.  
\*1) Antenna terminal conducted tests were performed only with this condition.

### Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Handheld Mobile Computer	BT-W75GA	#2A610013 *1) #2A610012 *2)	KEYENCE CORPORATION	EUT
B	Cradle	BT-WUC7UGA	#1A610170	KEYENCE CORPORATION	*3)
B'	Cradle	BT-WUC74GA	#1A610013	KEYENCE CORPORATION	-
C	USB Memory	OP-87502	-	KEYENCE CORPORATION	-
D	AC Adaptor	OP-88020	-	KEYENCE CORPORATION	-
D'	AC Adaptor	SEE60N2-16-0	ES057	Sanken Electric Co., Ltd.	-

\*1) Used for Antenna terminal conducted tests  
\*2) Used for all tests except for Antenna terminal conducted tests  
\*3) Used for Conducted emission test as a representative

### List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.8	Unshielded	Unshielded	-
1'	DC Cable	1.3	Unshielded	Unshielded	-
2	AC Cable	2.0	Unshielded	Unshielded	-
2'	AC Cable	2.0	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

#### For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50 ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Detector** : QP and CISPR Average  
**Measurement range** : 0.15 MHz-30 MHz  
**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 6: Radiated Spurious Emission and Band Edge Compliance**

### **Test Procedure**

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p.\* ) in the Section 15.407 (b) (1) (2) (3).

For W58 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

\*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad :P \text{ is the e.i.r.p. (Watts)}$$

**Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD *1) RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results.  Integration Method *1) RBW: 100kHz VBW: 300kHz Span: 2MHz Band Power: 1MHz Detector: Power Averaging (RMS) Trace: 100 traces
Test Distance	3 m	4.5 m*2) (1 GHz – 10GHz), 1 m*3) (10 GHz – 26.5 GHz), 0.5 m*4) (26.5 GHz – 40 GHz)	

\*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on April 8, 2016)".

\*2) Distance Factor:  $20 \times \log(4.5 \text{ m}/3.0 \text{ m}) = 3.53 \text{ dB}$

\*3) Distance Factor:  $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

\*4) Distance Factor:  $20 \times \log(0.5 \text{ m}/3.0 \text{ m}) = -15.6 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y, Z and Cradle Type1, Cradle Type2 axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz-40 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 7: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

<b>Test</b>	<b>Span</b>	<b>RBW</b>	<b>VBW</b>	<b>Sweep time</b>	<b>Detector</b>	<b>Trace</b>	<b>Instrument used and Test method</b>
26 dB Bandwidth	Enough to capture the emission	Close to 1 % of EBW	> RBW	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
6 dB Bandwidth	Enough to capture the emission	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Conducted Output Power	-	-	-	Auto	Average	-	Power Meter (Sensor: 80 MHz BW) (Method PM-G)
Maximum Power Spectral Density	Encompass the entire EBW	1 MHz or 470 kHz *2)	≥ 3 RBW	Auto	RMS Power Averaging (200 times)	Clear Write	Spectrum Analyzer
Conducted Spurious Emission*3)	9 kHz – 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz – 30 MHz	9.1 kHz	27 kHz				

\* The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r02 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on April 8, 2016)".

\*1) Peak hold was applied as Worst-case measurement.

\*2) KDB 789033 D02 says that RBW is set to be 500 kHz for 5.725 GHz-5.850 GHz, but it is not possible with spectrum analyzer, so RBW Correction Factor ( $10 \log(500 \text{ kHz} / 470 \text{ kHz})$ ) was added to the test result.

\*3) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz-150 kHz: RBW = 200 Hz, 150 kHz-30 MHz: RBW = 9.1 kHz)

The test results and limit are rounded off to two decimals place, so some differences might be observed.

**Test data** : APPENDIX  
**Test result** : Pass

**APPENDIX 1: Test data**

**Conducted Emission**


**DATA OF CONDUCTED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.1 Semi Anechoic Chamber  
Date : 04/15/2016

Report No. : 11201776H  
Temp./Humi. : 23deg. C / 43% RH  
Engineer : Hiroyuki Furutaka

Mode / Remarks : WLAN 11n-40 MCS1 5670MHz

LIMIT : FCC15.207 QP  
FCC15.207 AV

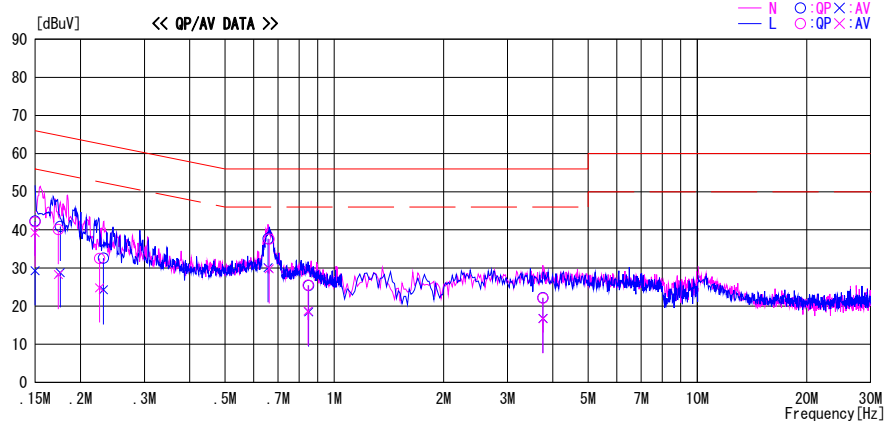

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15000	29.1	16.1	13.2	42.3	29.3	66.0	56.0	23.7	26.7	N	
0.15000	28.9	26.1	13.2	42.1	39.3	66.0	56.0	23.9	16.7	L	
0.17385	26.9	15.1	13.2	40.1	28.3	64.8	54.8	24.7	26.5	L	
0.17595	27.7	15.6	13.2	40.9	28.8	64.7	54.7	23.8	25.9	N	
0.22575	19.2	11.5	13.3	32.5	24.8	62.6	52.6	30.1	27.8	L	
0.23136	19.3	11.0	13.3	32.6	24.3	62.4	52.4	29.8	28.1	N	
0.65740	24.3	16.7	13.4	37.7	30.1	56.0	46.0	18.3	15.9	N	
0.66203	24.2	16.4	13.4	37.6	29.8	56.0	46.0	18.4	16.2	L	
0.84720	12.1	5.3	13.4	25.5	18.7	56.0	46.0	30.5	27.3	L	
0.85050	12.0	5.1	13.4	25.4	18.5	56.0	46.0	30.6	27.5	N	
3.75542	8.4	3.0	13.8	22.2	16.8	56.0	46.0	33.8	29.2	N	
3.75542	8.3	2.9	13.8	22.1	16.7	56.0	46.0	33.9	29.3	L	

CHART : WITH FACTOR. Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + ATTN + CABLE)  
Except for the above table : adequate margin data below the limits.



## 26 dB Emission Bandwidth and 99 % Occupied Bandwidth

Test place Ise EMC Lab. No.6 Measurement Room  
Report No. 11201776H  
Date April 20, 2016  
Temperature / Humidity 25deg. C / 37 % RH  
Engineer Masafumi Niwa  
Mode Tx

11a

Frequency [MHz]	26dB Emission Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	Limit [MHz]
5180	-	16.8434	-
5220	-	16.8751	-
5240	-	16.8776	-
5280	19.862	16.8500	-
5300	19.740	16.8304	-
5320	19.845	16.8653	-
5500	19.673	16.8200	-
5580	19.619	16.8580	-
5700	19.606	16.8578	-
5745	-	16.8467	-
5785	-	16.8338	-
5825	-	16.8424	-

11n-20


Frequency [MHz]	26dB Emission Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	Limit [MHz]
5180	-	17.9287	-
5220	-	17.9935	-
5240	-	17.9802	-
5280	20.176	17.9988	-
5300	20.088	18.0033	-
5320	20.155	18.0009	-
5500	20.224	18.0038	-
5580	20.197	17.9844	-
5700	20.126	17.9679	-
5745	-	17.9730	-
5785	-	18.0063	-
5825	-	18.0008	-

11n-40

Frequency [MHz]	26dB Emission Bandwidth [MHz]	99% Occupied Bandwidth [MHz]	Limit [MHz]
5190	-	36.6988	-
5230	-	36.6686	-
5310	40.310	36.5882	-
5510	40.280	36.6296	-
5550	40.598	36.6518	-
5670	40.445	36.7193	-
5755	-	36.6219	-
5795	-	36.7060	-

## 26 dB Emission Bandwidth

11a

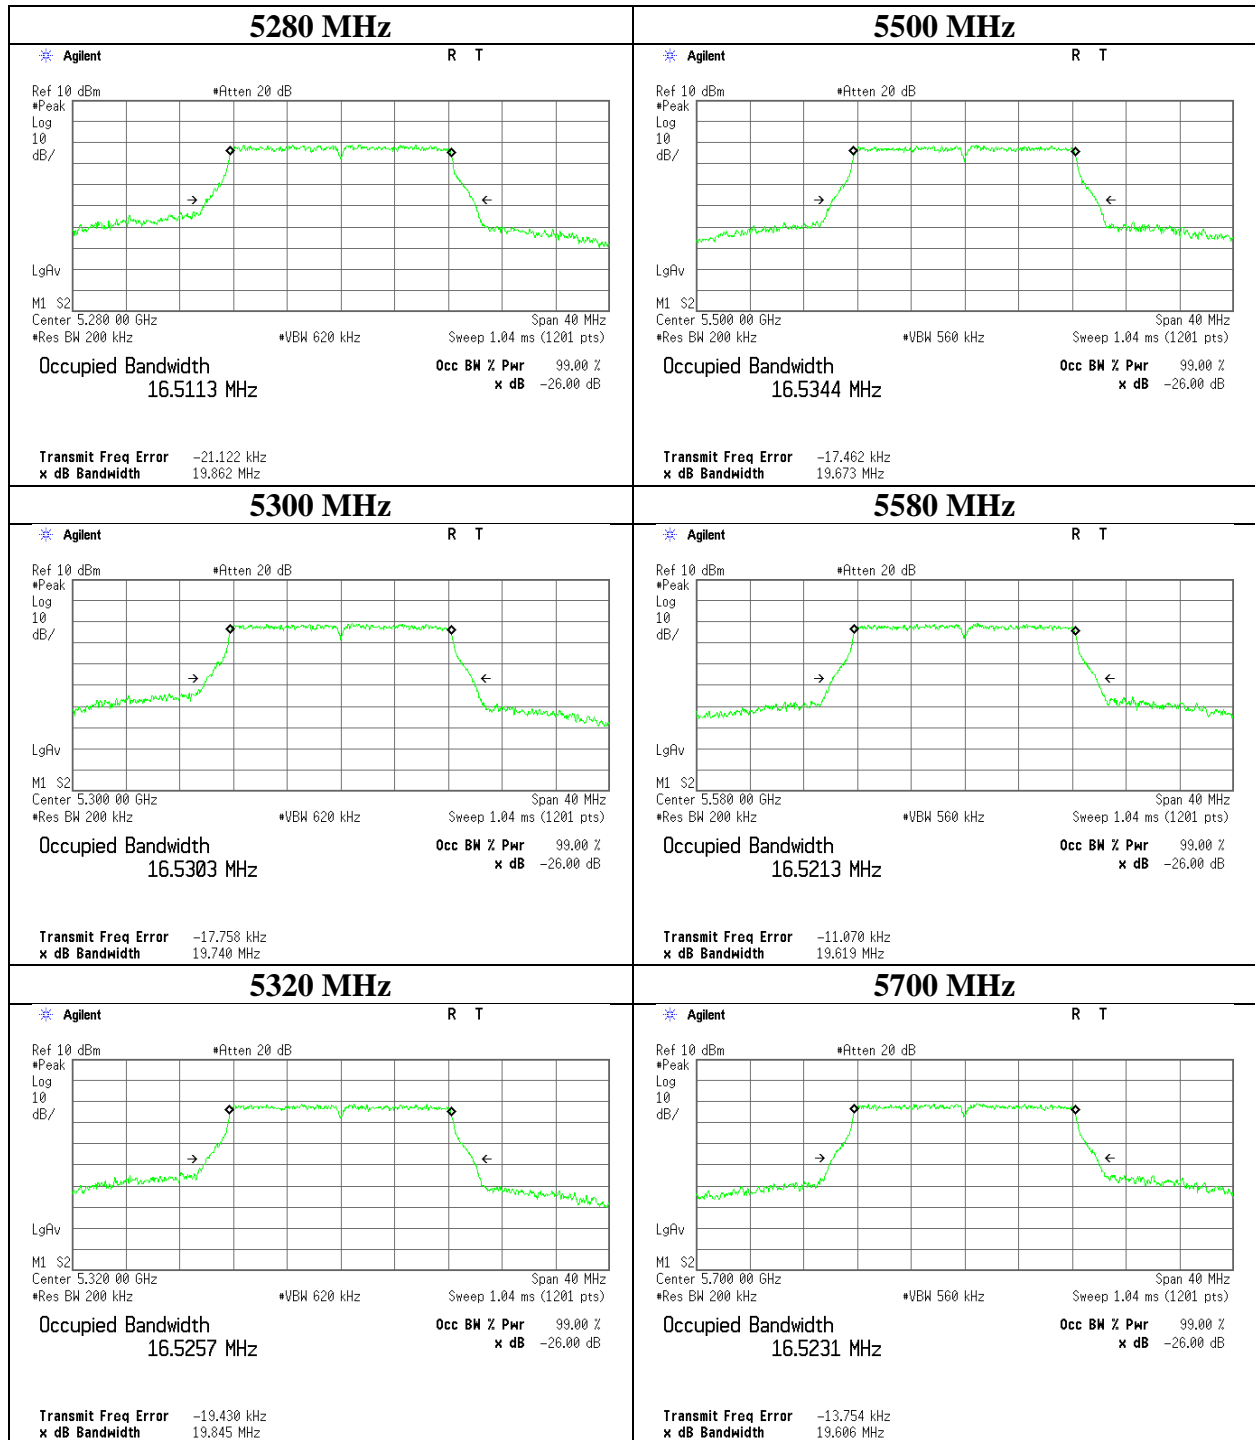

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**99 % Occupied Bandwidth**

11a

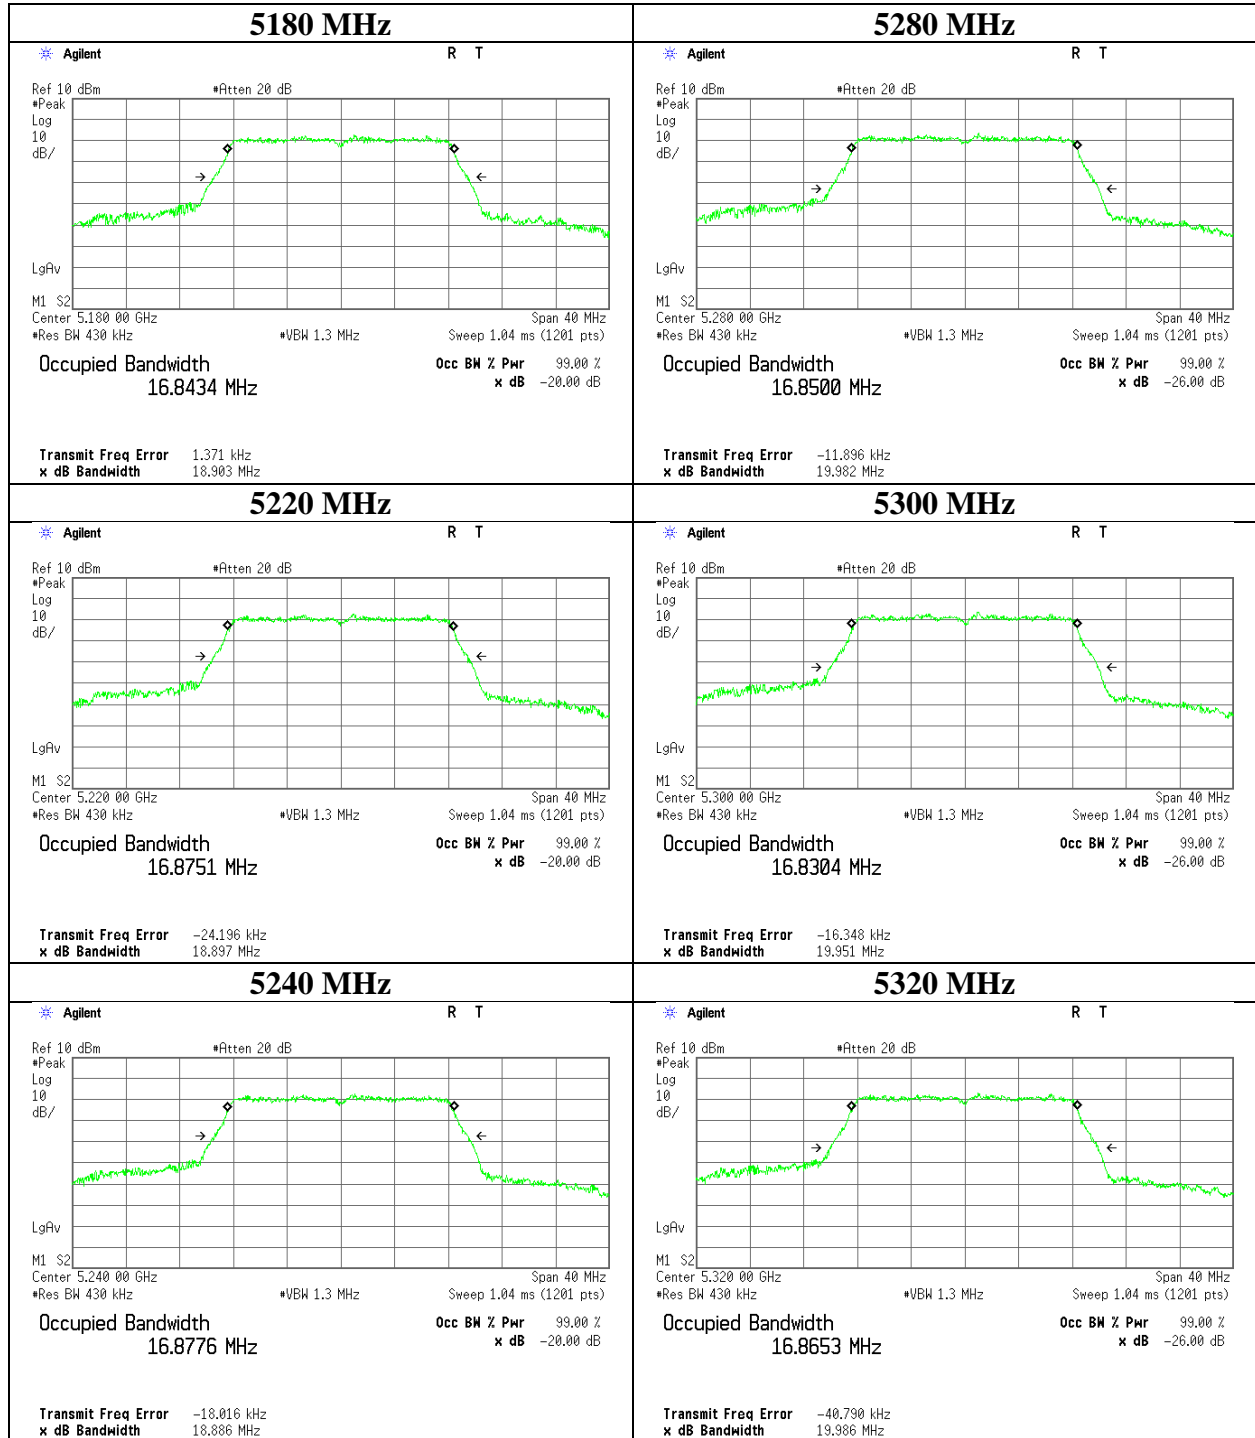

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**99 % Occupied Bandwidth**

11a

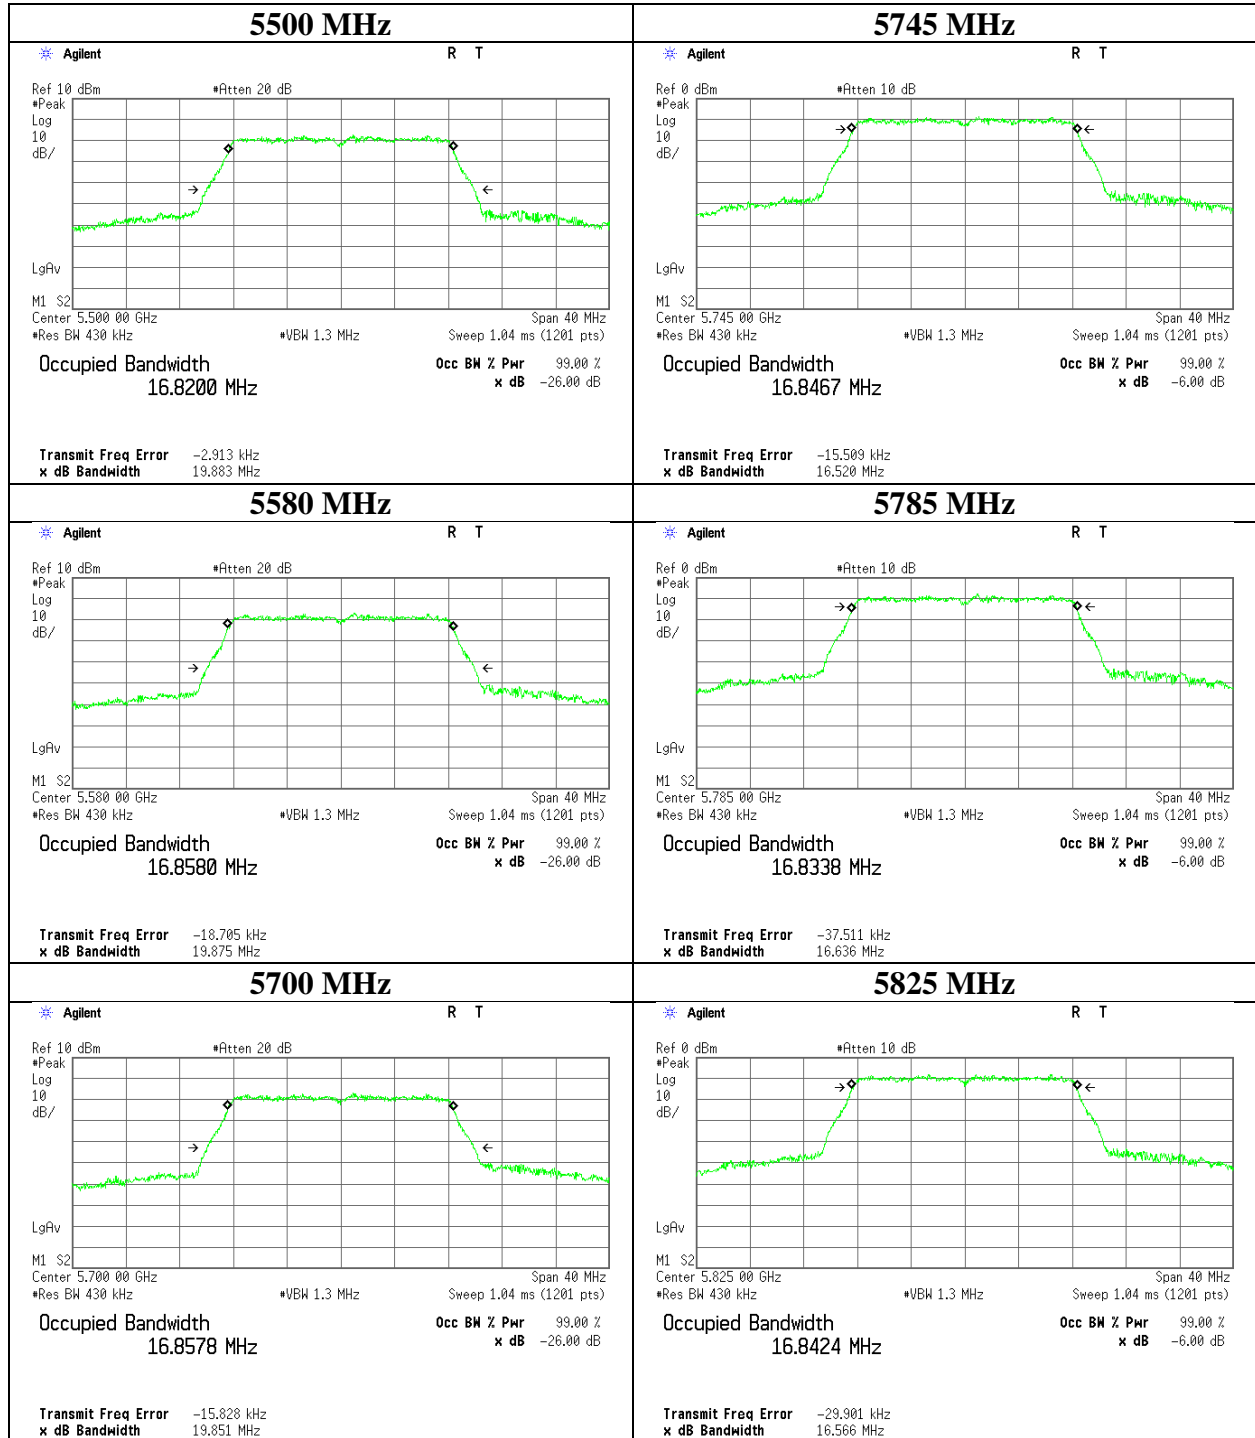

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 26 dB Emission Bandwidth

11n-20

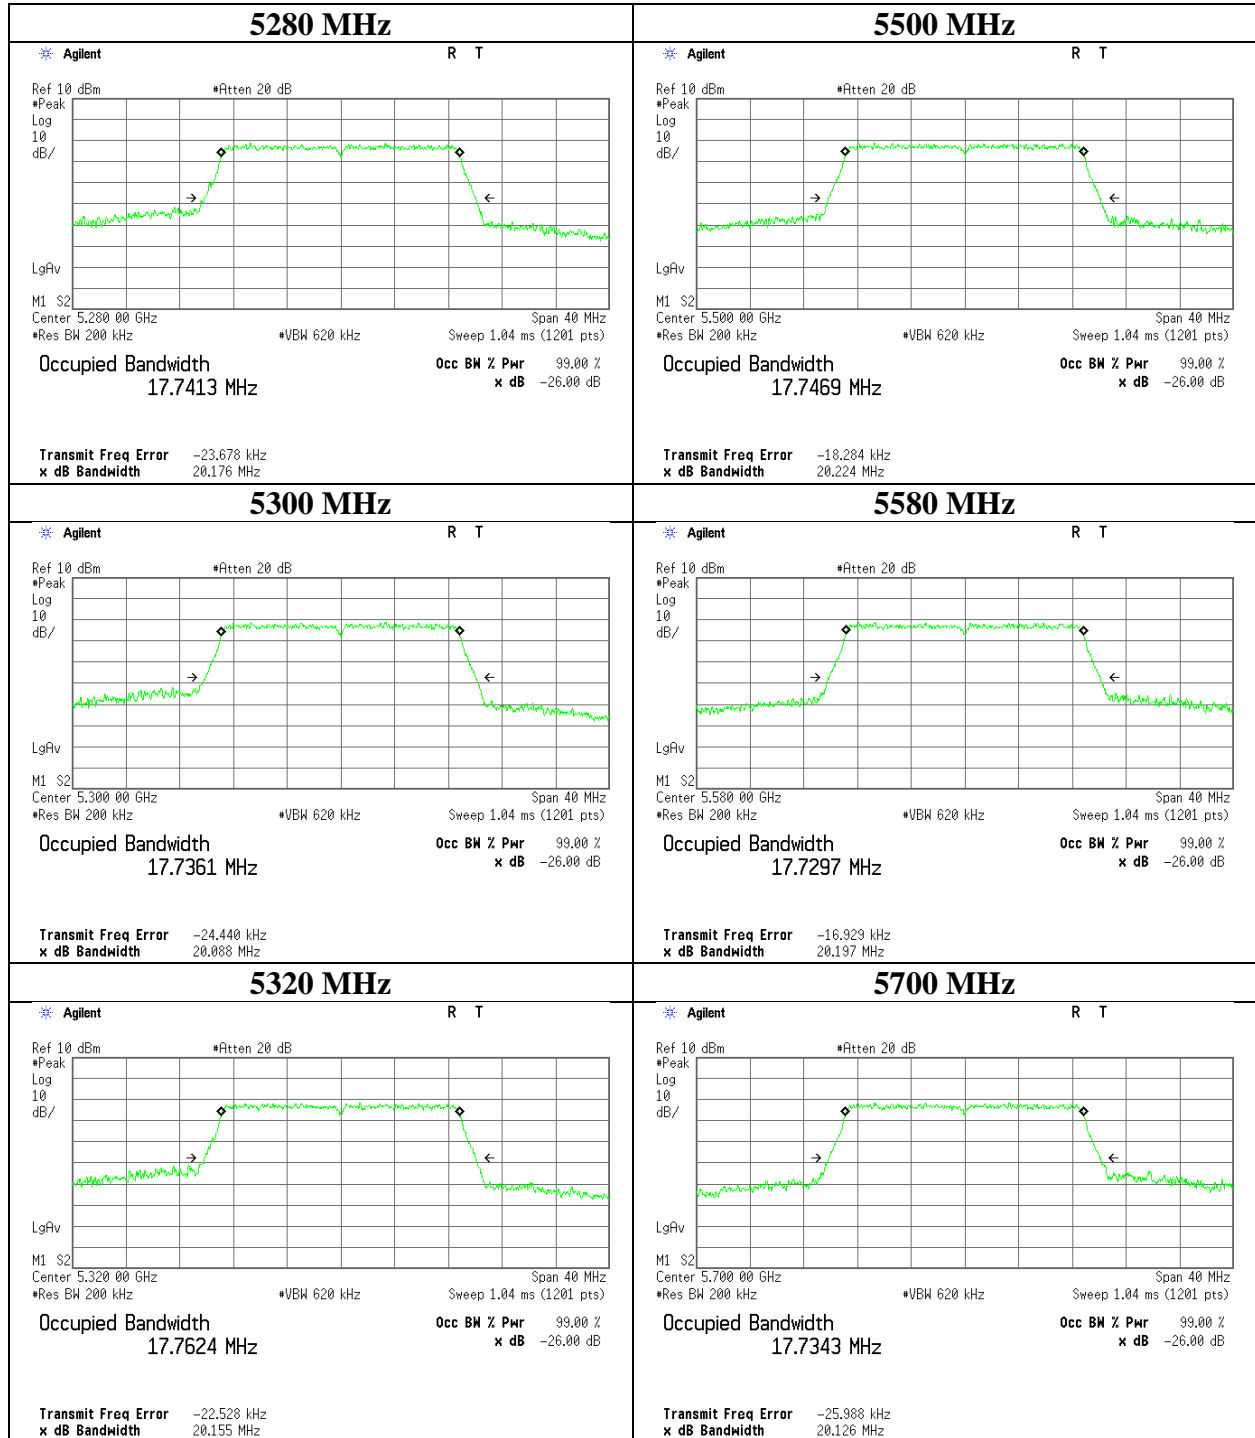

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


## 99 % Occupied Bandwidth

### 11n-20

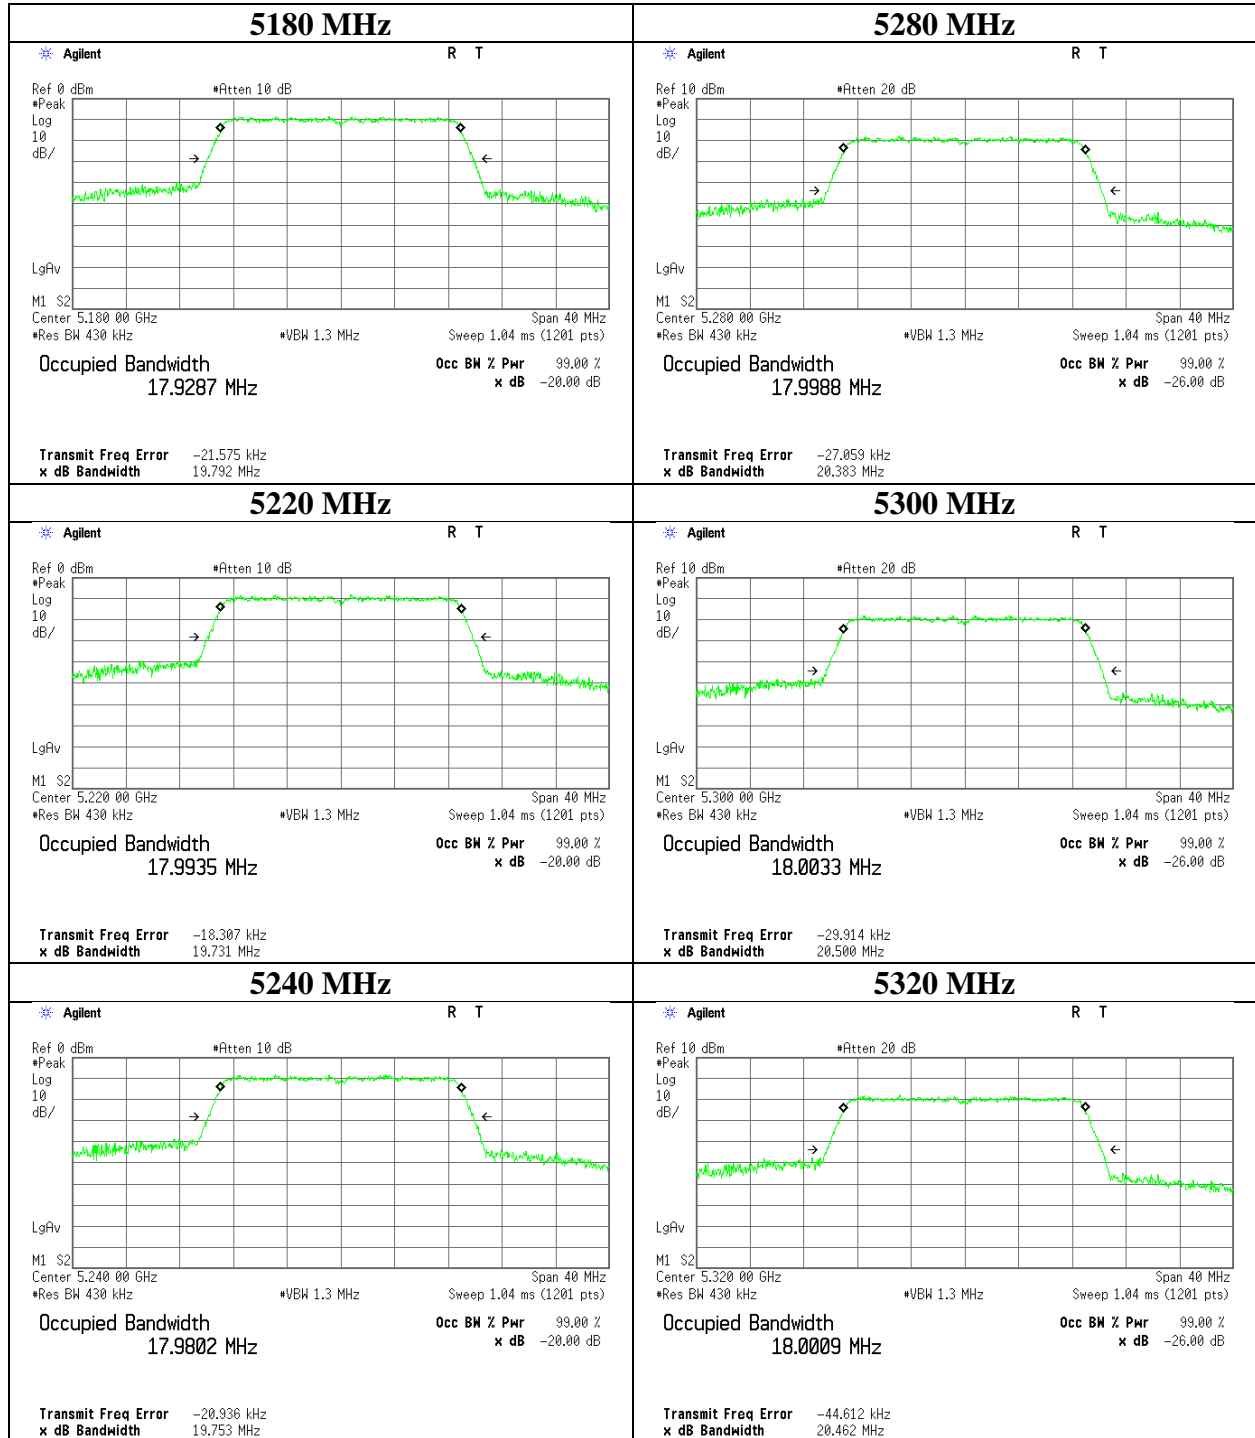

## 99 % Occupied Bandwidth

**11n-20**

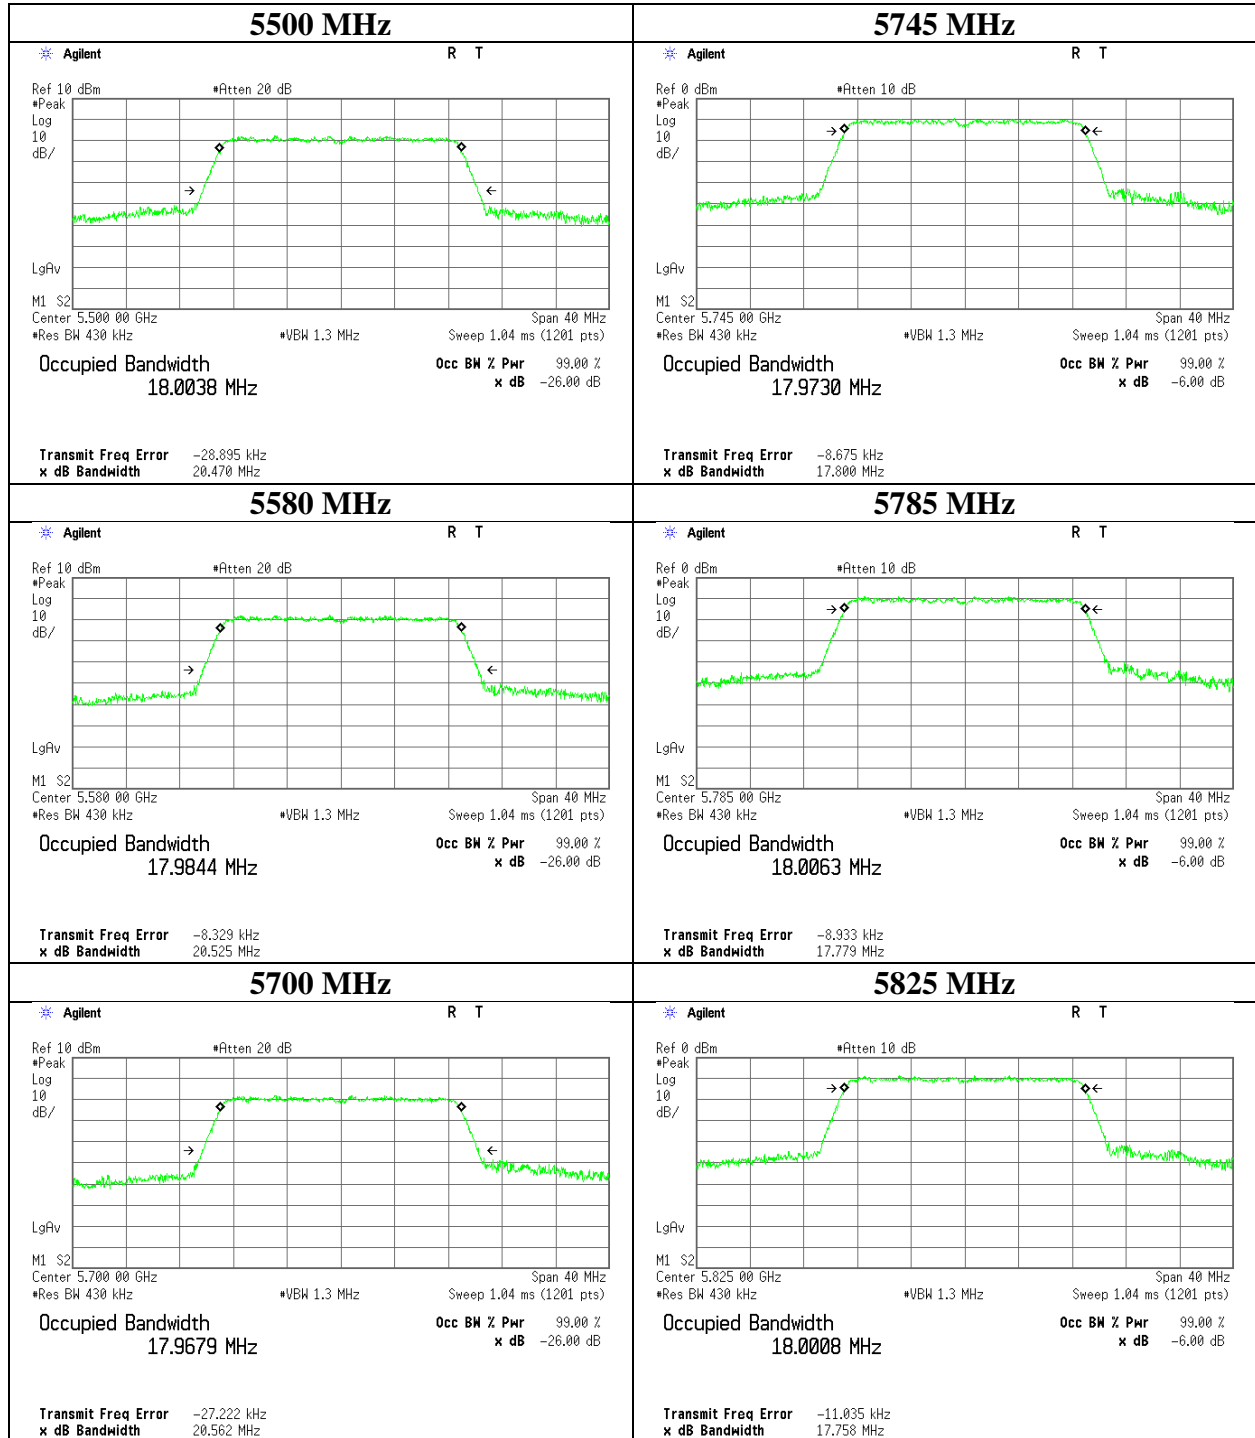

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 26 dB Emission Bandwidth

**11n-40**

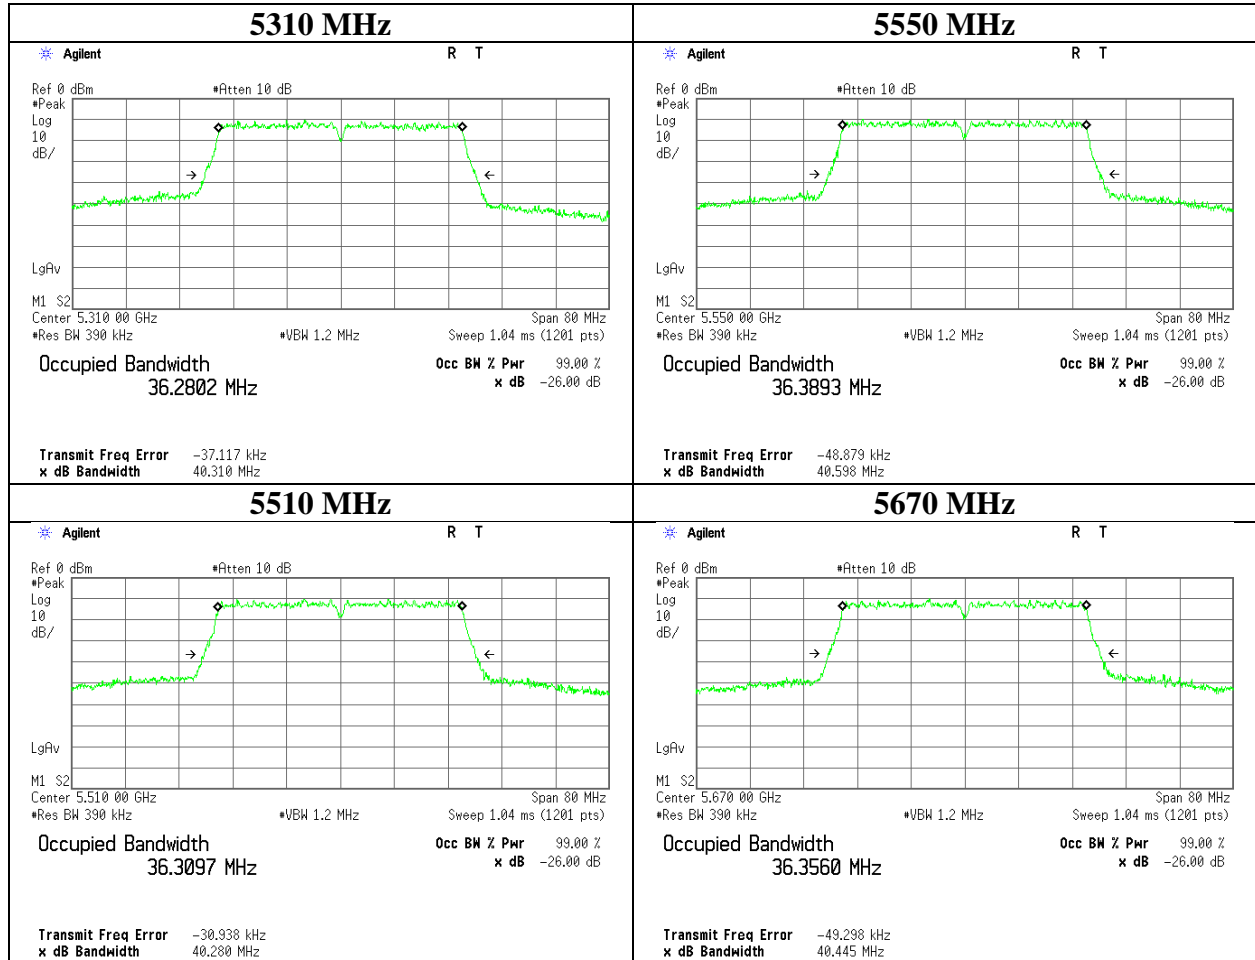

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



**99 % Occupied Bandwidth**

**11n-40**

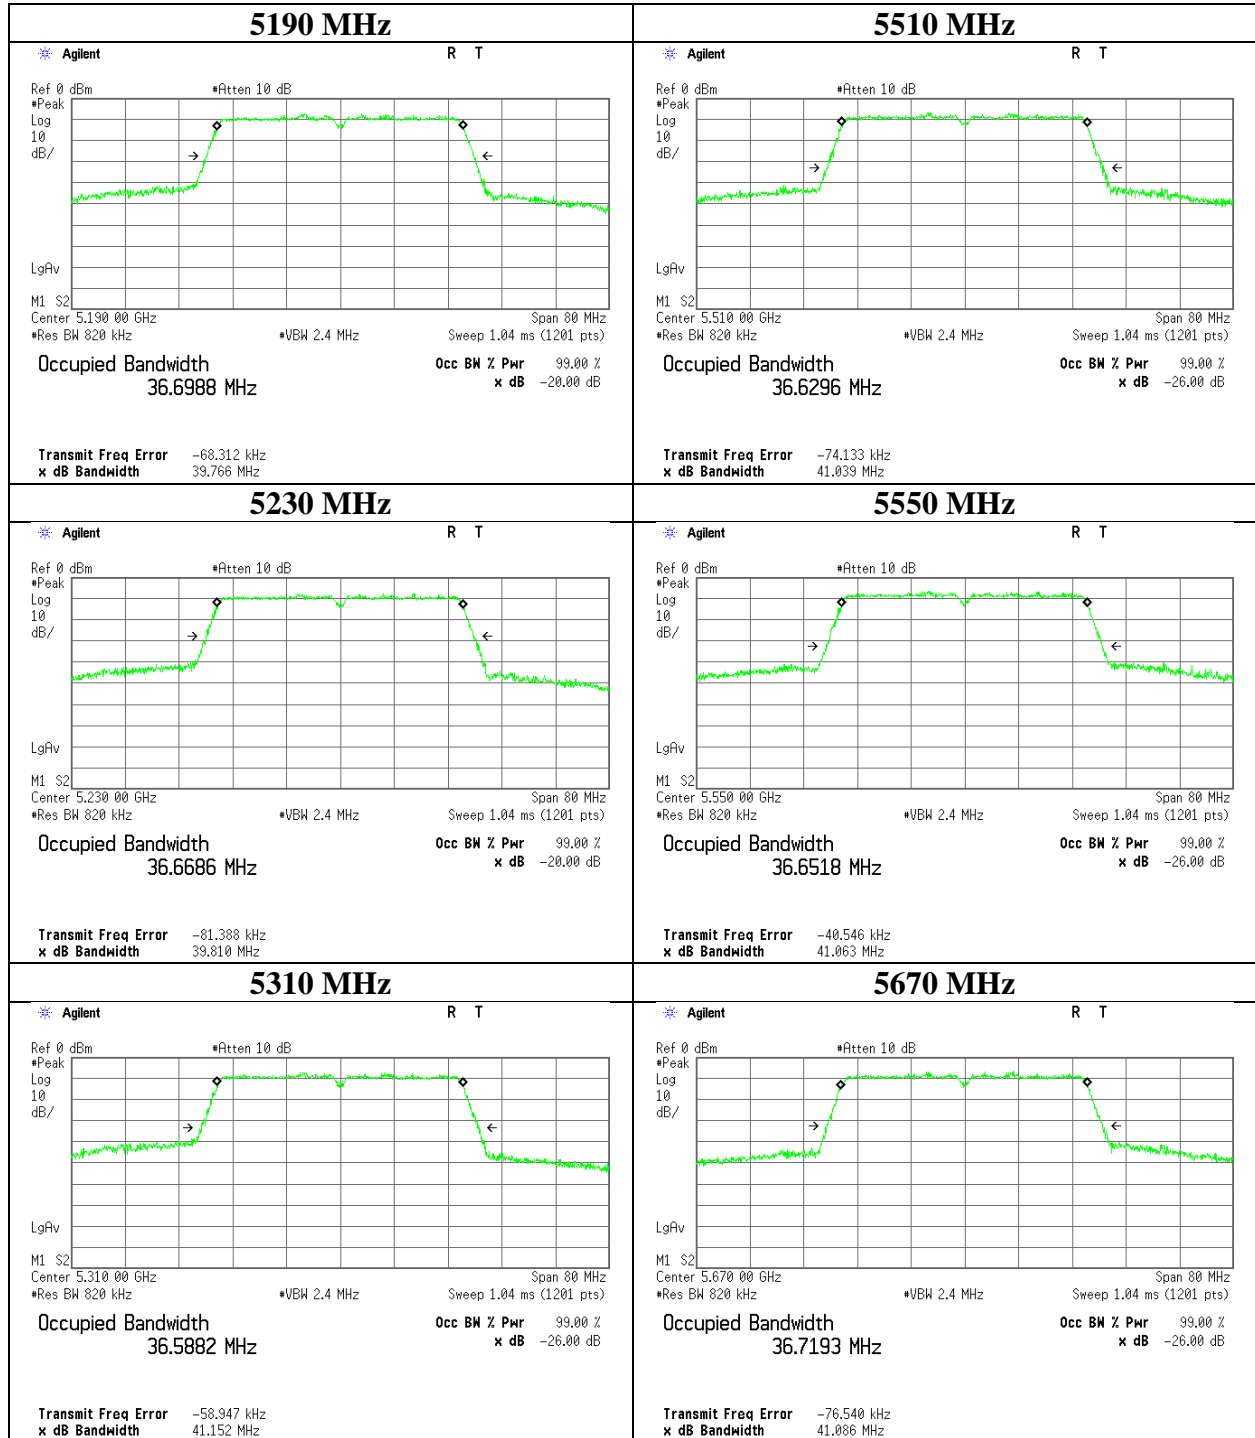

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 99 % Occupied Bandwidth

**11n-40**

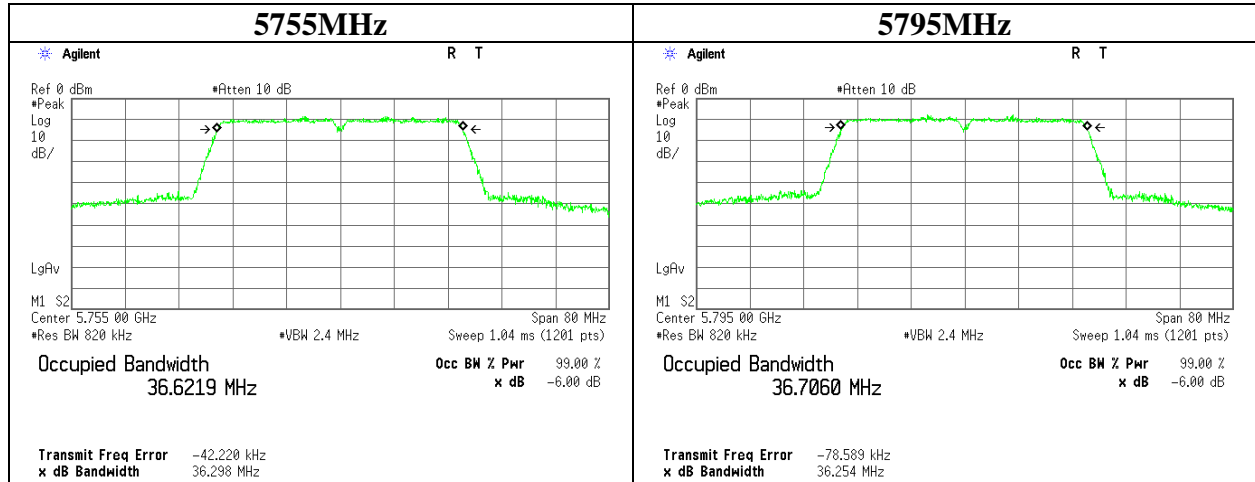

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 6 dB Bandwidth

Test place Ise EMC Lab. No.6 Measurement Room  
Report No. 11201776H  
Date April 20, 2016  
Temperature / Humidity 25deg. C / 37 % RH  
Engineer Masafumi Niwa  
Mode Tx

11a

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	16.580	> 500
5785	16.577	> 500
5825	16.566	> 500


11n-20

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5745	17.820	> 500
5785	17.827	> 500
5825	17.808	> 500

11n-40

Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [kHz]
5755	36.580	> 500
5795	36.590	> 500

### 6 dB Bandwidth

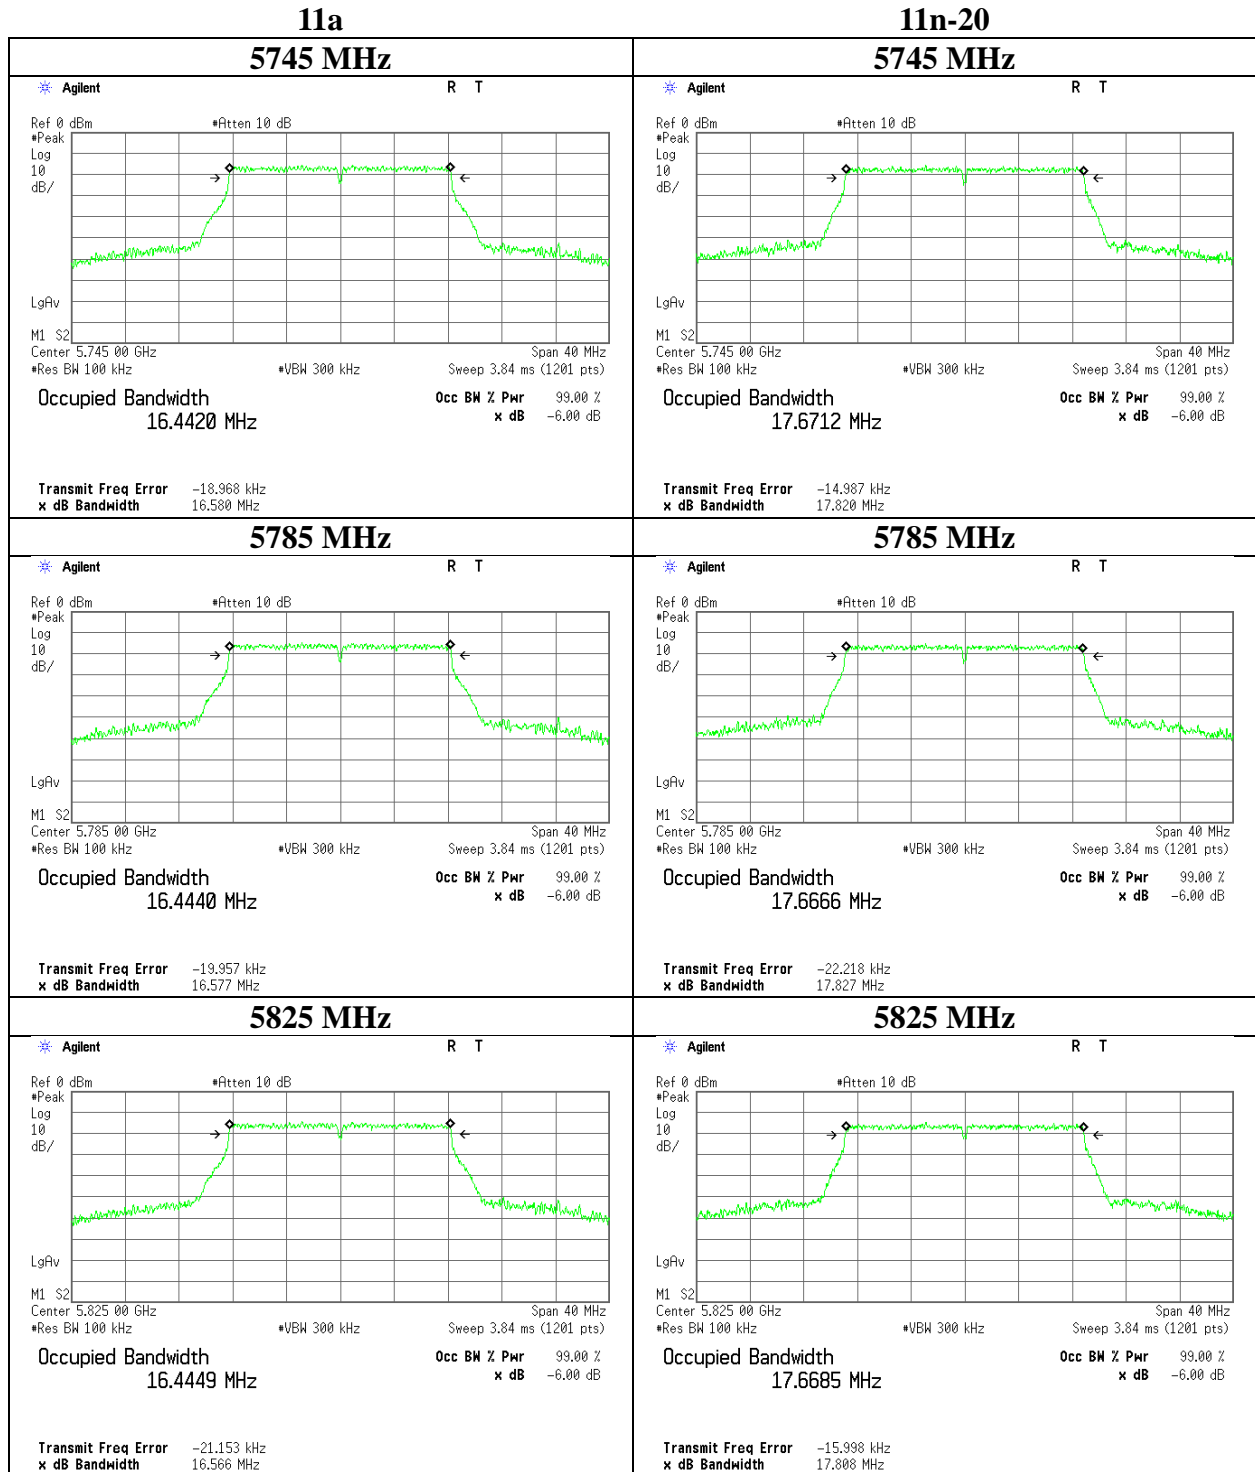

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

### 11n-40

### 5755 MHz

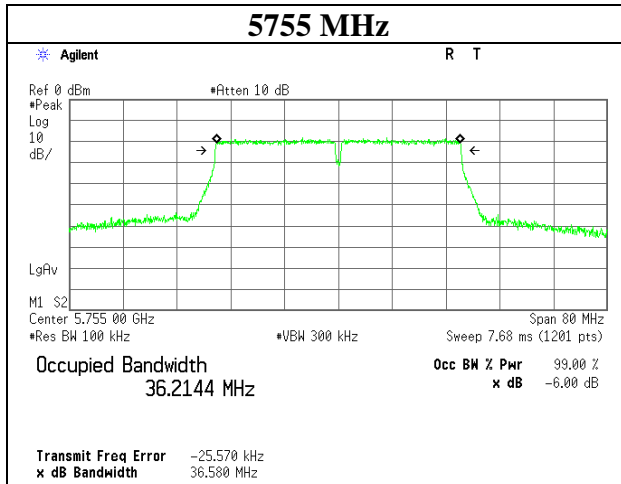

### 5795 MHz

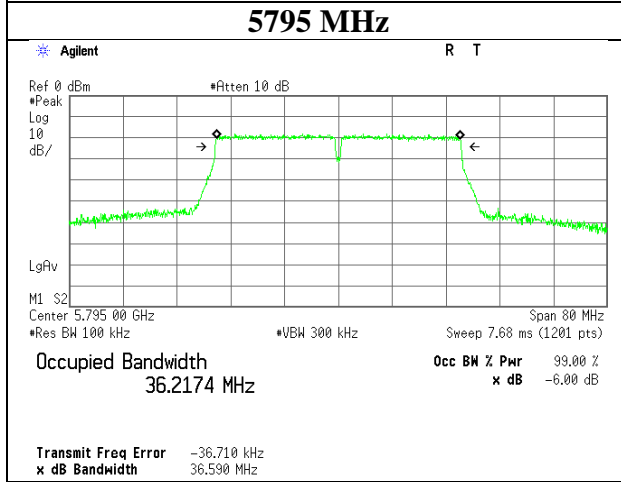

## Maximum Conducted Output Power

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 13, 2016  
Temperature / Humidity : 25 deg. C / 45% RH  
Engineer : Masafumi Niwa  
Mode : Tx 11a

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [mW]	Limit [dBm]	Margin [dB]		
5180	-0.65	3.05	10.15	0.00	2.4	-	16.843	12.55	17.99	23.97	11.42	14.95	31.26	29.97	15.02
5220	-0.83	3.06	10.15	0.00	2.4	-	16.875	12.38	17.30	23.97	11.59	14.78	30.06	29.97	15.19
5240	-0.96	3.08	10.16	0.00	2.4	-	16.878	12.28	16.90	23.97	11.69	14.68	29.38	29.97	15.29
5280	-0.67	3.08	10.16	0.00	2.4	19.862	16.850	12.57	18.07	23.97	11.40	14.97	31.41	29.97	15.00
5300	-0.85	3.09	10.16	0.00	2.4	19.740	16.830	12.40	17.38	23.95	11.55	14.80	30.20	29.97	15.17
5320	-0.74	3.10	10.17	0.00	2.4	19.845	16.865	12.53	17.91	23.97	11.44	14.93	31.12	29.97	15.04
5500	-0.62	3.15	10.18	0.00	2.4	19.673	16.820	12.71	18.66	23.93	11.22	15.11	32.43	29.97	14.86
5580	-0.32	3.18	10.18	0.00	2.4	19.619	16.858	13.04	20.14	23.92	10.88	15.44	34.99	29.97	14.53
5700	-0.54	3.22	10.17	0.00	2.4	19.606	16.858	12.85	19.28	23.92	11.07	15.25	33.50	29.97	14.72
5745	-2.25	3.23	10.17	0.00	2.4	-	-	11.15	13.03	30.00	18.85	13.55	22.65	36.00	22.45
5785	-2.19	3.24	10.16	0.00	2.4	-	-	11.21	13.21	30.00	18.79	13.61	22.96	36.00	22.39
5825	-2.06	3.25	10.16	0.00	2.4	-	-	11.35	13.65	30.00	18.65	13.75	23.71	36.00	22.25

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 13, 2016  
Temperature / Humidity : 25 deg. C / 45% RH  
Engineer : Masafumi Niwa  
Mode : Tx 11n-20

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5180	-0.62	3.05	10.15	0.00	2.4	-	17.929	12.58	18.11	23.97	11.39	14.98	31.48	29.97	14.99
5220	-0.74	3.06	10.15	0.00	2.4	-	17.994	12.47	17.66	23.97	11.50	14.87	30.69	29.97	15.10
5240	-0.87	3.08	10.16	0.00	2.4	-	17.980	12.37	17.26	23.97	11.60	14.77	29.99	29.97	15.20
5280	-0.57	3.08	10.16	0.00	2.4	20.176	17.999	12.67	18.49	23.97	11.30	15.07	32.14	29.97	14.90
5300	-0.75	3.09	10.16	0.00	2.4	20.088	18.003	12.50	17.78	23.97	11.47	14.90	30.90	29.97	15.07
5320	-0.72	3.10	10.17	0.00	2.4	20.155	18.001	12.55	17.99	23.97	11.42	14.95	31.26	29.97	15.02
5500	-0.60	3.15	10.18	0.00	2.4	20.224	18.004	12.73	18.75	23.97	11.24	15.13	32.58	29.97	14.84
5580	-0.31	3.18	10.18	0.00	2.4	20.197	17.984	13.05	20.18	23.97	10.92	15.45	35.08	29.97	14.52
5700	-0.52	3.22	10.17	0.00	2.4	20.126	17.968	12.87	19.36	23.97	11.10	15.27	33.65	29.97	14.70
5745	-2.15	3.23	10.17	0.00	2.4	-	-	11.25	13.34	30.00	18.75	13.65	23.17	36.00	22.35
5785	-2.13	3.24	10.16	0.00	2.4	-	-	11.27	13.40	30.00	18.73	13.67	23.28	36.00	22.33
5825	-2.04	3.25	10.16	0.00	2.4	-	-	11.37	13.71	30.00	18.63	13.77	23.82	36.00	22.23

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

## Maximum Conducted Output Power

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 13, 2016  
Temperature / Humidity : 25 deg. C / 45% RH  
Engineer : Masafumi Niwa  
Mode : Tx 11n-40

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	26 dB EBW (B for FCC) [MHz]	99% OBW (B for IC) [MHz]	Conducted Power				e.i.r.p.			
								Result [dBm]	Limit [dBm]	Margin [dB]	Result [dBm]	Limit [dBm]	Margin [dB]		
5190	-0.92	3.06	10.15	0.00	2.4	-	36.699	12.29	16.94	23.97	11.68	14.69	29.44	29.97	15.28
5230	-0.98	3.07	10.16	0.00	2.4	-	36.669	12.25	16.79	23.97	11.72	14.65	29.17	29.97	15.32
5310	-0.93	3.10	10.16	0.00	2.4	40.310	36.588	12.33	17.10	23.97	11.64	14.73	29.72	29.97	15.24
5510	-0.61	3.16	10.18	0.00	2.4	40.280	36.630	12.73	18.75	23.97	11.24	15.13	32.58	29.97	14.84
5550	-0.49	3.17	10.18	0.00	2.4	40.598	36.652	12.86	19.32	23.97	11.11	15.26	33.57	29.97	14.71
5670	-0.28	3.20	10.17	0.00	2.4	40.445	36.719	13.09	20.37	23.97	10.88	15.49	35.40	29.97	14.48
5755	-2.46	3.24	10.17	0.00	2.4	-	-	10.95	12.45	30.00	19.05	13.35	21.63	36.00	22.65
5795	-2.48	3.25	10.16	0.00	2.4	-	-	10.93	12.39	30.00	19.07	13.33	21.53	36.00	22.67

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower



## Maximum Conducted Output Power

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 12, 2016  
Temperature / Humidity : 24 deg. C / 31 % RH  
Engineer : Masafumi Niwa  
Mode : Tx

### 5180MHz

Mode	Rate Mbps	Reading (Time average) [dBm]	Duty factor [dB]	Burst power average [dBm]	Remarks
11a	6	-0.82	0.00	-0.82	
	9	-0.89	0.00	-0.89	
	12	-0.72	0.00	-0.72	
	18	-0.69	0.00	-0.69	*
	24	-0.80	0.00	-0.80	
	36	-0.97	0.00	-0.97	
	48	-0.98	0.00	-0.98	
	54	-0.95	0.00	-0.95	

### 5180MHz

Mode	MCS Number	Reading (Time average) [dBm]	Duty factor [dB]	Burst power average [dBm]	Remarks
11n-20	0	-0.62	0.00	-0.62	*
	1	-0.69	0.00	-0.69	
	3	-0.87	0.00	-0.87	
	4	-0.93	0.00	-0.93	
	5	-0.79	0.00	-0.79	
	6	-0.84	0.00	-0.84	
	7	-0.74	0.00	-0.74	
	8	-0.83	0.00	-0.83	

### 5190MHz

Mode	MCS Number	Reading (Time average) [dBm]	Duty factor [dB]	Burst power average [dBm]	Remarks
11n-40	0	-0.87	0.00	-0.87	
	1	-0.71	0.00	-0.71	*
	3	-0.93	0.00	-0.93	
	4	-0.91	0.00	-0.91	
	5	-0.95	0.00	-0.95	
	6	-1.03	0.00	-1.03	
	7	-0.86	0.00	-0.86	
	8	-0.96	0.00	-0.96	

\* Worst rate

Sample Calculation:

$$\text{Burst power average} = \text{Reading (Time average)} + \text{Duty factor}$$

All comparison were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


**Burst rate confirmation**

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201776H
Date	April 13, 2016
Temperature / Humidity	25 deg. C / 45% RH
Engineer	Masafumi Niwa
Mode	Tx


**11a 18Mbps**  
**Duty 100%**

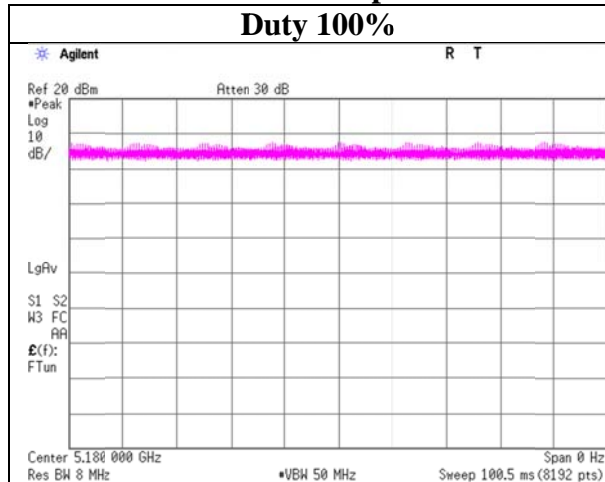

**11n-20 MCS0**  
**Duty 100%**

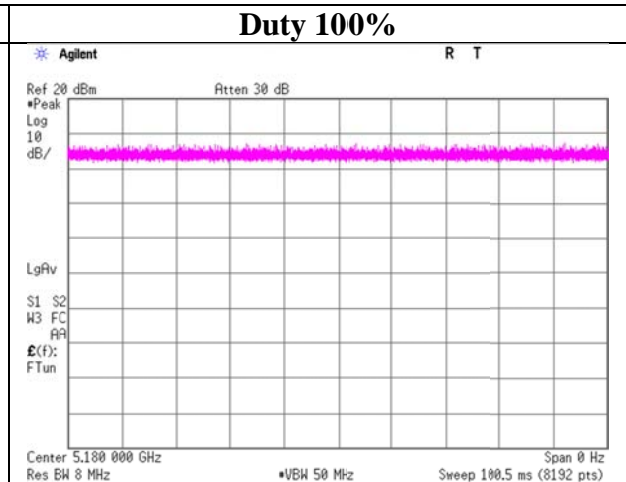

**11n-40 MCS1**  
**Duty 100%**

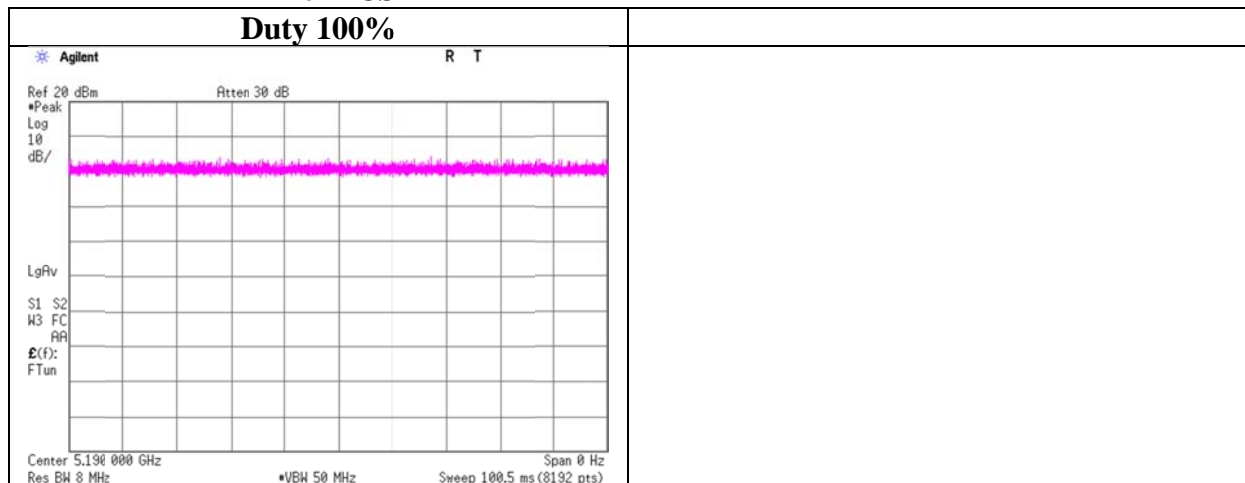

## Maximum Power Spectral Density

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 20, 2016  
Temperature / Humidity : 25deg. C / 37 % RH  
Engineer : Masafumi Niwa  
Mode : Tx 11a

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-11.64	1.44	10.15	0.00	2.4	0.00	-0.05	11.00	11.05	2.35	17.00	14.65
5220	-11.52	1.46	10.15	0.00	2.4	0.00	0.09	11.00	10.91	2.49	17.00	14.51
5240	-11.61	1.47	10.16	0.00	2.4	0.00	0.02	11.00	10.98	2.42	17.00	14.58
5280	-10.85	1.48	10.16	0.00	2.4	0.00	0.79	11.00	10.21	3.19	17.00	13.81
5300	-10.94	1.49	10.16	0.00	2.4	0.00	0.71	11.00	10.29	3.11	17.00	13.89
5320	-11.05	1.50	10.17	0.00	2.4	0.00	0.62	11.00	10.38	3.02	17.00	13.98
5500	-11.44	1.58	10.18	0.00	2.4	0.00	0.32	11.00	10.68	2.72	17.00	14.28
5580	-11.03	1.58	10.18	0.00	2.4	0.00	0.73	11.00	10.27	3.13	17.00	13.87
5700	-11.04	1.59	10.17	0.00	2.4	0.00	0.72	11.00	10.28	3.12	17.00	13.88
5745	-15.99	1.60	10.17	0.00	2.4	0.27	-3.95	30.00	33.95	-1.55	36.00	37.55
5785	-15.27	1.60	10.16	0.00	2.4	0.27	-3.24	30.00	33.24	-0.84	36.00	36.84
5825	-15.09	1.60	10.16	0.00	2.4	0.27	-3.06	30.00	33.06	-0.66	36.00	36.66

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.


RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**Maximum Power Spectral Density**

11a

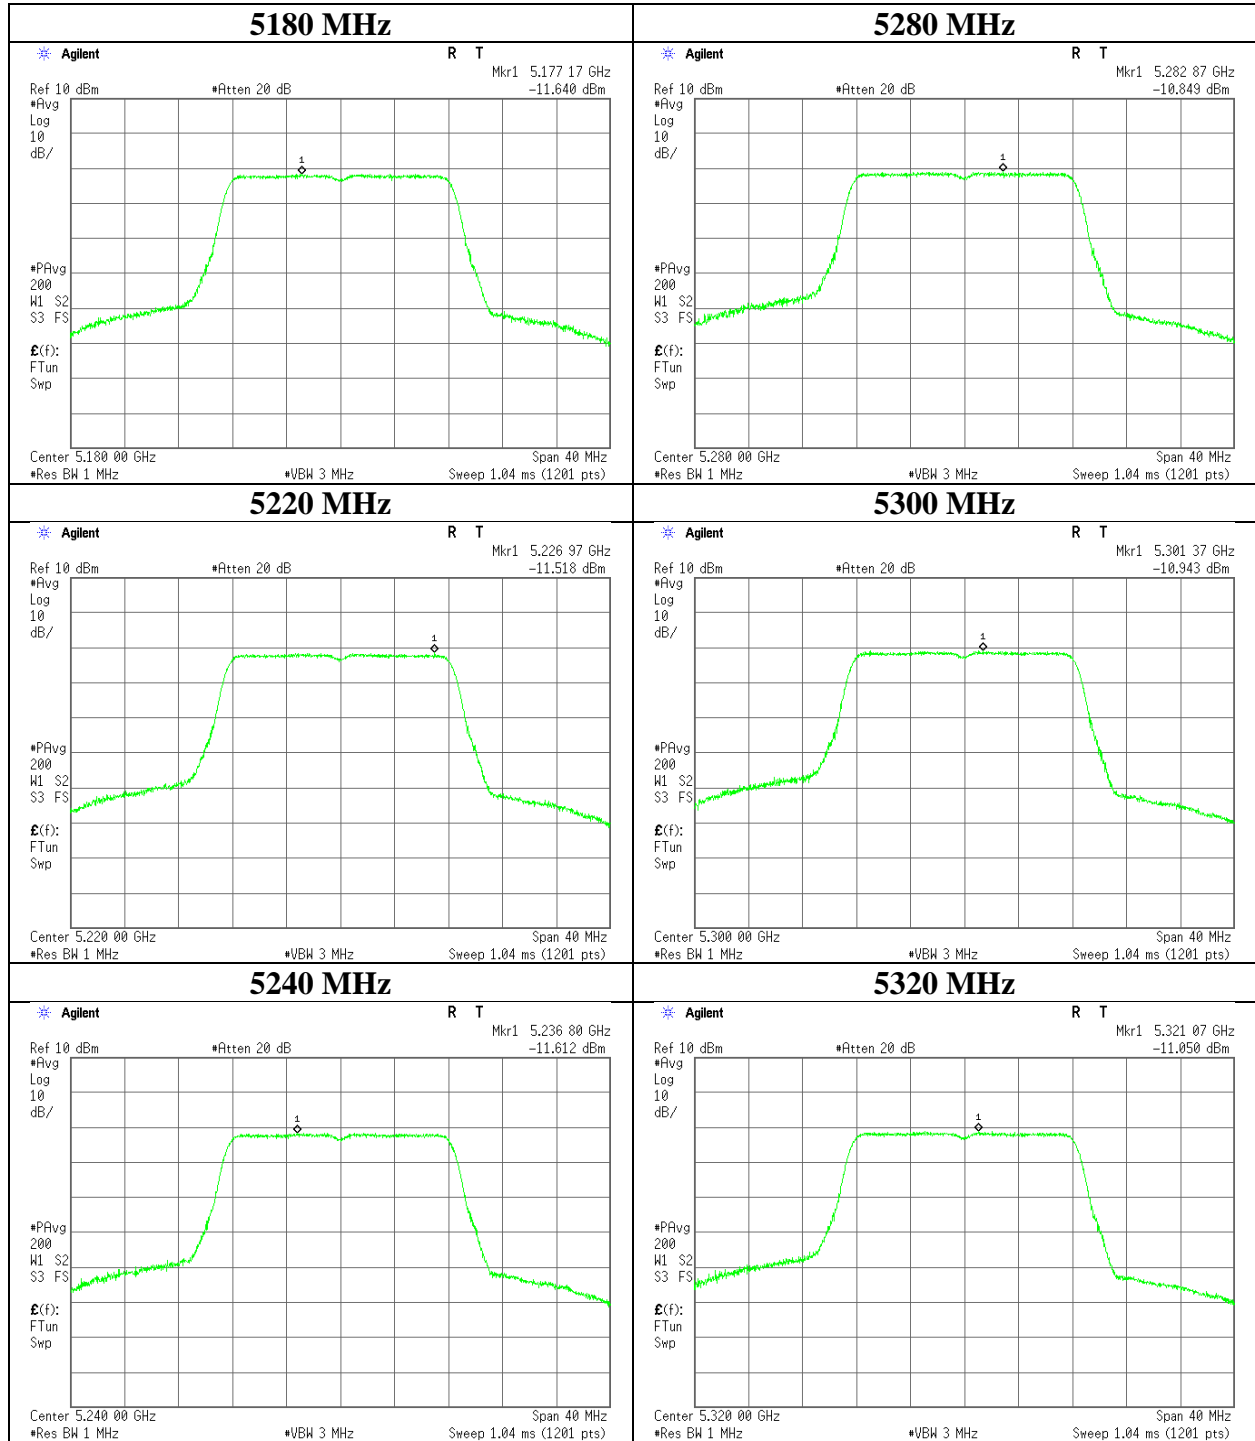

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Maximum Power Spectral Density**

11a

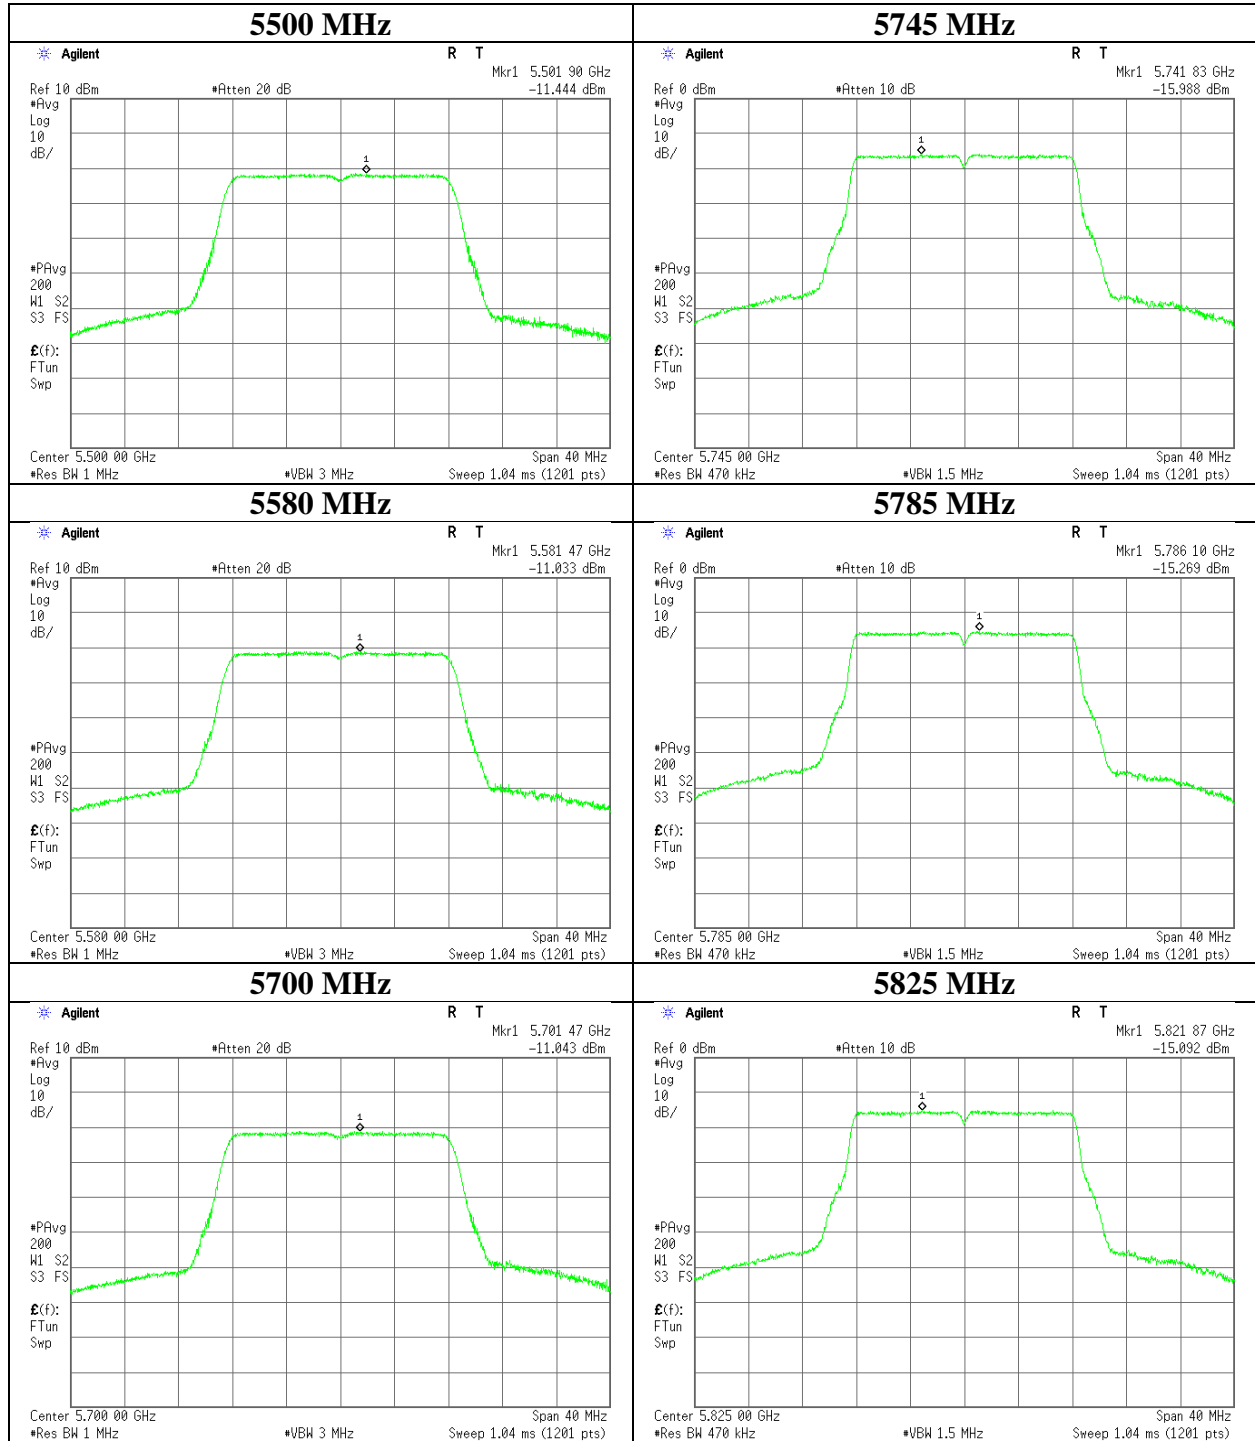

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 20, 2016  
Temperature / Humidity : 25deg. C / 37 % RH  
Engineer : Masafumi Niwa  
Mode : Tx 11n-20

**11n-20**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5180	-12.03	1.44	10.15	0.00	2.4	0.00	-0.44	11.00	11.44	1.96	17.00	15.04
5220	-11.84	1.46	10.15	0.00	2.4	0.00	-0.23	11.00	11.23	2.17	17.00	14.83
5240	-11.81	1.47	10.16	0.00	2.4	0.00	-0.18	11.00	11.18	2.22	17.00	14.78
5280	-11.66	1.48	10.16	0.00	2.4	0.00	-0.02	11.00	11.02	2.38	17.00	14.62
5300	-11.47	1.49	10.16	0.00	2.4	0.00	0.18	11.00	10.82	2.58	17.00	14.42
5320	-11.72	1.50	10.17	0.00	2.4	0.00	-0.05	11.00	11.05	2.35	17.00	14.65
5500	-11.30	1.58	10.18	0.00	2.4	0.00	0.46	11.00	10.54	2.86	17.00	14.14
5580	-11.29	1.58	10.18	0.00	2.4	0.00	0.47	11.00	10.53	2.87	17.00	14.13
5700	-11.53	1.59	10.17	0.00	2.4	0.00	0.23	11.00	10.77	2.63	17.00	14.37
5745	-16.29	1.60	10.17	0.00	2.4	0.27	-4.25	30.00	34.25	-1.85	36.00	37.85
5785	-15.80	1.60	10.16	0.00	2.4	0.27	-3.77	30.00	33.77	-1.37	36.00	37.37
5825	-15.60	1.60	10.16	0.00	2.4	0.27	-3.58	30.00	33.58	-1.18	36.00	37.18

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.


RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**Maximum Power Spectral Density**

11n-20

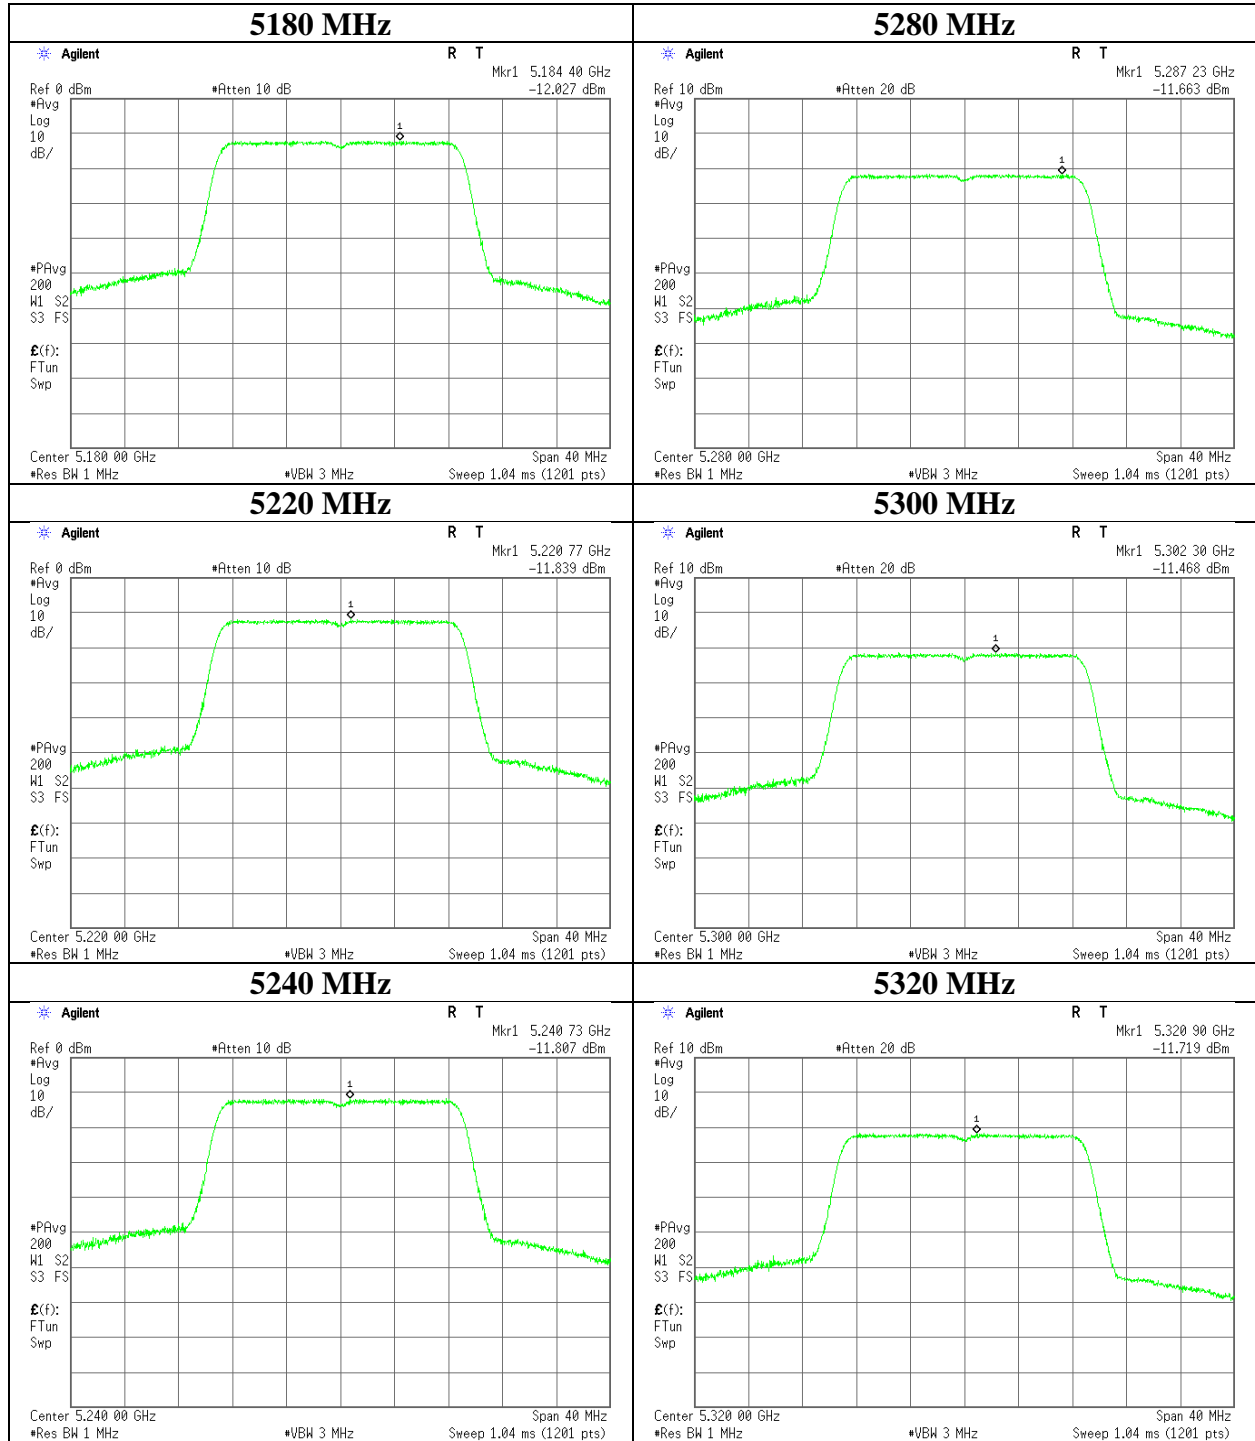

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Maximum Power Spectral Density**

11n-20

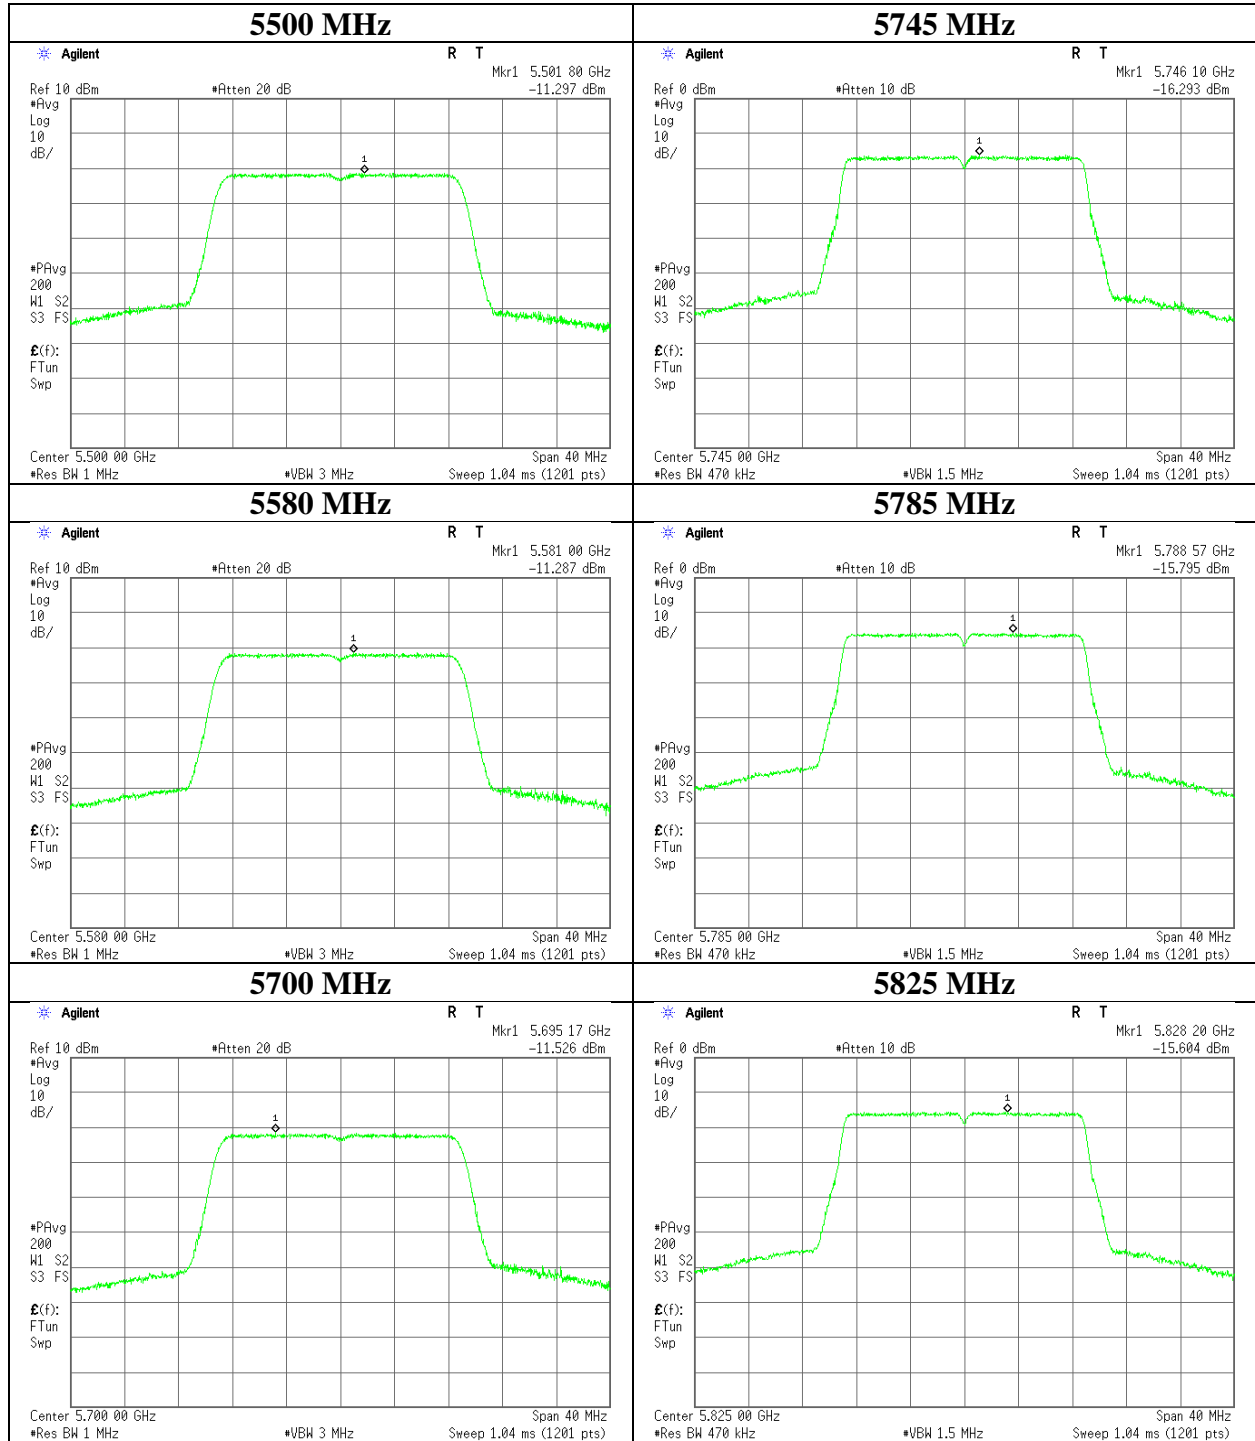

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## Maximum Power Spectral Density

Test place : Ise EMC Lab. No.6 Measurement Room  
Report No. : 11201776H  
Date : April 20, 2016  
Temperature / Humidity : 25deg. C / 37 % RH  
Engineer : Masafumi Niwa  
Mode : Tx 11n-40

**11n-40**

Applied limit: 15.407, mobile and portable client device

Tested Frequency [MHz]	PSD Reading [dBm /MHz]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	RBW Correction Factor [dB]	PSD (Conducted)			PSD (e.i.r.p.)		
							Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]	Result [dBm /MHz]	Limit [dBm /MHz]	Margin [dB]
5190	-15.13	1.44	10.15	0.00	2.4	0.00	-3.54	11.00	14.54	-1.14	17.00	18.14
5230	-15.01	1.46	10.16	0.00	2.4	0.00	-3.39	11.00	14.39	-0.99	17.00	17.99
5310	-14.69	1.50	10.16	0.00	2.4	0.00	-3.03	11.00	14.03	-0.63	17.00	17.63
5510	-14.13	1.58	10.18	0.00	2.4	0.00	-2.37	11.00	13.37	0.03	17.00	16.97
5550	-13.66	1.58	10.18	0.00	2.4	0.00	-1.90	11.00	12.90	0.50	17.00	16.50
5670	-14.42	1.59	10.17	0.00	2.4	0.00	-2.66	11.00	13.66	-0.26	17.00	17.26
5755	-19.21	1.60	10.17	0.00	2.4	0.27	-7.17	30.00	37.17	-4.77	36.00	40.77
5795	-18.83	1.60	10.16	0.00	2.4	0.27	-6.80	30.00	36.80	-4.40	36.00	40.40

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.


RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

**Maximum Power Spectral Density**

**11n-40**

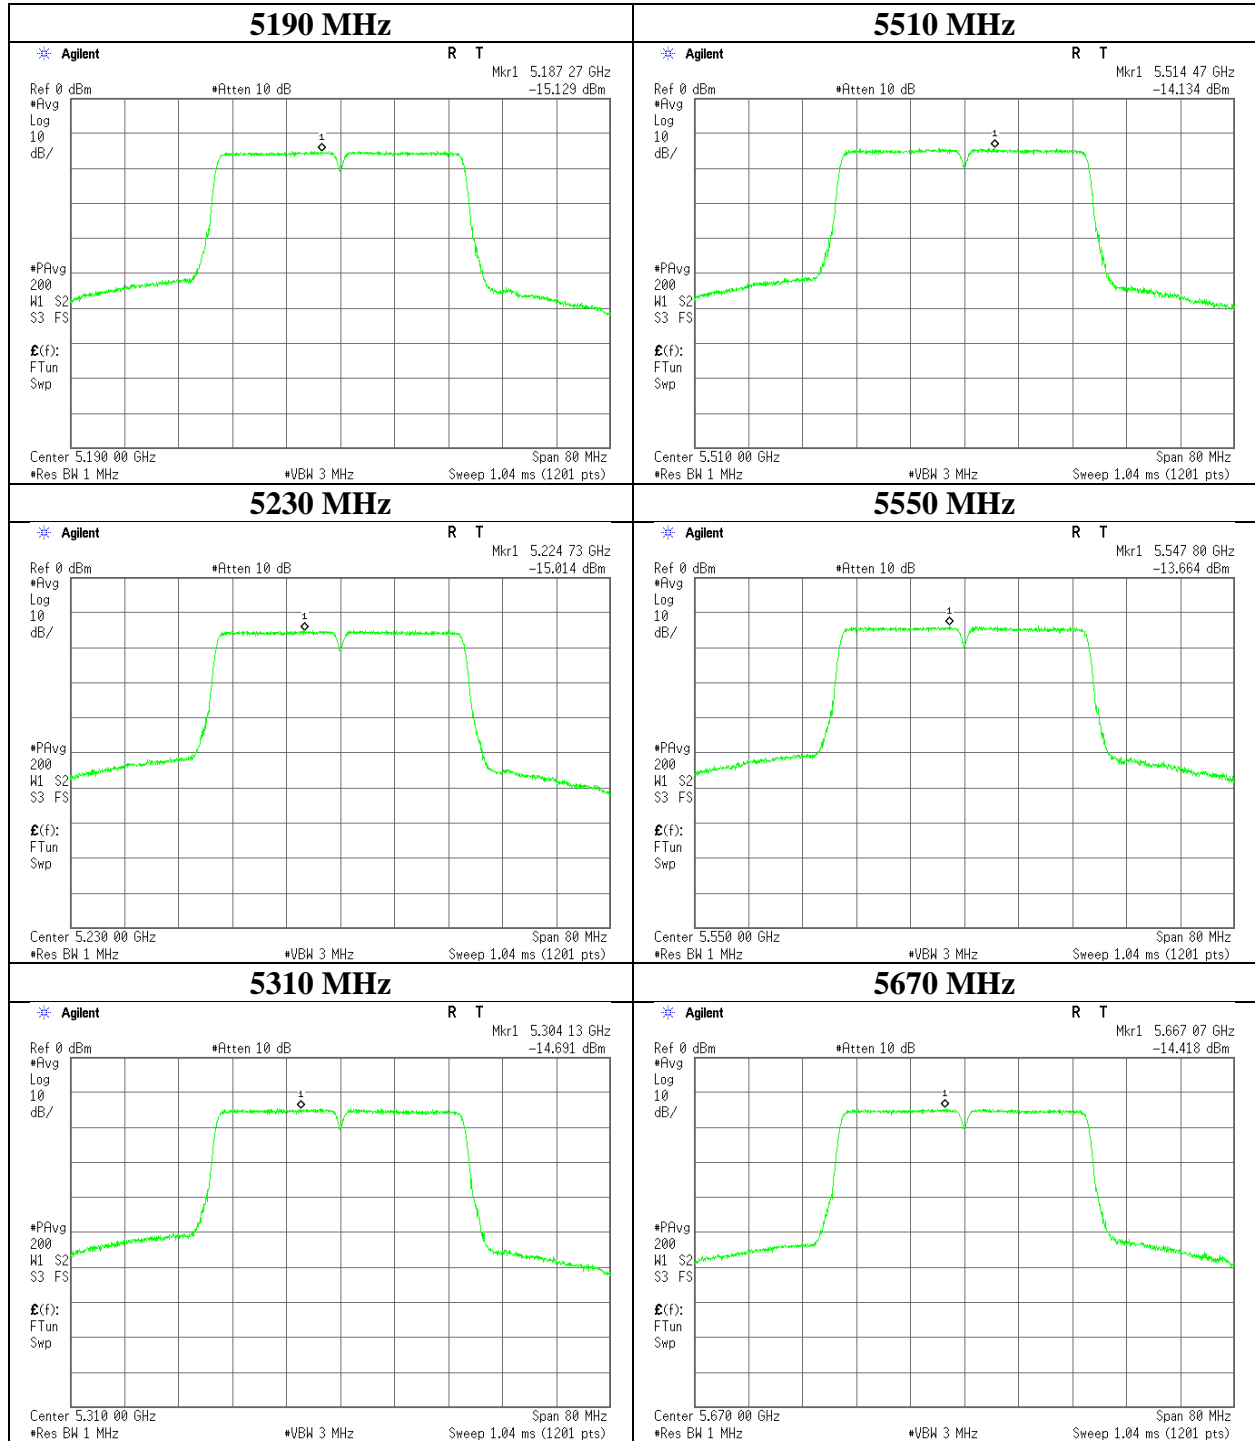

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Maximum Power Spectral Density**

**11n-40**

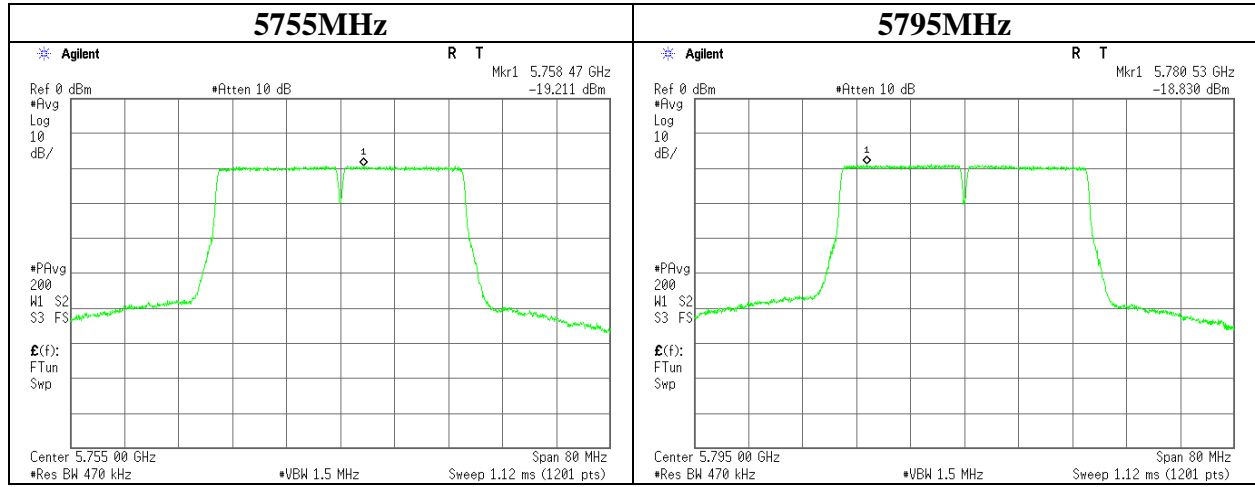

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Test place Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. 11201776H  
Date April 18, 2016 April 21, 2016 April 27, 2016  
Temperature / Humidity 23 deg. C / 48 % RH 22 deg. C / 55 % RH 24 deg. C / 51 % RH  
Engineer Kazuya Yoshioka Kazuya Yoshioka Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 40 GHz)  
Mode Tx 11n-20 5180 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5150.000	PK	38.7	33.3	7.6	31.3	48.3	73.9	25.6	
Hori	6906.722	PK	46.2	36.4	8.4	32.4	58.6	68.2	9.6	
Hori	10360.000	PK	48.5	39.2	-1.9	32.9	52.9	68.2	15.3	
Hori	15540.000	PK	40.5	40.0	-0.4	32.7	47.4	73.9	26.5	Floor noise
Hori	5150.000	AV	28.8	33.3	7.6	31.3	38.4	53.9	15.5	
Hori	15540.000	AV	33.1	40.0	-0.4	32.7	40.0	53.9	13.9	Floor noise
Vert	5150.000	PK	37.4	33.3	7.6	31.3	47.0	73.9	26.9	
Vert	6906.669	PK	47.9	36.4	8.4	32.4	60.3	68.2	7.9	
Vert	10360.000	PK	49.5	39.2	-1.9	32.9	53.9	68.2	14.3	
Vert	15540.000	PK	40.8	40.0	-0.4	32.7	47.7	73.9	26.2	Floor noise
Vert	5150.000	AV	30.7	33.3	7.6	31.3	40.3	53.9	13.6	
Vert	15540.000	AV	33.1	40.0	-0.4	32.7	40.0	53.9	13.9	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$   
10 GHz - 26.5 GHz  $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$   
26.5 GHz - 40 GHz  $20\log(0.5\text{m} / 3.0\text{m}) = -15.6\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 18, 2016
Temperature / Humidity	23 deg. C / 48 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-20 5180 MHz

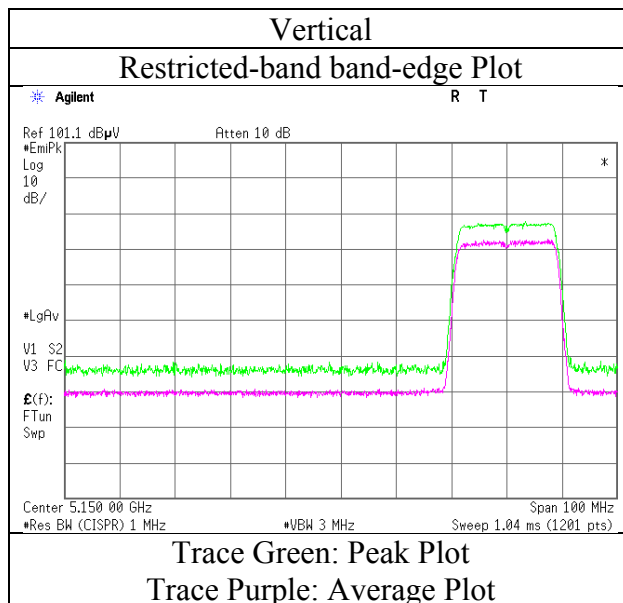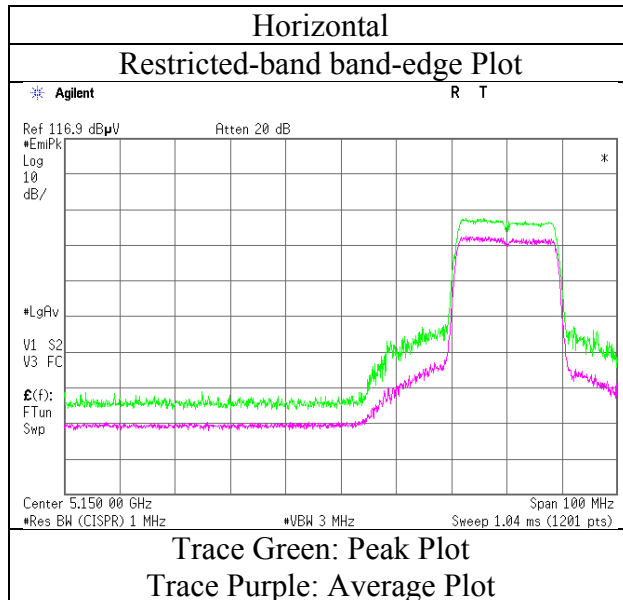

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 18, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 23 deg. C / 48 % RH    22 deg. C / 55 % RH    24 deg. C / 51 % RH  
Engineer : Kazuya Yoshioka    Kazuya Yoshioka    Takafumi Noguchi  
            (1 GHz - 10 GHz)    (10 GHz - 18 GHz)    (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5240 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	6986.541	PK	45.2	36.7	8.4	32.5	57.8	68.2	10.4	
Hori	10480.000	PK	50.4	39.5	-1.8	32.9	55.2	68.2	13.0	
Hori	15720.000	PK	41.4	39.5	-0.4	32.7	47.8	73.9	26.1	Floor noise
Hori	15720.000	AV	33.4	39.5	-0.4	32.7	39.8	53.9	14.1	Floor noise
Vert	6986.678	PK	45.2	36.7	8.4	32.5	57.8	68.2	10.4	
Vert	10480.000	PK	48.6	39.5	-1.8	32.9	53.4	68.2	14.8	
Vert	15720.000	PK	41.7	39.5	-0.4	32.7	48.1	73.9	25.8	Floor noise
Vert	15720.000	AV	33.4	39.5	-0.4	32.7	39.8	53.9	14.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:    1 GHz - 10 GHz     $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$   
                          10 GHz - 26.5 GHz  $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$   
                          26.5 GHz - 40 GHz  $20\log(0.5\text{m} / 3.0\text{m}) = -15.6\text{ dB}$

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 18, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 23 deg. C / 48 % RH    22 deg. C / 55 % RH    24 deg. C / 51 % RH  
Engineer : Kazuya Yoshioka    Kazuya Yoshioka    Takafumi Noguchi  
            (1 GHz - 10 GHz)    (10 GHz - 18 GHz)    (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5320 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5350.000	PK	47.3	33.1	7.7	31.3	56.8	73.9	17.1	
Hori	7093.274	PK	44.0	36.7	8.4	32.5	56.6	68.2	11.6	
Hori	10640.000	PK	54.6	39.7	-1.8	33.0	59.5	73.9	14.4	
Hori	15960.000	PK	41.7	38.9	-0.4	32.7	47.5	73.9	26.4	Floor noise
Hori	5350.000	AV	33.8	33.1	7.7	31.3	43.3	53.9	10.6	
Hori	10640.000	AV	45.4	39.7	-1.8	33.0	50.3	53.9	3.6	
Hori	15960.000	AV	33.2	38.9	-0.4	32.7	39.0	53.9	14.9	Floor noise
Vert	5350.000	PK	46.0	33.1	7.7	31.3	55.5	73.9	18.4	
Vert	7093.322	PK	45.5	36.7	8.4	32.5	58.1	68.2	10.1	
Vert	10640.000	PK	54.3	39.7	-1.8	33.0	59.2	73.9	14.7	
Vert	15960.000	PK	41.4	38.9	-0.4	32.7	47.2	73.9	26.7	Floor noise
Vert	5350.000	AV	36.2	33.1	7.7	31.3	45.7	53.9	8.2	
Vert	10640.000	AV	45.2	39.7	-1.8	33.0	50.1	53.9	3.8	
Vert	15960.000	AV	33.2	38.9	-0.4	32.7	39.0	53.9	14.9	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:    1 GHz - 10 GHz    20log(4.5m / 3.0 m) = 3.53 dB  
                          10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB  
                          26.5 GHz - 40 GHz 20log(0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 18, 2016
Temperature / Humidity	23 deg. C / 48 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-20 5320 MHz

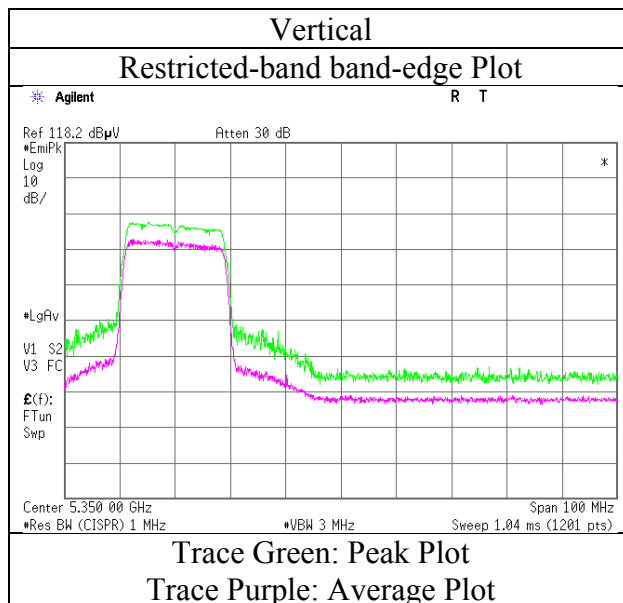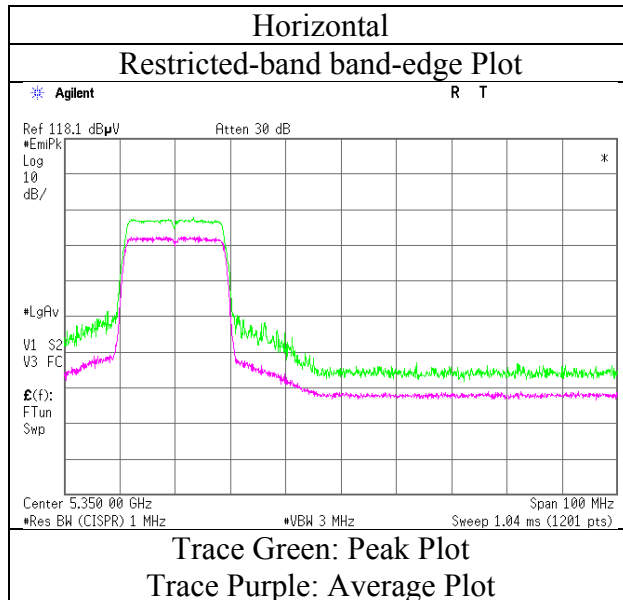

\* Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 18, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 23 deg. C / 48 % RH      22 deg. C / 55 % RH      24 deg. C / 51 % RH  
Engineer : Kazuya Yoshioka      Kazuya Yoshioka      Takafumi Noguchi  
            (1 GHz - 10 GHz)      (10 GHz - 18 GHz)      (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5500 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5460.000	PK	40.3	33.0	7.7	31.4	49.6	73.9	24.3	
Hori	5470.000	PK	41.2	33.0	7.7	31.4	50.5	68.2	17.7	
Hori	7333.190	PK	45.3	36.8	8.5	32.6	58.0	73.9	15.9	
Hori	11000.000	PK	52.9	40.1	-1.7	33.0	58.3	73.9	15.6	
Hori	16500.000	PK	41.8	40.3	-0.4	32.6	49.1	73.9	24.8	Floor noise
Hori	5460.000	AV	30.7	33.0	7.7	31.4	40.0	53.9	13.9	
Hori	7333.190	AV	41.0	36.8	8.5	32.6	53.7	53.9	0.2	
Hori	11000.000	AV	44.7	40.1	-1.7	33.0	50.1	53.9	3.8	
Hori	16500.000	AV	33.7	40.3	-0.4	32.6	41.0	53.9	12.9	Floor noise
Vert	5460.000	PK	40.5	33.0	7.7	31.4	49.8	73.9	24.1	
Vert	5470.000	PK	39.7	33.0	7.7	31.4	49.0	68.2	19.2	
Vert	7333.345	PK	46.2	36.8	8.5	32.6	58.9	73.9	15.0	
Vert	11000.000	PK	53.0	40.1	-1.7	33.0	58.4	73.9	15.5	
Vert	16500.000	PK	41.6	40.3	-0.4	32.6	48.9	73.9	25.0	Floor noise
Vert	5460.000	AV	31.7	33.0	7.7	31.4	41.0	53.9	12.9	
Vert	7333.345	AV	40.6	36.8	8.5	32.6	53.3	53.9	0.6	
Vert	11000.000	AV	44.3	40.1	-1.7	33.0	49.7	53.9	4.2	
Vert	16500.000	AV	33.7	40.3	-0.4	32.6	41.0	53.9	12.9	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
                            10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                            26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 18, 2016
Temperature / Humidity	23 deg. C / 48 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-20 5500 MHz

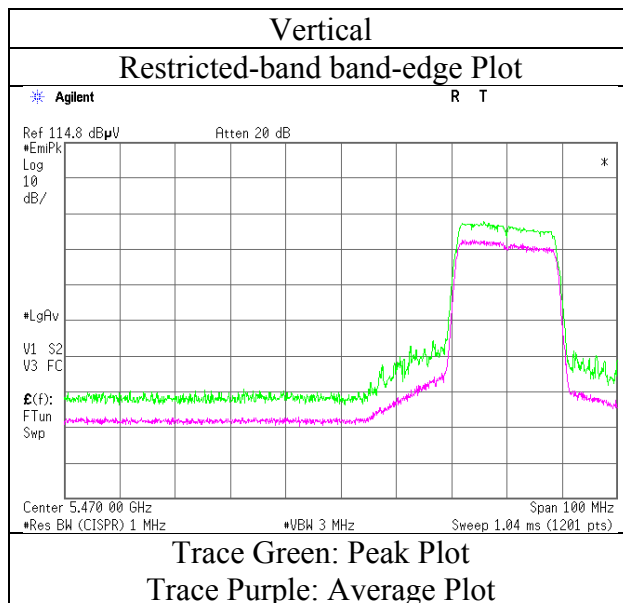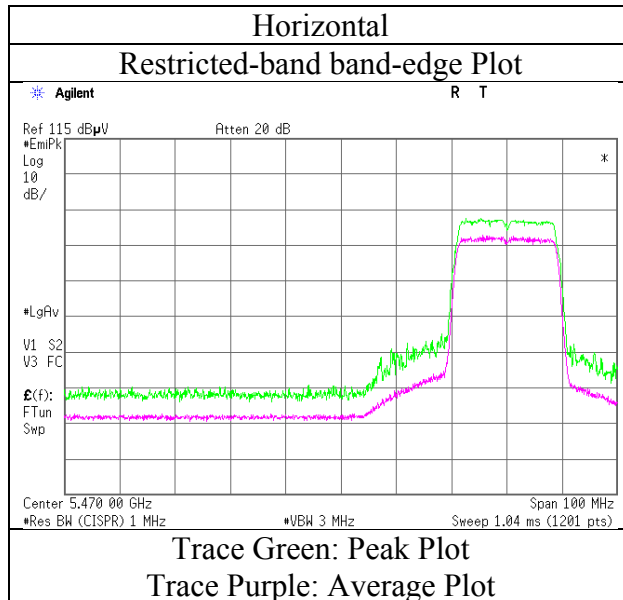

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 18, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 23 deg. C / 48 % RH    22 deg. C / 55 % RH    24 deg. C / 51 % RH  
Engineer : Kazuya Yoshioka    Kazuya Yoshioka    Takafumi Noguchi  
            (1 GHz - 10 GHz)    (10 GHz - 18 GHz)    (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5580 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	7440.028	PK	44.5	36.8	8.5	32.7	57.1	73.9	16.8	
Hori	11160.000	PK	49.8	40.1	-1.8	33.1	55.0	73.9	18.9	
Hori	16740.000	PK	40.5	41.0	-0.3	32.6	48.6	73.9	25.3	Floor noise
Hori	7440.028	AV	39.7	36.8	8.5	32.7	52.3	53.9	1.6	
Hori	11160.000	AV	41.5	40.1	-1.8	33.1	46.7	53.9	7.2	
Hori	16740.000	AV	33.7	41.0	-0.3	32.6	41.8	53.9	12.1	Floor noise
Vert	7439.986	PK	44.3	36.8	8.5	32.7	56.9	73.9	17.0	
Vert	11160.000	PK	49.2	40.1	-1.8	33.1	54.4	73.9	19.5	
Vert	16740.000	PK	40.9	41.0	-0.3	32.6	49.0	73.9	24.9	Floor noise
Vert	7439.986	AV	39.4	36.8	8.5	32.7	52.0	53.9	1.9	
Vert	11160.000	AV	40.6	40.1	-1.8	33.1	45.8	53.9	8.1	
Vert	16740.000	AV	33.7	41.0	-0.3	32.6	41.8	53.9	12.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:    1 GHz - 10 GHz    20log (4.5m / 3.0 m) = 3.53 dB  
                          10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                          26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 18, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 23 deg. C / 48 % RH      22 deg. C / 55 % RH      24 deg. C / 51 % RH  
Engineer : Kazuya Yoshioka      Kazuya Yoshioka      Takafumi Noguchi  
            (1 GHz - 10 GHz)      (10 GHz - 18 GHz)      (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5700 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5725.000	PK	50.3	33.1	7.8	31.4	59.8	73.9	14.1	
Hori	7600.067	PK	43.4	37.0	8.6	32.7	56.3	73.9	17.6	
Hori	11400.000	PK	48.4	40.2	-1.7	33.1	53.8	73.9	20.1	
Hori	17100.000	PK	42.2	42.0	-0.2	32.6	51.4	73.9	22.5	Floor noise
Hori	5725.000	AV	33.7	33.1	7.8	31.4	43.2	53.9	10.7	
Hori	7600.067	AV	36.6	37.0	8.6	32.7	49.5	53.9	4.4	
Hori	11400.000	AV	41.1	40.2	-1.7	33.1	46.5	53.9	7.4	
Hori	17100.000	AV	33.9	42.0	-0.2	32.6	43.1	53.9	10.8	Floor noise
Vert	5725.000	PK	50.6	33.1	7.8	31.4	60.1	73.9	13.8	
Vert	7600.022	PK	42.3	37.0	8.6	32.7	55.2	73.9	18.7	
Vert	11400.000	PK	49.5	40.2	-1.7	33.1	54.9	73.9	19.0	
Vert	17100.000	PK	42.4	42.0	-0.2	32.6	51.6	73.9	22.3	Floor noise
Vert	5725.000	AV	38.6	33.1	7.8	31.4	48.1	53.9	5.8	
Vert	7600.022	AV	35.4	37.0	8.6	32.7	48.3	53.9	5.6	
Vert	11400.000	AV	42.2	40.2	-1.7	33.1	47.6	53.9	6.3	
Vert	17100.000	AV	33.9	42.0	-0.2	32.6	43.1	53.9	10.8	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
                             10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                             26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 18, 2016
Temperature / Humidity	23 deg. C / 48 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-20 5700 MHz

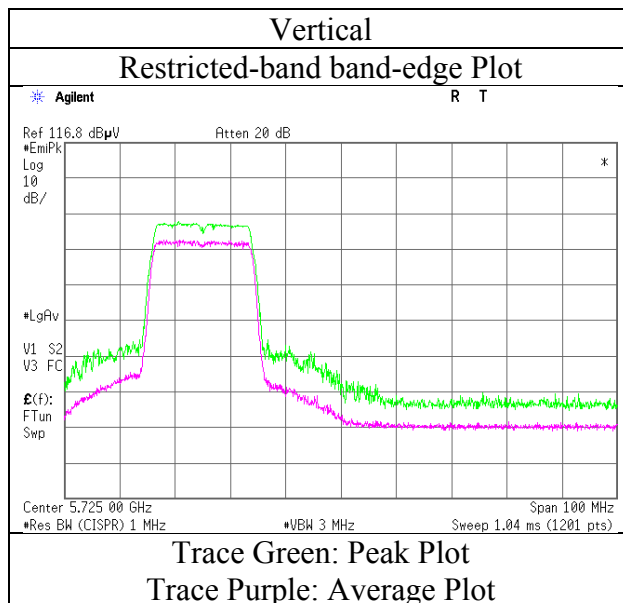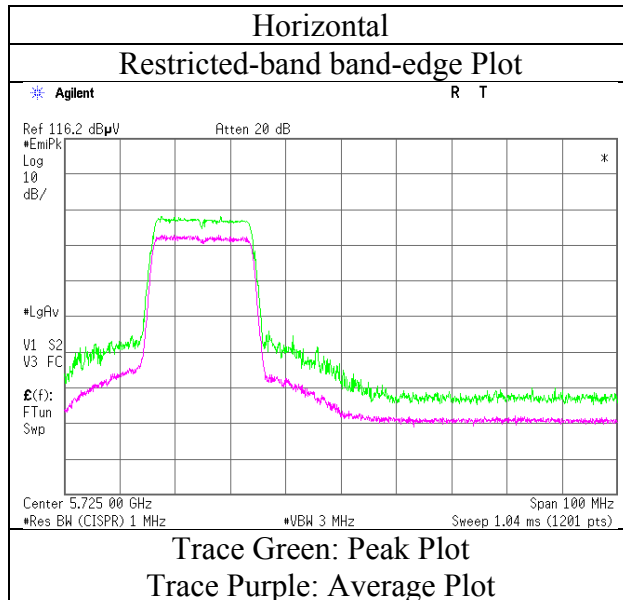

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 19, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 20deg. C / 44 % RH      22 deg. C / 55 % RH      24 deg. C / 51 % RH  
Engineer : Tomoki Matsui      Kazuya Yoshioka      Takafumi Noguchi  
            (1 GHz - 10 GHz)      (10 GHz - 18 GHz)      (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5745 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5650.000	PK	41.1	33.1	7.8	31.4	50.6	68.2	17.6	
Hori	5700.000	PK	40.9	33.1	7.8	31.4	50.4	105.2	54.8	
Hori	5720.000	PK	46.1	33.1	7.8	31.4	55.6	110.8	55.2	
Hori	5725.000	PK	54.4	33.1	7.8	31.4	63.9	122.2	58.3	
Hori	7660.000	PK	43.7	37.2	8.6	32.7	56.8	73.9	17.1	
Hori	11490.000	PK	48.9	40.2	-1.8	33.1	54.2	73.9	19.7	
Hori	17235.000	PK	41.8	42.2	-0.2	32.6	51.2	73.9	22.7	Floor noise
Hori	7660.000	AV	38.0	37.2	8.6	32.7	51.1	53.9	2.8	
Hori	11490.000	AV	40.4	40.2	-1.8	33.1	45.7	53.9	8.2	
Hori	17235.000	AV	34.0	42.2	-0.2	32.6	43.4	53.9	10.5	Floor noise
Vert	5650.000	PK	41.2	33.1	7.8	31.4	50.7	68.2	17.5	
Vert	5700.000	PK	41.2	33.1	7.8	31.4	50.7	105.2	54.5	
Vert	5720.000	PK	47.2	33.1	7.8	31.4	56.7	110.8	54.1	
Vert	5725.000	PK	54.7	33.1	7.8	31.4	64.2	122.2	58.0	
Vert	7660.000	PK	44.3	37.2	8.6	32.7	57.4	73.9	16.5	
Vert	11490.000	PK	50.1	40.2	-1.8	33.1	55.4	73.9	18.5	
Vert	17235.000	PK	41.4	42.2	-0.2	32.6	50.8	73.9	23.1	Floor noise
Vert	7660.000	AV	36.5	37.2	8.6	32.7	49.6	53.9	4.3	
Vert	11490.000	AV	41.5	40.2	-1.8	33.1	46.8	53.9	7.1	
Vert	17235.000	AV	34.0	42.2	-0.2	32.6	43.4	53.9	10.5	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz       $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$   
                            10 GHz - 26.5 GHz  $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$   
                            26.5 GHz - 40 GHz  $20\log(0.5\text{m} / 3.0\text{m}) = -15.6\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20deg. C / 44 % RH
Engineer	Tomoki Matsui
Mode	Tx 11n-20 5745 MHz

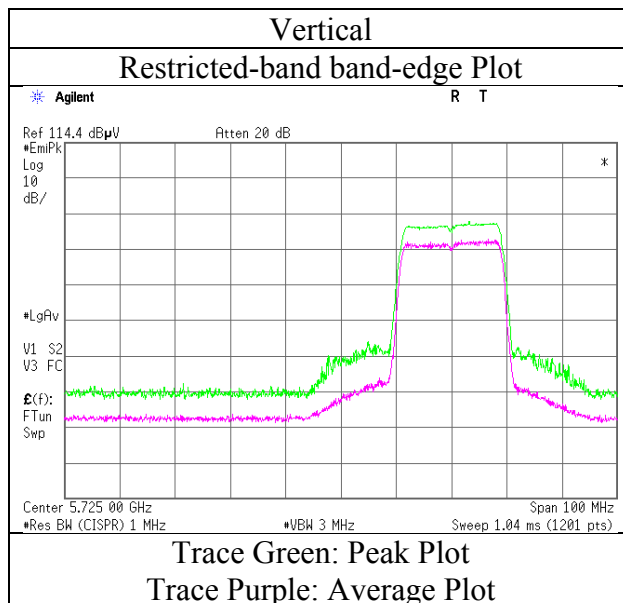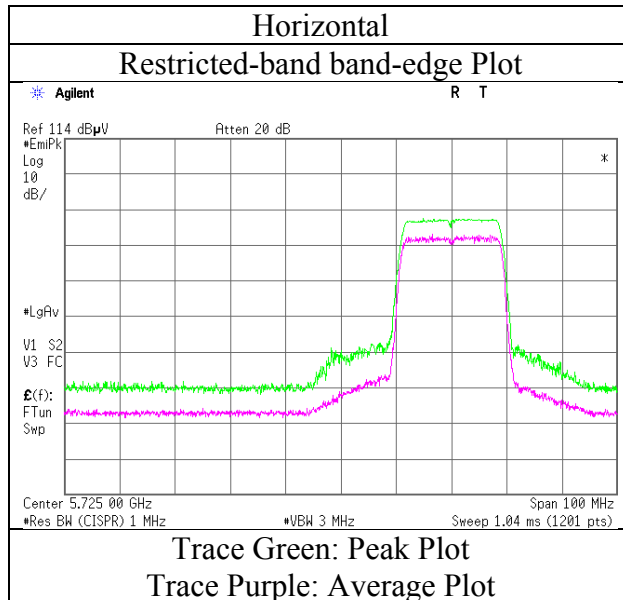

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 19, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 20deg. C / 44 % RH      22 deg. C / 55 % RH      24 deg. C / 51 % RH  
Engineer : Tomoki Matsui      Kazuya Yoshioka      Takafumi Noguchi  
(1 GHz - 10 GHz)      (10 GHz - 18 GHz)      (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5785 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	7713.350	PK	44.5	37.3	8.6	32.8	57.6	73.9	16.3	
Hori	11570.000	PK	49.6	40.1	-1.8	33.1	54.8	73.9	19.1	
Hori	17355.000	PK	42.4	42.4	-0.3	32.6	51.9	73.9	22.0	Floor noise
Hori	7713.350	AV	37.7	37.3	8.6	32.8	50.8	53.9	3.1	
Hori	11570.000	AV	41.3	40.1	-1.8	33.1	46.5	53.9	7.4	
Hori	17355.000	AV	33.8	42.4	-0.3	32.6	43.3	53.9	10.6	Floor noise
Vert	7713.350	PK	43.2	37.3	8.6	32.8	56.3	73.9	17.6	
Vert	11570.000	PK	48.7	40.1	-1.8	33.1	53.9	73.9	20.0	
Vert	17355.000	PK	42.7	42.4	-0.3	32.6	52.2	73.9	21.7	Floor noise
Vert	7713.350	AV	36.5	37.3	8.6	32.8	49.6	53.9	4.3	
Vert	11570.000	AV	40.8	40.1	-1.8	33.1	46.0	53.9	7.9	
Vert	17355.000	AV	33.8	42.4	-0.3	32.6	43.3	53.9	10.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB



## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 19, 2016      April 21, 2016      April 27, 2016  
Temperature / Humidity : 20deg. C / 44 % RH      22 deg. C / 55 % RH      24 deg. C / 51 % RH  
Engineer : Tomoki Matsui      Kazuya Yoshioka      Takafumi Noguchi  
            (1 GHz - 10 GHz)      (10 GHz - 18 GHz)      (18 GHz - 40 GHz)  
Mode : Tx 11n-20 5825 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5850.000	PK	47.7	33.2	7.9	31.5	57.3	122.2	64.9	
Hori	5855.000	PK	43.5	33.2	7.9	31.5	53.1	110.8	57.7	
Hori	5875.000	PK	41.6	33.2	7.9	31.5	51.2	105.2	54.0	
Hori	5925.000	PK	41.8	33.2	7.9	31.5	51.4	68.2	16.8	
Hori	7766.667	PK	44.3	37.4	8.6	32.8	57.5	73.9	16.4	
Hori	11650.000	PK	50.3	40.1	-1.7	33.1	55.6	73.9	18.3	
Hori	17475.000	PK	41.0	42.6	-0.2	32.6	50.8	73.9	23.1	Floor noise
Hori	7766.667	AV	33.9	37.4	8.6	32.8	47.1	53.9	6.8	
Hori	11650.000	AV	42.8	40.1	-1.7	33.1	48.1	53.9	5.8	
Hori	17475.000	AV	33.5	42.6	-0.2	32.6	43.3	53.9	10.6	Floor noise
Vert	5850.000	PK	48.4	33.2	7.9	31.5	58.0	122.2	64.2	
Vert	5855.000	PK	44.3	33.2	7.9	31.5	53.9	110.8	56.9	
Vert	5875.000	PK	41.3	33.2	7.9	31.5	50.9	105.2	54.3	
Vert	5925.000	PK	41.8	33.2	7.9	31.5	51.4	68.2	16.8	
Vert	7766.667	PK	43.1	37.4	8.6	32.8	56.3	73.9	17.6	
Vert	11650.000	PK	50.2	40.1	-1.7	33.1	55.5	73.9	18.4	
Vert	17475.000	PK	40.8	42.6	-0.2	32.6	50.6	73.9	23.3	Floor noise
Vert	7766.667	AV	34.3	37.4	8.6	32.8	47.5	53.9	6.4	
Vert	11650.000	AV	41.4	40.1	-1.7	33.1	46.7	53.9	7.2	
Vert	17475.000	AV	33.5	42.6	-0.2	32.6	43.3	53.9	10.6	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
                                 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                                 26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20deg. C / 44 % RH
Engineer	Tomoki Matsui
Mode	Tx 11n-20 5825 MHz

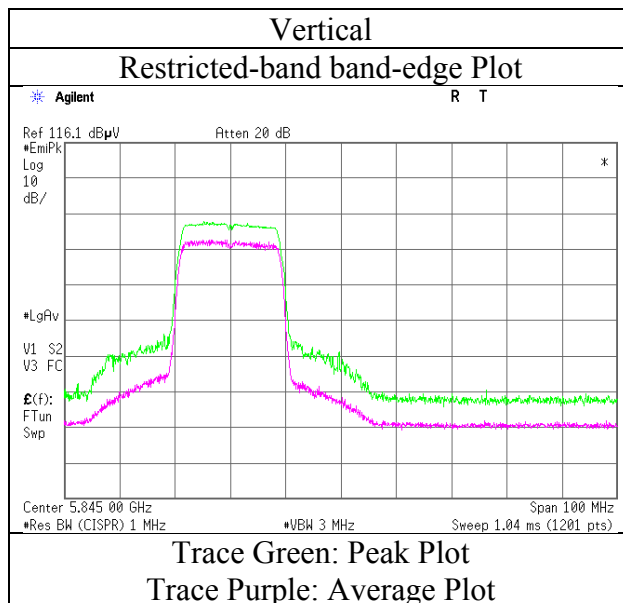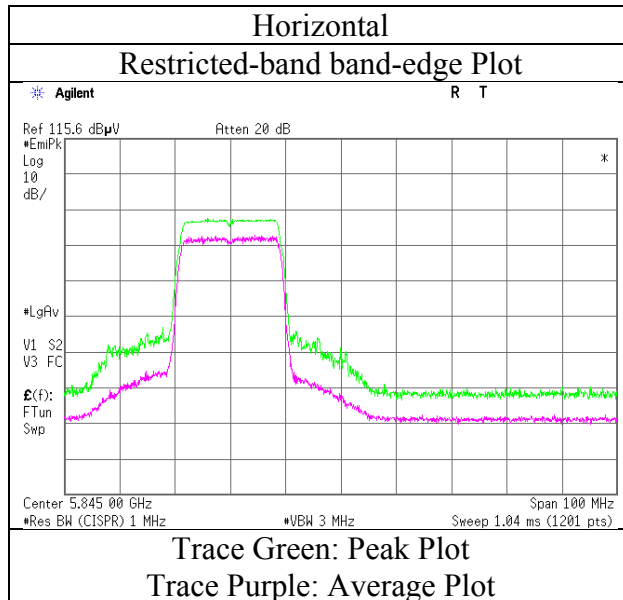

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. 11201776H  
Date April 19, 2016 April 27, 2016  
Temperature / Humidity 20deg. C / 44 % RH 24 deg. C / 51 % RH  
Engineer Tomoki Matsui Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 40 GHz)  
Mode Tx 11n-40 5190 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5150.000	PK	54.4	33.3	7.6	31.3	64.0	73.9	9.9	
Hori	6920.000	PK	47.2	36.5	8.4	32.4	59.7	68.2	8.5	
Hori	10380.000	PK	44.4	39.3	-1.8	32.9	49.0	73.9	24.9	
Hori	15570.000	PK	40.8	39.9	-0.1	32.7	47.9	73.9	26.0	Floor Noise
Hori	5150.000	AV	42.2	33.3	7.6	31.3	51.8	53.9	2.1	Integration Method
Hori	10380.000	AV	35.6	39.3	-1.8	32.9	40.2	53.9	13.7	
Hori	15570.000	AV	32.9	39.9	-0.1	32.7	40.0	53.9	13.9	Floor Noise
Vert	5150.000	PK	53.3	33.3	7.6	31.3	62.9	73.9	11.0	
Vert	6920.000	PK	46.2	36.5	8.4	32.4	58.7	68.2	9.5	
Vert	10380.000	PK	44.7	39.3	-1.8	32.9	49.3	73.9	24.6	
Vert	15570.000	PK	40.8	39.9	-0.1	32.7	47.9	73.9	26.0	Floor Noise
Vert	5150.000	AV	42.8	33.3	7.6	31.3	52.4	53.9	1.5	Integration Method
Vert	10380.000	AV	36.0	39.3	-1.8	32.9	40.6	53.9	13.3	
Vert	15570.000	AV	32.9	39.9	-0.1	32.7	40.0	53.9	13.9	Floor Noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.5m / 3.0 m) = 3.53 dB  
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 40 GHz 20log(0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20deg. C / 44 % RH
Engineer	Tomoki Matsui
Mode	Tx 11n-40 5190 MHz

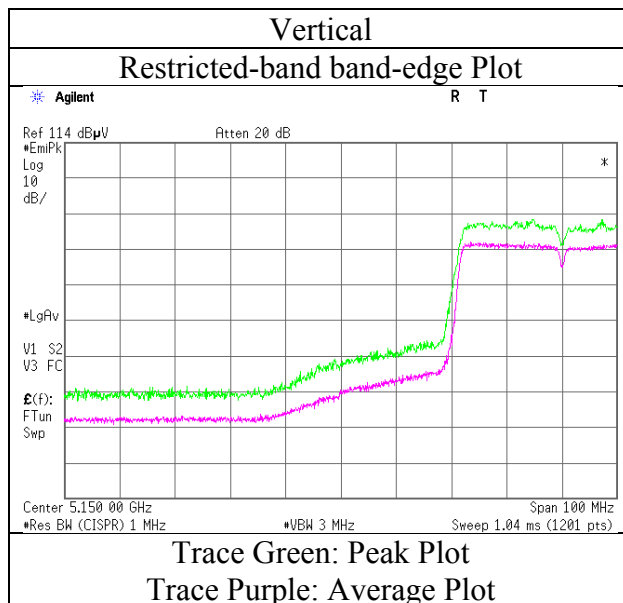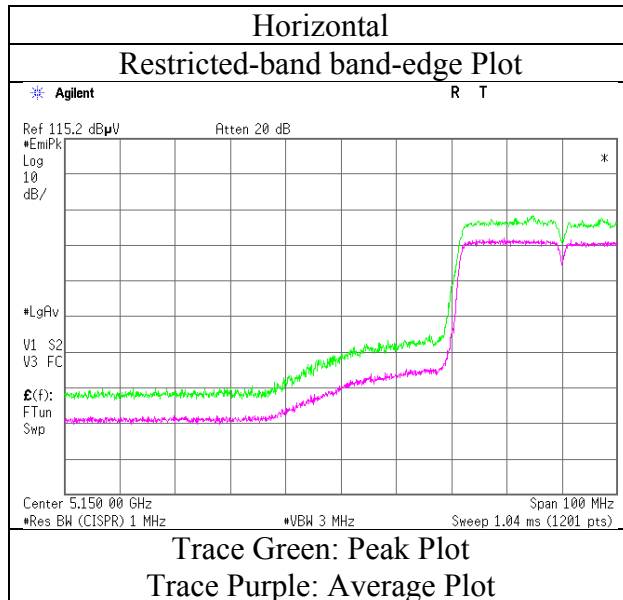

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 19, 2016                      April 27, 2016  
Temperature / Humidity : 20deg. C / 44 % RH      24 deg. C / 51 % RH  
Engineer : Tomoki Matsui                      Takafumi Noguchi  
                    (1 GHz - 10 GHz)                      (10 GHz - 40 GHz)  
Mode : Tx 11n-40 5230 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	6973.317	PK	47.0	36.6	8.4	32.5	59.5	68.2	8.7	
Hori	10460.000	PK	45.8	39.5	-1.8	32.9	50.6	73.9	23.3	
Hori	15690.000	PK	41.0	39.6	-0.1	32.7	47.8	73.9	26.1	Floor Noise
Hori	10460.000	AV	37.8	39.5	-1.8	32.9	42.6	53.9	11.3	
Hori	15690.000	AV	32.9	39.6	-0.1	32.7	39.7	53.9	14.2	Floor Noise
Vert	6973.317	PK	46.6	36.6	8.4	32.5	59.1	68.2	9.1	
Vert	10460.000	PK	47.3	39.5	-1.8	32.9	52.1	73.9	21.8	
Vert	15690.000	PK	41.0	39.6	-0.1	32.7	47.8	73.9	26.1	Floor Noise
Vert	10460.000	AV	38.7	39.5	-1.8	32.9	43.5	53.9	10.4	
Vert	15690.000	AV	32.9	39.6	-0.1	32.7	39.7	53.9	14.2	Floor Noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz       $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.53\text{ dB}$   
                                 10 GHz - 26.5 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$   
                                 26.5 GHz - 40 GHz  $20\log(0.5\text{ m} / 3.0\text{ m}) = -15.6\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016                      April 27, 2016
Temperature / Humidity	20deg. C / 44 % RH                  24 deg. C / 51 % RH
Engineer	Tomoki Matsui                      Takafumi Noguchi
	(1 GHz - 10 GHz)                      (10 GHz - 40 GHz)
Mode	Tx 11n-40 5310 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5350.000	PK	56.5	33.1	7.7	31.3	66.0	73.9	7.9	
Hori	7080.010	PK	44.7	36.7	8.4	32.5	57.3	68.2	10.9	
Hori	10620.000	PK	51.5	39.7	-1.7	33.0	56.5	73.9	17.4	
Hori	15930.000	PK	41.3	39.0	0.0	32.7	47.6	73.9	26.3	Floor Noise
Hori	5350.000	AV	44.2	33.1	7.7	31.3	53.7	53.9	0.2	Integration Method
Hori	10620.000	AV	43.1	39.7	-1.7	33.0	48.1	53.9	5.8	
Hori	15930.000	AV	32.9	39.0	0.0	32.7	39.2	53.9	14.7	Floor Noise
Vert	5350.000	PK	55.9	33.1	7.7	31.3	65.4	73.9	8.5	
Vert	7080.010	PK	46.4	36.7	8.4	32.5	59.0	68.2	9.2	
Vert	10620.000	PK	50.2	39.7	-1.7	33.0	55.2	73.9	18.7	
Vert	15930.000	PK	41.4	39.0	0.0	32.7	47.7	73.9	26.2	Floor Noise
Vert	5350.000	AV	44.0	33.1	7.7	31.3	53.5	53.9	0.4	Integration Method
Vert	10620.000	AV	42.2	39.7	-1.7	33.0	47.2	53.9	6.7	
Vert	15930.000	AV	32.9	39.0	0.0	32.7	39.2	53.9	14.7	Floor Noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20deg. C / 44 % RH
Engineer	Tomoki Matsui
Mode	Tx 11n-40 5310 MHz

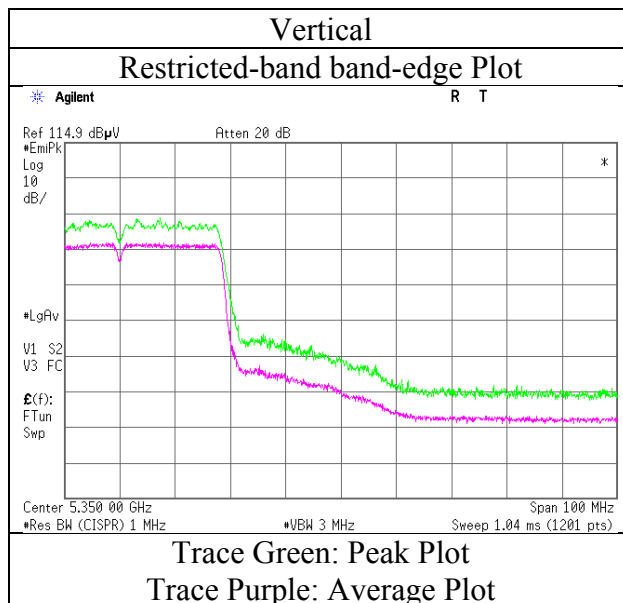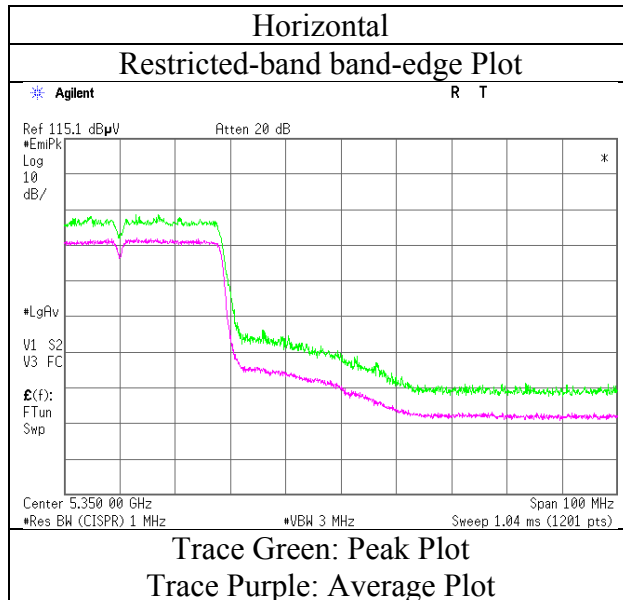

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 19, 2016                      April 27, 2016  
Temperature / Humidity : 20deg. C / 44 % RH      24 deg. C / 51 % RH  
Engineer : Tomoki Matsui                      Takafumi Noguchi  
                  (1 GHz - 10 GHz)                      (10 GHz - 40 GHz)  
Mode : Tx 11n-40 5510 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5460.000	PK	49.2	33.0	7.7	31.4	58.5	73.9	15.4	
Hori	5470.000	PK	54.6	33.0	7.7	31.4	63.9	68.2	4.3	
Hori	7346.678	PK	45.7	36.8	8.5	32.6	58.4	73.9	15.5	
Hori	11020.000	PK	49.8	40.1	-1.7	33.0	55.2	73.9	18.7	
Hori	16530.000	PK	41.4	40.4	0.0	32.6	49.2	73.9	24.7	Floor Noise
Hori	5460.000	AV	38.3	33.0	7.7	31.4	47.6	53.9	6.3	
Hori	7346.678	AV	40.0	36.8	8.5	32.6	52.7	53.9	1.2	
Hori	11020.000	AV	41.1	40.1	-1.7	33.0	46.5	53.9	7.4	
Hori	16530.000	AV	32.9	40.4	0.0	32.6	40.7	53.9	13.2	Floor Noise
Vert	5460.000	PK	49.5	33.0	7.7	31.4	58.8	73.9	15.1	
Vert	5470.000	PK	55.8	33.0	7.7	31.4	65.1	68.2	3.1	
Vert	7346.678	PK	45.5	36.8	8.5	32.6	58.2	73.9	15.7	
Vert	11020.000	PK	48.0	40.1	-1.7	33.0	53.4	73.9	20.5	
Vert	16530.000	PK	41.4	40.4	0.0	32.6	49.2	73.9	24.7	Floor Noise
Vert	5460.000	AV	40.0	33.0	7.7	31.4	49.3	53.9	4.6	
Vert	7346.678	AV	40.1	36.8	8.5	32.6	52.8	53.9	1.1	
Vert	11020.000	AV	39.5	40.1	-1.7	33.0	44.9	53.9	9.0	
Vert	16530.000	AV	32.9	40.4	0.0	32.6	40.7	53.9	13.2	Floor Noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
                                  10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                                  26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB



## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20deg. C / 44 % RH
Engineer	Tomoki Matsui
Mode	Tx 11n-40 5510 MHz

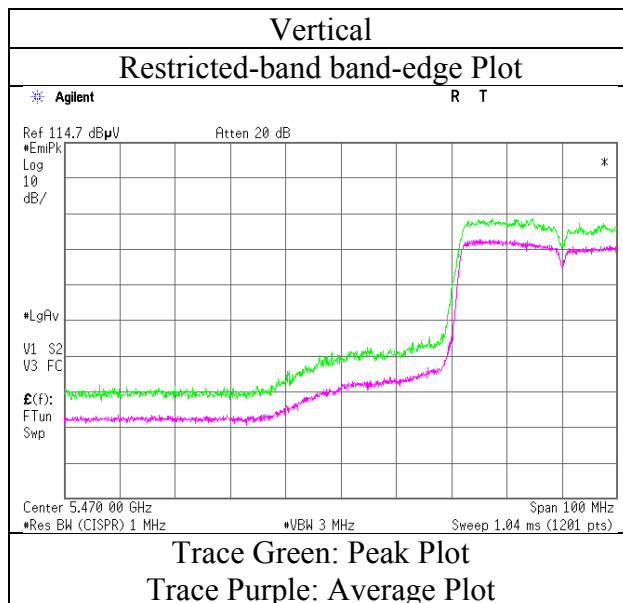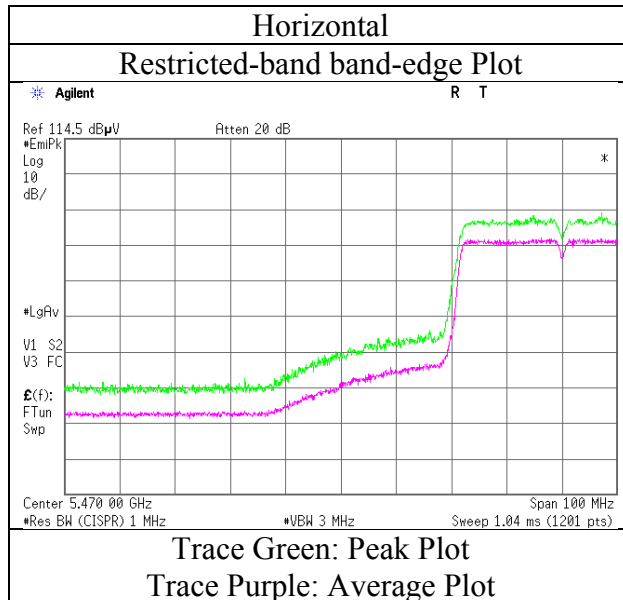

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016                      April 27, 2016
Temperature / Humidity	20deg. C / 44 % RH              24 deg. C / 51 % RH
Engineer	Tomoki Matsui                      Takafumi Noguchi
	(1 GHz - 10 GHz)                  (10 GHz - 40 GHz)
Mode	Tx 11n-40 5550 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	7400.000	PK	45.6	36.8	8.5	32.6	58.3	73.9	15.6	
Hori	11100.000	PK	50.0	40.1	-1.7	33.1	55.3	73.9	18.6	
Hori	16650.000	PK	41.1	40.8	0.0	32.6	49.3	73.9	24.6	Floor Noise
Hori	7400.000	AV	40.0	36.8	8.5	32.6	52.7	53.9	1.2	
Hori	11100.000	AV	41.5	40.1	-1.7	33.1	46.8	53.9	7.1	
Hori	16650.000	AV	32.3	40.8	0.0	32.6	40.5	53.9	13.4	Floor Noise
Vert	7400.000	PK	46.2	36.8	8.5	32.6	58.9	73.9	15.0	
Vert	11100.000	PK	47.6	40.1	-1.7	33.1	52.9	73.9	21.0	
Vert	16650.000	PK	41.0	40.8	0.0	32.6	49.2	73.9	24.7	Floor Noise
Vert	7400.000	AV	40.4	36.8	8.5	32.6	53.1	53.9	0.8	
Vert	11100.000	AV	39.2	40.1	-1.7	33.1	44.5	53.9	9.4	
Vert	16650.000	AV	32.3	40.8	0.0	32.6	40.5	53.9	13.4	Floor Noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
                              10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                              26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. : 11201776H  
Date : April 19, 2016      April 24, 2016      April 27, 2016  
Temperature / Humidity : 20deg. C / 44 % RH      21deg. C / 60 % RH      24 deg. C / 51 % RH  
Engineer : Tomoki Matsui      Hiroyuki Furutaka      Takafumi Noguchi  
            (1 GHz - 10 GHz)      (Below 1GHz)      (10 GHz - 40 GHz)  
Mode : Tx 11n-40 5670 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	74.032	QP	38.8	6.3	7.8	32.1	20.8	40.0	19.2	
Hori	136.515	QP	40.8	14.2	8.5	32.0	31.5	43.5	12.0	
Hori	177.275	QP	31.6	16.0	8.9	32.0	24.5	43.5	19.0	
Hori	226.050	QP	41.6	11.7	9.3	31.9	30.7	46.0	15.3	
Hori	258.780	QP	37.8	12.6	9.6	31.9	28.1	46.0	17.9	
Hori	326.013	QP	33.6	14.1	10.1	31.9	25.9	46.0	20.1	
Hori	5725.000	PK	43.8	33.1	7.8	31.4	53.3	73.9	20.6	
Hori	7560.021	PK	43.8	36.9	8.5	32.7	56.5	73.9	17.4	
Hori	11340.000	PK	47.6	40.1	-1.6	33.1	53.0	73.9	20.9	
Hori	17010.000	PK	41.7	41.8	0.0	32.6	50.9	73.9	23.0	Floor Noise
Hori	5725.000	AV	33.7	33.1	7.8	31.4	43.2	53.9	10.7	
Hori	7560.021	AV	38.1	36.9	8.5	32.7	50.8	53.9	3.1	
Hori	11340.000	AV	39.3	40.1	-1.6	33.1	44.7	53.9	9.2	
Hori	17010.000	AV	32.3	41.8	0.0	32.6	41.5	53.9	12.4	Floor Noise
Vert	70.448	QP	56.4	6.1	7.7	32.1	38.1	40.0	1.9	
Vert	71.010	QP	57.3	6.1	7.7	32.1	39.0	40.0	1.0	
Vert	72.519	QP	57.3	6.2	7.8	32.1	39.2	40.0	0.8	
Vert	139.012	QP	47.2	14.4	8.5	32.0	38.1	43.5	5.4	
Vert	174.013	QP	40.2	15.8	8.9	32.0	32.9	43.5	10.6	
Vert	233.560	QP	40.6	11.9	9.4	31.9	30.0	46.0	16.0	
Vert	5725.000	PK	45.5	33.1	7.8	31.4	55.0	73.9	18.9	
Vert	7560.021	PK	43.9	36.9	8.5	32.7	56.6	73.9	17.3	
Vert	11340.000	PK	47.9	40.1	-1.6	33.1	53.3	73.9	20.6	
Vert	17010.000	PK	41.6	41.8	0.0	32.6	50.8	73.9	23.1	Floor Noise
Vert	5725.000	AV	34.2	33.1	7.8	31.4	43.7	53.9	10.2	
Vert	7560.021	AV	37.0	36.9	8.5	32.7	49.7	53.9	4.2	
Vert	11340.000	AV	39.4	40.1	-1.6	33.1	44.8	53.9	9.1	
Vert	17010.000	AV	32.3	41.8	0.0	32.6	41.5	53.9	12.4	Floor Noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:      1 GHz - 10 GHz      20log (4.5m / 3.0 m) = 3.53 dB  
                                 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
                                 26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

## Radiated Spurious Emission



Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20deg. C / 44 % RH
Engineer	Tomoki Matsui
Mode	Tx 11n-40 5670 MHz

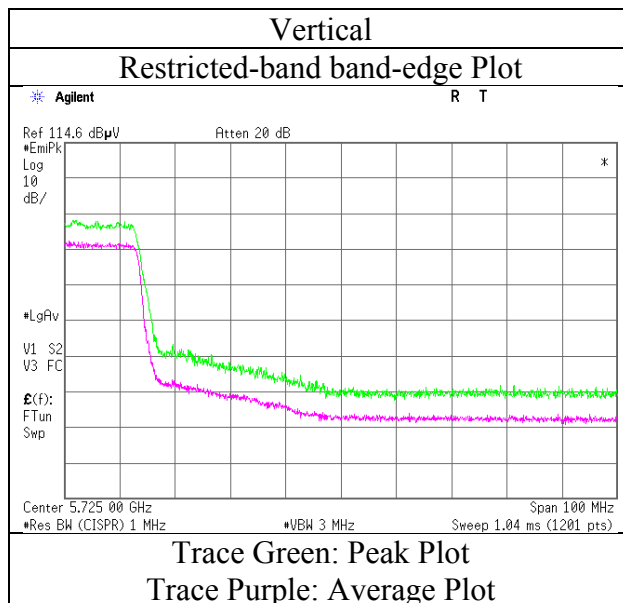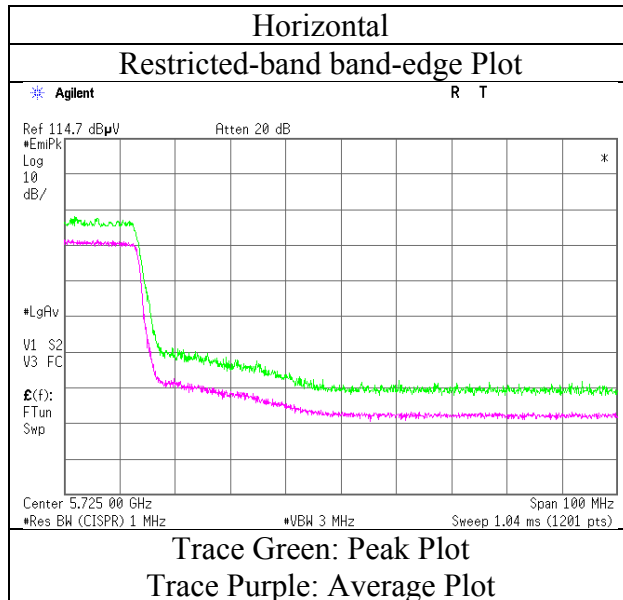

\* Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case)**

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber		
Report No.	11201776H		
Date	April 19, 2016	April 24, 2016	April 27, 2016
Temperature / Humidity	20deg. C / 44 % RH	21deg. C / 60 % RH	24 deg. C / 51 % RH
Engineer	Tomoki Matsui (1 GHz - 10 GHz)	Hiroyuki Furutaka (Below 1GHz)	Takafumi Noguchi (10 GHz - 40 GHz)
Mode	Tx 11n-40 5670 MHz		

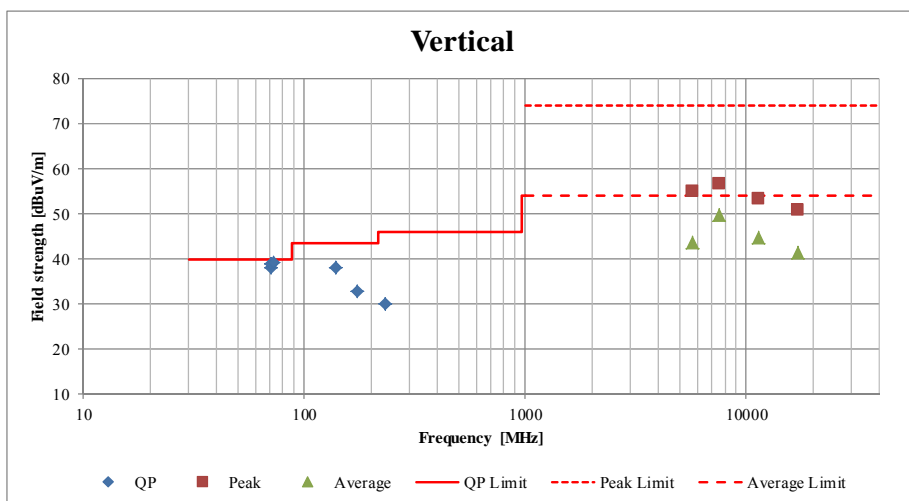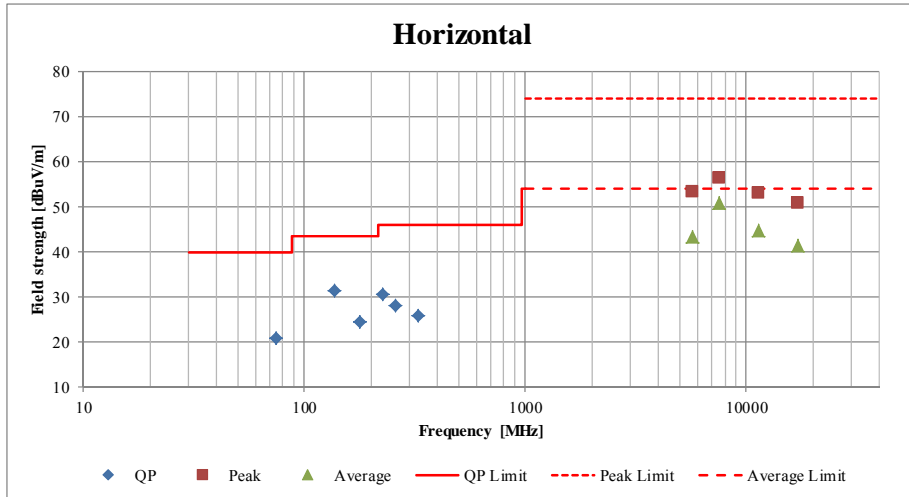

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Radiated Spurious Emission

Test place Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. 11201776H  
Date April 19, 2016 April 27, 2016  
Temperature / Humidity 20 deg. C / 44 % RH 24 deg. C / 51 % RH  
Engineer Kazuya Yoshioka Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 40 GHz)  
Mode Tx 11n-40 5755 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5650.000	PK	40.4	33.1	7.8	31.4	49.9	68.2	18.3	
Hori	5700.000	PK	42.1	33.1	7.8	31.4	51.6	105.2	53.6	
Hori	5720.000	PK	53.8	33.1	7.8	31.4	63.3	110.8	47.5	
Hori	5725.000	PK	54.9	33.1	7.8	31.4	64.4	122.2	57.8	
Hori	7673.312	PK	43.4	37.2	8.6	32.7	56.5	73.9	17.4	
Hori	11510.000	PK	47.1	40.2	-1.7	33.1	52.5	73.9	21.4	
Hori	17265.000	PK	42.0	42.3	0.0	32.6	51.7	73.9	22.2	Floor Noise
Hori	7673.312	AV	36.3	37.2	8.6	32.7	49.4	53.9	4.5	
Hori	11510.000	AV	38.3	40.2	-1.7	33.1	43.7	53.9	10.2	
Hori	17265.000	AV	33.5	42.3	0.0	32.6	43.2	53.9	10.7	Floor Noise
Vert	5650.000	PK	40.9	33.1	7.8	31.4	50.4	68.2	17.8	
Vert	5700.000	PK	40.5	33.1	7.8	31.4	50.0	105.2	55.2	
Vert	5720.000	PK	55.1	33.1	7.8	31.4	64.6	110.8	46.2	
Vert	5725.000	PK	55.6	33.1	7.8	31.4	65.1	122.2	57.1	
Vert	7673.384	PK	43.2	37.2	8.6	32.7	56.3	73.9	17.6	
Vert	11510.000	PK	46.7	40.2	-1.7	33.1	52.1	73.9	21.8	
Vert	17265.000	PK	41.6	42.3	0.0	32.6	51.3	73.9	22.6	Floor Noise
Vert	7673.384	AV	35.4	37.2	8.6	32.7	48.5	53.9	5.4	
Vert	11510.000	AV	38.2	40.2	-1.7	33.1	43.6	53.9	10.3	
Vert	17265.000	AV	33.5	42.3	0.0	32.6	43.2	53.9	10.7	Floor Noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.5\text{m} / 3.0\text{m}) = 3.53\text{ dB}$   
10 GHz - 26.5 GHz  $20\log(1.0\text{m} / 3.0\text{m}) = -9.5\text{ dB}$   
26.5 GHz - 40 GHz  $20\log(0.5\text{m} / 3.0\text{m}) = -15.6\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20 deg. C / 44 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-40 5755 MHz

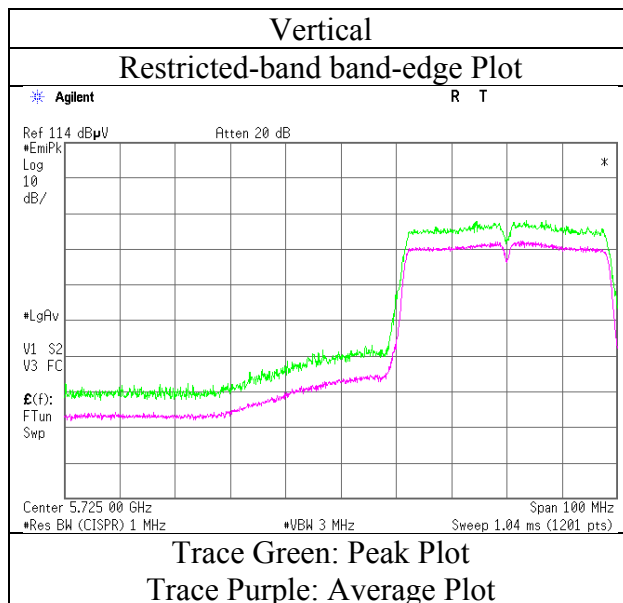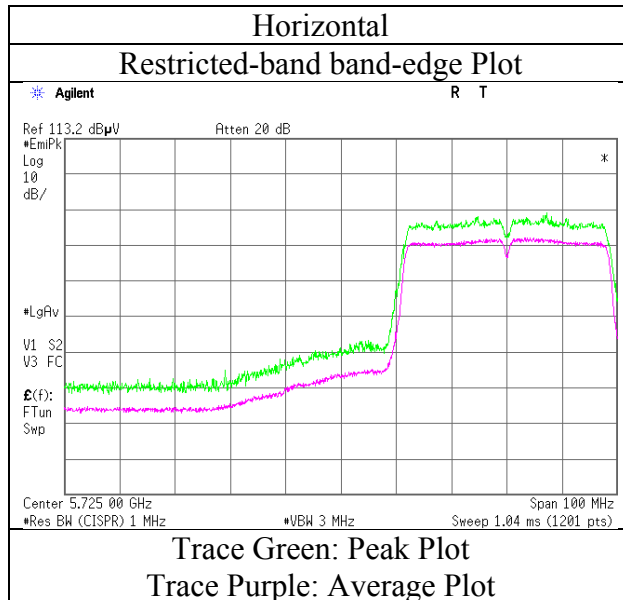

\* Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**

Test place Ise EMC Lab. No.4 Semi Anechoic Chamber  
Report No. 11201776H  
Date April 19, 2016 April 27, 2016  
Temperature / Humidity 20 deg. C / 44 % RH 24 deg. C / 51 % RH  
Engineer Kazuya Yoshioka Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 40 GHz)  
Mode Tx 11n-40 5795 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5850.000	PK	40.8	33.2	7.9	31.5	50.4	122.2	71.8	
Hori	5855.000	PK	39.7	33.2	7.9	31.5	49.3	110.8	61.5	
Hori	5875.000	PK	40.9	33.2	7.9	31.5	50.5	105.2	54.7	
Hori	5925.000	PK	39.2	33.2	7.9	31.5	48.8	68.2	19.4	
Hori	7727.036	PK	42.4	37.3	8.6	32.8	55.5	73.9	18.4	
Hori	11590.000	PK	46.9	40.1	-1.6	33.1	52.3	73.9	21.6	
Hori	17385.000	PK	42.0	42.5	0.0	32.6	51.9	73.9	22.0	Floor Noise
Hori	7727.036	AV	37.1	37.3	8.6	32.8	50.2	53.9	3.7	
Hori	11590.000	AV	38.2	40.1	-1.6	33.1	43.6	53.9	10.3	
Hori	17385.000	AV	33.5	42.5	0.0	32.6	43.4	53.9	10.5	Floor Noise
Vert	5850.000	PK	40.0	33.2	7.9	31.5	49.6	122.2	72.6	
Vert	5855.000	PK	40.4	33.2	7.9	31.5	50.0	110.8	60.8	
Vert	5875.000	PK	40.2	33.2	7.9	31.5	49.8	105.2	55.4	
Vert	5925.000	PK	39.7	33.2	7.9	31.5	49.3	68.2	18.9	
Vert	7726.678	PK	42.7	37.3	8.6	32.8	55.8	73.9	18.1	
Vert	11590.000	PK	46.0	40.1	-1.6	33.1	51.4	73.9	22.5	
Vert	17385.000	PK	41.6	42.5	0.0	32.6	51.5	73.9	22.4	Floor Noise
Vert	7726.678	AV	35.8	37.3	8.6	32.8	48.9	53.9	5.0	
Vert	11590.000	AV	37.8	40.1	-1.6	33.1	43.2	53.9	10.7	
Vert	17385.000	AV	33.5	42.5	0.0	32.6	43.4	53.9	10.5	Floor Noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5m / 3.0 m) = 3.53 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB



## Radiated Spurious Emission


Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11201776H
Date	April 19, 2016
Temperature / Humidity	20 deg. C / 44 % RH
Engineer	Kazuya Yoshioka
Mode	Tx 11n-40 5795 MHz

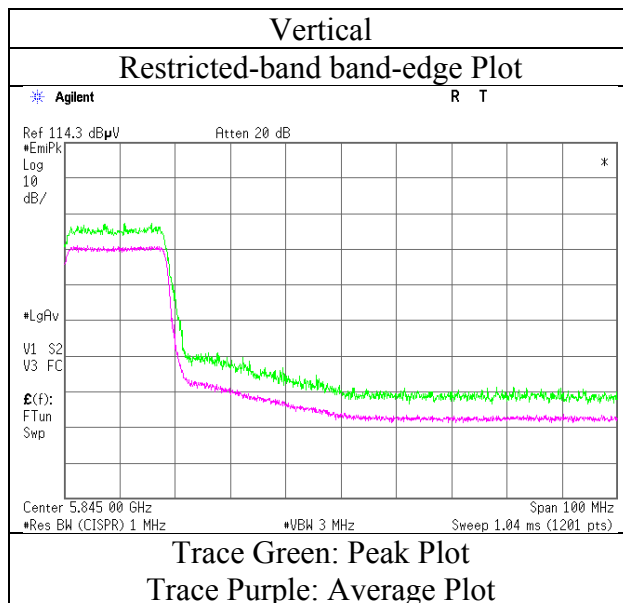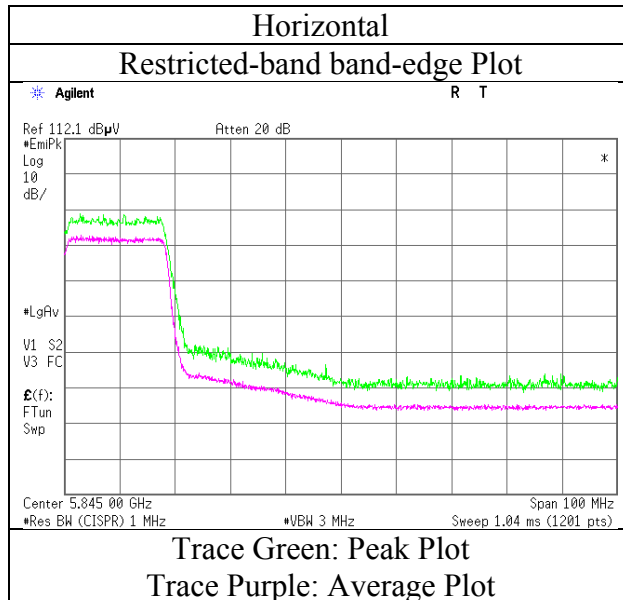

\* Final result of restricted band edge was shown in tabular data.

## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11201776H
Date	April 20, 2016
Temperature / Humidity	25deg. C / 37 % RH
Engineer	Masafumi Niwa
Mode	Tx 11n-40 5670 MHz

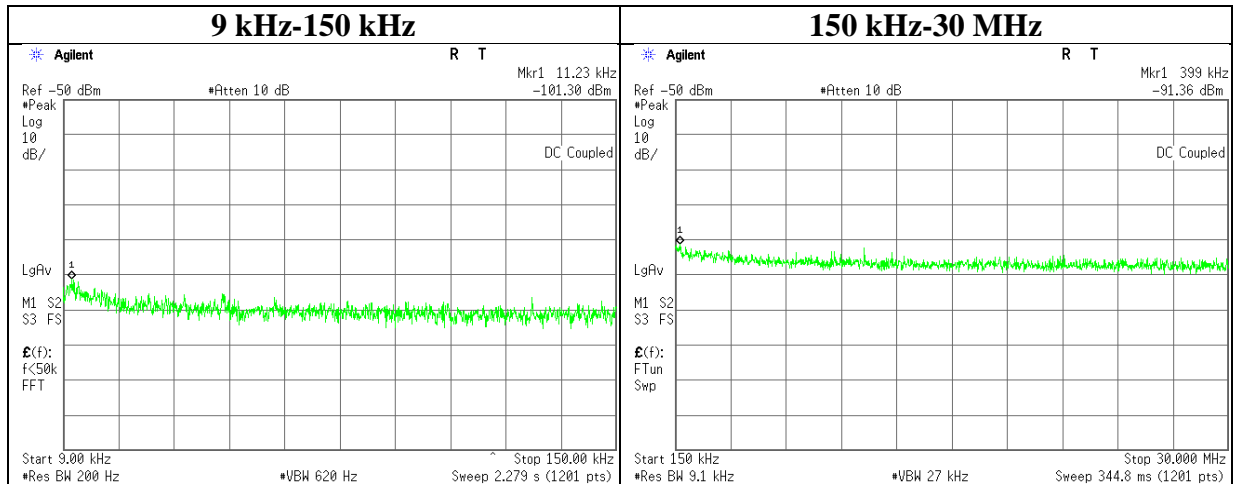

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-101.3	0.01	9.8	2.4	1	-89.1	300	6.0	-27.8	46.5	74.3	
399.00	-91.4	0.01	9.9	2.4	1	-79.1	300	6.0	-17.8	15.5	33.3	

$E = \text{EIRP} - 20 \cdot \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator} + \text{Antenna Gain} + 10 \cdot \log(N)$

## APPENDIX 2: Test instruments

### Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-01	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	CE	2015/09/19 * 12
MOS-27	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q26	CE	2016/01/21 * 12
MJM-25	Measure	KOMELON	KMC-36	-	CE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	CE/RE	-
MTR-09	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	CE	2015/06/08 * 12
MLS-25	LISN(AMN)	Schwarzbeck	NSLK8127	8127-731	CE	2015/07/17 * 12
MCC-03	Coaxial Cable	Fujikura/Suhner/TSJ	5D-2W(20m)/ 3D-2W(7.5m)/ RG400u(1.5m)/ RFM-E421(Switcher)	-/01068 (Switcher)	CE	2015/09/29 * 12
MAT-64	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2016/01/14 * 12
MMM-03	Digital Tester	Fluke	FLUKE 26-3	78030621	CE	2015/08/19 * 12
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/10/02 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE	2016/01/21 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE	-
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE	2015/11/06 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2015/08/10 * 12
MCC-141	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	RE	2015/06/22 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	RE	2015/10/01 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE	2016/01/18 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2015/05/18 * 12
MCC-167	Microwave Cable	Junkosha	MWX221	1404S374(1m) / 1405S074(5m)	RE	2015/05/21 * 12
MCC-178	Microwave Cable	Junkosha	MMX221-00500DM SDMS	1502S305	RE	2016/03/10 * 12
MHF-23	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCC	603	RE	2016/01/19 * 12
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE	2016/01/29 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2015/11/02 * 12
MLA-23	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2016/01/30 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2015/06/19 * 12
MAT-68	Attenuator	Anritsu	MP721B	6200961025	RE	2015/11/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2016/03/18 * 12
MHA-29	Horn Antenna 26.5-40GHz	ETS LINDGREN	3160-10	00152399	RE	2015/09/04 * 12
MCC-54	Microwave Cable	Suhner	SUCOFLEX101	2873(1m) / 2876(5m)	RE	2016/03/18 * 12
MPA-22	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-33 -8P / AMF-4F-2600400-33 -8P	1871355 /1871328	RE	2015/09/03 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2015/06/06 * 12
MOS-14	Thermo-Hygrometer	Custom	CTH-201	1401	AT	2016/01/21 * 12
MPM-09	Power Meter	Anritsu	ML2495A	6K00003348	AT	2015/10/19 * 12
MPSE-12	Power sensor	Anritsu	MA2411B	011598	AT	2015/10/19 * 12
MCC-144	Microwave Cable	Junkosha	MWX221	1207S407	AT	2015/08/06 * 12
MAT-22	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2016/03/18 * 12
MSA-14	Spectrum Analyzer	Agilent	E4440A	MY48250080	AT	2015/10/07 * 12
MCC-163	Microwave Cable	Murata	MXGS83RK3000	-	AT	2015/11/10 * 12
MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	AT	2015/11/10 * 12

### UL Japan, Inc.

#### Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item:           CE: Conducted Emission  
                      RE: Radiated Emission  
                      AT: Antenna Terminal Conducted test**