

# RADIO TEST REPORT

## Test Report No. 14937749H-A-R2

Customer	KEYENCE CORPORATION
Description of EUT	WLAN unit
Model Number of EUT	WM-WL
FCC ID	RF41637A
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	January 12, 2024
Remarks	Wireless LAN (2.4 GHz band) part

### Representative Test Engineer



Yuichiro Yamazaki  
Engineer

### Approved By



Satofumi Matsuyama  
Engineer



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.  
 There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

## ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

## REVISION HISTORY

### Original Test Report No.: 14937749H-A

This report is a revised version of 14937749H-A. 14937749H-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14937749H-A	September 29, 2023	-
1	14937749H-A-R1	October 25, 2023	APPENDIX 1: Test Data Radiated Spurious Emission P 27 to P 41 Replacement of radiated spurious emission data for Band-edge with new data.
2	14937749H-A-R2	January 12, 2024	Cover Page. SECTION 2.1, SECTION 4.2 -Correction of Description of EUT. Wide area CMM→WLAN unit
2	14937749H-A-R2	January 12, 2024	SECTION 2.2: Product Description Radio Specification  -Addition of below note. This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a" in the table below.  -Addition of a) in the item of antenna gain for wireless LAN (2.4 GHz band) part.

**Reference: Abbreviations (Including words undescribed in this report)**

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer Information .....</b>	<b>5</b>
<b>SECTION 2: Equipment Under Test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test Specification, Procedures &amp; Results .....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing .....</b>	<b>9</b>
<b>SECTION 5: Conducted Emission.....</b>	<b>12</b>
<b>SECTION 6: Radiated Spurious Emission.....</b>	<b>13</b>
<b>SECTION 7: Antenna Terminal Conducted Tests .....</b>	<b>15</b>
<b>APPENDIX 1: Test Data .....</b>	<b>16</b>
Conducted Emission .....	16
99 % Occupied Bandwidth and 6 dB Bandwidth.....	17
Maximum Peak Output Power .....	23
Average Output Power.....	24
Radiated Spurious Emission.....	27
Conducted Spurious Emission.....	42
Power Density .....	43
<b>APPENDIX 2: Test Instruments .....</b>	<b>47</b>
<b>APPENDIX 3: Photographs of Test Setup .....</b>	<b>49</b>
Conducted Emission .....	49
Radiated Spurious Emission.....	50
Worst Case Position .....	51
Antenna Terminal Conducted Tests .....	52

## **SECTION 1: Customer Information**

Company Name	KEYENCE CORPORATION
Address	1-3-14, Higashinakajima, Higashiyodogawa-ku, Osaka-shi, Osaka, Japan
Telephone Number	+81-6-6379-1111
Contact Person	Takashi Suzuki

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment Under Test (EUT)**

### **2.1 Identification of EUT**

Description	WLAN unit
Model Number	WM-WL
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	August 21, 2023
Test Date	August 29 to October 4, 2023

### **2.2 Product Description**

#### **General Specification**

Rating	DC 1.8 V / DC 3.3 V
Operating temperature	10 deg. C to 35 deg. C

#### **Radio Specification**

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

#### **WLAN (IEEE802.11b/11g/11n-20)**

Equipment Type	Transceiver
Frequency of Operation	2412 MHz to 2462 MHz
Type of Modulation	DSSS, OFDM
Antenna Gain <sup>a)</sup>	0.6 dBi

#### **WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)**

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band	5180 MHz to 5240 MHz
	40 MHz Band	5190 MHz to 5230 MHz
	80 MHz Band	5210 MHz
Type of Modulation	OFDM	
Antenna Gain	1.80 dBi	

## SECTION 3: Test Specification, Procedures & Results

### 3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

\*The customer has declared that the EUT has complies with FCC Part 15 Subpart B as SDoC.

### 3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	16.09 dB, 0.48529 MHz, L, AV	Complied	-
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)		Complied	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	2.1 dB 2390.0 MHz, AV, Vertical	Complied	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

\*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.

#### **FCC Part 15.31 (e)**

This EUT provides the stable voltage constantly to RF Part regardless of input voltage. Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

### 3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

#### Conducted emission

Item	Frequency Range	Unit	Calculated Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	dB	3.7
	0.15 MHz to 30 MHz	dB	3.3

#### Radiated emission

Measurement distance	Frequency Range	Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz	dB	3.3
		dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	4.8
		Vertical	5.0
	200 MHz to 1000 MHz	Horizontal	5.1
		Vertical	6.2
10 m	30 MHz to 200 MHz	Horizontal	4.8
		Vertical	4.8
	200 MHz to 1000 MHz	Horizontal	4.9
		Vertical	5.0
3 m	1 GHz to 6 GHz	dB	4.9
	6 GHz to 18 GHz	dB	5.2
1 m	10 GHz to 26.5 GHz	dB	5.5
	26.5 GHz to 40 GHz	dB	5.4
10 m	1 GHz to 18 GHz	dB	5.3

#### Antenna Terminal Conducted Tests

Item	Unit	Calculated Uncertainty (+/-)
Antenna Terminated Conducted Emission / Power Density / Burst Power	dB	3.28
Adjacent Channel Power (ACP)	dB	2.27
Bandwidth (OBW)	%	0.96
Time Readout (Time span upto 100 msec)	%	0.11
Time Readout (Time span upto 1000 msec)	%	0.11
Time Readout (Time span upto 60 sec)	%	0.02
Power Measurement (Power meter)	dB	1.50
Frequency Readout (Frequency counter)	ppm	0.67
Frequency Readout (Spectrum analyzer frequency readout function)	ppm	1.61
Temperature (Constant temperature bath)	deg. C	0.78
Humidity (Constant temperature bath)	%RH	2.80
Modulation Characteristics	%	6.93
Frequency for Mobile	ppm	0.08

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

\* Size of vertical conducting plane (for Conducted Emission test): 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.



## SECTION 4: Operation of EUT during testing

### 4.1 Operating Mode(s)

Mode	Remarks*
IEEE 802.11b (11b)	11 Mbps, PN9
IEEE 802.11g (11g)	48 Mbps, PN9
IEEE 802.11n 20 MHz BW (11n-20)	MCS 5, PN9
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)	
*Power of the EUT was set by the software as follows; Power Setting: Refer to the following table Software: Name: cypress-fmac Version: v5.10.9 (Date: September 9, 2022, Storage location: EUT memory)	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product. Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009.	

[Power Setting]


Mode	Ch	Frequency	Power Setting [dBm]
11b	1 to 11	2412 MHz to 2462 MHz	16
11g, 11n-20	1, 2, 10, 11	2412 MHz, 2417 MHz, 2457 MHz, 2462 MHz	12
	3 to 9	2422 MHz to 2452 MHz	15
* Power setting values are different from those of the final product because the power setting values were adjusted so that the maximum power value of the product specifications is output.			

\*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested Frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz), Conducted Spurious Emission	Tx 11n-20 *1)	2452 MHz
Radiated Spurious Emission (Above 1 GHz)	Tx 11b	2412 MHz 2437 MHz 2462 MHz
	Tx 11n-20 * 2)	2412 MHz *3) 2422 MHz 2437 MHz 2452 MHz 2462 MHz *3)
Maximum Peak Output Power, Power Density, 6dB Bandwidth, 99% Occupied Bandwidth	Tx 11b Tx 11g Tx 11n-20	2412 MHz 2422 MHz *4) 2437 MHz 2452 MHz *4) 2462 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test. *2) Since 11g and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power. *3) Only Band-Edge *4) Tests were performed on except 11b.		

## 4.2 Configuration and Peripherals

### Antenna Terminal Conducted test

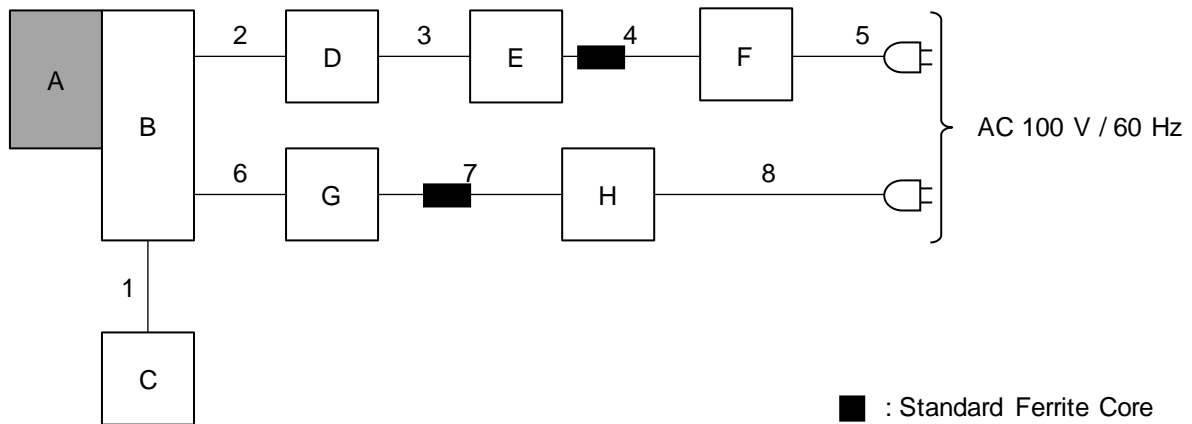

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.


### Description of EUT and Support Equipment

No.	Item	Model Number	Serial Number	Manufacturer	Remarks
A	WLAN unit	WM-WL	001	KEYENCE CORPORATION	EUT
B	Jig Board 01	-	-	KEYENCE CORPORATION	-
C	Jig Board 02	-	-	KEYENCE CORPORATION	-
D	Jig Board 03	-	-	KEYENCE CORPORATION	-
E	Laptop PC	CF-NX1GWGYS	2KKSA14614	Panasonic	-
F	AC Adapter	CF-AA6412C	6412CM112714770A	Panasonic	-
G	Jig Board 04	-	-	KEYENCE CORPORATION	-
H	AC Adapter	OP-88369	004214	KEYENCE CORPORATION	-

### List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	0.4	Unshielded	Unshielded	-
2	Signal Cable	0.2	Unshielded	Unshielded	-
3	LAN Cable	2.0	Unshielded	Unshielded	-
4	DC Cable	1.6	Unshielded	Unshielded	-
5	AC Cable	0.8	Unshielded	Unshielded	-
6	DC Cable	0.1	Unshielded	Unshielded	-
7	DC Cable	1.5	Unshielded	Unshielded	-
8	AC Cable	0.8	Unshielded	Unshielded	-

**Conducted Emission test and Radiated Emission test**

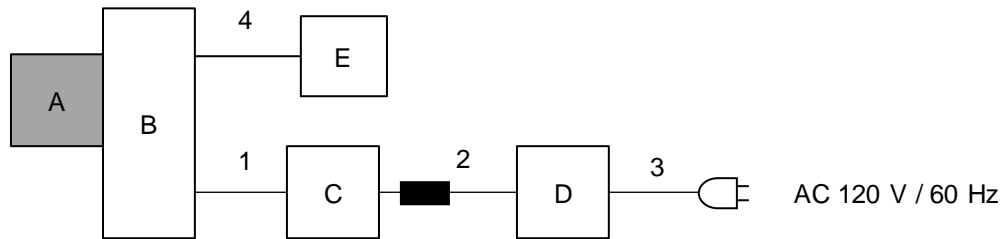

■ : Standard Ferrite Core

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

\*As a result of comparing AC 120 V and AC 240 V at pre-check, conducted emission test was performed with AC 120 V of the worst voltage as representative.

**Description of EUT and Support Equipment**

No.	Item	Model Number	Serial Number	Manufacturer	Remarks
A	WLAN unit	WM-WL	001	KEYENCE CORPORATION	EUT
B	Jig Board 01	-	-	KEYENCE CORPORATION	-
C	Jig Board 04	-	-	KEYENCE CORPORATION	-
D	AC Adapter	OP-88369	6576	KEYENCE CORPORATION	*1)
E	Jig Board 03	-	-	KEYENCE CORPORATION	-

\*1) Conducted emission test was conducted using AC adapter that is accessories for limited equipment connected to the EUT.

**List of Cables Used**

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	0.1	Unshielded	Unshielded	-
2	DC Cable	1.5	Unshielded	Unshielded	-
3	AC Cable	1.0 *2) 1.8 *3)	Unshielded	Unshielded	-
4	Signal Cable	0.2	Unshielded	Unshielded	-

\*2) Used for Conducted Emission test

\*3) Used for Radiated Emission test

## **SECTION 5: Conducted Emission**

### **Test Procedure and Conditions**

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.


The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

<b>Detector</b>	<b>: QP and CISPR AV</b>
<b>Measurement Range</b>	<b>: 0.15 MHz to 30 MHz</b>
<b>Test Data</b>	<b>: APPENDIX</b>
<b>Test Result</b>	<b>: Pass</b>

**Figure 1: Test Setup**

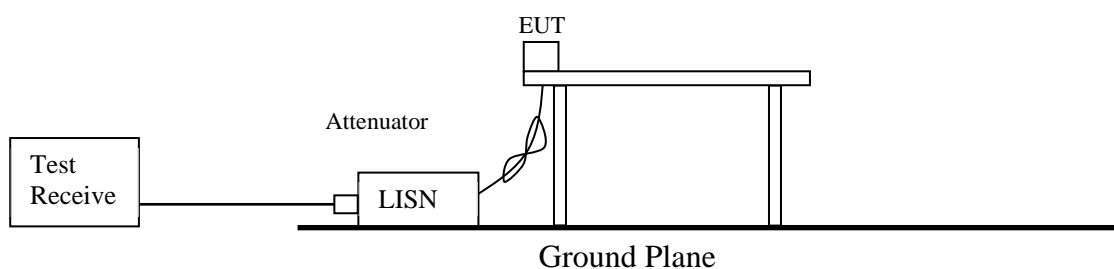

## **SECTION 6: Radiated Spurious Emission**

### **Test Procedure**

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.1 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces 11.12.2.5.2 The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 100 kHz VBW: 300 kHz

**Figure 2: Test Setup**


Below 1 GHz

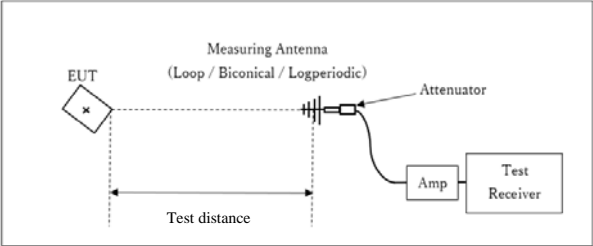

\* : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

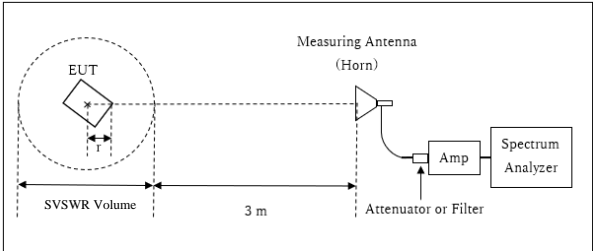


r : Radius of an outer periphery of EUT  
 \* : Center of turn table

Distance Factor:  $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$   
 \* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 4.0 \text{ m}$

SVSWR Volume : 2.0 m  
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
 r = 0.0m

\* The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

10 GHz to 26.5 GHz

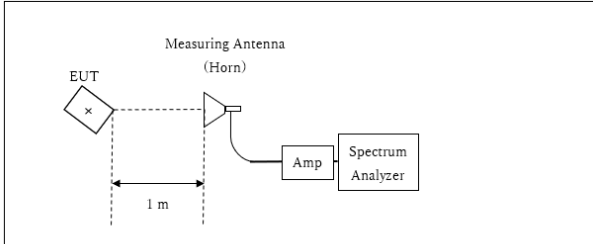

\* : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$   
 \*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement Range** : 30 MHz to 26.5 GHz  
**Test Data** : APPENDIX  
**Test Result** : Pass

## SECTION 7: Antenna Terminal Conducted Tests

### Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6dB Bandwidth	20 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

\*1) Peak hold was applied as Worst-case measurement.

\*2) Reference data

\*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

\*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

\*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed. The equipment and cables were not used for factor 0 dB of the data sheets.


**Test Data** : APPENDIX  
**Test Result** : Pass

**APPENDIX 1: Test Data**

**Conducted Emission**

Test place Ise EMC Lab. No.2 Shielded Room  
 Date September 8, 2023  
 Temperature / Humidity 20 deg. C / 59 % RH  
 Engineer Kiyoshiro Okazaki  
 Mode Tx 11n-20 2452 MHz

Limit : FCC\_Part 15 Subpart C(15.207)

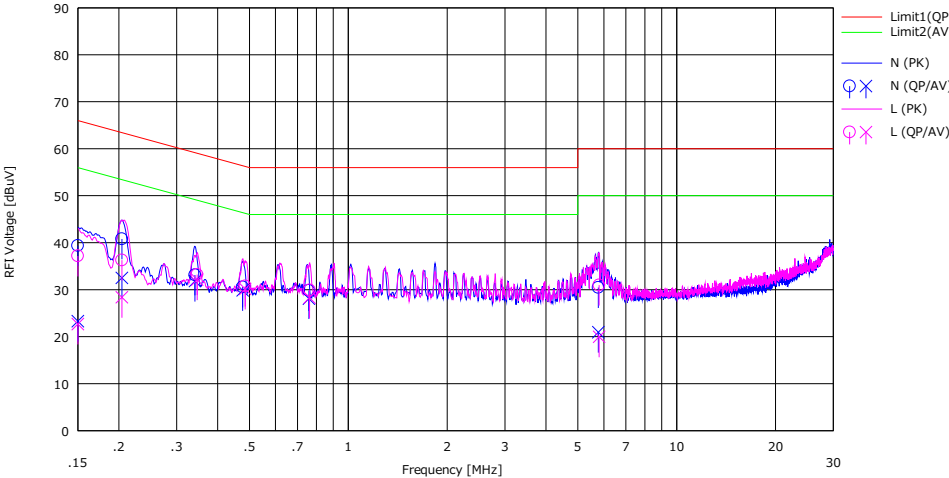

No.	Freq. [MHz]	Reading		LISN [dB]	LOSS [dB]	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]			<QP> [dBuV]	<AV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.15000	26.20	10.10	0.08	13.11	39.39	23.29	66.00	56.00	26.61	32.71	N	
2	0.20440	27.60	19.30	0.08	13.12	40.80	32.50	63.43	53.43	22.63	20.93	N	
3	0.34125	19.90	18.60	0.08	13.16	33.14	31.84	59.17	49.17	26.03	17.33	N	
4	0.47640	17.30	16.60	0.08	13.18	30.56	29.86	56.40	46.40	25.84	16.54	N	
5	0.75860	16.50	14.80	0.08	13.22	29.80	28.10	56.00	46.00	26.20	17.90	N	
6	5.77000	16.60	7.10	0.17	13.68	30.45	20.95	60.00	50.00	29.55	29.05	N	
7	0.15000	24.00	9.50	0.07	13.11	37.18	22.68	66.00	56.00	28.82	33.32	L	
8	0.20440	23.10	15.20	0.08	13.12	36.30	28.40	63.43	53.43	27.13	25.03	L	
9	0.34635	20.00	18.90	0.07	13.16	33.23	32.13	59.05	49.05	25.82	16.92	L	
10	0.48529	17.50	16.90	0.08	13.18	30.76	30.16	56.25	46.25	25.49	16.09	L	
11	0.76200	16.60	15.00	0.09	13.22	29.91	28.31	56.00	46.00	26.09	17.69	L	
12	5.80600	17.10	6.10	0.20	13.68	30.98	19.98	60.00	50.00	29.02	30.02	L	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + LISN + LOSS (CABLE + ATT)  
 Except for the above table: adequate margin data below the limits.




**99 % Occupied Bandwidth and 6 dB Bandwidth**

Test place                   Ise EMC Lab. No.8 Measurement Room  
Date                            August 29, 2023  
Temperature / Humidity    23 deg. C / 60 % RH  
Engineer                    Yuichiro Yamazaki  
Mode                           Tx

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
11b	2412	11628.3	8.387	> 0.5000
	2437	<b>11761.5</b>	9.332	> 0.5000
	2462	11739.7	8.495	> 0.5000
11g	2412	17070.4	16.005	> 0.5000
	2422	17235.8	16.368	> 0.5000
	2437	<b>17237.5</b>	16.408	> 0.5000
	2452	17054.5	15.975	> 0.5000
	2462	16992.4	15.793	> 0.5000
11n-20	2412	18136.5	17.618	> 0.5000
	2422	<b>18274.3</b>	17.534	> 0.5000
	2437	18270.2	17.701	> 0.5000
	2452	18072.3	17.621	> 0.5000
	2462	17999.8	17.270	> 0.5000


**99 % Occupied Bandwidth and 6 dB Bandwidth**

11b

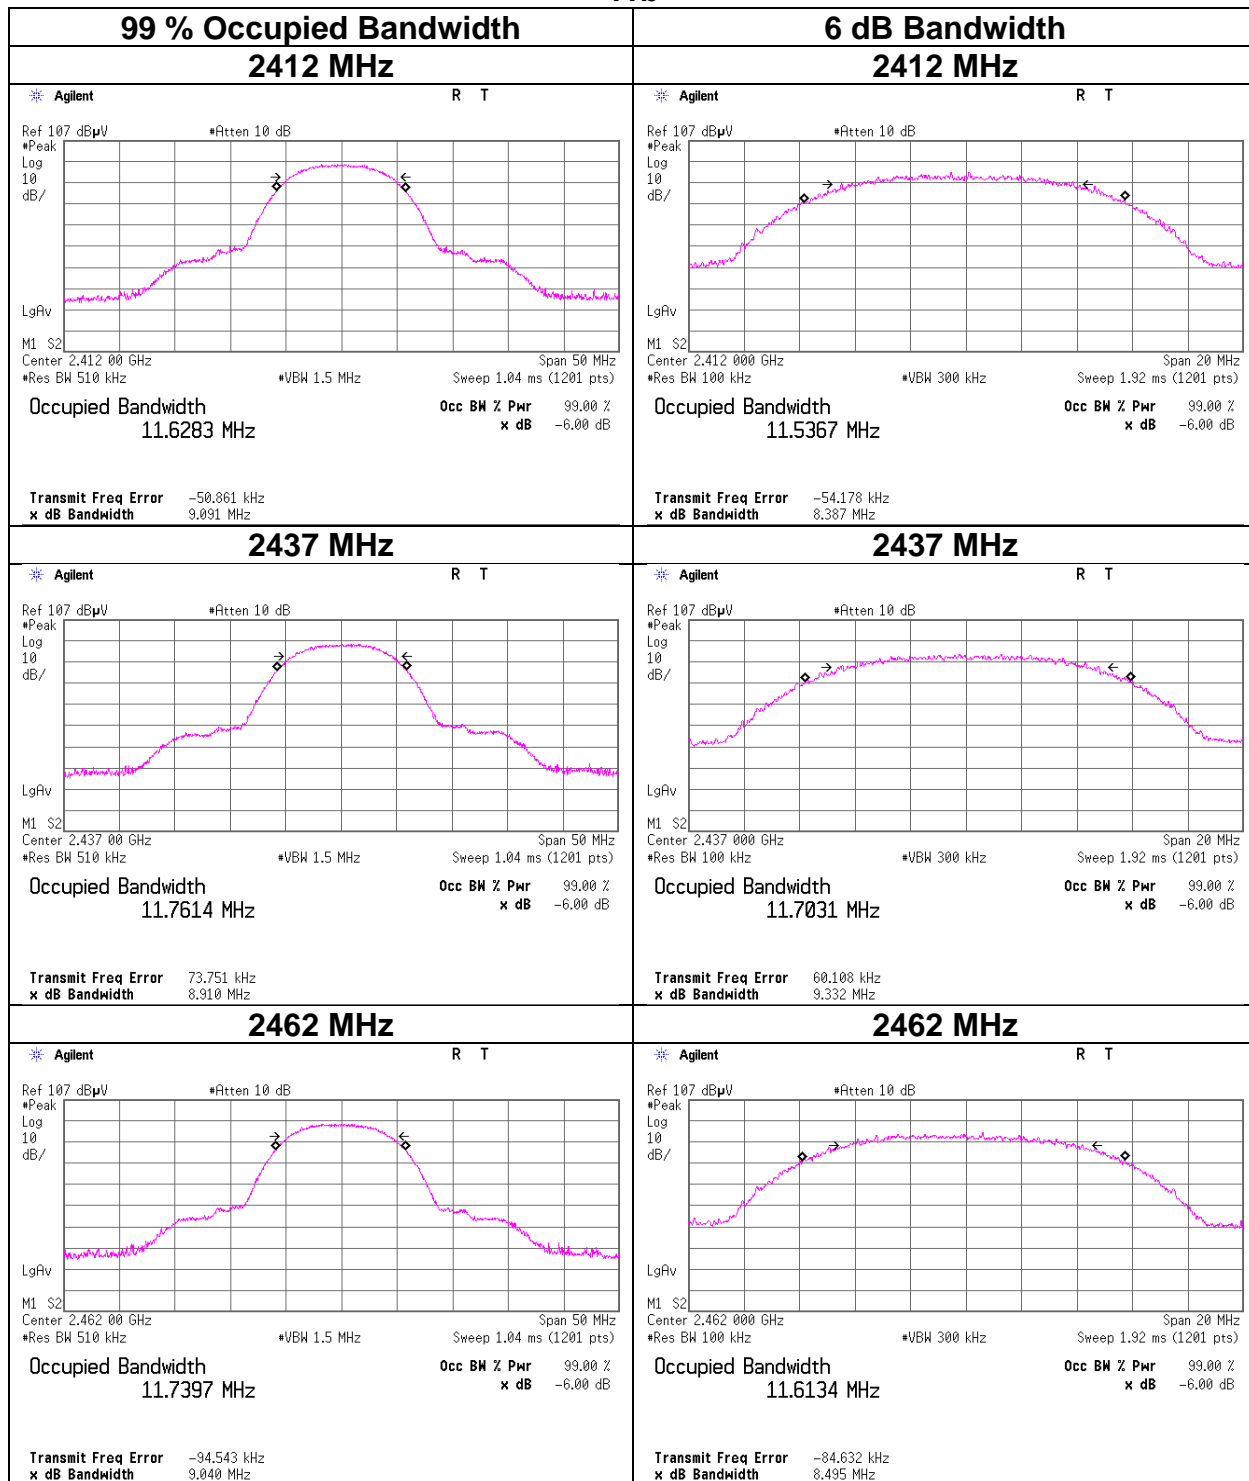


**99 % Occupied Bandwidth and 6 dB Bandwidth**

11g

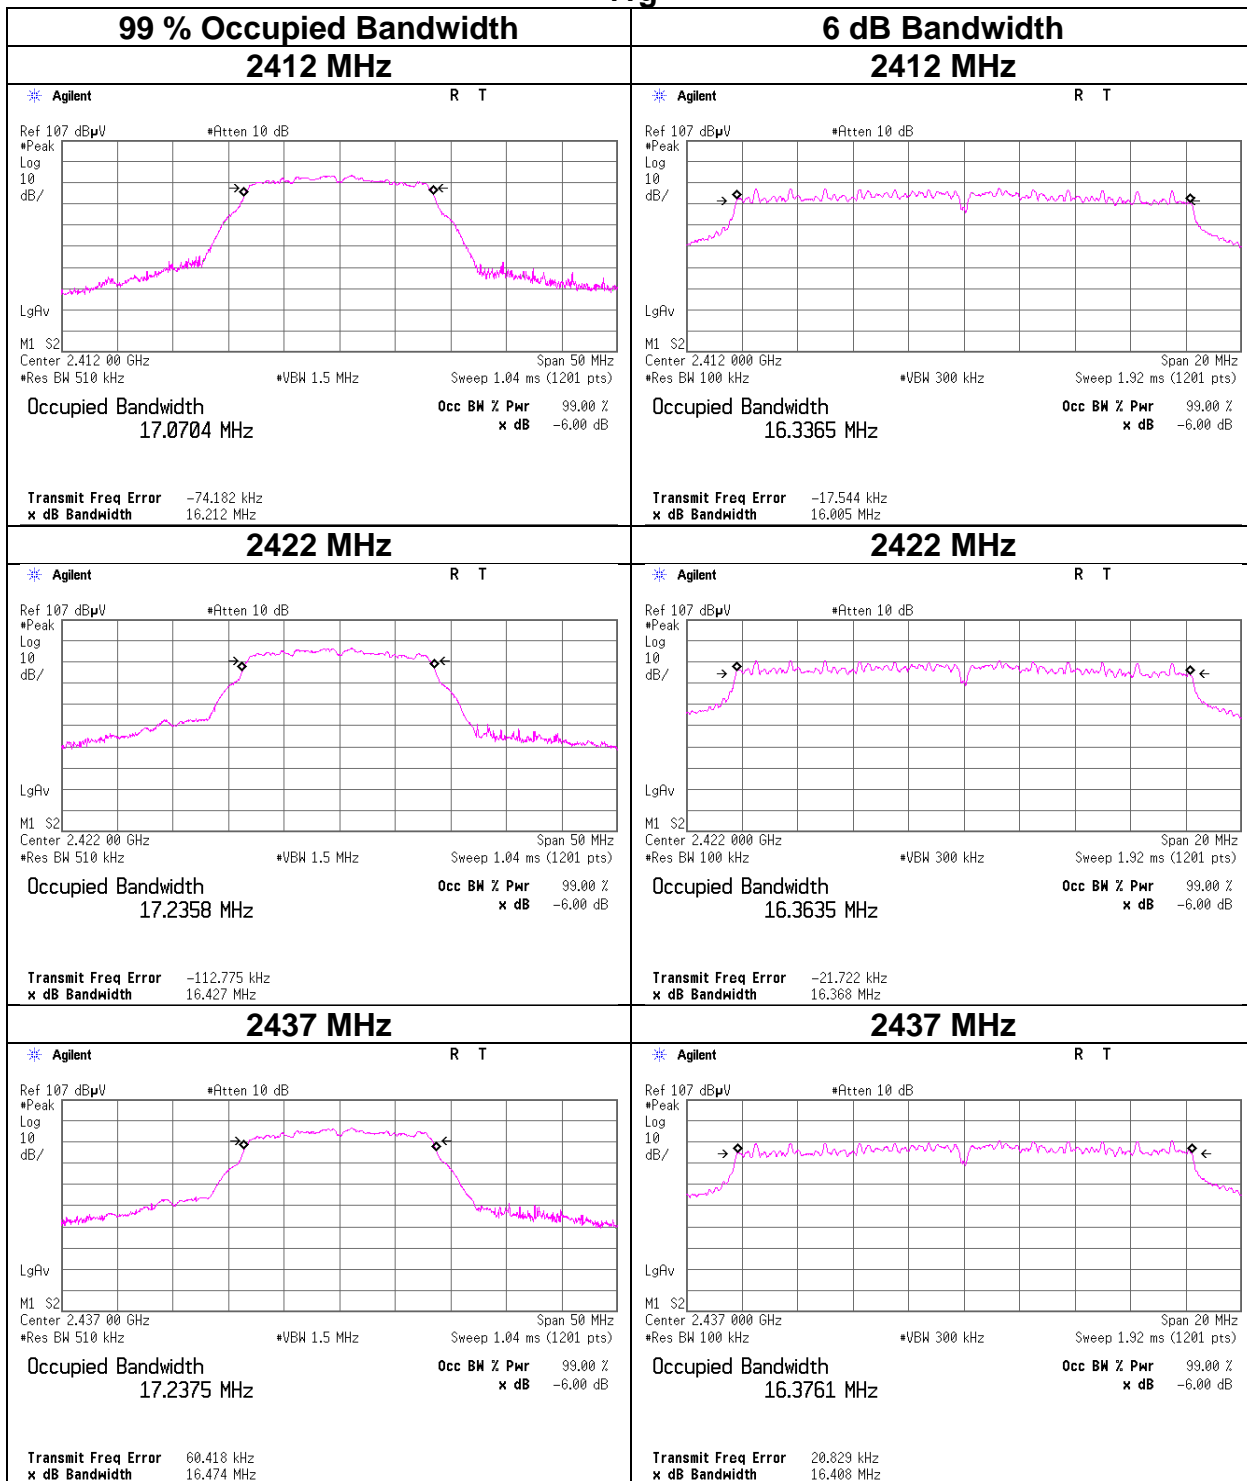


**99 % Occupied Bandwidth and 6 dB Bandwidth**

11g

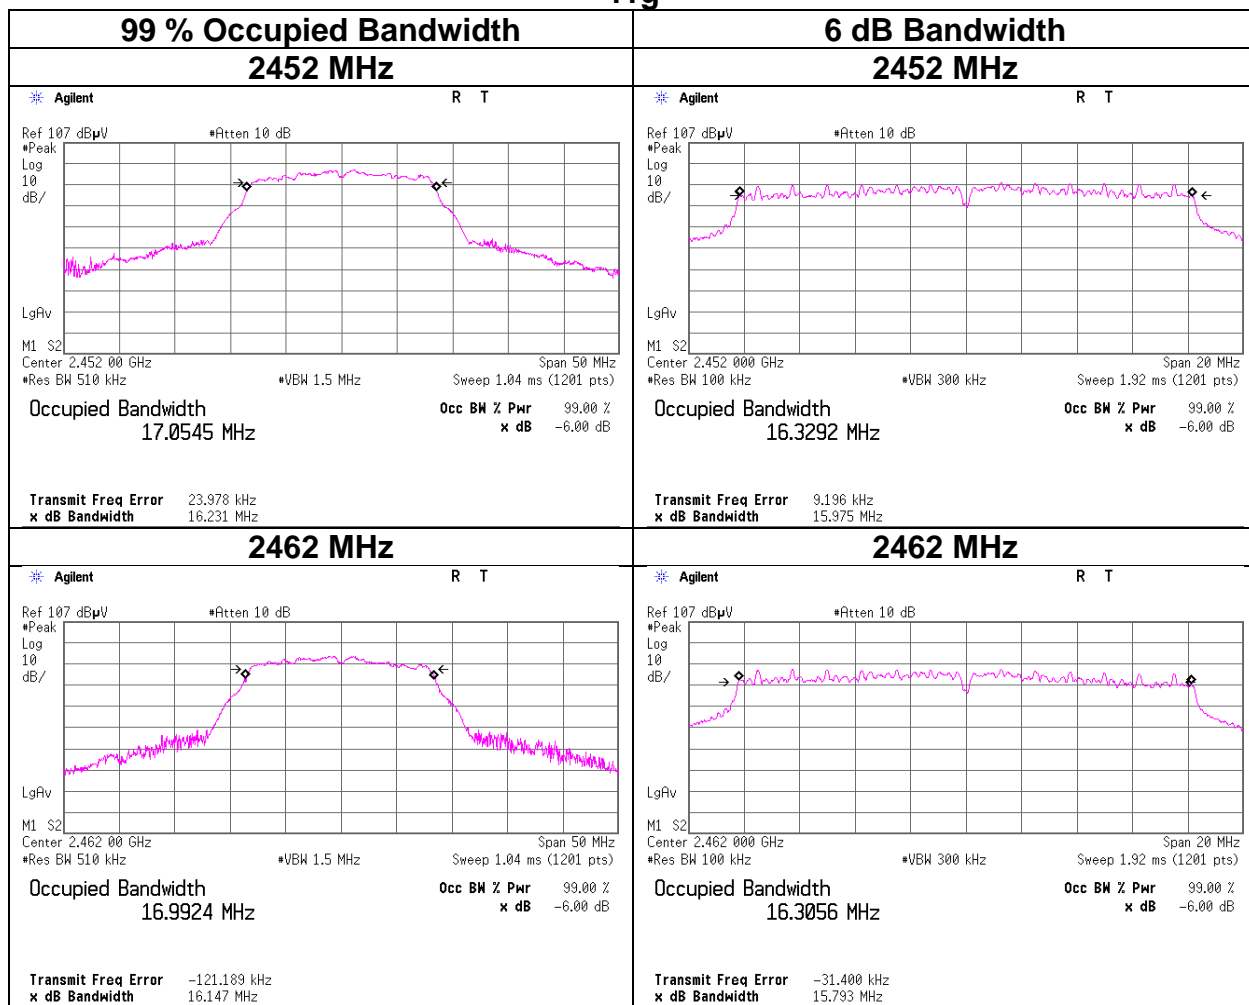


**99 % Occupied Bandwidth and 6 dB Bandwidth**

11-n20

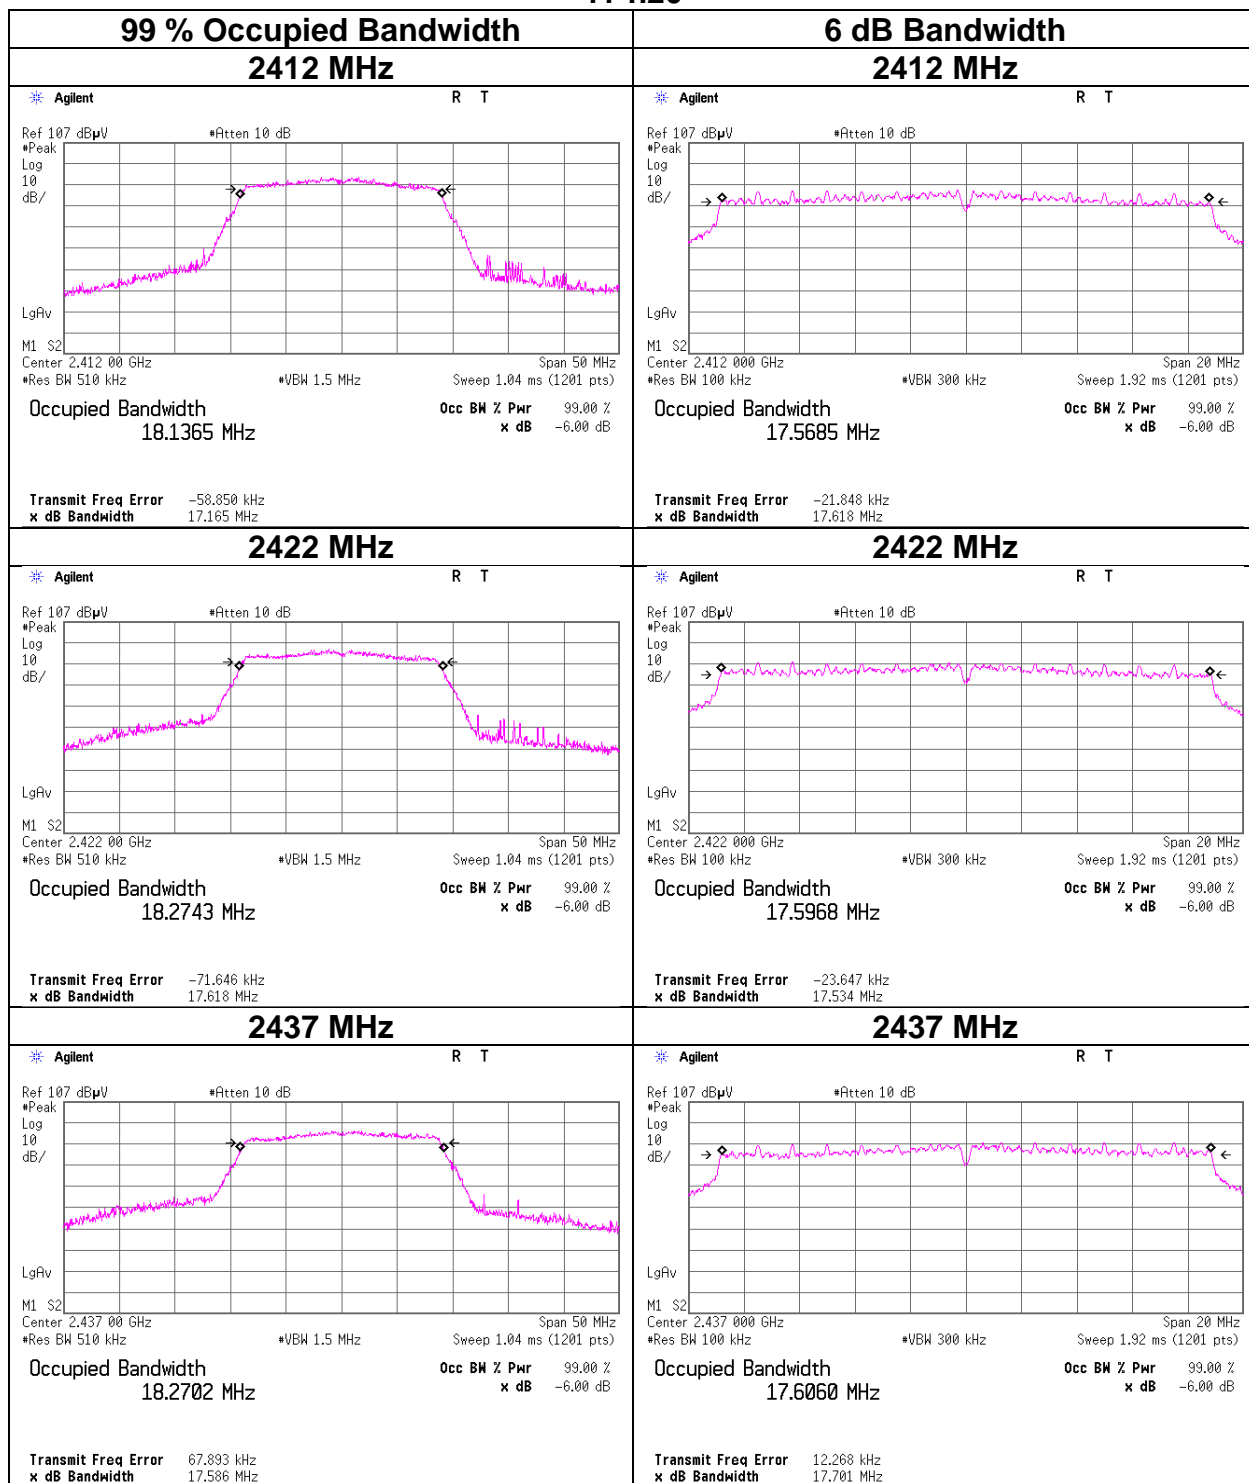

**99 % Occupied Bandwidth and 6 dB Bandwidth**

11n-20

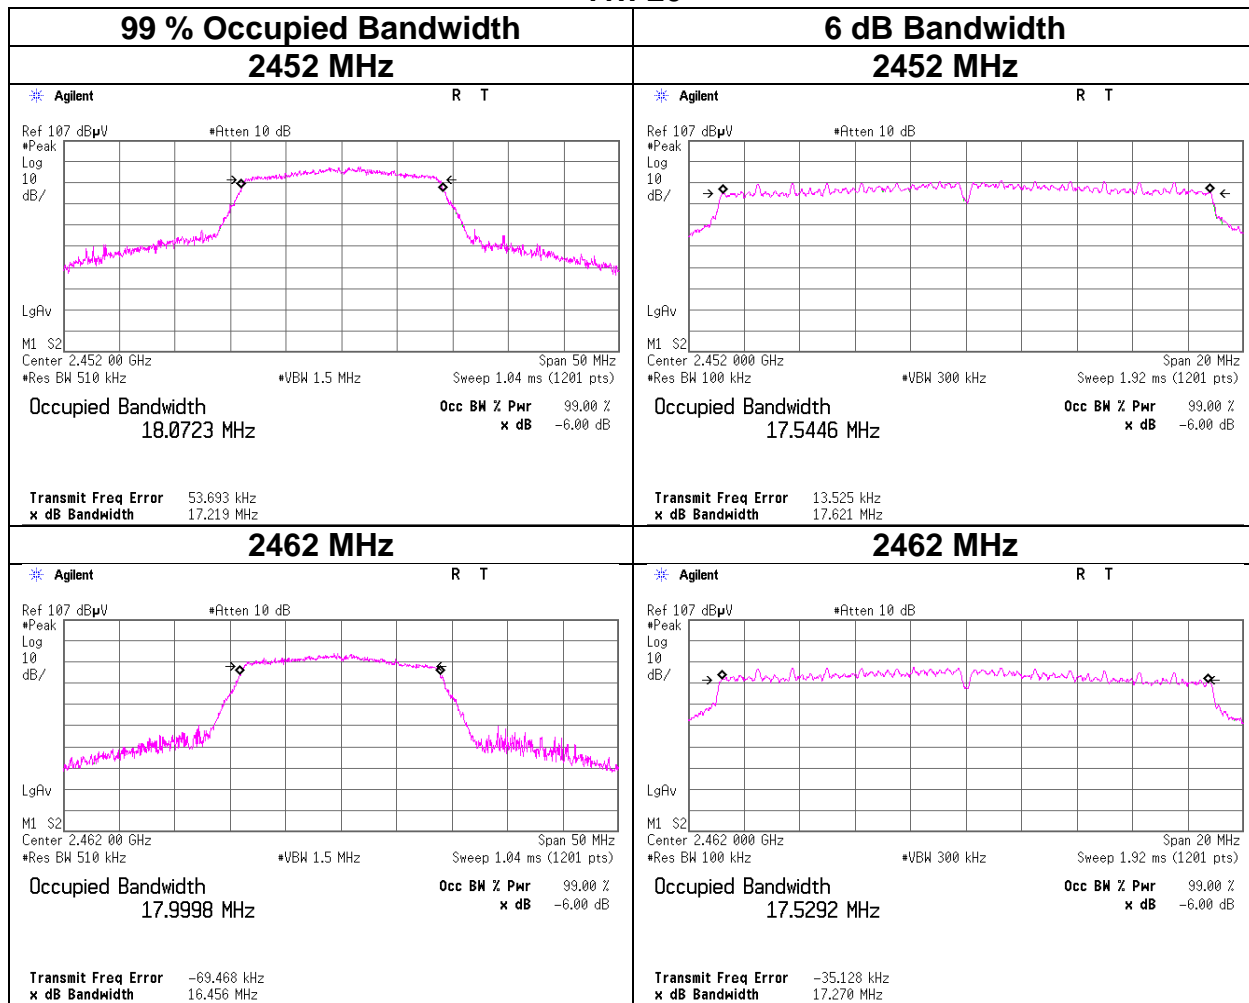

### Maximum Peak Output Power

Test place Ise EMC Lab. No.8 Measurement Room  
Date September 25, 2023  
Temperature / Humidity 23 deg. C / 60 % RH  
Engineer Yuta Moriya  
Mode Tx

11b

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	-2.62	1.88	19.99	19.25	84.14	30.00	1000	10.75	0.60	19.85	96.61	36.02	4000	16.17
2437	-2.89	1.90	19.99	19.00	79.43	30.00	1000	11.00	0.60	19.60	91.20	36.02	4000	16.42
2462	-2.50	1.91	19.99	<b>19.40</b>	87.10	30.00	1000	10.60	0.60	<b>20.00</b>	<b>100.00</b>	36.02	4000	16.02

11g

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	1.33	1.88	19.99	23.20	208.93	30.00	1000	6.80	0.60	23.80	239.88	36.02	4000	12.22
2422	2.63	1.89	19.99	24.51	282.49	30.00	1000	5.49	0.60	25.11	324.34	36.02	4000	10.91
2437	2.70	1.90	19.99	24.59	287.74	30.00	1000	5.41	0.60	25.19	330.37	36.02	4000	10.83
2452	2.81	1.90	19.99	<b>24.70</b>	<b>295.12</b>	30.00	1000	5.30	0.60	<b>25.30</b>	<b>338.84</b>	36.02	4000	10.72
2462	1.39	1.91	19.99	23.29	213.30	30.00	1000	6.71	0.60	23.89	244.91	36.02	4000	12.13

11n-20

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2412	1.43	1.88	19.99	23.30	213.80	30.00	1000	6.70	0.60	23.90	245.47	36.02	4000	12.12
2422	2.81	1.89	19.99	24.69	294.44	30.00	1000	5.31	0.60	25.29	338.06	36.02	4000	10.73
2437	2.63	1.90	19.99	24.52	283.14	30.00	1000	5.48	0.60	25.12	325.09	36.02	4000	10.90
2452	2.86	1.90	19.99	<b>24.75</b>	<b>298.54</b>	30.00	1000	5.25	0.60	<b>25.35</b>	<b>342.77</b>	36.02	4000	10.67
2462	1.41	1.91	19.99	23.31	214.29	30.00	1000	6.69	0.60	23.91	246.04	36.02	4000	12.11

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

\*The equipment and cables were not used for factor 0 dB of the data sheets.

Worst Rate Check

11b

Rate [Mbps]	Reading [dBm]	Remark
1	-4.40	
2	-4.01	
5.5	-4.04	
11	-3.85	*

11g

Rate [Mbps]	Reading [dBm]	Remark
6	2.82	
9	2.77	
12	2.79	
18	2.45	
24	2.25	
36	1.90	
48	2.90	*
54	2.25	

11n-20

MCS Number	Reading [dBm]	Remark
0	2.97	
1	3.03	
2	2.73	
3	2.66	
4	2.56	
5	3.16	*
6	2.50	
7	2.57	

\*: Worst Rate

All comparison were carried out on same frequency and measurement factors.

Rate check frequency: 2437 MHz

Difference between worst rate check data and dformal testresult is due to the different test condition.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place                   Ise EMC Lab. No.8 Measurement Room  
Date                           September 25, 2023  
Temperature / Humidity    23 deg. C / 60 % RH  
Engineer                    Yuta Moriya  
Mode                         Tx

**11b    1 Mbps**

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-6.04	1.88	19.99	15.83	38.28	0.00	15.83	38.28
2437	-6.39	1.90	19.99	15.50	35.48	0.00	15.50	35.48
2462	-5.85	1.91	19.99	<b>16.05</b>	<b>40.27</b>	0.00	<b>16.05</b>	<b>40.27</b>

**11g    6 Mbps**

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-9.51	1.88	19.99	12.36	17.22	0.04	12.40	17.38
2422	-6.47	1.89	19.99	15.41	34.75	0.04	15.45	35.08
2437	-6.55	1.90	19.99	15.34	34.20	0.04	15.38	34.51
2452	-6.47	1.90	19.99	<b>15.42</b>	<b>34.83</b>	0.04	<b>15.46</b>	<b>35.16</b>
2462	-9.54	1.91	19.99	12.36	17.22	0.04	12.40	17.38

**11n-20   MCS 0**

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-9.50	1.88	19.99	12.37	17.26	0.04	12.41	17.42
2422	-6.61	1.89	19.99	15.27	33.65	0.04	15.31	33.96
2437	-6.75	1.90	19.99	15.14	32.66	0.04	15.18	32.96
2452	-6.45	1.90	19.99	<b>15.44</b>	<b>34.99</b>	0.04	<b>15.48</b>	<b>35.32</b>
2462	-9.54	1.91	19.99	12.36	17.22	0.04	12.40	17.38

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss  
Result (Burst power average) = Time average + Duty factor


**The average output power was measured with the lowest order modulation and lowest data rate configuration in each IEEE 802.11 mode based on KDB 248227 D01.**




**Burst rate confirmation**

Test place Ise EMC Lab. No.8 Measurement Room  
 Date August 29, 2023  
 Temperature / Humidity 23 deg. C / 60 % RH  
 Engineer Yuichiro Yamazaki  
 Mode Tx


**11b 11 Mbps**

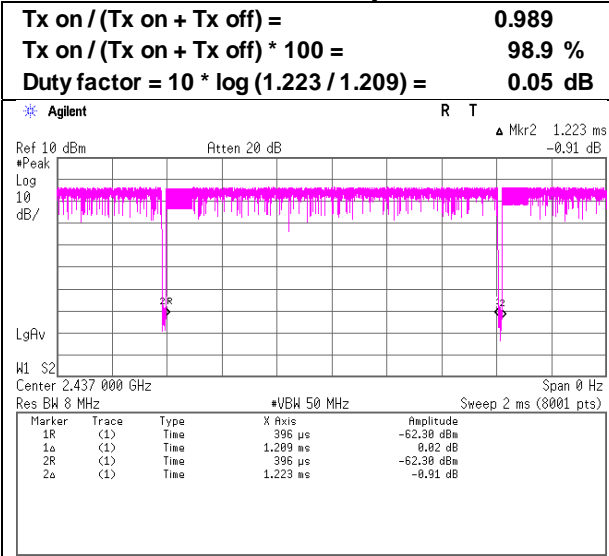

**11g 48 Mbps**

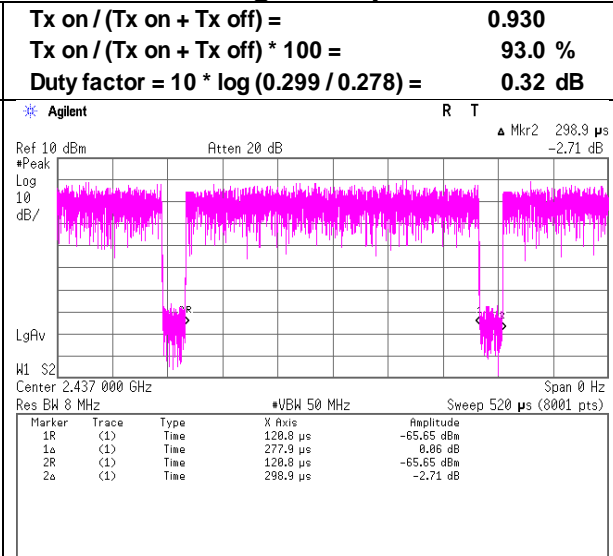

**11n-20 MCS 5**

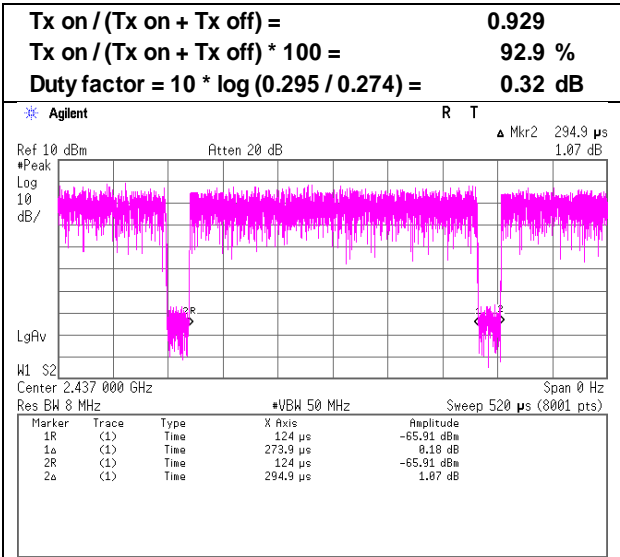


\* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.


### Burst rate confirmation

Test place Ise EMC Lab. No.8 Measurement Room  
Date August 29, 2023  
Temperature / Humidity 23 deg. C / 60 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx


#### 11b 1 Mbps

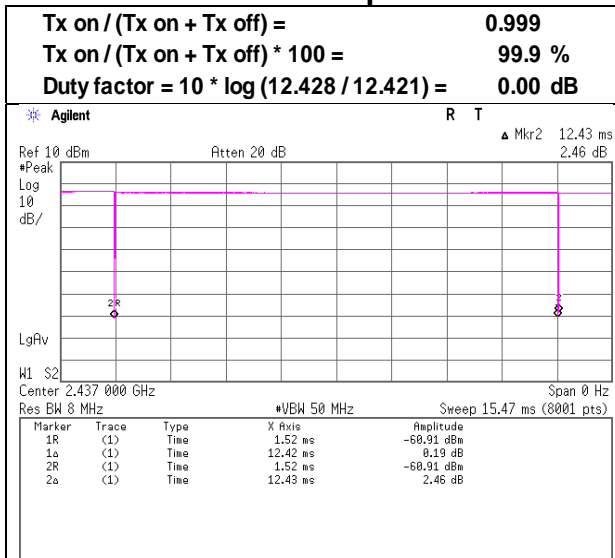

#### 11g 6Mbps

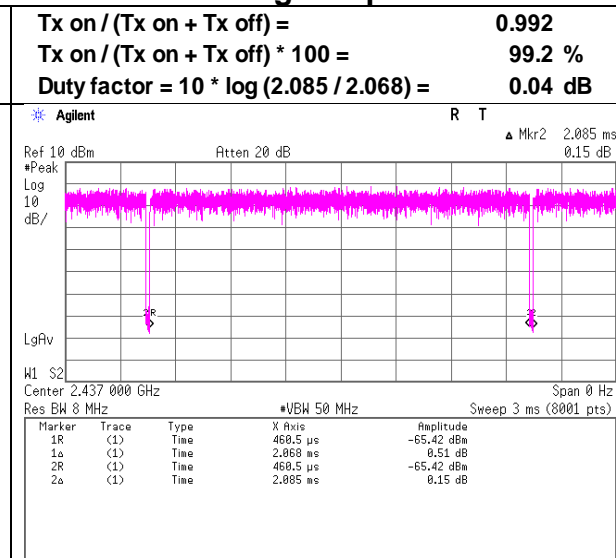

#### 11n-20 MCS 0

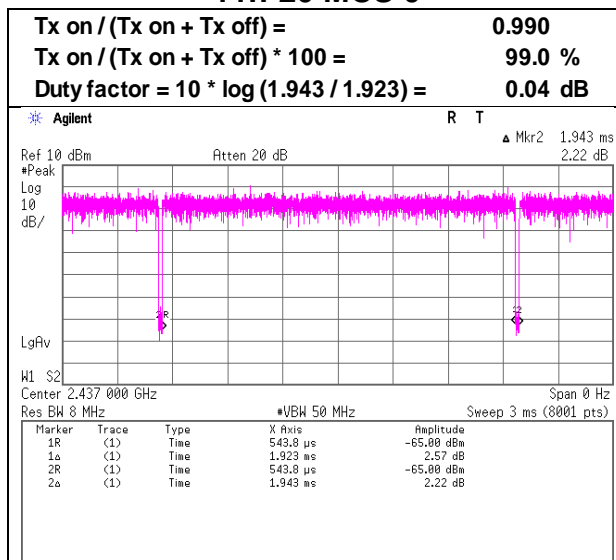

\* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

## Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.3	No.3	No.3	No.1
Date	August 30, 2023	September 1, 2023	September 3, 2023	October 4, 2023
Temperature / Humidity	22 deg. C / 60 % RH	22 deg. C / 58 % RH	21 deg. C / 42 % RH	23 deg. C / 50 % RH
Engineer	Junya Okuno (1 GHz to 10 GHz except band-edge)	Yuta Moriya (10 GHz to 18 GHz)	Yuta Moriya (Above 18 GHz)	Junya Okuno (Band-edge)
Mode	Tx 11b 2412 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2390.0	57.4	47.5	27.8	5.1	36.1	-	54.2	44.3	73.9	53.9	19.7	9.6	
Hori.	4824.0	40.2	32.4	31.5	7.6	31.4	-	47.9	40.1	73.9	53.9	26.0	13.8	Floor noise
Hori.	7236.0	41.8	33.5	35.9	9.0	32.3	-	54.3	46.0	73.9	53.9	19.6	7.9	Floor noise
Hori.	9648.0	43.1	32.4	38.9	9.4	33.0	-	58.5	47.8	73.9	53.9	15.4	6.1	Floor noise
Vert.	2390.0	56.8	47.0	27.8	5.1	36.1	-	53.7	43.8	73.9	53.9	20.2	10.1	
Vert.	4824.0	40.2	32.4	31.5	7.6	31.4	-	47.9	40.1	73.9	53.9	26.0	13.8	Floor noise
Vert.	7236.0	41.7	33.5	35.9	9.0	32.3	-	54.2	46.0	73.9	53.9	19.7	7.9	Floor noise
Vert.	9648.0	43.1	32.4	38.9	9.4	33.0	-	58.5	47.8	73.9	53.9	15.4	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor  
 \*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).  
 \*QP detector was used up to 1GHz.



### 20dBc Data Sheet

Polarity [Hori/Vert]	Frequency [MHz]	Reading (PK) [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2412.0	103.2	27.8	5.1	36.1	100.0	-	-	Carrier
Hori.	2398.5	66.3	27.8	5.1	36.1	63.1	80.0	16.8	
Hori.	2400.0	63.4	27.8	5.1	36.1	60.2	80.0	19.8	
Vert.	2412.0	101.8	27.8	5.1	36.1	98.6	-	-	Carrier
Vert.	2398.5	65.3	27.8	5.1	36.1	62.1	78.6	16.5	
Vert.	2400.0	62.3	27.8	5.1	36.1	59.1	78.6	19.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Distance factor: 1 GHz - 10 GHz      20log (4 m / 3.0 m) = 2.5 dB  
 10 GHz - 26.5 GHz      20log (1.0 m / 3.0 m) = -9.5 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	October 4, 2023
Temperature / Humidity	23 deg. C / 50 % RH
Engineer	Junya Okuno
	(Band-edge)
Mode	Tx 11b 2412 MHz

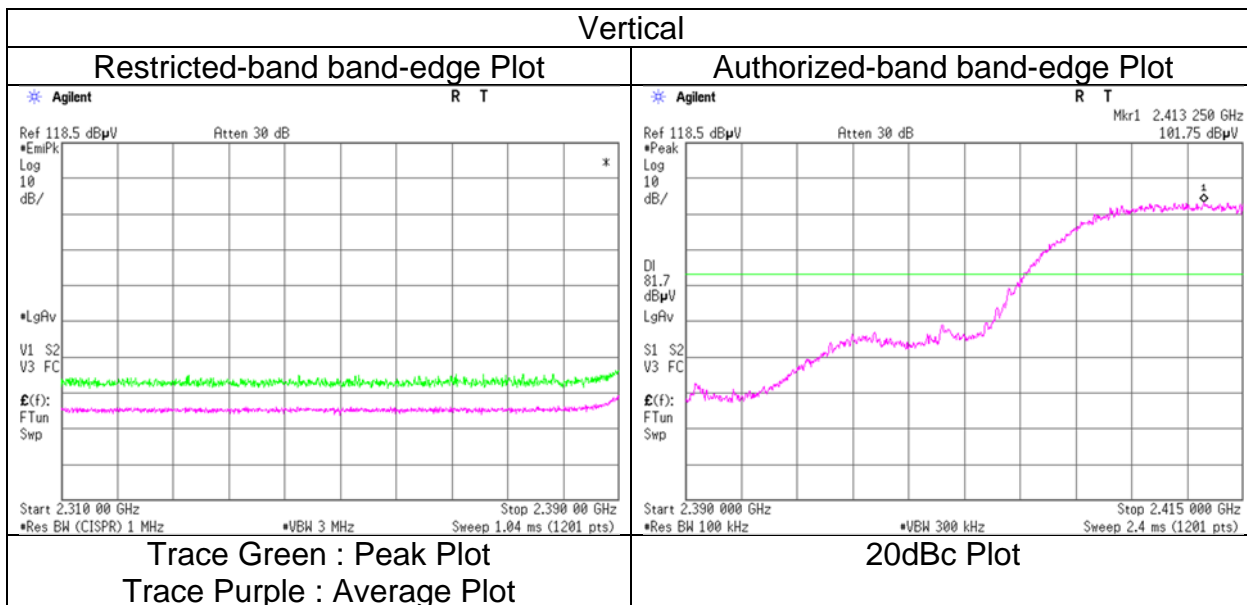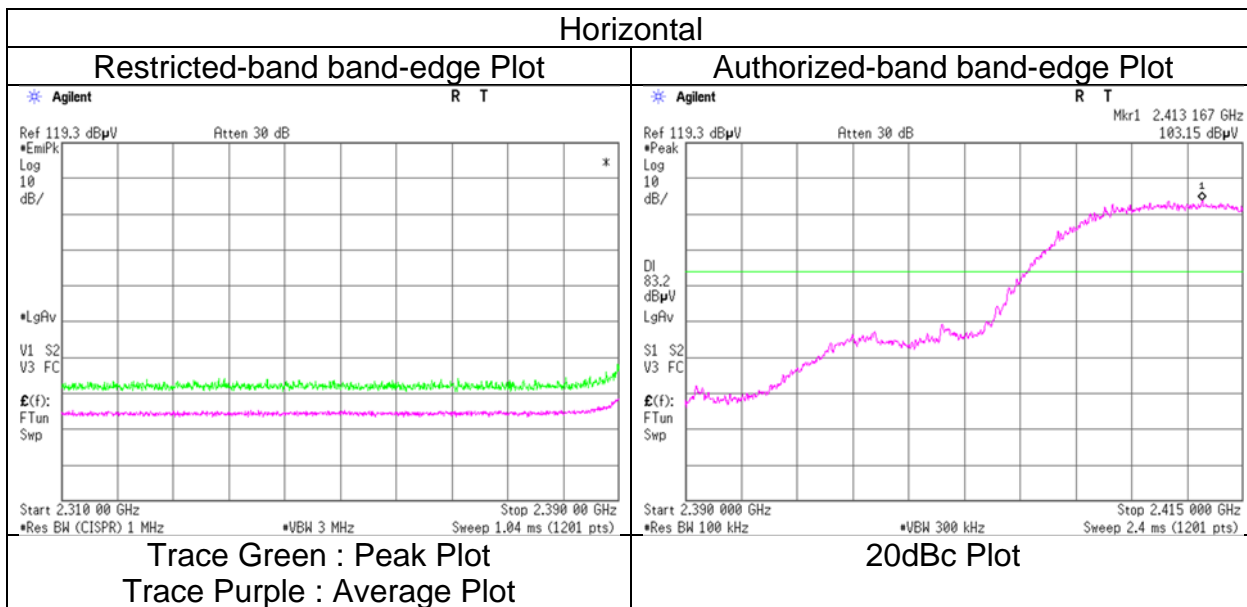

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	August 30, 2023	September 1, 2023	September 3, 2023
Temperature / Humidity	22 deg. C / 60 % RH	22 deg. C / 58 % RH	21 deg. C / 42 % RH
Engineer	Junya Okuno	Yuta Moriya	Yuta Moriya
	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(Above 18 GHz)
Mode	Tx 11b 2437 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4874.0	40.0	32.2	31.5	7.7	31.4	-	47.8	39.9	73.9	53.9	26.1	14.0	Floor noise
Hori.	7311.0	41.7	33.5	36.0	9.0	32.3	-	54.3	46.0	73.9	53.9	19.6	7.9	Floor noise
Hori.	9748.0	42.9	32.2	39.1	9.5	33.0	-	58.5	47.8	73.9	53.9	15.4	6.1	Floor noise
Vert.	4874.0	40.1	32.1	31.5	7.7	31.4	-	47.9	39.8	73.9	53.9	26.0	14.1	Floor noise
Vert.	7311.0	41.7	33.6	36.0	9.0	32.3	-	54.2	46.1	73.9	53.9	19.7	7.8	Floor noise
Vert.	9748.0	42.9	32.3	39.1	9.5	33.0	-	58.5	47.8	73.9	53.9	15.4	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor  
 \*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).  
 \*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz      20log (4 m / 3.0 m) = 2.5 dB  
                              10 GHz - 26.5 GHz      20log (1.0 m / 3.0 m) = -9.5 dB

## Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.3	No.3	No.3	No.1
Date	August 30, 2023	September 1, 2023	September 3, 2023	October 4, 2023
Temperature / Humidity	22 deg. C / 60 % RH	22 deg. C / 58 % RH	21 deg. C / 42 % RH	23 deg. C / 50 % RH
Engineer	Junya Okuno (1 GHz to 10 GHz except band-edge)	Yuta Moriya (10 GHz to 18 GHz)	Yuta Moriya (Above 18 GHz)	Junya Okuno (Band-edge)
Mode	Tx 11b 2462 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2483.5	53.5	45.5	27.7	5.2	36.1	-	50.3	42.3	73.9	53.9	23.7	11.6	
Hori.	4924.0	40.4	32.1	31.6	7.7	31.4	-	48.2	39.9	73.9	53.9	25.7	14.0	Floor noise
Hori.	7386.0	42.0	33.7	36.1	9.0	32.4	-	54.7	46.4	73.9	53.9	19.2	7.5	Floor noise
Hori.	9848.0	42.0	32.2	39.2	9.5	33.0	-	57.6	47.8	73.9	53.9	16.3	6.1	Floor noise
Vert.	2483.5	53.7	45.5	27.7	5.2	36.1	-	50.4	42.2	73.9	53.9	23.5	11.7	
Vert.	4924.0	40.3	32.0	31.6	7.7	31.4	-	48.2	39.9	73.9	53.9	25.8	14.1	Floor noise
Vert.	7386.0	41.9	33.7	36.1	9.0	32.4	-	54.6	46.4	73.9	53.9	19.3	7.5	Floor noise
Vert.	9848.0	42.1	32.2	39.2	9.5	33.0	-	57.7	47.9	73.9	53.9	16.2	6.1	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor  
 \*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).  
 \*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz      20log (4 m / 3.0 m) = 2.5 dB  
                              10 GHz - 26.5 GHz      20log (1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place  
 Semi Anechoic Chamber  
 Date  
 Temperature / Humidity  
 Engineer  
 Mode

Ise EMC Lab.  
 No.1  
 October 4, 2023  
 23 deg. C / 50 % RH  
 Junya Okuno  
 (Band-edge)  
 Tx 11b 2462 MHz

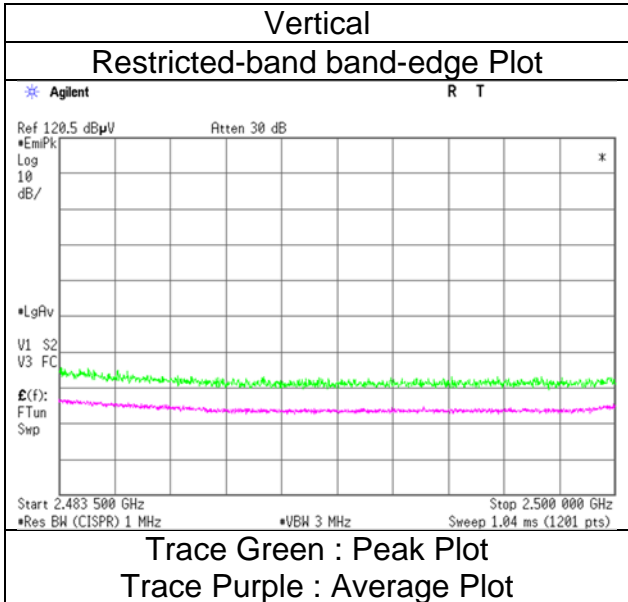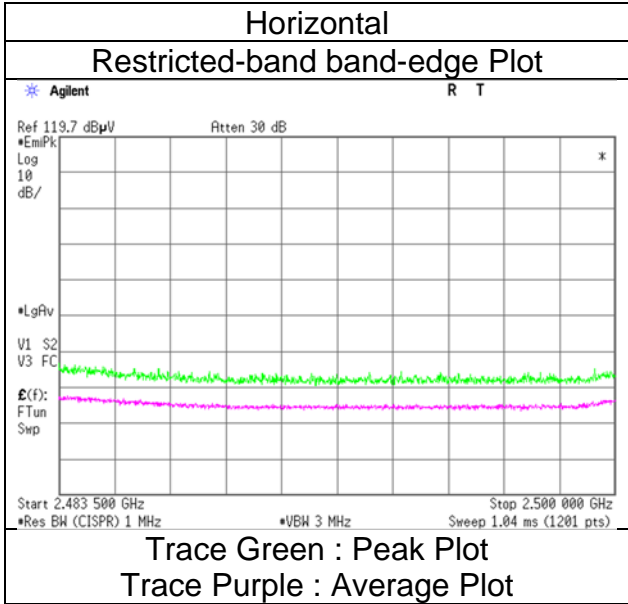

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	October 4, 2023
Temperature / Humidity	23 deg. C / 50 % RH
Engineer	Junya Okuno
	(Band-edge)
Mode	Tx 11n-20 2412 MHz

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	2390.0	67.3	54.4	27.8	5.1	36.1	0.3	64.2	51.6	73.9	53.9	9.7	2.3	*1)
Vert.	2390.0	67.5	54.6	27.8	5.1	36.1	0.3	64.3	51.8	73.9	53.9	9.6	2.1	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor  
 \*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).  
 \*QP detector was used up to 1GHz.  
 \*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet



Polarity	Frequency	Reading (PK)	Ant Factor	Loss	Gain	Result	Limit	Margin	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
Hori.	2412.0	97.2	27.8	5.1	36.1	94.1	-	-	Carrier
Hori.	2400.0	61.9	27.8	5.1	36.1	58.7	74.1	15.4	
Vert.	2412.0	96.5	27.8	5.1	36.1	93.4	-	-	Carrier
Vert.	2400.0	61.4	27.8	5.1	36.1	58.3	73.4	15.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Distance factor: 1 GHz - 10 GHz       $20\log(4\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$



## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	October 4, 2023
Temperature / Humidity	23 deg. C / 50 % RH
Engineer	Junya Okuno
	(Band-edge)
Mode	Tx 11n-20 2412 MHz

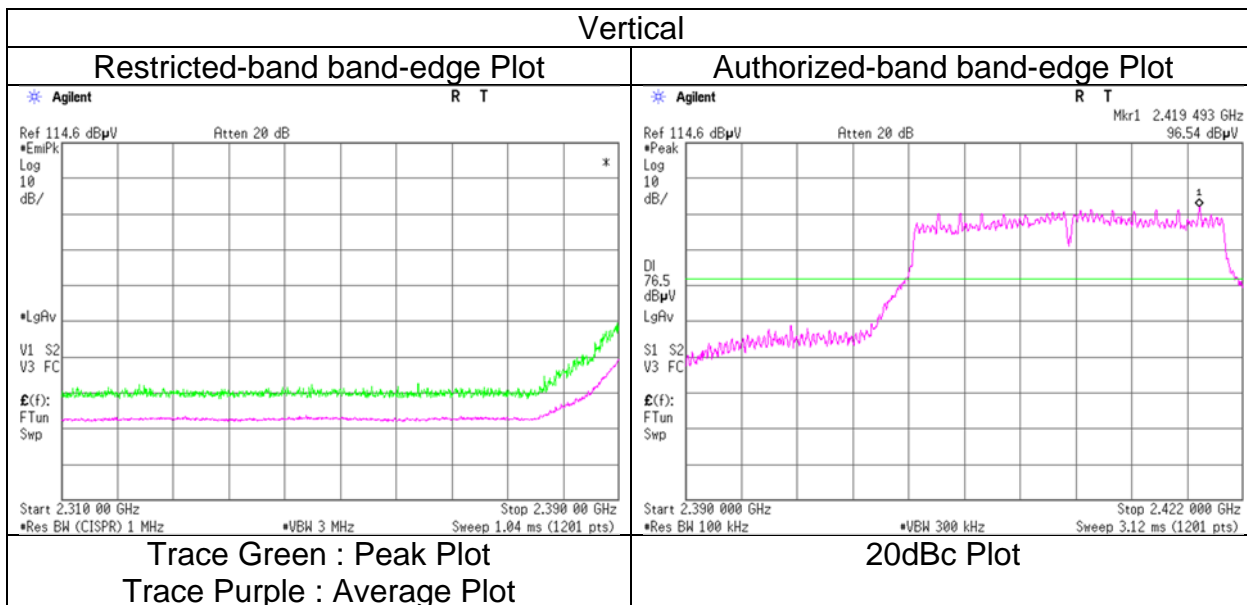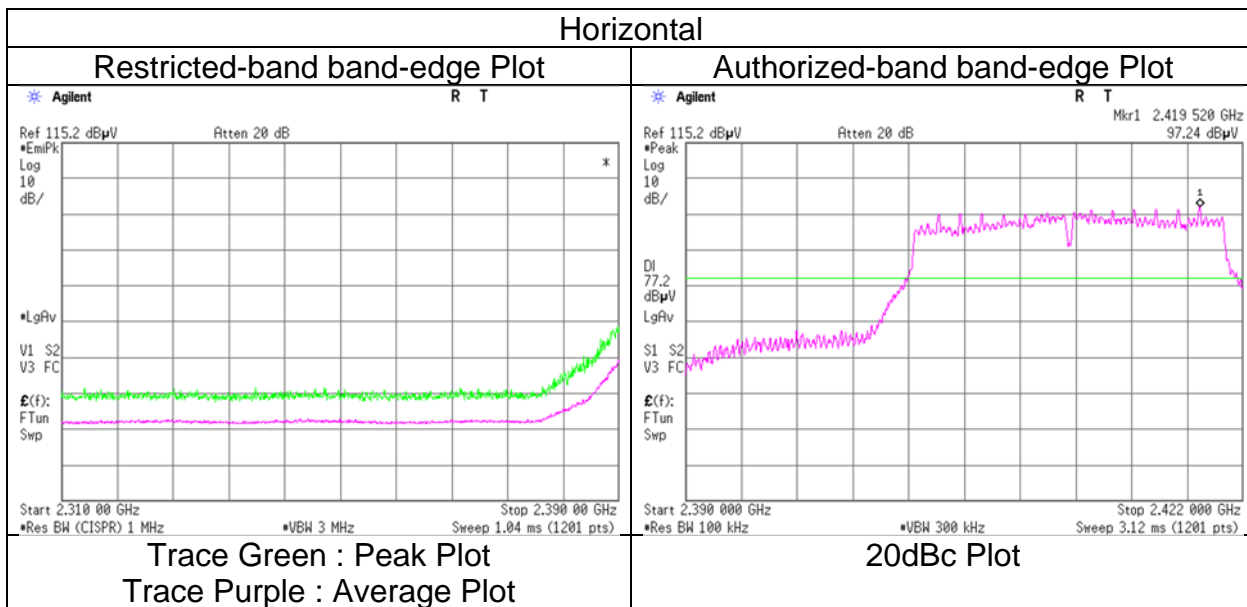

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.3	No.3	No.3	No.1
Date	August 31, 2023	September 1, 2023	September 3, 2023	October 4, 2023
Temperature / Humidity	23 deg. C / 59 % RH	22 deg. C / 58 % RH	21 deg. C / 42 % RH	23 deg. C / 50 % RH
Engineer	Yuta Moriya (1 GHz to 10 GHz except band-edge)	Yuta Moriya (10 GHz to 18 GHz)	Yuta Moriya (Above 18 GHz)	Junya Okuno (Band-edge)
Mode	Tx 11n-20 2422 MHz			

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2390.0	61.6	48.4	27.8	5.1	36.1	0.3	58.4	45.5	73.9	53.9	15.5	8.4	*1)
Hori.	4844.0	41.7	31.4	31.5	7.7	31.4	-	49.4	39.2	73.9	53.9	24.5	14.7	Floor noise
Hori.	7266.0	42.3	32.7	35.9	8.9	32.3	-	54.9	45.2	73.9	53.9	19.1	8.7	Floor noise
Hori.	9688.0	42.4	32.3	39.0	9.5	33.0	-	57.8	47.8	73.9	53.9	16.1	6.1	Floor noise
Vert.	2390.0	62.9	49.6	27.8	5.1	36.1	0.3	59.8	46.8	73.9	53.9	14.2	7.1	*1)
Vert.	4844.0	41.2	31.4	31.5	7.7	31.4	-	49.0	39.1	73.9	53.9	24.9	14.8	Floor noise
Vert.	7266.0	42.8	32.6	35.9	8.9	32.3	-	55.4	45.1	73.9	53.9	18.5	8.8	Floor noise
Vert.	9688.0	42.4	32.3	39.0	9.5	33.0	-	57.9	47.7	73.9	53.9	16.0	6.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity [Hori/Vert]	Frequency [MHz]	Reading (PK) [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2422.0	101.8	27.8	5.1	36.1	98.6	-	-	Carrier
Hori.	2400.0	58.1	27.8	5.1	36.1	54.9	78.6	23.7	
Vert.	2422.0	101.2	27.8	5.1	36.1	97.9	-	-	Carrier
Vert.	2400.0	58.9	27.8	5.1	36.1	55.8	77.9	22.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor:  
 1 GHz - 10 GHz      20log (4 m / 3.0 m) = 2.5 dB  
 10 GHz - 26.5 GHz    20log (1.0 m / 3.0 m) = -9.5 dB



## Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	August 31, 2023	September 1, 2023	September 3, 2023
Temperature / Humidity	23 deg. C / 59 % RH	22 deg. C / 58 % RH	21 deg. C / 42 % RH
Engineer	Yuta Moriya	Yuta Moriya	Yuta Moriya
	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(Above 18 GHz)
Mode	Tx 11n-20 2437 MHz		

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4874.0	42.9	31.0	31.5	7.7	31.4	-	50.6	38.8	73.9	53.9	23.3	15.1	Floor noise
Hori.	7311.0	43.0	32.5	36.0	9.0	32.3	-	55.6	45.1	73.9	53.9	18.3	8.8	Floor noise
Hori.	9748.0	42.6	32.2	39.1	9.5	33.0	-	58.2	47.7	73.9	53.9	15.7	6.2	Floor noise
Vert.	4874.0	42.6	31.1	31.5	7.7	31.4	-	50.4	38.8	73.9	53.9	23.5	15.1	Floor noise
Vert.	7311.0	43.3	32.5	36.0	9.0	32.3	-	55.8	45.1	73.9	53.9	18.1	8.8	Floor noise
Vert.	9748.0	42.4	32.2	39.1	9.5	33.0	-	58.0	47.8	73.9	53.9	15.9	6.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:    1 GHz - 10 GHz    20log (4 m / 3.0 m) = 2.5 dB  
                           10 GHz - 26.5 GHz    20log (1.0 m / 3.0 m) = -9.5 dB

### Radiated Spurious Emission

Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3 No.3 No.3  
Date August 31, 2023 September 1, 2023 September 3, 2023  
Temperature / Humidity 23 deg. C / 59 % RH 22 deg. C / 58 % RH 21 deg. C / 42 % RH  
Engineer Yuta Moriya Yuta Moriya Yuta Moriya  
(1 GHz to 10 GHz (10 GHz to 18 GHz) (Above 18 GHz)  
except band-edge)  
Mode Tx 11n-20 2452 MHz

Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3 No.1  
Date September 4, 2023 October 4, 2023  
Temperature / Humidity 22 deg. C / 61 % RH 23 deg. C / 50 % RH  
Engineer Yuta Moriya Junya Okuno  
(Below 1 GHz) (Band-edge)  
Mode Tx 11n-20 2452 MHz

Polarity	Frequency	Reading	Reading	Ant.	Loss	Gain	Duty	Result	Result	Limit	Limit	Margin	Margin	Remark
[Hori/Vert]	[MHz]	(QP / PK)	(AV)	Factor	[dB]	[dB]	Factor	(QP / PK)	(AV)	(QP / PK)	(AV)	(QP / PK)	(AV)	
		[dBuV]	[dBuV]	[dB/m]			[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	812.9	20.7	-	20.9	13.2	31.3	-	23.5	-	46.0	-	22.5	-	Floor noise
Hori.	837.1	20.7	-	21.3	13.4	31.2	-	24.1	-	46.0	-	21.9	-	Floor noise
Hori.	862.5	20.2	-	21.7	13.5	31.1	-	24.4	-	46.0	-	21.6	-	Floor noise
Hori.	887.4	20.1	-	22.1	13.6	30.9	-	24.9	-	46.0	-	21.1	-	Floor noise
Hori.	913.5	19.9	-	22.2	13.7	30.8	-	25.1	-	46.0	-	20.9	-	Floor noise
Hori.	937.6	20.0	-	22.0	13.9	30.6	-	25.2	-	46.0	-	20.8	-	Floor noise
Hori.	2483.5	62.5	52.2	27.7	5.2	36.1	0.3	59.2	49.3	73.9	53.9	14.7	4.6	*1)
Hori.	4904.0	40.7	28.4	31.6	7.7	31.4	-	48.5	36.2	73.9	53.9	25.4	17.7	Floor noise
Hori.	7356.0	42.4	30.2	36.1	9.0	32.4	-	55.1	42.9	73.9	53.9	18.8	11.0	Floor noise
Hori.	9808.0	42.6	32.1	39.2	9.5	33.0	-	58.3	47.7	73.9	53.9	15.7	6.2	Floor noise
Vert.	812.9	20.8	-	20.9	13.2	31.3	-	23.6	-	46.0	-	22.4	-	Floor noise
Vert.	837.1	20.7	-	21.3	13.4	31.2	-	24.1	-	46.0	-	21.9	-	Floor noise
Vert.	862.5	20.4	-	21.7	13.5	31.1	-	24.6	-	46.0	-	21.4	-	Floor noise
Vert.	887.4	20.0	-	22.1	13.6	30.9	-	24.8	-	46.0	-	21.2	-	Floor noise
Vert.	913.5	20.0	-	22.2	13.7	30.8	-	25.2	-	46.0	-	20.8	-	Floor noise
Vert.	937.6	19.9	-	22.0	13.9	30.6	-	25.1	-	46.0	-	20.9	-	Floor noise
Vert.	2483.5	62.8	51.7	27.7	5.2	36.1	0.3	59.6	48.7	73.9	53.9	14.3	5.2	*1)
Vert.	4904.0	40.1	28.5	31.6	7.7	31.4	-	47.9	36.3	73.9	53.9	26.0	17.6	Floor noise
Vert.	7356.0	42.6	30.2	36.1	9.0	32.4	-	55.2	42.8	73.9	53.9	18.7	11.1	Floor noise
Vert.	9808.0	42.4	32.1	39.2	9.5	33.0	-	58.1	47.7	73.9	53.9	15.8	6.2	Floor noise



Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor  
\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).  
\*QP detector was used up to 1GHz.  
\*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4 m / 3.0 m) = 2.5 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place  
 Semi Anechoic Chamber  
 Date  
 Temperature / Humidity  
 Engineer  
 Mode

Ise EMC Lab.  
 No.1  
 October 4, 2023  
 23 deg. C / 50 % RH  
 Junya Okuno  
 (Band-edge)  
 Tx 11n-20 2452 MHz

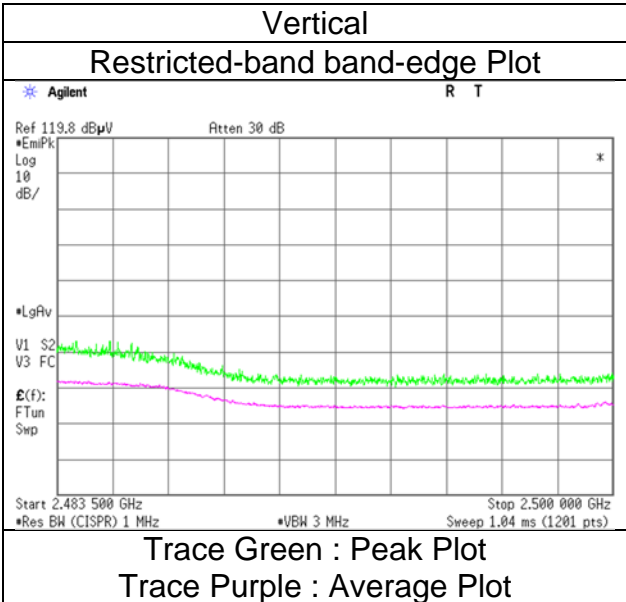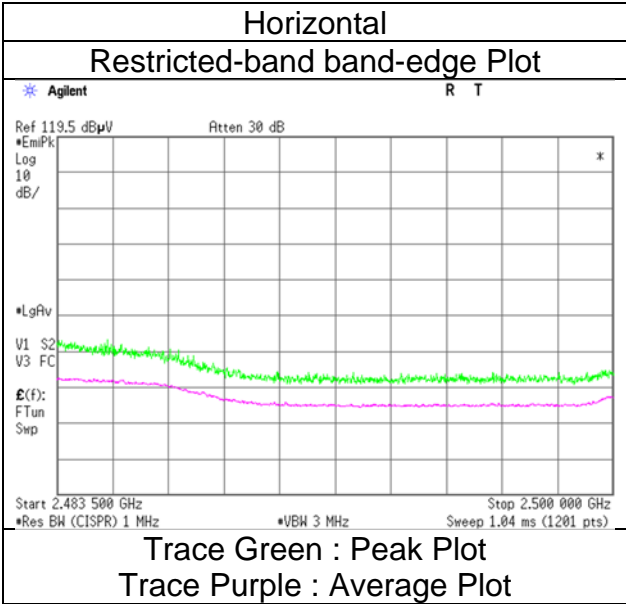



\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge was shown in tabular data.



**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place  
 Semi Anechoic Chamber  
 Date  
 Temperature / Humidity  
 Engineer  
 Mode

Ise EMC Lab.  
 No.1  
 October 4, 2023  
 23 deg. C / 50 % RH  
 Junya Okuno  
 (Band-edge)  
 Tx 11n-20 2462 MHz

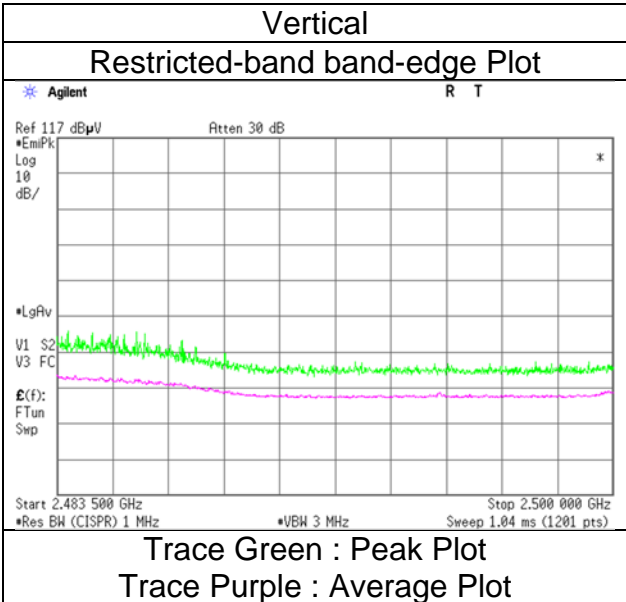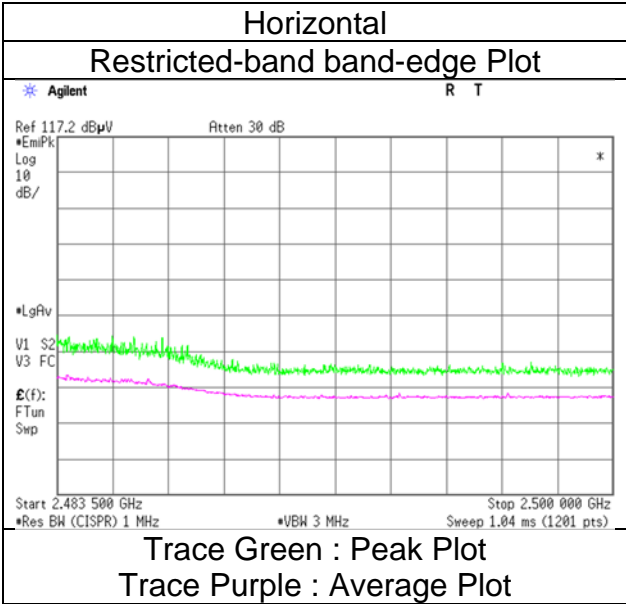



\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge was shown in tabular data.



**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	August 31, 2023	September 1, 2023	September 3, 2023
Temperature / Humidity	23 deg. C / 59 % RH	22 deg. C / 58 % RH	21 deg. C / 42 % RH
Engineer	Yuta Moriya	Yuta Moriya	Yuta Moriya
	(1 GHz to 10 GHz except band-edge)	(10 GHz to 18 GHz)	(Above 18 GHz)
Mode	Tx 11n-20 2452 MHz		


Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.3	No.1
Date	September 4, 2023	October 4, 2023
Temperature / Humidity	22 deg. C / 61 % RH	23 deg. C / 50 % RH
Engineer	Yuta Moriya	Junya Okuno
	(Below 1 GHz)	(Band-edge)
Mode	Tx 11n-20 2452 MHz	

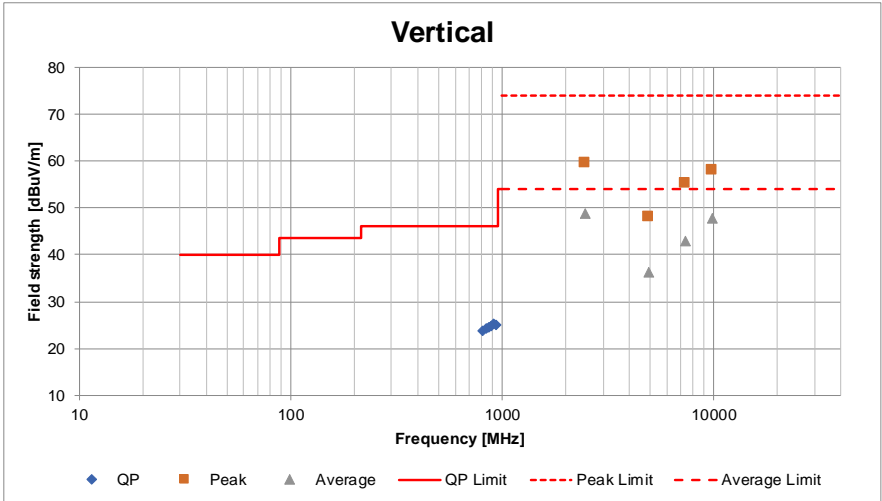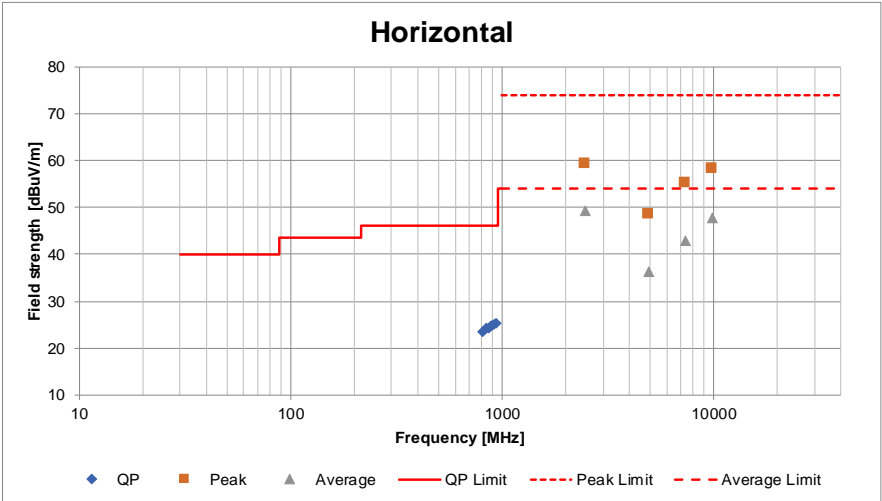

\*These plots data contain sufficient number to show the trend of characteristic features for EUT.

### Conducted Spurious Emission

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 29, 2023
Temperature / Humidity	23 deg. C / 60 % RH
Engineer	Yuichiro Yamazaki
Mode	Tx 11n-20 2452 MHz

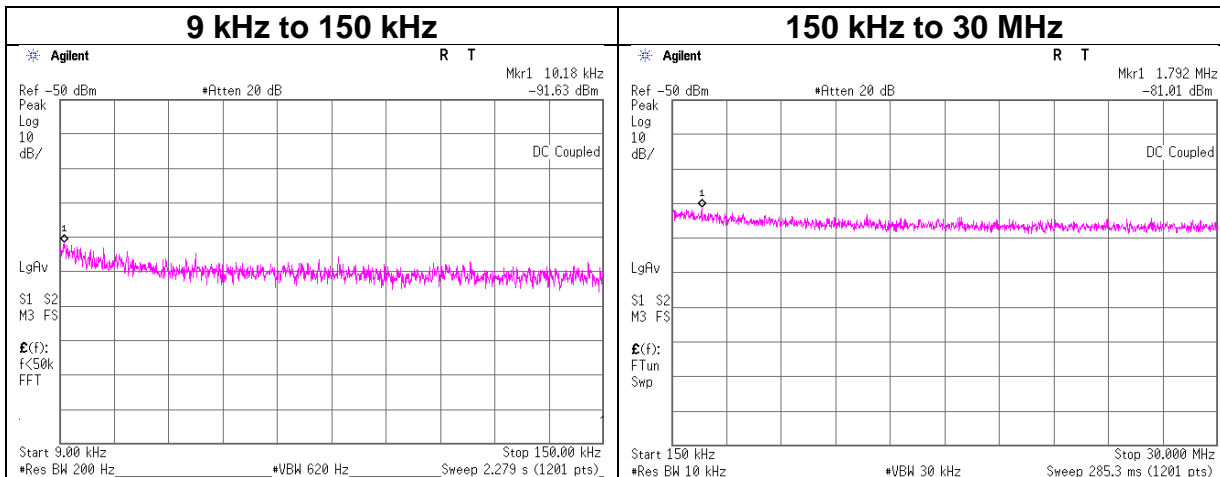

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.18	-91.6	0.01	9.8	2.0	1	-79.8	300	6.0	-18.5	47.4	65.9	
1792.00	-81.0	0.03	9.8	2.0	1	-69.1	30	6.0	12.1	29.5	17.4	

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

## Power Density

Test place	Ise EMC Lab. No.8 Measurement Room
Date	September 25, 2023
Temperature / Humidity	23 deg. C / 60 % RH
Engineer	Yuta Moriya
Mode	Tx

11b

Freq. [MHz]	Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2412	-28.22	1.88	19.99	<b>-6.35</b>	8.00	14.35
2437	-28.45	1.90	19.99	-6.56	8.00	14.56
2462	-28.62	1.91	19.99	-6.72	8.00	14.72

11g

Freq. [MHz]	Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2412	-34.67	1.88	19.99	-12.80	8.00	20.80
2422	-31.57	1.89	19.99	<b>-9.69</b>	8.00	17.69
2437	-31.67	1.90	19.99	-9.78	8.00	17.78
2452	-31.66	1.90	19.99	-9.77	8.00	17.77
2462	-34.17	1.91	19.99	-12.27	8.00	20.27

11n-20

Freq. [MHz]	Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2412	-33.60	1.88	19.99	-11.73	8.00	19.73
2422	-30.98	1.89	19.99	-9.10	8.00	17.10
2437	-31.57	1.90	19.99	-9.68	8.00	17.68
2452	-30.41	1.90	19.99	<b>-8.52</b>	8.00	16.52
2462	-33.10	1.91	19.99	-11.20	8.00	19.20

Sample Calculation:


Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.


**Power Density**

**11b**


**2412 MHz**

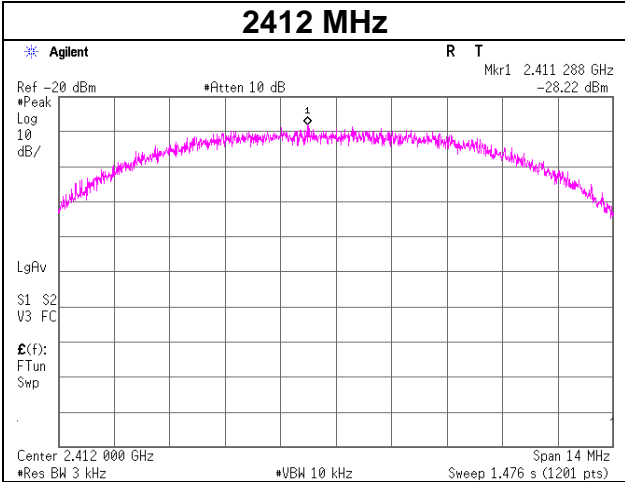

**2437 MHz**

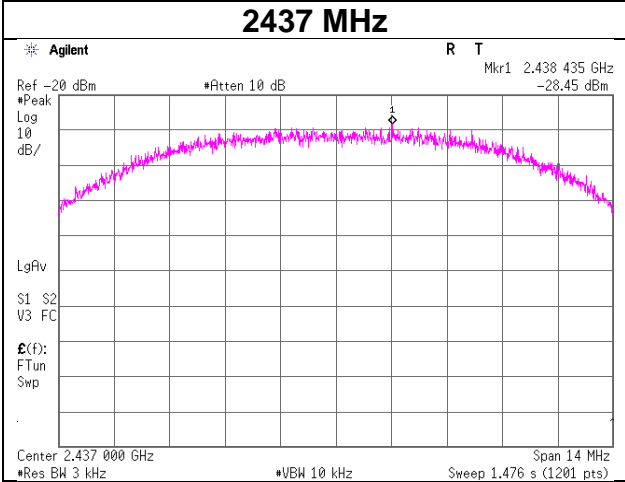


**2462 MHz**

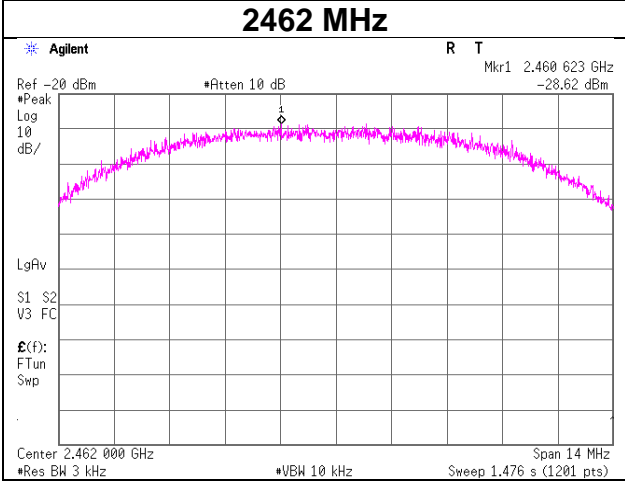


**Power Density**

11g

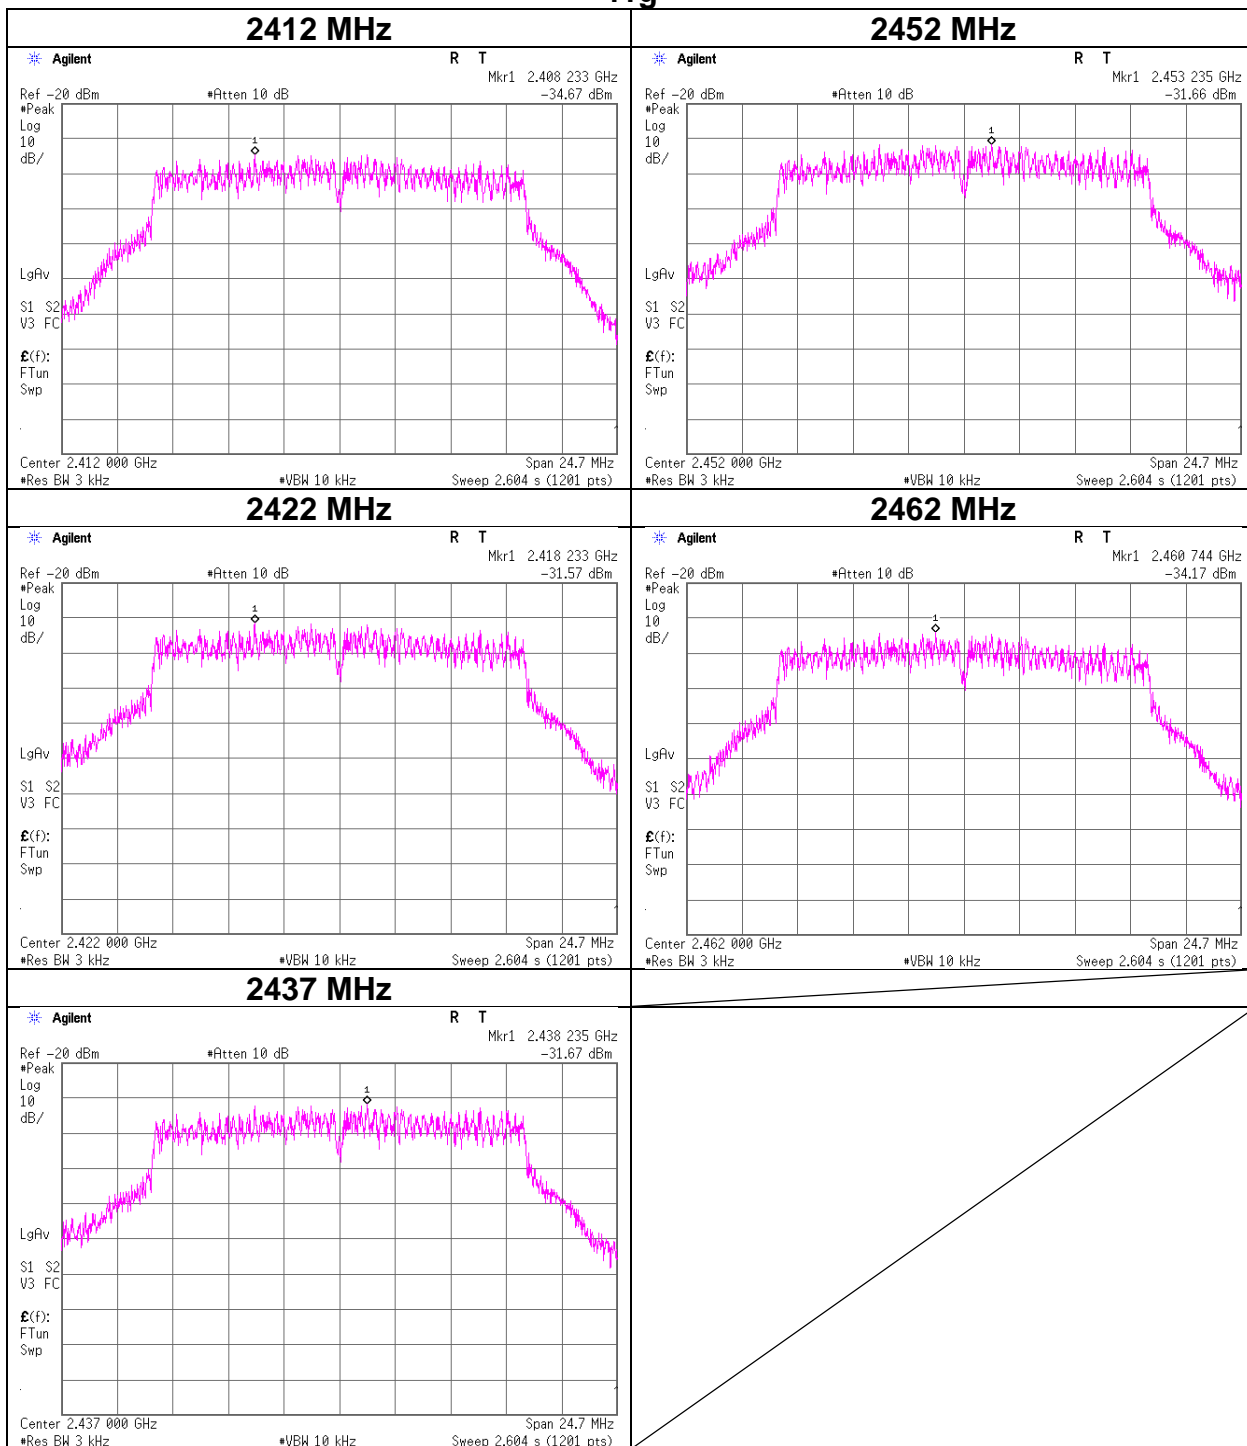

### Power Density

11n-20

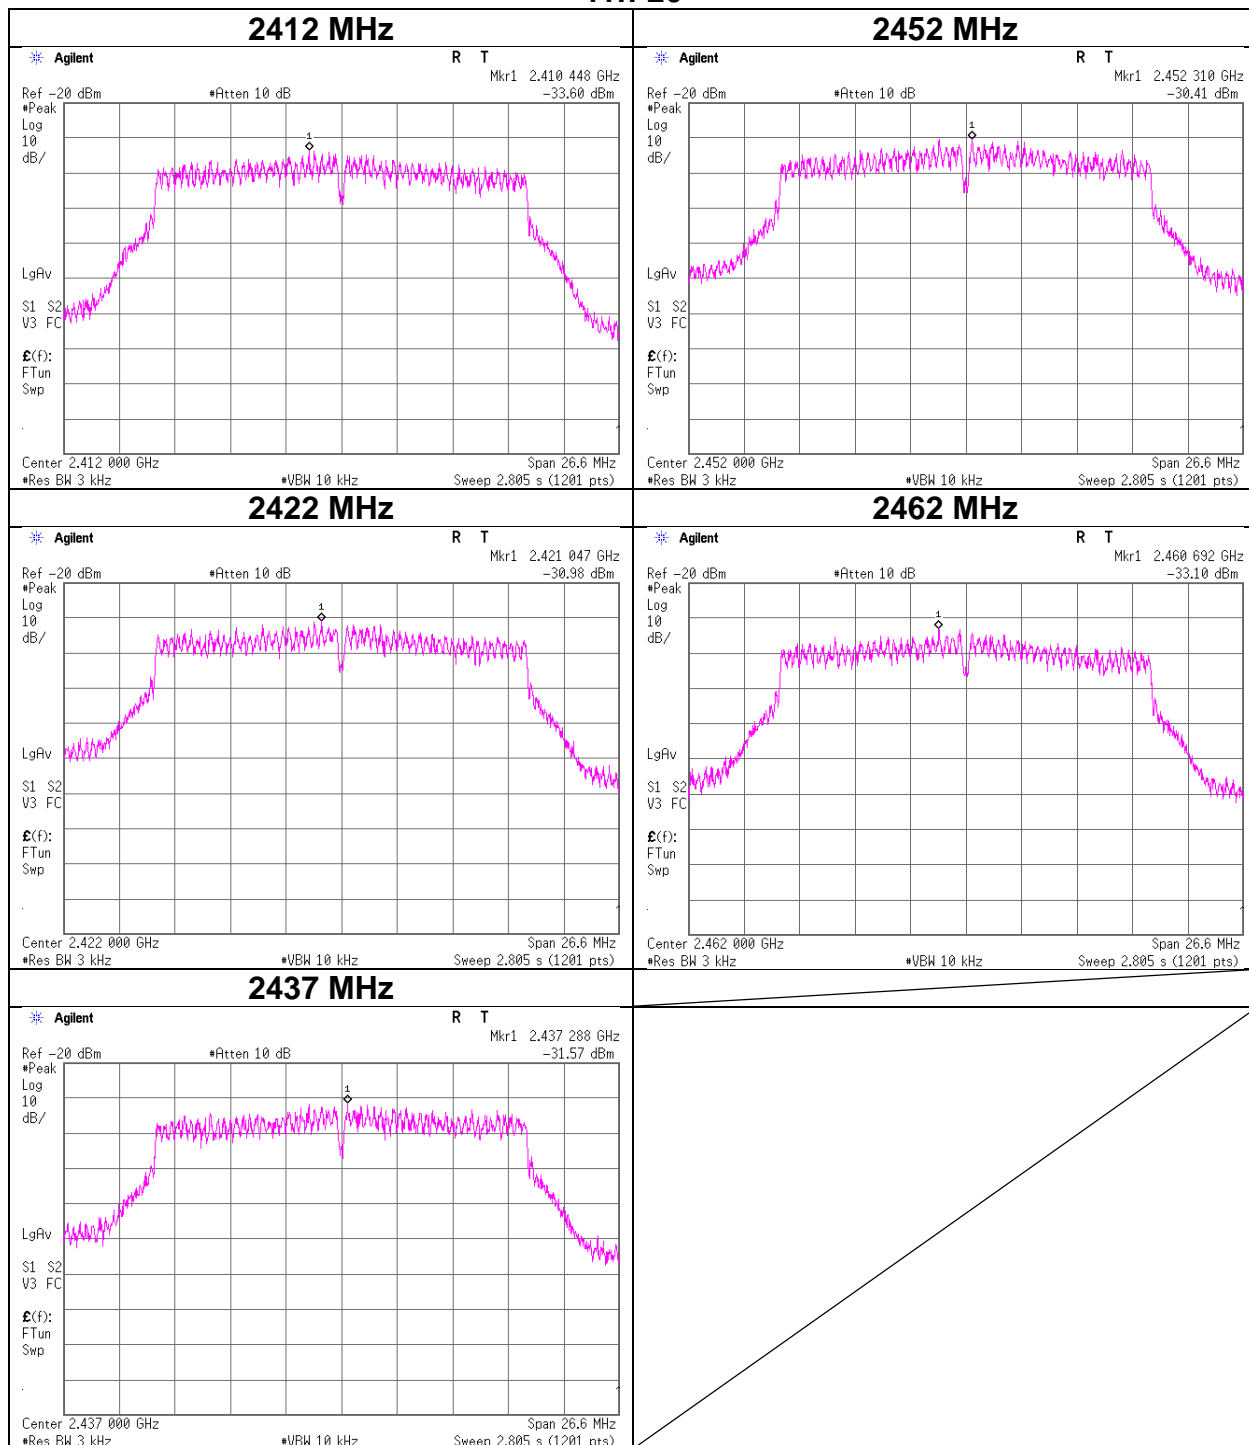

## APPENDIX 2: Test Instruments

### Test Equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MAT-10	141156	Attenuator(10dB)	Weinschel Corp	2	BL1173	11/10/2022	12
AT	MAT-21	141174	Attenuator(20dB) (above1GHz)	HIROSE ELECTRIC CO.,LTD.	AT-120	901247	01/20/2023	12
AT	MCC-144	141414	Microwave Cable	Junkosha	MWX221	1207S407	08/01/2023	12
AT	MCC-235	184488	Microwave Cable	Murata Manufacturing Company, Ltd.	MXHS83QE3000	-	09/27/2022	12 *1)
AT	MCC-244	197219	Microwave cable	Huber+Suhner	SF126E/11PC35/ 11PC35/2000MM	536999/126E	03/09/2023	12
AT	MCC-38	141395	Coaxial Cable	UL Japan	-	-	11/18/2022	12
AT	MMM-17	141557	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	70900530	01/18/2023	12
AT	MOS-28	141567	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0008	01/13/2023	12
AT	MPM-12	141809	Power Meter	Anritsu Corporation	ML2495A	825002	05/26/2023	12
AT	MPM-13	141810	Power Meter	Anritsu Corporation	ML2495A	824014	12/26/2022	12
AT	MPM-19	141815	Power Meter	Raditeq (Formerly DARE!! Instruments)	RPR3006W	14100048SNO083	10/21/2022	12
AT	MPSE-17	141830	Power sensor	Anritsu Corporation	MA2411B	738285	05/26/2023	12
AT	MPSE-18	141832	Power sensor	Anritsu Corporation	MA2411B	738174	12/26/2022	12
AT	MSA-13	141900	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46185823	06/16/2023	12
AT	MSA-14	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	01/16/2023	12
CE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
CE	MAEC-02	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	05/30/2022	24
CE	MAT-64	141290	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	12/22/2022	12
CE	MCC-13	141222	Coaxial Cable	Fujikura,HP,Mini-Circuits,Fujikura	3D-2W(12m)/ 5D-2W(5m)/ 5D-2W(0.8m)/ 5D-2W(1m)	-	02/01/2023	12
CE	MJM-27	142228	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
CE	MLS-25	141537	LISN(AMN)	Schwarzbeck Mess-Elektronik OHG	NSLK8127	8127-731	07/21/2023	12
CE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/01/2023	12
CE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/17/2022	12
CE	MTR-10	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	04/10/2023	12
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-01-SVSWR	141994	AC1_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	04/20/2023	24
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/23/2022	24
RE	MAEC-03-SVSWR	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/12/2023	24
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/23/2023	12
RE	MCC-217	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	08/01/2023	12
RE	MCC-265	234602	Microwave Cable	Huber+Suhner	SF126E/11PC35/ 11PC35/1000M, 5000M	537063/126E / 537074/126E	03/16/2023	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	09/10/2023	12

**Test Equipment (2/2)**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MHA-16	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	07/19/2023	12
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/14/2022	12
RE	MHA-21	141508	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	557	05/17/2023	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/04/2023	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	10/03/2022	12
RE	MJM-25	142226	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	MLA-22	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/10/2023	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	01/18/2023	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/17/2023	12
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/13/2023	12
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	A08Q26	01/13/2023	12
RE	MPA-01	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/14/2023	12
RE	MPA-11	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/08/2023	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/07/2023	12
RE	MSA-16	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	01/16/2023	12
RE	MTR-10	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	04/10/2023	12
RE	YBA-03	197990	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHBB 9124 + BBA 9106	01365	11/12/2022	12

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

The expiration\*1) This test equipment was used for the tests before the expiration date of the calibration.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

CE: Conducted Emission

RE: Radiated Emission