




A D T

### Chain (1)

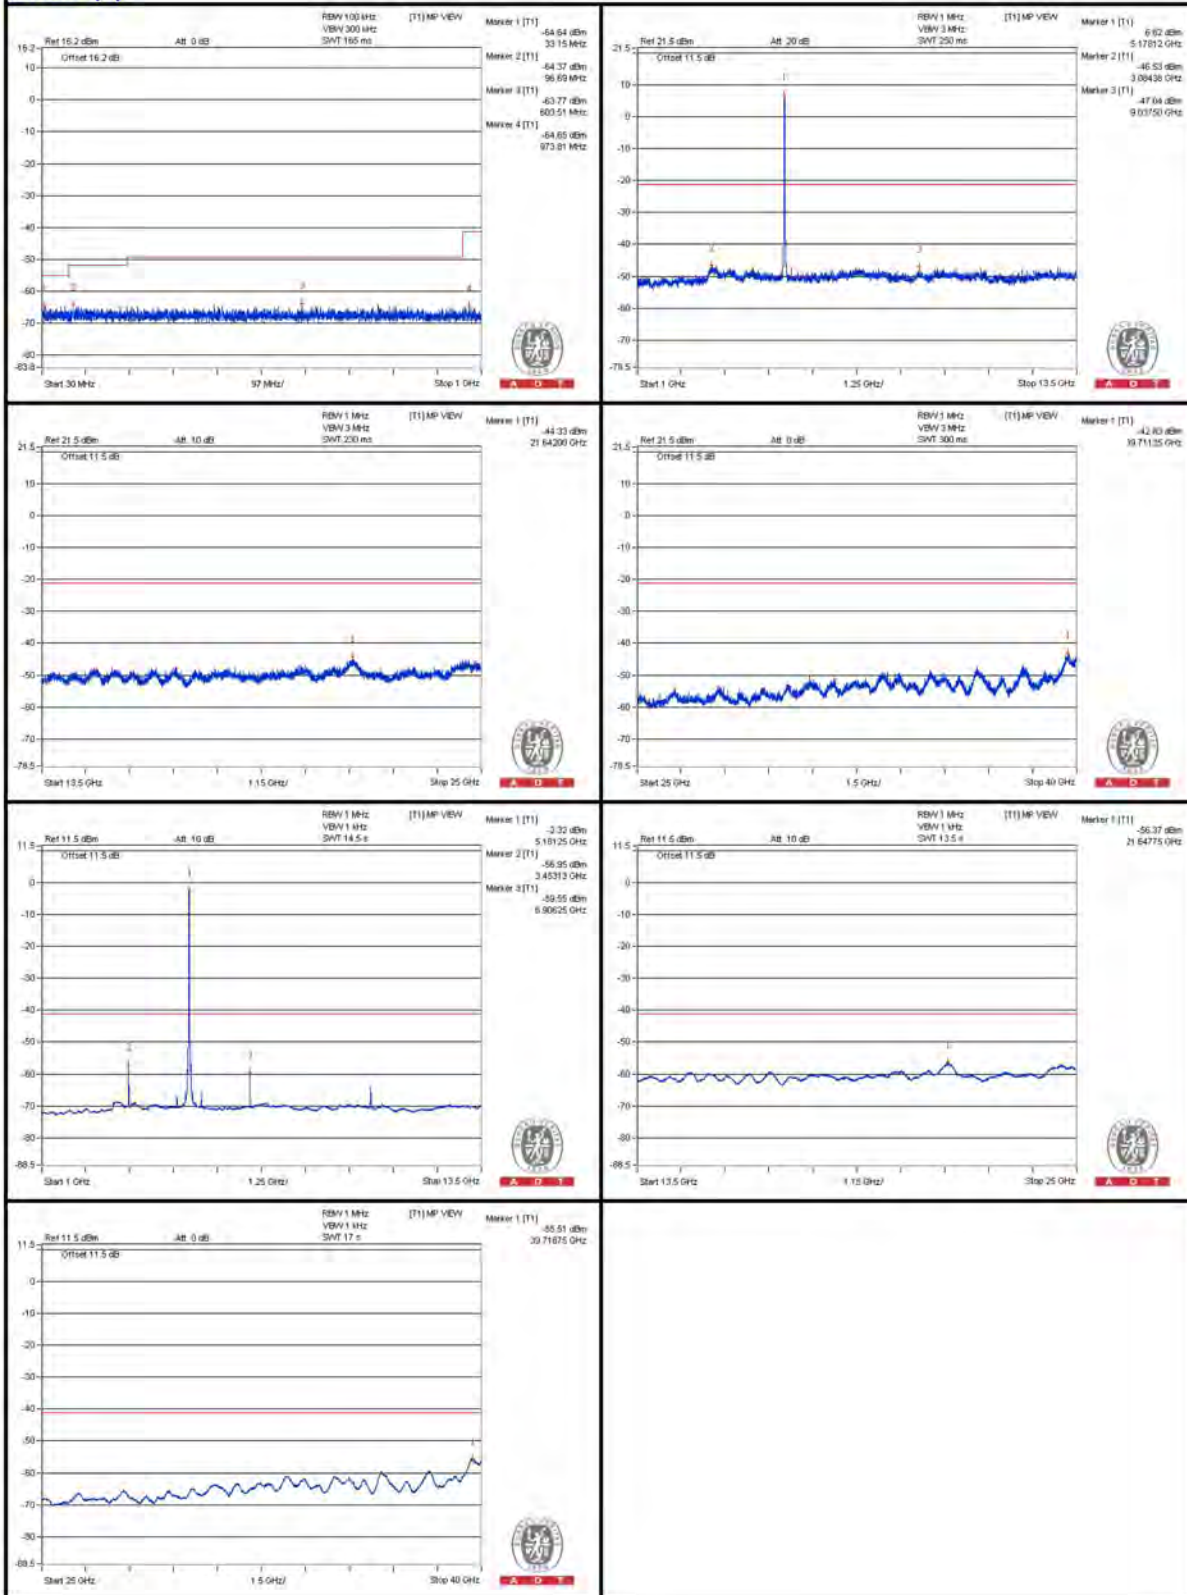

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5144.1 PK	69.06	74	-4.94	-32.47	-46.19	6.09	-26.2
2	5150 AV	49.46	54	-4.54	-54.96	-54.84	6.09	-45.8

Note :


$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

**Chain (0)**

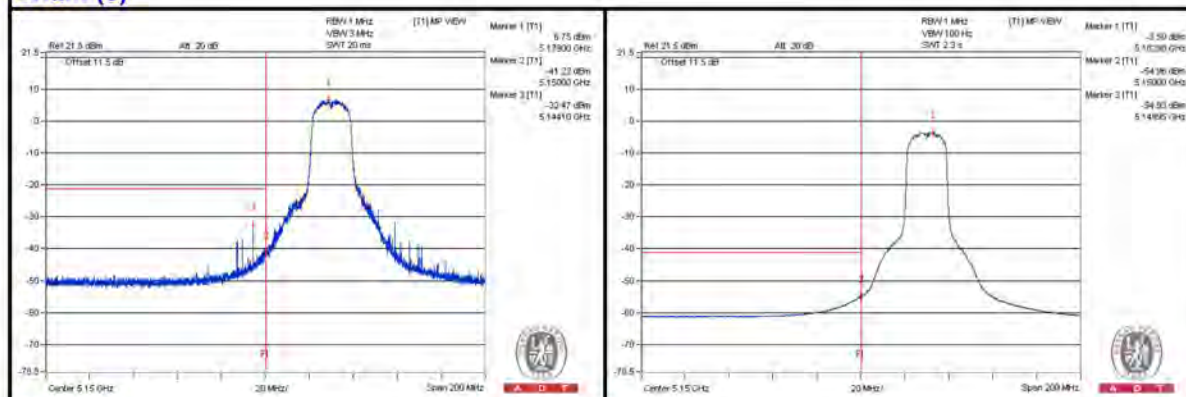

**Chain (1)**

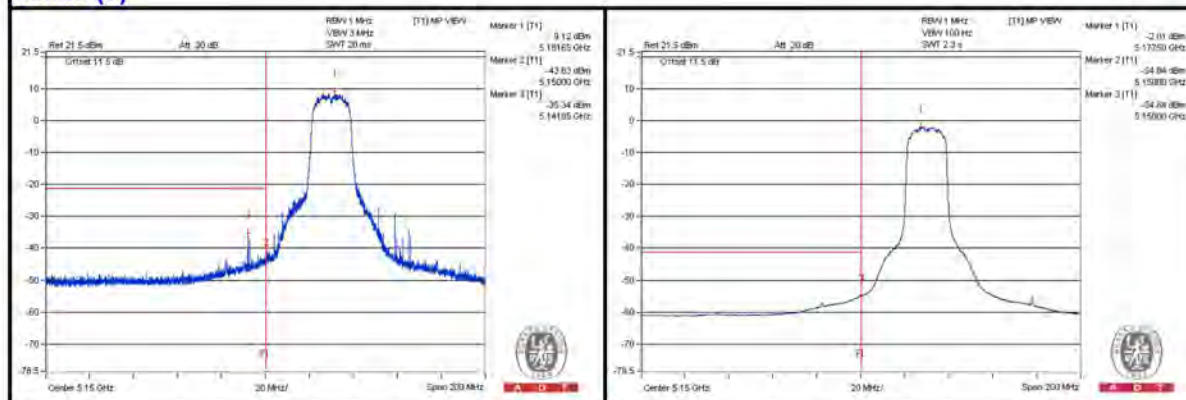

802.11ac (VHT20) - Channel 40

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3465.625 PK	55.28	74	-18.72	-49.2	-48.96	6.09	-39.98
2	3465.625 AV	45.22	54	-8.78	-70.08	-56.31	6.09	-50.04
3	6934.375 PK	56	74	-18	-47.61	-49.26	6.09	-39.26
4	6934.375 AV	48.07	54	-5.93	-53.37	-69.98	6.09	-47.19
5	10403.125 PK	56.21	74	-17.79	-49.43	-47.16	6.09	-39.05
6	10406.25 AV	40.13	54	-13.87	-66.36	-62.81	6.09	-55.13
7	15595.875 PK	54.33	74	-19.67	-50.18	-49.89	6.09	-40.93
8	15590.125 AV	42.79	54	-11.21	-61.61	-61.54	6.09	-52.47


Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

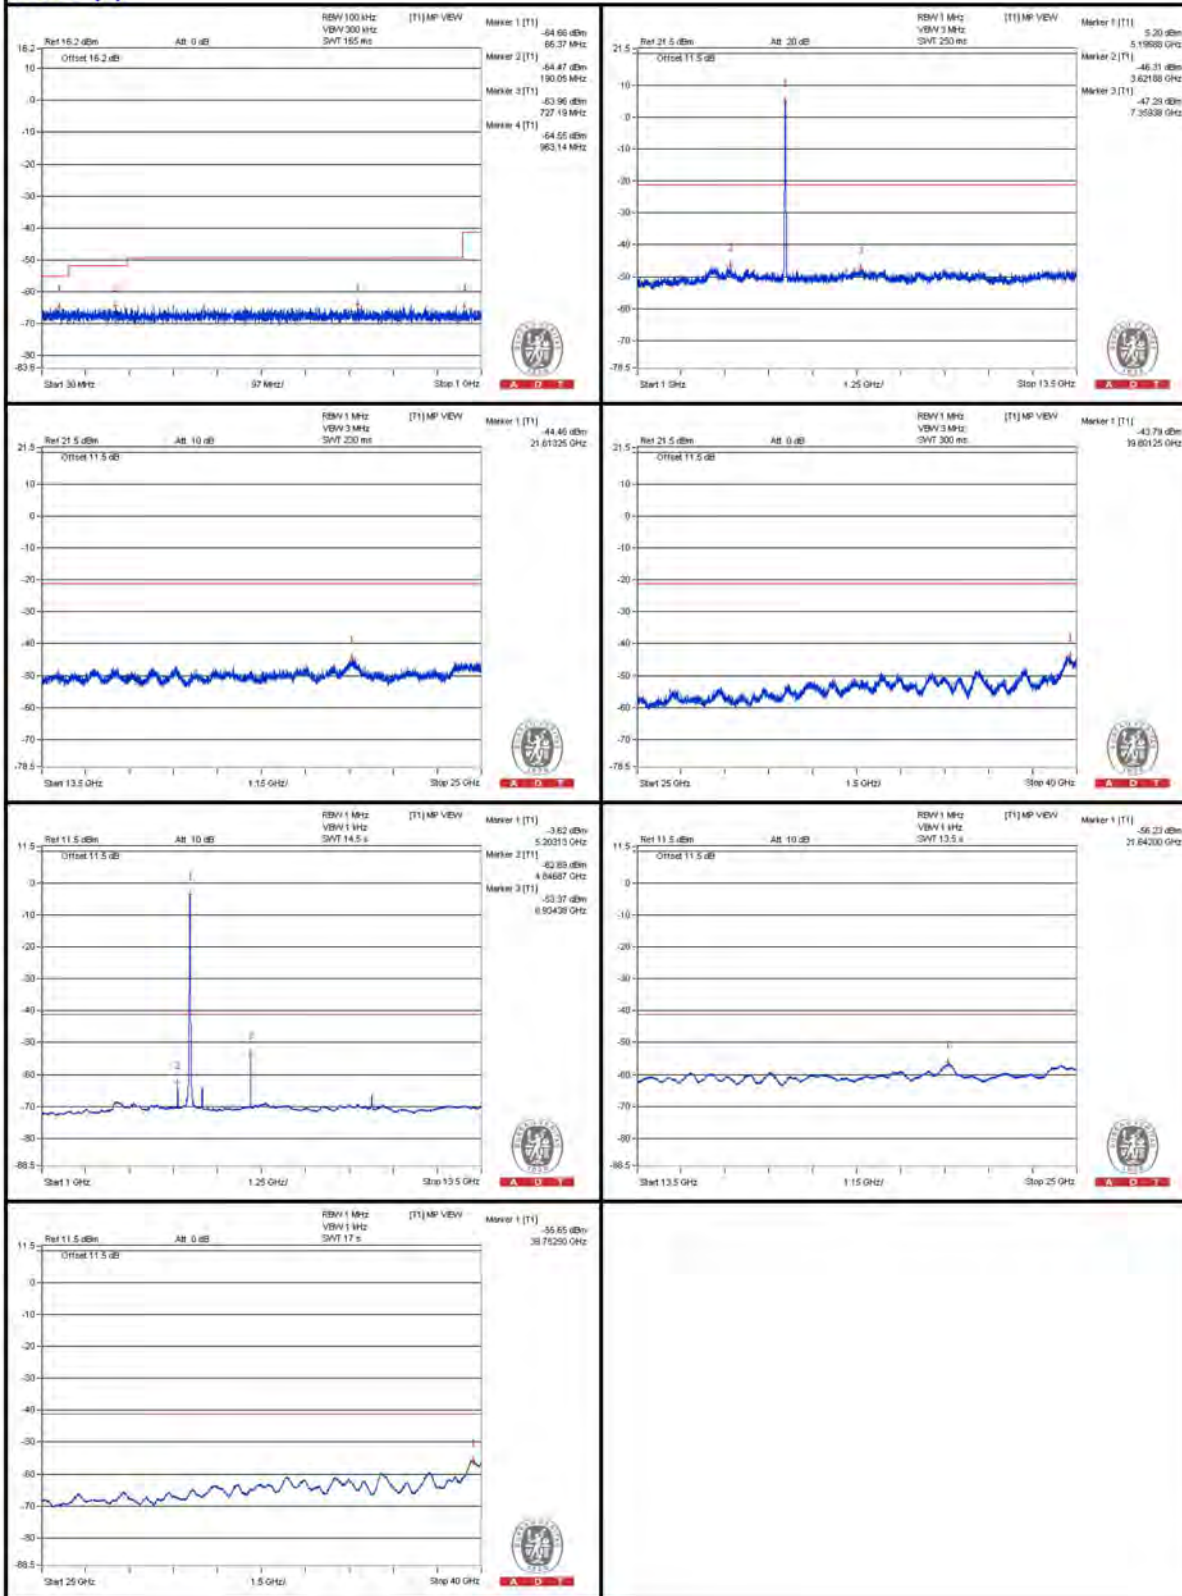

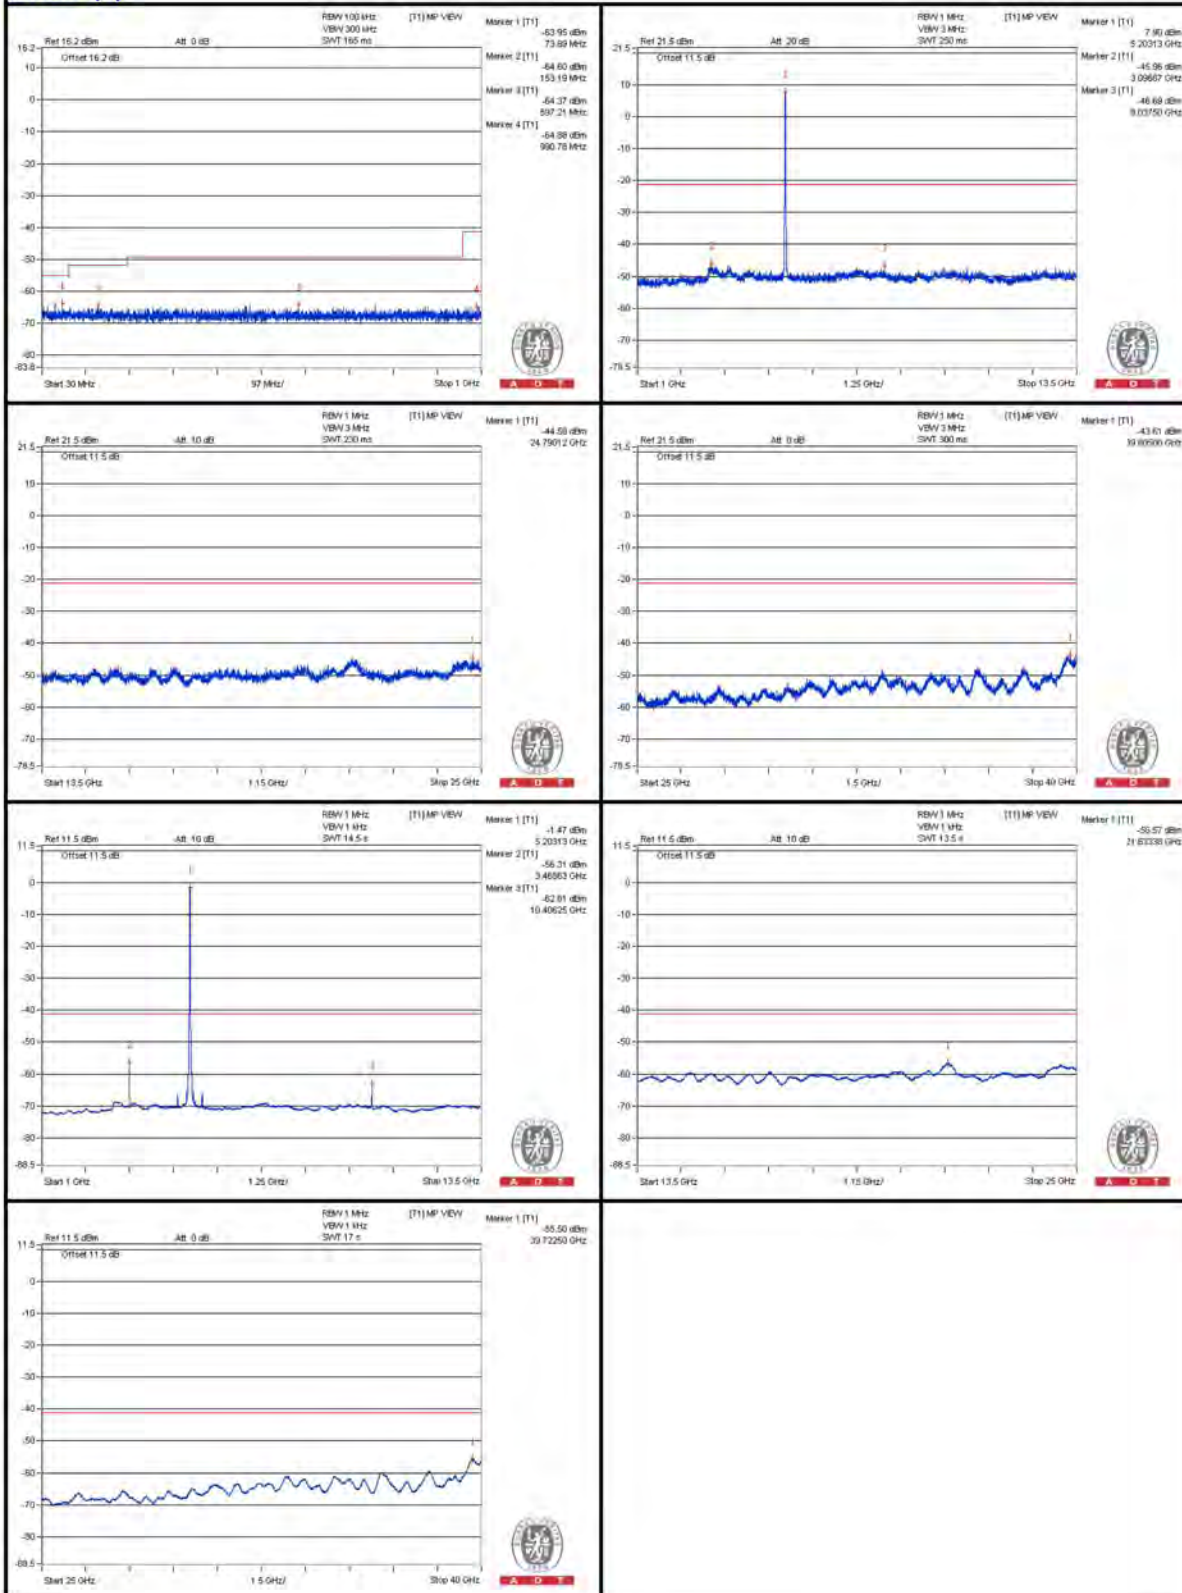**Chain (1)**


### 802.11ac (VHT20) - Channel 48

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3493.75 PK	55.67	74	-18.33	-49.94	-47.72	6.09	-39.59
2	3493.75 AV	47.15	54	-6.85	-69.7	-54.32	6.09	-48.11
3	6987.5 PK	56.44	74	-17.56	-47.13	-48.88	6.09	-38.82
4	6987.5 AV	47.5	54	-6.5	-53.96	-70.06	6.09	-47.76
5	10487.5 PK	55.76	74	-18.24	-49.09	-48.16	6.09	-39.5
6	10484.375 AV	41.27	54	-12.73	-65.24	-61.66	6.09	-53.99
7	15728.125 PK	54.01	74	-19.99	-50.25	-50.46	6.09	-41.25
8	15725.25 AV	42.85	54	-11.15	-61.36	-61.66	6.09	-52.41


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.




A D T

### Chain (0)

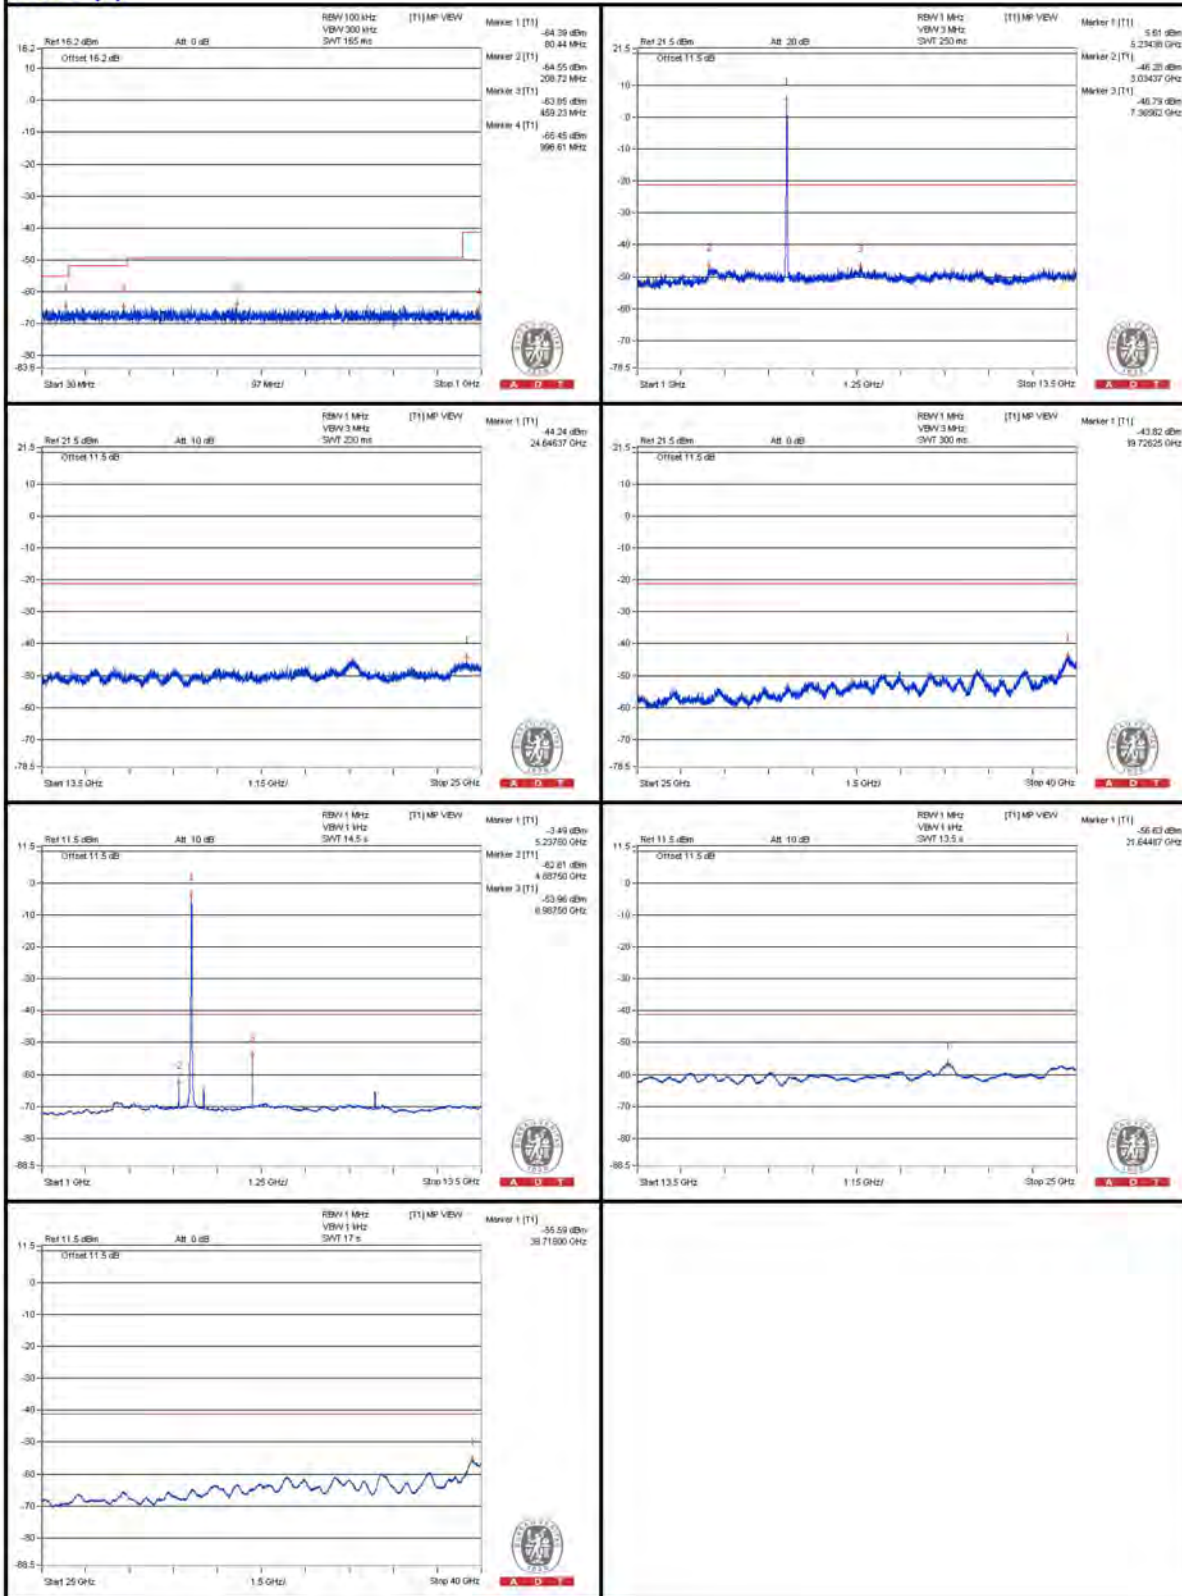

**Chain (1)**

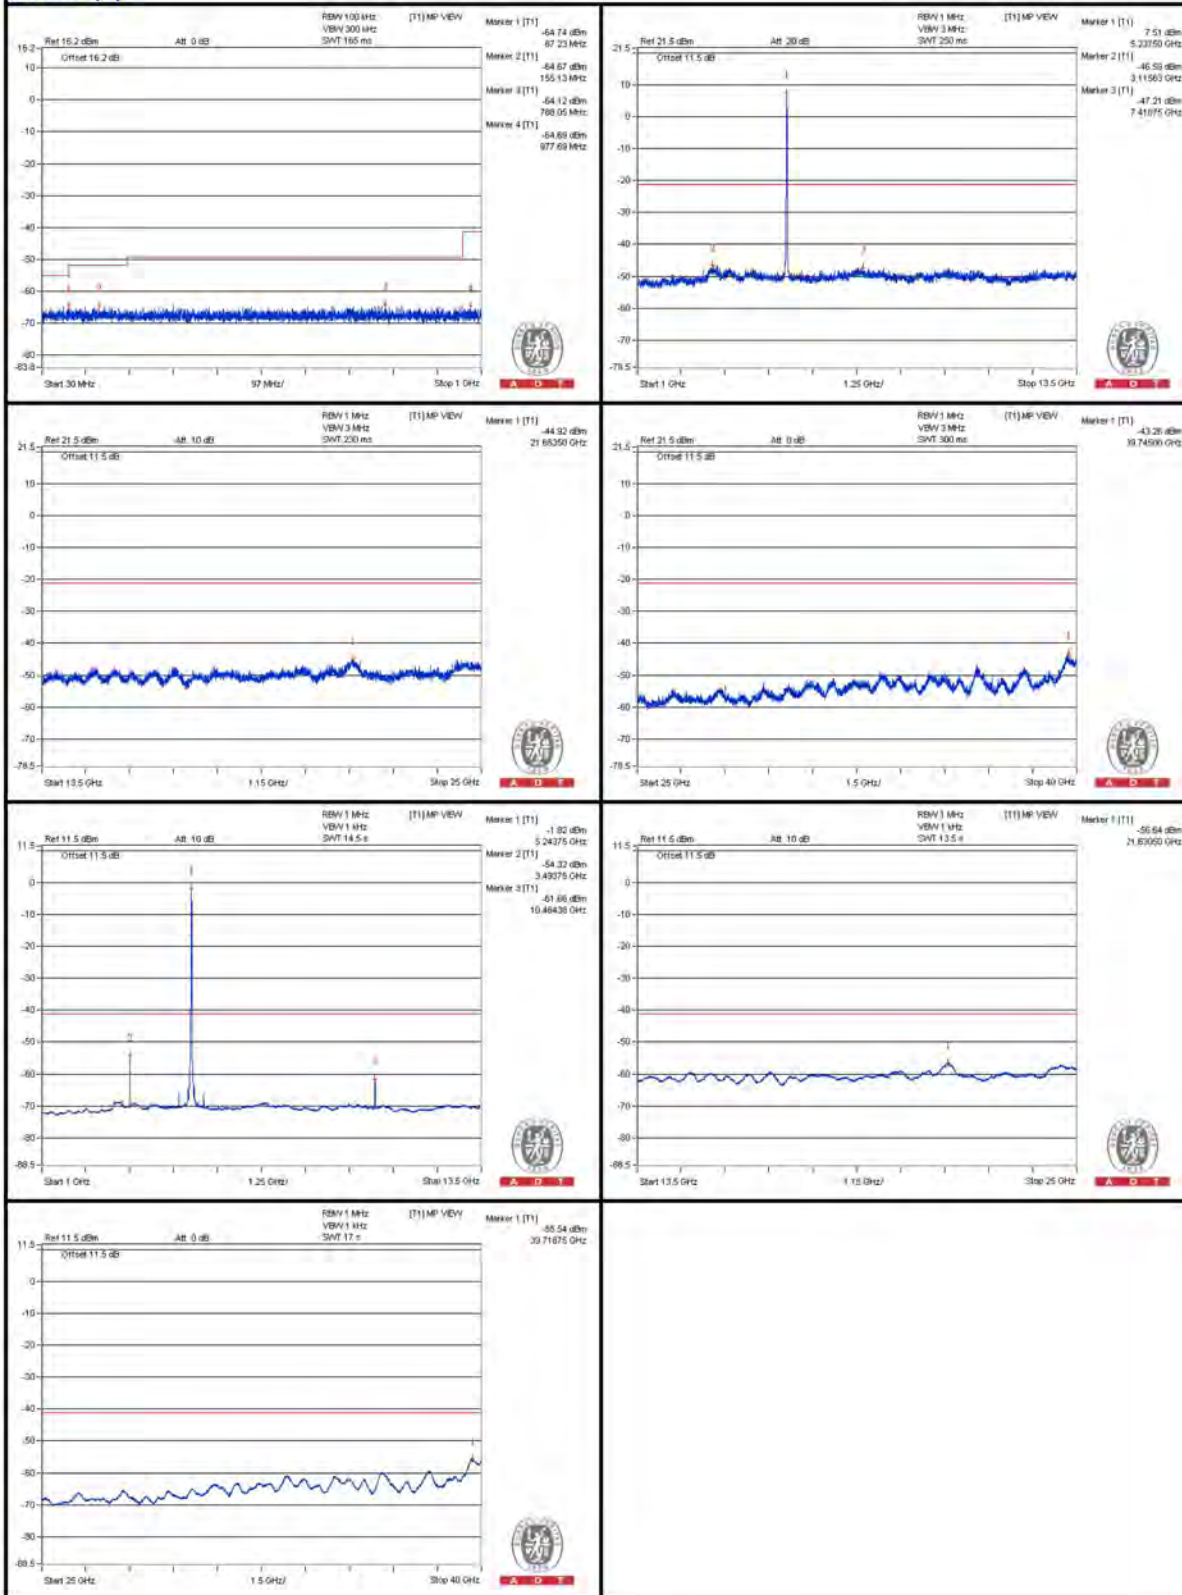



### 802.11ac (VHT20) - Channel 52

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25 PK	56.07	74	-17.93	-48.86	-47.78	6.09	-39.19
2	3506.25 AV	47.82	54	-6.18	-69.41	-53.64	6.09	-47.44
3	7009.375 PK	55.15	74	-18.85	-49.22	-49.21	6.09	-40.11
4	7012.5 AV	46.76	54	-7.24	-55.08	-64.35	6.09	-48.5
5	10525 PK	57.62	74	-16.38	-49.98	-44.9	6.09	-37.64
6	10525 AV	42.4	54	-11.6	-64.51	-60.36	6.09	-52.86
7	15785.625 PK	54.38	74	-19.62	-49.3	-50.79	6.09	-40.88
8	15785.625 AV	44.06	54	-9.94	-60.17	-60.44	6.09	-51.2


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
 d = measurement distance in 3 meters.




A D T

### Chain (0)

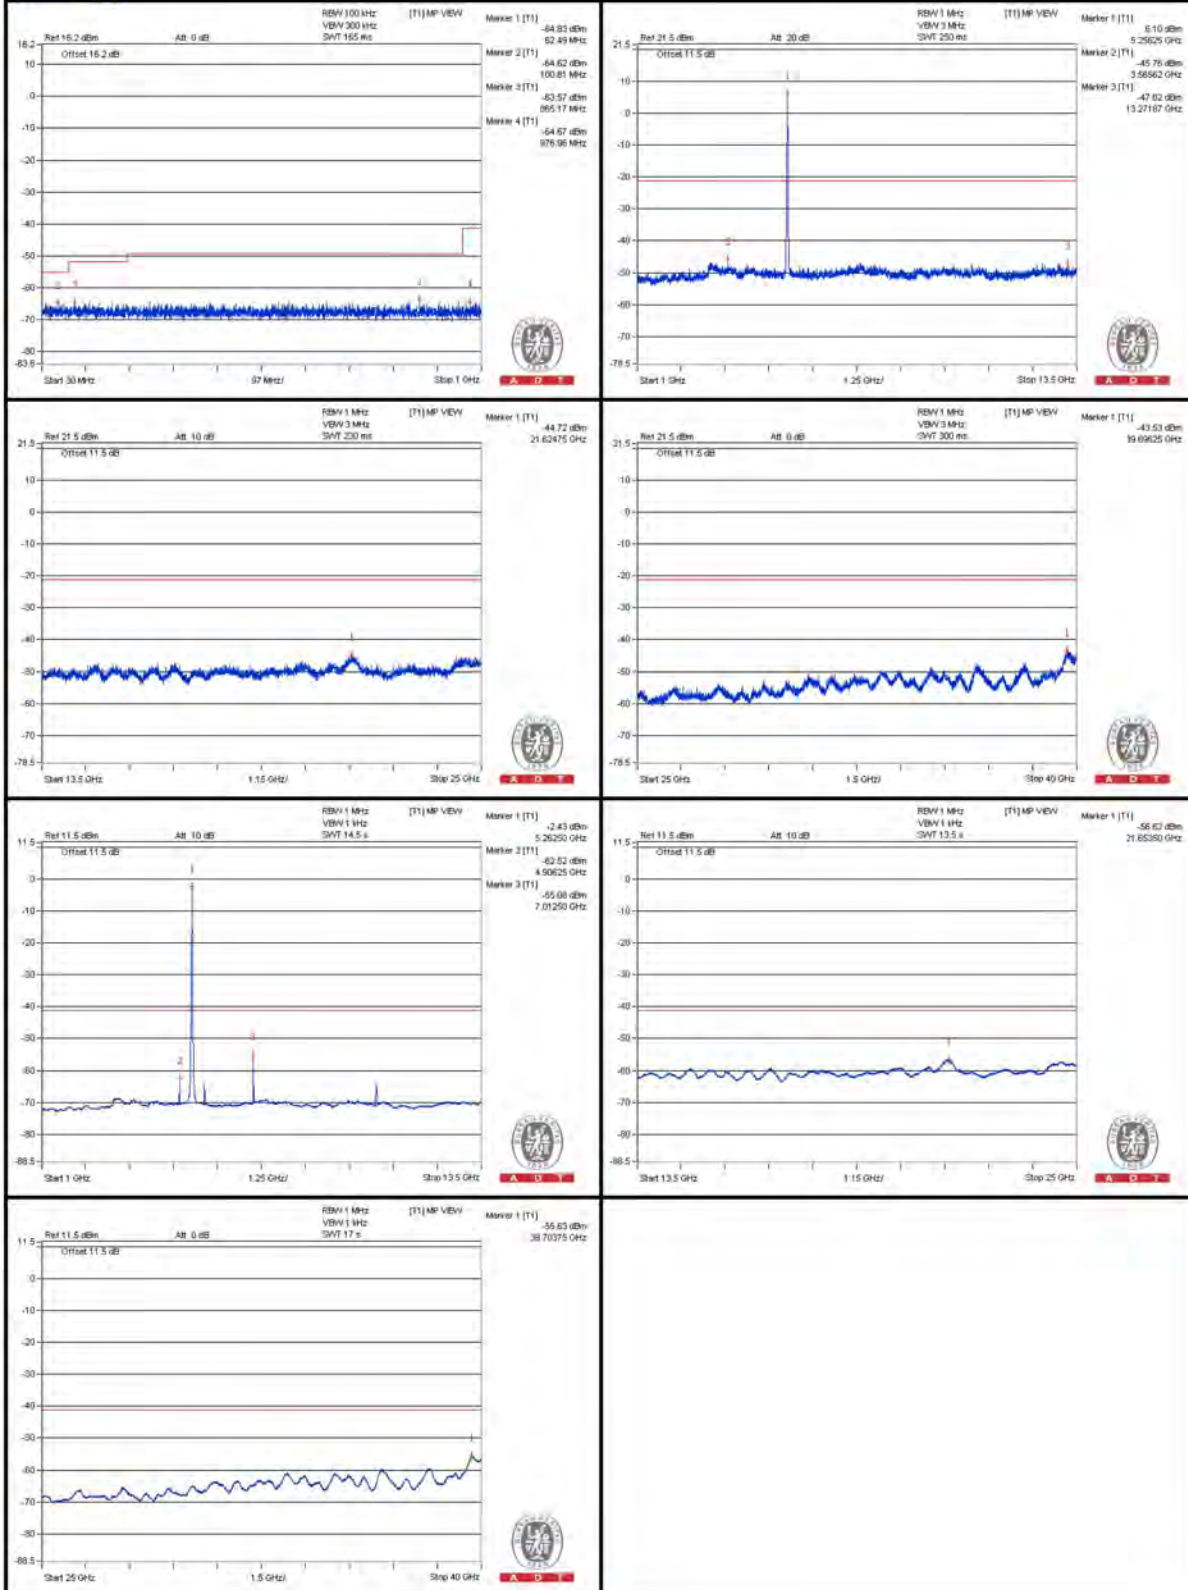

Chain (1)

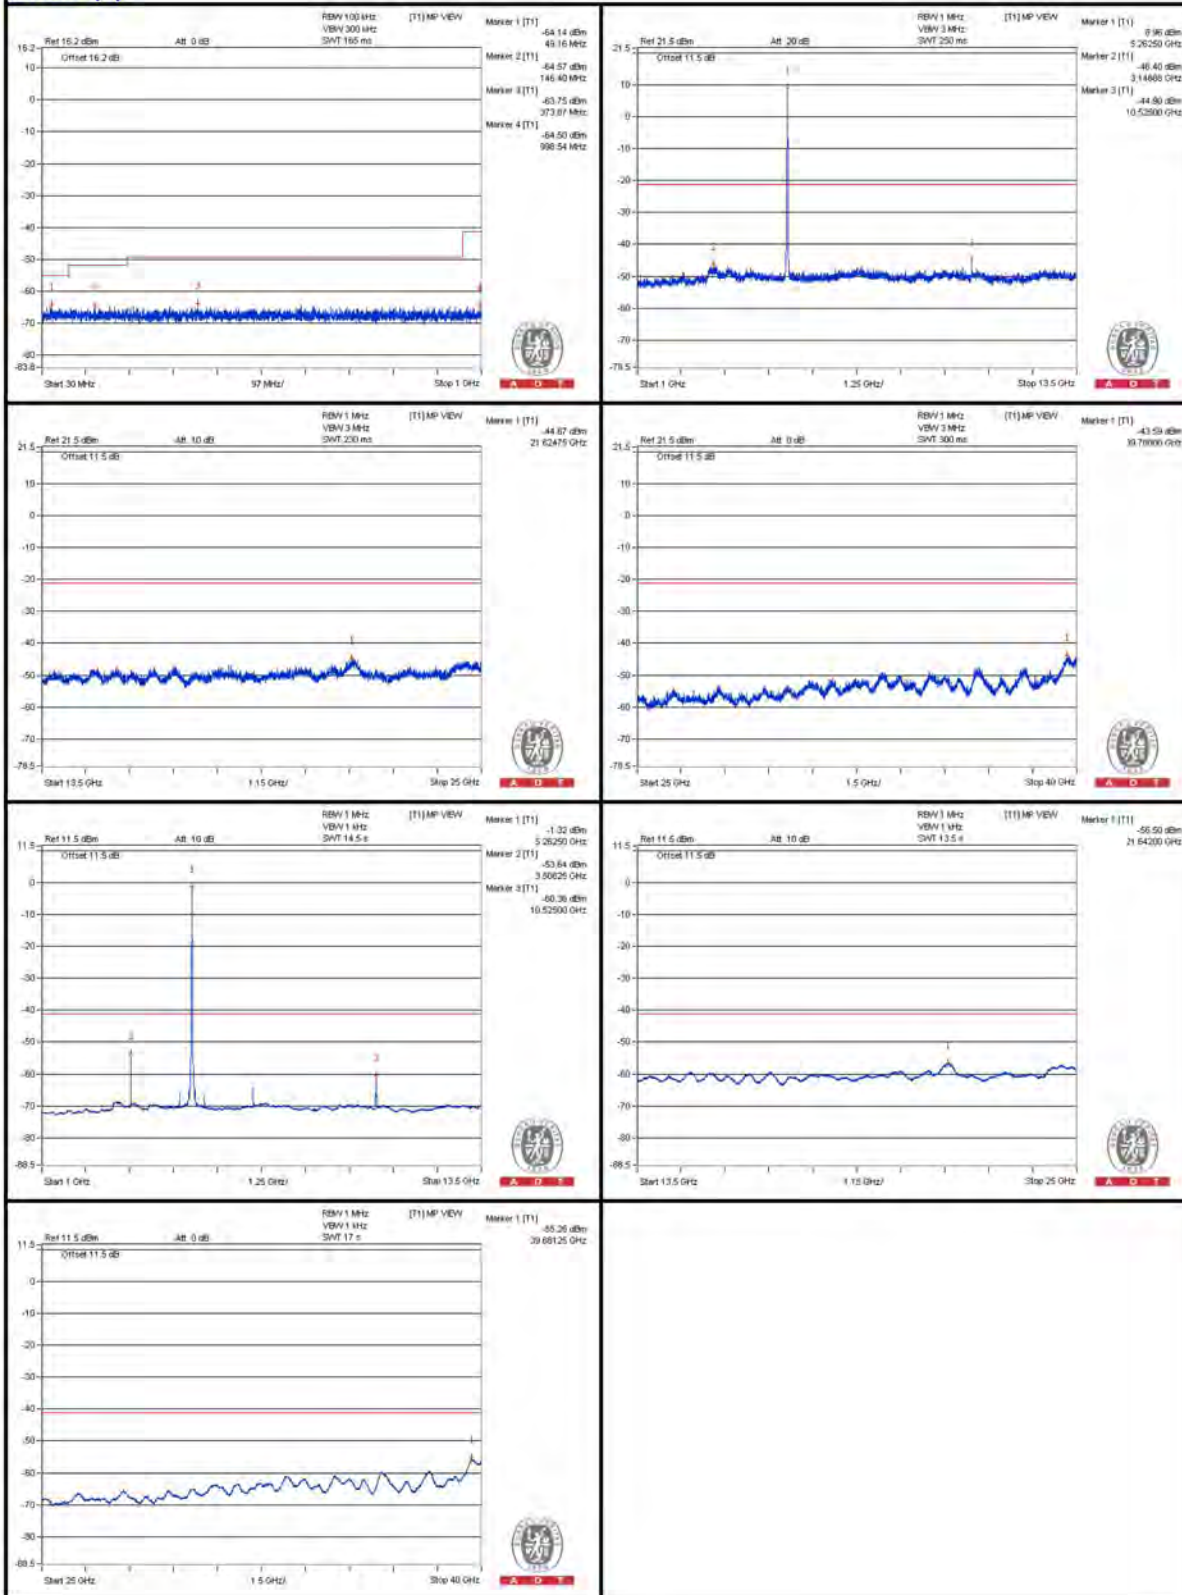

### 802.11ac (VHT20) - Channel 60

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3525 PK	55.58	74	-18.42	-50.19	-47.72	6.09	-39.68
2	3531.25 AV	40.77	54	-13.23	-69.56	-61.17	6.09	-54.49
3	7068.75 PK	56.54	74	-17.46	-47.85	-47.79	6.09	-38.72
4	7065.625 AV	46.77	54	-7.23	-55.92	-60.34	6.09	-48.49
5	10606.25 PK	56.95	74	-17.05	-47.91	-46.96	6.09	-38.31
6	10603.125 AV	42.31	54	-11.69	-65.09	-60.28	6.09	-52.95
7	15894.875 PK	54.28	74	-19.72	-50.37	-49.81	6.09	-40.98
8	15892 AV	43.72	54	-10.28	-60.47	-60.81	6.09	-51.54


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

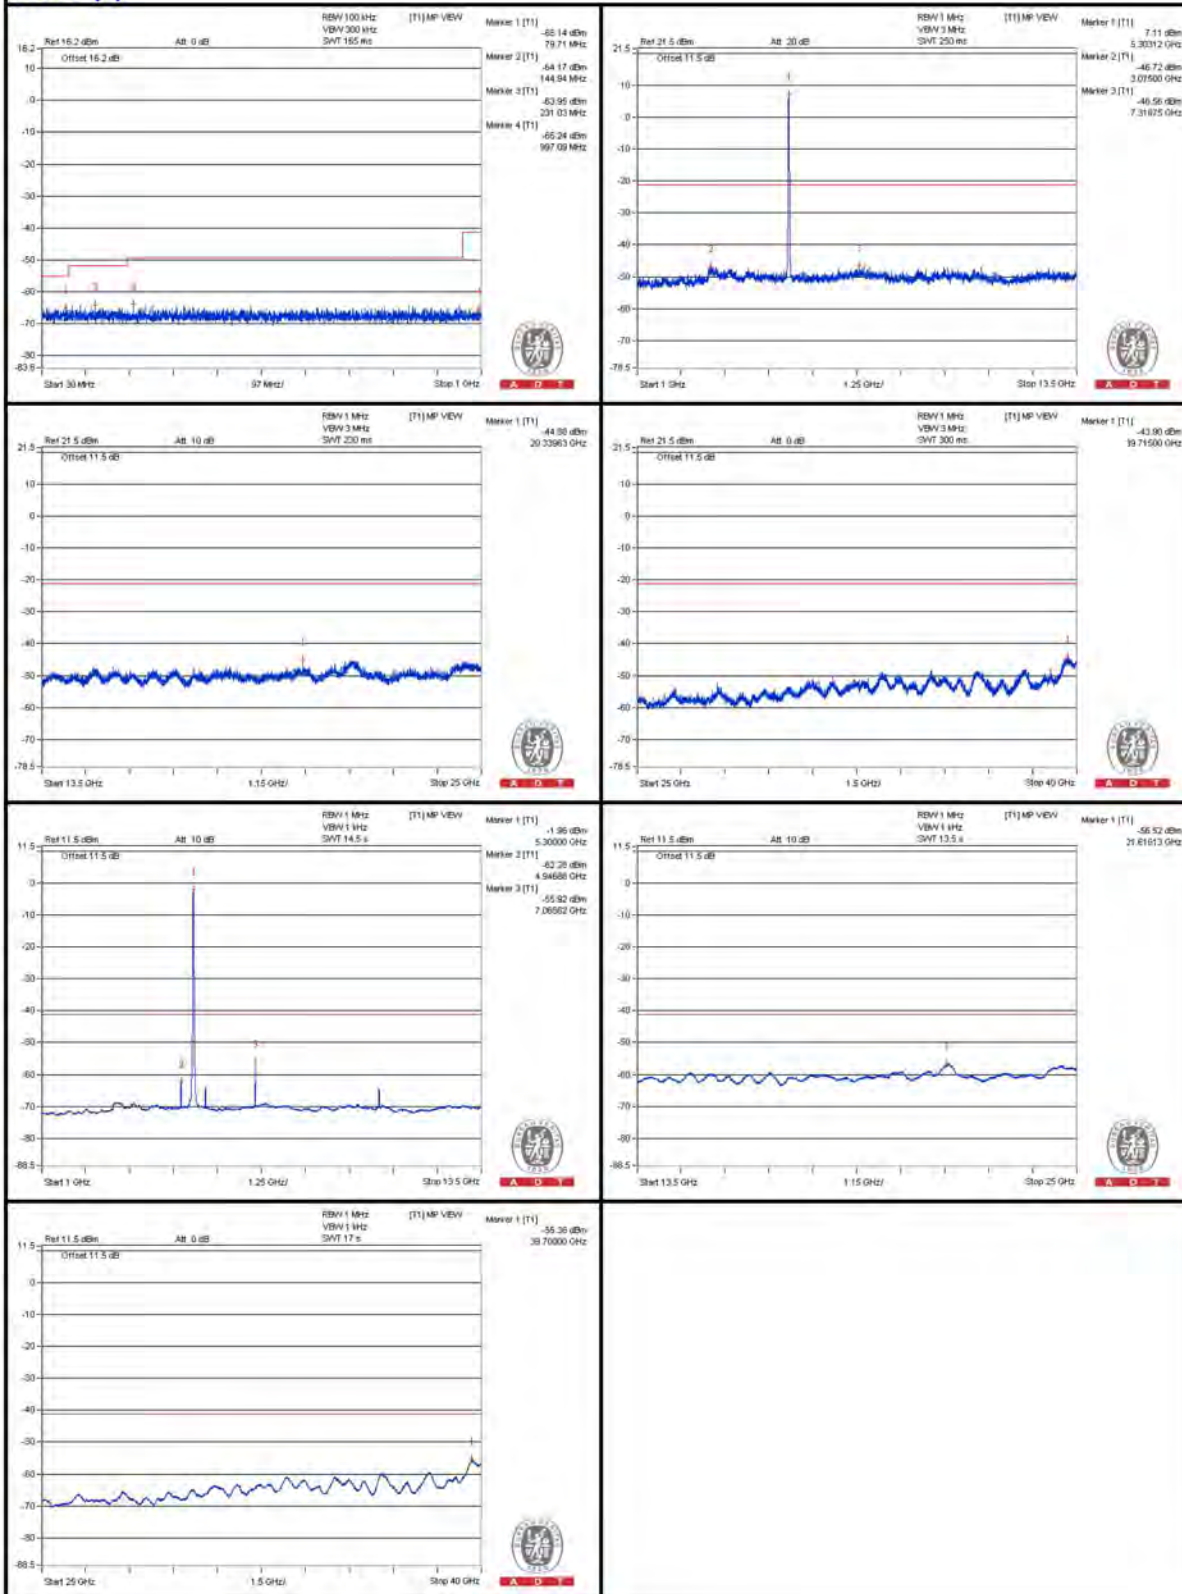

**Chain (1)**
