

802.11ac (VHT20) - Channel 64

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3546.875 PK	57.22	74	-16.78	-47.36	-46.93	6.09	-38.04
2	3546.875 AV	42.56	54	-11.44	-69.41	-59.18	6.09	-52.7
3	7093.75 PK	56.43	74	-17.57	-46.93	-49.23	6.09	-38.83
4	7093.75 AV	47.2	54	-6.8	-55.18	-60.92	6.09	-48.06
5	10643.75 PK	56.71	74	-17.29	-49.03	-46.61	6.09	-38.55
6	10643.75 AV	41.31	54	-12.69	-65.53	-61.48	6.09	-53.95
7	15963.875 PK	54.6	74	-19.4	-49.69	-49.83	6.09	-40.66
8	15955.25 AV	42.89	54	-11.11	-61.56	-61.38	6.09	-52.37


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T


### Chain (0)

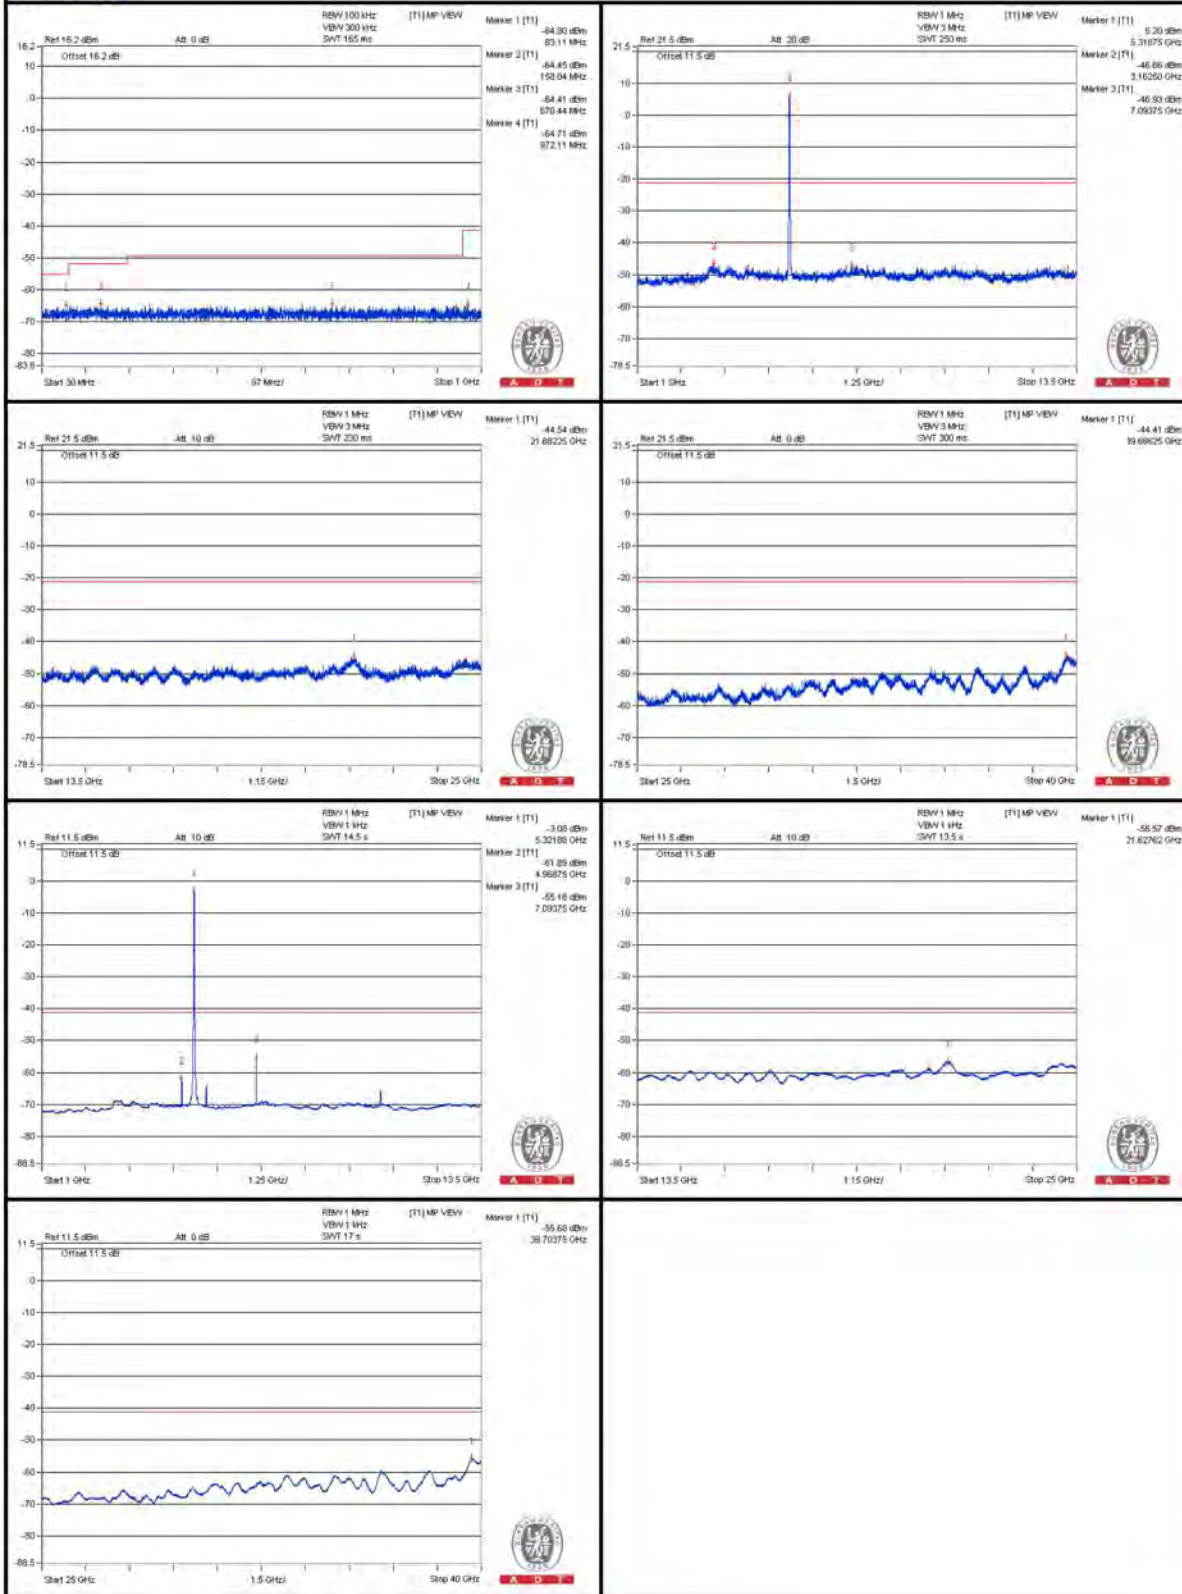



A D T

### Chain (1)

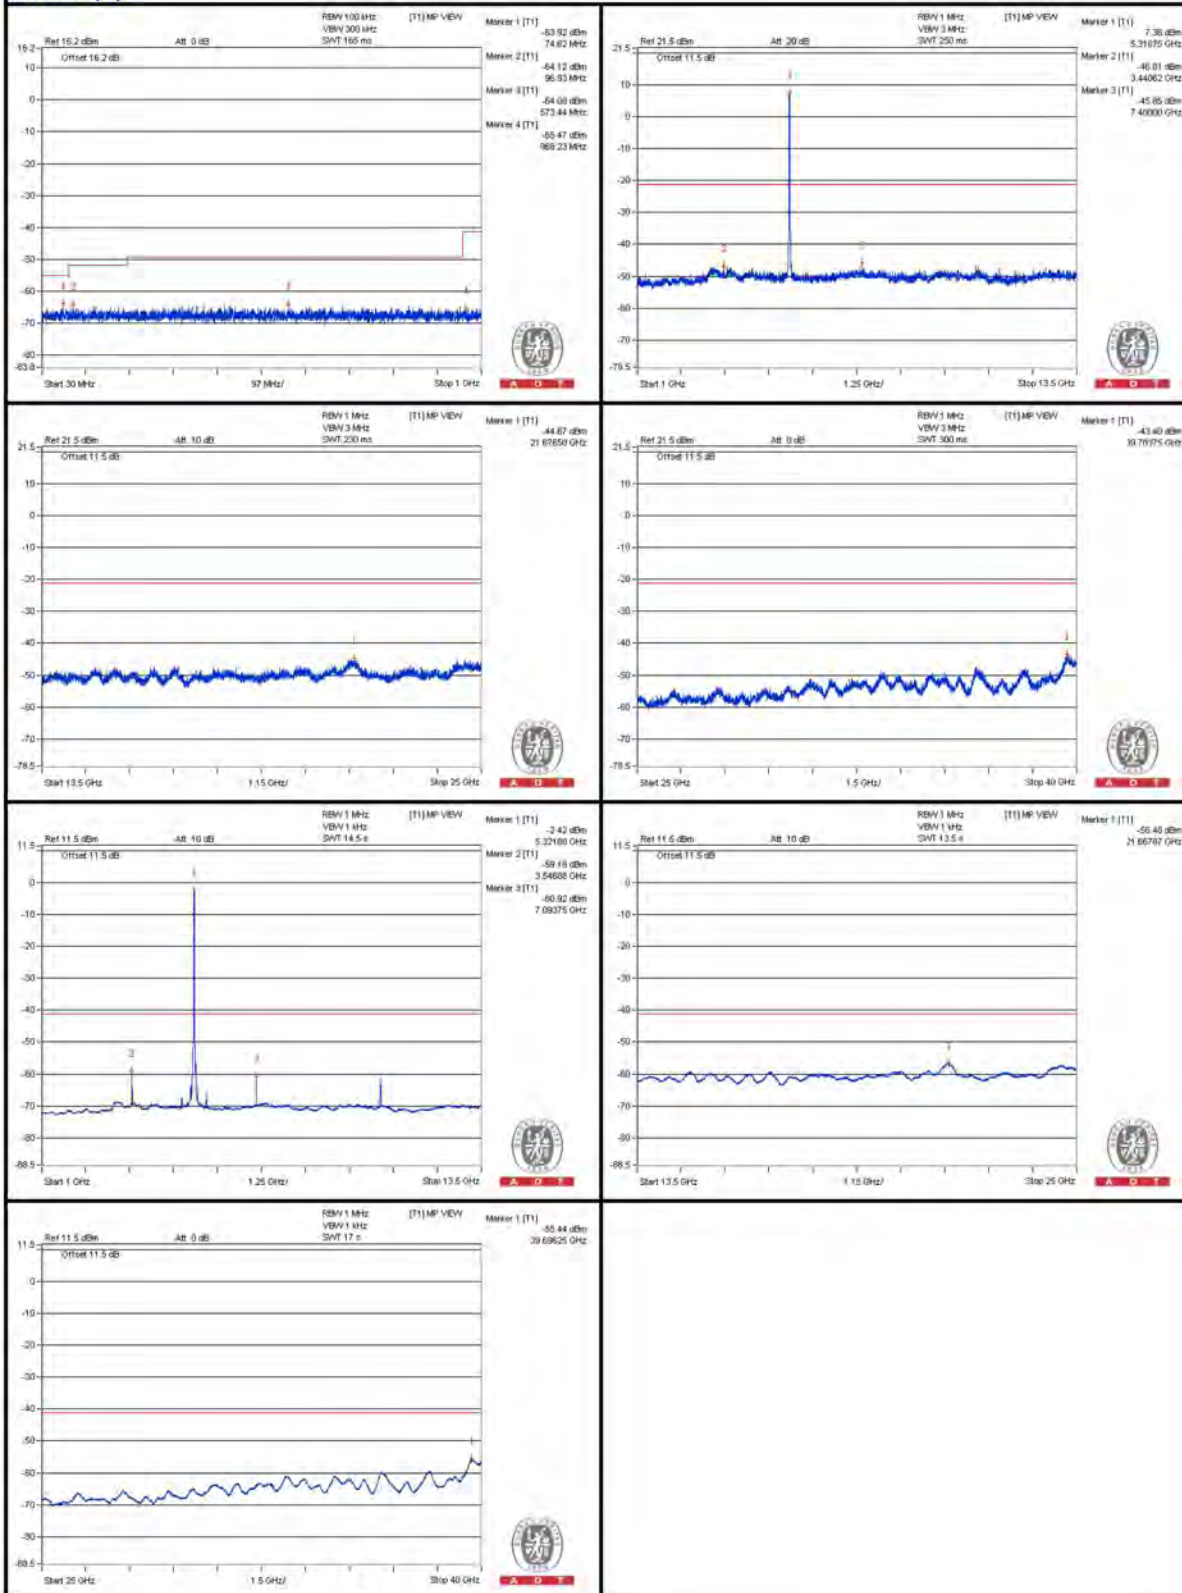

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.4 PK	72.23	74	-1.77	-37.92	-29.73	6.09	-23.03
2	5350 AV	52.16	54	-1.84	-50.31	-55.64	6.09	-43.1

Note :


$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

**Chain (0)**

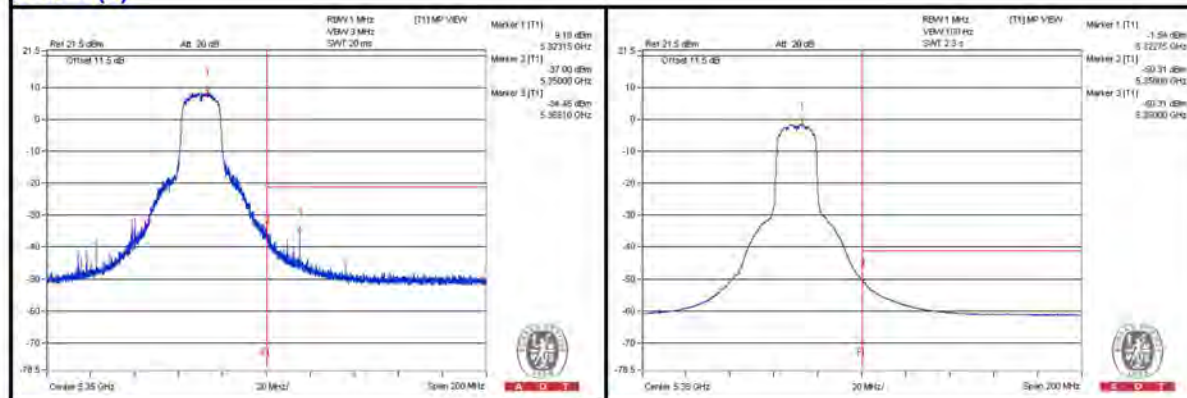

**Chain (1)**

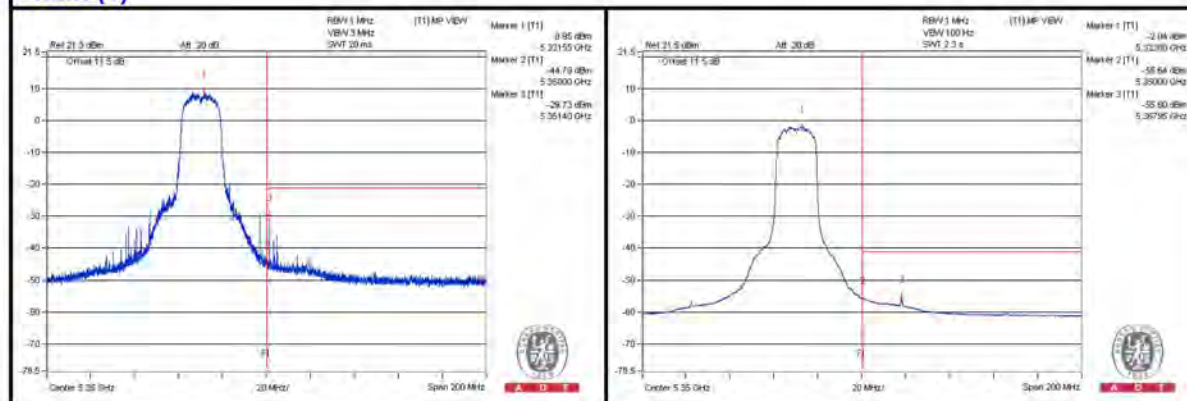

**802.11ac (VHT20) - Channel 100**

**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3665.625 PK	58.8	74	-15.2	-48.44	-46.3	7.77	-36.46
2	3665.625 AV	51.41	54	-2.59	-65.49	-51.8	7.77	-43.85
3	7334.375 PK	59.69	74	-14.31	-45.31	-47.71	7.77	-35.57
4	7334.375 AV	51.15	54	-2.85	-52.06	-65.84	7.77	-44.11
5	11006.25 PK	57.33	74	-16.67	-47.27	-50.87	7.77	-37.93
6	11003.125 AV	42.08	54	-11.92	-65.04	-63.09	7.77	-53.18
7	16498.625 PK	57.34	74	-16.66	-48.52	-48.89	7.77	-37.92
8	16495.75 AV	45.75	54	-8.25	-59.91	-60.71	7.77	-49.51


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.




A D T

### Chain (0)

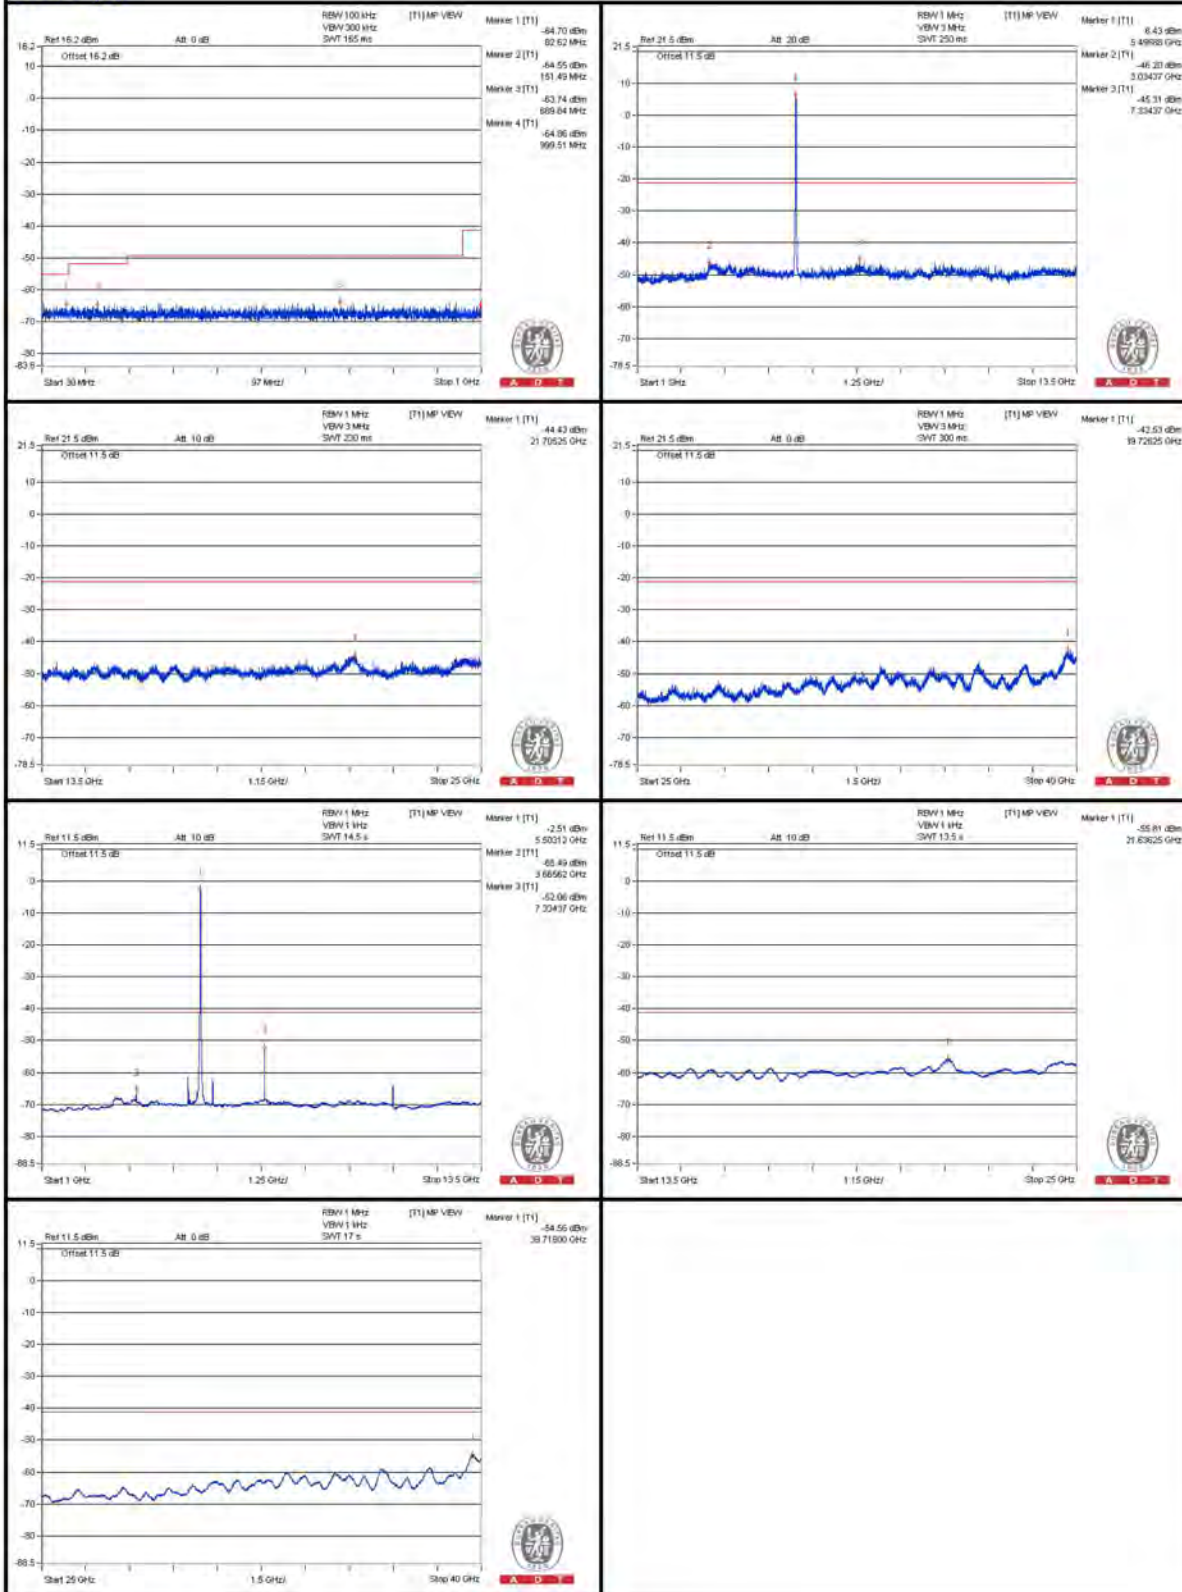

**Chain (1)**

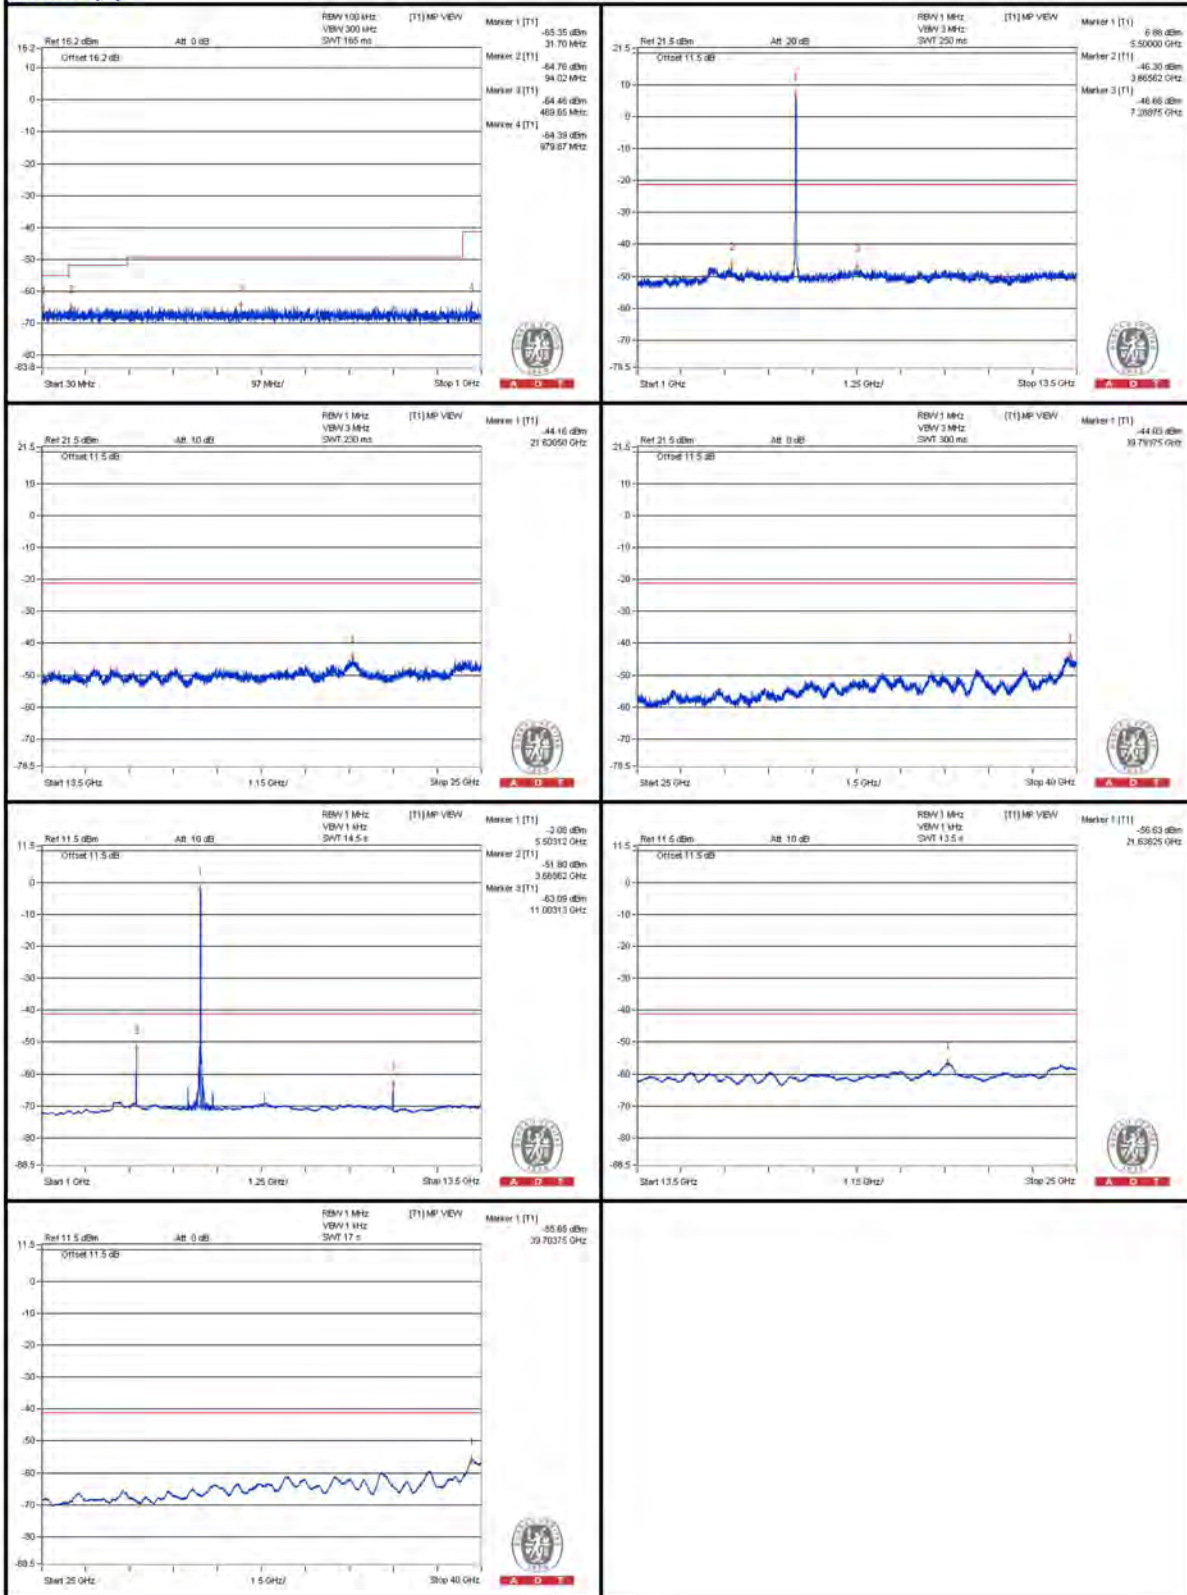

### Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5466.125 PK	69.89	74	-4.11	-45.2	-33.42	7.77	-25.37
2	5469.9375 AV	51.89	54	-2.11	-54.53	-53.8	7.77	-43.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

#### Chain (0)

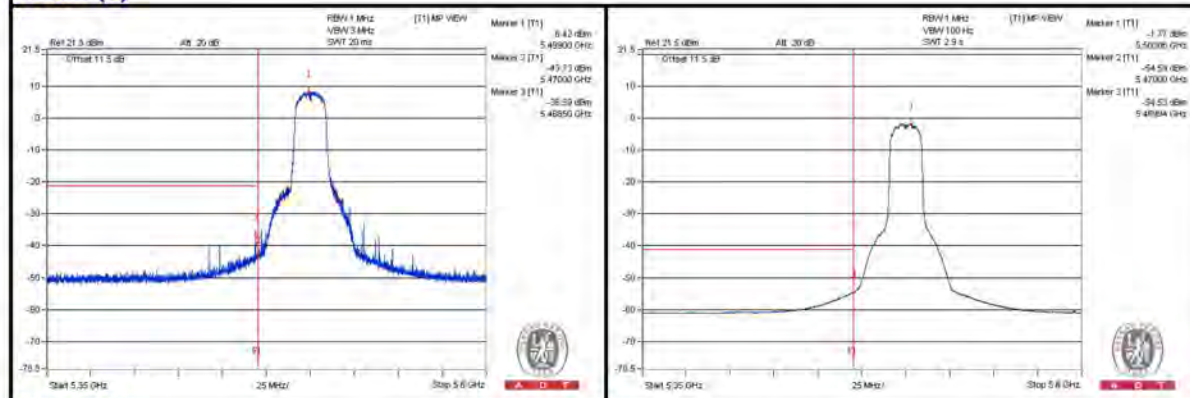

#### Chain (1)

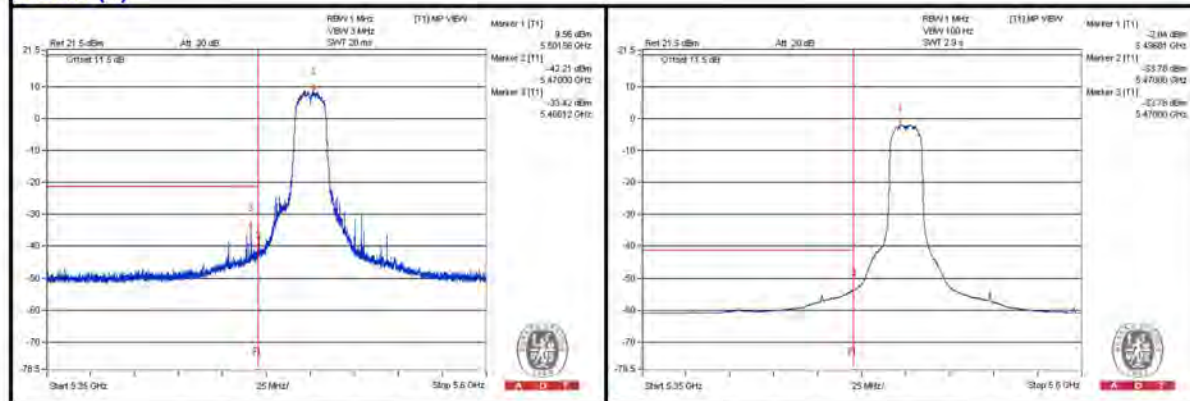



### 802.11ac (VHT20) - Channel 120

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3731.25 PK	58.95	74	-15.05	-47.81	-46.48	7.77	-36.31
2	3731.25 AV	50.36	54	-3.64	-64.89	-52.94	7.77	-44.9
3	7465.625 PK	57.42	74	-16.58	-47.97	-49.39	7.77	-37.84
4	7465.625 AV	47.57	54	-6.43	-56.36	-62.73	7.77	-47.69
5	11209.375 PK	57.04	74	-16.96	-50.01	-48.18	7.77	-38.22
6	11203.125 AV	41.21	54	-12.79	-66.34	-63.71	7.77	-54.05
7	16809.125 PK	56.05	74	-17.95	-50.03	-49.95	7.77	-39.21
8	16806.25 AV	45.01	54	-8.99	-61.28	-60.79	7.77	-50.25


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.




A D T

### Chain (0)

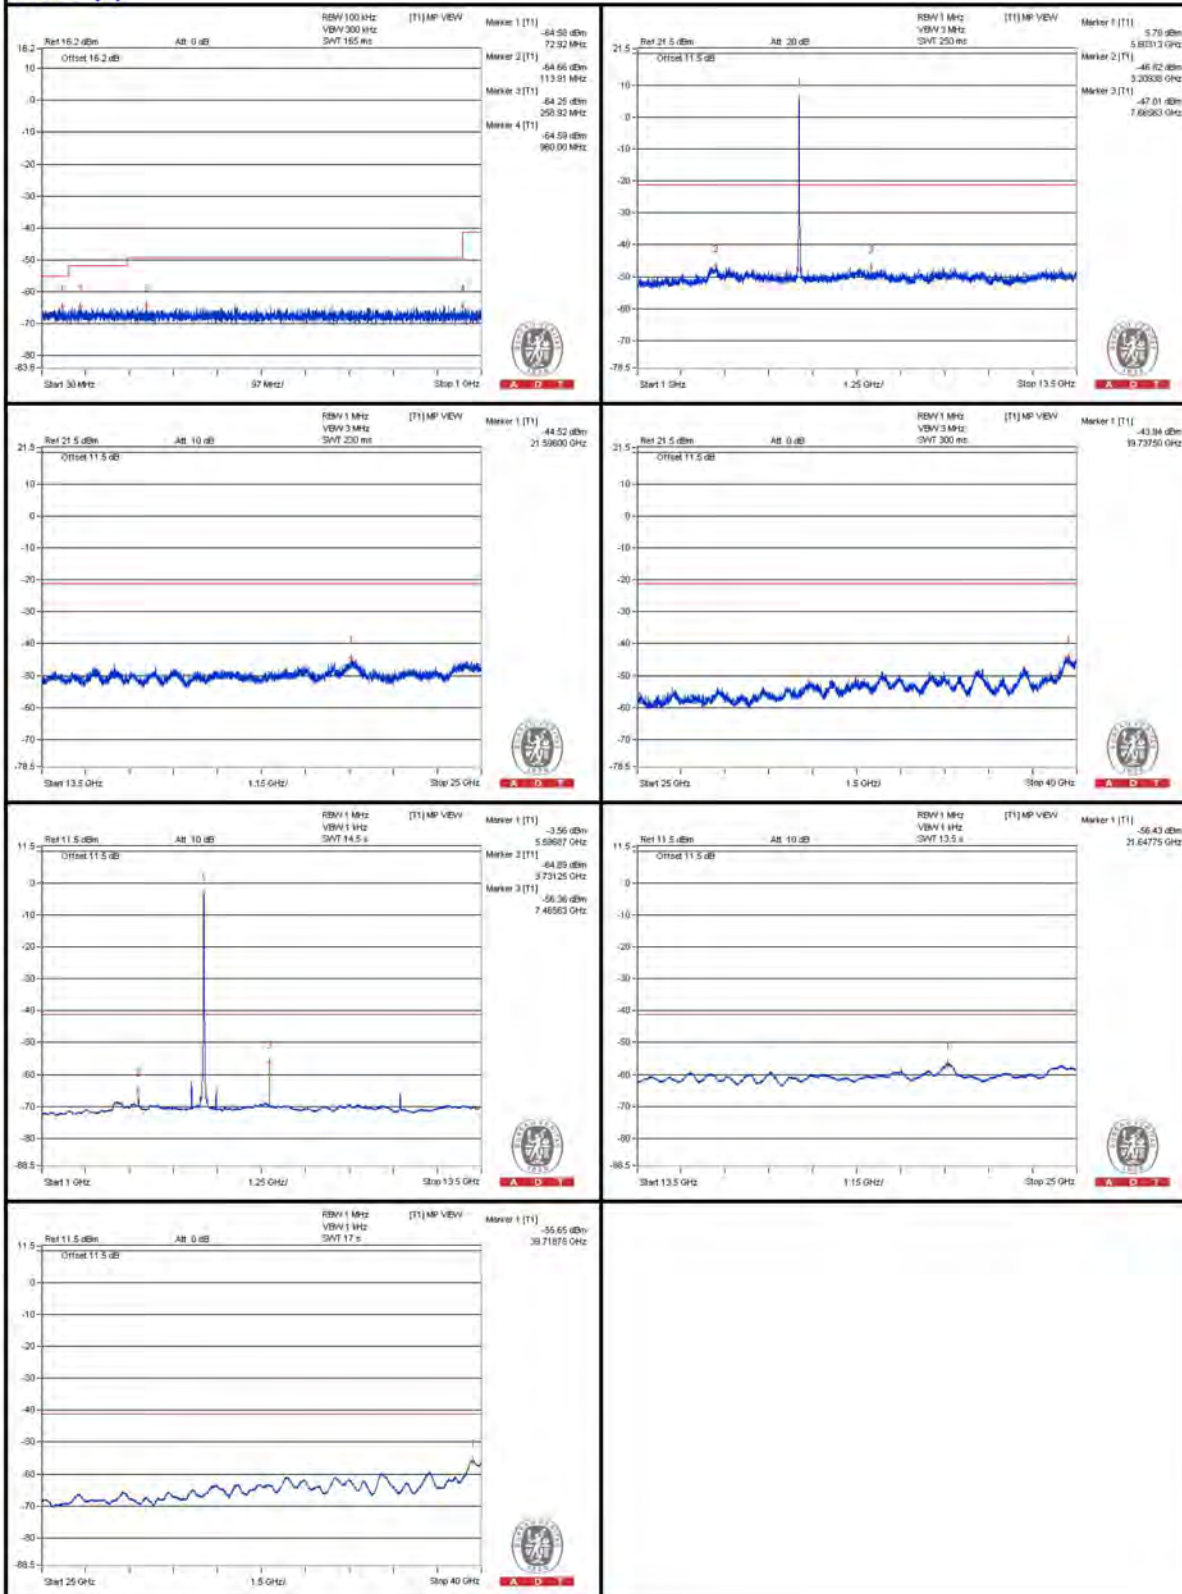

**Chain (1)**

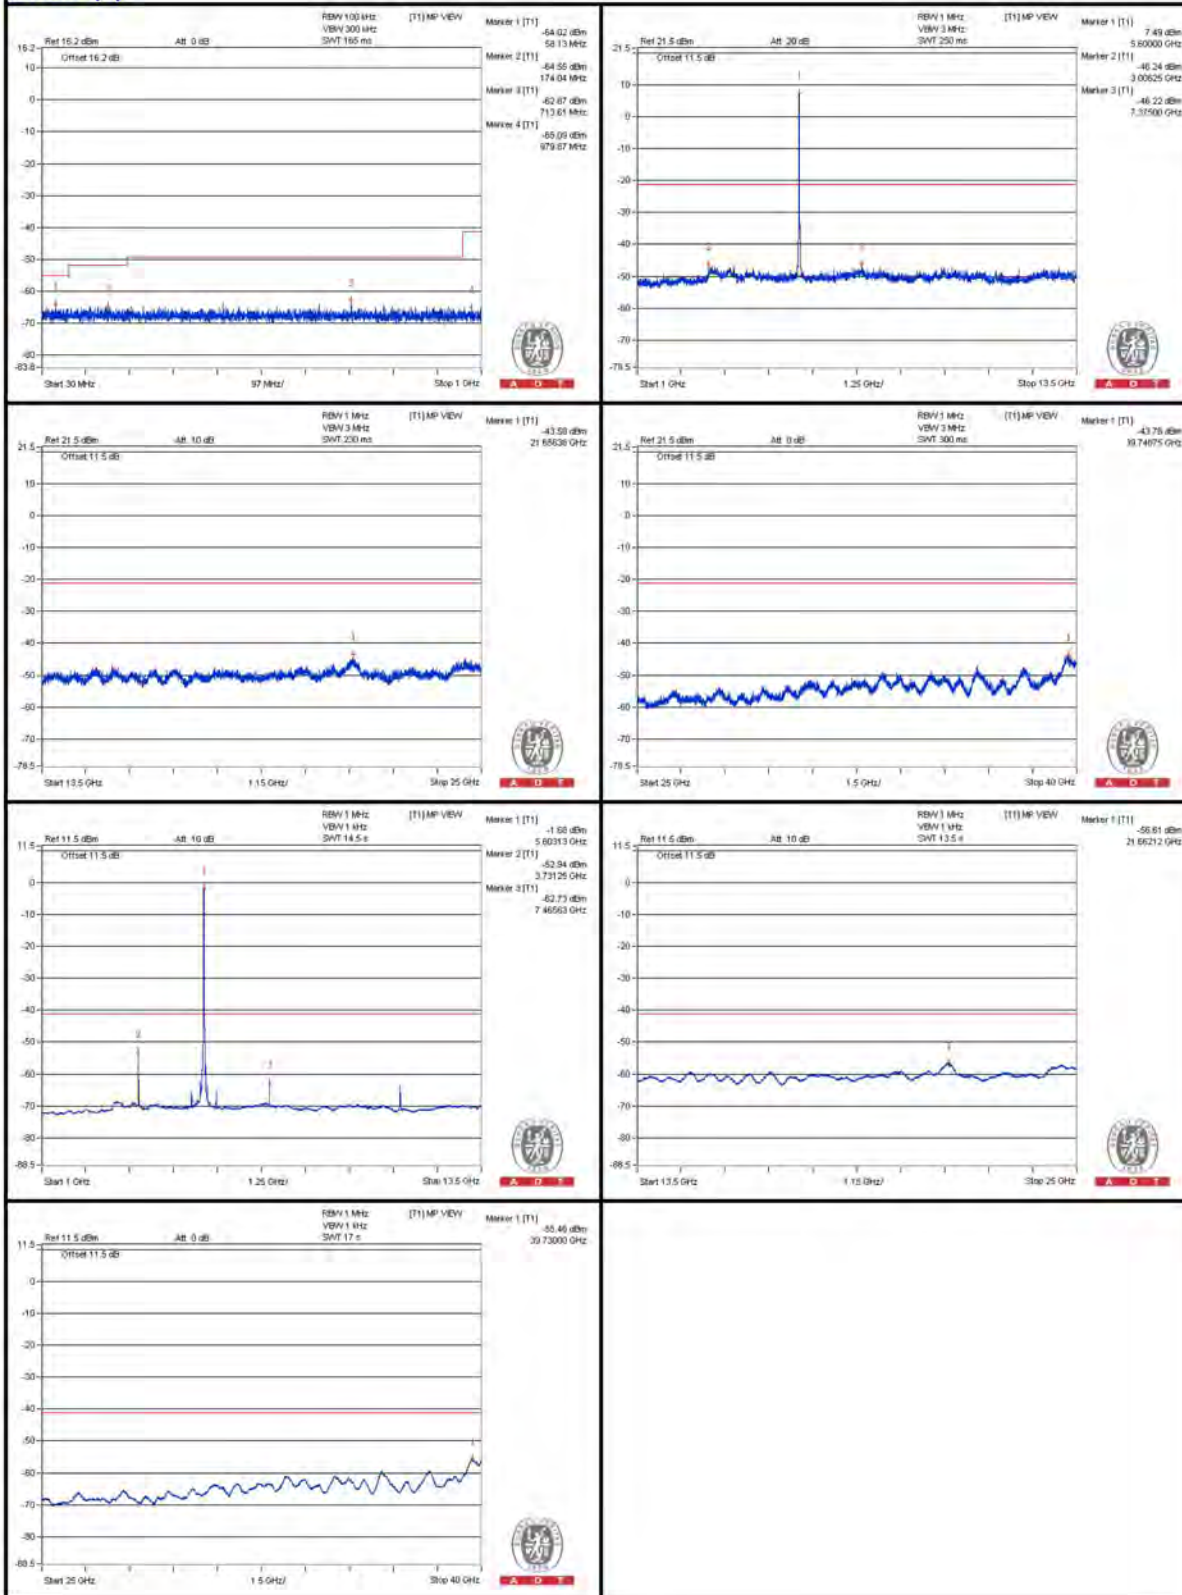

### 802.11ac (VHT20) - Channel 140

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3800 PK	57.22	74	-16.78	-48.95	-48.69	7.77	-38.04
2	3800 AV	47.62	54	-6.38	-66.91	-55.73	7.77	-47.64
3	7606.25 PK	57.23	74	-16.77	-47.67	-50.35	7.77	-38.03
4	7600 AV	47.34	54	-6.66	-56.09	-66.27	7.77	-47.92
5	11403.125 PK	56.62	74	-17.38	-49.59	-49.25	7.77	-38.64
6	11403.125 AV	39.51	54	-14.49	-67.25	-65.92	7.77	-55.75
7	17102.375 PK	56.45	74	-17.55	-49.44	-49.74	7.77	-38.81
8	17093.75 AV	45.48	54	-8.52	-60.29	-60.85	7.77	-49.78

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T


### Chain (0)

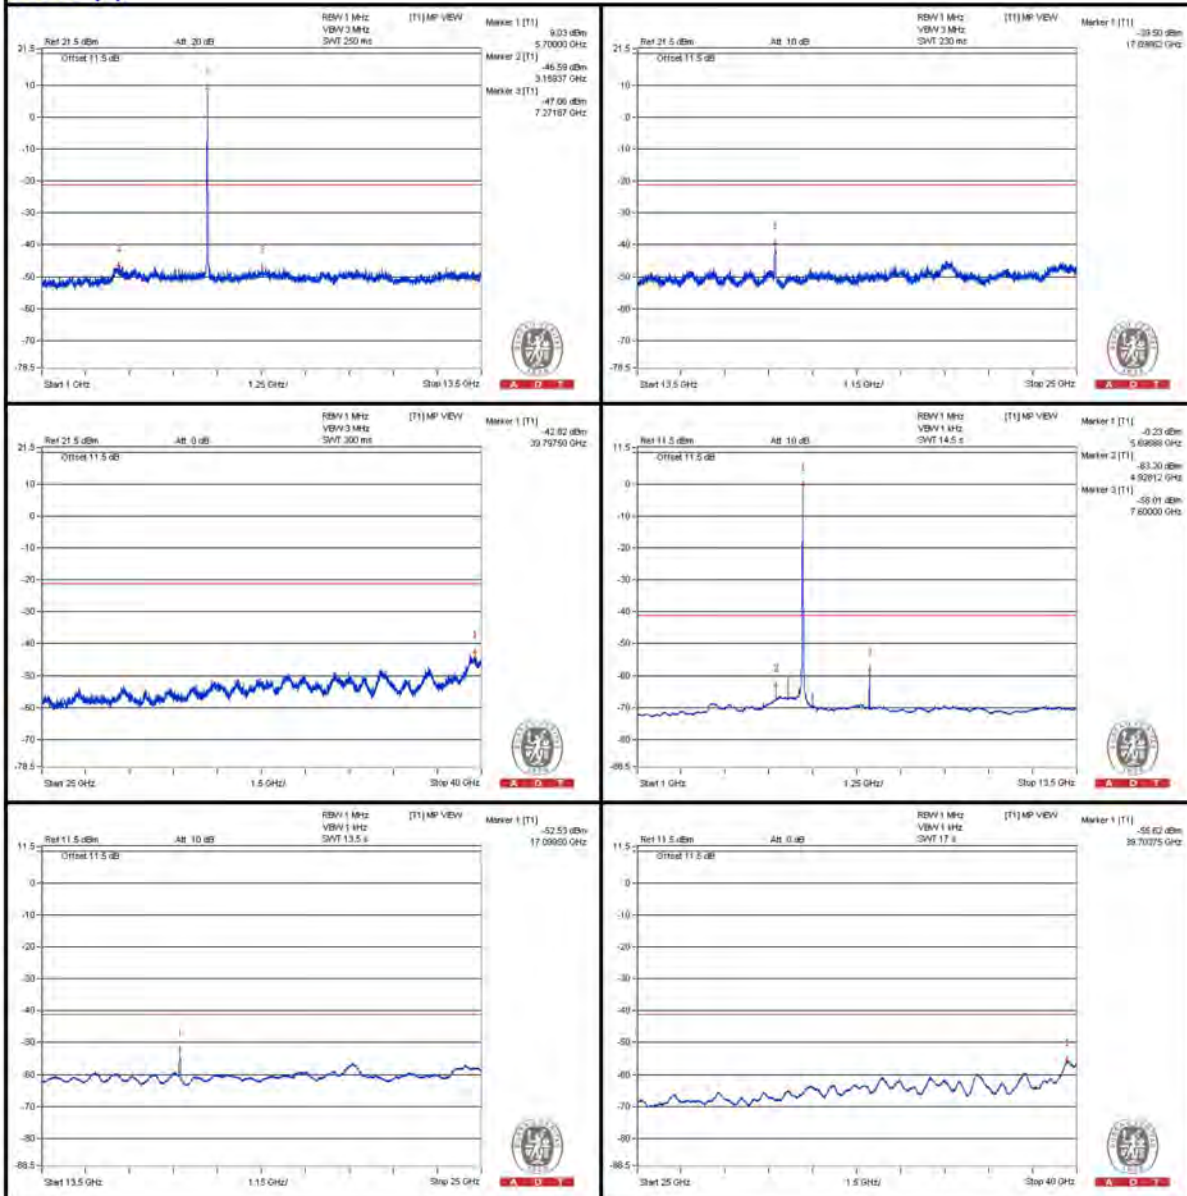



A D T

### Chain (1)

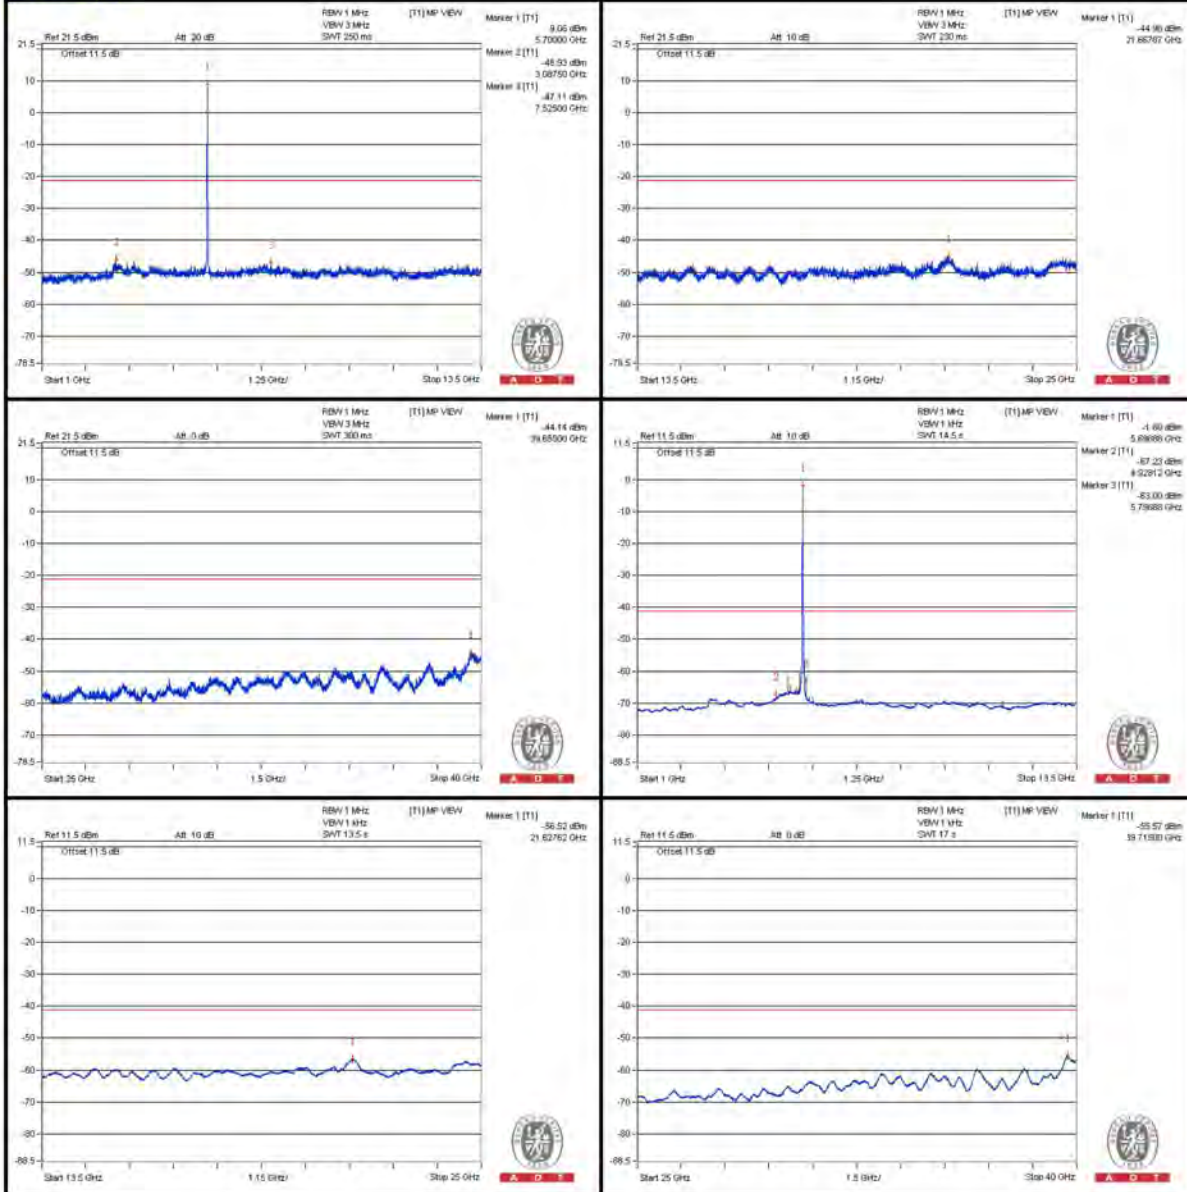

### 802.11ac (VHT20) - Channel 144

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5 PK	57.06	74	-16.94	-49.22	-48.75	7.77	-38.2
2	3812.5 AV	48.3	54	-5.7	-63.92	-55.29	7.77	-46.96
3	7628.125 PK	57.12	74	-16.88	-48.37	-49.56	7.77	-38.14
4	7628.125 AV	46.52	54	-7.48	-56.72	-69.76	7.77	-48.74
5	11443.75 PK	55.8	74	-18.2	-50.14	-50.35	7.77	-39.46
6	11440.625 AV	39.95	54	-14.05	-67.33	-65.13	7.77	-55.31
7	17162.75 PK	55.64	74	-18.36	-50.86	-49.99	7.77	-39.62
8	17159.875 AV	44.3	54	-9.7	-61.83	-61.66	7.77	-50.96


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

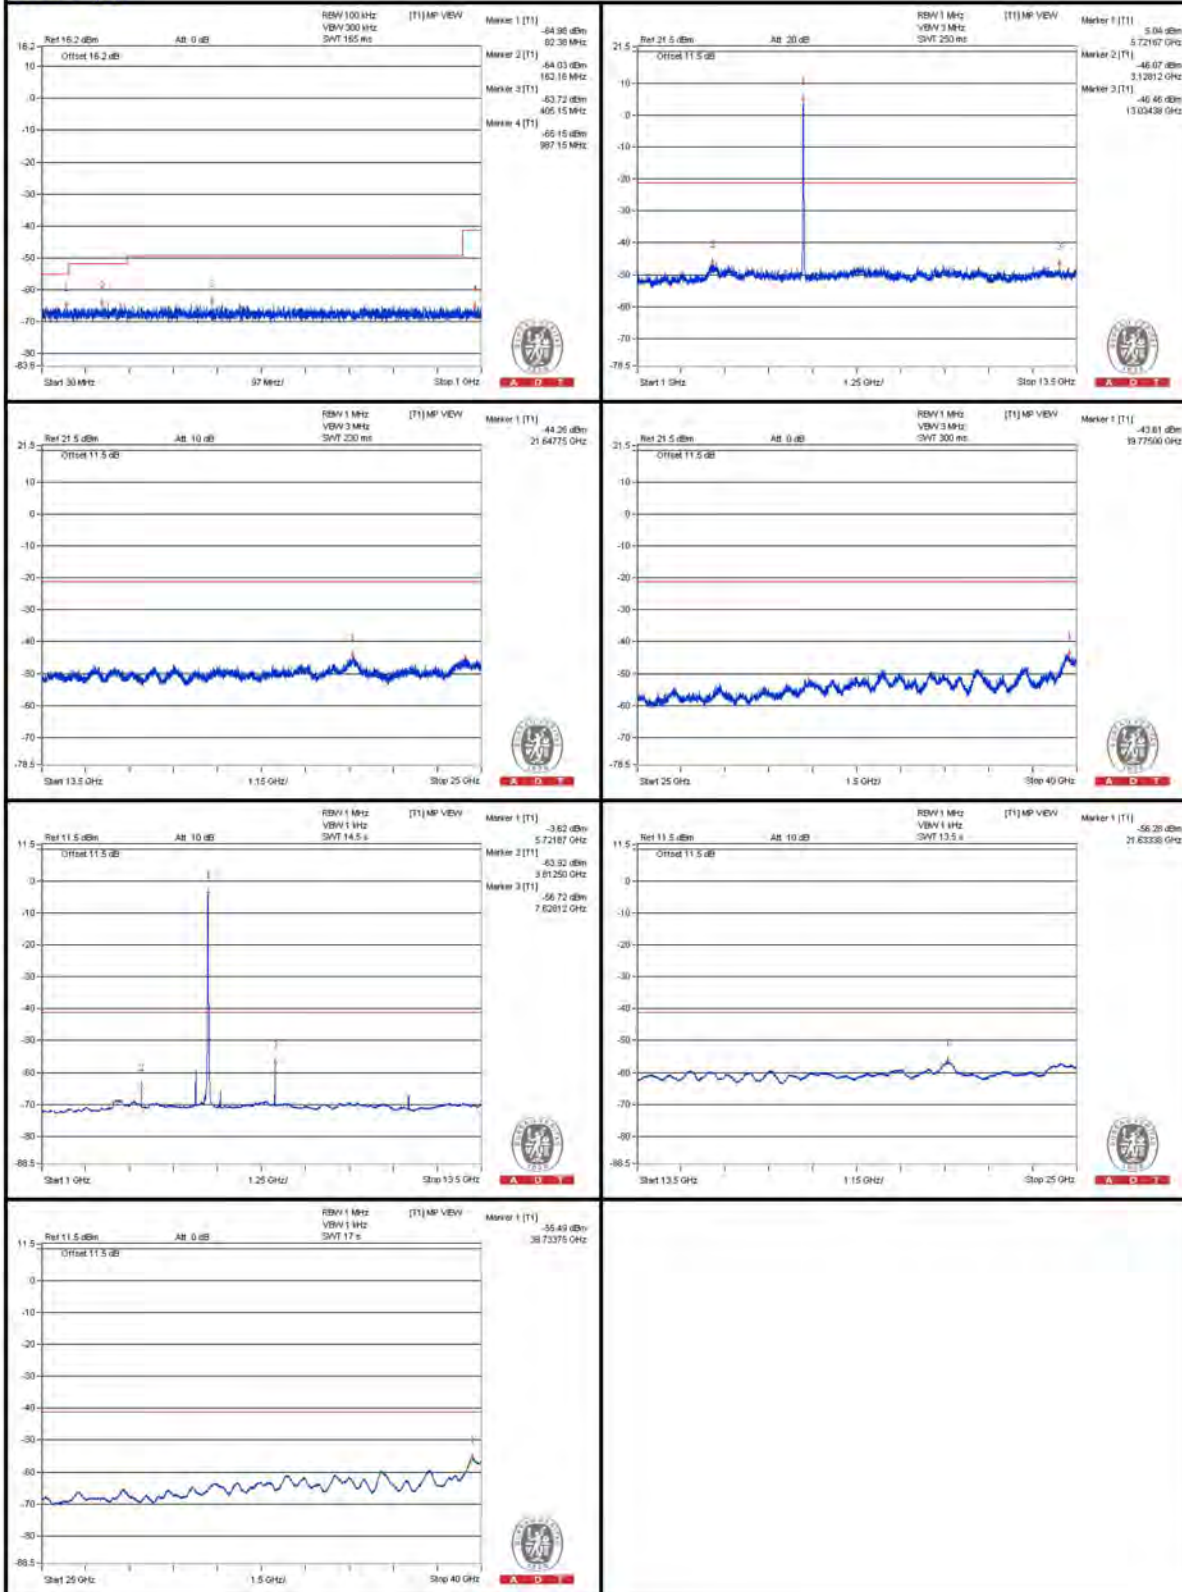






A D T

### Chain (1)

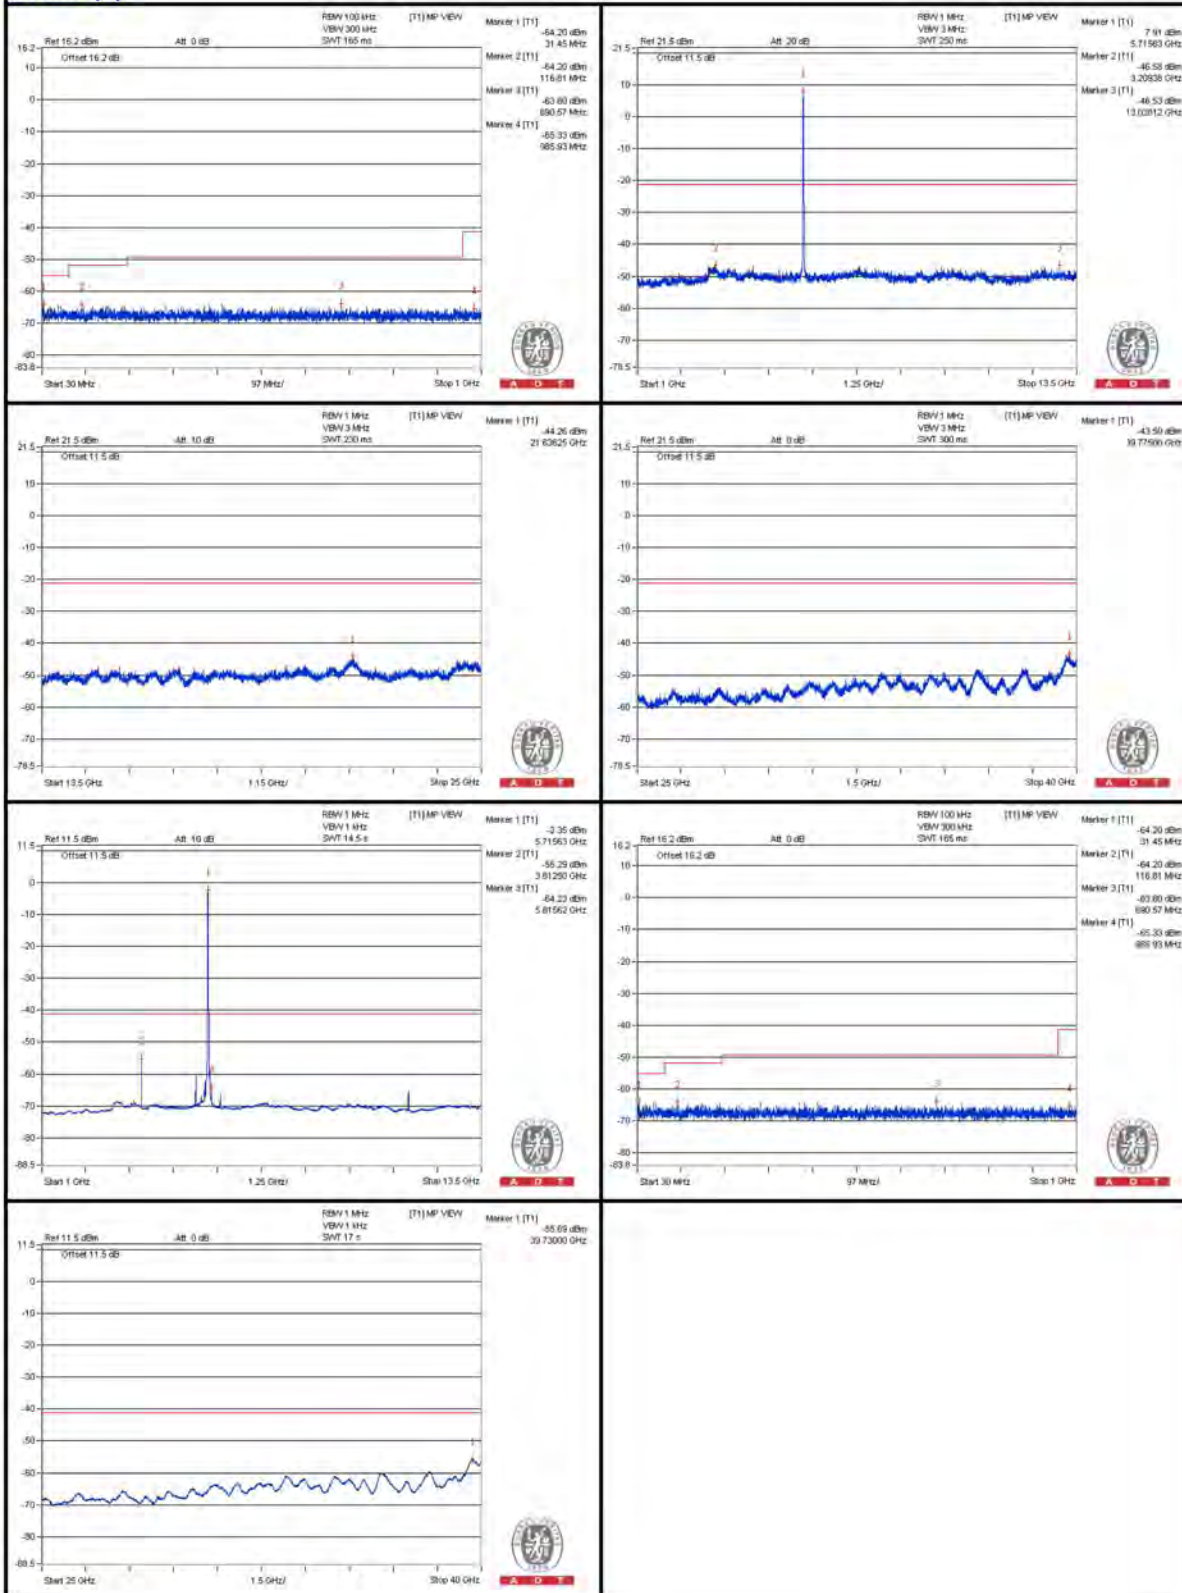



A D T

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5872.525 PK	57.35	74	-16.65	-49.21	-48.22	7.77	-37.91
2	5850.625 AV	45.09	54	-8.91	-61	-60.91	7.77	-50.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

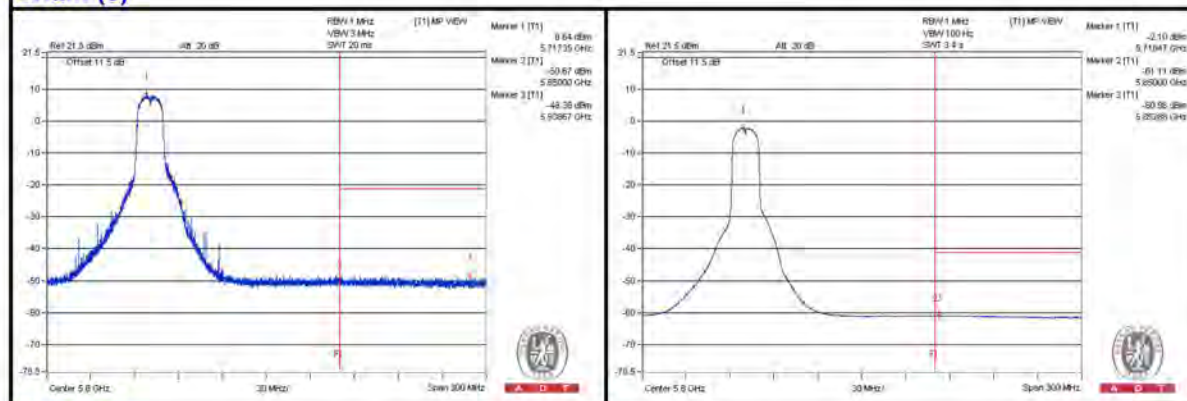

**Chain (1)**

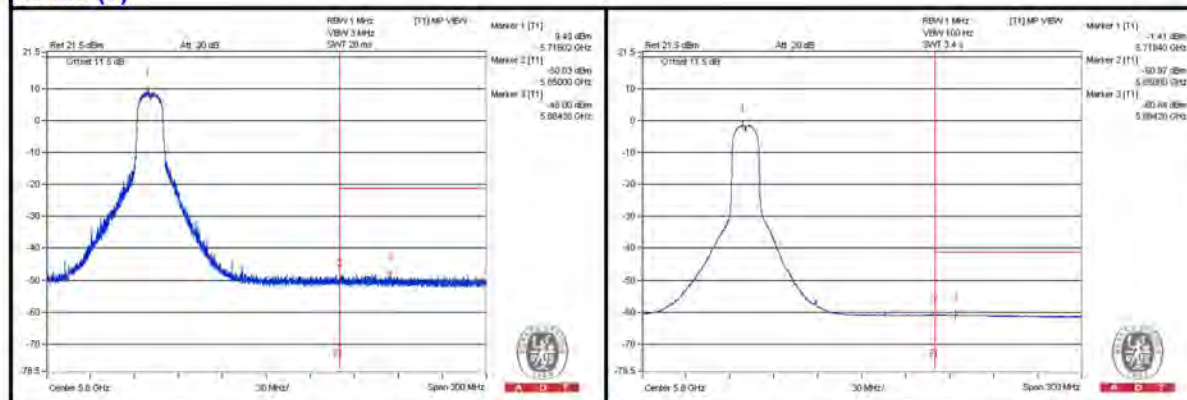

### 802.11ac (VHT20) - Channel 149

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3828.125 PK	57.8	74	-16.2	-49.61	-47.2	7.77	-37.46
2	3828.125 AV	50.38	54	-3.62	-71.11	-52.71	7.77	-44.88
3	7659.375 PK	56.44	74	-17.56	-48.68	-50.78	7.77	-38.82
4	7659.375 AV	46.73	54	-7.27	-56.6	-68.07	7.77	-48.53
5	11493.75 PK	56.22	74	-17.78	-49.07	-50.72	7.77	-39.04
6	11493.75 AV	40.08	54	-13.92	-66.08	-65.85	7.77	-55.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T

### Chain (0)

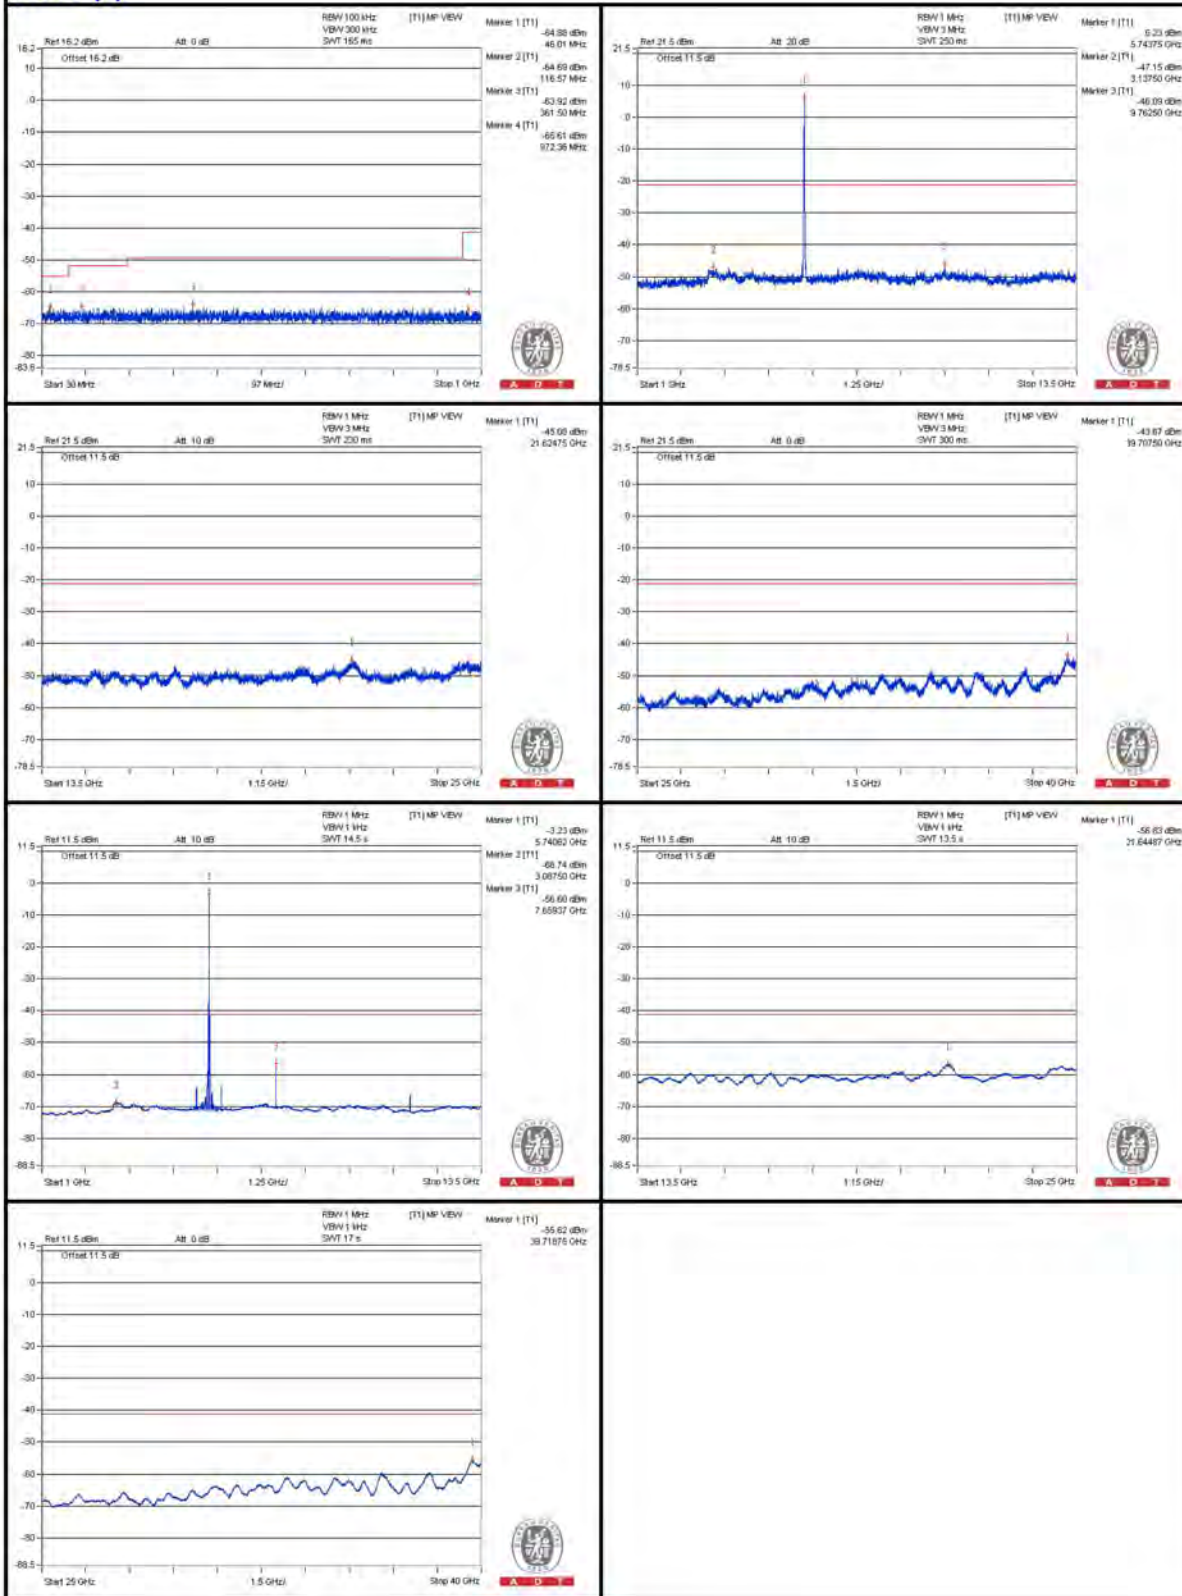



A D T

### Chain (1)



### Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5711.525 PK	69.51	74	-4.49	-33.85	-44.92	7.77	-25.75
2	5714.975 AV	51.96	54	-2.04	-54.1	-54.06	7.77	-43.3
3	5724.65 PK	74.63	78.2	-3.57	-31.36	-31.46	7.77	-20.63
4	5852.6 PK	57.51	78.2	-20.69	-49.47	-47.75	7.77	-37.75
5	5876.525 PK	57.27	74	-16.73	-48.2	-49.43	7.77	-37.99
6	5863.025 AV	45.18	54	-8.82	-60.93	-60.8	7.77	-50.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

### Chain (0)

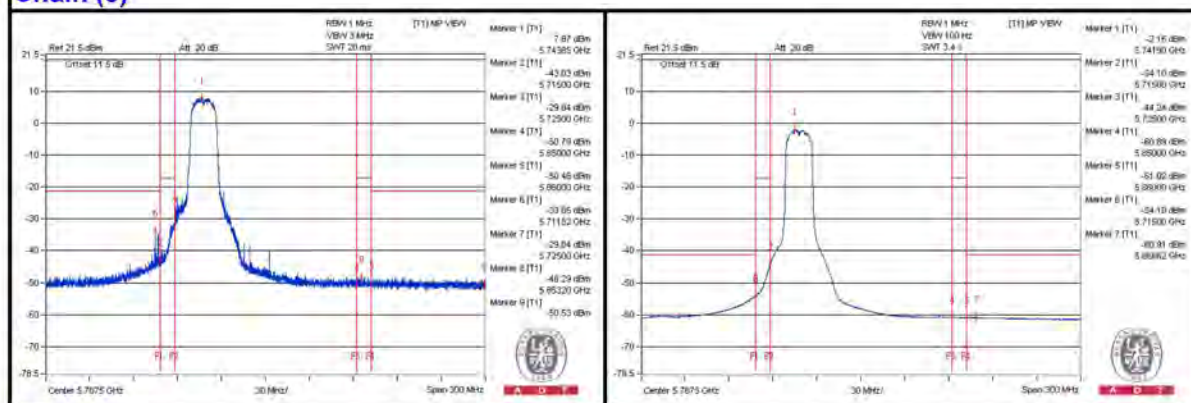

### Chain (1)

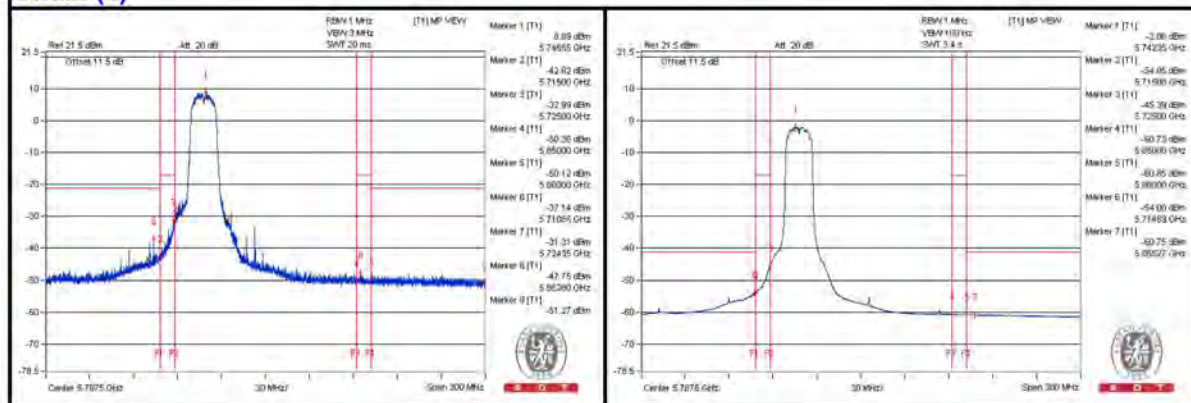

**802.11ac (VHT20) - Channel 157**
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3856.25 PK	57.95	74	-16.05	-50.61	-46.5	7.77	-37.31
2	3856.25 AV	41.95	54	-12.05	-61.55	-70.96	7.77	-53.31
3	7712.5 PK	57.38	74	-16.62	-47.79	-49.75	7.77	-37.88
4	7712.5 AV	45.27	54	-8.73	-58.04	-69.79	7.77	-49.99
5	11571.875 PK	56.74	74	-17.26	-49.29	-49.31	7.77	-38.52
6	11575 AV	41.03	54	-12.97	-65.65	-64.46	7.77	-54.23
7	3856.25 PK	57.95	74	-16.05	-50.61	-46.5	7.77	-37.31
8	3856.25 AV	41.95	54	-12.05	-61.55	-70.96	7.77	-53.31


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

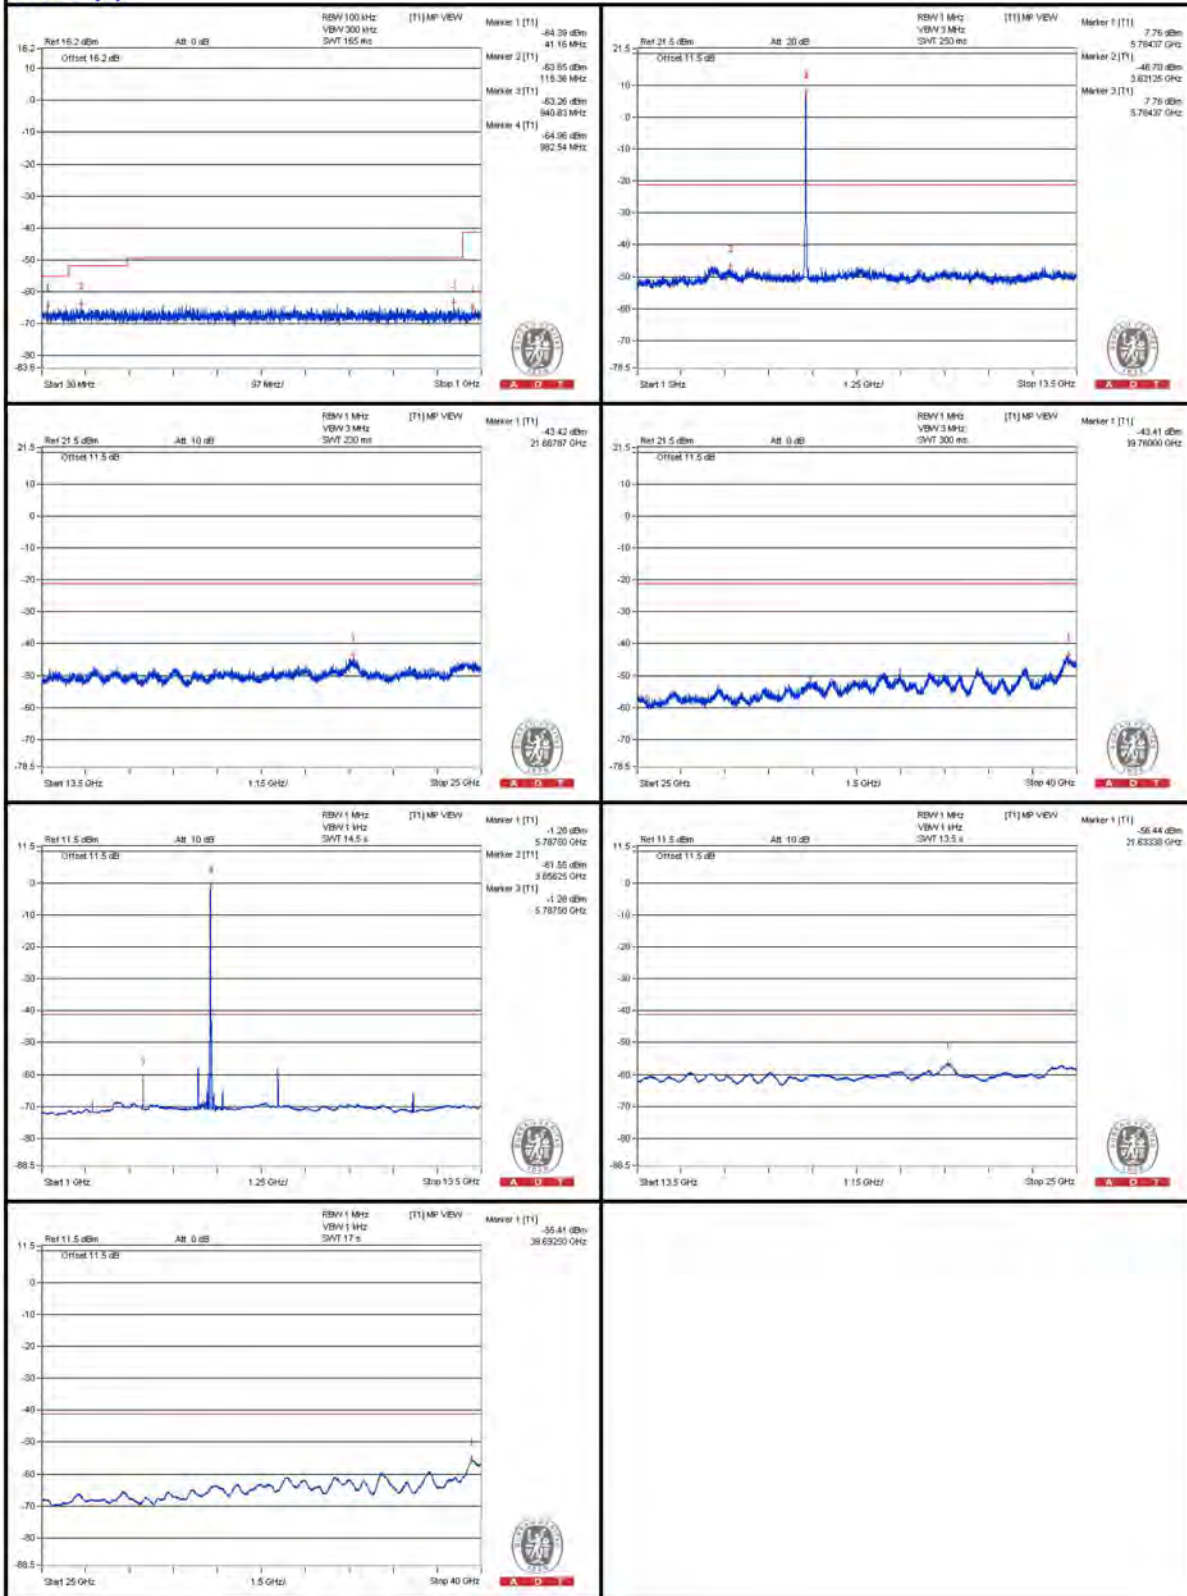






A D T

### Chain (1)

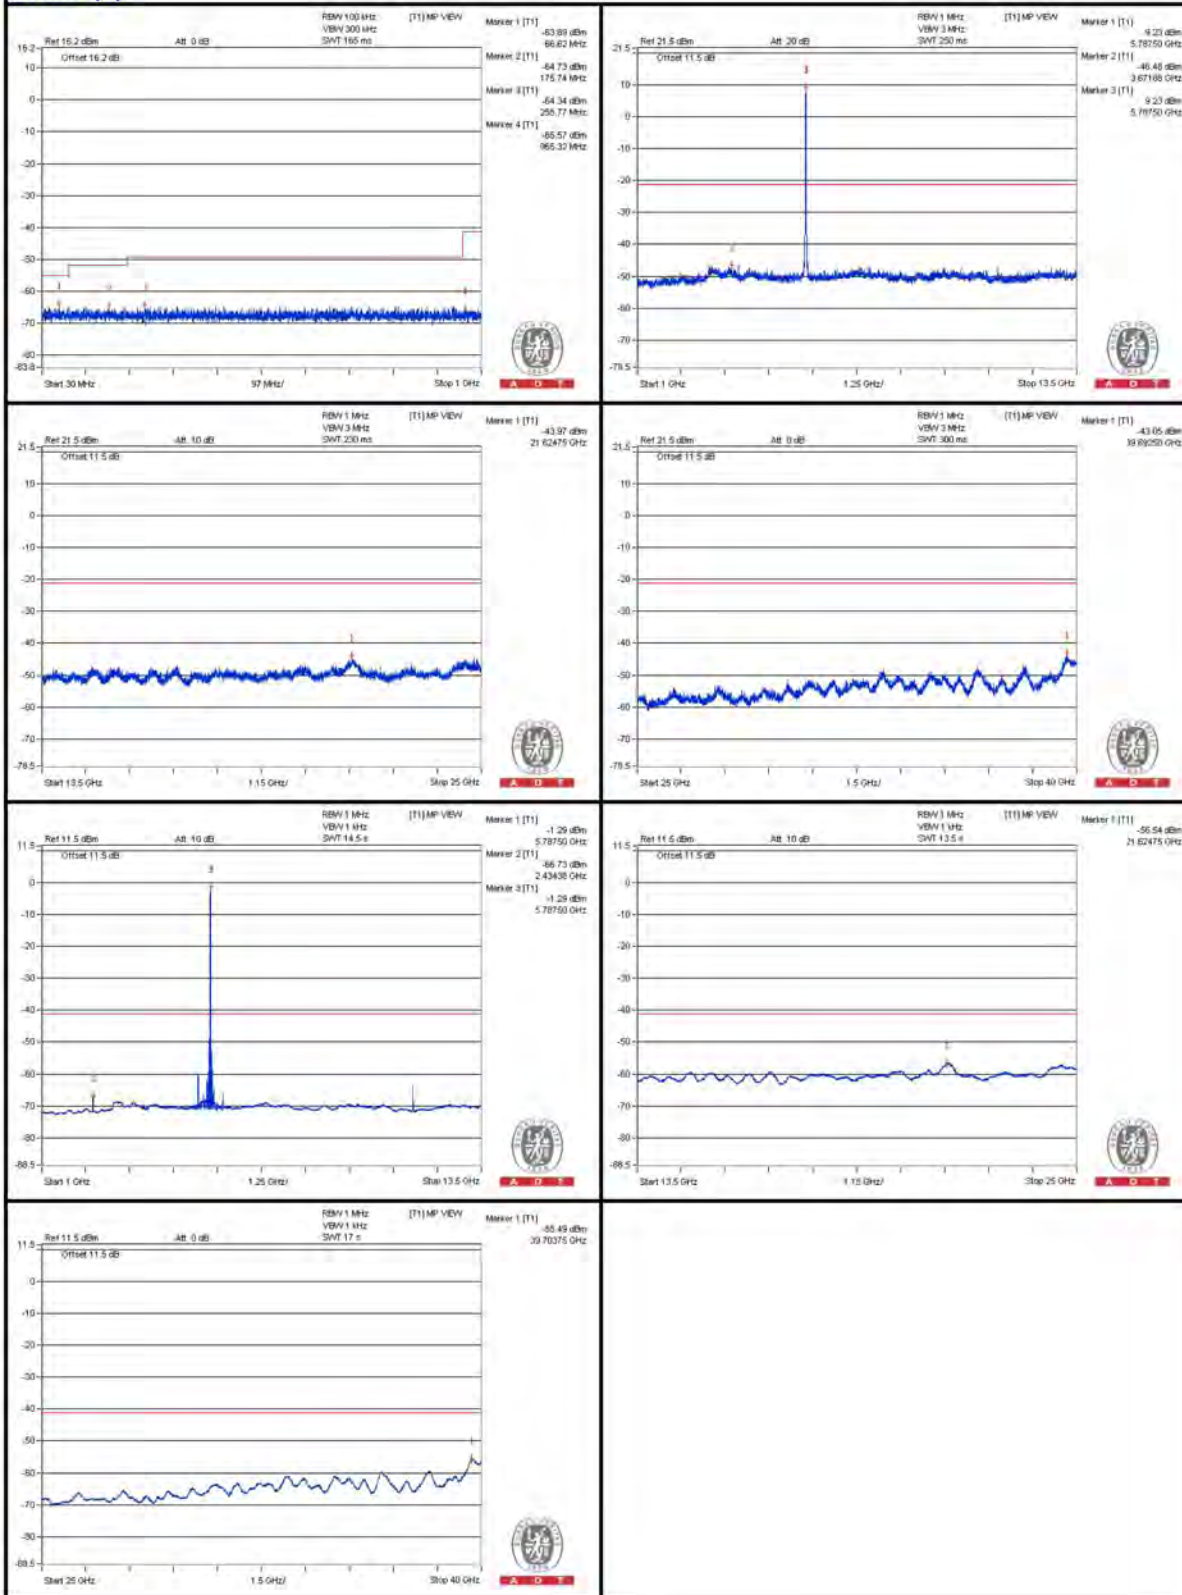

**802.11ac (VHT20) - Channel 165**
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3884.375 PK	60.17	74	-13.83	-49.17	-44.02	7.77	-35.09
2	3881.25 AV	55.39	54	* 1.39	-59	-47.97	7.77	-39.87
3	11650 PK	55.95	74	-18.05	-50.36	-49.84	7.77	-39.31
4	11656.25 AV	39.06	54	-14.94	-67.58	-66.46	7.77	-56.2

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)



A D T


### Chain (0)

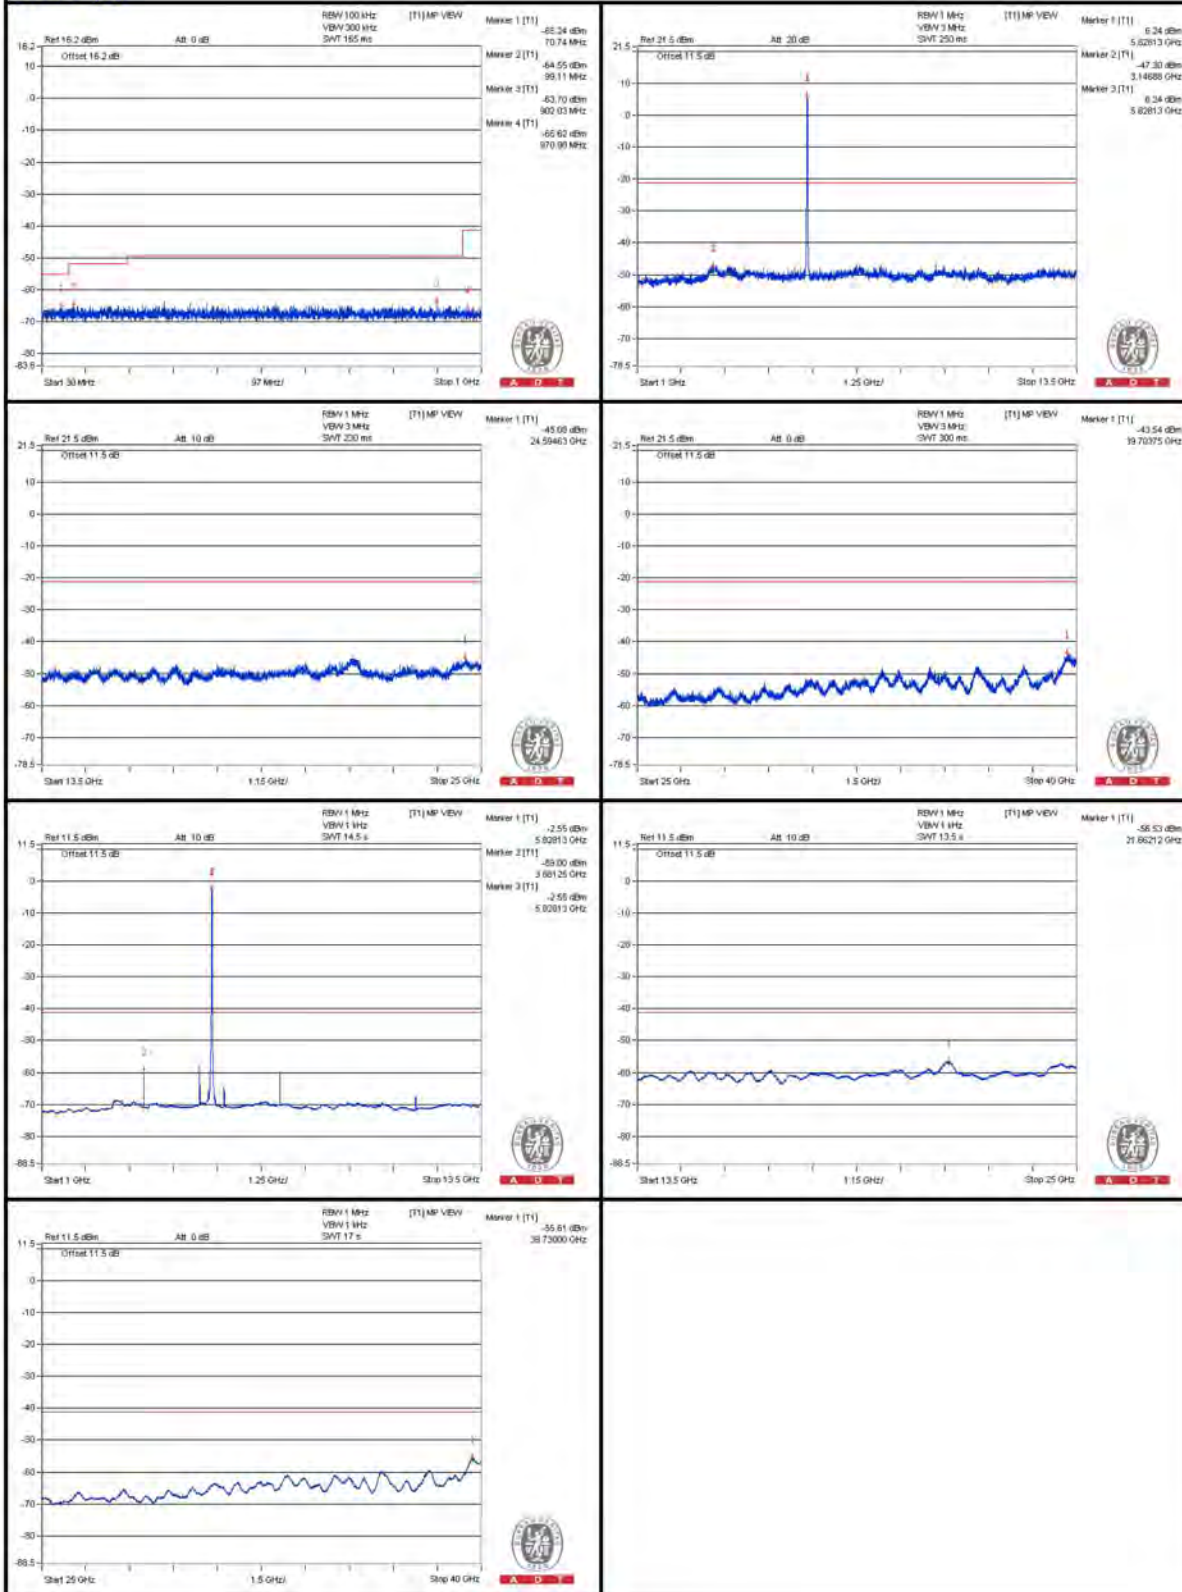



A D T

### Chain (1)

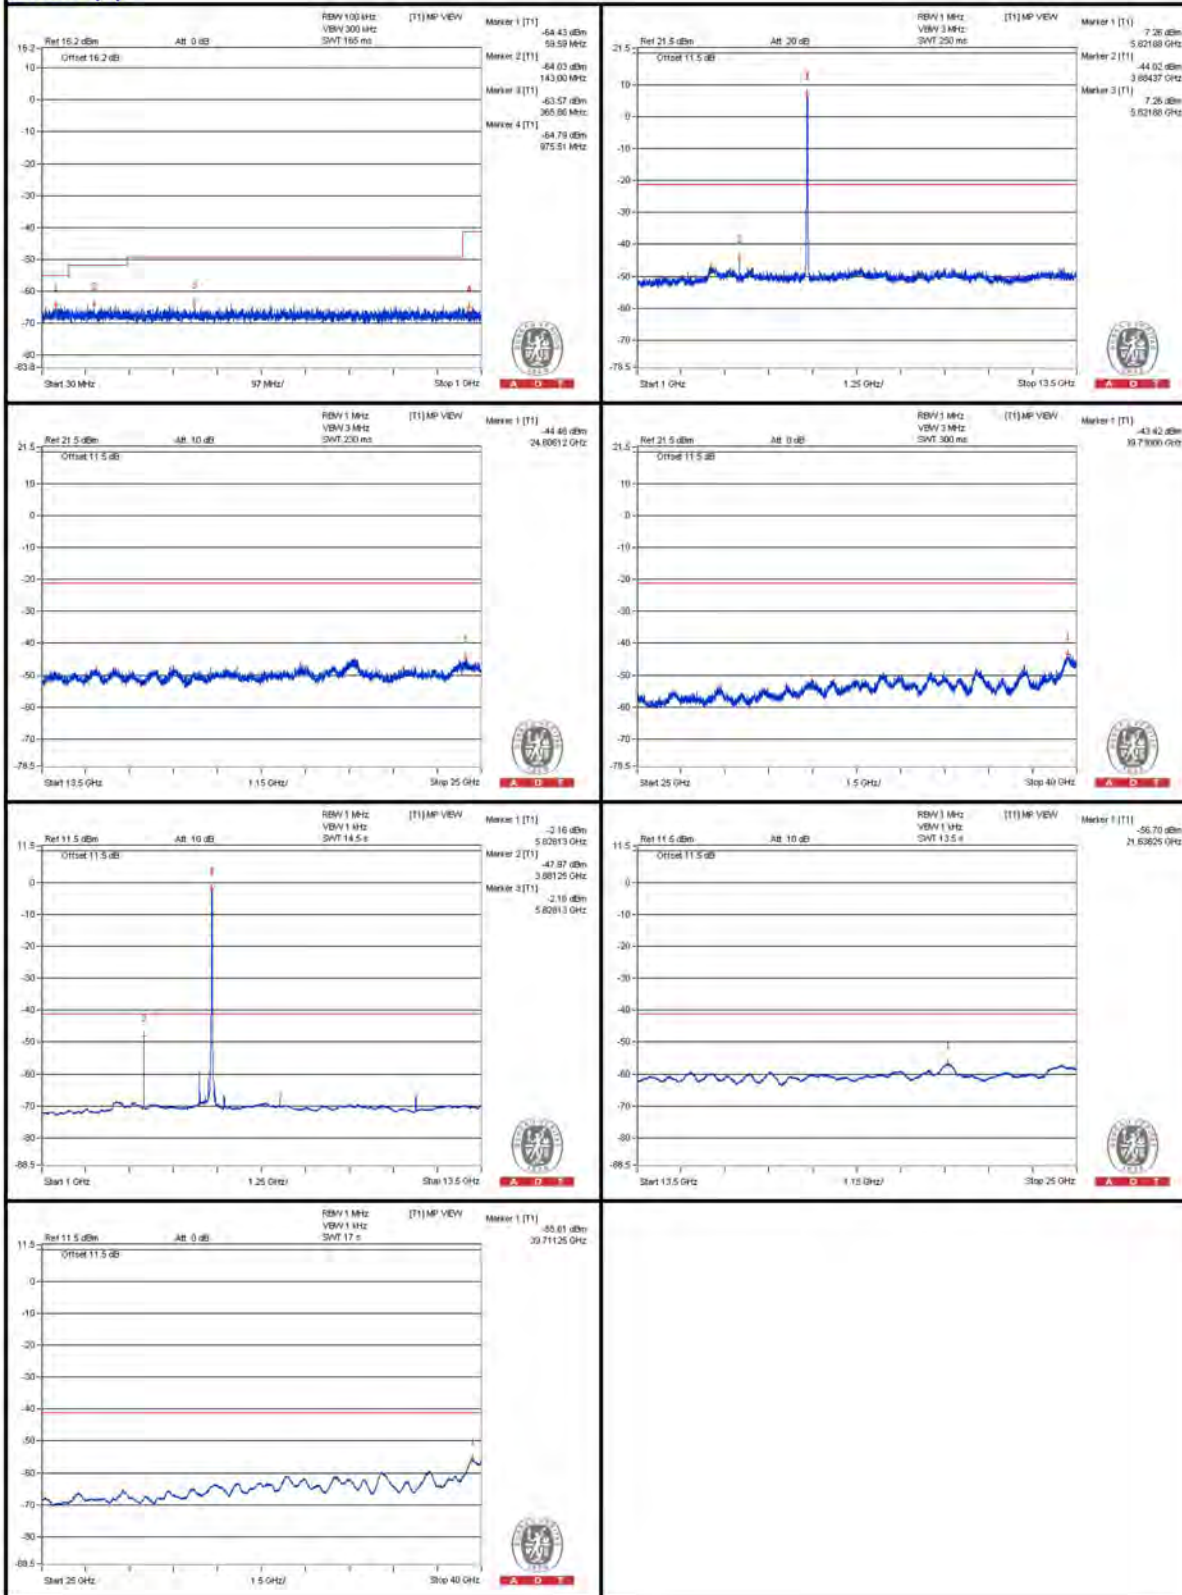

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5705.375 PK	56.93	74	-17.07	-51.35	-47.64	7.77	-38.33
2	5711.525 AV	46.31	54	-7.69	-60.75	-58.9	7.77	-48.95
3	5724.425 PK	56.77	78.2	-21.43	-50.19	-48.51	7.77	-38.49
4	5857.025 PK	70.31	78.2	-7.89	-32.97	-45.31	7.77	-24.95
5	5869.1 PK	67.23	74	-6.77	-48.74	-36.03	7.77	-28.03
6	5860.025 AV	50.86	54	-3.14	-55.03	-55.34	7.77	-44.4

Note :


$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

**Chain (0)**

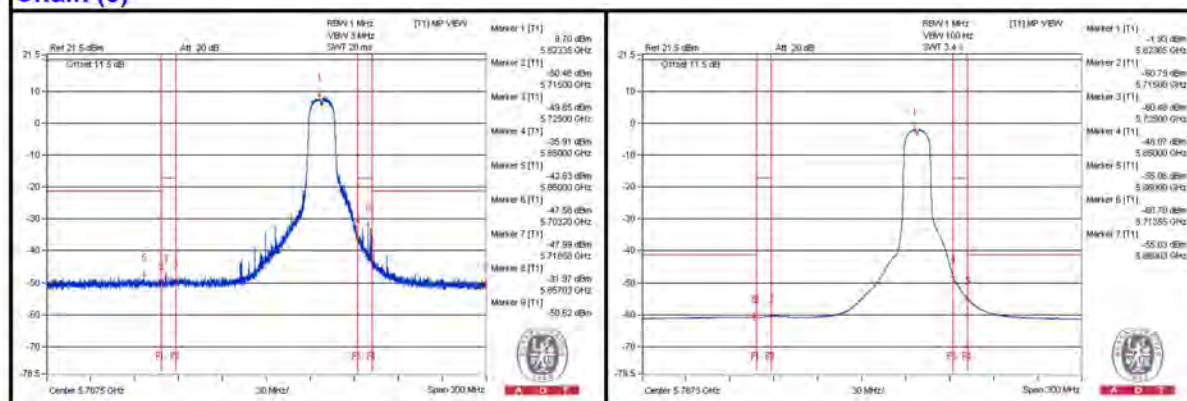

**Chain (1)**

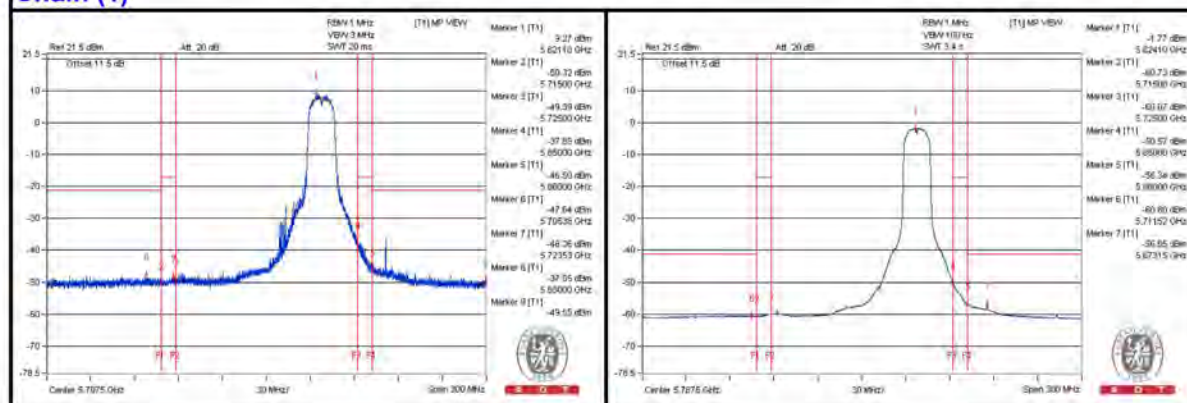

### 802.11ac (VHT40) - Channel 38

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3468.75 PK	55.39	74	-18.61	-48.36	-49.69	6.09	-39.87
2	3459.375 AV	42.89	54	-11.11	-69.67	-58.8	6.09	-52.37
3	6921.875 PK	57.52	74	-16.48	-45.42	-48.96	6.09	-37.74
4	6918.75 AV	49.87	54	-4.13	-51.55	-69.73	6.09	-45.39
5	10381.25 PK	55.47	74	-18.53	-47.72	-50.5	6.09	-39.79
6	10384.375 AV	36.42	54	-17.58	-67.98	-67.9	6.09	-58.84
7	15572.875 PK	54.74	74	-19.26	-50.08	-49.2	6.09	-40.52
8	15567.125 AV	43.34	54	-10.66	-60.61	-61.48	6.09	-51.92


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.




A D T

### Chain (0)

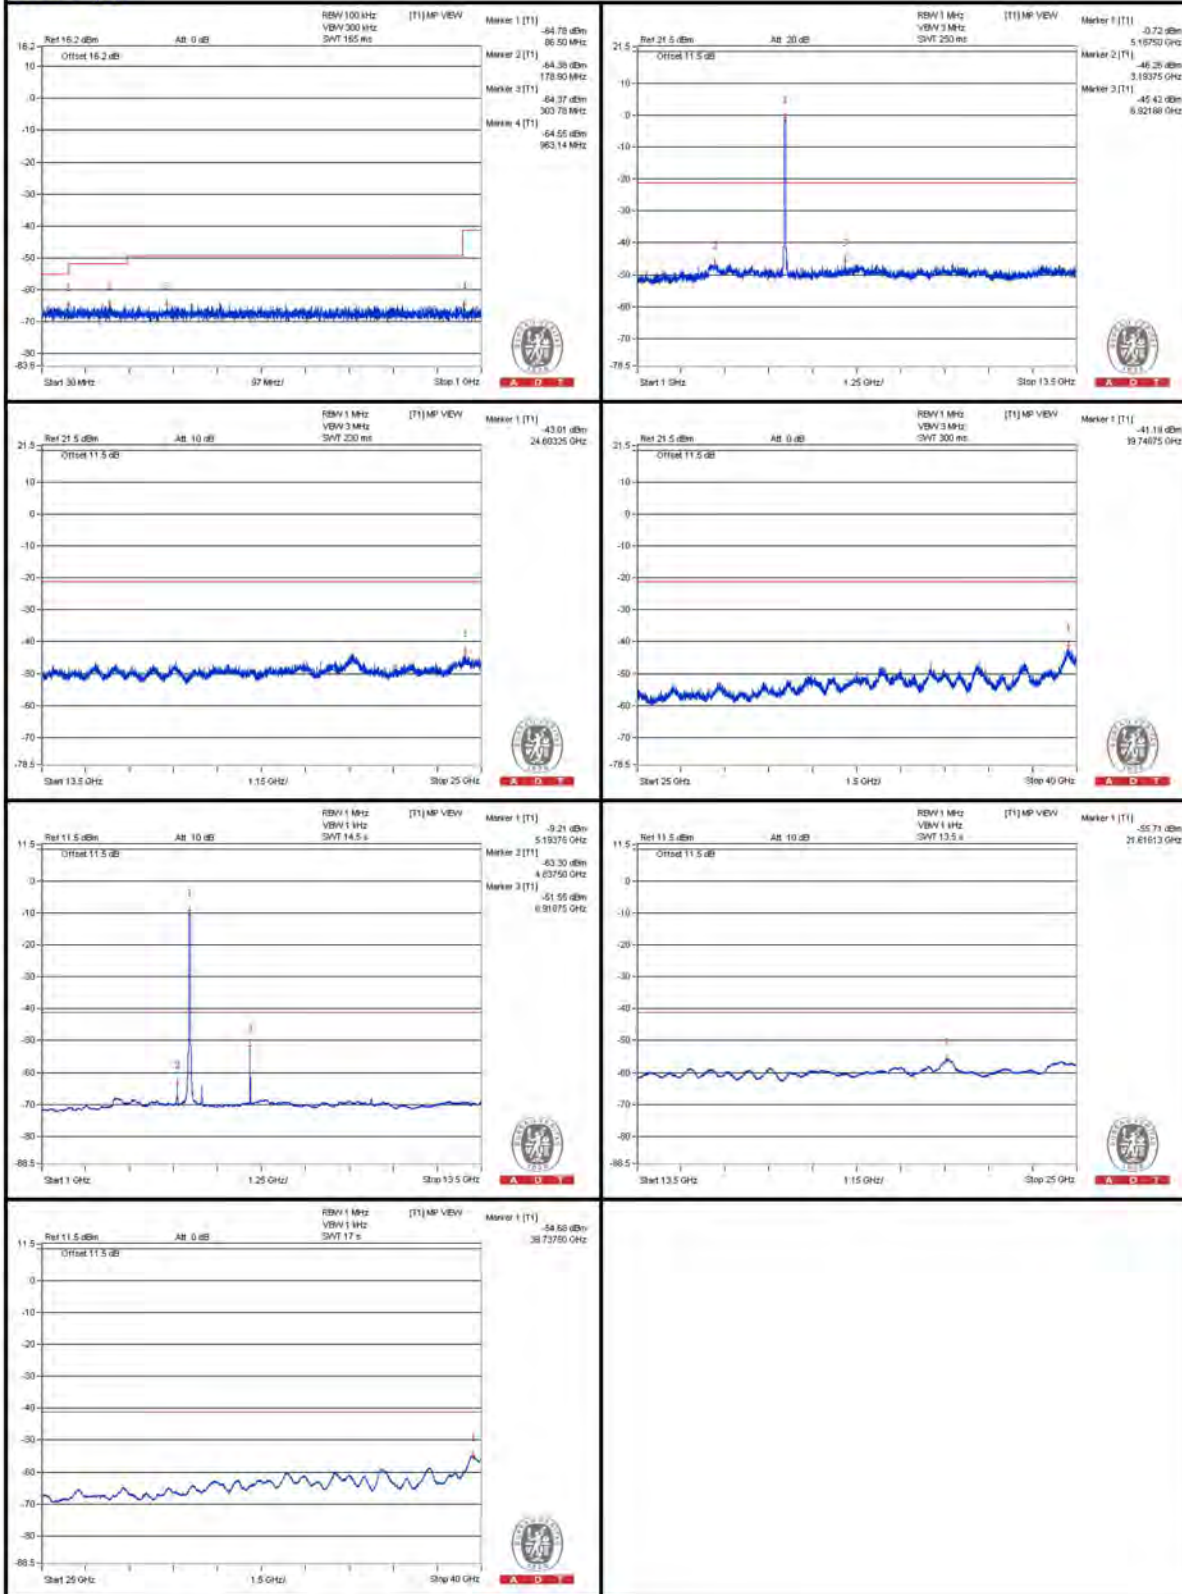

Chain (1)

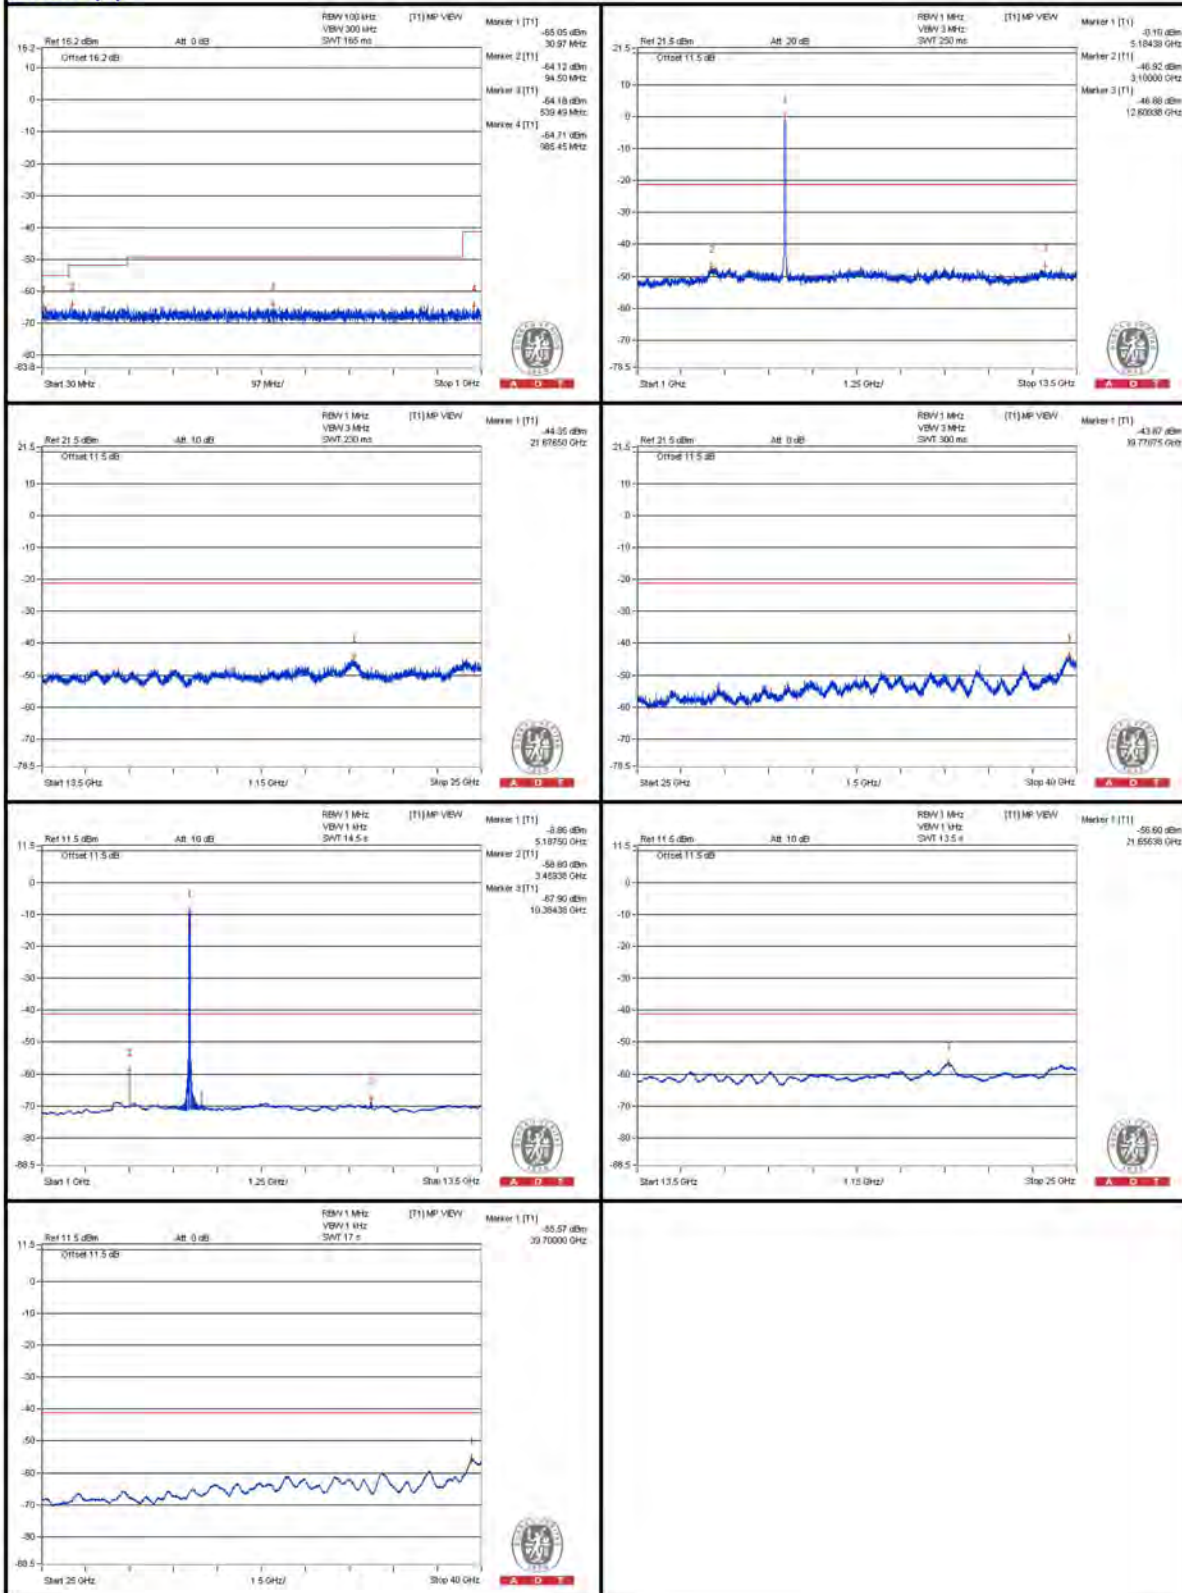



**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.1 PK	70.31	74	-3.69	-42.79	-31.34	6.09	-24.95
2	5150 AV	50.14	54	-3.86	-53.27	-55.45	6.09	-45.12

Note :


$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$

d = measurement distance in 3 meters.

**Chain (0)**

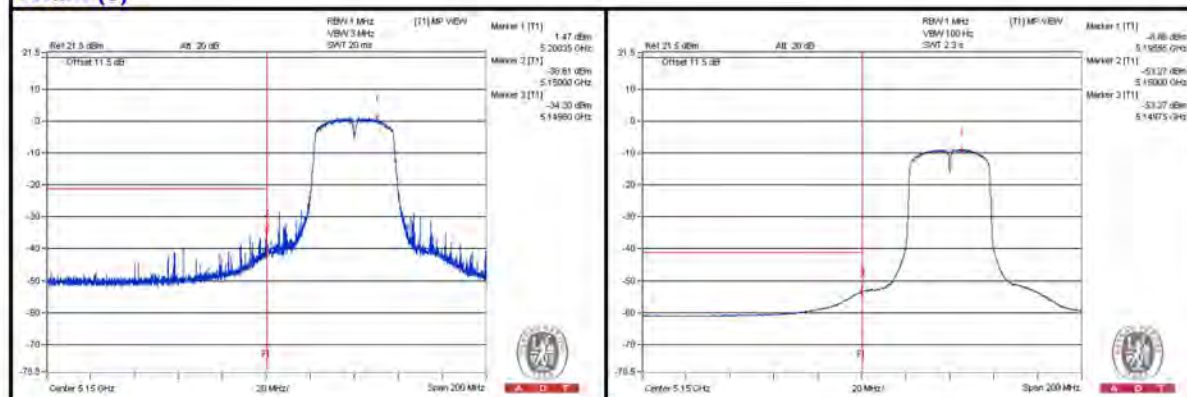

**Chain (1)**

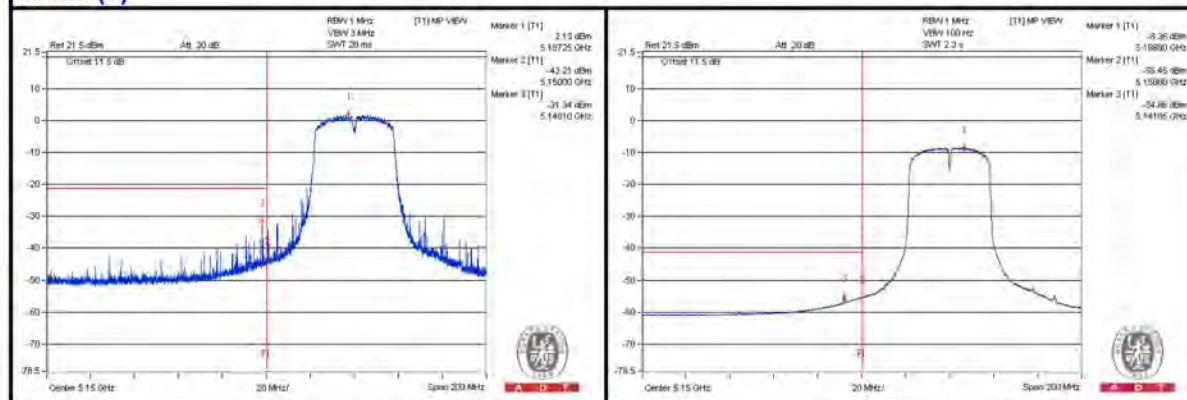

### 802.11ac (VHT40) - Channel 46

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3487.5 PK	55.39	74	-18.61	-49.87	-48.23	6.09	-39.87
2	3484.375 AV	46.51	54	-7.49	-69.71	-54.98	6.09	-48.75
3	6971.875 PK	55.89	74	-18.11	-47.28	-50.12	6.09	-39.37
4	6975 AV	40.31	54	-13.69	-69.45	-61.72	6.09	-54.95
5	10465.625 PK	54.9	74	-19.1	-50.19	-48.83	6.09	-40.36
6	10465.625 AV	38.77	54	-15.23	-66.6	-64.77	6.09	-56.49
7	15685 PK	54.66	74	-19.34	-50.22	-49.24	6.09	-40.6
8	15685 AV	42.63	54	-11.37	-61.41	-62.07	6.09	-52.63


Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

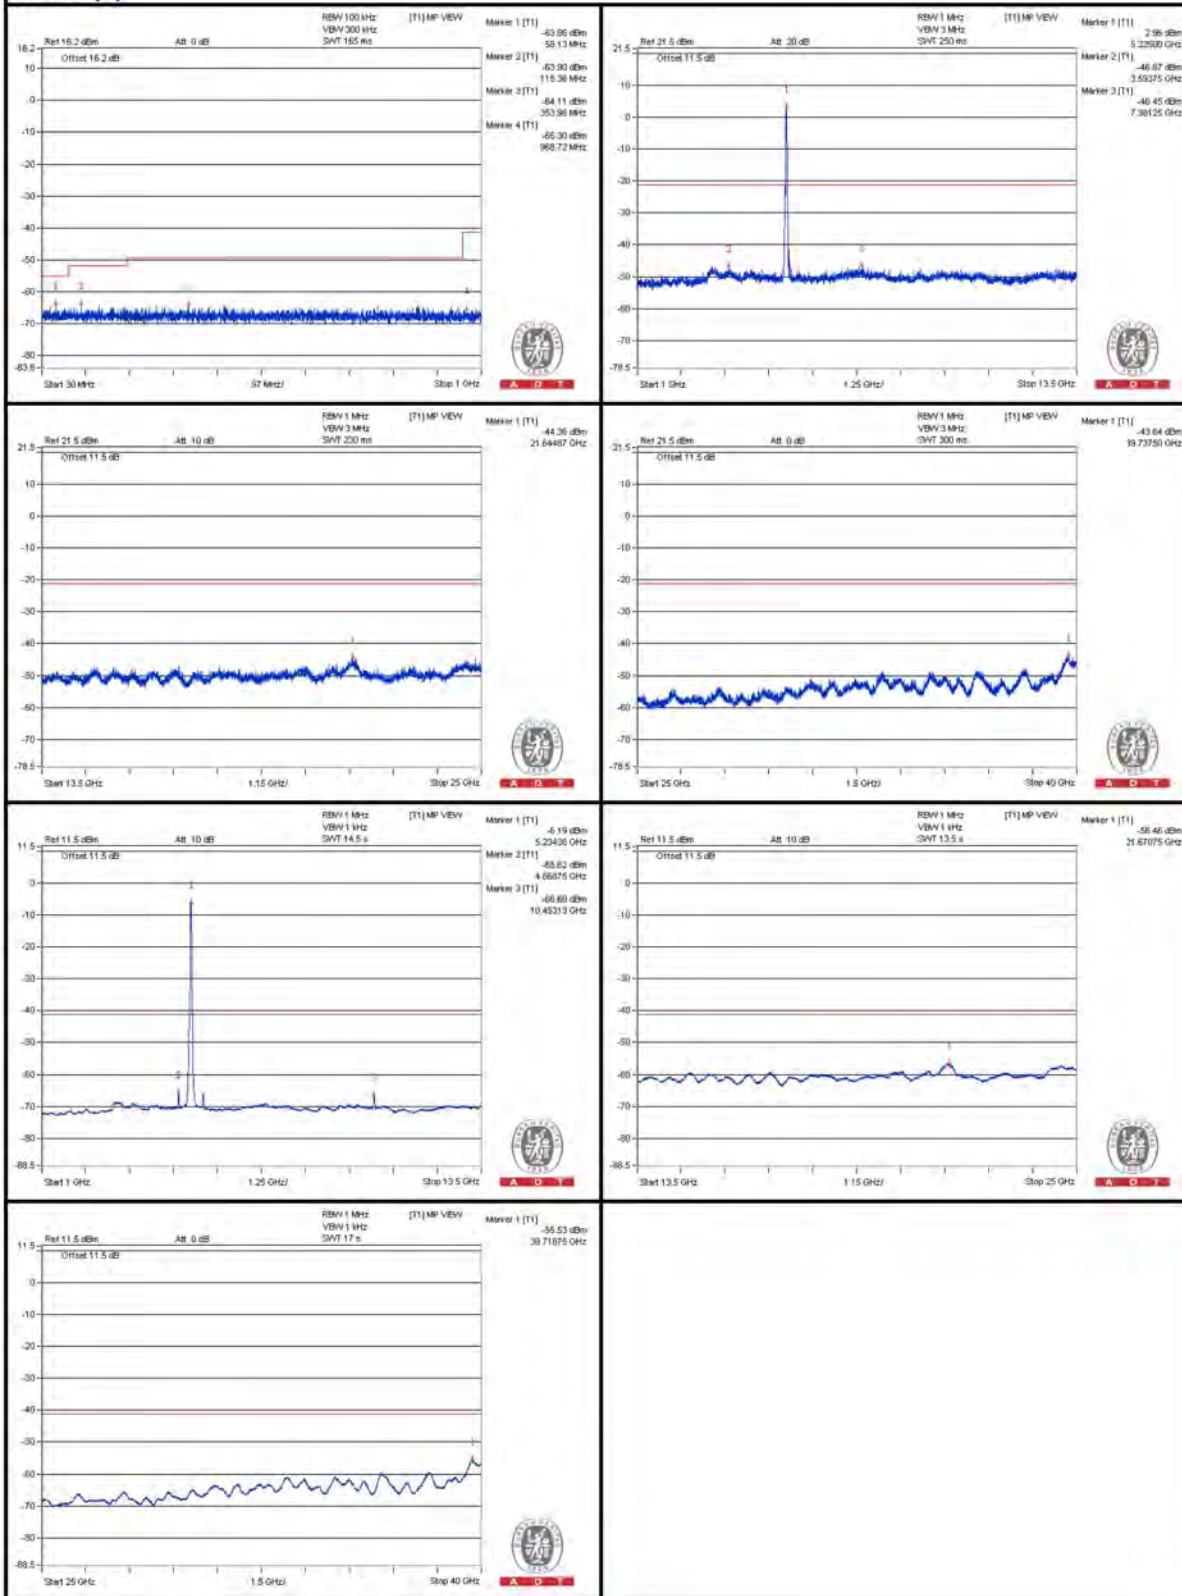

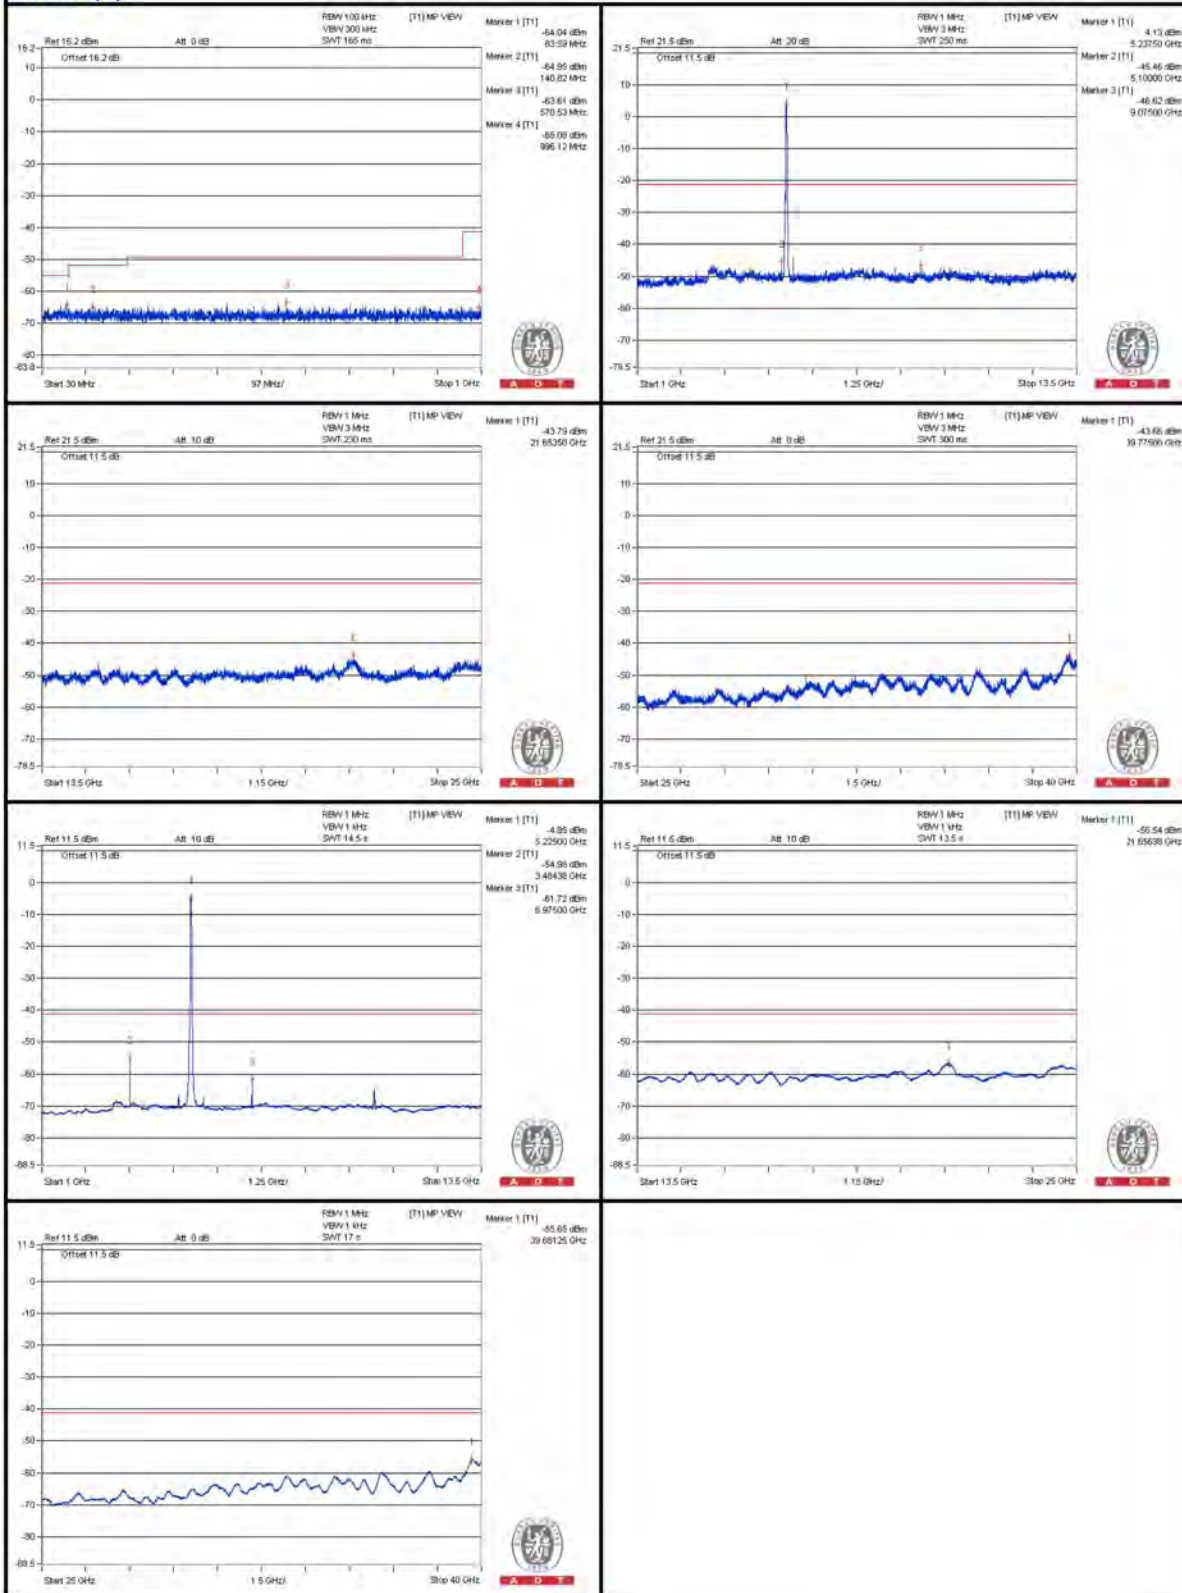**Chain (1)**


### 802.11ac (VHT40) - Channel 54

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3512.5 PK	56.93	74	-17.07	-48.07	-46.88	6.09	-38.33
2	3512.5 AV	41.07	54	-12.93	-68.94	-60.92	6.09	-54.19
3	7028.125 PK	55.83	74	-18.17	-47.64	-49.65	6.09	-39.43
4	7028.125 AV	47.27	54	-6.73	-54.55	-63.93	6.09	-47.99
5	10543.75 PK	55.46	74	-18.54	-48.7	-49.1	6.09	-39.8
6	10540.625 AV	40.04	54	-13.96	-66.2	-63.01	6.09	-55.22
7	15805.75 PK	54.78	74	-19.22	-50.74	-48.66	6.09	-40.48
8	15817.25 AV	43.78	54	-10.22	-60.54	-60.62	6.09	-51.48


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T


### Chain (0)

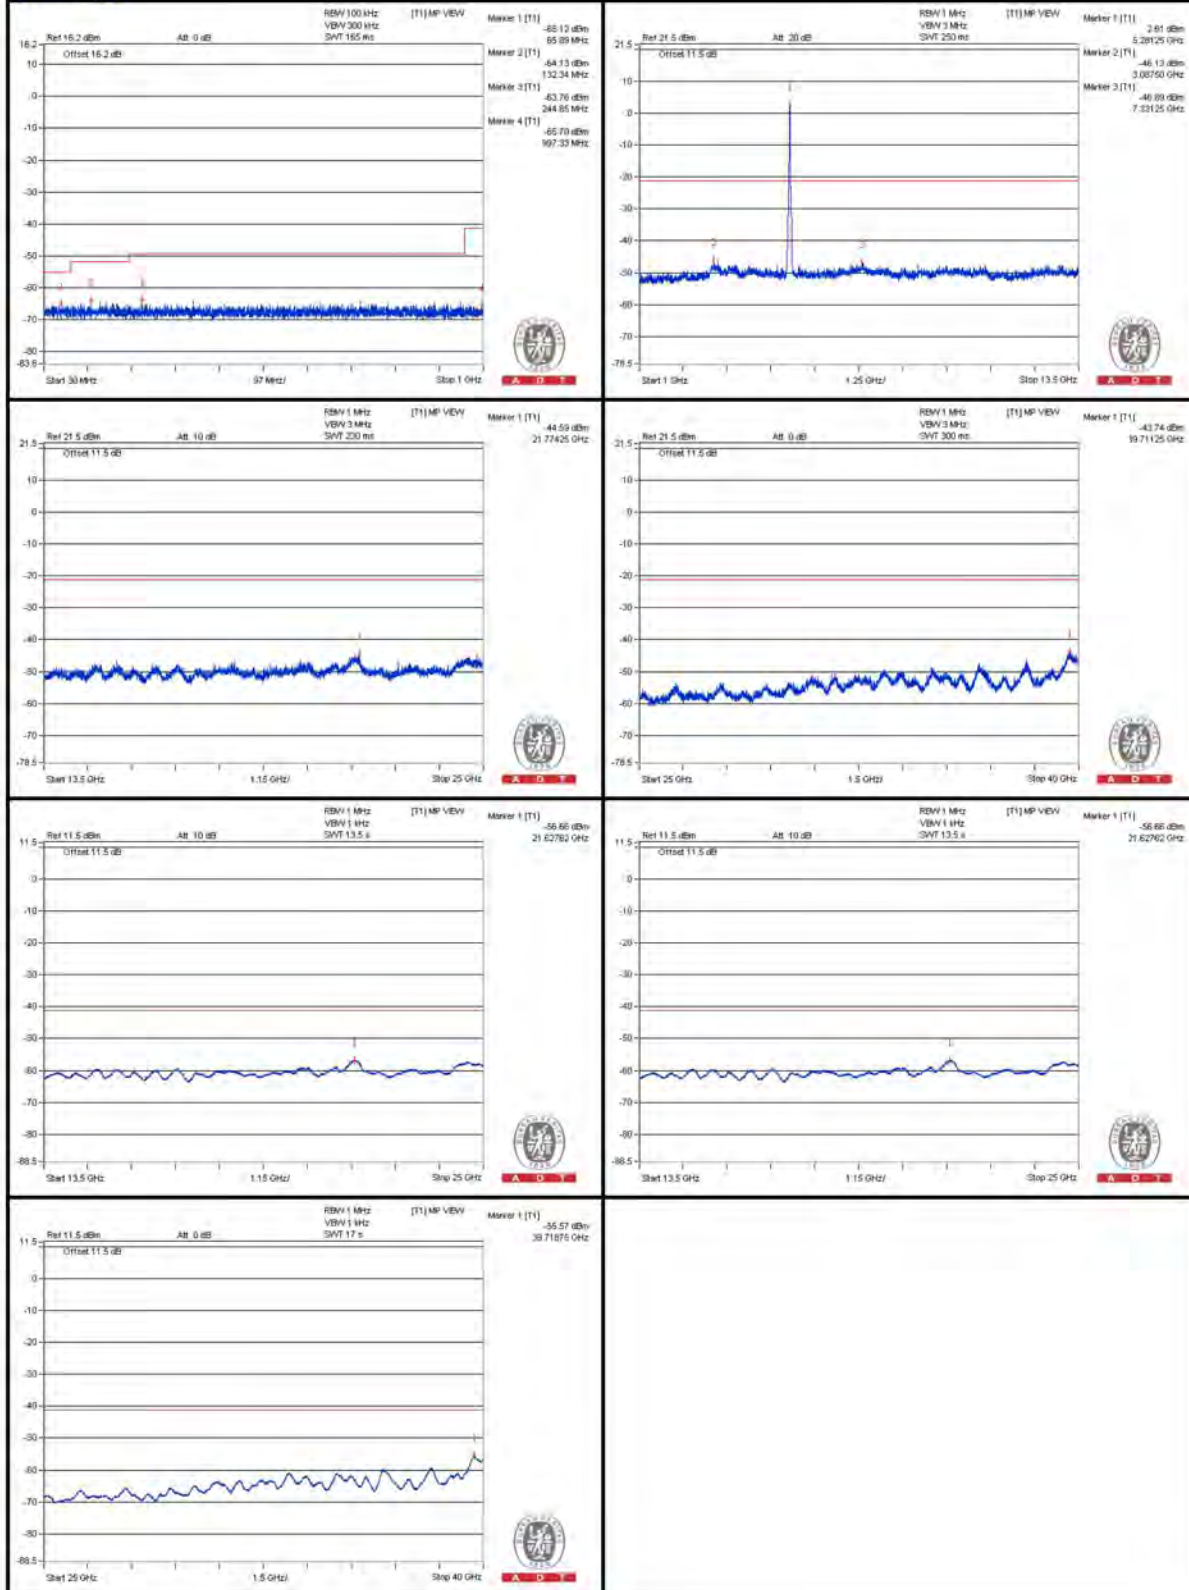



A D T

### Chain (1)

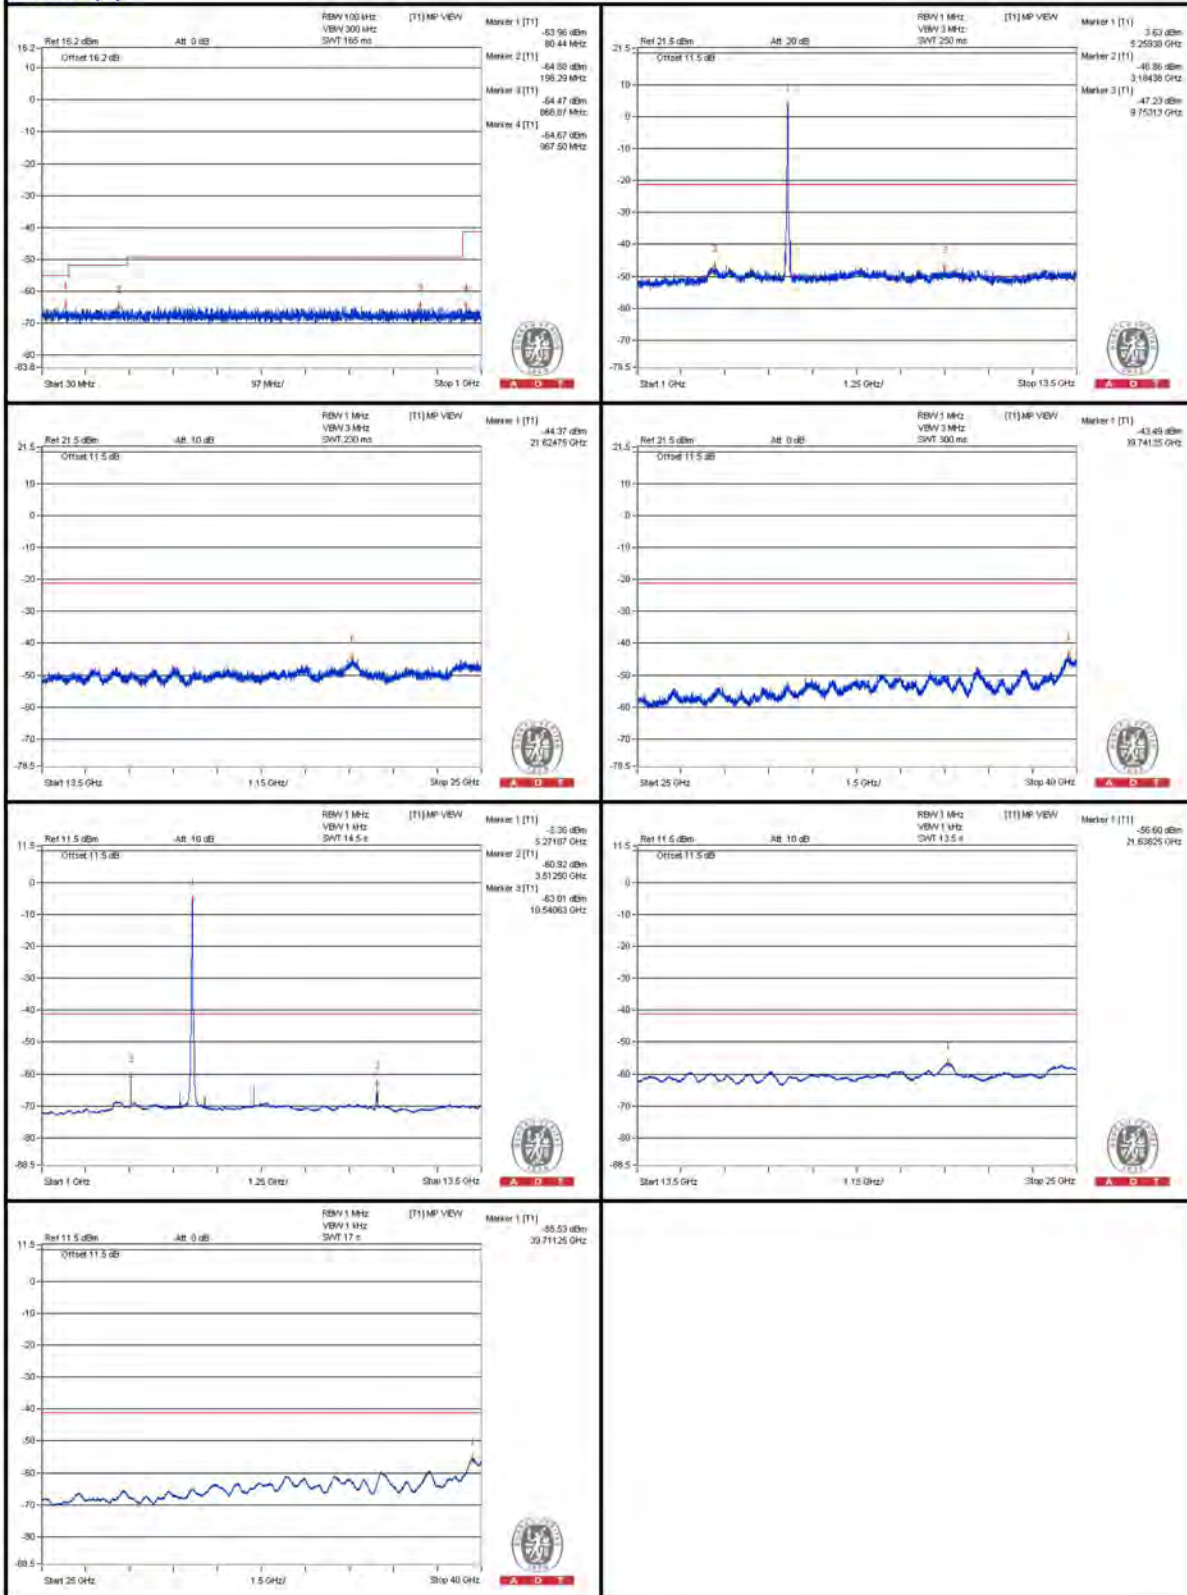

802.11ac (VHT40) - Channel 62

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3550 PK	56.85	74	-17.15	-47.14	-47.91	6.09	-38.41
2	3543.75 AV	35.14	54	-18.86	-68.84	-69.64	6.09	-60.12
3	7081.25 PK	57.36	74	-16.64	-46.31	-47.81	6.09	-37.9
4	7081.25 AV	46.01	54	-7.99	-60.03	-57.14	6.09	-49.25
5	10625 PK	55.16	74	-18.84	-48.83	-49.61	6.09	-40.1
6	10621.875 AV	37.93	54	-16.07	-67.4	-65.63	6.09	-57.33
7	15929.375 PK	54.27	74	-19.73	-49.4	-50.92	6.09	-40.99
8	15923.625 AV	43.47	54	-10.53	-60.37	-61.48	6.09	-51.79

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.






A D T

### Chain (0)

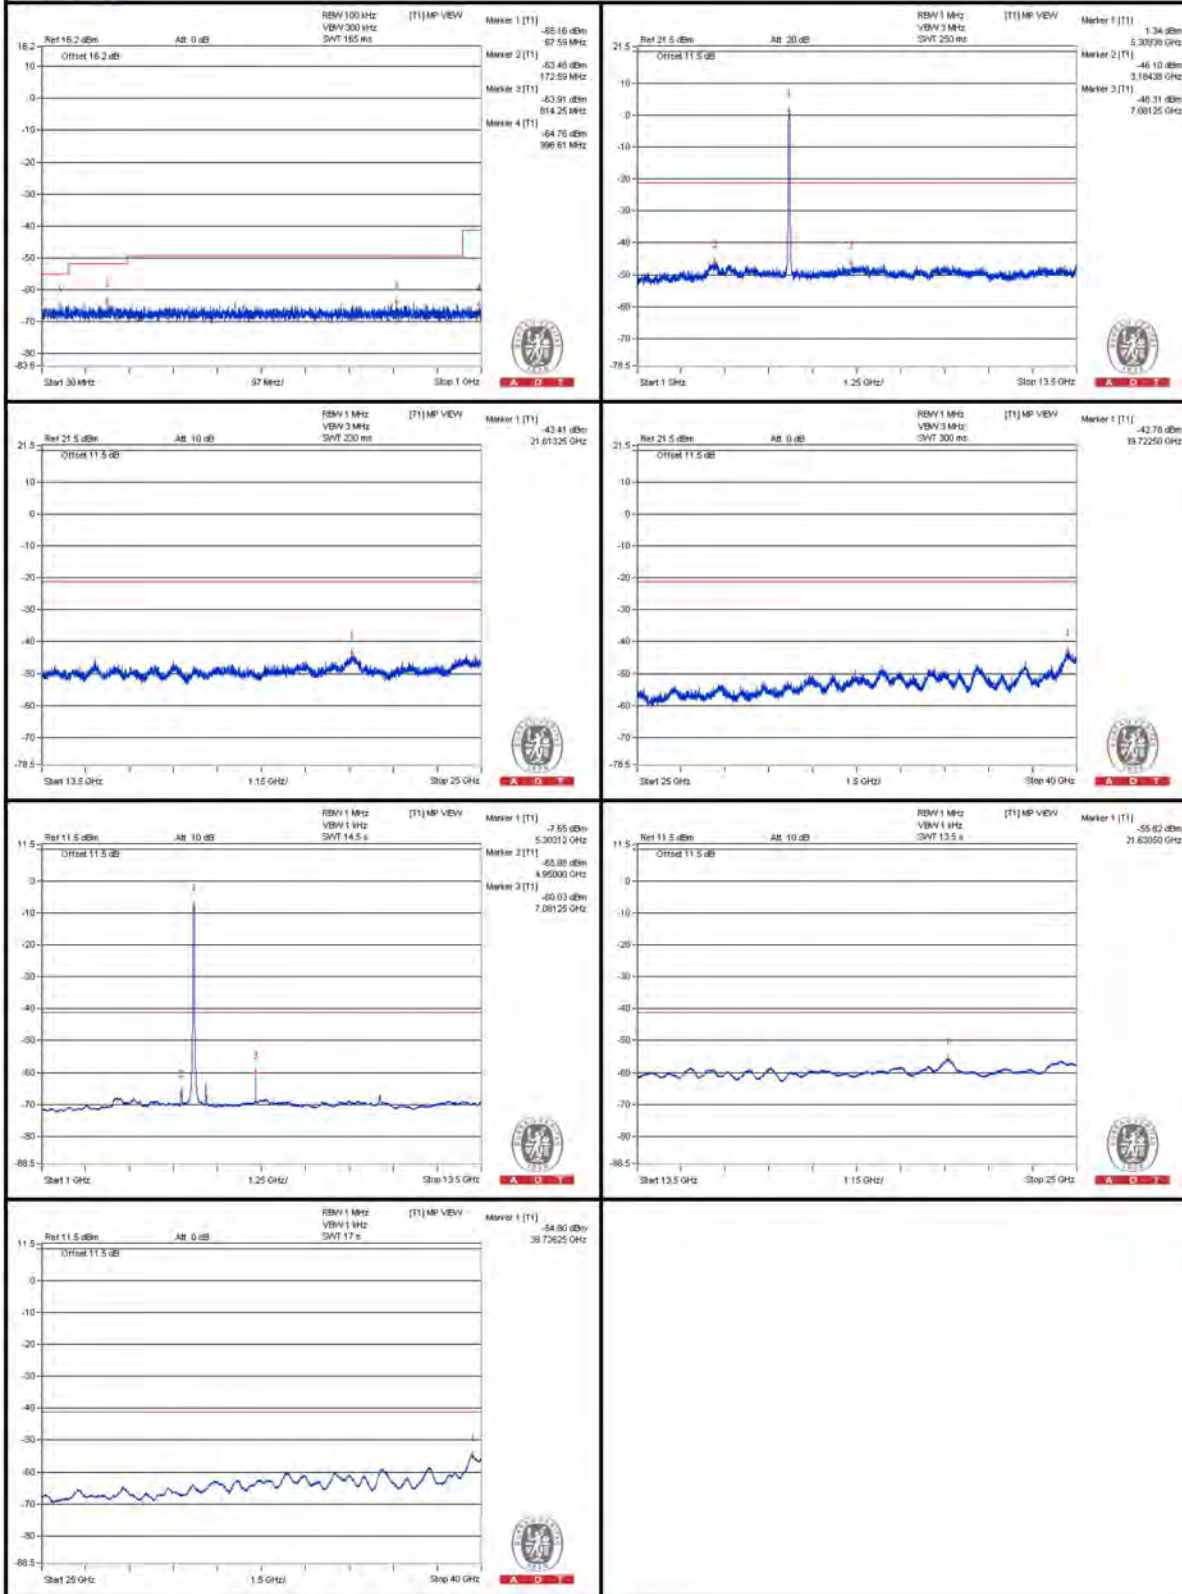

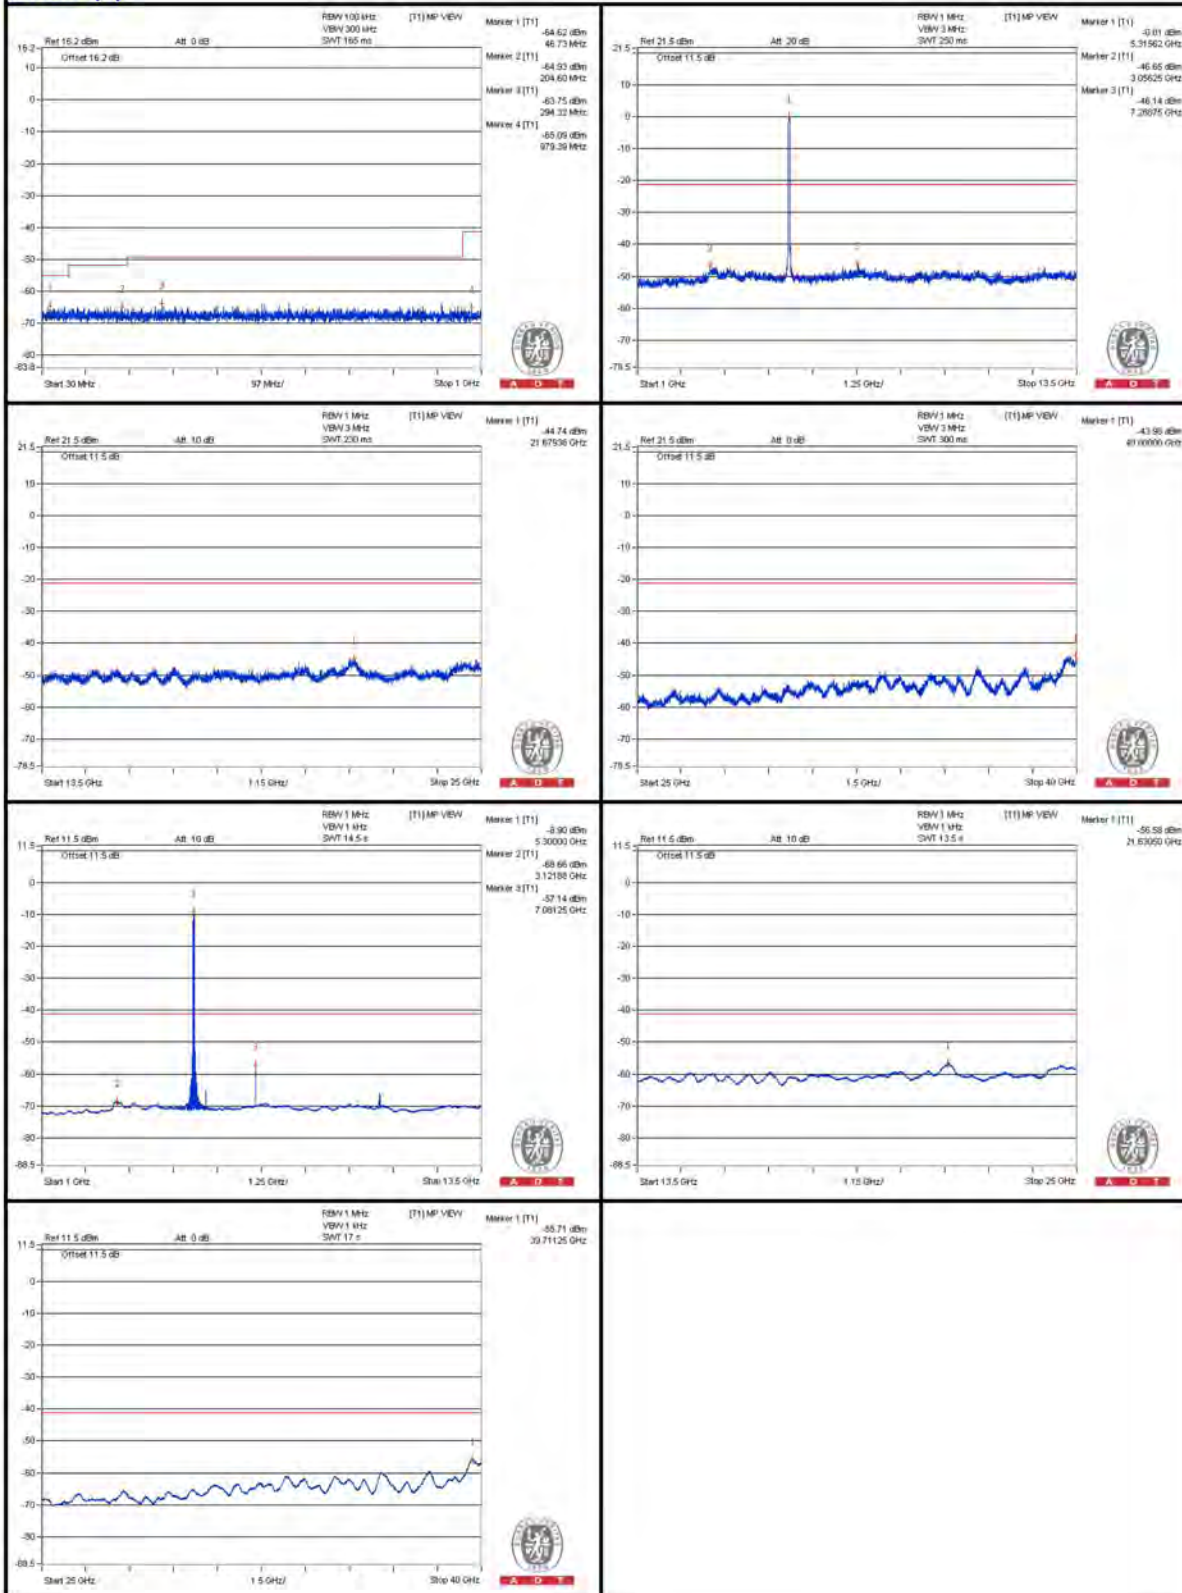**Chain (1)**


**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.05 PK	72.03	74	-1.97	-29.58	-41.64	6.09	-23.23
2	5350 AV	56.4	54	* 2.4	-46.02	-51.55	6.09	-38.86

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)

**Chain (0)**

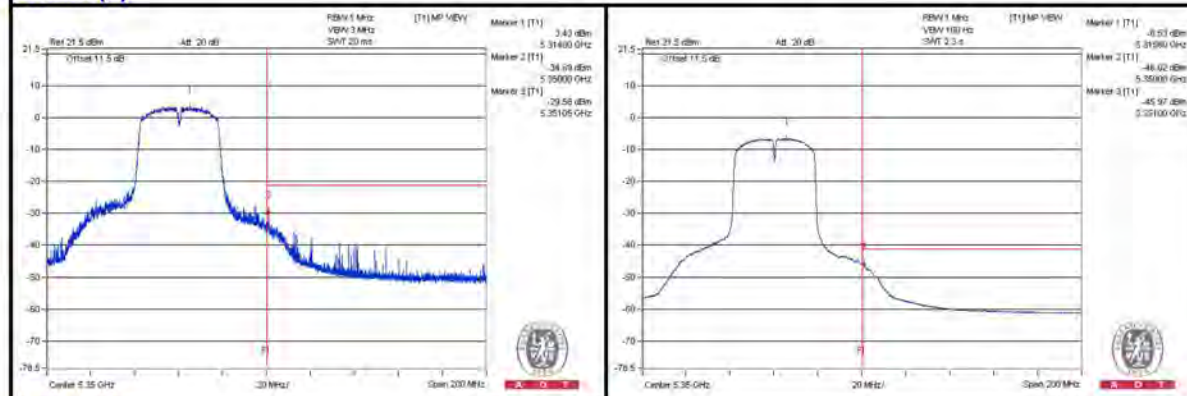

**Chain (1)**

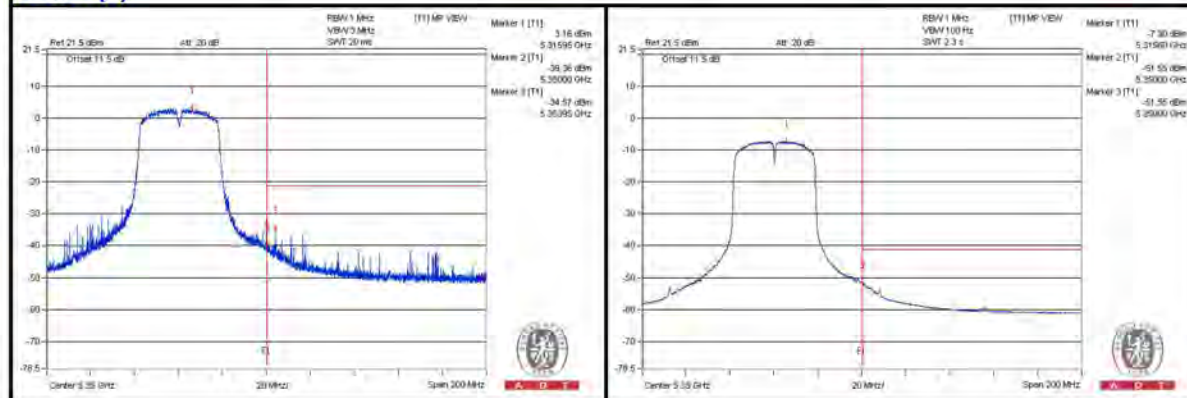


### 802.11ac (VHT40) - Channel 102

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3671.875 PK	58.71	74	-15.29	-48.63	-46.33	7.77	-36.55
2	3671.875 AV	52.3	54	-1.7	-65.57	-50.88	7.77	-42.96
3	7346.875 PK	58.73	74	-15.27	-46.57	-48.2	7.77	-36.53
4	7346.875 AV	51.08	54	-2.92	-52.06	-68.02	7.77	-44.18
5	11028.125 PK	56.22	74	-17.78	-48.94	-50.93	7.77	-39.04
6	11018.75 AV	38.41	54	-15.59	-67.56	-67.7	7.77	-56.85
7	16527.375 PK	56.29	74	-17.71	-49.49	-50.03	7.77	-38.97
8	16524.5 AV	45.24	54	-8.76	-60.26	-61.42	7.77	-50.02

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

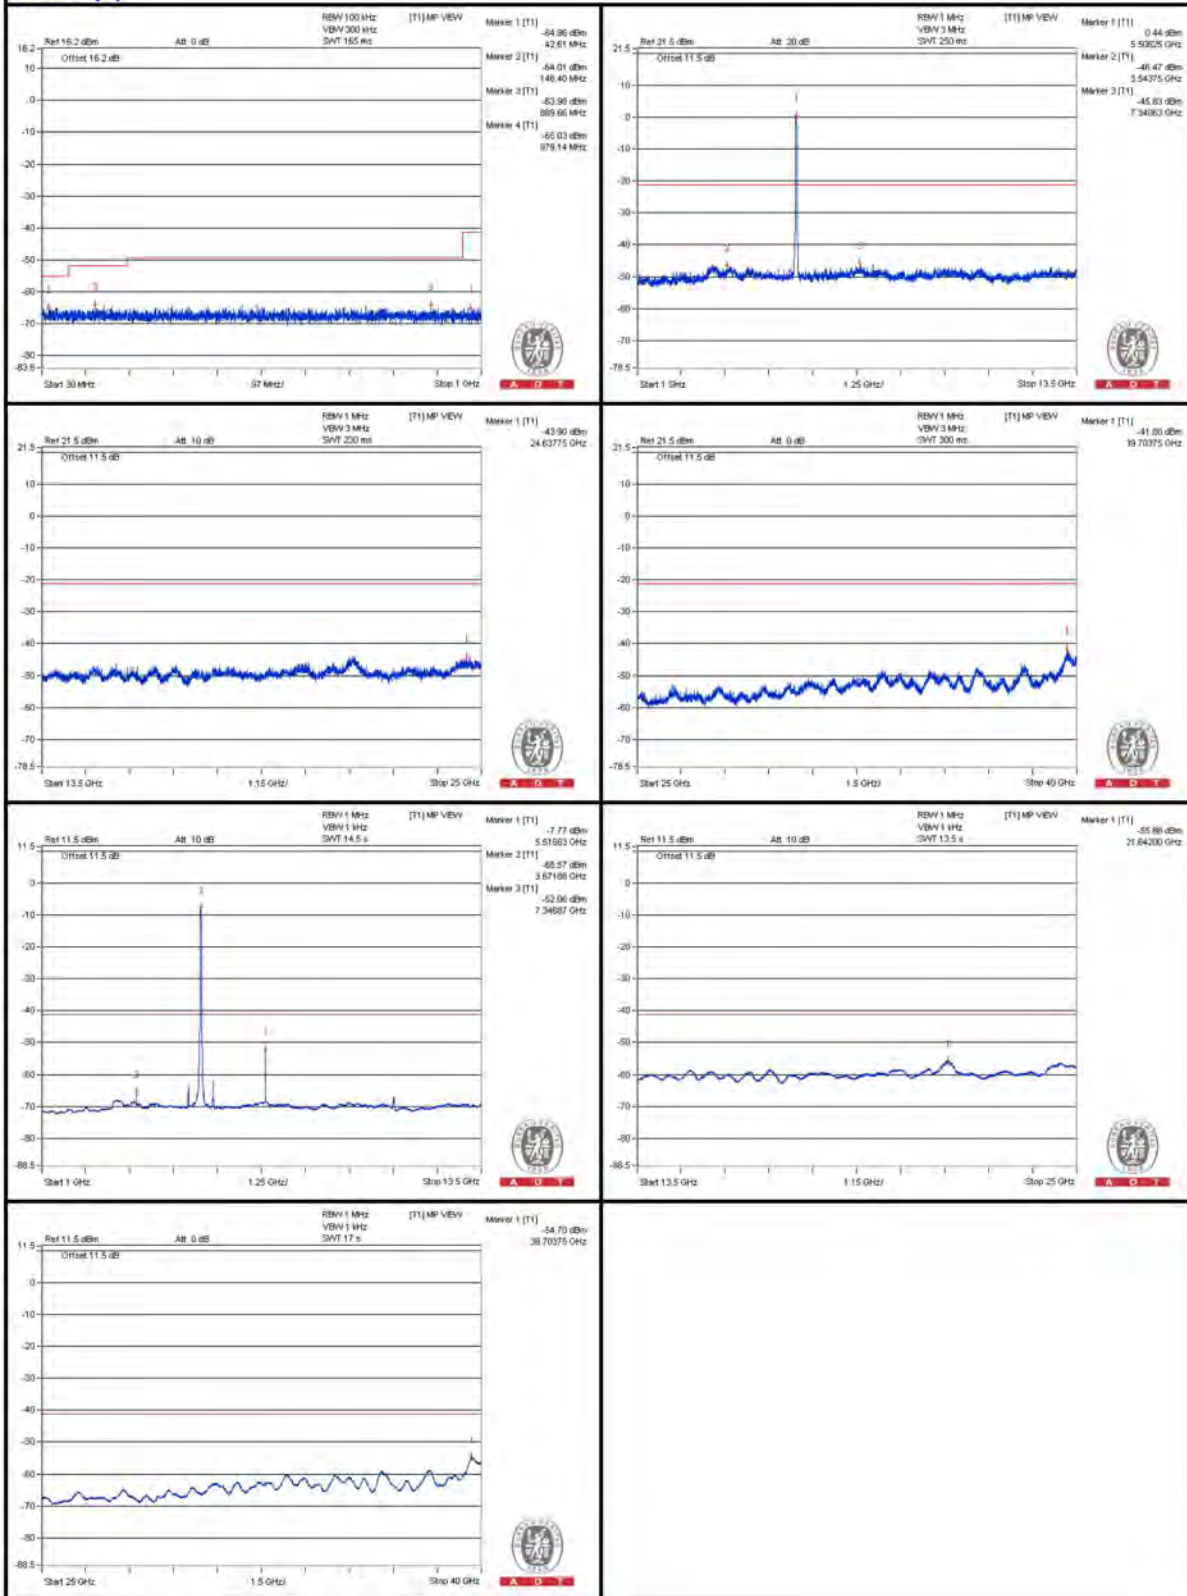**Chain (0)**




A D T

### Chain (1)

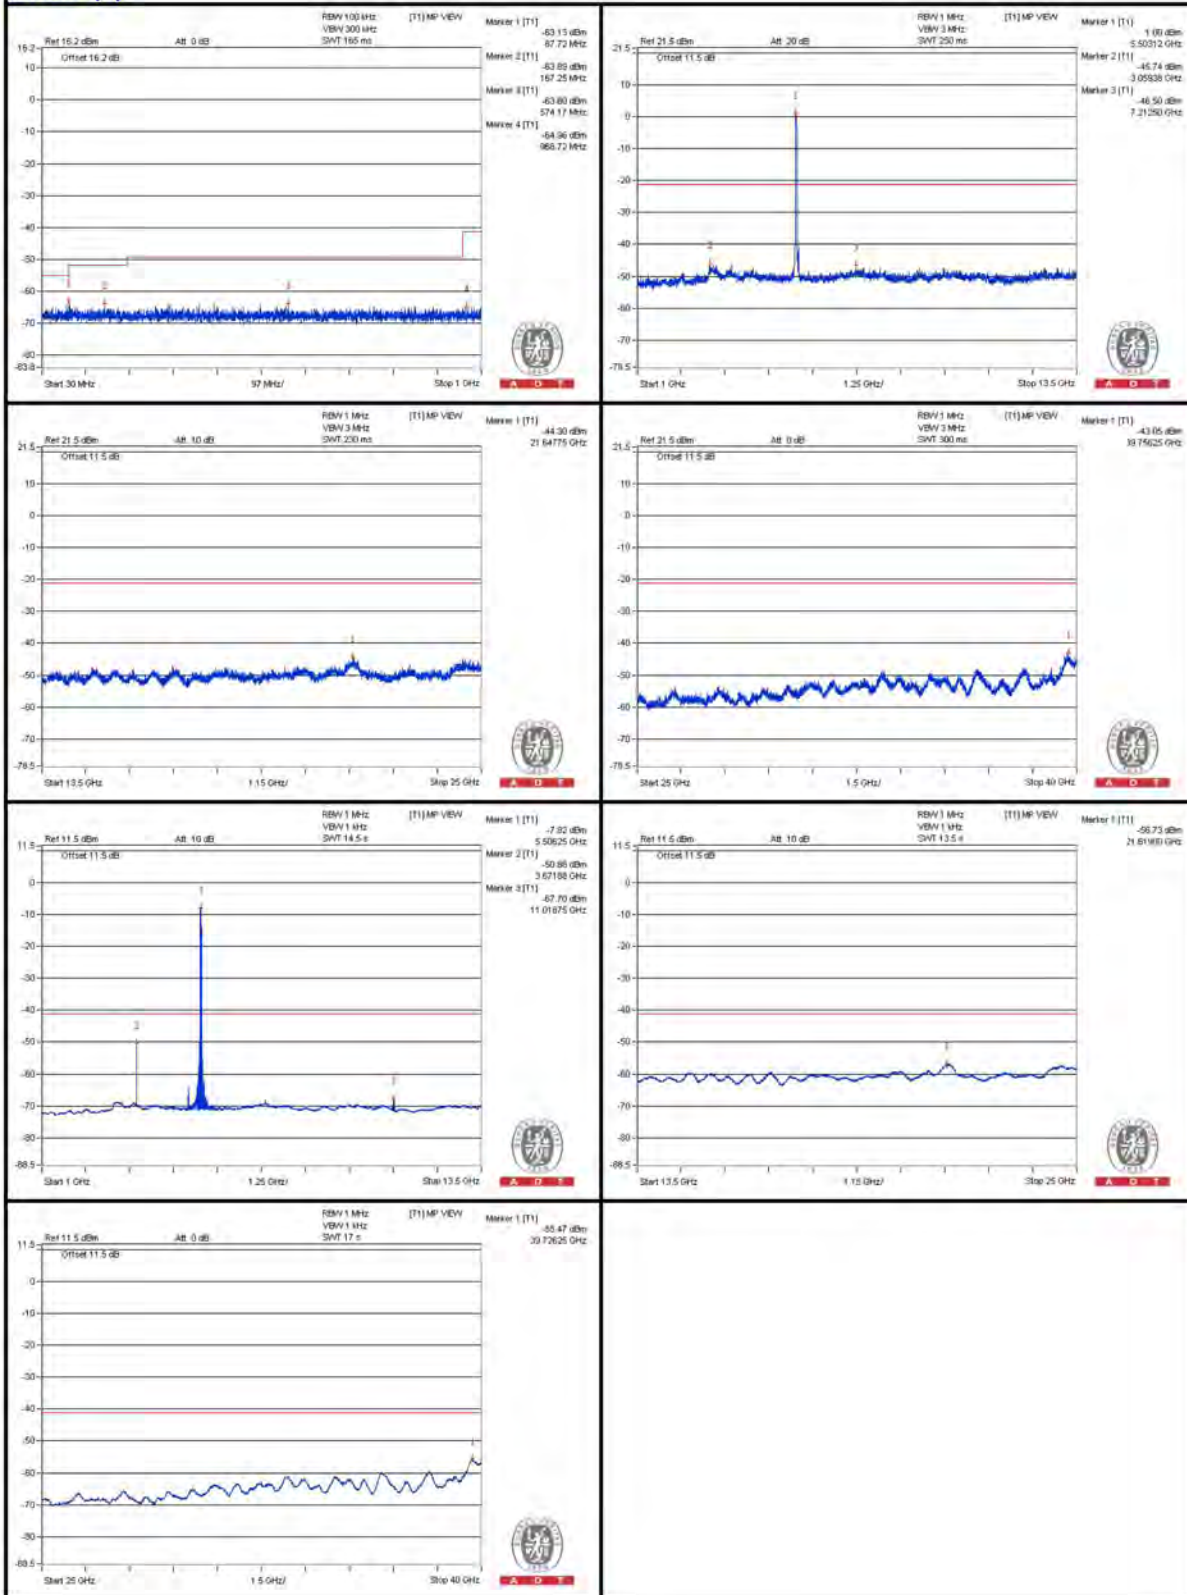

**Bandedge table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5468.375 PK	72.25	74	-1.75	-38.31	-31.62	7.77	-23.01
2	5469.4375 AV	55.83	54	* 1.83	-48.44	-53.26	7.77	-39.43


Note :

$$\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$$


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

**Chain (0)**

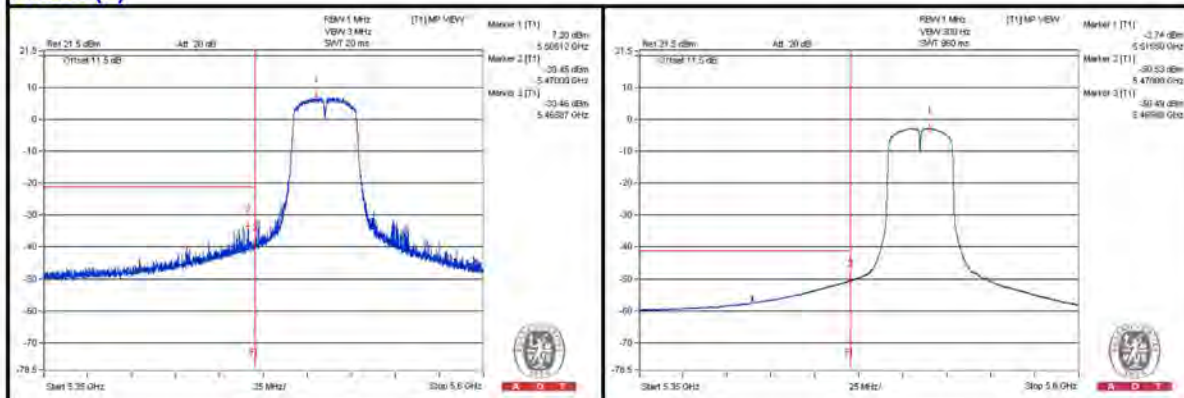

**Chain (1)**

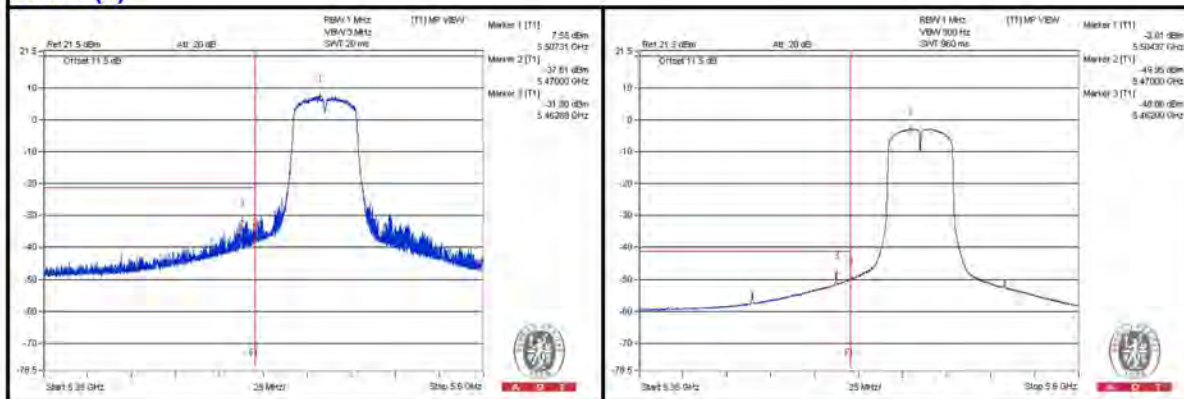

802.11ac (VHT40) - Channel 118

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3725 PK	57.71	74	-16.29	-49.26	-47.57	7.77	-37.55
2	3725 AV	50.59	54	-3.41	-65.25	-52.67	7.77	-44.67
3	7443.75 PK	57.47	74	-16.53	-49.32	-47.93	7.77	-37.79
4	7453.125 AV	48.08	54	-5.92	-55.81	-62.41	7.77	-47.18
5	11178.125 PK	56.64	74	-17.36	-49.19	-49.63	7.77	-38.62
6	11181.25 AV	40.08	54	-13.92	-67.27	-64.95	7.77	-55.18
7	16774.625 PK	55.3	74	-18.7	-50.78	-50.7	7.77	-39.96
8	16777.5 AV	44.43	54	-9.57	-61.74	-61.48	7.77	-50.83

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.





A D T


### Chain (0)

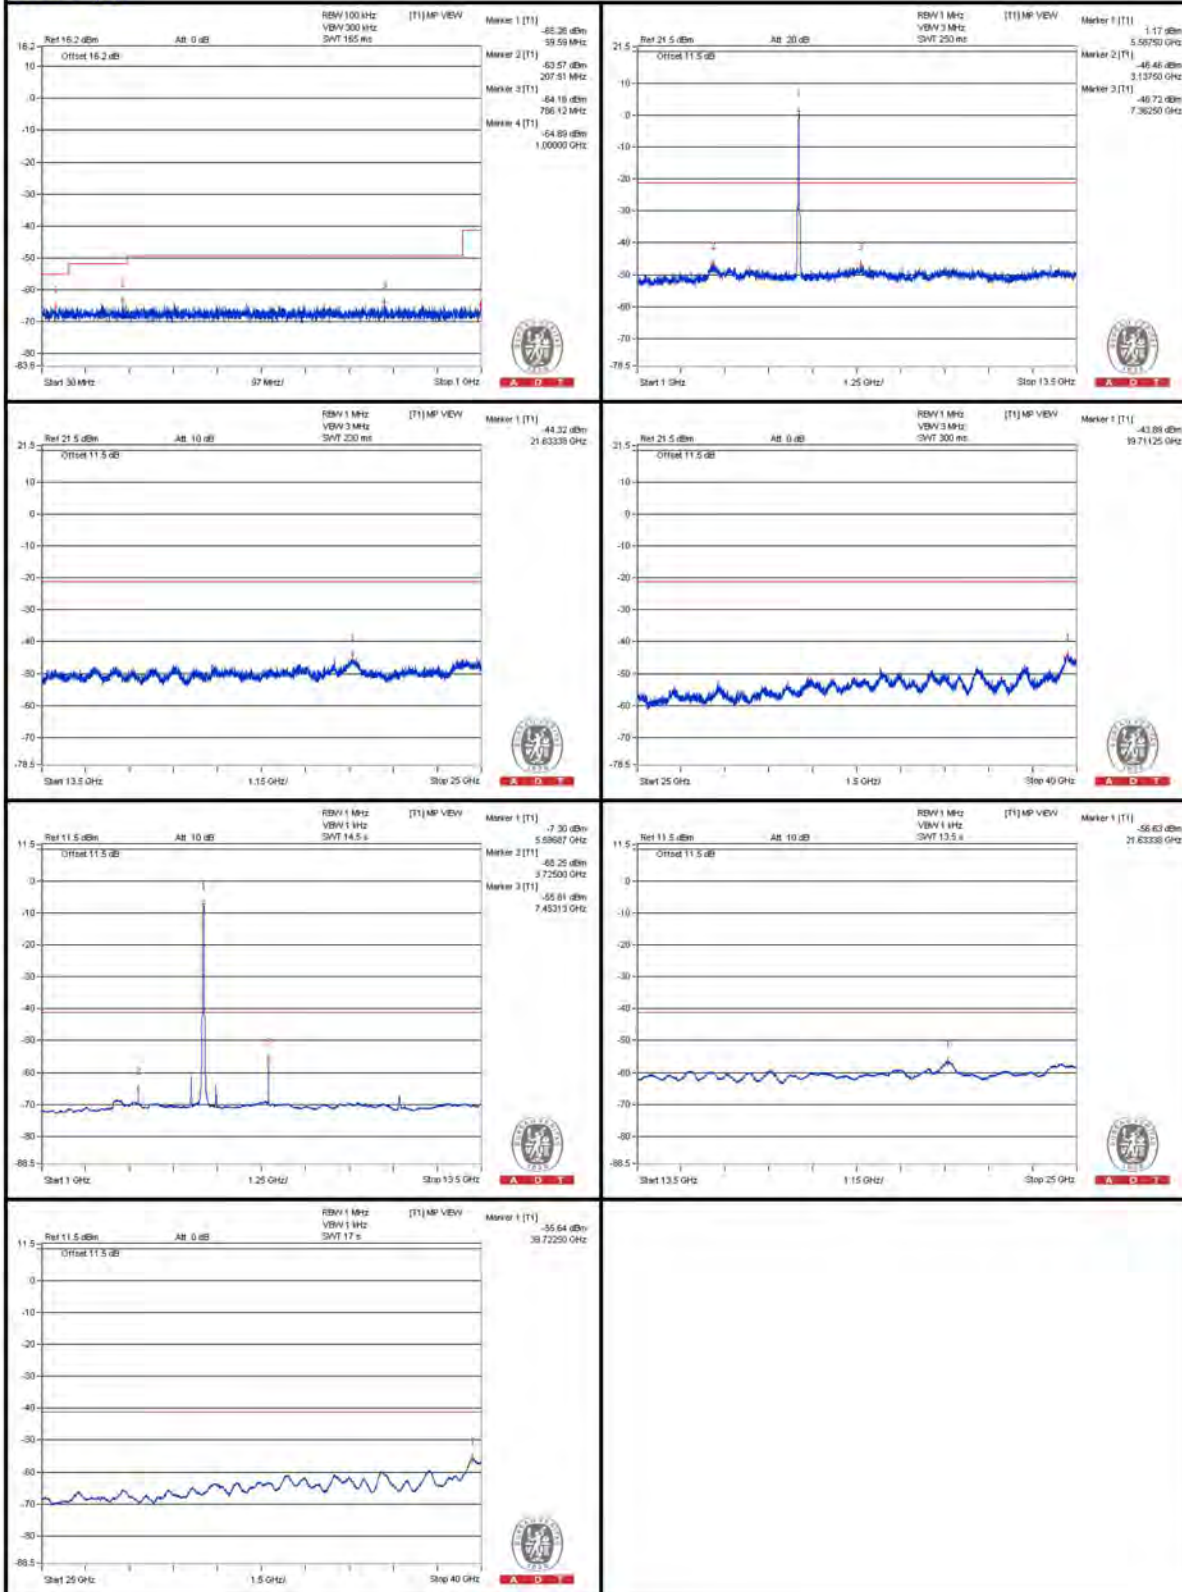



A D T

### Chain (1)

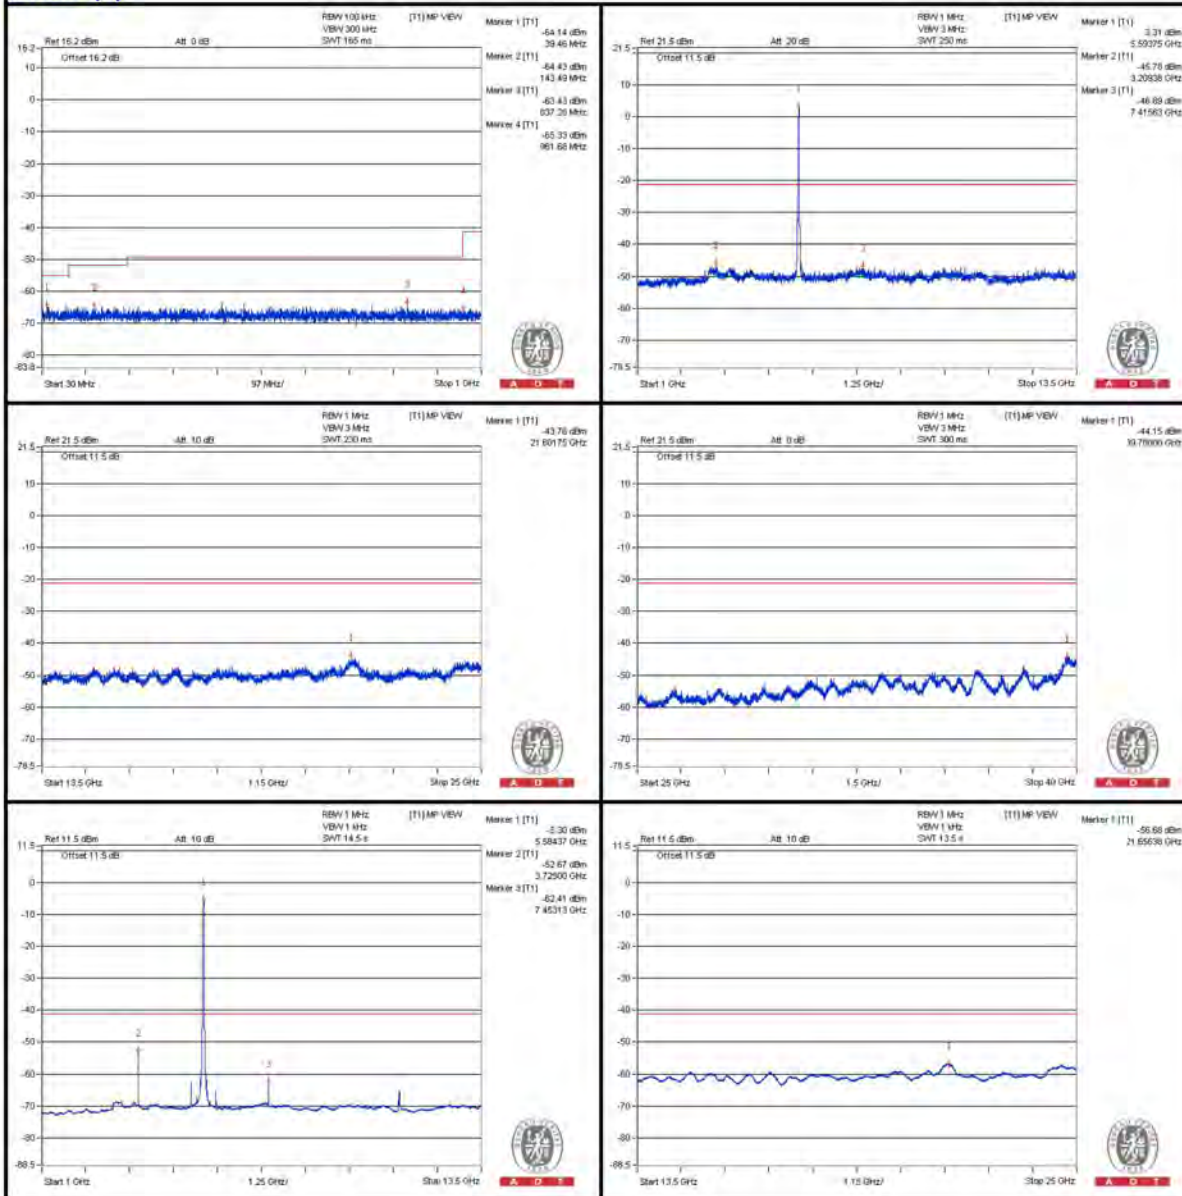

### 802.11ac (VHT40) - Channel 134

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3778.125 PK	58.69	74	-15.31	-48.5	-46.44	7.77	-36.57
2	3778.125 AV	50.78	54	-3.22	-61.81	-52.76	7.77	-44.48
3	7559.375 PK	57.27	74	-16.73	-48.14	-49.5	7.77	-37.99
4	7559.375 AV	48.18	54	-5.82	-55.8	-61.94	7.77	-47.08
5	11334.375 PK	55.92	74	-18.08	-49.86	-50.39	7.77	-39.34
6	11340.625 AV	39.15	54	-14.85	-67.83	-66.11	7.77	-56.11
7	17016.125 PK	58.28	74	-15.72	-46.95	-48.75	7.77	-36.98
8	17001.75 AV	46.49	54	-7.51	-59.47	-59.63	7.77	-48.77

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.




A D T

### Chain (0)

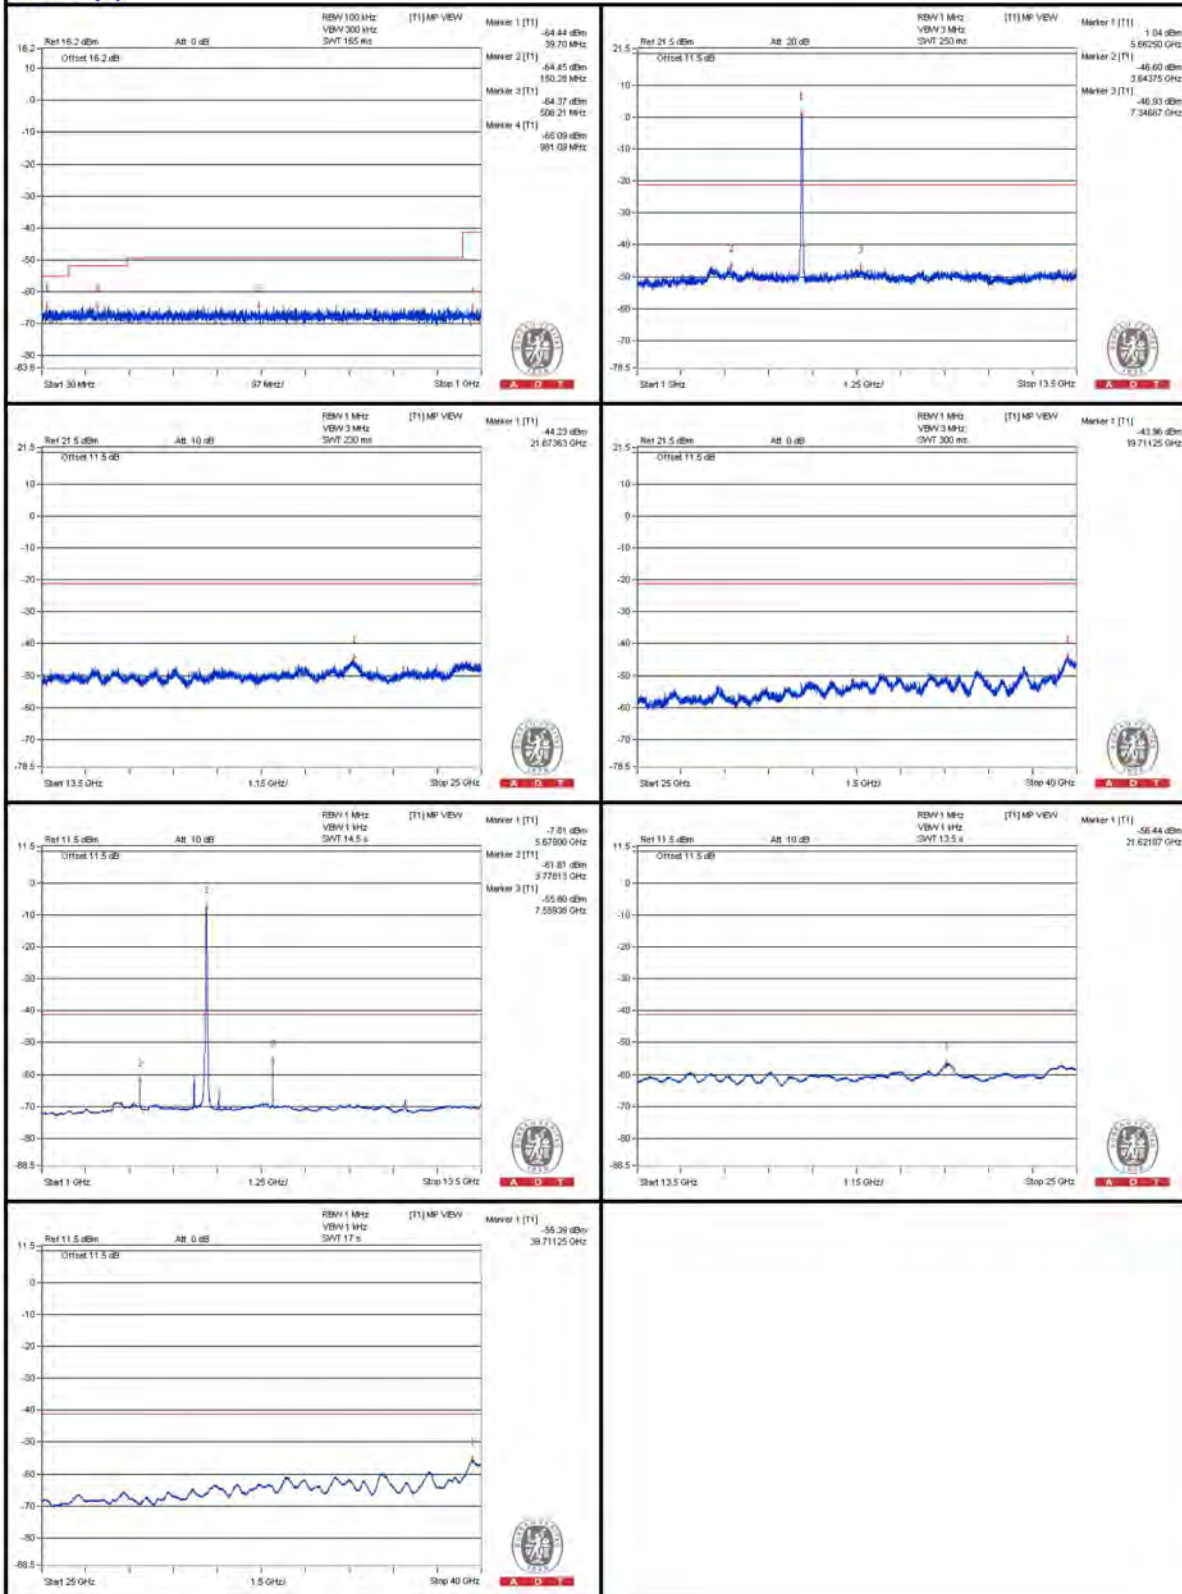

**Chain (1)**

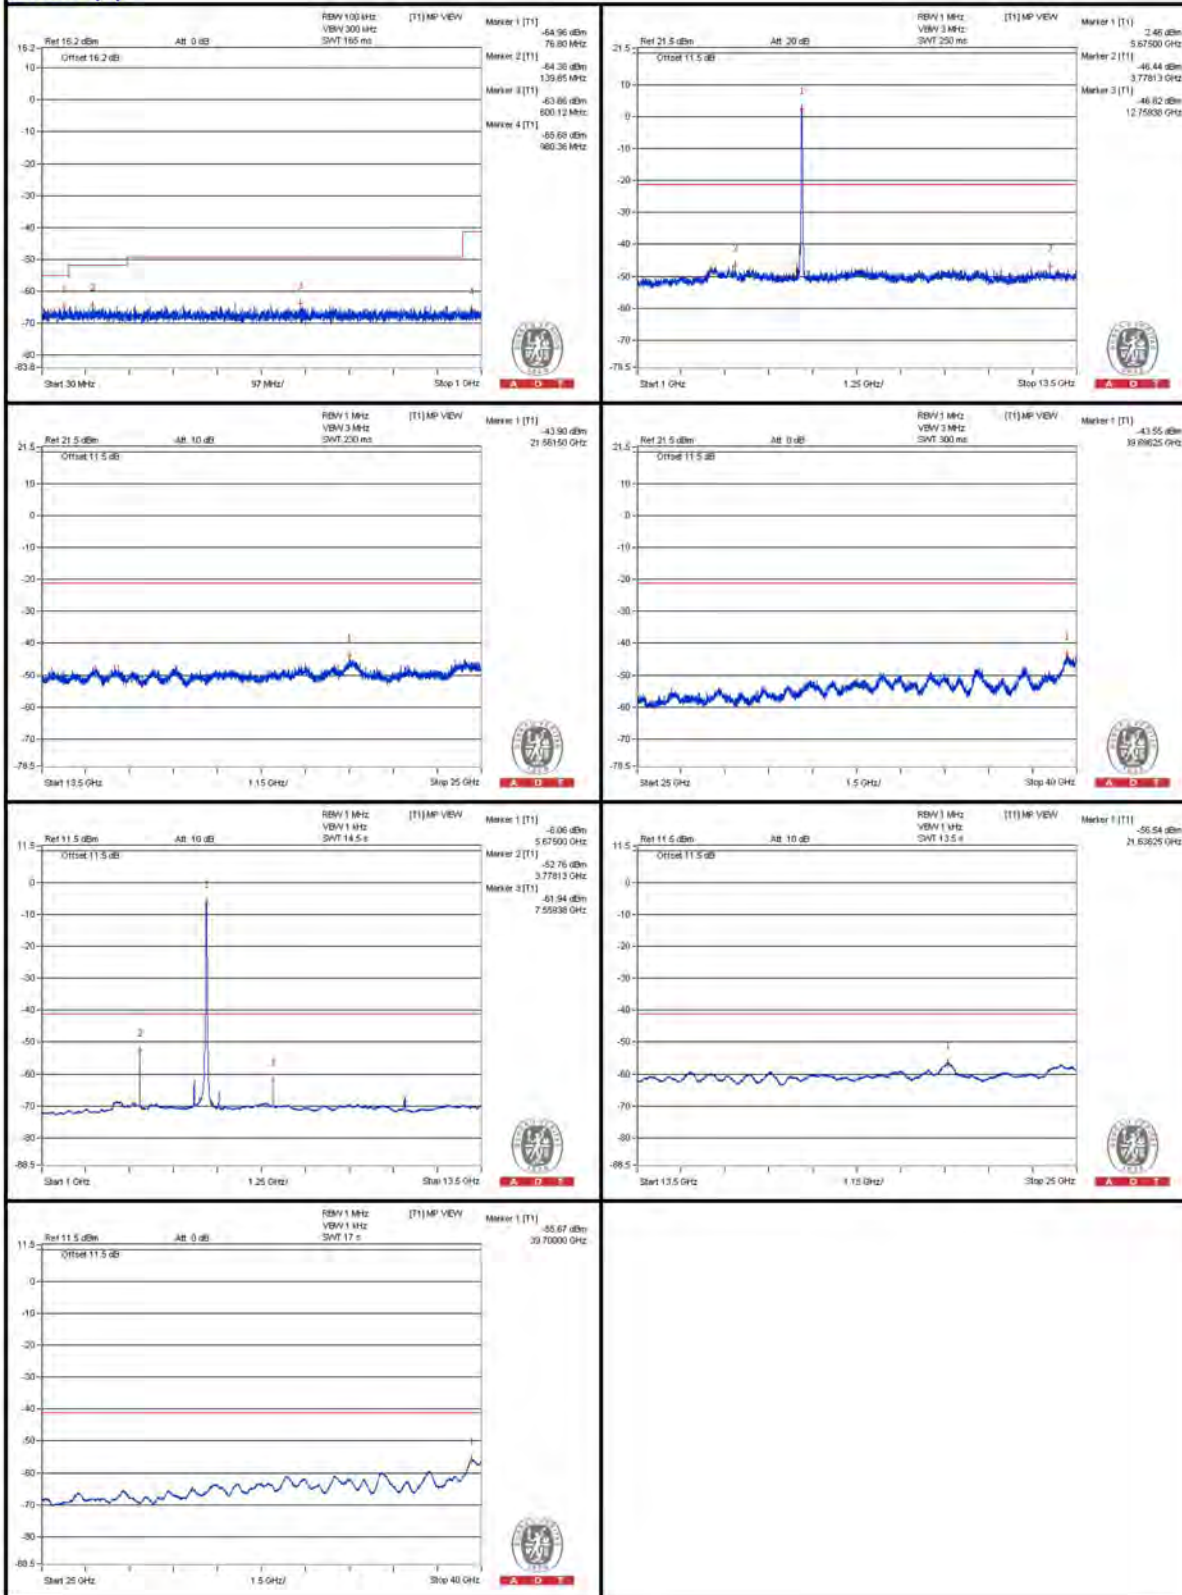

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5728.675 PK	66.16	74	-7.84	-47.22	-37.29	7.77	-29.1
2	5725 AV	49.98	54	-4.02	-56.29	-55.85	7.77	-45.28

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

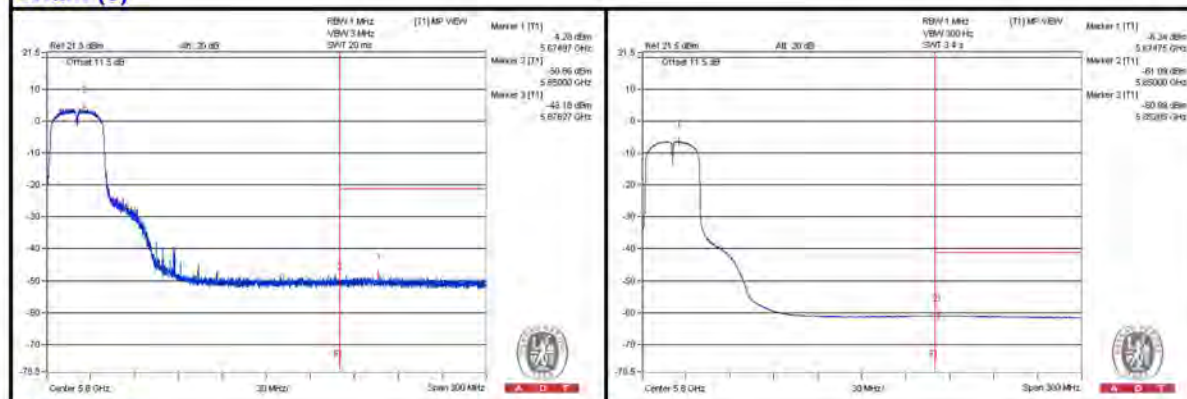

**Chain (1)**

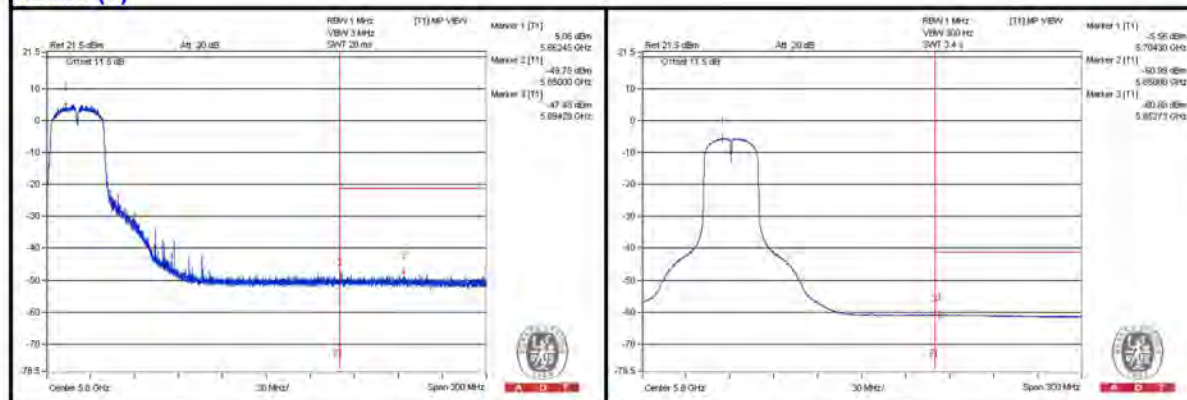

802.11ac (VHT40) - Channel 142

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3806.25 PK	56.89	74	-17.11	-50.65	-48.04	7.77	-38.37
2	3806.25 AV	48.56	54	-5.44	-64.71	-54.9	7.77	-46.7
3	7621.875 PK	57.42	74	-16.58	-49.59	-47.82	7.77	-37.84
4	7612.5 AV	46.96	54	-7.04	-56.37	-67.89	7.77	-48.3
5	11425 PK	56.06	74	-17.94	-50.02	-49.95	7.77	-39.2
6	11421.875 AV	38.32	54	-15.68	-68.83	-66.83	7.77	-56.94
7	17128.25 PK	55.24	74	-18.76	-51.15	-50.47	7.77	-40.02
8	17125.375 AV	44.84	54	-9.16	-61.34	-61.07	7.77	-50.42


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

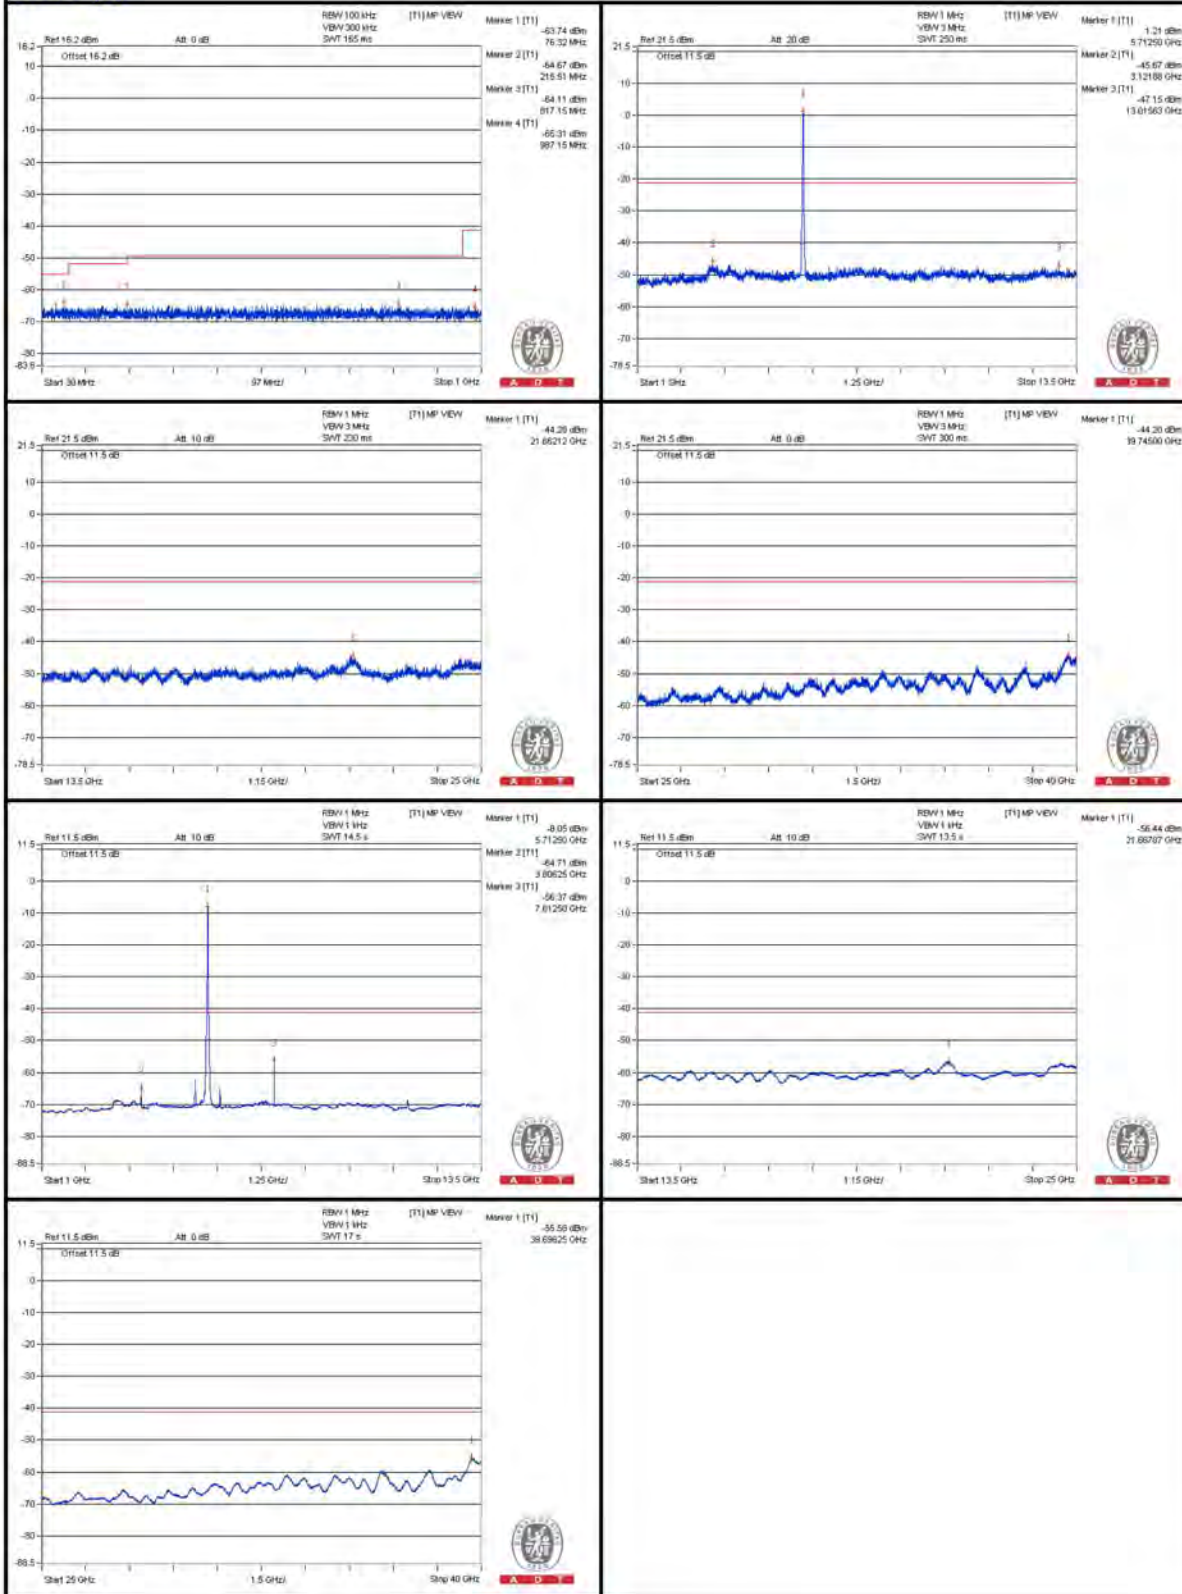






A D T

### Chain (1)

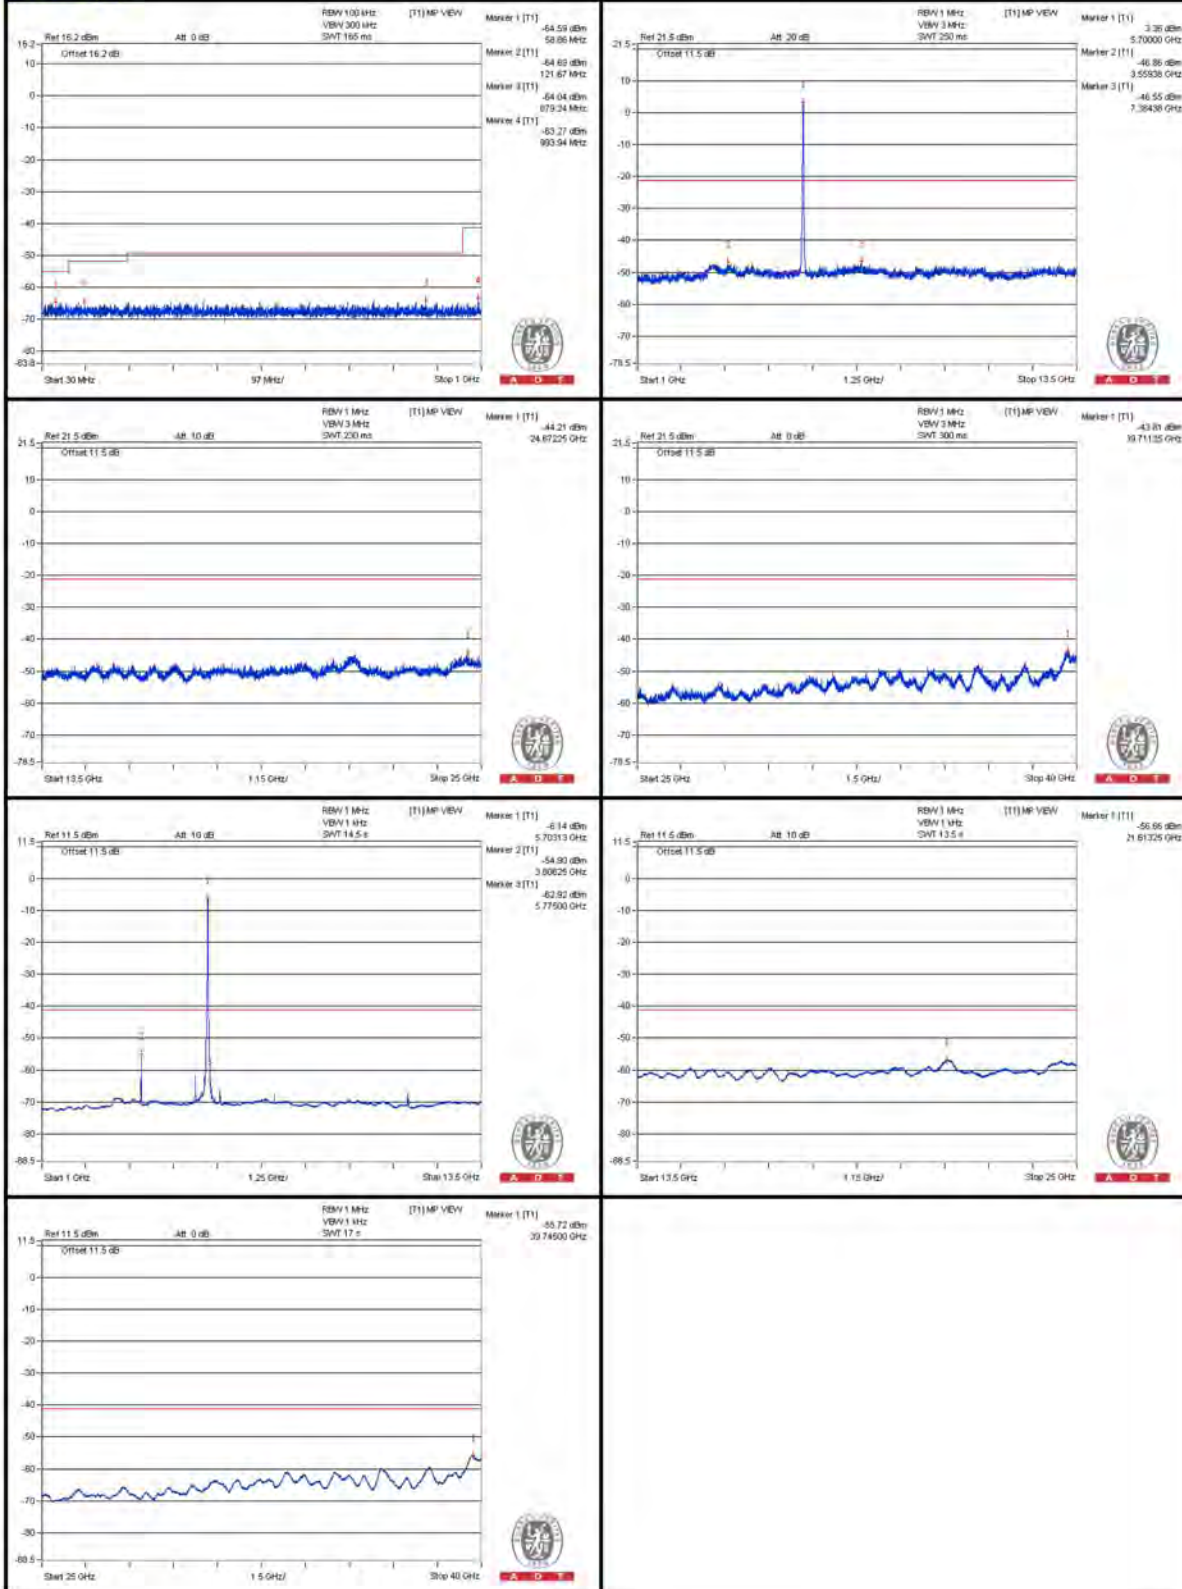

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5851.825 PK	57.28	74	-16.72	-49.07	-48.47	7.77	-37.98
2	5852.65 AV	45.09	54	-8.91	-61.02	-60.89	7.77	-50.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

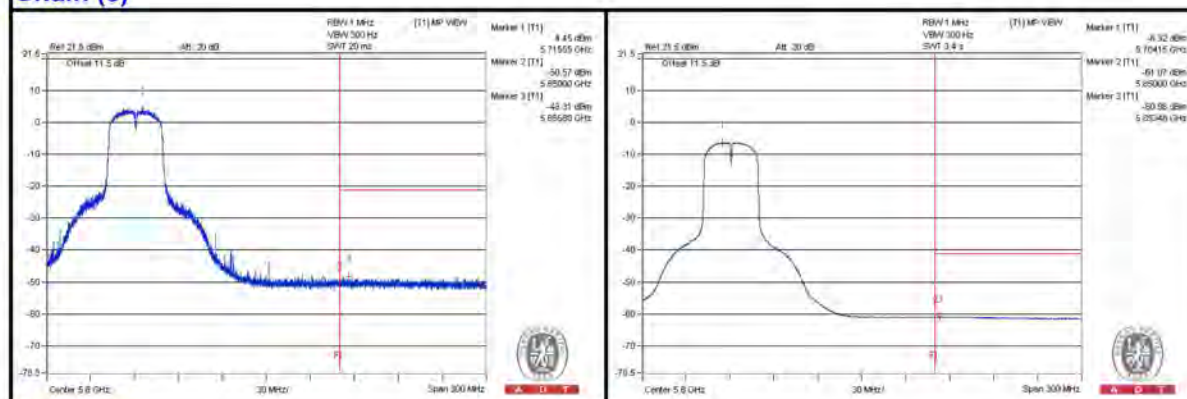

**Chain (1)**

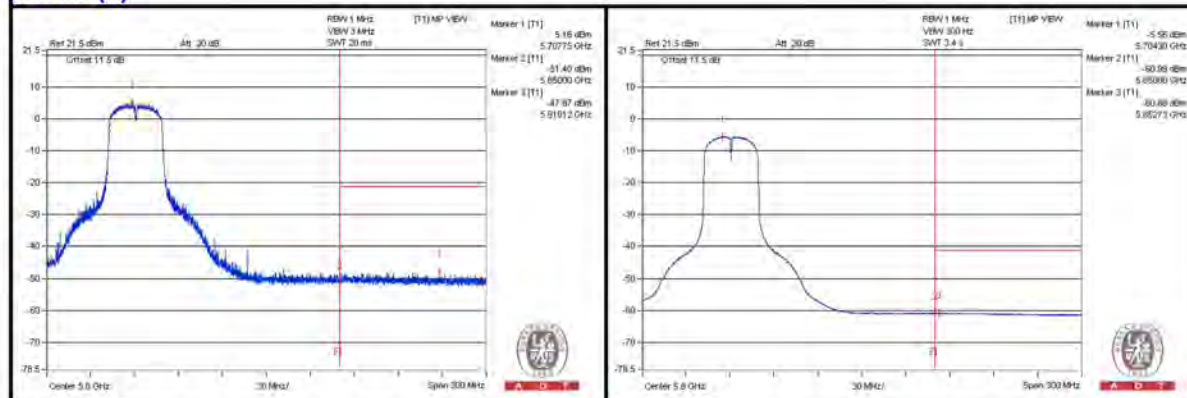

### 802.11ac (VHT40) - Channel 151

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3837.5 PK	57.85	74	-16.15	-51.67	-46.29	7.77	-37.41
2	3834.375 AV	52.27	54	-1.73	-62.95	-51.03	7.77	-42.99
3	7675 PK	56.61	74	-17.39	-49.49	-49.38	7.77	-38.65
4	7675 AV	47.77	54	-6.23	-55.58	-66.77	7.77	-47.49
5	11506.25 PK	55.56	74	-18.44	-50.7	-50.27	7.77	-39.7
6	11509.375 AV	38.02	54	-15.98	-68.49	-67.59	7.77	-57.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T


### Chain (0)

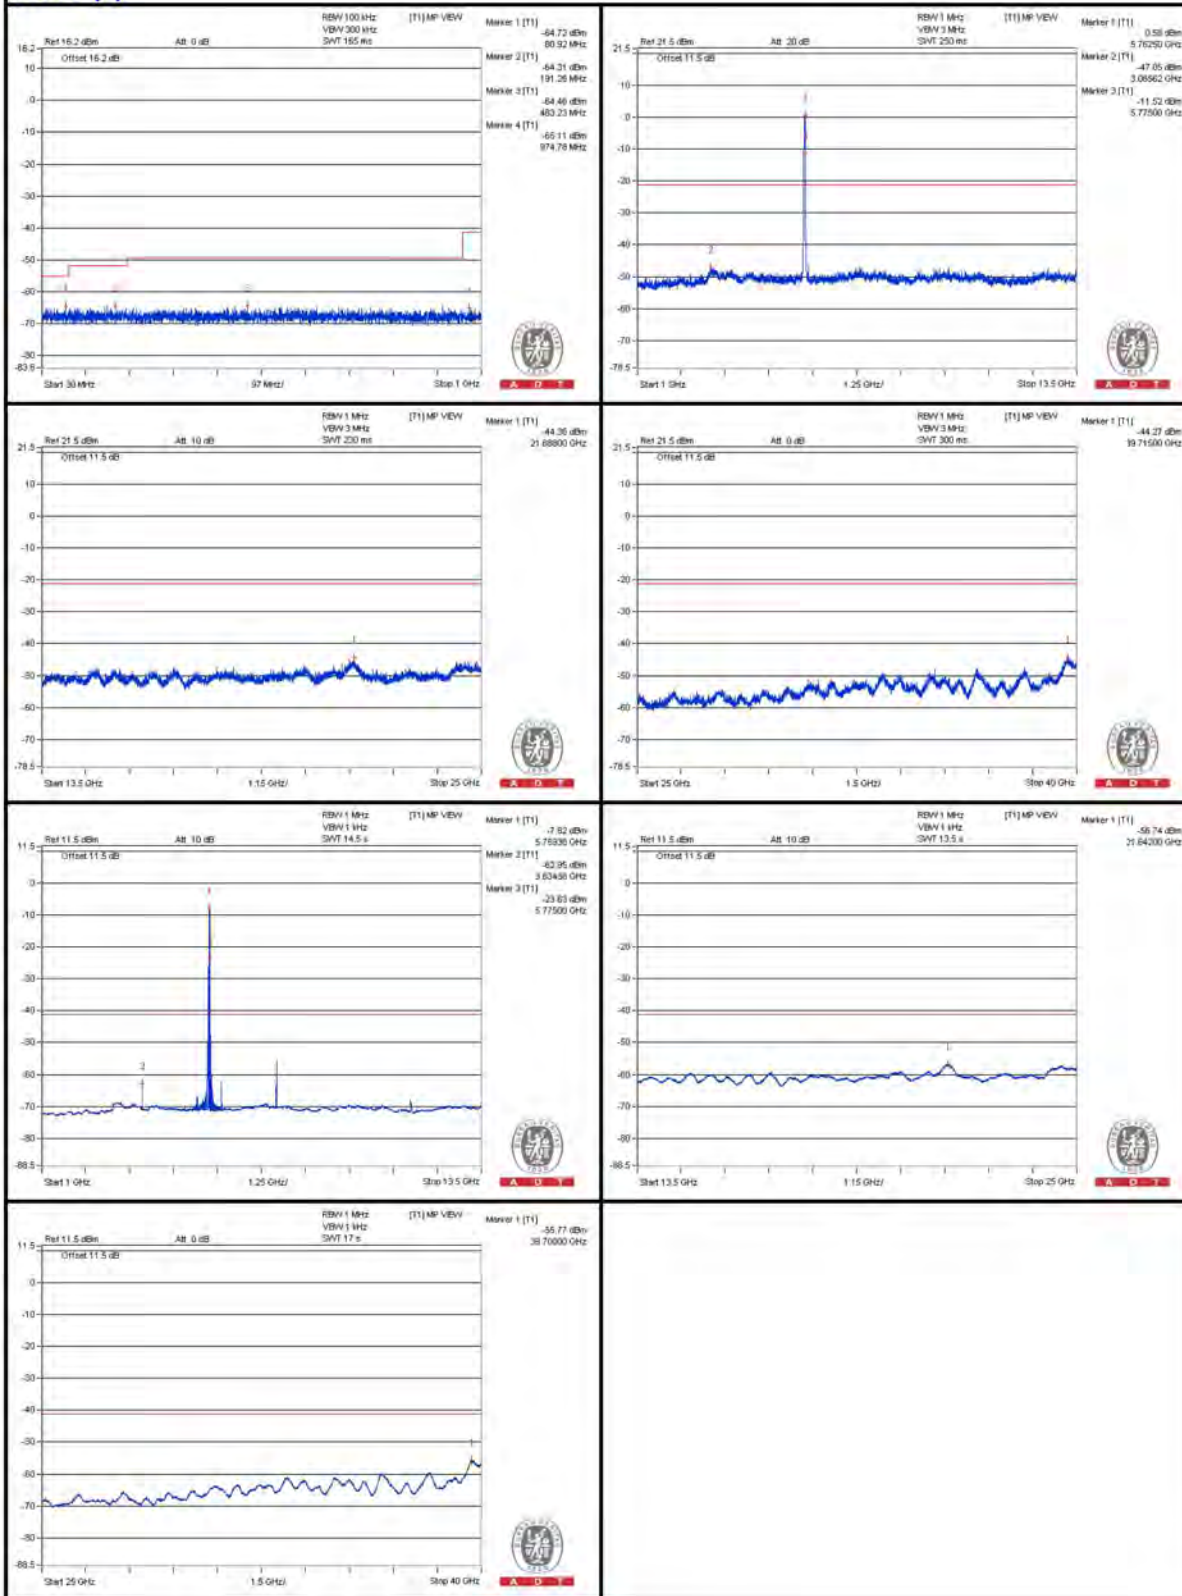



A D T

### Chain (1)

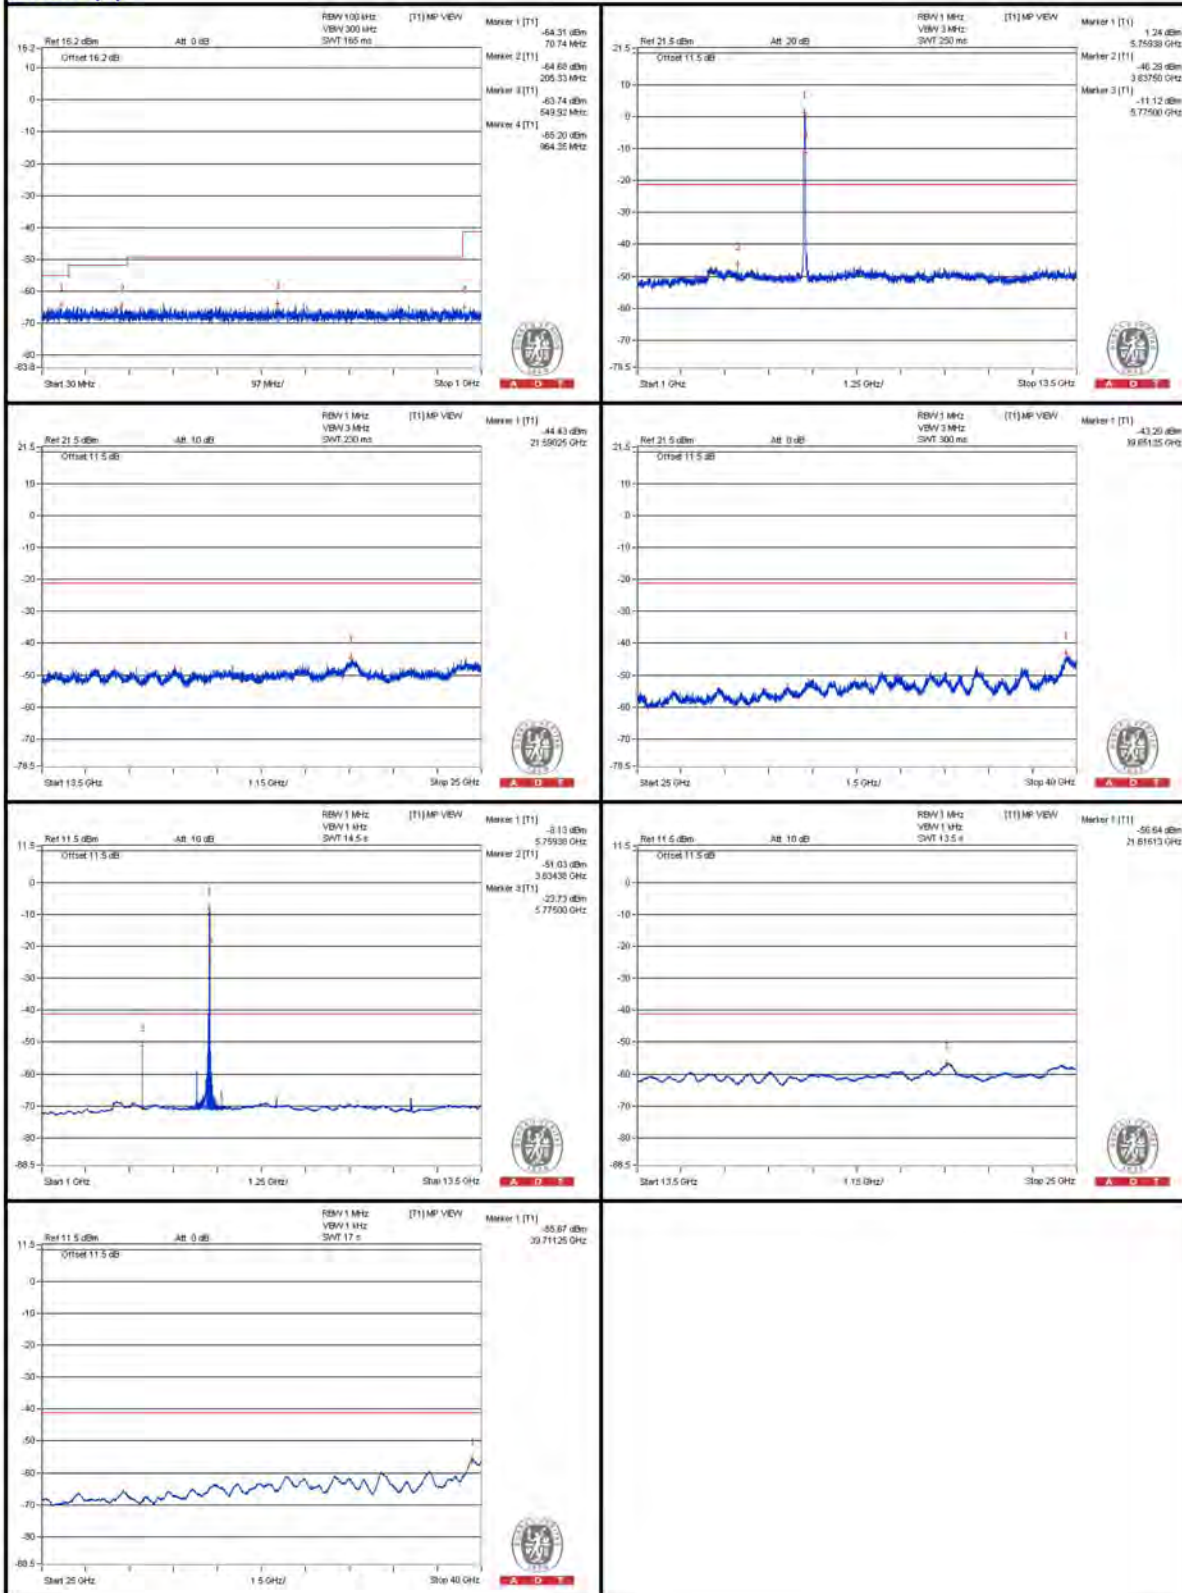

### Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5711.825 PK	69.95	74	-4.05	-33.56	-42.84	7.77	-25.31
2	5714.975 AV	55.92	54	* 1.92	-48.61	-52.45	7.77	-39.34
3	5723.9 PK	74.91	78.2	-3.29	-28.68	-37.28	7.77	-20.35
4	5859.125 PK	63.34	78.2	-14.86	-50.3	-40.09	7.77	-31.92
5	5870 PK	62.77	74	-11.23	-46.05	-41.59	7.77	-32.49
6	5860.85 AV	45.44	54	-8.56	-60.73	-60.47	7.77	-49.82

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)

#### Chain (0)

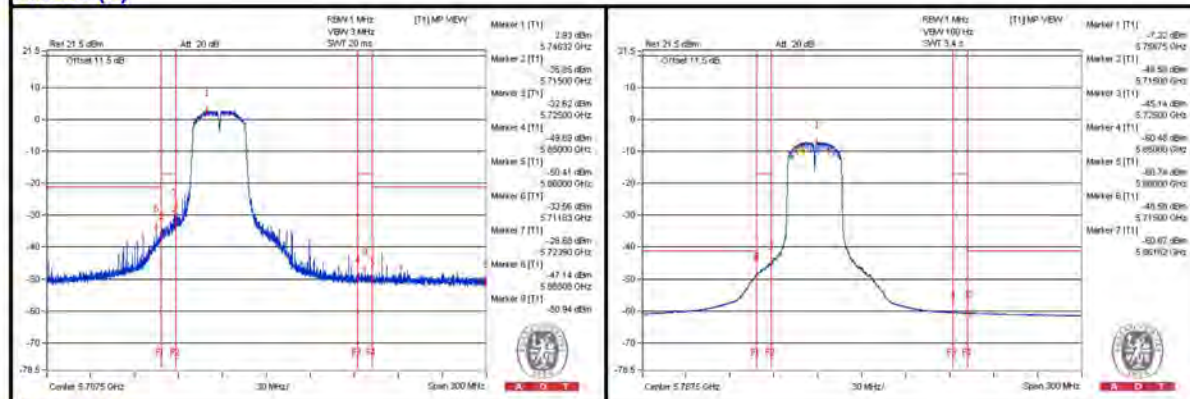

#### Chain (1)

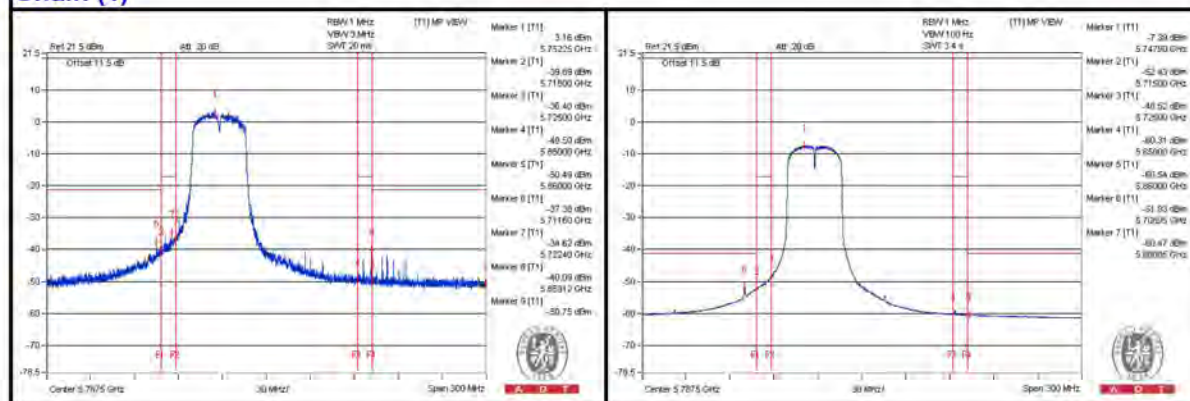

**802.11ac (VHT40) - Channel 159**
**Conducted spurious emission table**

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3862.5 PK	59.25	74	-14.75	-50.06	-44.95	7.77	-36.01
2	3862.5 AV	54.14	54	* 0.14	-60.06	-49.24	7.77	-41.12
3	7728.125 PK	57.35	74	-16.65	-47.75	-49.89	7.77	-37.91
4	7728.125 AV	36.49	54	-17.51	-69.94	-69.19	7.77	-58.77
5	11596.875 PK	55.38	74	-18.62	-50.2	-51.17	7.77	-39.88
6	11590.625 AV	39.07	54	-14.93	-67.57	-66.44	7.77	-56.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX A)




A D T

### Chain (0)

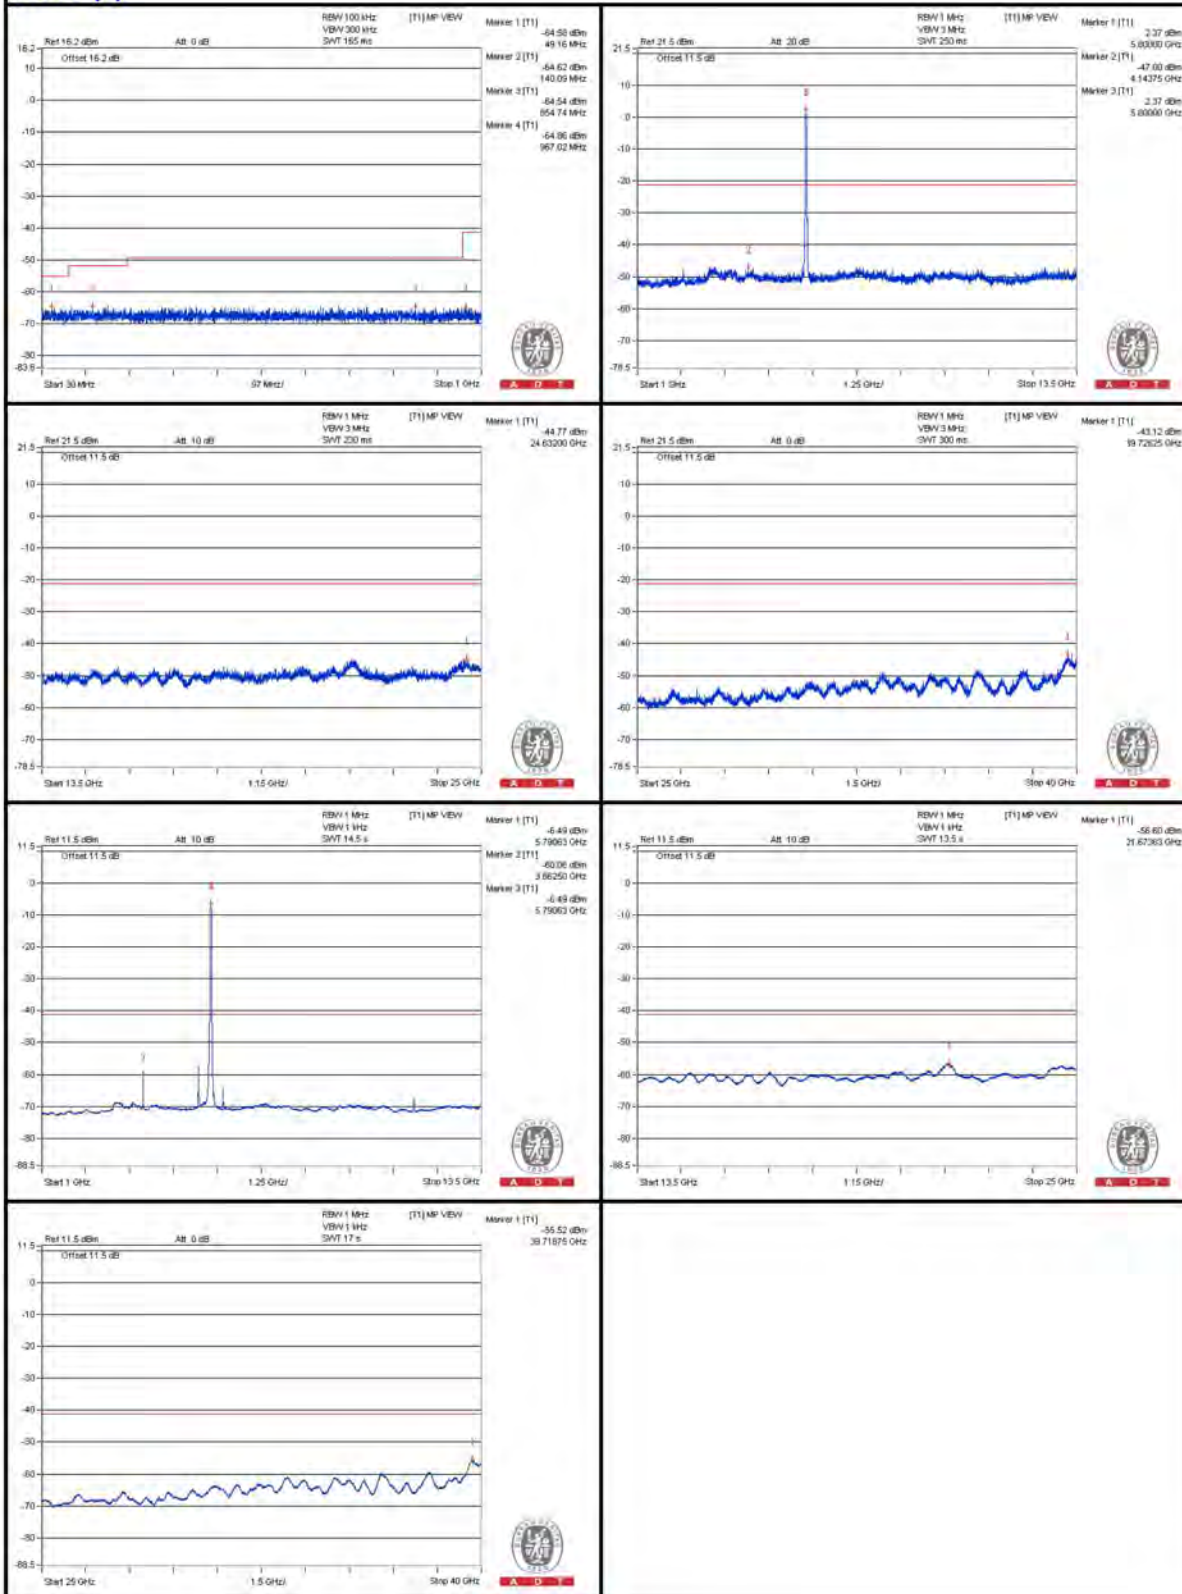

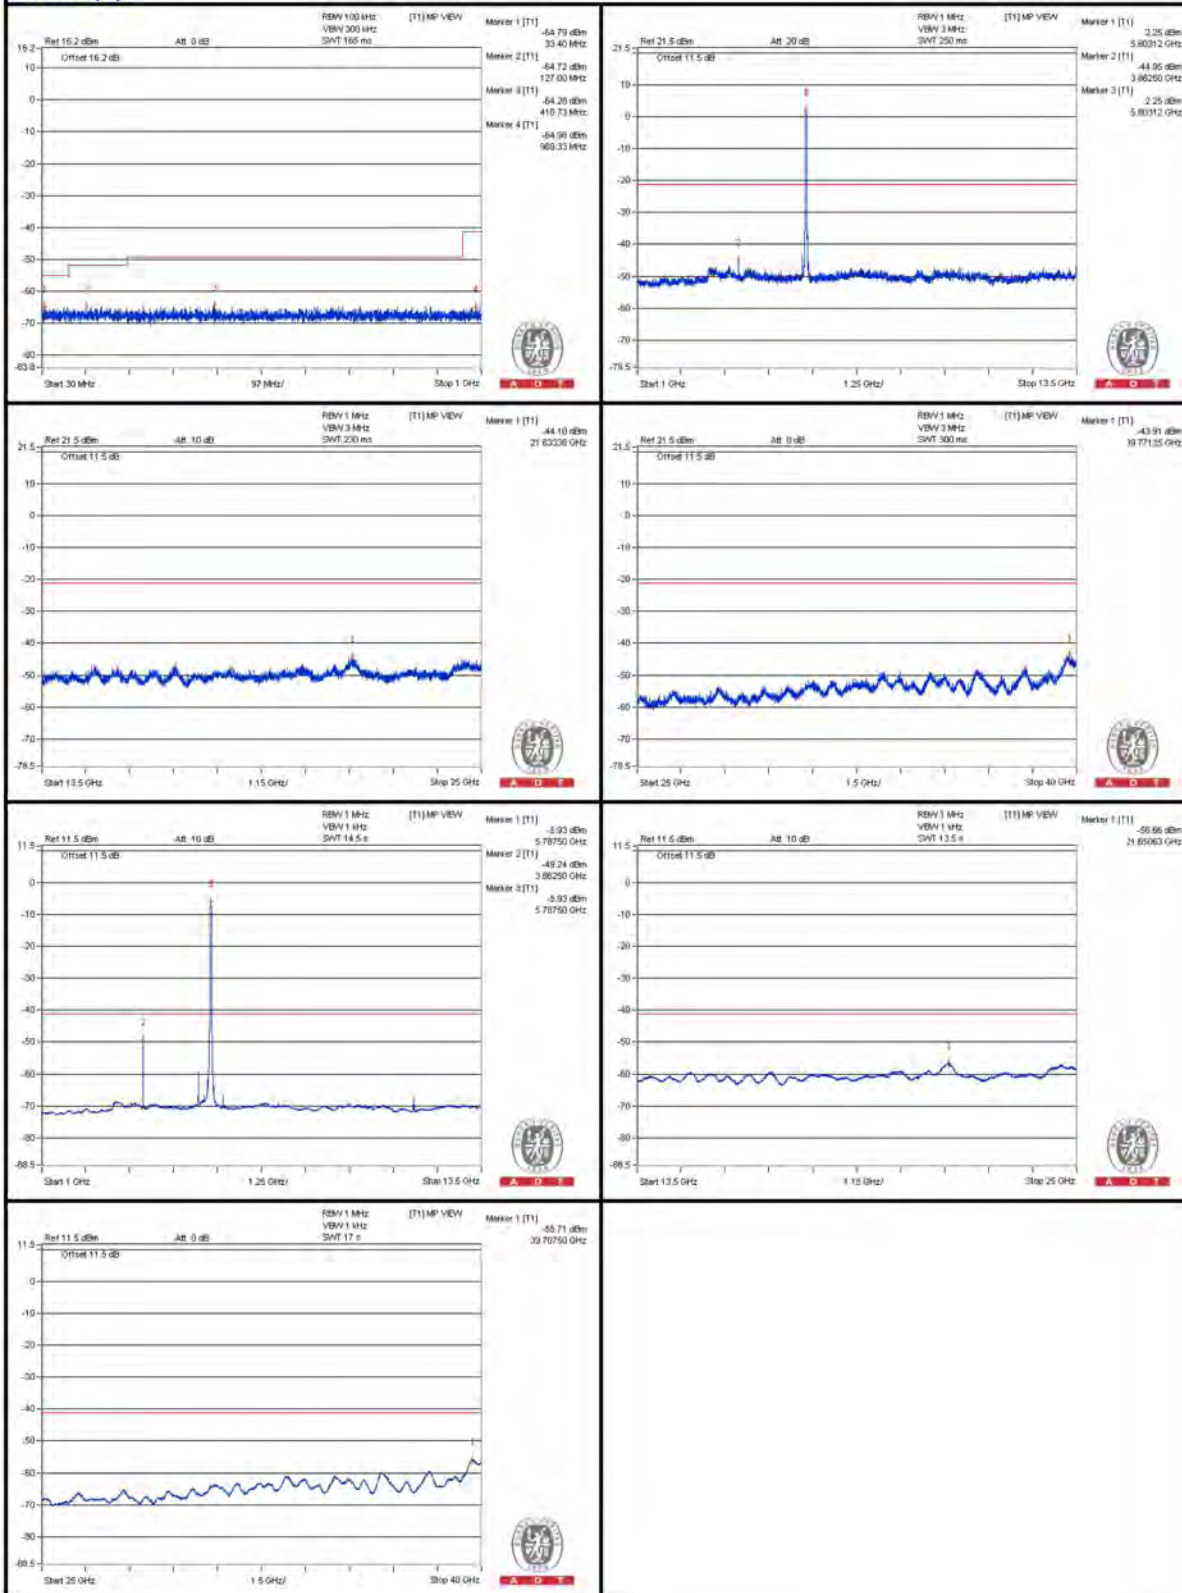

**Chain (1)**


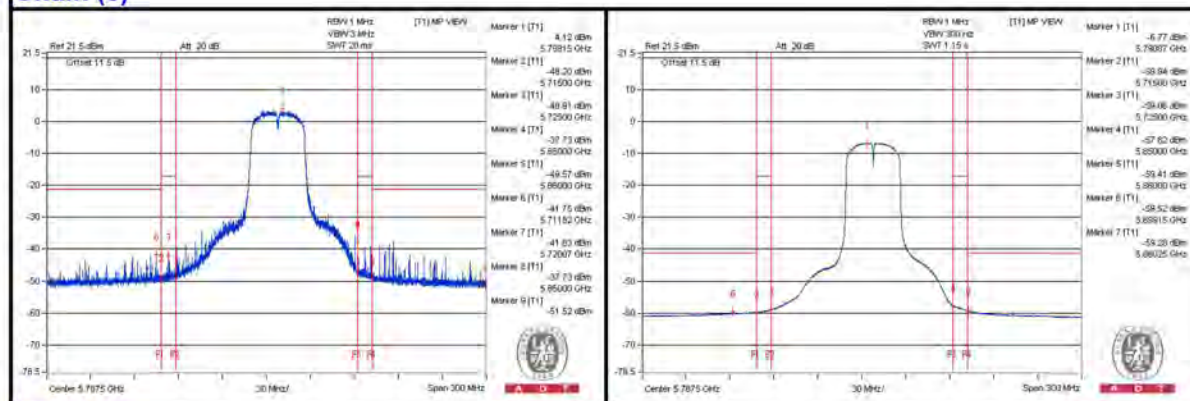
### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5702.6 PK	63.73	74	-10.27	-49.53	-39.73	7.77	-31.53
2	5699.15 AV	47.13	54	-6.87	-59.52	-58.38	7.77	-48.13
3	5715.275 PK	64.38	78.2	-13.82	-48.99	-39.07	7.77	-30.88
4	5850.05 PK	65.59	78.2	-12.61	-37.88	-47.61	7.77	-29.67
5	5874.125 PK	65.59	74	-8.41	-37.66	-50.59	7.77	-29.67
6	5860.025 AV	46.77	54	-7.23	-59.41	-59.14	7.77	-48.49


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

#### Chain (0)



#### Chain (1)

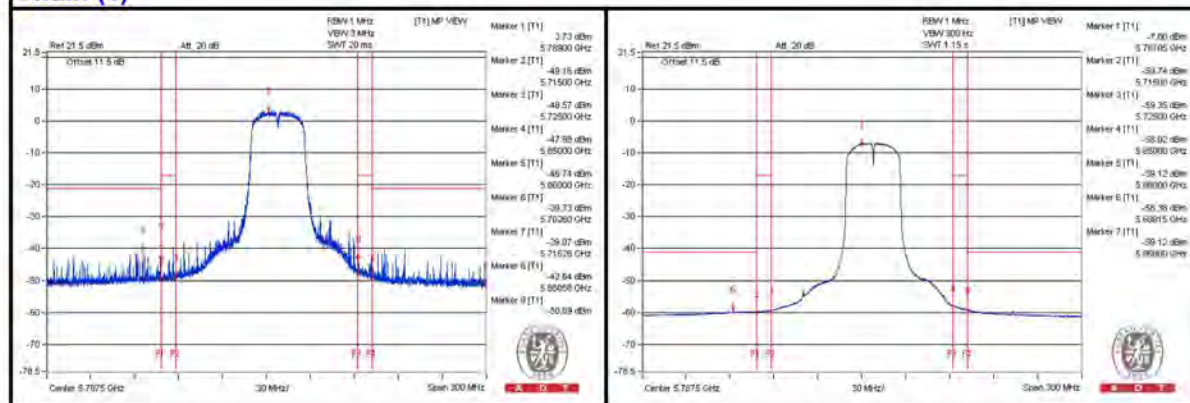

### 802.11ac (VHT80) - Channel 42


#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3471.875 PK	57.21	74	-16.79	-49.32	-48.39	7.77	-38.05
2	3471.875 AV	45.9	54	-8.1	-69.74	-57.38	7.77	-49.36
3	6946.875 PK	59.27	74	-14.73	-45.34	-48.91	7.77	-35.99
4	6946.875 AV	52.15	54	-1.85	-51.13	-63.49	7.77	-43.11
5	10425 PK	56.93	74	-17.07	-48.06	-50.5	7.77	-38.33
6	10421.875 AV	36.76	54	-17.24	-69.22	-69.35	7.77	-58.5
7	15624.625 PK	55.38	74	-18.62	-50.24	-51.13	7.77	-39.88
8	15621.75 AV	44.48	54	-9.52	-61.27	-61.88	7.77	-50.78

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.


Chain (0)

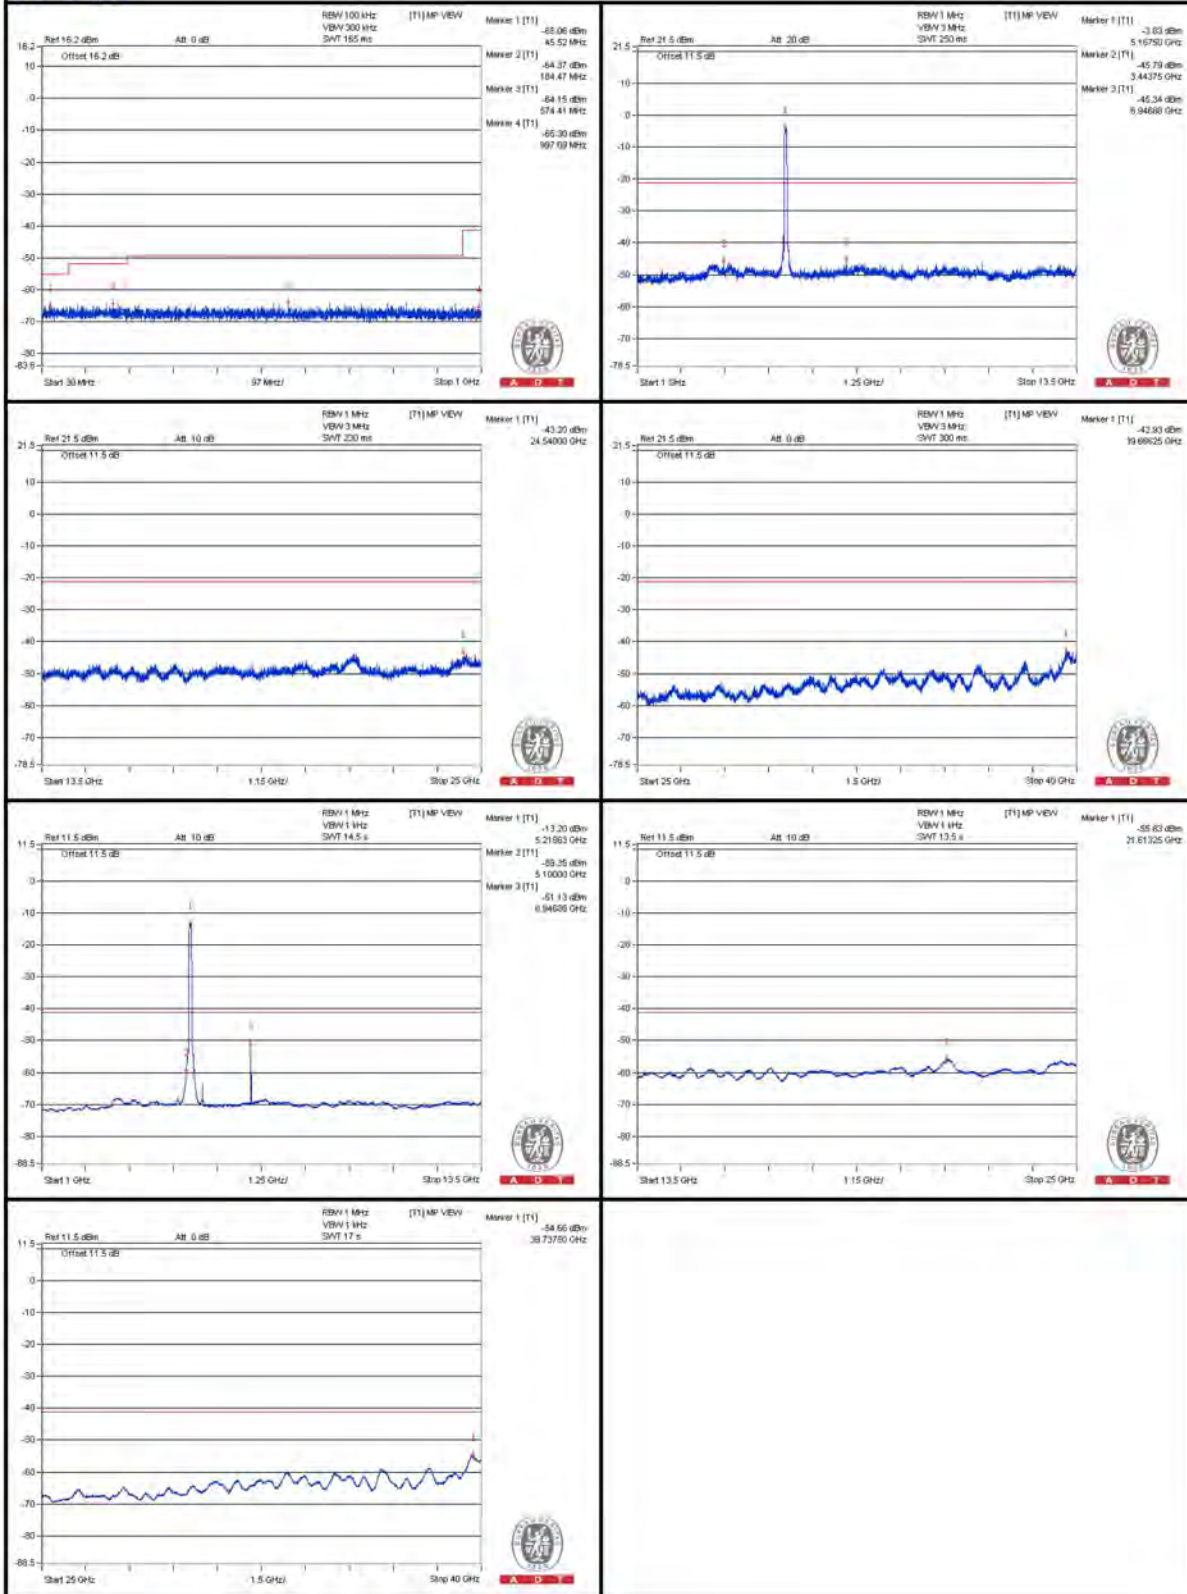



A D T

### Chain (1)

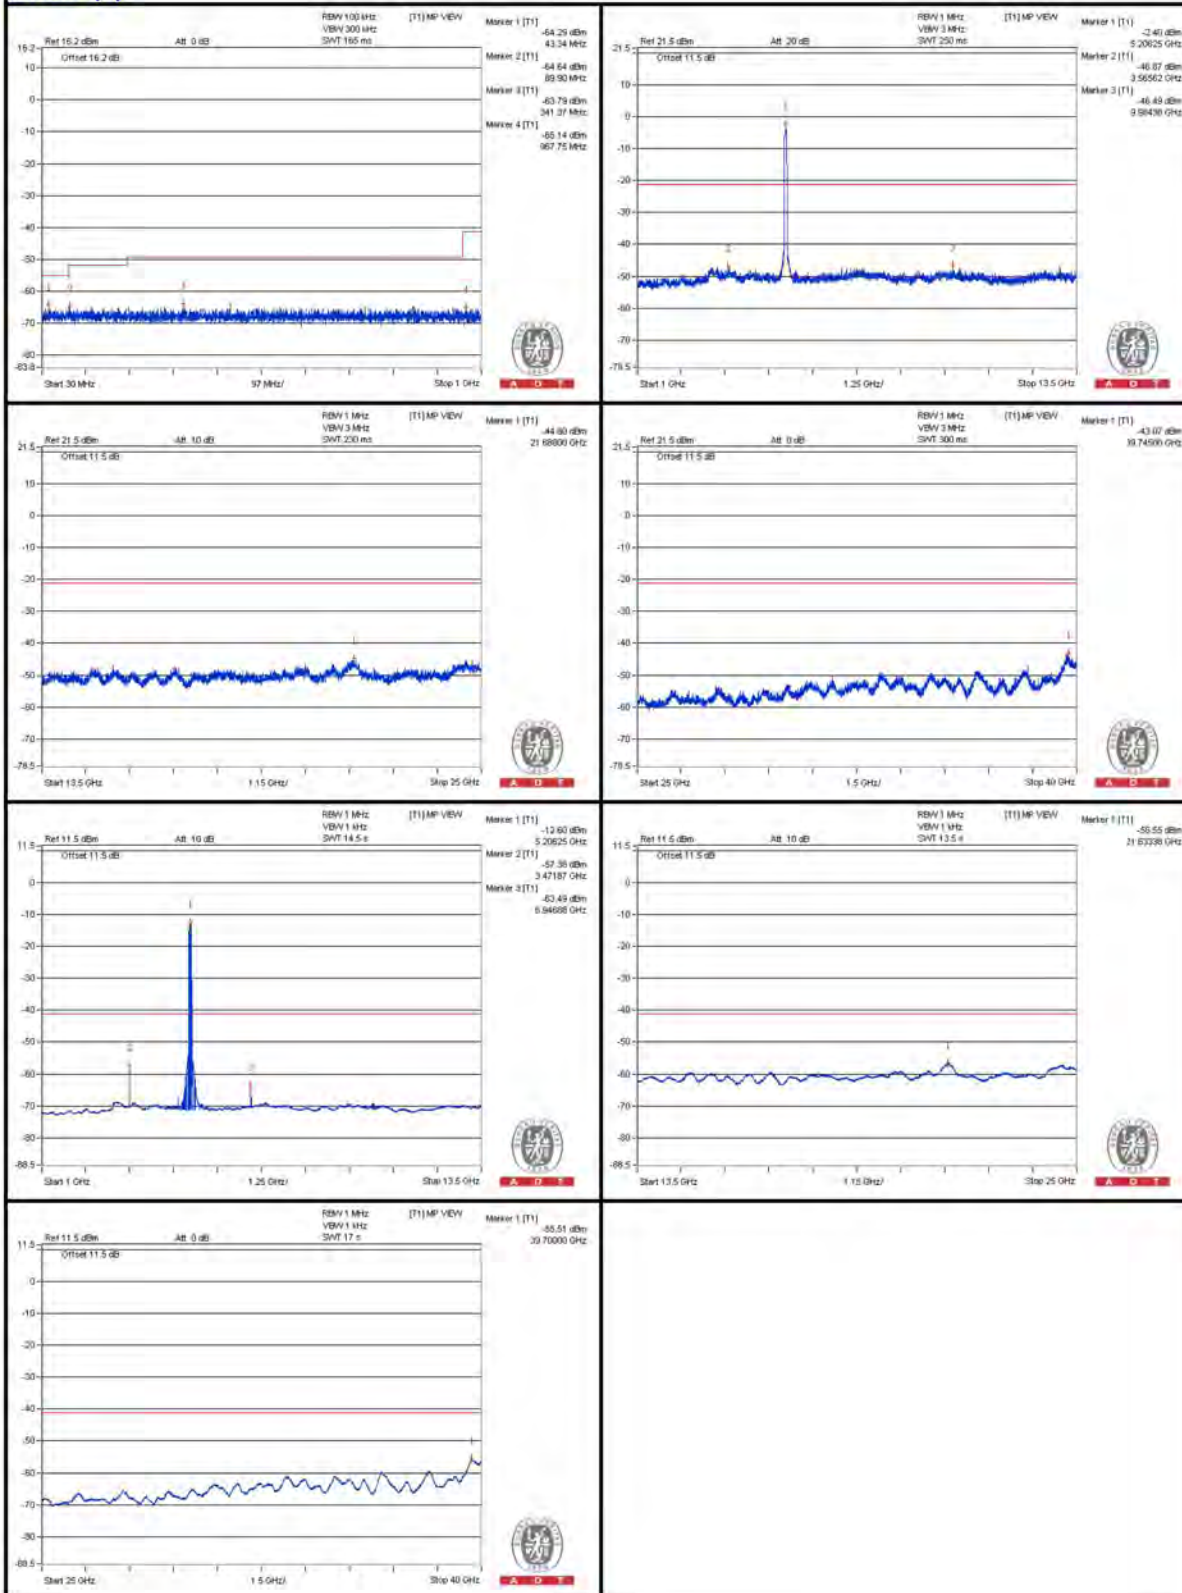

### Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5142.2 PK	65.18	74	-8.82	-41.78	-37.57	6.09	-30.08
2	5140.65 AV	50.89	54	-3.11	-52.62	-54.53	6.09	-44.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

#### Chain (0)

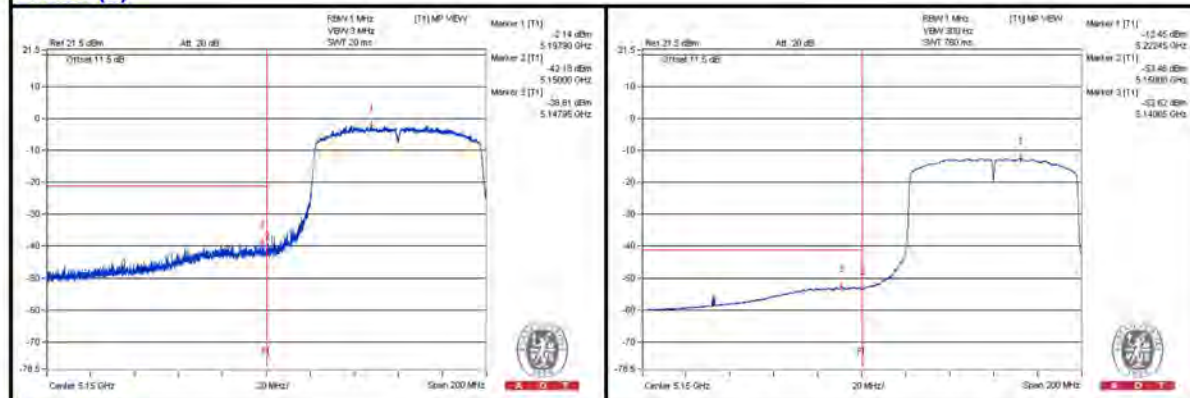

#### Chain (1)

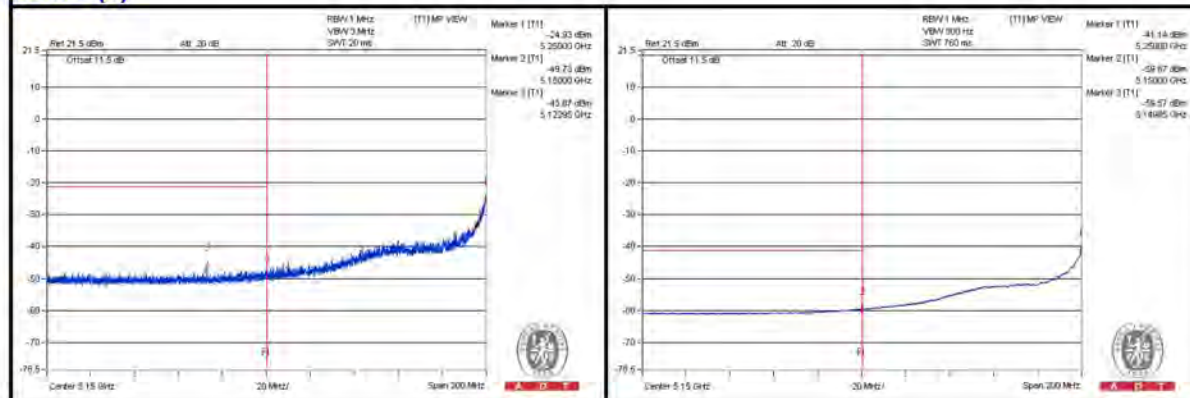

802.11ac (VHT80) - Channel 58

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3528.125 PK	57.73	74	-16.27	-49.81	-47.2	7.77	-37.53
2	3525 AV	48.45	54	-5.55	-69.05	-54.74	7.77	-46.81
3	7053.125 PK	58.82	74	-15.18	-46.3	-48.4	7.77	-36.44
4	7053.125 AV	52.13	54	-1.87	-51.16	-63.23	7.77	-43.13
5	10584.375 PK	56.58	74	-17.42	-49.94	-49.03	7.77	-38.68
6	10581.25 AV	37.8	54	-16.2	-69.14	-67.5	7.77	-57.46
7	15860.375 PK	56.35	74	-17.65	-49.3	-50.13	7.77	-38.91
8	15863.25 AV	45.45	54	-8.55	-60.42	-60.77	7.77	-49.81


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

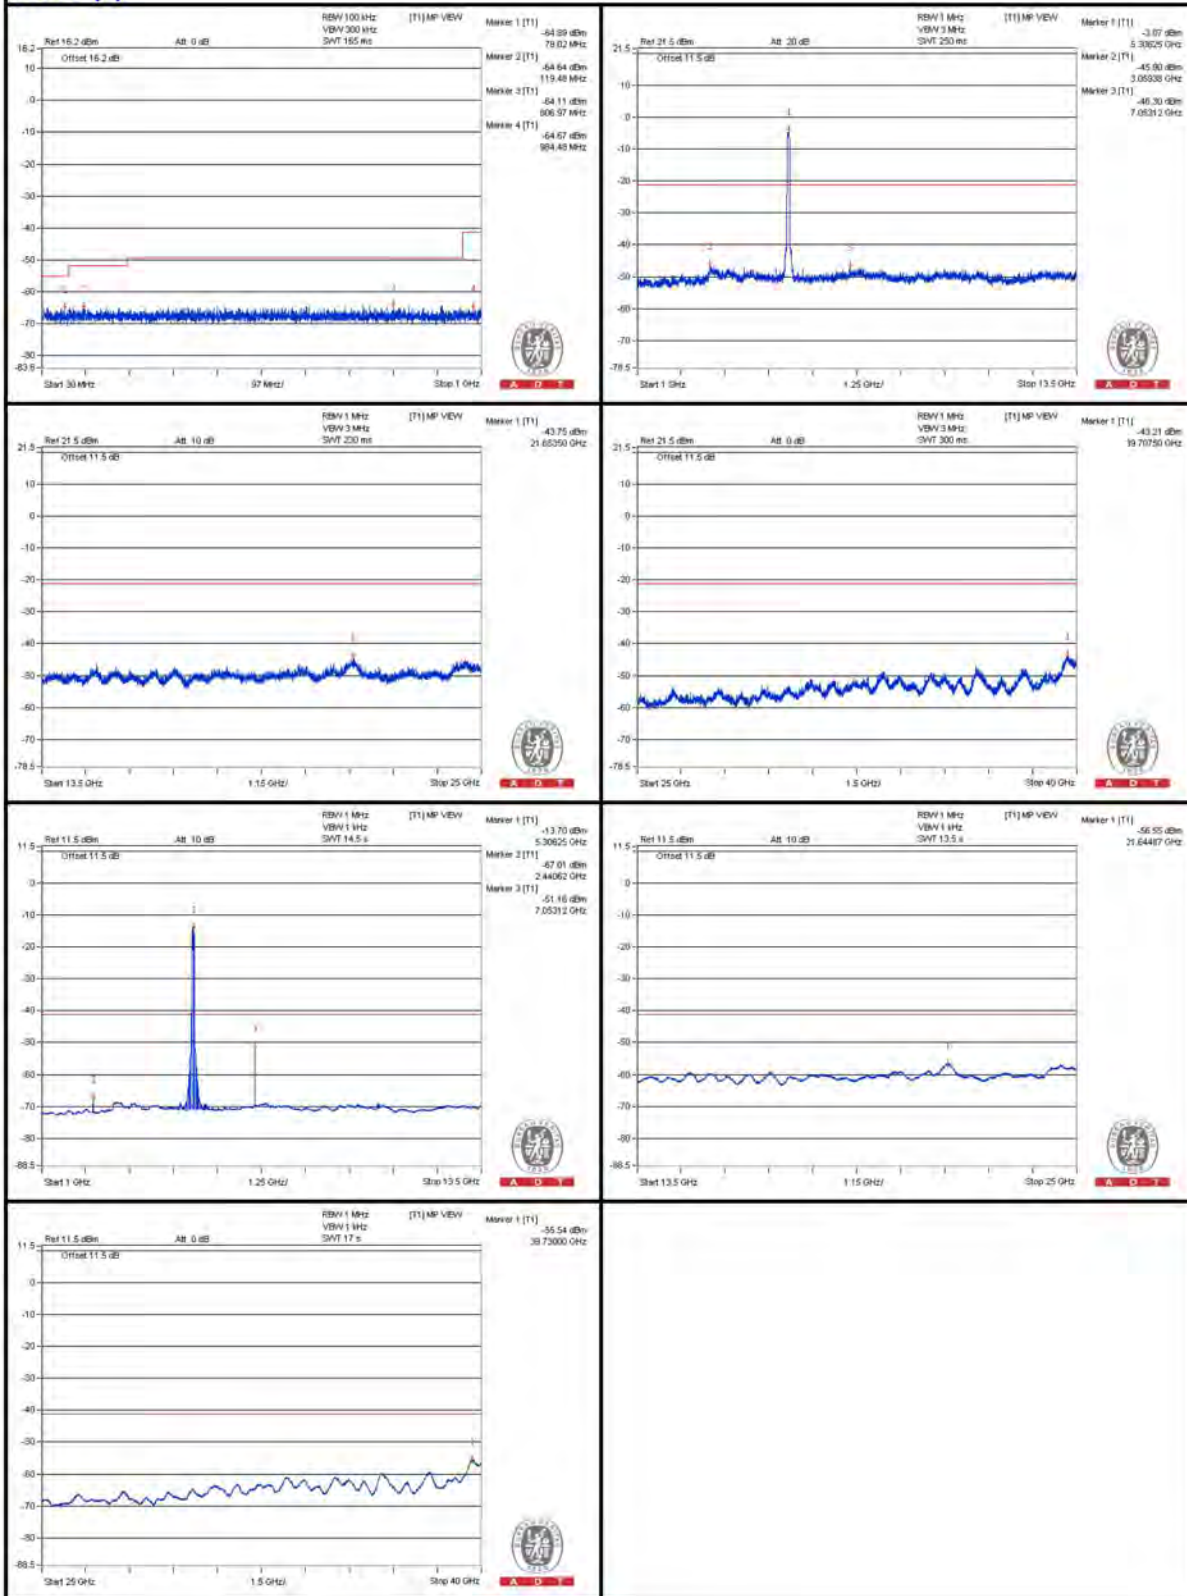






A D T

### Chain (1)

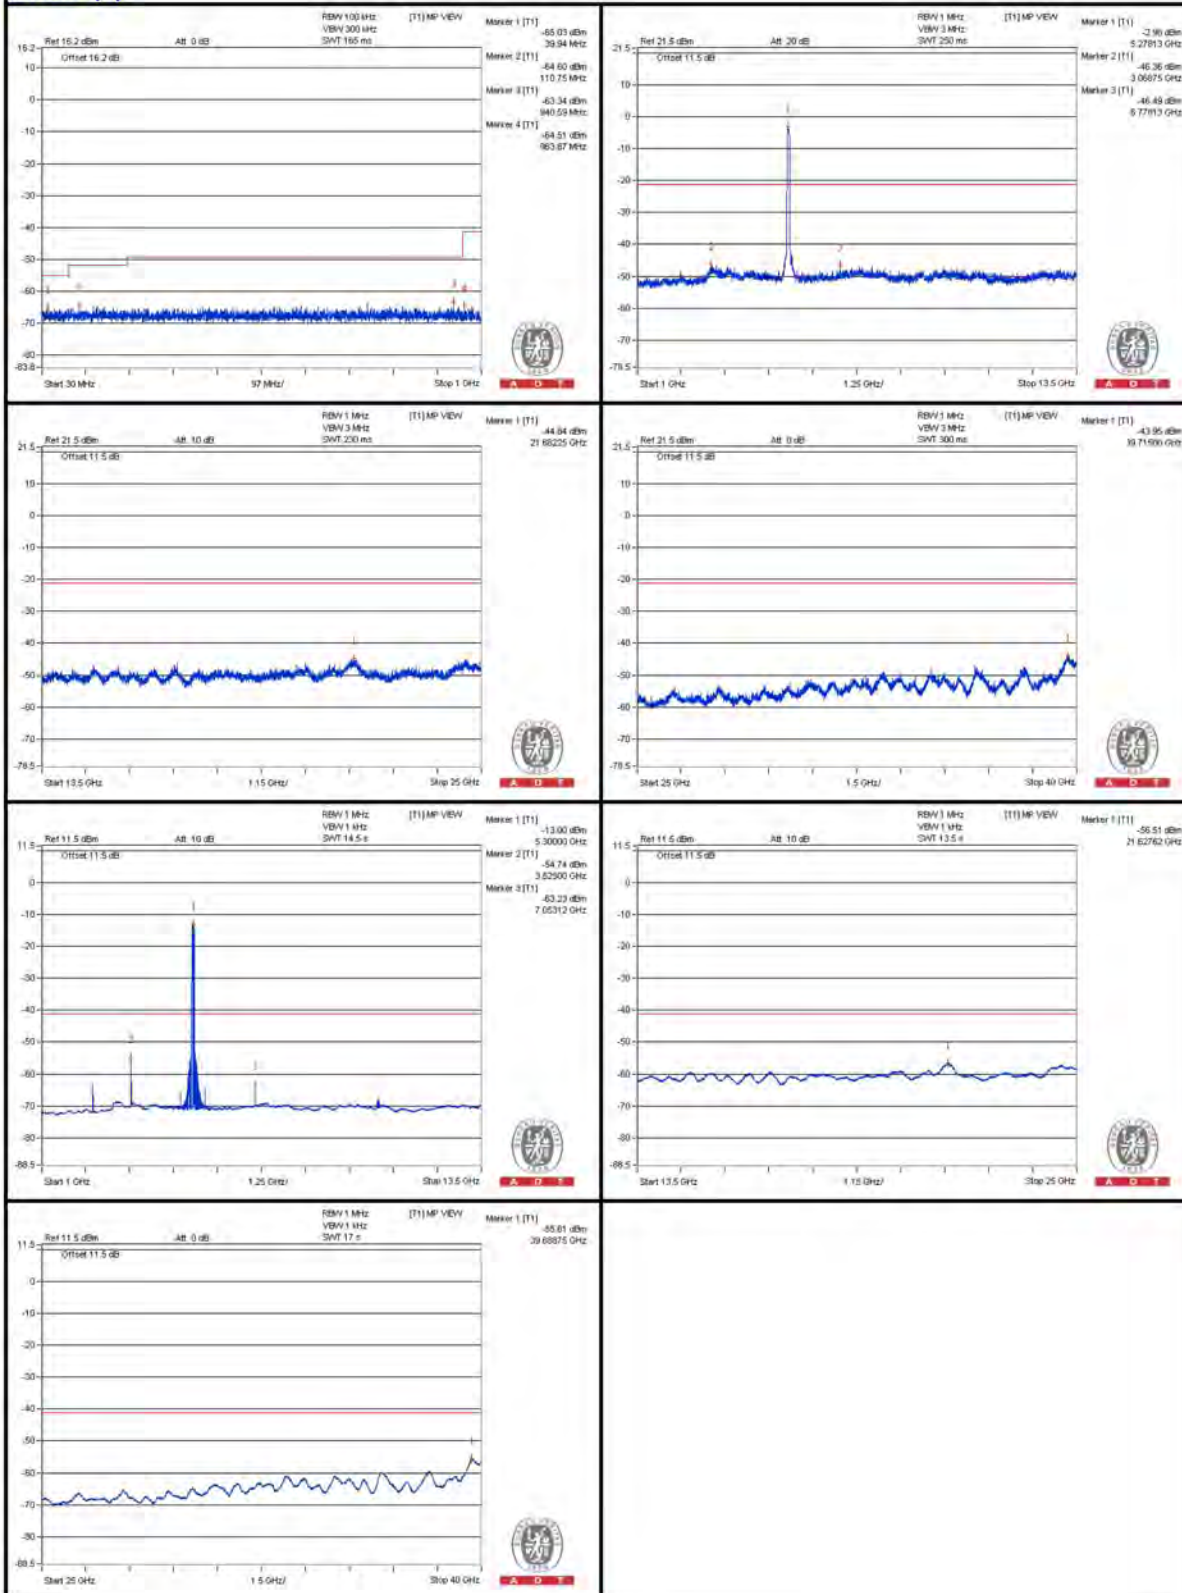


### Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.15 PK	65.56	74	-8.44	-40.18	-37.76	6.09	-29.7
2	5350 AV	52.91	54	-1.09	-50.45	-52.76	6.09	-42.35

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

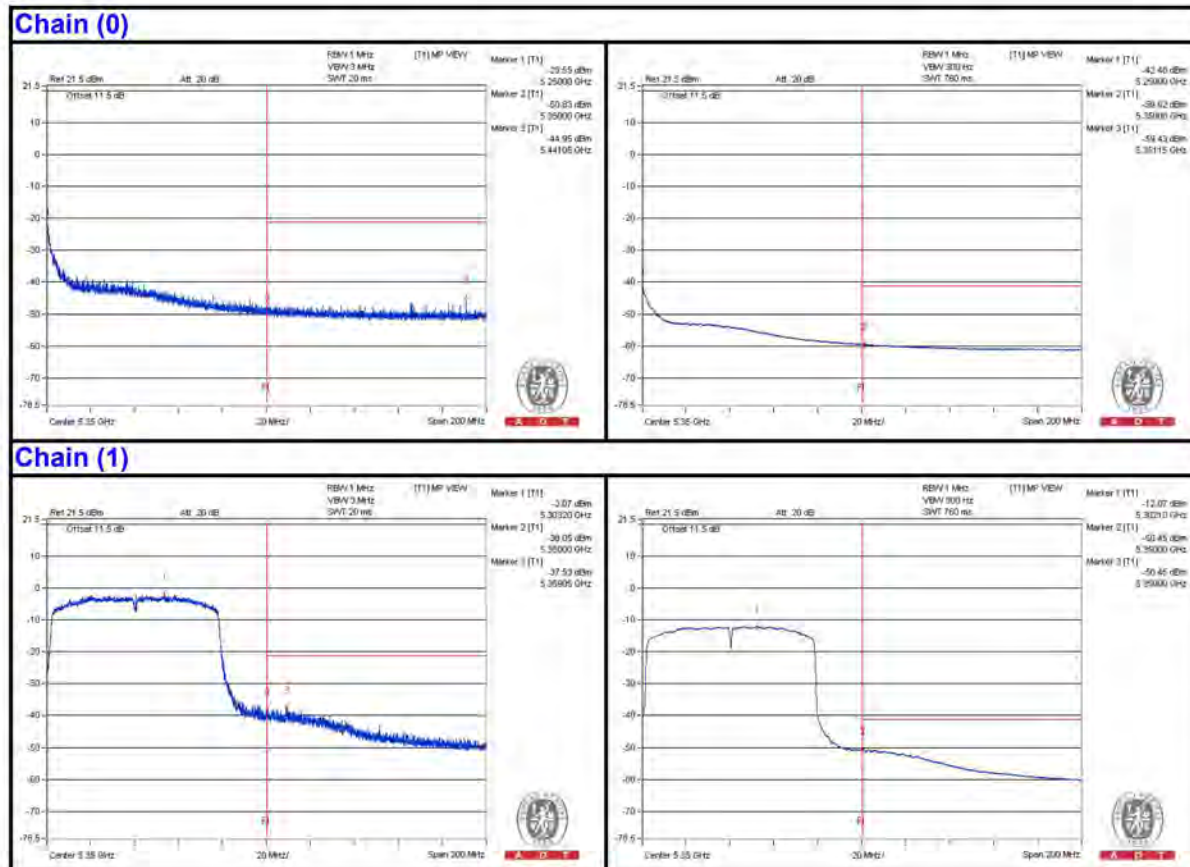

### 802.11ac (VHT80) - Channel 105

#### Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3687.5 PK	58.18	74	-15.82	-48.67	-47.17	7.77	-37.08
2	3684.375 AV	38.14	54	-15.86	-66.48	-70.04	7.77	-57.12
3	7371.875 PK	58.58	74	-15.42	-46.1	-49.44	7.77	-36.68
4	7375 AV	38.46	54	-15.54	-66.98	-68.28	7.77	-56.8
5	11050 PK	56.31	74	-17.69	-49.86	-49.61	7.77	-38.95
6	11059.375 AV	36.59	54	-17.41	-69.16	-69.77	7.77	-58.67
7	16584.875 PK	55.16	74	-18.84	-50.02	-51.95	7.77	-40.1
8	16587.75 AV	44.1	54	-9.9	-61.23	-62.8	7.77	-51.16


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T


### Chain (0)

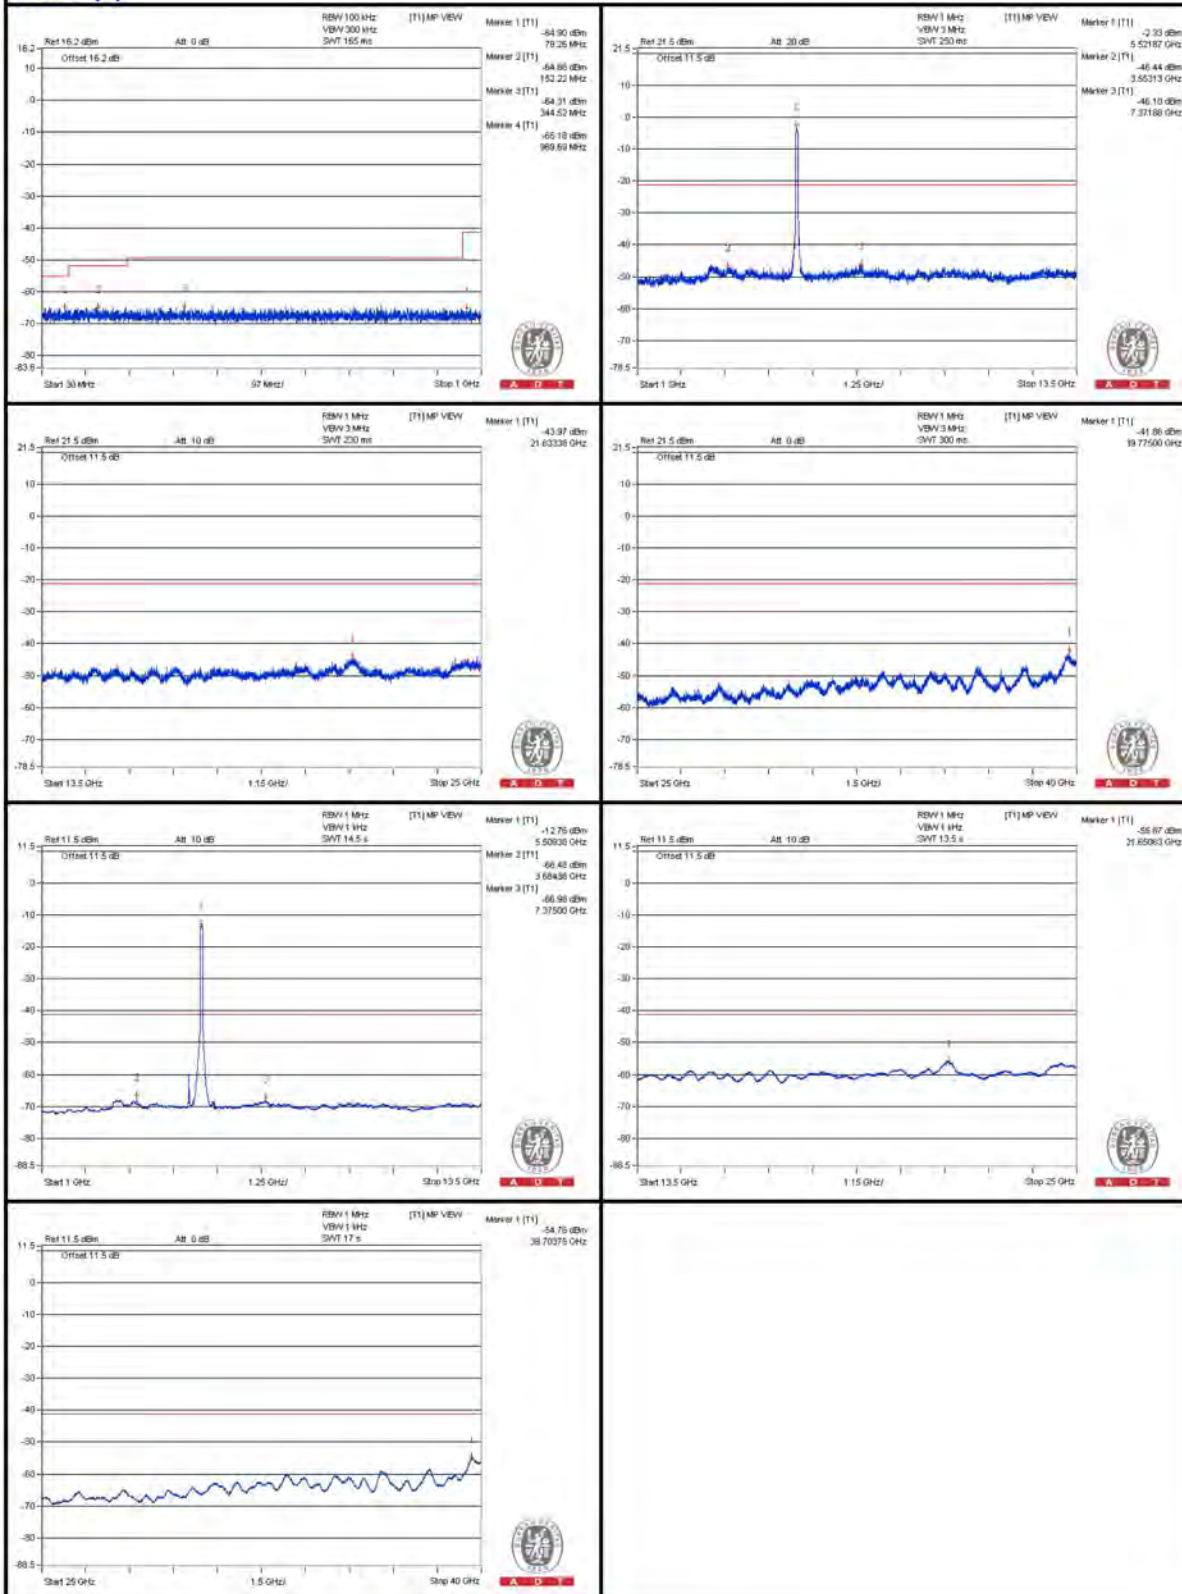



A D T

### Chain (1)

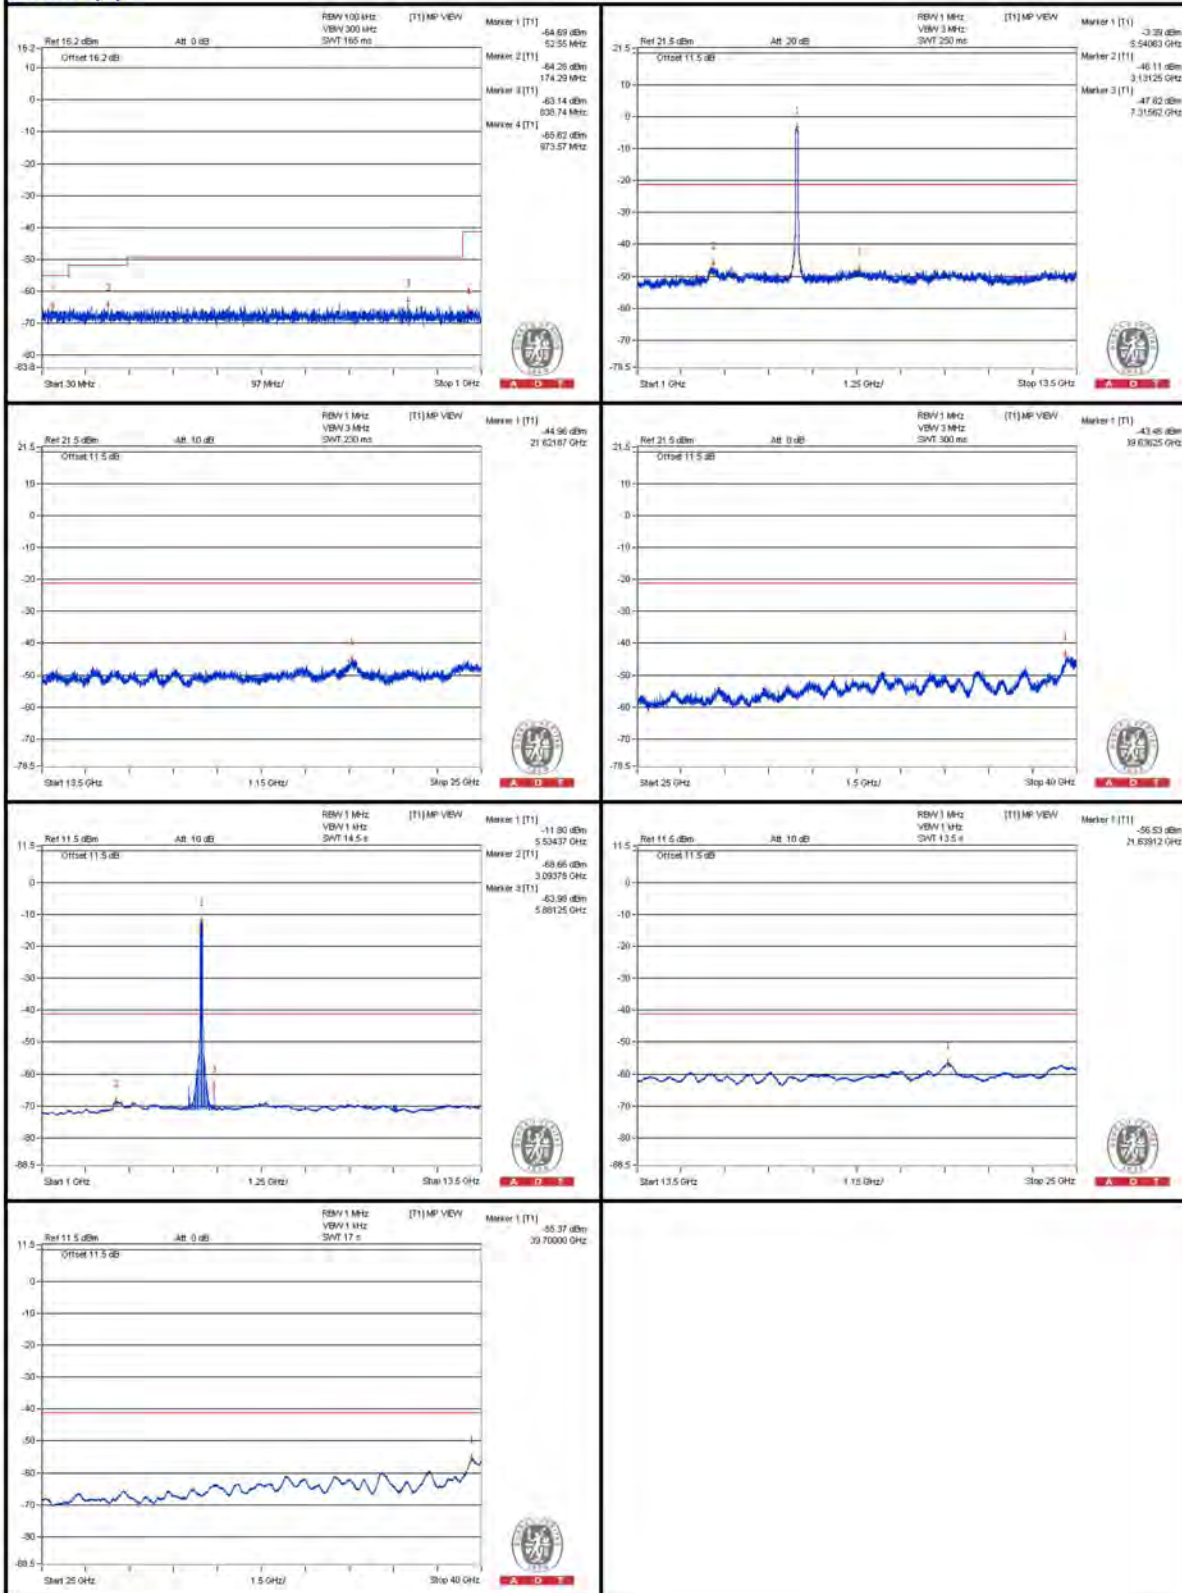

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5468.5625 PK	69.63	74	-4.37	-34.28	-40.77	7.77	-25.63
2	5468.1875 AV	56.96	54	* 2.96	-47.41	-51.83	7.77	-38.3

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

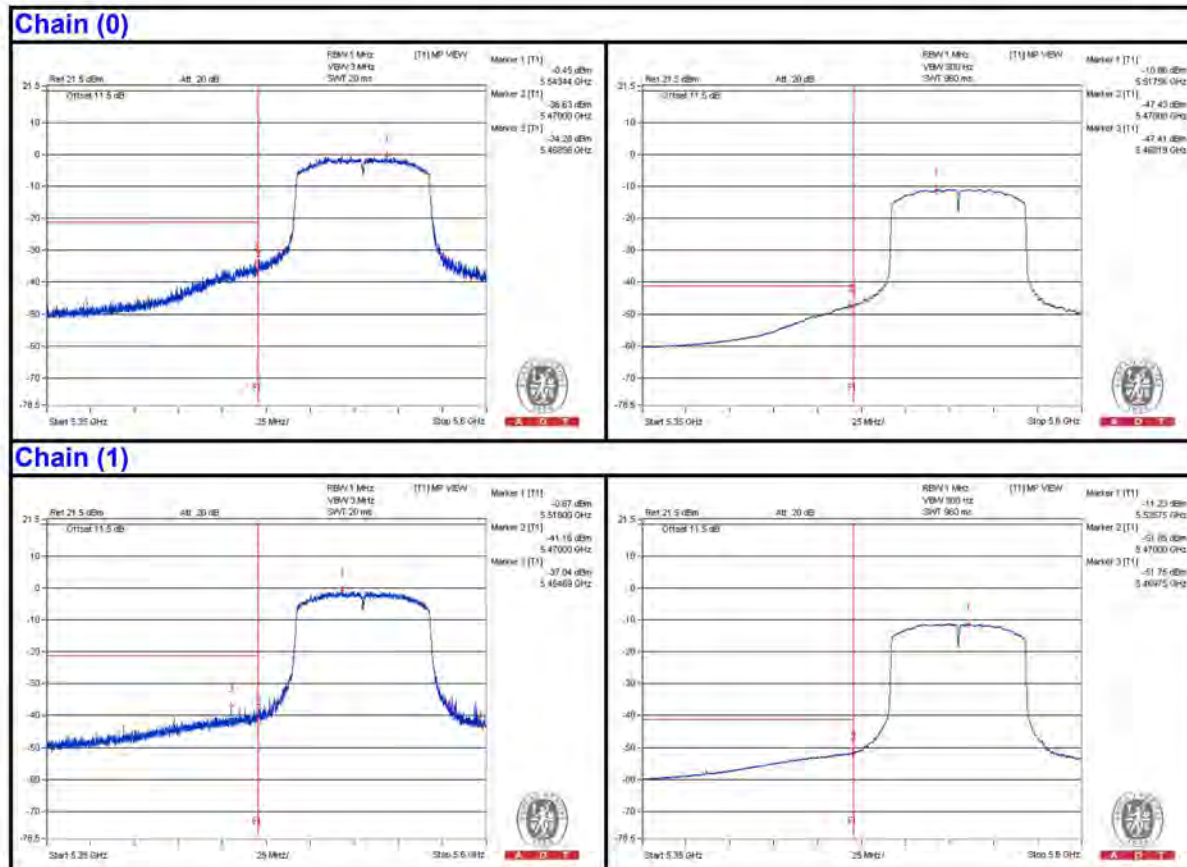

802.11ac (VHT80) - Channel 122

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3740.625 PK	57.7	74	-16.3	-49.82	-47.24	7.77	-37.56
2	3740.625 AV	51.21	54	-2.79	-64.55	-52.06	7.77	-44.05
3	7481.25 PK	57.25	74	-16.75	-47.82	-50.03	7.77	-38.01
4	7481.25 AV	47.68	54	-6.32	-56.01	-63.83	7.77	-47.58
5	11228.125 PK	55.85	74	-18.15	-51.38	-49.26	7.77	-39.41
6	11221.875 AV	38.55	54	-15.45	-68.26	-66.84	7.77	-56.71
7	16832.125 PK	56.76	74	-17.24	-48.73	-49.9	7.77	-38.5
8	16835 AV	45.11	54	-8.89	-60.78	-61.09	7.77	-50.15


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

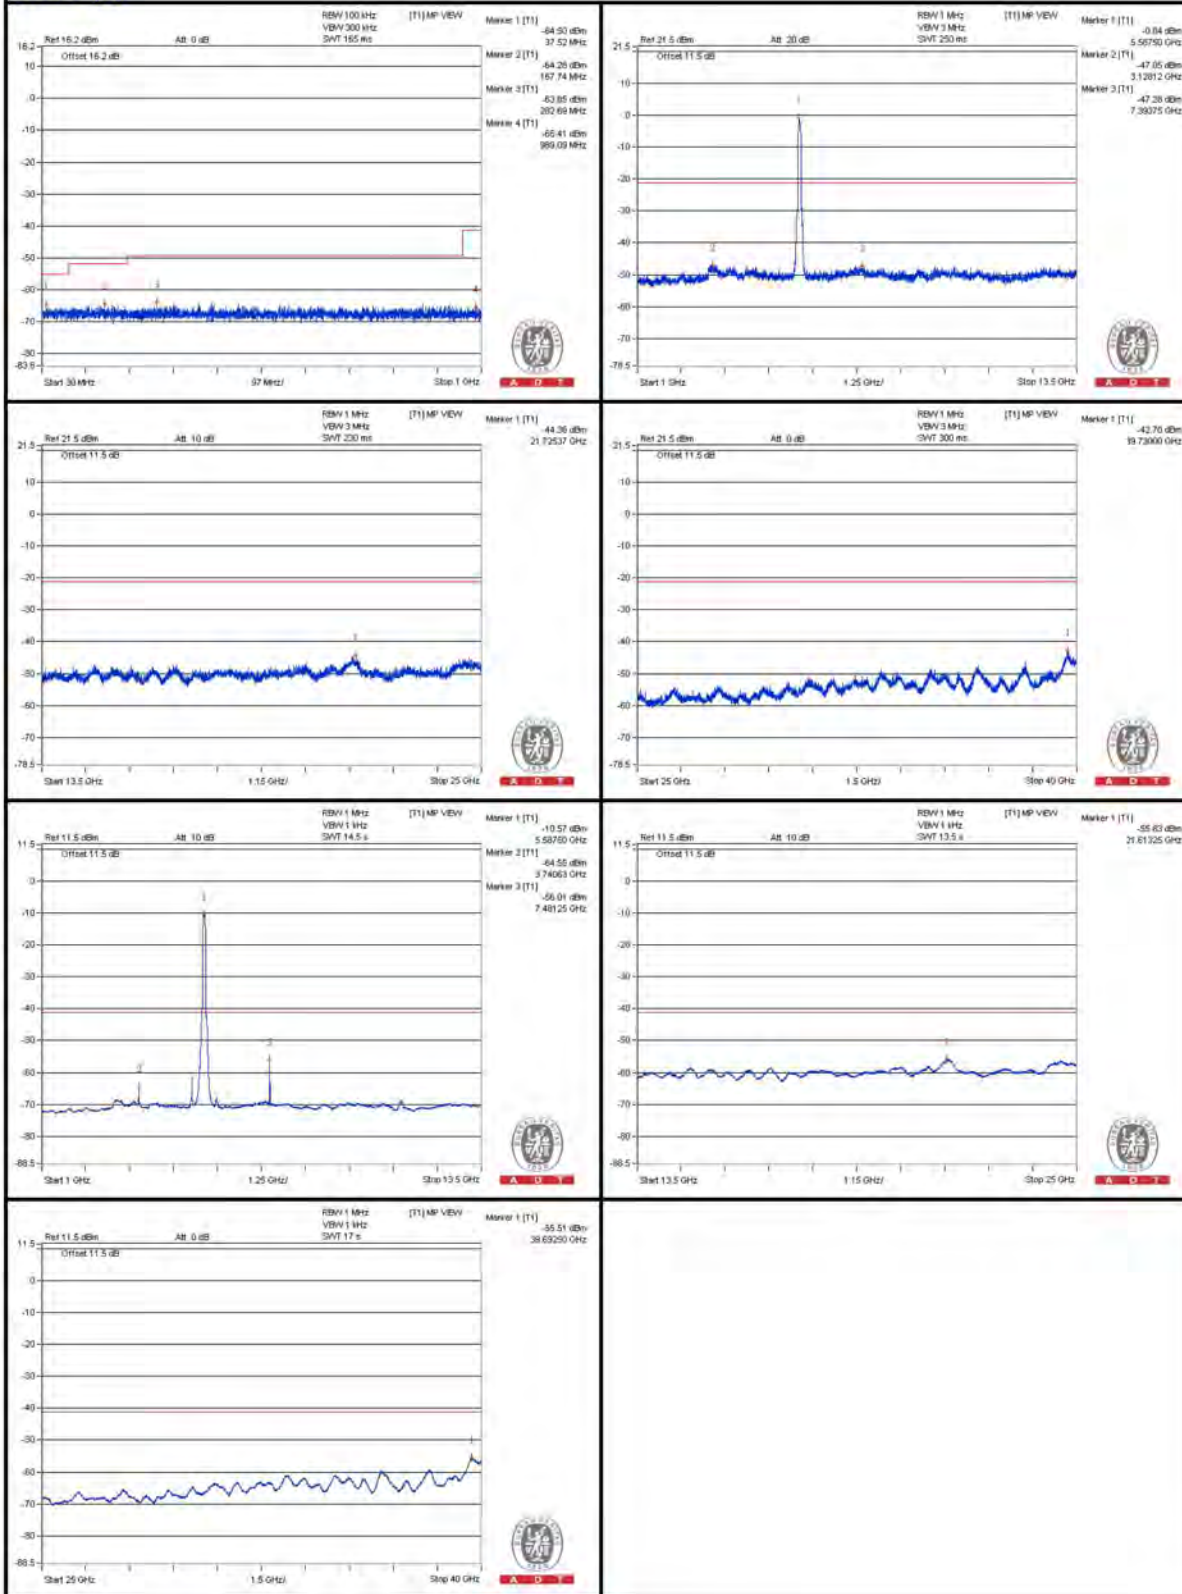






A D T

### Chain (1)

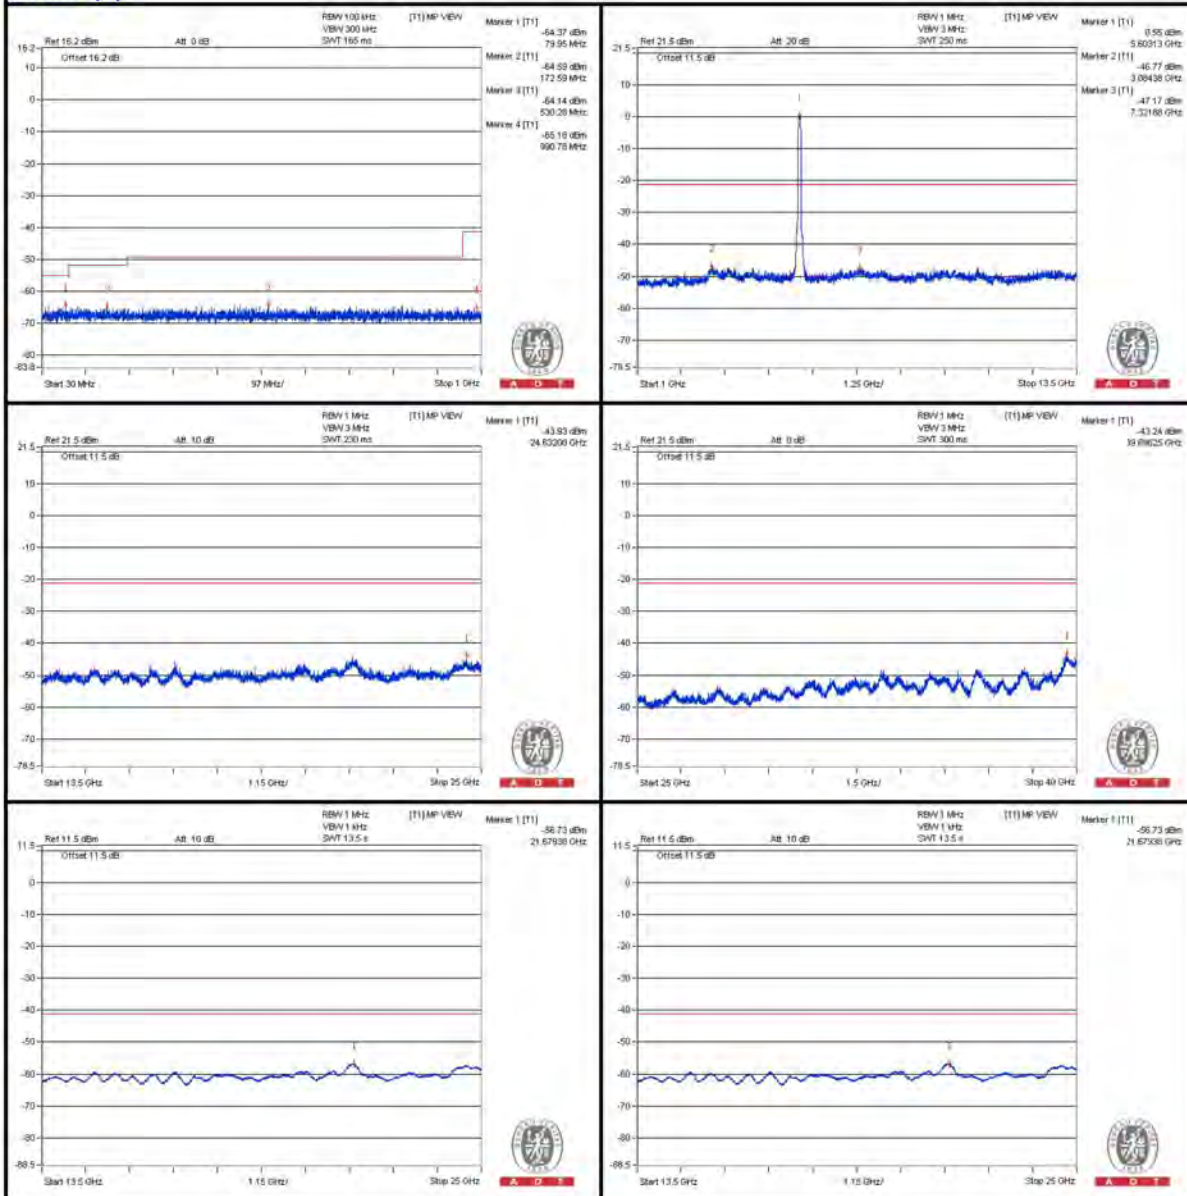

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5727.175 PK	62.72	74	-11.28	-44.28	-42.53	7.77	-32.54
2	5725.075 AV	49.97	54	-4.03	-56.06	-56.09	7.77	-45.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

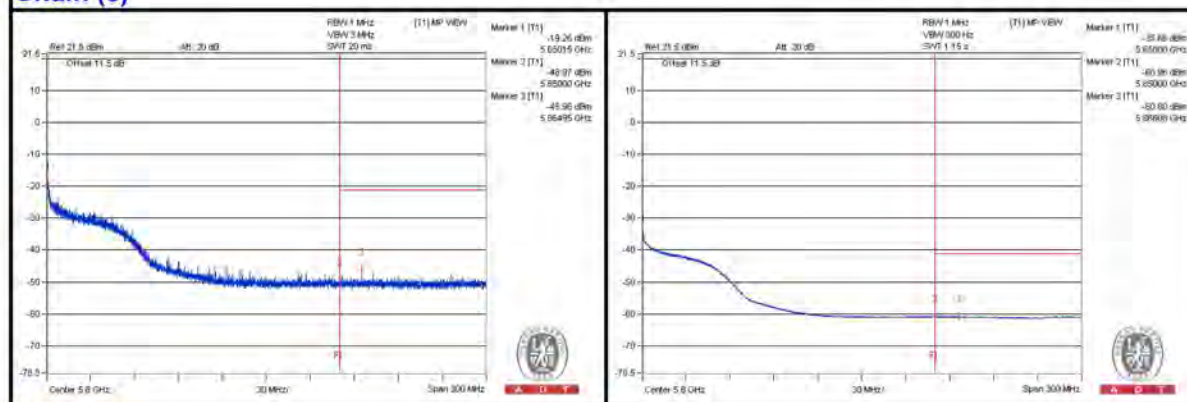

**Chain (1)**

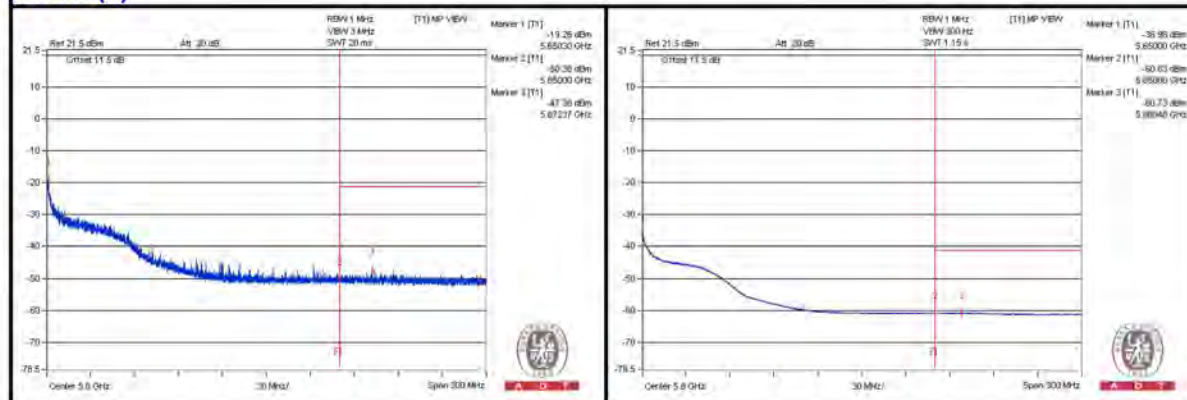

802.11ac (VHT80) - Channel 138

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3793.75 PK	58.79	74	-15.21	-49.08	-45.97	7.77	-36.47
2	3793.75 AV	51.52	54	-2.48	-70.27	-51.57	7.77	-43.74
3	7587.5 PK	57.17	74	-16.83	-47.8	-50.29	7.77	-38.09
4	7587.5 AV	48.64	54	-5.36	-55.15	-62.34	7.77	-46.62
5	11381.25 PK	55.75	74	-18.25	-50.47	-50.12	7.77	-39.51
6	11381.25 AV	37.39	54	-16.61	-69.08	-68.26	7.77	-57.87
7	17065 PK	56.44	74	-17.56	-49.63	-49.58	7.77	-38.82
8	17073.625 AV	45.53	54	-8.47	-60.48	-60.55	7.77	-49.73


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.



A D T

### Chain (0)

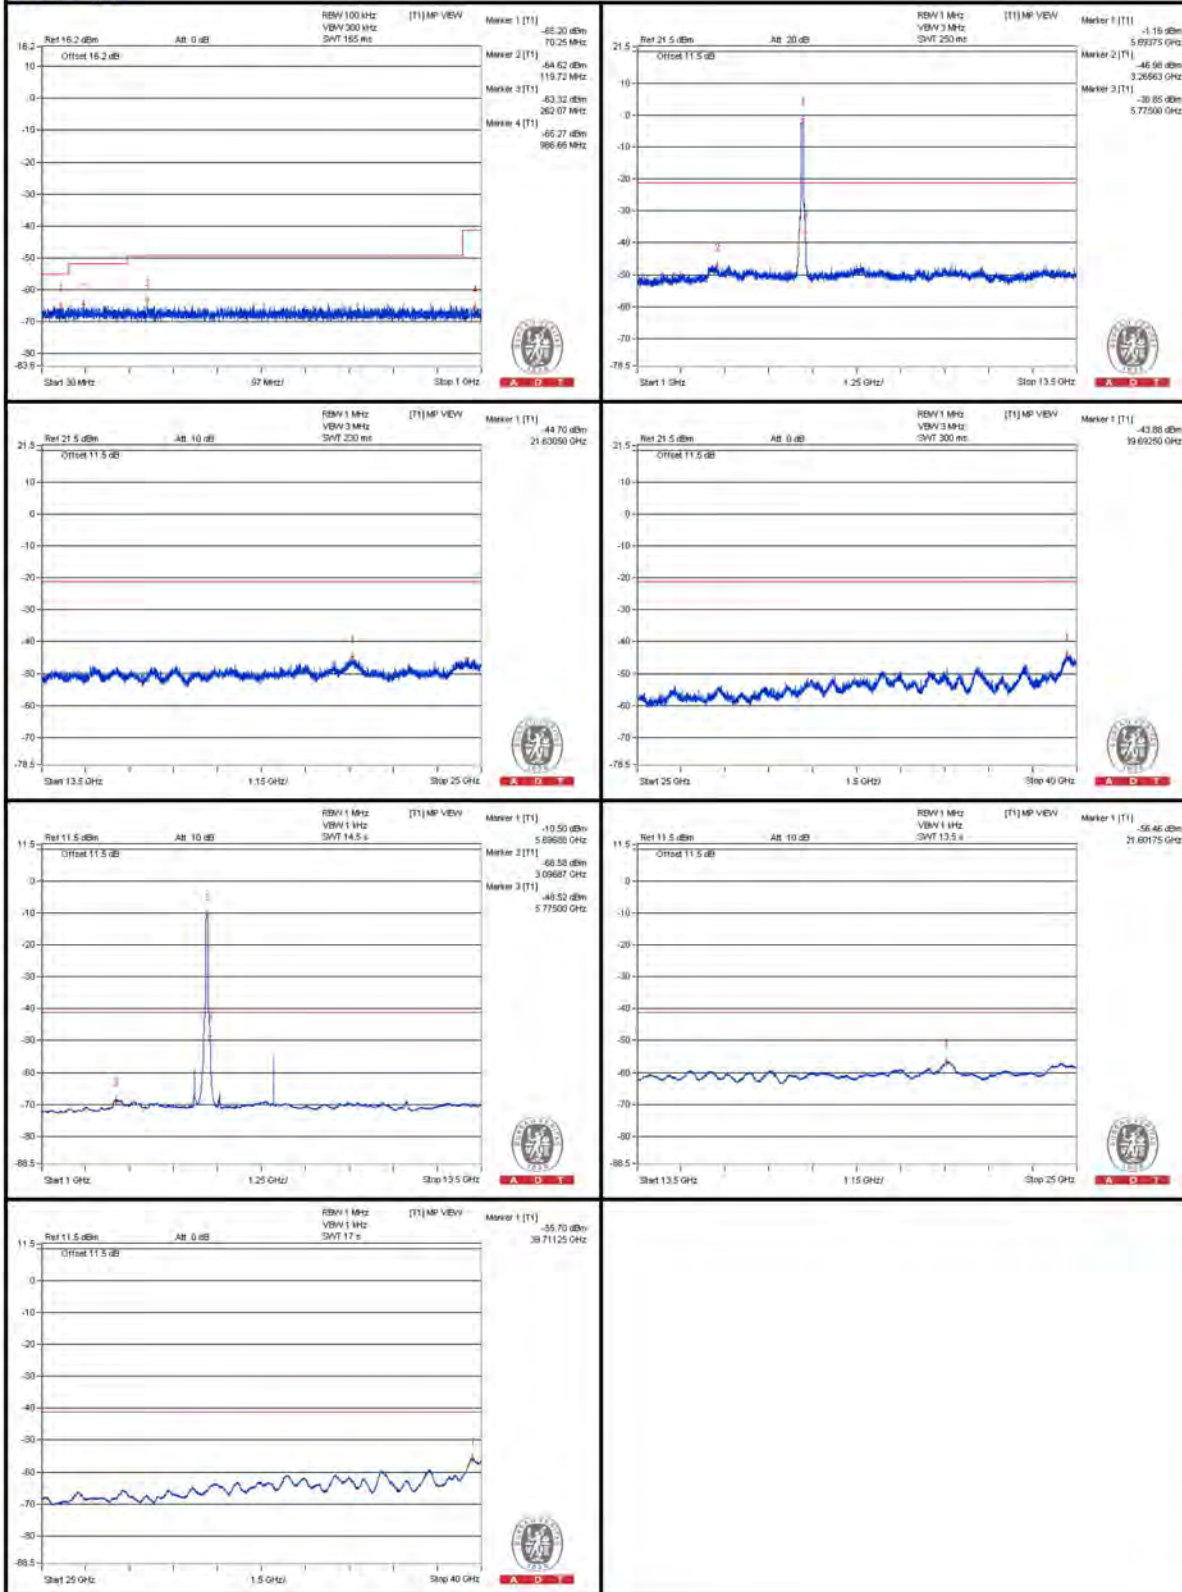

**Chain (1)**


**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5851.975 PK	59.65	74	-14.35	-44.26	-50.74	7.77	-35.61
2	5850.475 AV	45.84	54	-8.16	-60.04	-60.37	7.77	-49.42

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

**Chain (0)**

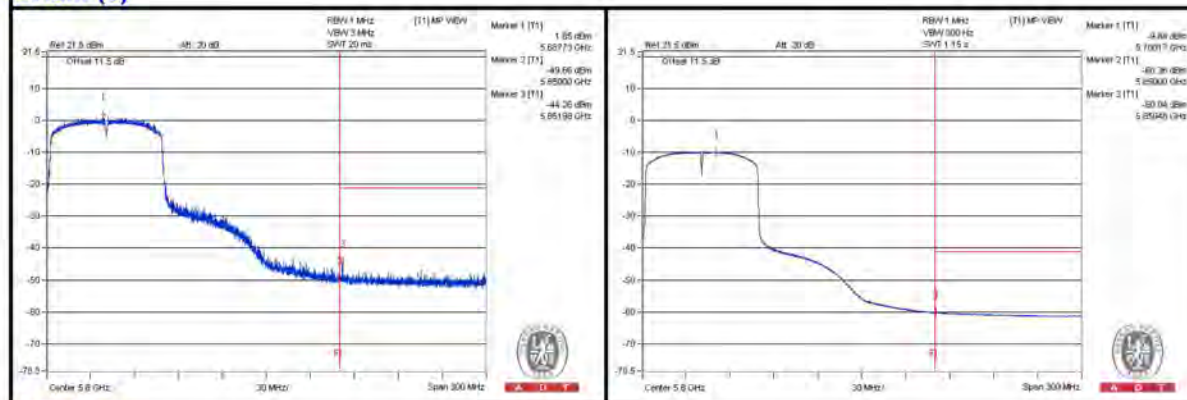

**Chain (1)**

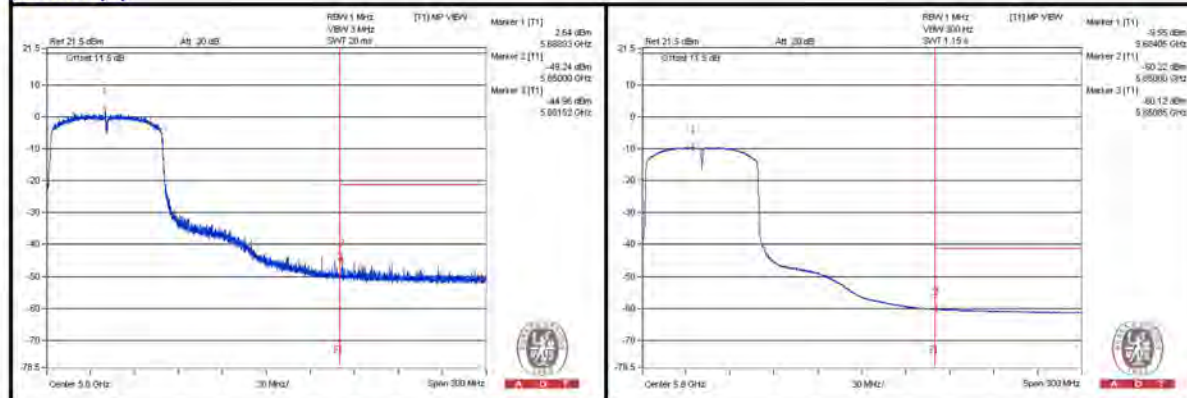

802.11ac (VHT80) - Channel 155

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3850 PK	58.78	74	-15.22	-49.59	-45.75	7.77	-36.48
2	3850 AV	53.93	54	-0.07	-60.95	-49.39	7.77	-41.33
3	7700 PK	57.06	74	-16.94	-48.61	-49.39	7.77	-38.2
4	7700 AV	47.04	54	-6.96	-56.18	-69.73	7.77	-48.22
5	11550 PK	55.01	74	-18.99	-52.04	-50.21	7.77	-40.25
6	11550 AV	36.92	54	-17.08	-69.89	-68.46	7.77	-58.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.



A D T

### Chain (0)

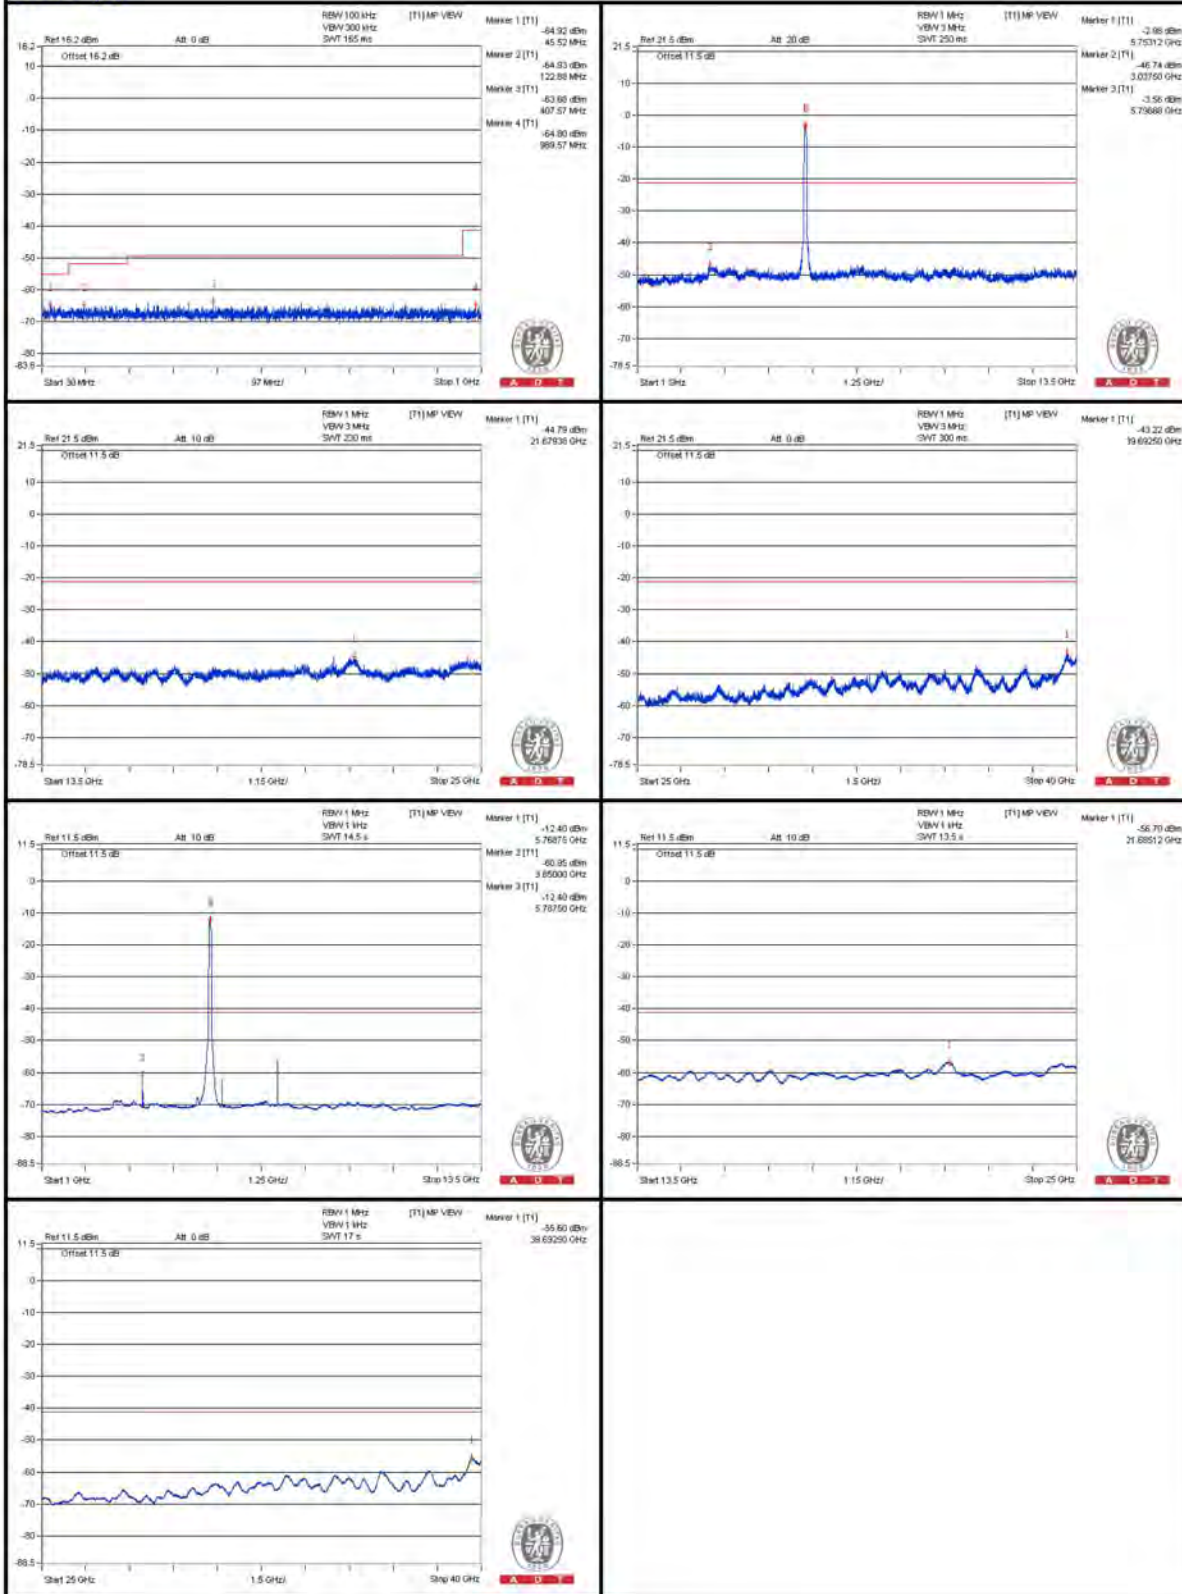






A D T

### Chain (1)

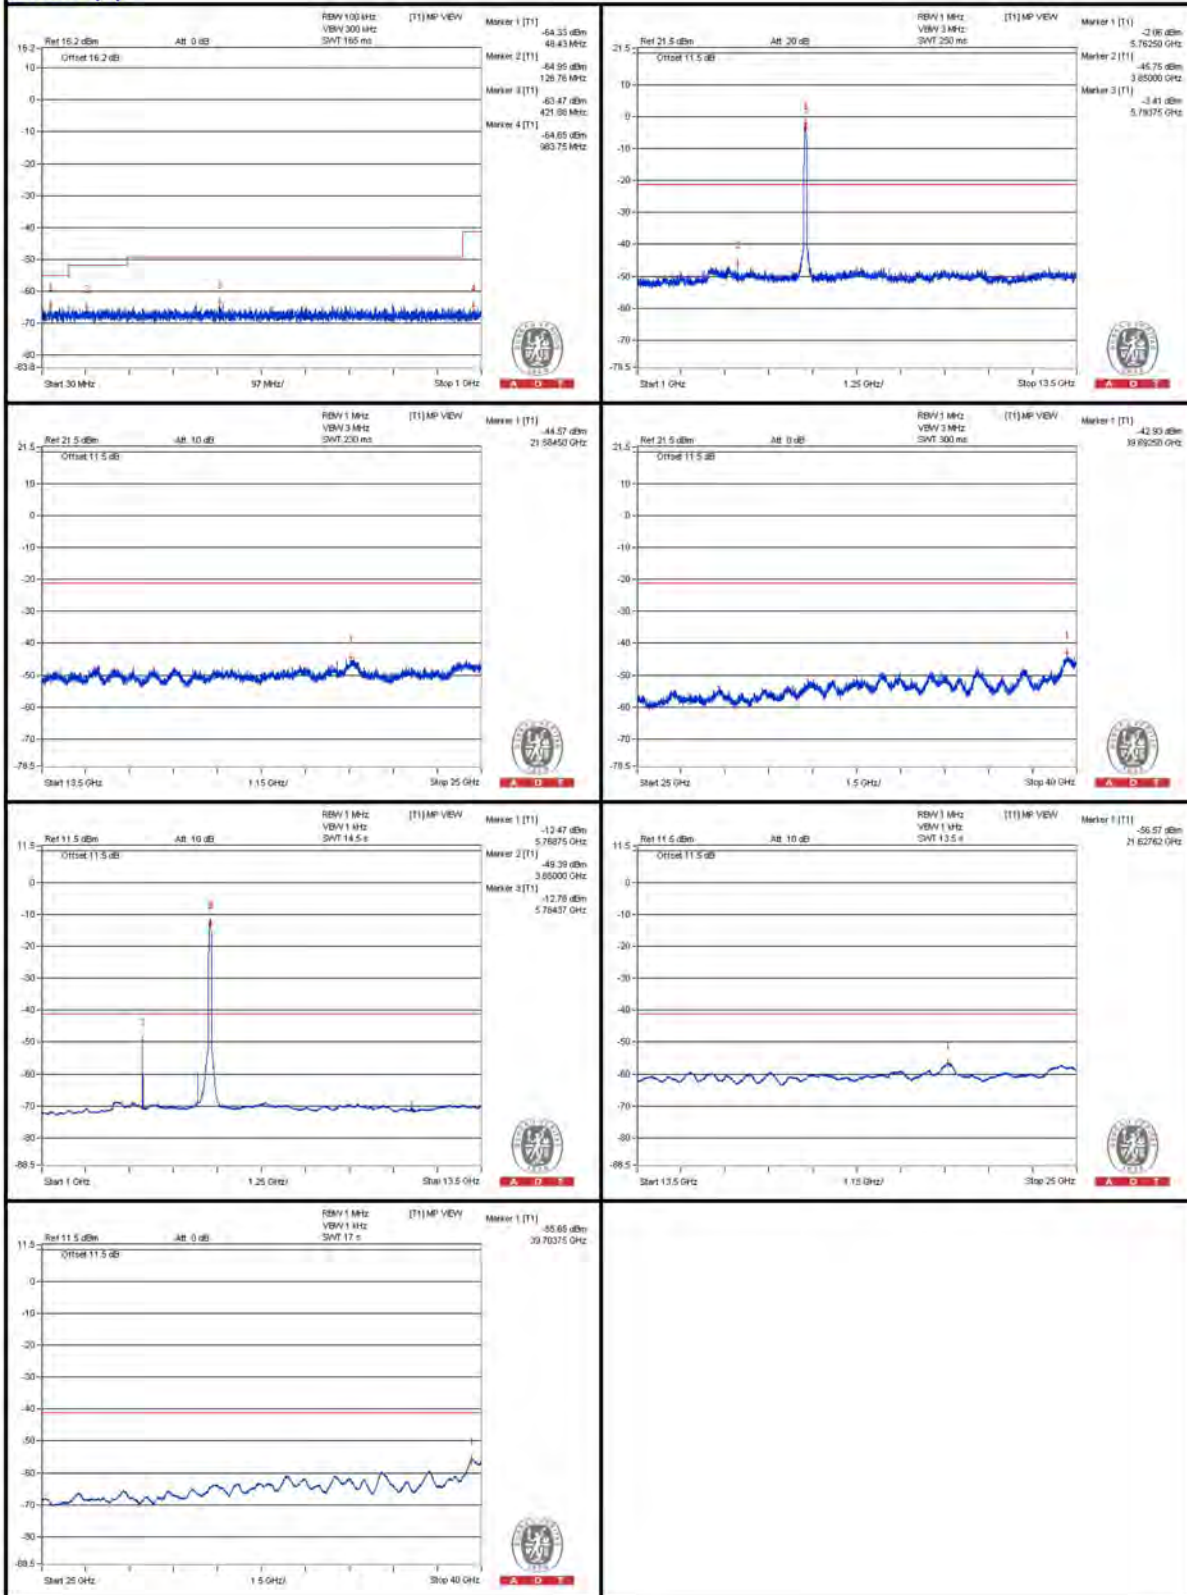

**Bandedge table**


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5713.85 PK	69.71	74	-4.29	-35.43	-37.47	7.77	-25.55
2	5714.075 AV	56.61	54	* 2.61	-48.18	-51.19	7.77	-38.65
3	5723.9 PK	72.3	78.2	-5.9	-32.02	-36.63	7.77	-22.96
4	5853.95 PK	66.36	78.2	-11.84	-38.15	-42.08	7.77	-28.9
5	5860.7 PK	65.16	74	-8.84	-39.92	-42.12	7.77	-30.1
6	5861.225 AV	52.83	54	-1.17	-52.24	-54.47	7.77	-42.43

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement. (Please refer APPENDIX A)

**Chain (0)**

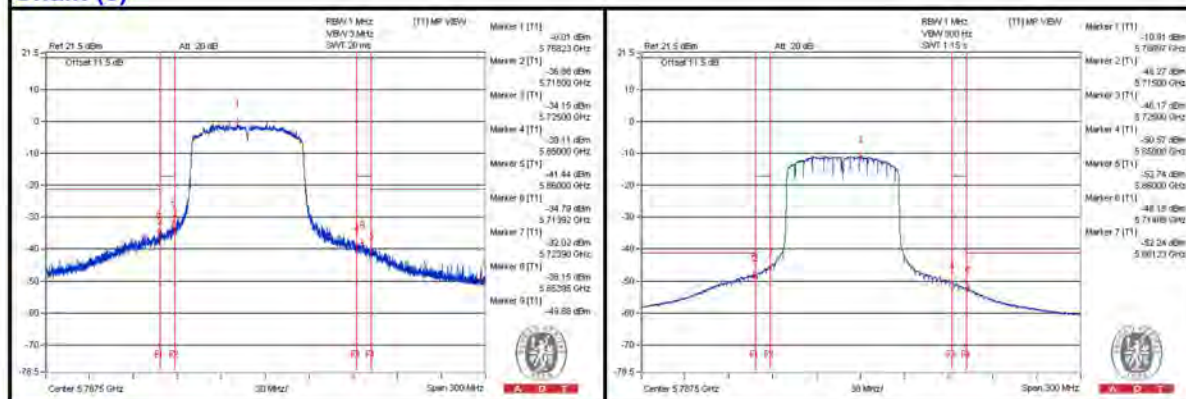

**Chain (1)**

