




RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400.0 MHz - 2483.5 MHz band	
Report Reference No	G0M-2108-9956-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 <p>DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970</p>
Applicant	Leica Geosystems AG
Address	Heinrich-Wild-Strasse 9435 Heerbrugg SWITZERLAND
Test Specification	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, Amendment 2, 2021-02
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Bluetooth, WLAN and BLE Module
Model(s)	TiWi-BLE
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	1.0
Software Version(s)	4.0
FCC ID	RFD-BTWCO
IC	3177A-BTWCO
Test Result	PASSED

Possible test case verdicts:		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 °C - 30 °C	
Test Lab Humidity	25 % - 55 %	
Date of receipt of test item	2021-10-14	
Report:		
Compiled by	Jens Degenhardt	
Tested by	Jens Degenhardt	
Tested and responsible for test	Florian Voigt	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2022-02-17	
Total number of pages	45	
General Remarks:		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2022-02-17	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage



REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External.....	7
1.2	Photos – Equipment Internal.....	9
1.3	Support Equipment.....	11
1.4	Test Modes.....	12
1.5	Test Frequencies.....	12
1.6	Sample emission level calculation.....	13
2	Result Summary.....	14
3	Test Conditions and Results.....	15
3.1	Test Conditions and Results - Transmitter radiated emissions.....	15
3.2	Test Conditions and Results - Receiver radiated emissions.....	21


1 Equipment (Test Item) Under Test

Description	Bluetooth, WLAN and BLE Module	
Model	TiWi-BLE	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	None	
Test Sample Id(s)	36589	
Hardware Version(s)	1.0	
Software Version(s)	4.0	
PMN	Leica Geosystems AG	
HVIN	TIWI	
FVIN	N/A	
HMN	N/A	
FCC ID	RFD-BTWCO	
IC	3177A-BTWCO	
Equipment type	Radio Module	
Radio type	Transceiver	
Assigned frequency bands	2400.0 MHz - 2483.5 MHz	
Radio technology	Bluetooth LE 4.0	
Bluetooth Specification	LE 1M PHY	Yes
	LE 2M PHY	No
	LE Coded PHY S=8 (125 kbit)	No
	LE Coded PHY S=2 (500 kbit)	No
	Stable Modulation Index - Transmitter	No
	Stable Modulation Index - Receiver	No
Modulation	GFSK	
Number of antenna ports	1	
Radio Module	Type	Bluetooth and WLAN module
	Model	TIWI-BLE
	Manufacturer	LS Research
	HW Version	5
	SW Version	Not specified
	FCC ID	RFD-BTWCO
	IC	3177A-BTWCO
Antenna	Type	External antenna
	Model	SWLP.2450.12.4.B.02
	Manufacturer	Taoglas
	Gain	2 dBi
Supply Voltage	V _{NOM}	7 VDC
Operating Temperature	T _{NOM}	25 °C
Manufacturer	Leica Geosystems AG Heinrich-Wild-Strasse 9435 Heerbrugg SWITZERLAND	


1.1 Photos – Equipment External

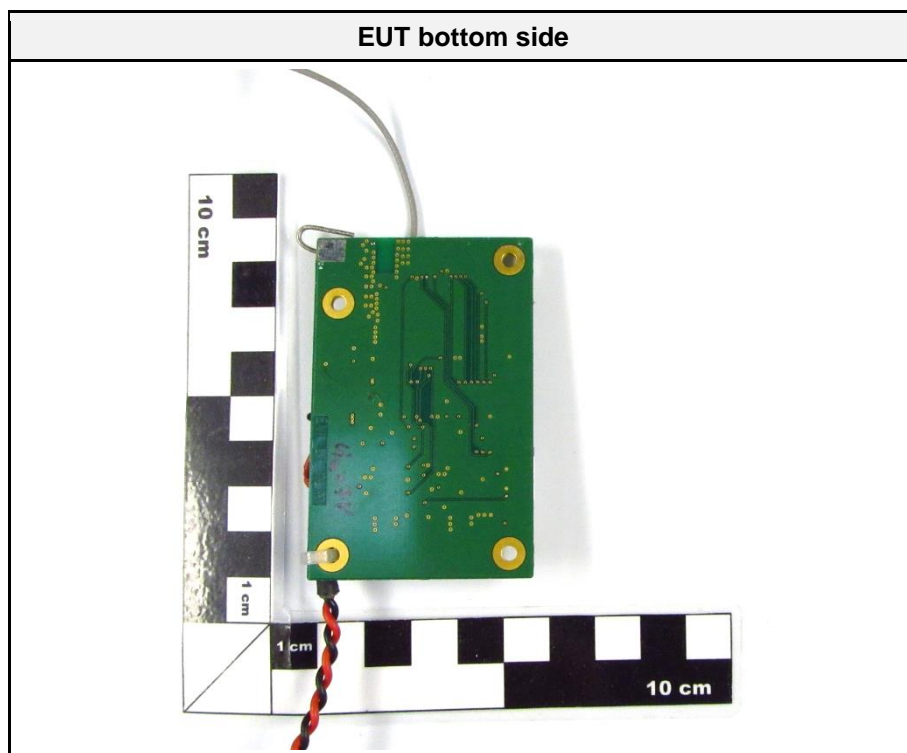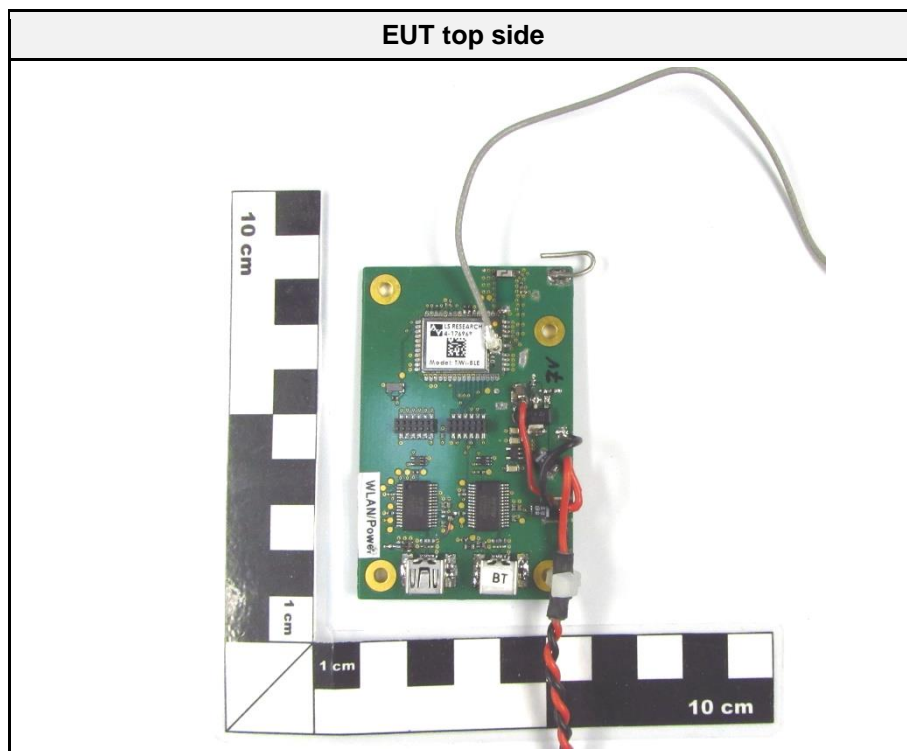


EUT + antenna, top side

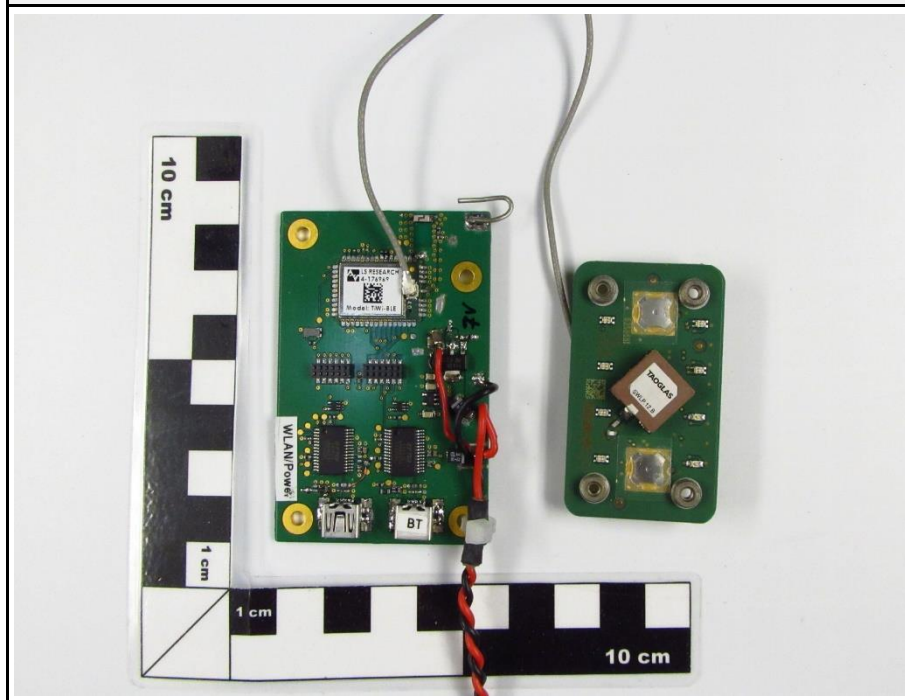


EUT + antenna, bottom side

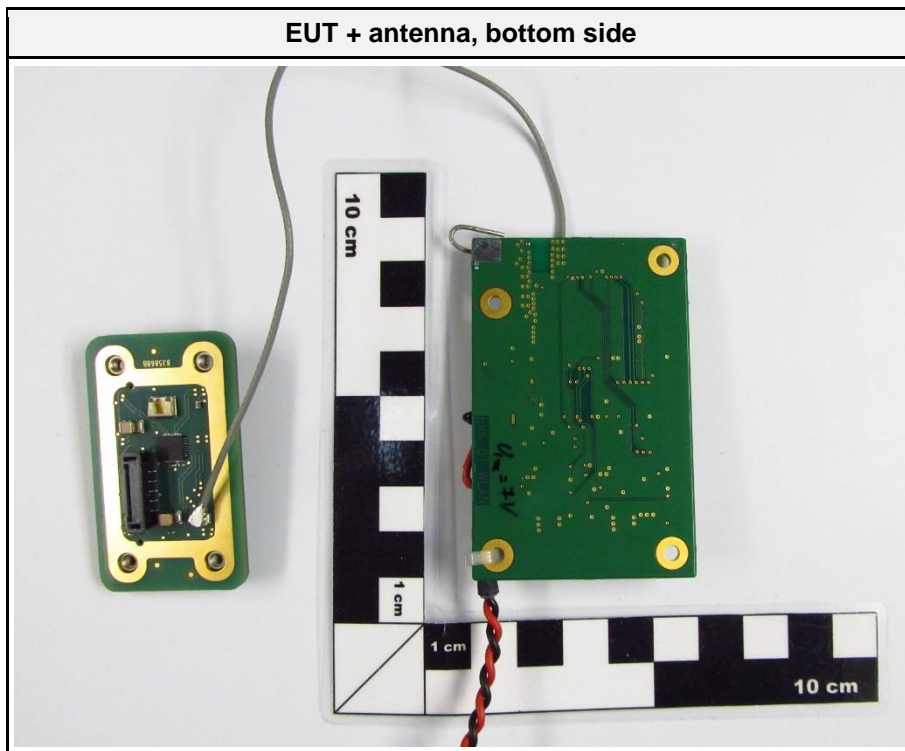

1.2 Photos – Equipment Internal

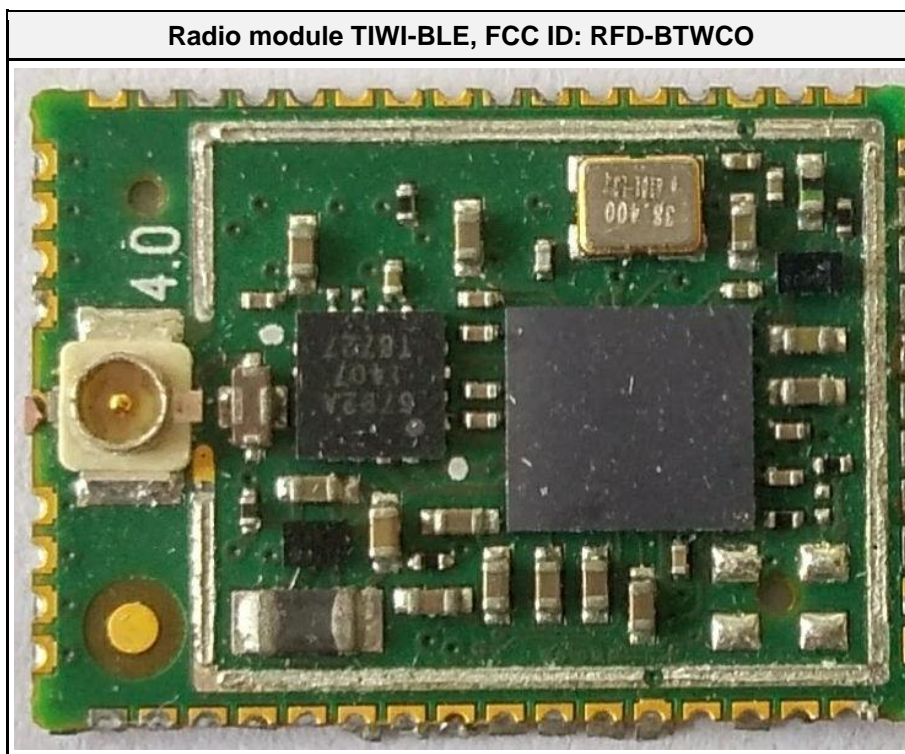

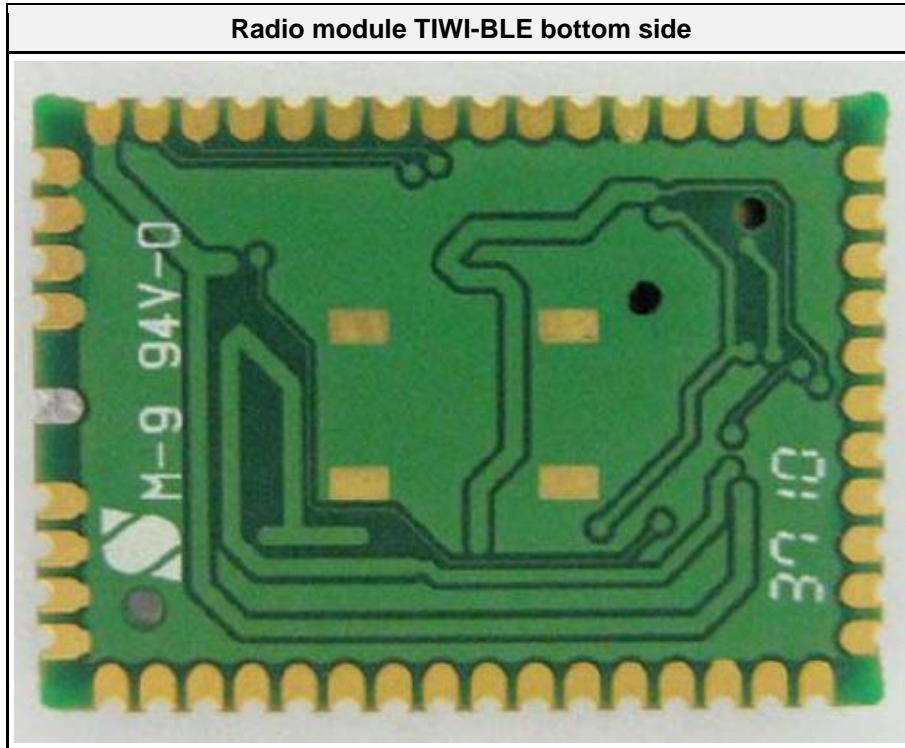

1.3 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
SFT	Tiwi BT Eval Tool	LS research	Tiwi BT Eval Tool V4.0.0.0	Test mode tool
AE	Laptop	Lenovo	T440	SN:PC01B76F
AE	USB over fiber	mk messtechnik	optoUSB-2.0	Transceiver
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.4 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Power setting = 15 (Software setting) Packet length = 37 Duty cycle = 63%
Receive	Mode = Receive
Comment:	

1.5 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

1.6 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
+21.5 dBµV + 26 dB/m		= 47.5 dBµV/m		47.5 dBµV/m - 57.0 dBµV/m		= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 A2 (section 6.7)	Occupied Bandwidth	ANSI C63.10-2013	N/R	
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	N/T	
FCC § 15.247(b) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	N/T	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	N/T	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	N/T	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	N/T	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	N/T	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 A2 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.4-2014	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Transmitter radiated emissions


3.1.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISED RSS-Gen, Issue 5 A2 (section 6.13)
Measurement Uncertainty	± 5.95 dB
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Florian Voigt
Date	2021-11-25 + 2021-12-07

3.1.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [$\mu\text{V}/\text{m}$]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.1.3 Setup

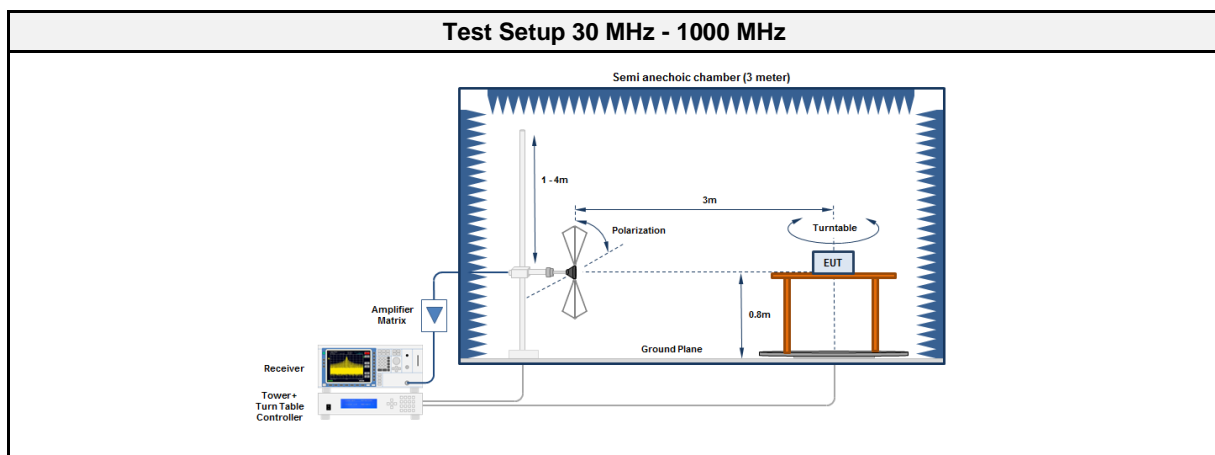

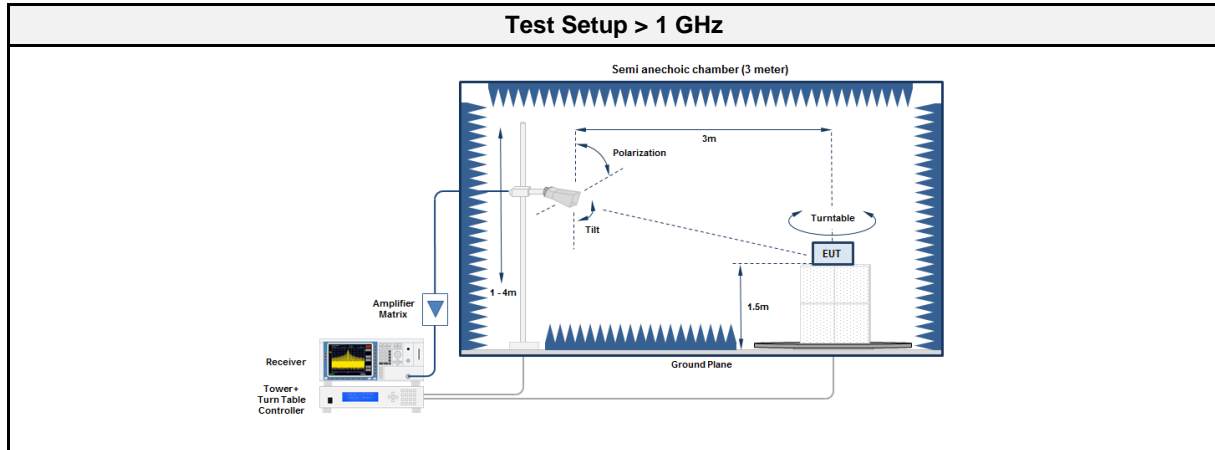

3.1.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2021-02	2024-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2022-07
Antenna	R&S	HK 116	EF00030	2021-05	2024-05
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC 2	EF01616	2021-09	2022-09
Spectrum analyzer	R&S	FSU43	EF01631	2021-07	2022-07
Horn antenna	Schwarzbeck	BBHA 9120B	EF01678	2021-03	2022-03
Horn Antenna	Schwarzbeck	HWRD 650	EF01679	2021-03	2022-03
Antenna	Amplifier Research	AT4560	EF00302	2021-06	2023-06

3.1.5 Procedure



Test Procedure 30 MHz - 1000 MHz
<ol style="list-style-type: none"> EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground EUT set to test mode The receiver is set to peak detection with max hold The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz
<ol style="list-style-type: none"> EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground EUT set to test mode The receiver is set to peak detection with max hold The EUT is rotated through 360° and the table with the EUT is tilted between 0° and 150° All significant emissions are measured again using the corresponding final detector


3.1.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Margin [dB]
2402	37.7435	24.80	qpk	ver	40.00	-15.19
2402	124.996	31.50	qpk	ver	43.50	-11.99
2402	264.12	30.30	pk	hor	46.00	-15.72
2402	2379	62.30	pk	hor	74.00	-11.70
2402	2379	47.21	avg	hor	54.00	-06.79
2402	4804.4	39.90	pk	ver	74.00	-34.10
2402	4804.4	32.16	avg	ver	54.00	-21.84
2402	19216	51.96	pk	hor	74.00	-22.04
2402	19216	53.17	pk	hor	74.00	-20.83
2402	19216	47.10	avg	hor	54.00	-06.90
2402	19216	48.28	avg	hor	54.00	-05.72
2440	37.837	24.80	qpk	ver	40.00	-15.18
2440	108.03	21.90	qpk	ver	43.50	-21.63
2440	125.0002	30.90	qpk	ver	43.50	-12.60
2440	264.04	25.00	pk	ver	46.00	-20.97
2440	328.28	27.70	pk	hor	46.00	-18.29
2440	2378.8	60.88	pk	hor	74.00	-13.12
2440	2378.8	46.36	avg	hor	54.00	-07.64
2440	4880	45.66	pk	hor	74.00	-28.34
2440	4880	41.46	avg	hor	54.00	-12.54
2440	19520	50.15	pk	hor	74.00	-23.85
2440	19520	44.63	avg	hor	54.00	-09.37
2480	124.9991	33.00	qpk	ver	43.50	-10.49
2480	263.92	29.20	pk	hor	46.00	-16.75
2480	2379	58.40	pk	hor	74.00	-15.60
2480	2379	43.61	avg	hor	54.00	-10.39
2480	2486.8	58.71	pk	ver	74.00	-15.29
2480	2486.8	45.47	avg	ver	54.00	-08.53
2480	4960	45.33	pk	hor	74.00	-28.67
2480	4960	40.37	avg	hor	54.00	-13.63
2480	19842	49.12	pk	ver	74.00	-24.88
2480	19842	42.31	avg	ver	54.00	-11.69


3.1.7 Setup Photos

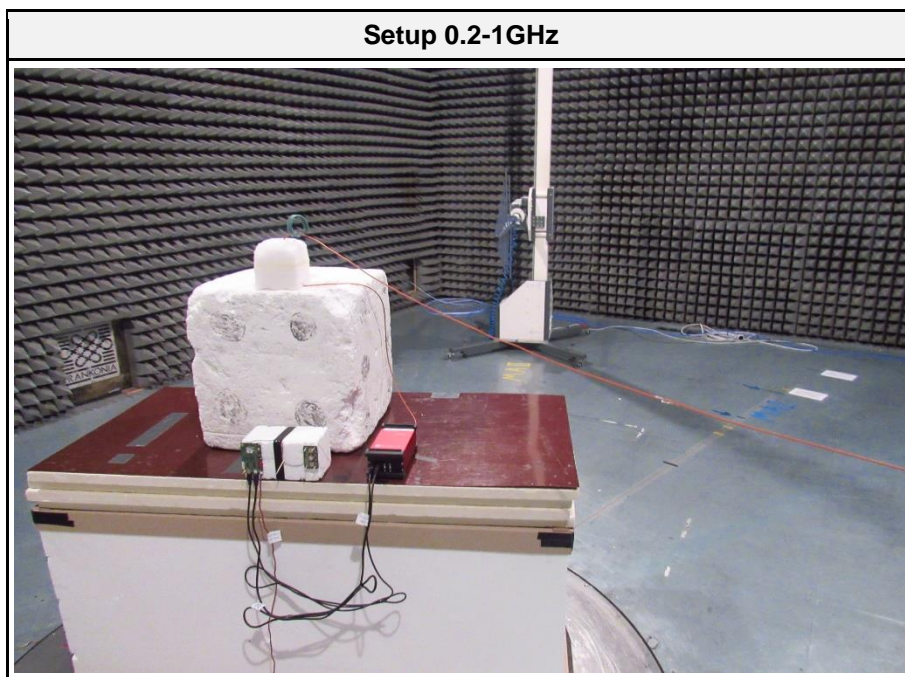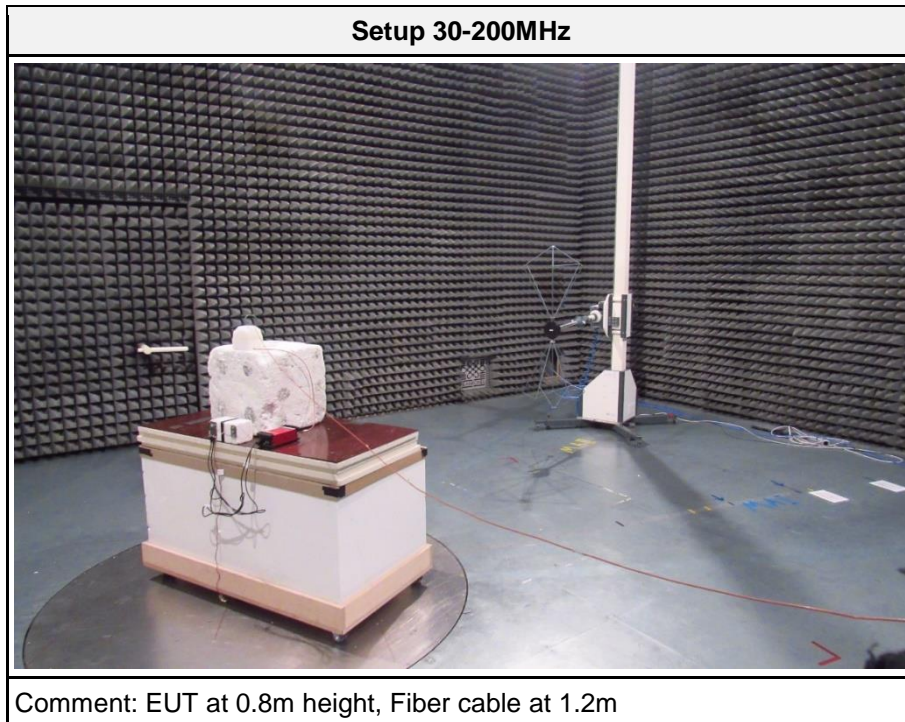


Setup 1-8GHz

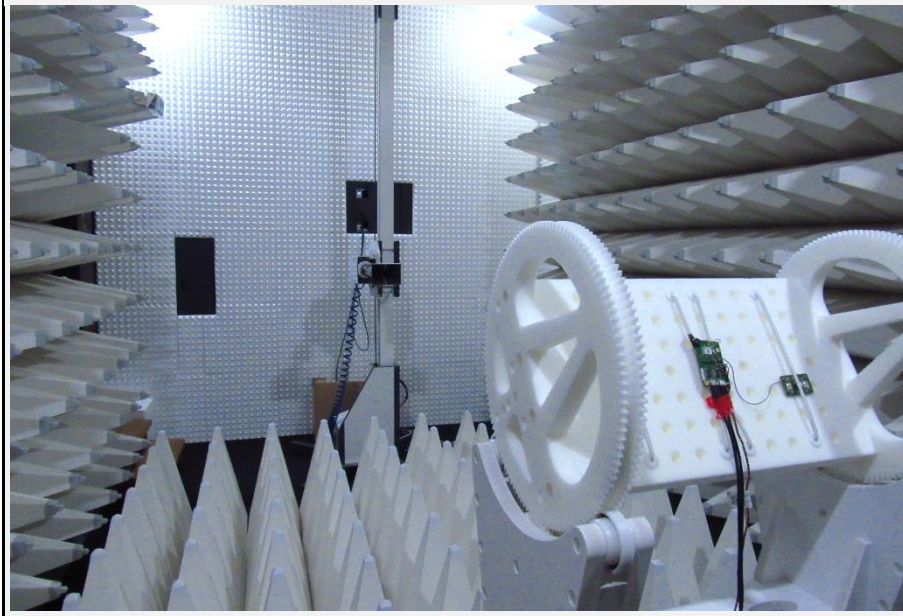

Setup 8-18GHz

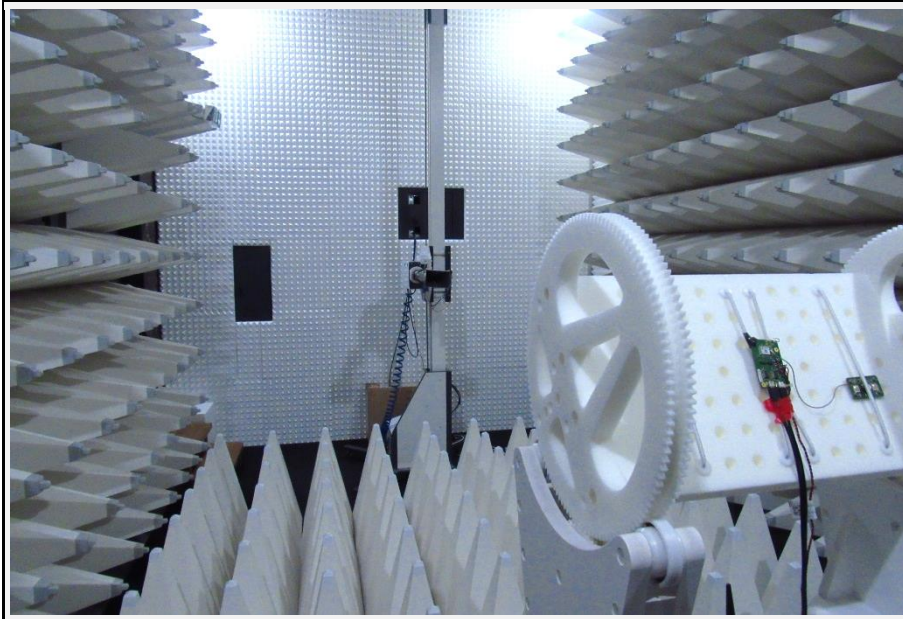

Setup 18-26.5GHz

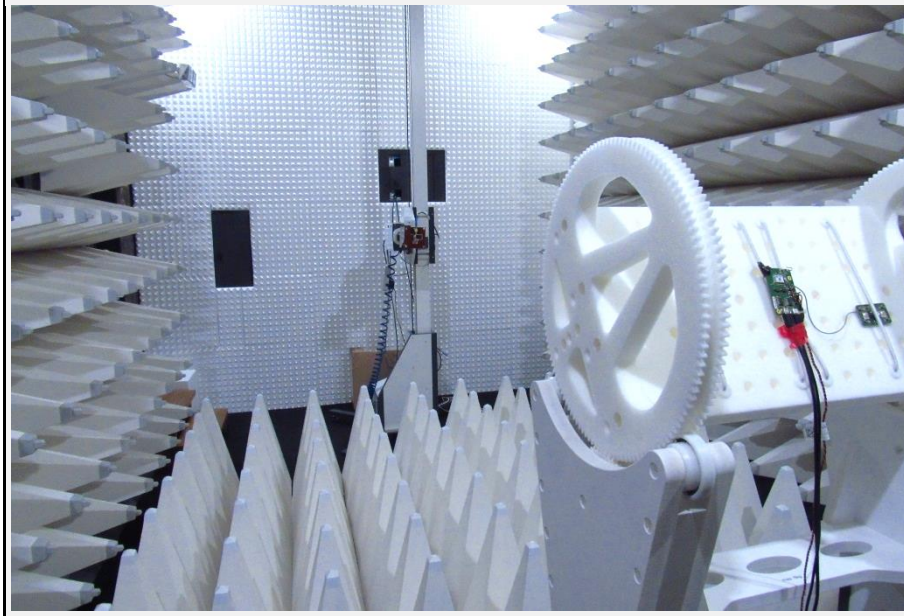

3.2 Test Conditions and Results - Receiver radiated emissions



3.2.1 Information

Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Uncertainty	± 5.95 dB
Measurement Method	ANSI C63.4-2014 8.1-8.3
Operator	Florian Voigt, Jens Degenhardt
Date	2021-12-07 - 2021-12-13

3.2.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [$\mu\text{V}/\text{m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.2.3 Setup

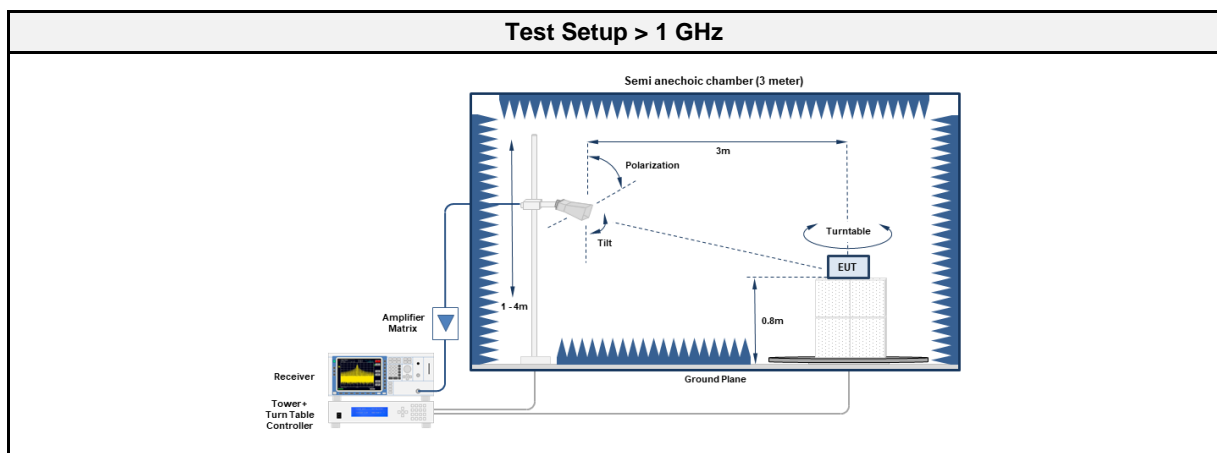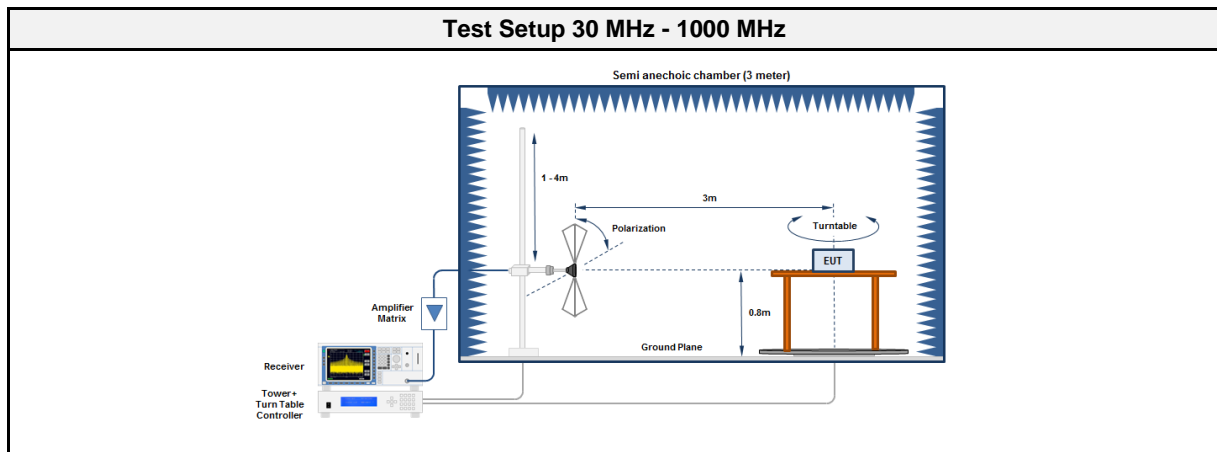

3.2.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2021-02	2024-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2022-07
Antenna	R&S	HK 116	EF00030	2021-05	2024-05
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2021-02	2024-02
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2022-07
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2019-10	2022-10
Horn Antenna	Schwarzbeck	HWRD 650	EF01679	2021-03	2022-03



3.2.5 Procedure



Test Procedure
<ol style="list-style-type: none"> 1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT is set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector

3.2.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Margin [dB]
2440	34.5305	28.80	qpk	ver	40.00	-11.23
2440	125.0002	30.90	qpk	ver	43.50	-12.59
2440	562.48	33.60	qpk	hor	46.00	-12.39
2440	625	34.70	qpk	hor	46.00	-11.33
2440	1995	46.61	pk	ver	74.00	-27.39
2440	1995	25.12	avg	ver	53.98	-28.86
2440	9648	39.58	pk	hor	74.00	-34.42
2440	9648	36.67	avg	hor	53.98	-17.31

3.2.7 Setup Photos

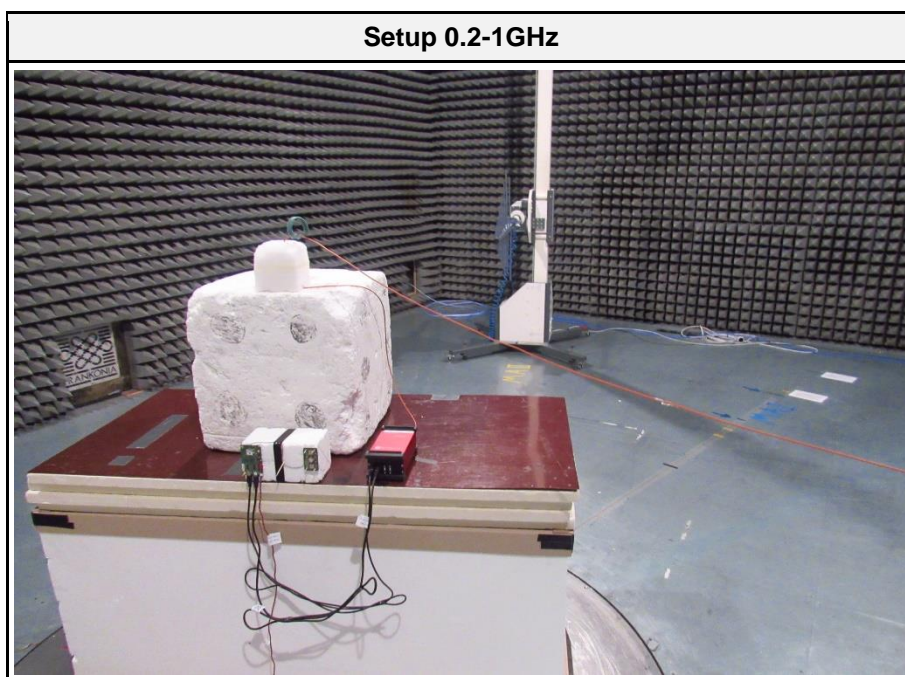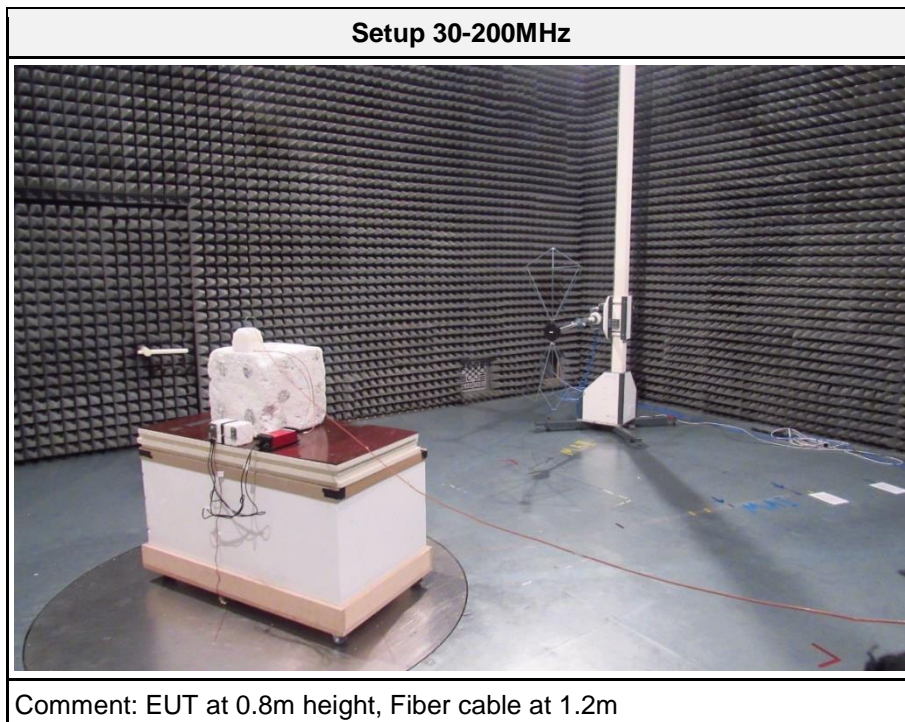

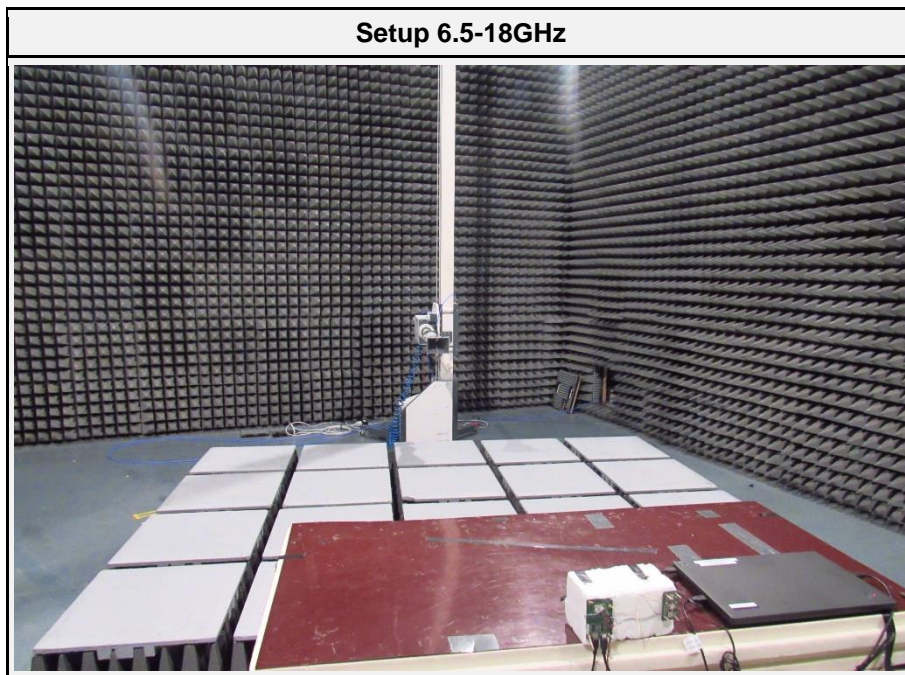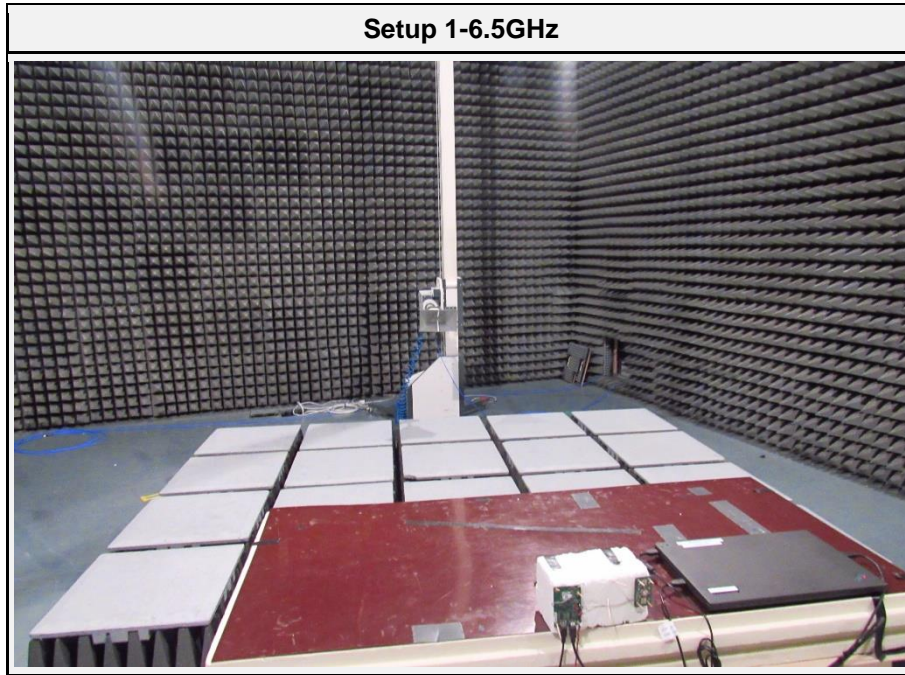


ANNEX A Transmitter spurious emissions

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Tx; 2402MHz, GFSK
 Test Date: 2021-12-07
 Note:

Index 19

RadiMation

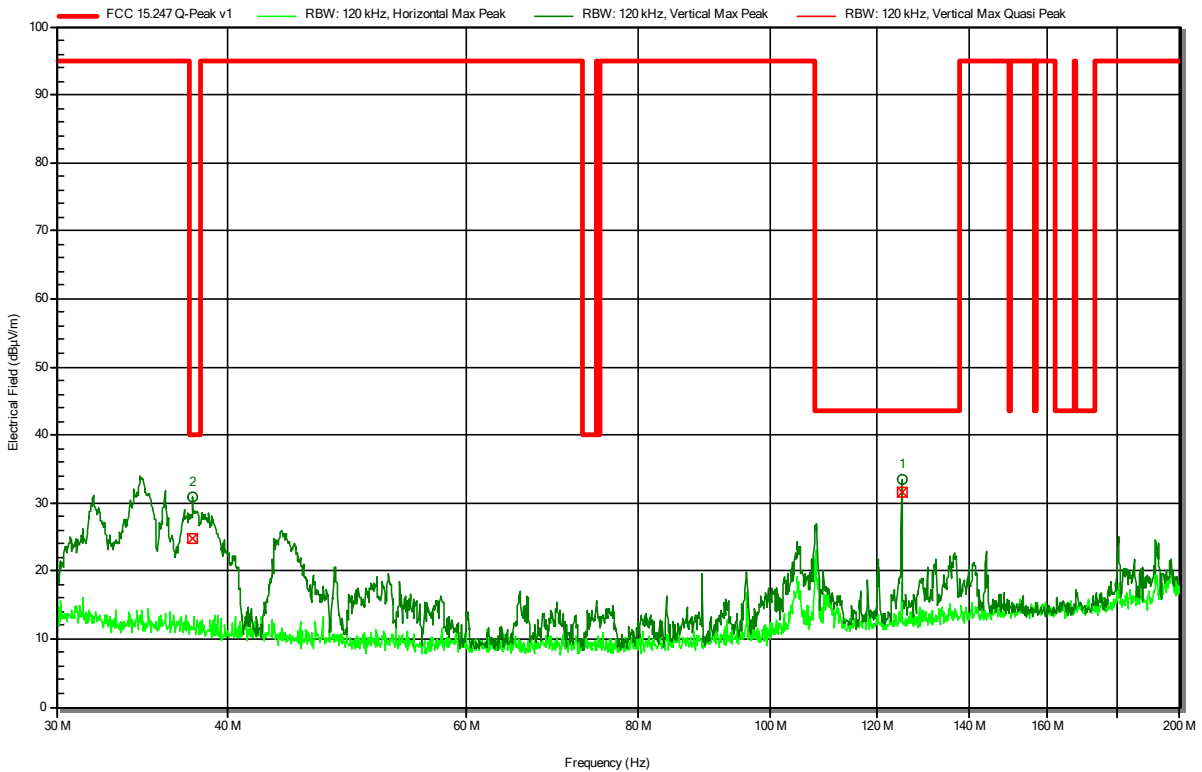

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
37.7435 MHz	24.8 dBµV/m	40 dBµV/m	-15.19 dB	Pass	Vertical
124.996 MHz	31.5 dBµV/m	43.5 dBµV/m	-11.99 dB	Pass	Vertical

Test Report No.: G0M-2108-9956-TFC247BL-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Tx; 2440MHz, GFSK
 Test Date: 2021-12-07
 Note:

Index 18

RadiMation

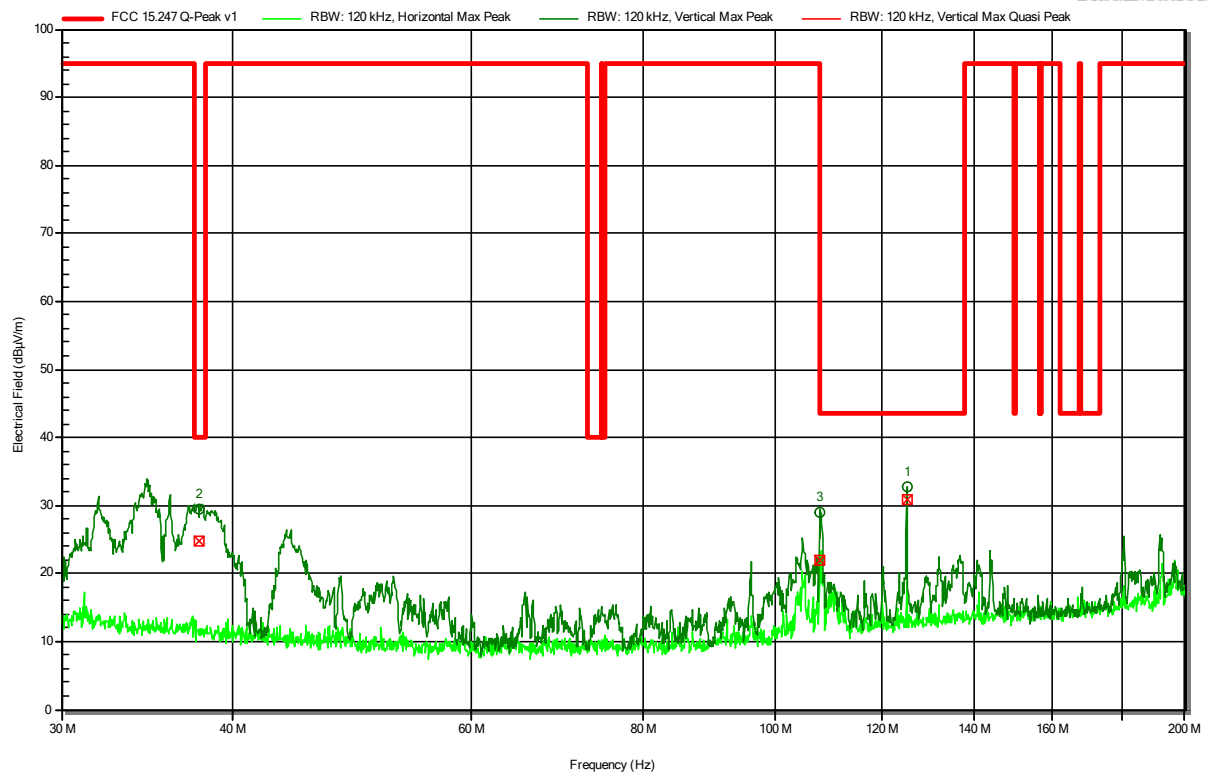


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
37.837 MHz	24.8 dBµV/m	40 dBµV/m	-15.18 dB	Pass	Vertical
108.03 MHz	21.9 dBµV/m	43.5 dBµV/m	-21.63 dB	Pass	Vertical
125.0002 MHz	30.9 dBµV/m	43.5 dBµV/m	-12.6 dB	Pass	Vertical

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Tx; 2480MHz, GFSK
 Test Date: 2021-12-07
 Note:

Index 16

RadiMation

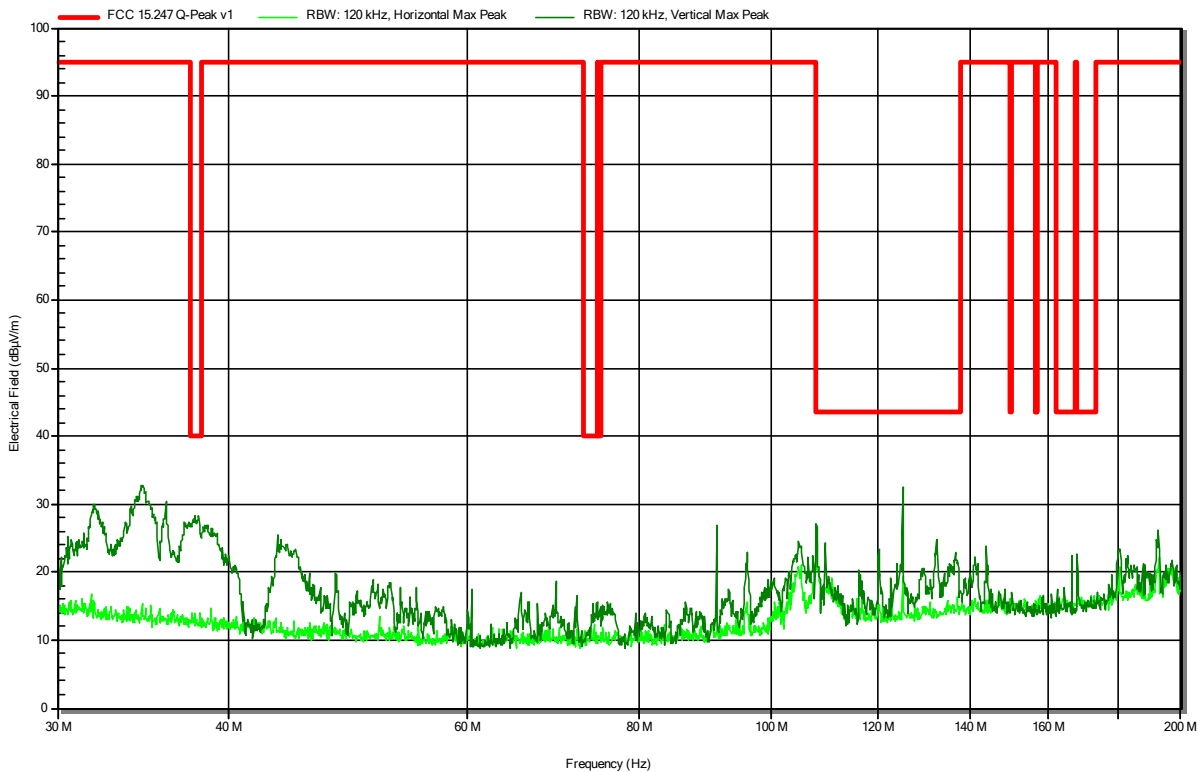


Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223
 Measurement distance: 3 m
 Mode: Tx; 2402MHz, GFSK
 Test Date: 2021-12-07
 Note:

Index 14

RadiMation

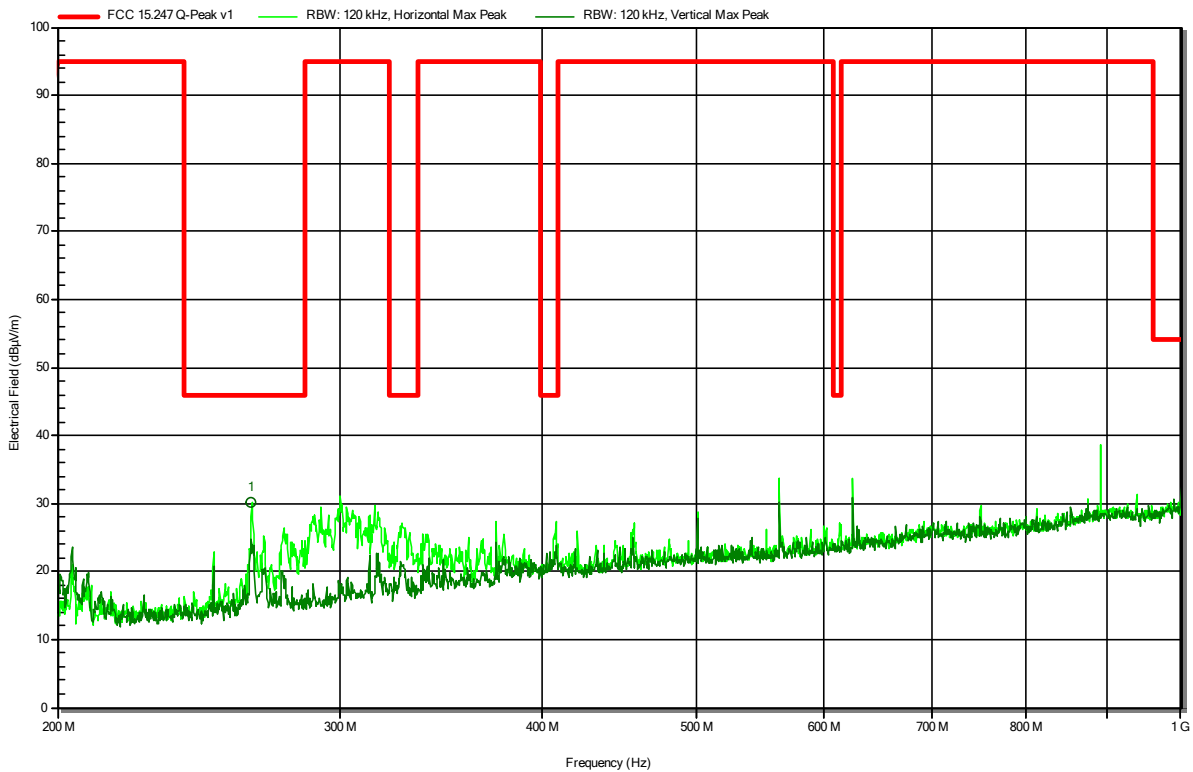


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
264.12 MHz	30.3 dBµV/m	46 dBµV/m	-15.72 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223
 Measurement distance: 3 m
 Mode: Tx; 2440MHz, GFSK
 Test Date: 2021-12-07
 Note:

Index 13

RadiMation

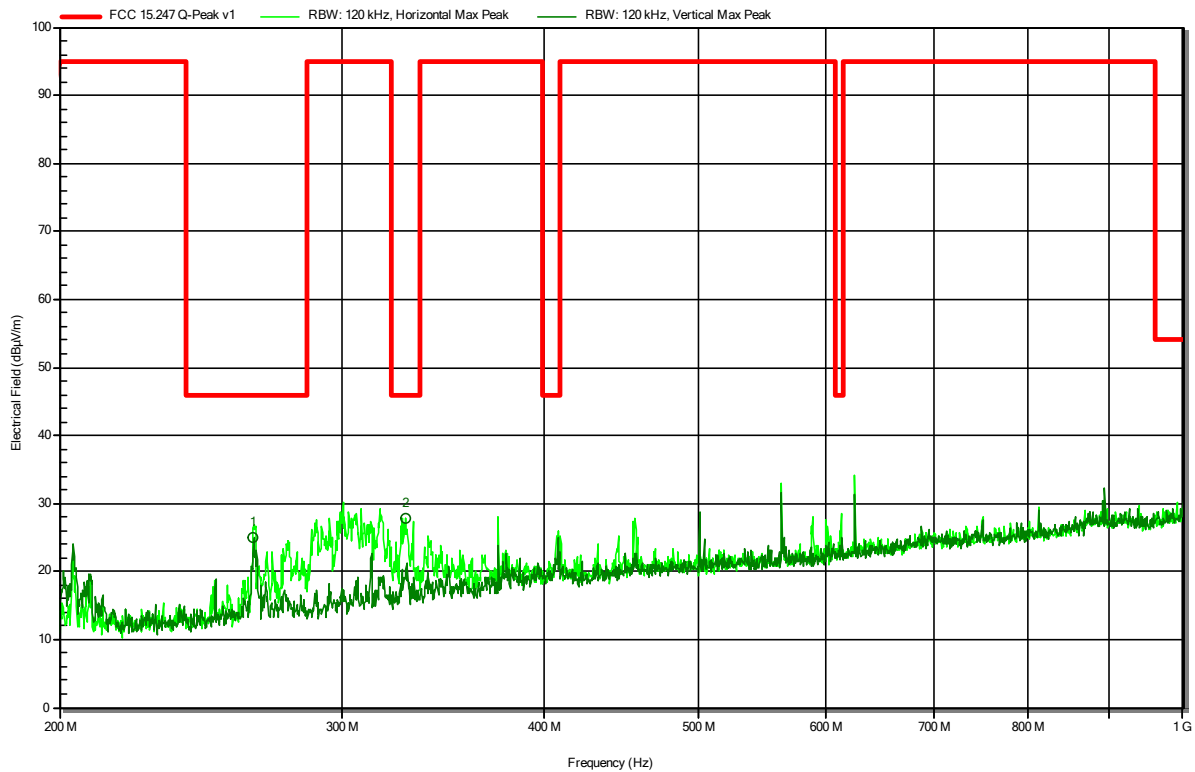


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
264.04 MHz	25 dBµV/m	46 dBµV/m	-20.97 dB	Pass	Vertical
328.28 MHz	27.7 dBµV/m	46 dBµV/m	-18.29 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223
 Measurement distance: 3 m
 Mode: Tx; 2480MHz, GFSK
 Test Date: 2021-12-07
 Note:

Index 15

RadiMation

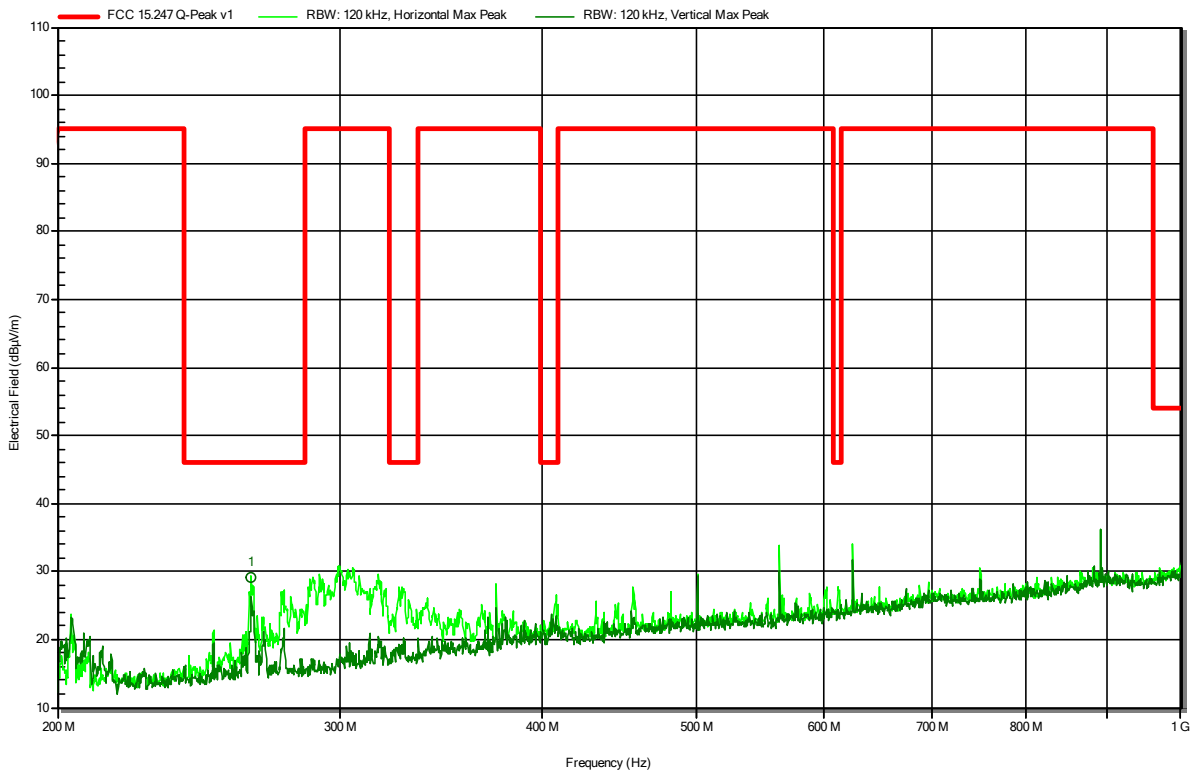


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
263.92 MHz	29.2 dBµV/m	46 dBµV/m	-16.75 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120B, Vertical
 Measurement distance: 3 m
 Mode: Tx; 2402MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 1
RadiMation

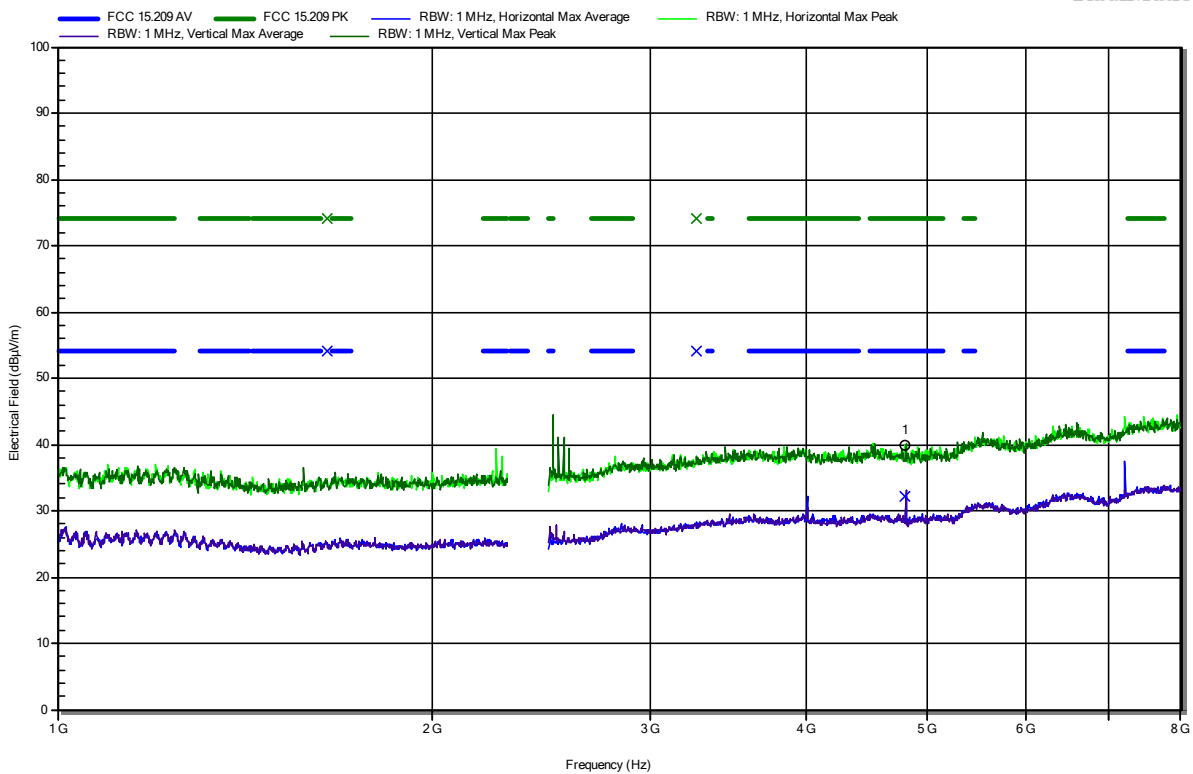


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.8044 GHz	39.9 dBµV/m	74 dBµV/m	-34.1 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
4.8044 GHz	32.16 dBµV/m	54 dBµV/m	-21.84 dB	Pass

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; 2402MHz, GFSK
 Test Date: 2021-11-25
 Note: lower bandedge

Index 2

RadiMation

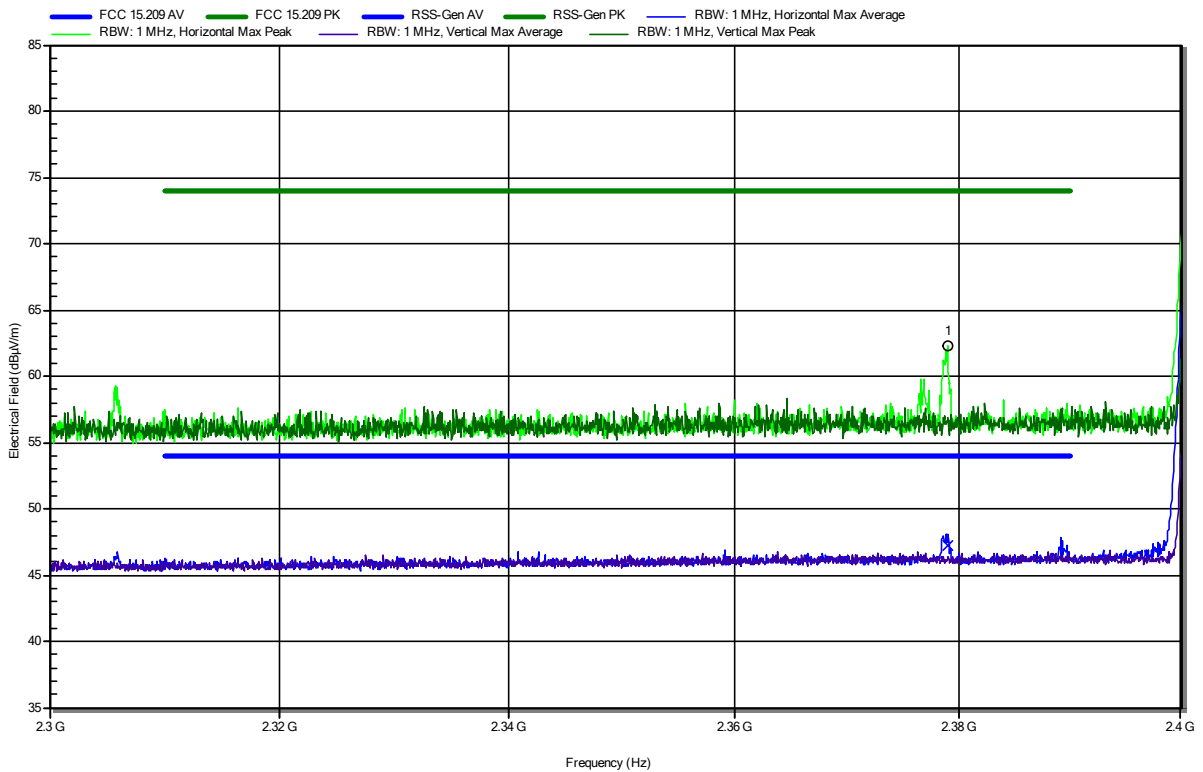


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.379 GHz	62.3 dBµV/m	74 dBµV/m	-11.7 dB	Pass	Horizontal
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.379 GHz	47.21 dBµV/m	54 dBµV/m	-6.79 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120B, Horizontal
 Measurement distance: 3 m
 Mode: Tx; 2440MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 3
RadiMation

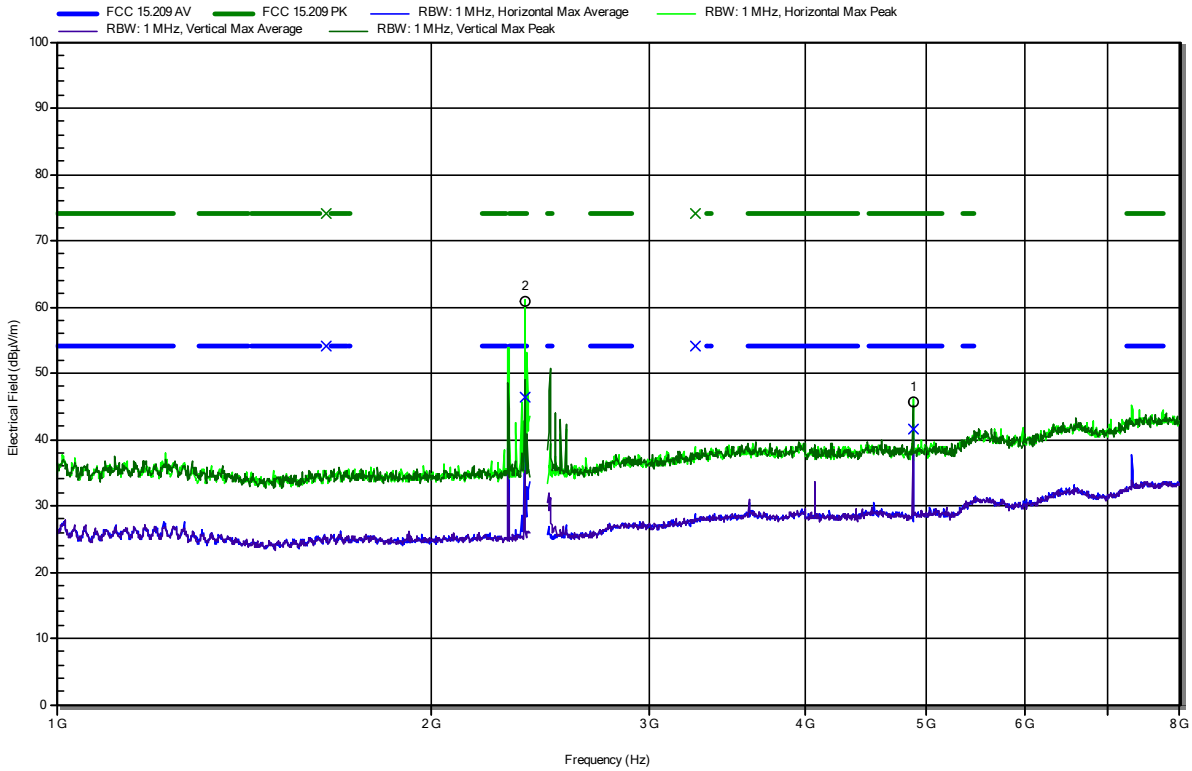

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3788 GHz	60.88 dBµV/m	74 dBµV/m	-13.12 dB	Pass
4.88 GHz	45.66 dBµV/m	74 dBµV/m	-28.34 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
2.3788 GHz	46.36 dBµV/m	54 dBµV/m	-7.64 dB	Pass
4.88 GHz	41.46 dBµV/m	54 dBµV/m	-12.54 dB	Pass

Test Report No.: G0M-2108-9956-TFC247BL-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120B, Horizontal
 Measurement distance: 3 m
 Mode: Tx; 2480MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 4

RadiMation

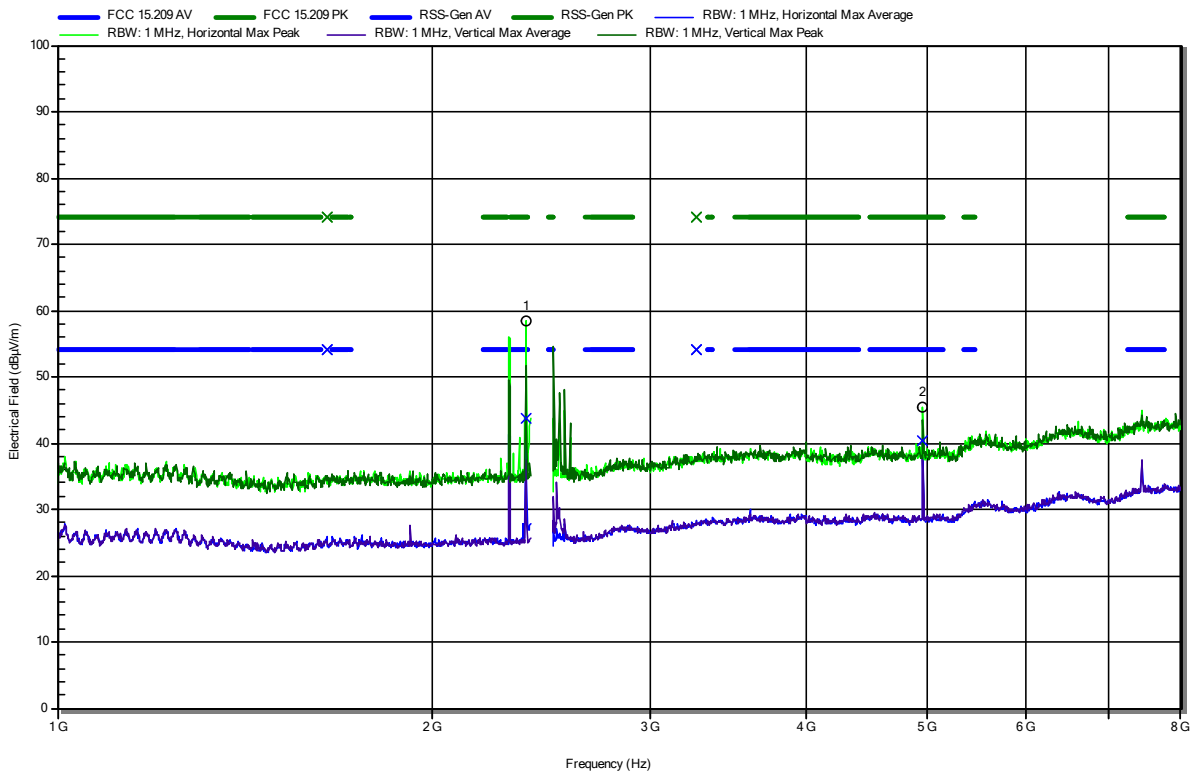

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.379 GHz	58.4 dBµV/m	74 dBµV/m	-15.6 dB	Pass
4.96 GHz	45.33 dBµV/m	74 dBµV/m	-28.67 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
2.379 GHz	43.61 dBµV/m	54 dBµV/m	-10.39 dB	Pass
4.96 GHz	40.37 dBµV/m	54 dBµV/m	-13.63 dB	Pass

Test Report No.: G0M-2108-9956-TFC247BL-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; 2480MHz, GFSK
 Test Date: 2021-11-25
 Note: upper bandedge

Index 5

RadiMation

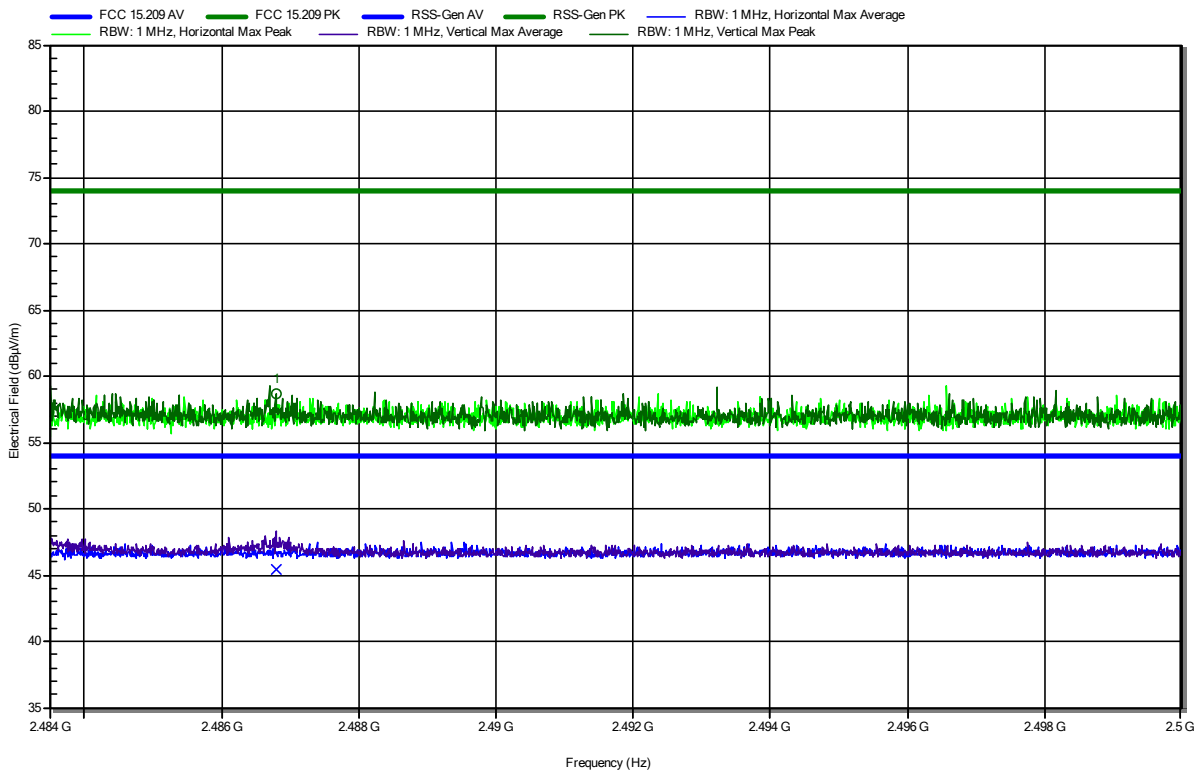


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.4868 GHz	58.71 dBµV/m	74 dBµV/m	-15.29 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.4868 GHz	45.47 dBµV/m	54 dBµV/m	-8.53 dB	Pass	Vertical

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck HWRD 650, Vertical
 Measurement distance: 3 m
 Mode: Tx; 2402MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 8
RadiMation

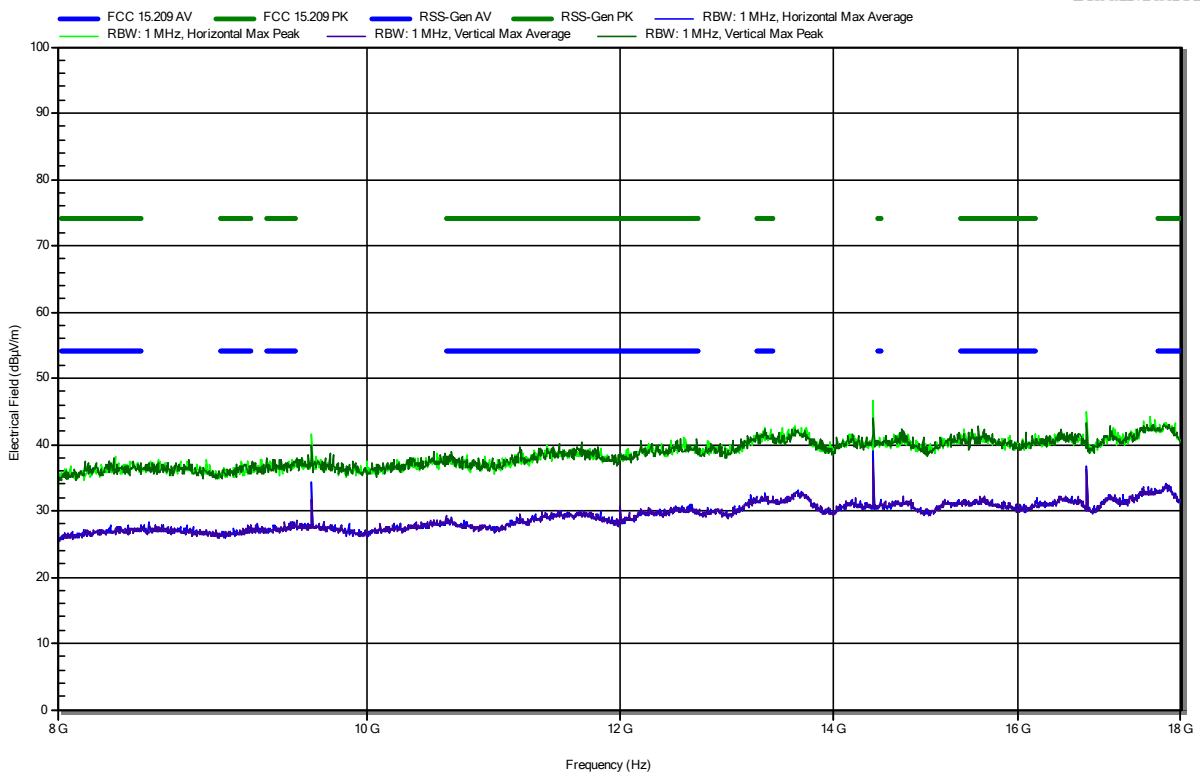


Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck HWRD 650, Vertical
 Measurement distance: 3 m
 Mode: Tx; 2440MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 7

RadiMation

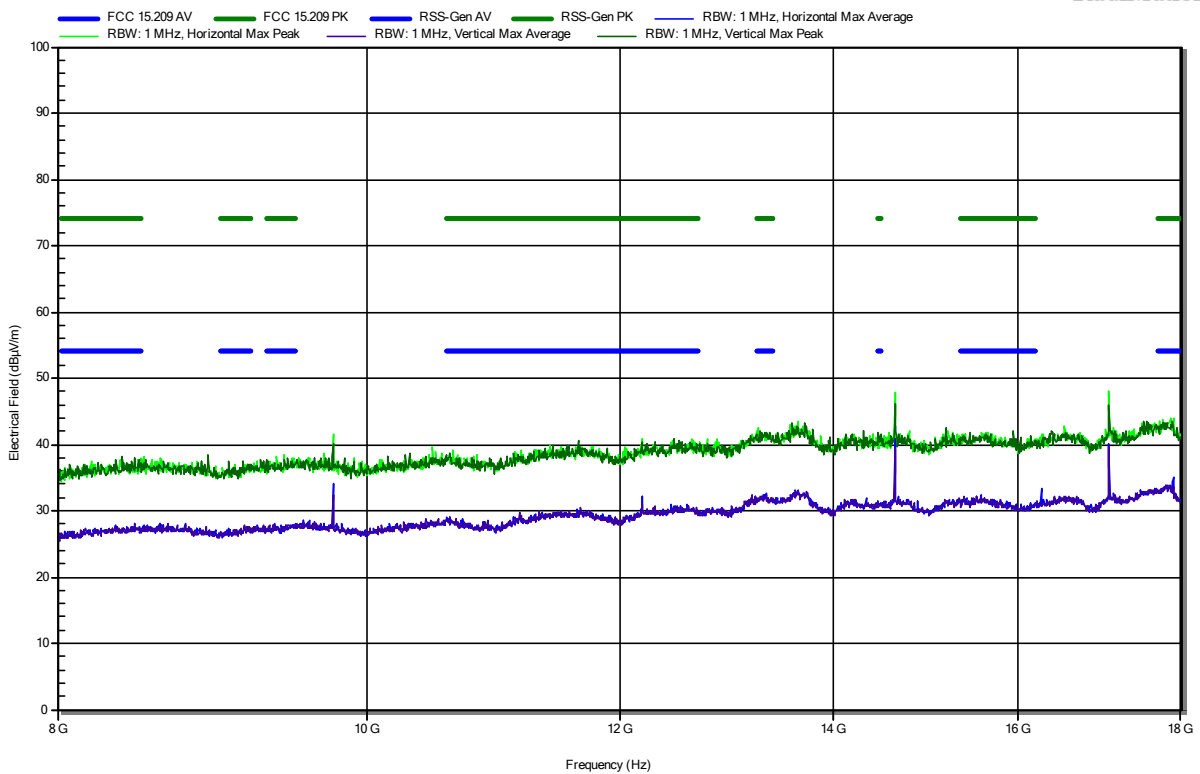


Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck HWRD 650, Vertical
 Measurement distance: 3 m
 Mode: Tx; 2480MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 6

RadiMation

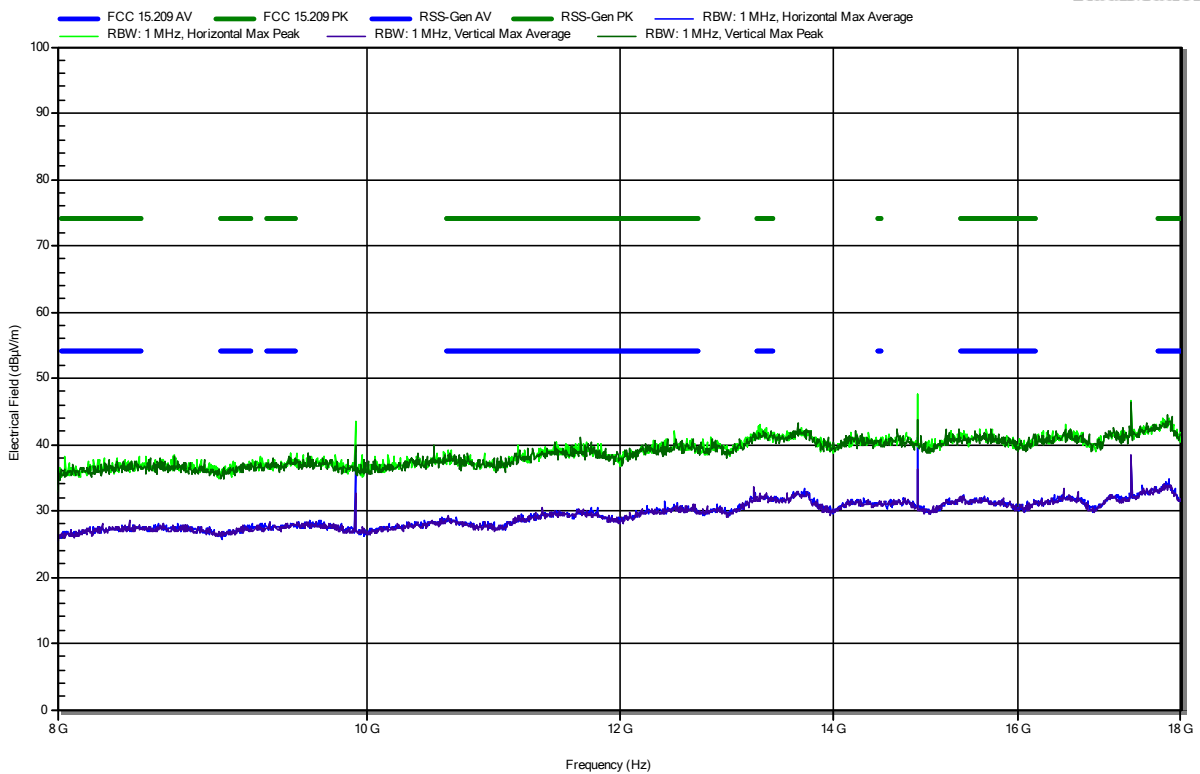


Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 3 m
 Mode: Tx; 2402MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 9

RadiMation

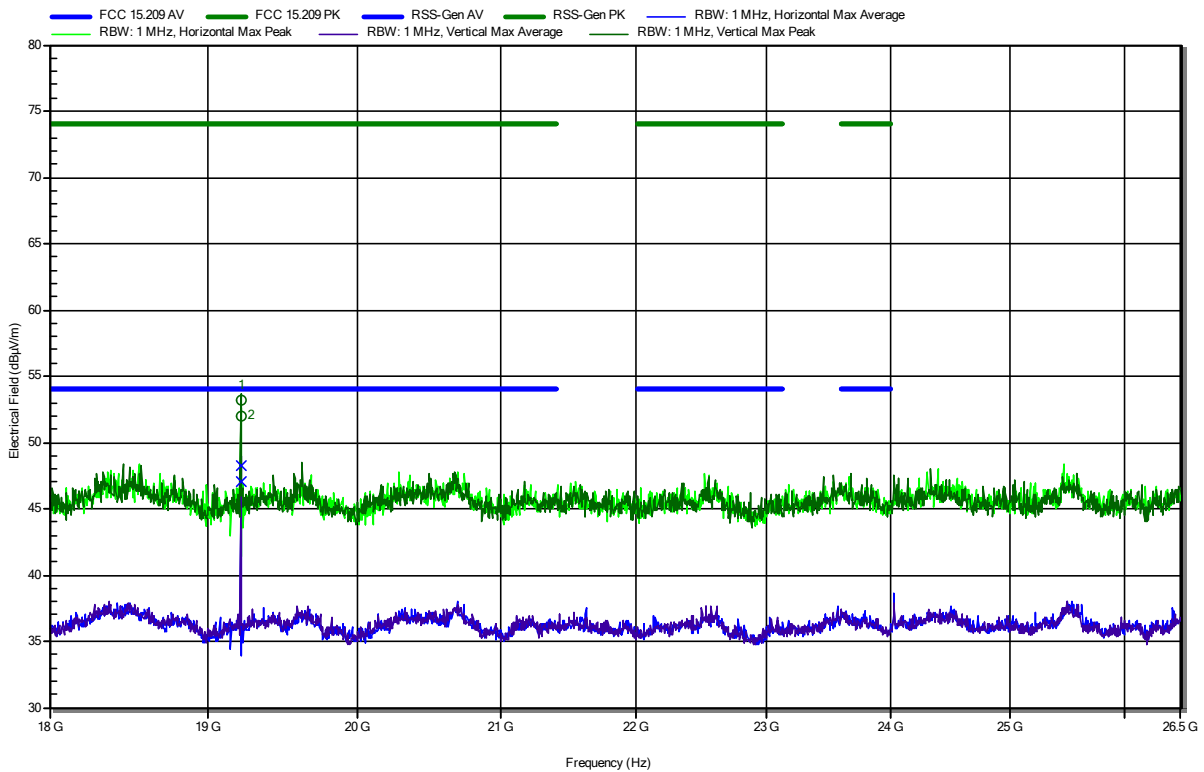

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
19.216 GHz	51.96 dBµV/m	74 dBµV/m	-22.04 dB	Pass
19.216 GHz	53.17 dBµV/m	74 dBµV/m	-20.83 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
19.216 GHz	47.1 dBµV/m	54 dBµV/m	-6.9 dB	Pass
19.216 GHz	48.28 dBµV/m	54 dBµV/m	-5.72 dB	Pass

Test Report No.: G0M-2108-9956-TFC247BL-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Amplifier Research AT4560, Horizontal
 Measurement distance: 3 m
 Mode: Tx; 2440MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 10

RadiMation

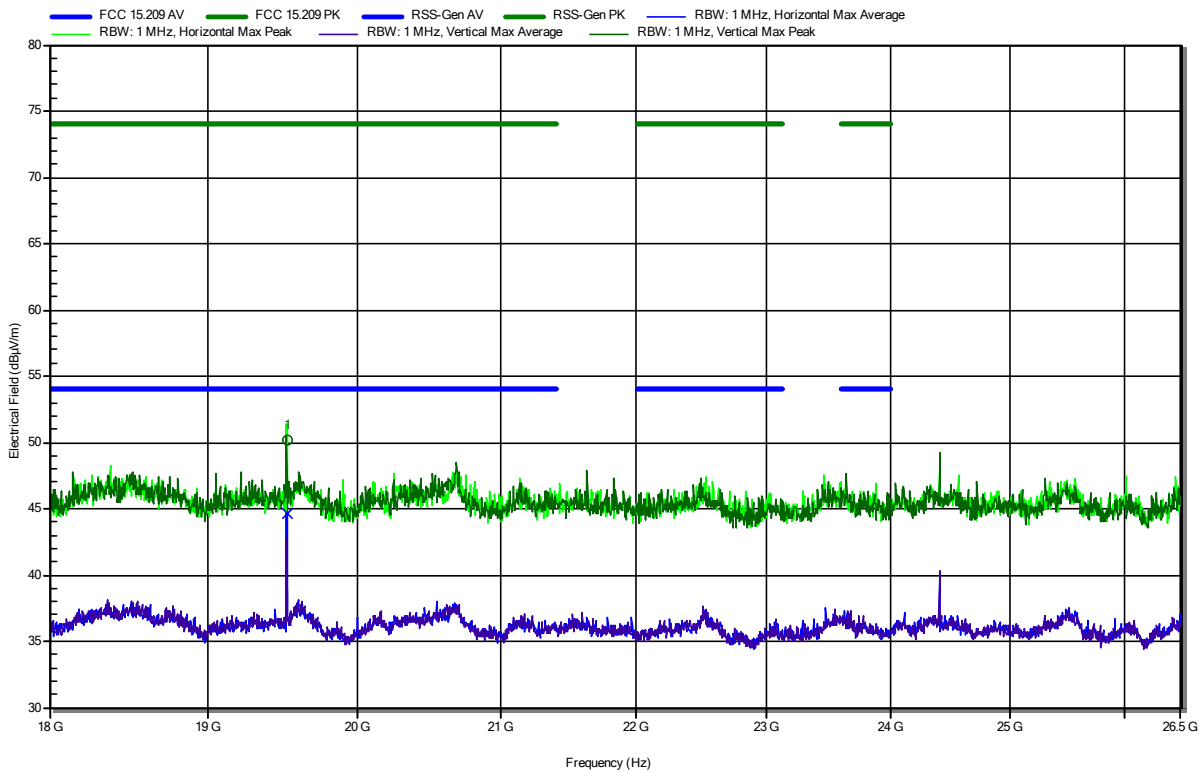


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
19.52 GHz	50.15 dBµV/m	74 dBµV/m	-23.85 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
19.52 GHz	44.63 dBµV/m	54 dBµV/m	-9.37 dB	Pass

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 24 °Celsius, Vnom: 7.0 VDC
 Antenna: Amplifier Research AT4560, Vertical
 Measurement distance: 3 m
 Mode: Tx; 2480MHz, GFSK
 Test Date: 2021-11-25
 Note:

Index 11

RadiMation

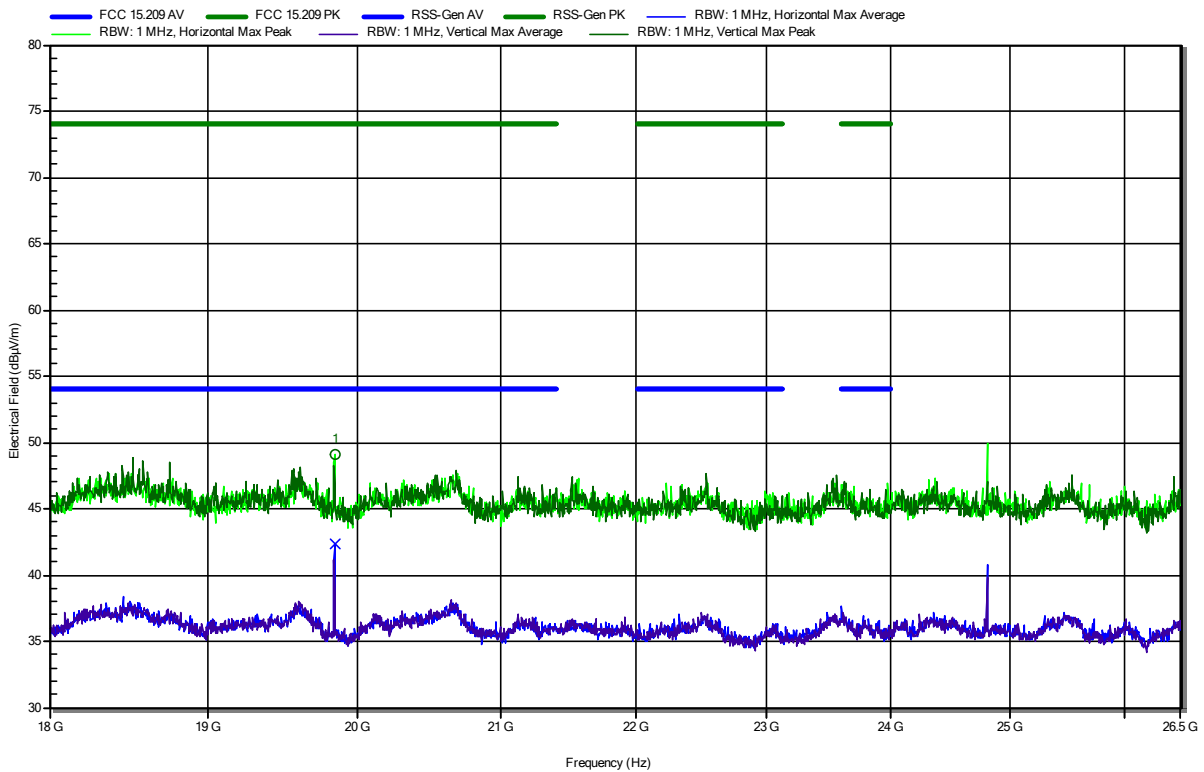

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
19.842 GHz	49.12 dBµV/m	74 dBµV/m	-24.88 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
19.842 GHz	42.31 dBµV/m	54 dBµV/m	-11.69 dB	Pass


ANNEX B Receiver spurious emissions

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Rx; 2440MHz
 Test Date: 2021-12-07
 Note:

Index 21

RadiMation

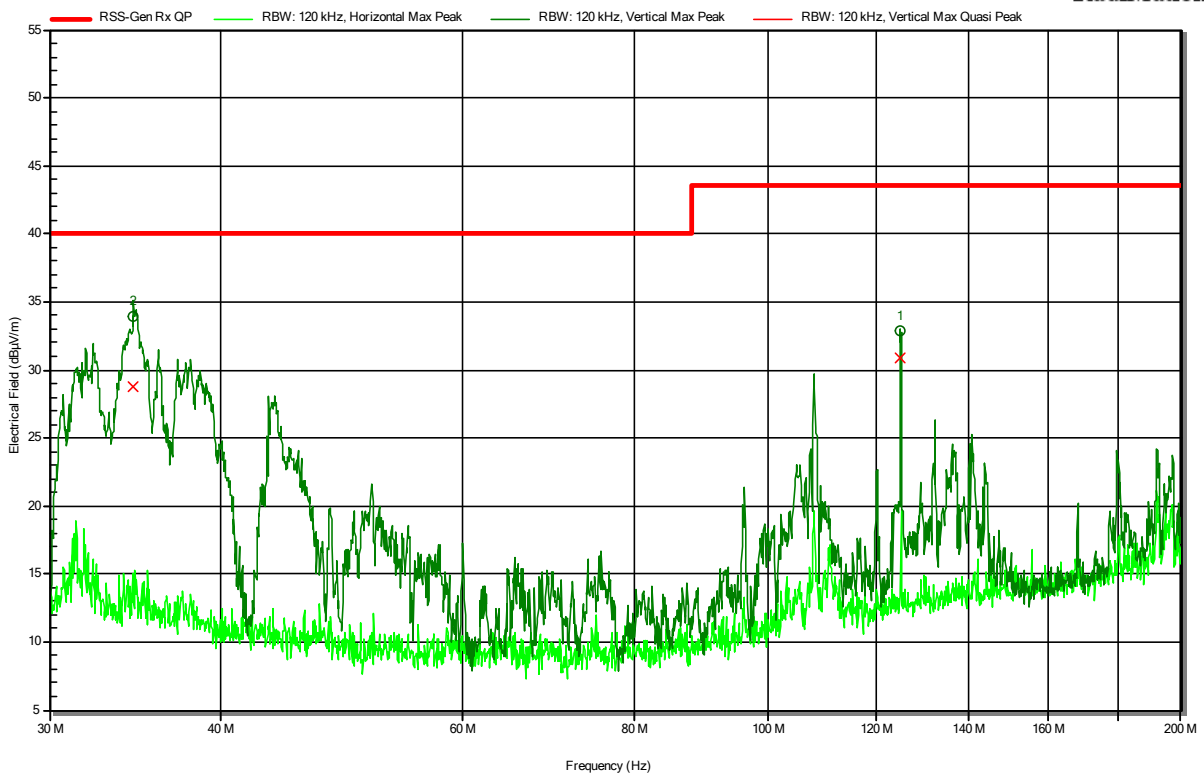


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
34.5305 MHz	28.8 dBµV/m	40 dBµV/m	-11.23 dB	Pass	Vertical
125.0002 MHz	30.9 dBµV/m	43.5 dBµV/m	-12.59 dB	Pass	Vertical

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Rohde & Schwarz HL 223
 Measurement distance: 3 m
 Mode: Rx; 2440MHz
 Test Date: 2021-12-07
 Note:

Index 20

RadiMation

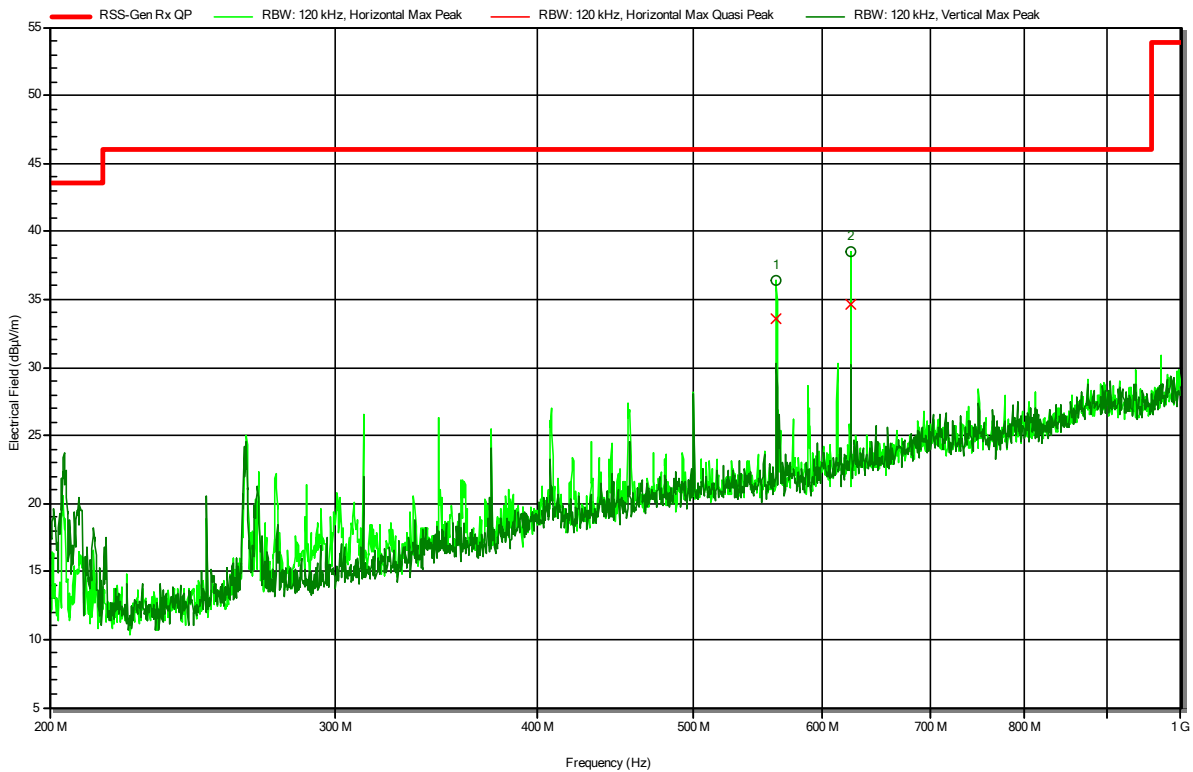


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
562.48 MHz	33.6 dBµV/m	46 dBµV/m	-12.39 dB	Pass	Horizontal
625 MHz	34.7 dBµV/m	46 dBµV/m	-11.33 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Degenhardt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck BBHA 9120D
 Measurement distance: 3 m
 Mode: Rx; 2440MHz
 Test Date: 2021-12-13
 Note:

Index 32

RadiMation

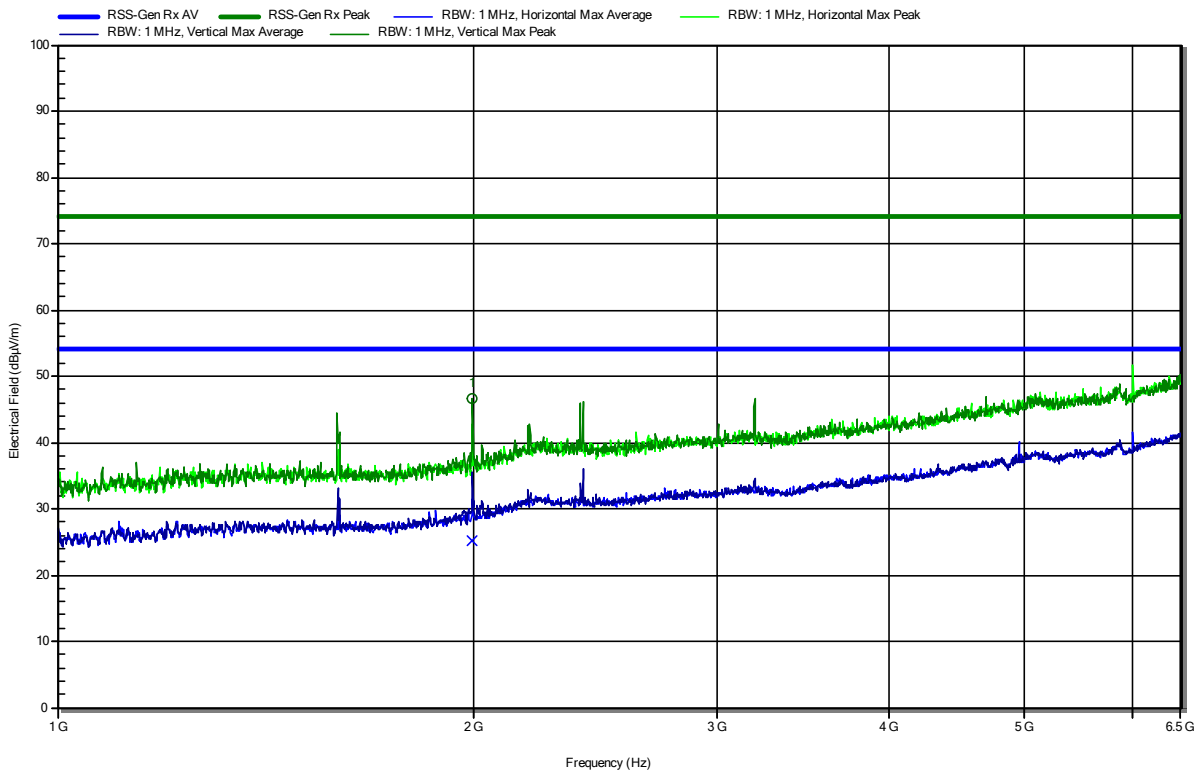


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
1.995 GHz	46.61 dBµV/m	74 dBµV/m	-27.39 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
1.995 GHz	25.12 dBµV/m	53.98 dBµV/m	-28.86 dB	Pass	Vertical

Radiated Spurious Emissions according to RSS-247, 47 CFR Part 15.247

Project Number: G0M-2108-9956
 Applicant: Leica Geosystems AG
 Model Description: Bluetooth, WLAN and BLE Module
 Model: TiWi-BLE
 Test Sample ID: 36589
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Degenhardt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 7.0 VDC
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Rx; 2440MHz
 Test Date: 2021-12-10
 Note:

Index 25

RadiMation

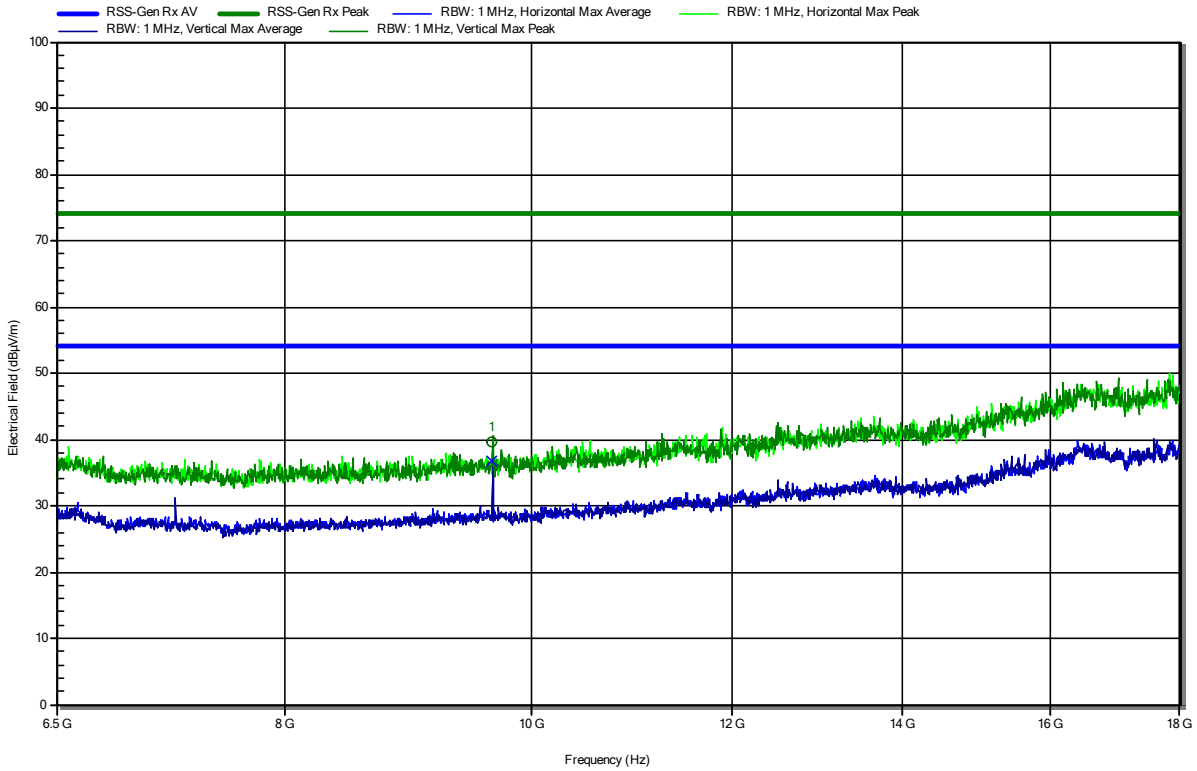

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
9.648 GHz	39.58 dBµV/m	74 dBµV/m	-34.42 dB	Pass	Horizontal
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
9.648 GHz	36.67 dBµV/m	53.98 dBµV/m	-17.31 dB	Pass	Horizontal

=== END OF TEST REPORT ===

Test Report No.: G0M-2108-9956-TFC247BL-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany