



<b>SAR TEST REPORT</b> <b>FCC 47 CFR Part 2.1093</b> <b>Industry Canada RSS-102</b> <b>RF-Exposure evaluation of portable equipment</b>	
<b>Report Reference No.</b> .....	G0M-1406-3915-TFC093SR-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="display: flex; justify-content: center; align-items: center;">   </div> <p style="text-align: center; font-size: small;">A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Leica Geosystems AG
Address .....	Heinrich Wild Strasse 9435Heerbrugg SWITZERLAND
<b>Test specification:</b>	
Standard.....	FCC 47 CFR Part 2 §2.1093 FCC OET Bulletin 65 Supplement C 01-01 IEEE Std. 1528-2003 IEEE Std. 1528 - 2013 IC RSS-102 Issue 5 Safety Code 6 (2015)
Non-standard test method.....	None
Test scope.....	complete Radio compliance test
<b>Equipment under test (EUT):</b>	
Product description	Field Controller Win EC7
Model No.	CS20 CDMA Disto
Additional Model(s)	None
Brand Name(s)	Leica Geosystems
Hardware version	V5.0
Firmware / Software version	1.0
Contains	FCC-ID: RFD-CSNGC                      IC: 3177A-CSNGC
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**


- neither assessed nor tested.....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object.....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)


**Testing:**

Date of receipt of test item .....: 2014-07-14

Date (s) of performance of tests .....: 2014-11-14 - 2015-04-24

Compiled by .....: Matthias Handrik

Tested by (+ signature) .....: Matthias Handrik  
 (Responsible for Test) 

Approved by (+ signature).....: Christian Weber 

Date of issue .....: 2015-04-28

Total number of pages .....: 112

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revisedby
01	2015-04-28	Initial Release	

---

**REPORT INDEX**

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>6</b>
1.1	Equipment photos	8
1.2	Equipment setup photos	11
1.3	Reference Documents	14
1.4	Supporting Equipment Used During Testing	15
1.5	Supported standalone operating modes	16
1.6	Conducted Power Values	17
1.7	Standalone Operational Mode Test Exclusion	21
1.8	Supported concurrent (multi-transmitter) operating modes	22
1.9	Supported use cases	23
1.10	Radio Test Modes	24
1.11	Test Positions	26
1.12	Test Equipment Used During Testing	27
<b>2</b>	<b>RESULT SUMMARY</b>	<b>28</b>
<b>3</b>	<b>DEFINITIONS</b>	<b>29</b>
3.1	Controlled Exposure	29
3.2	Uncontrolled Exposure	29
3.3	Localized SAR	29
<b>4</b>	<b>LOCALIZED SAR MEASUREMENT EQUIPMENT</b>	<b>30</b>
4.1	Complete SAR DASY5 Measurement System	30
4.2	Robot Arm	32
4.3	Data Acquisition Electronics	32
4.4	Isotropic E-Field Probe $\leq 3$ GHz	33
4.5	Isotropic E-Field Probe $\leq 6$ GHz	34
4.6	Test phantom and positioner	35
4.7	System Validation Dipoles	36
<b>5</b>	<b>SINGLE-BAND SAR MEASUREMENT</b>	<b>37</b>
5.1	General measurement description	37
5.2	SAR measurement description	37
5.3	Reference lines and points for Handsets	38
5.4	Test positions relative to the Head	39
5.5	Test positions relative to the human body	40
5.6	Measurement Uncertainty	41

<b>6</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>42</b>
6.1	Recipes for Tissue Simulating Liquids	42
6.2	Test Conditions and Results – Tissue Validation	43
6.3	Test Conditions and Results – System Validation	46
6.4	Test Conditions and Results – Standalone SAR Measurement	48
6.5	Test Conditions and Results – Multi-transmitter SAR Result	50
	Calibration Documents	52
ANNEX A	System Validation Reports	93
ANNEX B	SAR Measurement Reports	103

## 1 Equipment (Test item) Description

<b>Description</b>	Field Controller Win EC7	
<b>Model</b>	CS20 CDMA Disto	
<b>Additional Model(s)</b>	None	
<b>Brand Name(s)</b>	Leica Geosystems	
<b>Serial number</b>	None	
<b>Hardware version</b>	V5.0	
<b>Software / Firmware version</b>	1.0	
<b>FCC-ID</b>	RFD-CSNGC	
<b>IC</b>	3177A-CSNGC	
<b>Equipment type</b>	End product	
<b>Prototype or production unit</b>	Identical Prototype	
<b>Device category</b>	Handset	
<b>Environment</b>	General public	
<b>Radio technologies</b>	GSM, UMTS, WLAN, Bluetooth	
<b>Operating frequency ranges</b>	GSM 850: 824 MHz - 849 MHz PCS 1900: 1850 MHz - 1910 MHz CDMA 1xRTT BC 0: 824 MHz – 849 MHz CDMA 1xRTT BC 1: 1850 MHz – 1909 MHz CDMA 1xRTT BC 10: 817 MHz – 824 MHz CDMA EV-DO BC 0: 824 MHz – 849 MHz CDMA EV-DO BC 1: 1850 MHz – 1909 MHz CDMA EV-DO BC 10: 817 MHz – 824 MHz WLAN IEEE 802.11 b, g, n: 2400 MHz - 2483.5 MHz (20MHz) Bluetooth Low Energy: 2400 MHz – 2483.5 MHz Bluetooth: 2400 MHz - 2483.5 MHz Bluetooth LR: 2400 MHz - 2483.5 MHz	
<b>Number of antennas</b>	3	
<b>Antenna (WLAN/Bluetooth/Bluetooth Low Energy)</b>	Type	integrated
	Model	W3008C
	Manufacturer	Pulse
	Gain	2.2dBi
<b>Antenna (GSM/UMTS/CDMA)</b>	Type	integrated
	Model	P522303
	Manufacturer	Ethertronics
	Gain	2.8dBi
<b>Antenna (Bluetooth LR)</b>	Type	integrated
	Model	805684
	Manufacturer	Leica Geosystems
	Gain	1dBi

<b>Power supply</b>	V <sub>NOM</sub>	11.1 V DC
<b>AC/DC-Adaptor</b>	Model	AEL40US15
	Vendor	XP Power
	Input	100 ...240 V AC
	Output	15 V DC
<b>Accessories</b>	None	
<b>Manufacturer</b>	Leica Geosystems AG Heinrich Wild Strasse 9435Heerbrugg SWITZERLAND	

### 1.3 Reference Documents

Document
KDB Publication 447498 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
KDB Publication 648474 : SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
KDB Publication 648474 : Review and Approval Policies for SAR Evaluation of Handsets with Multiple Transmitters and Antennas
KDB Publication 865664 : SAR measurement procedures for devices operating between 100 MHz to 6 GHz
KDB Publication 941225: SAR Measurement Procedures for 3G Devices
KDB Publication 941225: 3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB Publication 941225: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE
KDB Publication 941225: SAR Test Consideration for LTE Handsets and Data Modems
KDB Publication 447498 : SAR Measurement Procedures for USB Dongle Transmitters
KDB Publication 248227 : SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB Publication 450824 : SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz



#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Communication tester	Rohde & Schwarz	CMU 200	
SIM	Communication tester	Rohde & Schwarz	CMW 500	
SIM : Simulator (Not Subjected to Test)				

### 1.5 Supported standalone operating modes

Mode	Modulation	Frequency range	Duty cycle
GPRS850	GMSK	824 MHz - 849 MHz	12.5 - 50%
GPRS1900	GMSK	1850 MHz - 1910 MHz	12.5 - 50%
CDMA 1xRTT BC0	QPSK	824 MHz - 849 MHz	100%
CDMA 1xRTT BC1	QPSK	1850 MHz - 1909 MHz	100%
CDMA 1xRTT BC10	QPSK	817 MHz - 824 MHz	100%
CDMA EV-DO BC0	QPSK	824 MHz - 849 MHz	100%
CDMA EV-DO BC1	QPSK	1850 MHz - 1909 MHz	100%
CDMA EV-DO BC10	QPSK	817 MHz - 824 MHz	100%
W-CDMA FDD II	QPSK	1850 MHz - 1910 MHz	100%
W-CDMA FDD V	QPSK	824 MHz - 849 MHz	100%
WLAN 2.4	DSSS	2400 MHz- 2483.5 MHz	100%
WLAN 2.4	OFDM	2400 MHz- 2483.5 MHz	100%
Bluetooth	GFSK	2400 MHz- 2483.5 MHz	78%
Bluetooth	PI/4-DQPSK, 8-DPSK	2400 MHz- 2483.5 MHz	78%
Bluetooth Low Energy	GFSK	2400 MHz- 2483.5 MHz	62%
Bluetooth long-range	GFSK	2400 MHz- 2483.5 MHz	78%
Bluetooth long-range	PI/4-DQPSK, 8-DPSK	2400 MHz- 2483.5 MHz	78%

## 1.6 Conducted Power Values

According to KDB 447498 D01 v05r02 the conducted power values of all operating modes have been measured in order to determine the worst case source-based averaged power values.

The conducted power values for the various operating modes of the WiFi transmitter were measured according to KDB 248227 D01 v01r02.

The conducted power values for the various operating modes of the 3G transmitter were measured according to KDB941225 D01 v03.

### Bluetooth

Bluetooth							
Channel	Frequency [MHz]	Peak (Burst) RMS Power [dBm]			Source-based time averaged Power [dBm]		
		BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)	BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)
		DH5	2-DH5	3-DH5	DH5	2-DH5	3-DH5
0	2402	7.70	5.30	5.30	<b>6.59</b>	4.19	4.19
39	2441	7.20	4.50	4.50	6.09	3.39	3.79
78	2480	7.70	4.90	4.90	<b>6.59</b>	3.79	3.79

### Bluetooth Low Energy

Bluetooth LE					
Channel	Frequency [MHz]	Peak (Burst) RMS Power [dBm]		Source-based time averaged Power [dBm]	
		BR (GFSK)		BR (GFSK)	
0	2402	8.27		6.19	
19	2440	8.40		<b>6.32</b>	
39	2480	8.40		<b>6.32</b>	

### Bluetooth Long Range

Bluetooth LR							
Channel	Frequency [MHz]	Peak (Burst) RMS Power [dBm]			Source-based time averaged Power [dBm]		
		BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)	BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)
		DH5	2-DH5	3-DH5	DH5	2-DH5	3-DH5
0	2402	9.70	7.50	7.50	<b>8.59</b>	6.39	6.39
39	2441	9.60	7.30	7.30	8.49	6.19	6.19
78	2480	9.50	6.80	6.80	8.39	5.69	5.69

### WLAN 2.4 GHz

IEEE 802.11b						
Mode	Channel	Frequency	Source-based time average power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
IEEE 802.11b	1	2412	14.94	13.95	13.12	12.13
	6	2437	15.02	14.10	13.35	12.29
	11	2462	<b>15.80</b>	14.59	13.65	12.59

IEEE 802.11g										
Mode	Channel	Frequency	Source-based time average power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
IEEE 802.11g	1	2412	15.52	14.80	15.24	15.22	14.61	14.94	13.32	12.88
	6	2437	15.60	14.90	15.36	15.34	14.76	15.08	13.50	13.02
	11	2462	15.83	15.11	15.59	15.57	15.04	15.34	13.80	13.32

IEEE 802.11n / 20 MHz / Long Guard Interval / 1 Stream												
Mode	Channel	Frequency	Bandwidth [MHz]	Guard Interval [ns]	Source-based time average power [dBm]							
					Data Rate [Mbps]							
					MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
IEEE 802.11n	1	2412	20	400/800	14.29	12.81	15.87	15.18	15.74	15.79	15.18	11.85
	6	2437	20	400/800	14.44	12.96	15.84	15.29	15.82	15.88	15.29	12.02
	11	2462	20	400/800	14.72	13.26	16.13	15.52	16.03	16.09	15.52	12.35

According to KDB 248227 v01r02 SAR measurements for 802.11g are not necessary because the conducted power values are not more than ¼ dB higher than the power values for 802.11b.

According to KDB 248227 v01r02 SAR measurements for 802.11n are not necessary because the conducted power values are not more than ¼ dB higher than the power values for 802.11b.

According to KDB 248227 v01r02 SAR measurements are performed for 802.11b and the lowest data rate of 1 Mbps.

### GSM 850

GSM850																
Band	Mode	Channel	Frequency [MHz]	Coding	Traffic Mode	Number Timeslots	Power Level	Power TS 1 [dBm]	Power TS 2 [dBm]	Power TS 3 [dBm]	Power TS 4 [dBm]	Power TS 5 [dBm]	Power TS 6 [dBm]	Power TS 7 [dBm]	Power TS 8 [dBm]	Source-based time average Power [dBm]
850	GSM	128	824.2	FR V1	FR V1	1	PCL 5									
850	GSM	190	836.6	FR V1	FR V1	1	PCL 5									
850	GSM	251	848.0	FR V1	FR V1	1	PCL 5									
850	GPRS	128	824.2	CS1	Test Mode A	1	GAMMA 3	32.00								22.97
850	GPRS	190	836.6	CS1	Test Mode A	1	GAMMA 3	32.10								23.07
850	GPRS	251	848.0	CS1	Test Mode A	1	GAMMA 3	32.00								22.97
850	GPRS	128	824.2	CS1	Test Mode A	2	GAMMA 3	32.00	31.90							25.93
850	GPRS	190	836.6	CS1	Test Mode A	2	GAMMA 3	32.00	32.00							25.98
850	GPRS	251	848.0	CS1	Test Mode A	2	GAMMA 3	31.90	31.80							25.83
850	GPRS	128	824.2	CS1	Test Mode A	3	GAMMA 3	31.80	31.70	31.60						27.45
850	GPRS	190	836.6	CS1	Test Mode A	3	GAMMA 3	31.80	31.80	31.70						27.52
850	GPRS	251	848.0	CS1	Test Mode A	3	GAMMA 3	31.70	31.70	31.70						27.45
850	GPRS	128	824.2	CS1	Test Mode A	4	GAMMA 3	29.50	29.40	29.40	29.50					26.45
850	GPRS	190	836.6	CS1	Test Mode A	4	GAMMA 3	29.70	29.60	29.60	29.60					26.63
850	GPRS	251	848.0	CS1	Test Mode A	4	GAMMA 3	29.30	29.60	29.60	29.60					26.53
850	EGPRS	128	824.2	MCS1	Test Mode A	1	GAMMA 3	32.00								22.97
850	EGPRS	190	836.6	MCS1	Test Mode A	1	GAMMA 3	32.10								23.07
850	EGPRS	251	848.0	MCS1	Test Mode A	1	GAMMA 3	32.00								22.97
850	EGPRS	128	824.2	MCS1	Test Mode A	2	GAMMA 3	32.00	31.90							25.93
850	EGPRS	190	836.6	MCS1	Test Mode A	2	GAMMA 3	32.00	32.00							25.98
850	EGPRS	251	848.0	MCS1	Test Mode A	2	GAMMA 3	31.90	31.90							25.88
850	EGPRS	128	824.2	MCS1	Test Mode A	3	GAMMA 3	31.80	31.70	31.70						27.48
850	EGPRS	190	836.6	MCS1	Test Mode A	3	GAMMA 3	31.90	31.90	31.90						27.65
850	EGPRS	251	848.0	MCS1	Test Mode A	3	GAMMA 3	31.80	31.70	31.70						27.48
850	EGPRS	128	824.2	MCS1	Test Mode A	4	GAMMA 3	31.60	31.50	31.50	31.50					28.53
850	EGPRS	190	836.6	MCS1	Test Mode A	4	GAMMA 3	31.70	31.60	31.60	31.60					28.63
850	EGPRS	251	848.0	MCS1	Test Mode A	4	GAMMA 3	31.60	31.60	31.50	31.50					28.55
850	EGPRS	128	824.2	MCS5	Test Mode A	1	GAMMA 6	26.20								17.17
850	EGPRS	190	836.6	MCS5	Test Mode A	1	GAMMA 6	26.30								17.27
850	EGPRS	251	848.0	MCS5	Test Mode A	1	GAMMA 6	26.40								17.37
850	EGPRS	128	824.2	MCS5	Test Mode A	2	GAMMA 6	26.10	26.40							20.23
850	EGPRS	190	836.6	MCS5	Test Mode A	2	GAMMA 6	26.20	26.50							20.33
850	EGPRS	251	848.0	MCS5	Test Mode A	2	GAMMA 6	25.90	25.80							19.83
850	EGPRS	128	824.2	MCS5	Test Mode A	3	GAMMA 6	26.10	25.80	25.80						21.65
850	EGPRS	190	836.6	MCS5	Test Mode A	3	GAMMA 6	26.20	26.10	25.90						21.82
850	EGPRS	251	848.0	MCS5	Test Mode A	3	GAMMA 6	26.00	25.60	25.70						21.52
850	EGPRS	128	824.2	MCS5	Test Mode A	4	GAMMA 6	25.90	26.00	25.70	26.10					22.93
850	EGPRS	190	836.6	MCS5	Test Mode A	4	GAMMA 6	26.00	25.80	25.90	26.00					22.93
850	EGPRS	251	848.0	MCS5	Test Mode A	4	GAMMA 6	25.50	25.60	25.70	25.50					22.58

GSM 1900

GSM1900																
Band	Mode	Channel	Frequency [MHz]	Coding	Traffic Mode	Number Timeslots	Power Level	Power TS 1 [dBm]	Power TS 2 [dBm]	Power TS 3 [dBm]	Power TS 4 [dBm]	Power TS 5 [dBm]	Power TS 6 [dBm]	Power TS 7 [dBm]	Power TS 8 [dBm]	Source-based time average Power [dBm]
1900	GSM	512	1850.2	FR V1	FR V1	1	PCL 0									
1900	GSM	661	1880.0	FR V1	FR V1	1	PCL 0									
1900	GSM	810	1909.8	FR V1	FR V1	1	PCL 0									
1900	GPRS	512	1850.2	CS1	Test Mode A	1	GAMMA 3	30.30								21.27
1900	GPRS	661	1880.0	CS1	Test Mode A	1	GAMMA 3	30.10								21.07
1900	GPRS	810	1909.8	CS1	Test Mode A	1	GAMMA 3	30.60								21.57
1900	GPRS	512	1850.2	CS1	Test Mode A	2	GAMMA 3	30.00	29.90							23.93
1900	GPRS	661	1880.0	CS1	Test Mode A	2	GAMMA 3	29.90	29.80							23.83
1900	GPRS	810	1909.8	CS1	Test Mode A	2	GAMMA 3	30.40	30.30							24.33
1900	GPRS	512	1850.2	CS1	Test Mode A	3	GAMMA 3	29.70	29.60	29.50						25.35
1900	GPRS	661	1880.0	CS1	Test Mode A	3	GAMMA 3	29.60	29.50	29.30						25.22
1900	GPRS	810	1909.8	CS1	Test Mode A	3	GAMMA 3	30.10	30.00	29.90						25.75
1900	GPRS	512	1850.2	CS1	Test Mode A	4	GAMMA 3	29.40	29.30	29.20	29.20					26.30
1900	GPRS	661	1880.0	CS1	Test Mode A	4	GAMMA 3	29.40	29.20	29.10	29.00					26.18
1900	GPRS	810	1909.8	CS1	Test Mode A	4	GAMMA 3	29.90	29.80	29.70	29.70					26.78
1900	EGPRS	512	1850.2	MCS1	Test Mode A	1	GAMMA 3	30.20								21.17
1900	EGPRS	661	1880.0	MCS1	Test Mode A	1	GAMMA 3	30.10								21.07
1900	EGPRS	810	1909.8	MCS1	Test Mode A	1	GAMMA 3	30.60								21.57
1900	EGPRS	512	1850.2	MCS1	Test Mode A	2	GAMMA 3	30.00	29.90							23.93
1900	EGPRS	661	1880.0	MCS1	Test Mode A	2	GAMMA 3	29.90	29.70							23.78
1900	EGPRS	810	1909.8	MCS1	Test Mode A	2	GAMMA 3	30.40	29.90							24.28
1900	EGPRS	512	1850.2	MCS1	Test Mode A	3	GAMMA 3	29.70	29.50	29.50						25.32
1900	EGPRS	661	1880.0	MCS1	Test Mode A	3	GAMMA 3	29.60	29.40	29.30						25.19
1900	EGPRS	810	1909.8	MCS1	Test Mode A	3	GAMMA 3	30.10	30.00	30.00						25.78
1900	EGPRS	512	1850.2	MCS1	Test Mode A	4	GAMMA 3	29.40	29.30	29.20	29.20					26.28
1900	EGPRS	661	1880.0	MCS1	Test Mode A	4	GAMMA 3	29.30	29.10	29.10	29.00					26.13
1900	EGPRS	810	1909.8	MCS1	Test Mode A	4	GAMMA 3	29.90	29.70	29.70	29.60					26.73
1900	EGPRS	512	1850.2	MCS5	Test Mode A	1	GAMMA 5	25.30								16.27
1900	EGPRS	661	1880.0	MCS5	Test Mode A	1	GAMMA 5	25.70								16.67
1900	EGPRS	810	1909.8	MCS5	Test Mode A	1	GAMMA 5	26.60								17.57
1900	EGPRS	512	1850.2	MCS5	Test Mode A	2	GAMMA 5	25.90	25.80							19.83
1900	EGPRS	661	1880.0	MCS5	Test Mode A	2	GAMMA 5	25.50	25.50							19.48
1900	EGPRS	810	1909.8	MCS5	Test Mode A	2	GAMMA 5	26.00	26.00							19.98
1900	EGPRS	512	1850.2	MCS5	Test Mode A	3	GAMMA 5	25.30	25.30	25.10						20.38
1900	EGPRS	661	1880.0	MCS5	Test Mode A	3	GAMMA 5	25.70	25.50	25.70						21.38
1900	EGPRS	810	1909.8	MCS5	Test Mode A	3	GAMMA 5	26.00	26.30	25.90						21.82
1900	EGPRS	512	1850.2	MCS5	Test Mode A	4	GAMMA 5	25.10	25.30	24.90	24.80					22.03
1900	EGPRS	661	1880.0	MCS5	Test Mode A	4	GAMMA 5	25.60	25.10	24.70	25.40					22.21
1900	EGPRS	810	1909.8	MCS5	Test Mode A	4	GAMMA 5	26.10	25.80	25.50	25.50					22.73

WCDMA FDD V

W-CDMA FDD V																	
Uplink UARFCN	Uplink Frequency [MHz]	RMC 12.2 kbps	RMC 64 kbps	RMC 144 kbps	RMC 384 kbps	Source-based time averaged Power [dBm]								DC-HSDPA Subtest 1	DC-HSDPA Subtest 2	DC-HSDPA Subtest 3	DC-HSDPA Subtest 4
						HSDPA Subtest 1	HSDPA Subtest 2	HSDPA Subtest 3	HSDPA Subtest 4	HSUPA Subtest 1	HSUPA Subtest 2	HSUPA Subtest 3	HSUPA Subtest 4				
4132	826.4	23.86	23.64	23.73	23.78	23.56	23.45	23.45	23.58	23.12	22.98	23.21	23.14				
4182	836.6	23.70	23.74	23.72	23.70	23.45	23.35	23.65	23.47	23.24	23.10	23.11	23.16				
4233	846.6	23.80	23.81	23.77	23.71	23.80	23.75	23.15	23.48	23.31	23.12	23.25	23.18				

WCDMA FDD II

W-CDMA FDD II																	
Uplink UARFCN	Uplink Frequency [MHz]	RMC 12.2 kbps	RMC 64 kbps	RMC 144 kbps	RMC 384 kbps	Source-based time averaged Power [dBm]								DC-HSDPA Subtest 1	DC-HSDPA Subtest 2	DC-HSDPA Subtest 3	DC-HSDPA Subtest 4
						HSDPA Subtest 1	HSDPA Subtest 2	HSDPA Subtest 3	HSDPA Subtest 4	HSUPA Subtest 1	HSUPA Subtest 2	HSUPA Subtest 3	HSUPA Subtest 4				
9262	1852.4	23.19	23.21	23.26	23.10	23.14	23.25	23.11	23.15	22.48	22.59	22.44	22.65				
9400	1880.0	22.86	22.97	22.90	22.77	23.11	23.15	23.22	23.20	22.89	22.49	22.58	22.57				
9538	1907.6	23.11	23.11	23.03	23.00	23.10	23.19	23.20	23.17	22.99	22.49	22.42	22.87				

According to KDB 941225 D01 v03 SAR measurements for packet data modes (HSDPA/HSUPA) are not necessary because the conducted power values are not more than 1/4 dB higher than the power values for RMC.

CDMA BC0

Band Class 0 (850 MHz)								
Channel	Uplink Frequency [MHz]	Source-based time averaged Power [dBm]						
		1xRTT	1xRTT	1xRTT	1xRTT	1xEV-DO	1xEV-DO	1xEV-DO
		RC1/1 SO55	RC3/3 SO55	RC3/3 TDSO SO32 FCH	RC3/3 TDSO SO32 FCH + SCHO	Rev.0 RTAP	Rev.A RETAP	Rev.A RMCTAP
1013	824.70	23.91	<b>23.94</b>	23.89	23.84	23.88	23.79	
384	836.52	23.84	23.86	23.55	23.89	23.91	23.89	
799	848.97	23.85	23.74	23.68	23.86	23.84	23.83	

CDMA BC1

Band Class 1 (1900 MHz)								
Channel	Uplink Frequency [MHz]	Source-based time averaged Power [dBm]						
		1xRTT	1xRTT	1xRTT	1xRTT	1xEV-DO	1xEV-DO	1xEV-DO
		RC1/1 SO55	RC3/3 SO55	RC3/3 TDSO SO32 FCH	RC3/3 TDSO SO32 FCH+SCHO	Rev.0 RTAP	Rev.A RETAP	Rev.A RMCTAP
25	1851.25	23.68	<b>23.74</b>	23.45	23.72	23.55	23.48	
600	1880.00	23.42	23.41	23.64	23.54	23.54	23.57	
1175	1908.75	23.48	23.51	23.48	23.55	23.65	23.39	

CDMA BC10

Band Class 10 (800 MHz)								
Channel	Uplink Frequency [MHz]	Source-based time averaged Power [dBm]						
		1xRTT	1xRTT	1xRTT	1xRTT	1xEV-DO	1xEV-DO	1xEV-DO
		RC1/1 SO55	RC3/3 SO55	RC3/3 TDSO SO32 FCH	RC3/3 TDSO SO32 FCH+SCHO	Rev.0 RTAP	Rev.A RETAP	Rev.A RMCTAP
476	817.90	23.89	23.97	23.84	23.99	23.95	23.94	
580	820.50	23.97	<b>24.02</b>	23.95	24.01	23.97	23.96	
684	823.10	23.45	23.82	23.48	23.89	23.83	23.86	

According to KDB 941225 D01 v03 SAR measurements for packet data modes (EV-DO) are not necessary because the conducted power values are not more than ¼ dB higher than the power values for 1xRTT.

### 1.7 Standalone Operational Mode Test Exclusion

According to KDB 447498 D01 v05r02 for standalone SAR evaluation the test exclusion power condition is given by

$$\frac{\text{max Power, mW}}{\text{test distance, mm}} \cdot \sqrt{f_{\text{GHz}}} \leq 3.0$$

for test separation distance  $\leq 50\text{mm}$ . For test separation distances  $> 50\text{mm}$ , the SAR test exclusion threshold is:

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot \frac{f[\text{MHz}]}{150},$$

$100 \text{ MHz} < f < 1500 \text{ MHz}$

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot 10,$$

$1500 \text{ MHz} < f < 6 \text{ GHz}$

Mode	Pmax [mW]	Antenna	Top		Left		Right		Bottom		Back		Front	
			Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]
GPRS 850; 836.6 MHz, TS 3	564.94	GSM	15.8	*49 / 42	106	*442 / 130	14	*49 / 42	22	*66 / 55	219.6	*943 / 1302	14.5	*49 / 42
GPRS 1900; 1909.8 MHz, TS 4	476.43	GSM	15.8	*33 / 18	106	*609 / 431	14	*33 / 18	22	*44 / 34	219.6	*1509 / 2288	14.5	*33 / 18
UMTS FDD V; 826.4 MHz, RMC 12.2kbps	243.22	GSM	15.8	*49 / 42	106	*442 / 130	14	*49 / 42	22	*66 / 55	219.6	*943 / 1291	14.5	*49 / 42
UMTS FDD II; 1852.40 MHz, RMC 144kbps	211.84	GSM	15.8	*33 / 18	106	*609 / 431	14	*33 / 18	22	*44 / 34	219.6	*1509 / 2241	14.5	*33 / 18
Bluetooth LE; 2440 MHz	4.29	BTWLAN	13.1	*19 / 7	106.6	*596 / 309	36.7	*67 / 123	31.6	*57 / 83	137.2	*896 / 309	135.7	*896 / 309
Bluetooth; 2480 MHz, DH5	4.56	BTWLAN	13.1	*19 / 7	106.6	*596 / 309	36.7	*67 / 123	31.6	*57 / 83	137.2	*896 / 309	135.7	*896 / 309
Bluetooth LR; 2402 MHz, DH5	7.23	BT LR	4.4	*10 / 4	10	*19 / 7	10	*19 / 7	5.8	*10 / 4	6	*10 / 4	247.6	*1496 / 2676
WLAN IEEE 802.11b; 2462 MHz, 1Mbps	38.02	BTWLAN	13.1	*19 / 7	106.6	*596 / 309	36.7	*67 / 123	31.6	*57 / 83	137.2	*896 / 309	135.7	*896 / 309
CDMA BC0; 824.7MHz, RC3/3, SO55	247.74	GSM	15.8	*49 / 42	106	*442 / 130	14	*49 / 42	22	*66 / 55	219.6	*943 / 1291	14.5	*49 / 42
CDMA BC1; 1851.25MHz, RC3/3, SO55	236.59	GSM	15.8	*33 / 18	106	*609 / 431	14	*33 / 18	22	*44 / 34	219.6	*1509 / 2288	14.5	*33 / 18
CDMA BC 10; 820.5 MHz, RC3/3, SO55	252.35	GSM	15.8	*49 / 42	106	*442 / 130	14	*49 / 42	22	*66 / 55	219.6	*943 / 1291	14.5	*49 / 42

For all operating modes for which the maximum source-based average output power is larger than the corresponding SAR test exclusion threshold power level (blue fields in table above), SAR measurement was performed.

\*x / y: x – SAR Test Exclusion Threshold for FCC / y – Exemption limits for IC

**1.8 Supported concurrent (multi-transmitter) operating modes**

The ability of all other transmitters to transmit simultaneously is given in the following table:

	<b>Bluetooth</b>	<b>Bluetooth LE</b>	<b>WLAN 802.11b/g</b>	<b>GSM/ UMTS</b>	<b>Bluetooth LR</b>	<b>CDMA</b>
<b>Bluetooth</b>	N/A	N/A	N/A	Yes	Yes	Yes
<b>Bluetooth LE</b>	N/A	N/A	N/A	Yes	Yes	Yes
<b>WLAN 802.11b/g</b>	N/A	N/A	N/A	Yes	Yes	Yes
<b>GSM/UMTS</b>	Yes	Yes	N/A	Yes	N/A	N/A
<b>Bluetooth LR</b>	Yes	Yes	Yes	N/A	Yes	Yes
<b>CDMA</b>	Yes	Yes	N/A	Yes	N/A	N/A



**1.9 Supported use cases**

<b>Use case</b>	<b>Distance to human body</b>	<b>corresponding test configuration</b>
EUT is a handheld device	0 mm BACK (worst case)	body-worn device
EUT is a handheld device	0 mm FRONT (worst case)	body-worn device
EUT is a handheld device	0 mm LEFT (worst case)	body-worn device
EUT is a handheld device	0 mm RIGHT (worst case)	body-worn device
EUT is a handheld device	0 mm BOTTOM (worst case)	body-worn device
EUT is a handheld device	0 mm TOP (worst case)	body-worn device

## 1.10 Radio Test Modes

Mode	Settings
GSM 850	Mode = GPRS Modulation = GMSK Duty cycle = 37.5% Power level = maximum (Gamma 3), 3 Timeslot Antenna = integrated
GSM 1900	Mode = GPRS Modulation = GMSK Duty cycle = 50% Power level = maximum (Gamma 3), 4 Timeslot Antenna = integrated
W-CDMA FDD II	Mode = RMC, 144 kbps Modulation = QPSK Duty cycle = 100% Power level = maximum (Data pattern All 1) Antenna = integrated
W-CDMA FDD V	Mode = RMC, 12.2 kbps Modulation = QPSK Duty cycle = 100% Power level = maximum (Data pattern All 1) Antenna = integrated
CDMA BC0	Mode = 1xRTT, RC3/3, SO55 Modulation = QPSK Duty cycle = 100% Power level = Max Power Antenna = integrated
CDMA BC1	Mode = 1xRTT, RC3/3, SO55 Modulation = QPSK Duty cycle = 100% Power level = Max Power Antenna = integrated

CDMA BC10	Mode = 1xRTT, RC3/3, SO55 Modulation = QPSK Duty cycle = 100% Power level = Max Power Antenna = integrated
WLAN IEEE 802.11 b/g/n	Mode = 802.11 b Modulation = DSSS Duty cycle = 100% Power level = maximum (1 Mbps) Antenna = integrated
Bluetooth	Mode = long-range Modulation = GFSK Duty cycle = 78% Power level = maximum Antenna = integrated

### 1.11 Test Positions

Position	Description
FRONT-0MM	EUT bottom side directly touching the phantom.
BACK-0MM	EUT top side directly touching the phantom.
LEFT-0mm	EUT left side directly touching the phantom.
RIGHT-0mm	EUT right side directly touching the phantom.
TOP-0mm	EUT front side directly touching the phantom.
BOTTOM-0mm	EUT back side directly touching the phantom.

### 1.12 Test Equipment Used During Testing

SAR Measurement					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Stäubli Robot	Stäubli	RX90B L	EF00271	functional test	functional test
Stäubli Robot Controller	Stäubli	CS7MB	EF00272	functional test	functional test
DASY 5 Measurement Server	Schmid& Partner		EF00273	functional test	functional test
Control Pendant	Stäubli		EF00274	functional test	functional test
Dell Computer	Schmid& Partner	Intel	EF00275	functional test	functional test
Data Acquisition Electronics	Schmid& Partner	DAE3V1	EF00276	2014-09	2015-09
Dosimetric E-Field Probe	Schmid& Partner	ET3DV6	EF00279	2014-09	2015-09
Dosimetric E-Field Probe	Schmid& Partner	EX3DV4	EF00826	2014-09	2015-09
System Validation Kit	Schmid& Partner	D300V3	EF00299	2012-09	2015-09
System Validation Kit	Schmid& Partner	D450V3	EF00300	2012-09	2015-09
System Validation Kit	Schmid& Partner	D900V2	EF00281	2012-09	2015-09
System Validation Kit	Schmid& Partner	D1800V2	EF00282	2012-09	2015-09
System Validation Kit	Schmid& Partner	D1900V2	EF00283	2012-09	2015-09
System Validation Kit	Schmid& Partner	D2450V2	EF00284	2012-09	2015-09
System Validation Kit	Schmid& Partner	D5GHZV2	EF00827	2012-11	2015-11
Flat phantom	Schmid& Partner	V 4.4	EF00328	no calibration required	no calibration required
Oval flat phantom	Schmid& Partner	ELI 4	EF00289	functional test	functional test
Mounting Device	Schmid& Partner	V 3.1	EF00287	functional test	functional test
Millivoltmeter	Rohde & Schwarz	URV 5	EF00126	2013-08	2016-08
Power sensor	Rohde & Schwarz	NRV-Z2	EF00125	2013-04	2015-04
RF signal generator	Rohde & Schwarz	SMP 02	EF00165	2013-05	2015-05
Insertion unit	Rohde & Schwarz	URV5-Z4	EF00322	2014-09	2015-09
Directional Coupler	HP	HP 87300B	EF00288	functional test	functional test
Radio Communication Tester	Rohde & Schwarz	CMD65	EF00625	ICO (initial calibration only)	ICO (initial calibration only)
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	EF00304	2014-05	2015-05
Network Analyzer 300 kHz to 3 GHz	Agilent	8752C	EF00140	2014-06	2015-06
Dielectric Probe Kit	Agilent	85070C	EF00291	functional test	functional test
DAK Thermometer (-20...110°C)	LKM electronic GmbH	DTM3000	EF00967	2014-09	2015-09
DAK Measurement Software	SPEAG	DAKS	EF00965	no calibration required	no calibration required
DAK Probe (200MHz-20GHz)	SPEAG	DAK-3.5	EF00945	2014-09	2015-09

## 2 Result Summary

OET Bulletin 65 Supplement C, RSS-102					
Product Specific Standard Section	Requirement – Test	Reference Method	Maximum SAR [W/kg]	Result	Remarks
OET Bulletin 65 Suppl. C Section 2 RSS-102 Section 3	Single-band conformity	KDB Publication 447498 KDB Publication 248227 KDB Publication 865664	1.582	PASS	
OET Bulletin 65 Suppl. C Section 2 RSS-102 Section 3	Multi-band conformity	KDB Publication 447498 KDB Publication 648474 KDB Publication 865664	1.582	PASS	
<b>Remarks:</b>					

### 3 Definitions

The specific absorption rate (SAR) is defined as the time derivative of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho_t$ ), expressed in watts per kilogram (W/kg)

$$\text{SAR} = d/dt (dW/dm) = d/dt (dW/\rho_t dV) = \sigma/\rho_t |E_t|^2$$

where

$$dW/dt = \int_V E \cdot J \, dV = \int_V \sigma E^2 \, dV$$

#### 3.1 Controlled Exposure

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category and the general population/uncontrolled exposure limits apply to these devices.

#### 3.2 Uncontrolled Exposure

In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on the risk of potential exposure and instructions on methods to minimize such exposure risks.

#### 3.3 Localized SAR


Compliance with the localized SAR limits is demonstrated using the head and trunk limit because this SAR limit is only half the limbs limit value. The values are obtained by SAR measurements according to EN 62209-2.

## 4 Localized SAR Measurement Equipment


The measurements were performed with Dasy5 automated near-field scanning system comprised of high precision robot, robot controller, computer, e-field probe, probe alignment unit, phantoms, non-conductive phone positioned and software extension.

### 4.1 Complete SAR DASY5 Measurement System

Measurements are performed using the DASY5 automated assessment system made by Schmid& Partner Engineering AG (SPEAG) in Zurich, Switzerland.

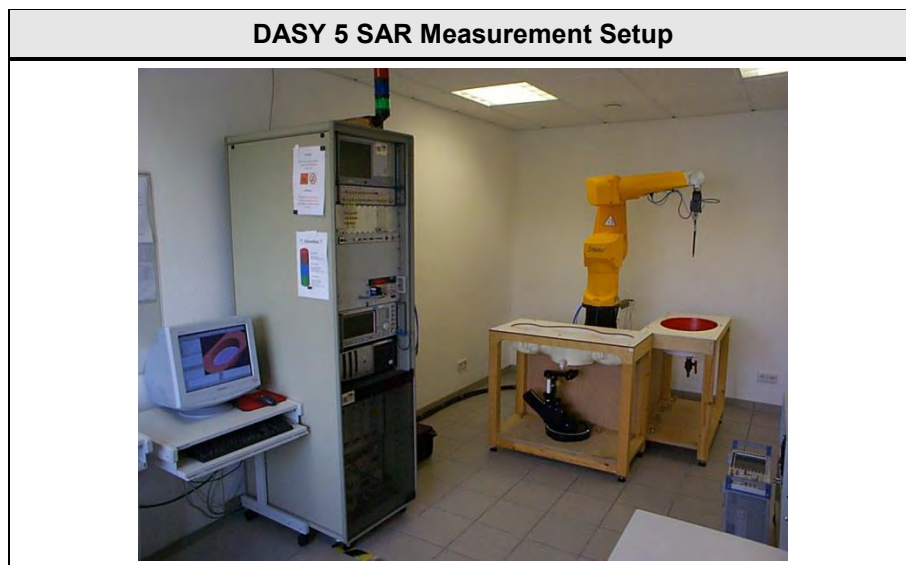

The following Diagram show the elements involved in the measurement setup.

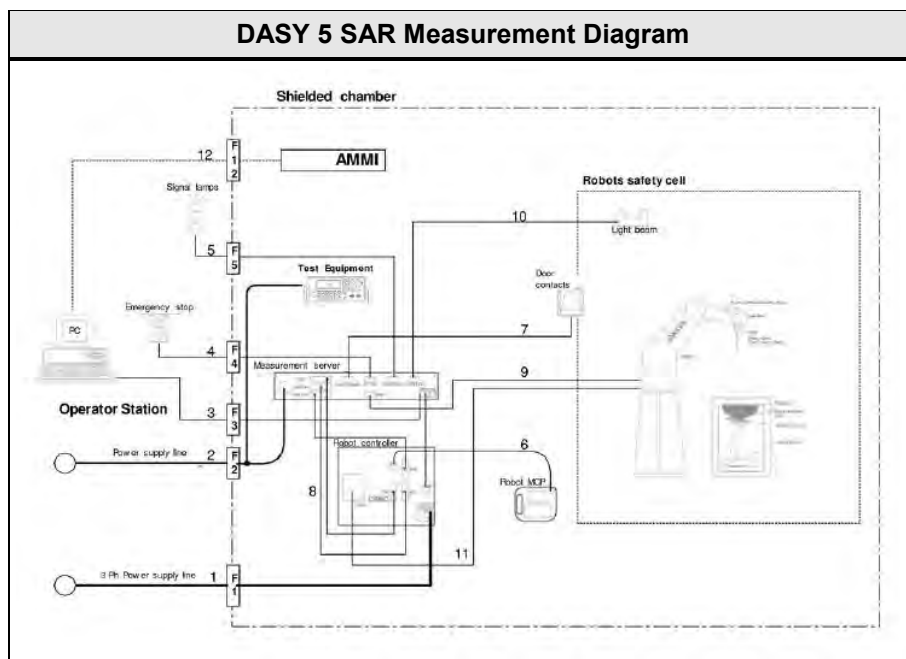



The DASY5 system for performing compliance tests consists of the following items:


<b>DASY5 SAR Measurement System</b>	
Device	Description:
RX90BL	A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software.
Probe Alignment Unit	A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
Teach Pendant	The Manual Control Pendant (MCP), also called the manual teach pendant, is the user interface to the robot. In DASY, it is used for certain installation and teach procedures
Signal Lamps	External warning lamp which indicates when the robot arm is powered-on and if the robot is under software control or in manual mode (controlled with the teach pendant).
DAE	The data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
E-Field Probes	Isotropic E-Field probe optimized and calibrated for E-field measurements in free space.
EOC	The electro-optical converter (EOC) performs the conversion between optical and electrical signals
Measurement Server	The functions of the measurement server is to perform the time critical task such as signal filtering, surveillance of the robot operation, fast movement interrupts.
Control Computer	A computer operating Windows 2000 or Windows NT with DASY 4 Software.
Control Software	DASY4 and SEMCAD post processing Software
SAM Twin Phantom	The SAM twin phantom enabling testing left-hand and right-hand usage.
Flat Phantom	Flat Phantom (only for body-mounted transceivers operating below 800 MHz).
Tissue simulating liquid	Tissue simulating liquid mixed according to the given recipes.
Device Holder	The device holder for handheld mobile phones.
System Validation Dipoles	System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2 Robot Arm

The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France).

The RX robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

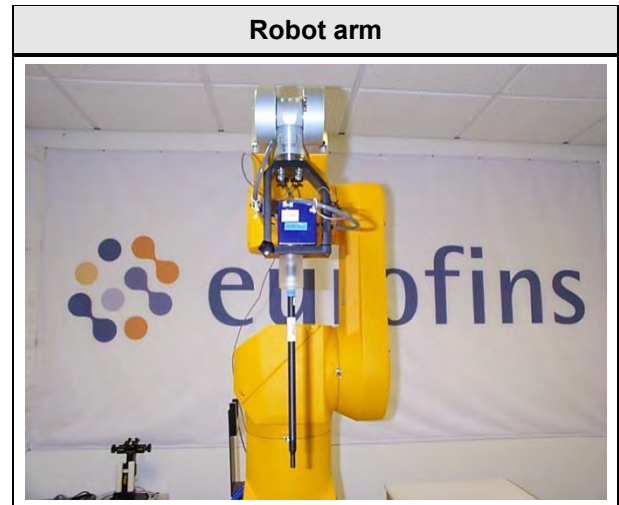

#### 4.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

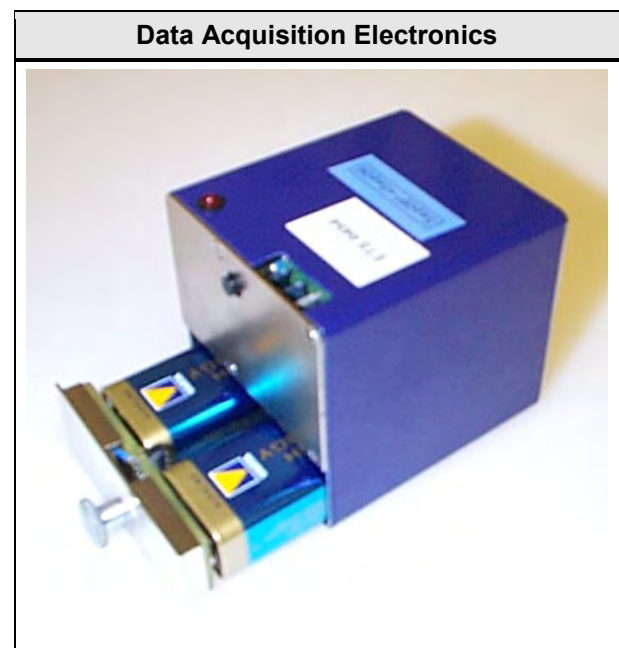

#### 4.4 Isotropic E-Field Probe $\leq 3$ GHz

##### Probe Specifications

###### **Construction:**

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

###### **Calibration:**

In air from 10 MHz to 2.5 GHz,  
In brain and muscle simulating tissue at  
Frequencies of 835MHz, 900MHz, 1800MHz,  
1900 MHz and 2450 MHz

###### **Frequency:**

10MHz to > 3GHz,  
Linearity  $\pm 0.2$ dB (30MHz to 3GHz)

###### **Directivity:**

$\pm 0.2$ dB in HSL (rotation around probe axis)  
 $\pm 0.4$ dB in HSL (rotation normal to probe axis)

###### **Dynamic Range:**

5 $\mu$ W/g to > 100mW/g

###### **Linearity:**

$\pm 0.2$ dB

###### **Dimensions:**

Overall Length: 330mm (Tip: 16mm),  
Tip Diameter: 6.8mm (Body: 12mm),  
Distance from probe tip to dipole centers: 2.7mm

###### **Application:**

General dosimetry up to 3 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms



#### 4.5 Isotropic E-Field Probe $\leq 6$ GHz

##### Probe Specifications

###### Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

###### Calibration:

In air from 10 MHz to 6 GHz,  
In brain and muscle simulating tissue at  
Frequencies of 5200, 5500, 5800

###### Frequency:

10MHz to 6GHz,  
Linearity  $\pm 0.2$ dB (30MHz to 6GHz)

###### Directivity:

$\pm 0.3$ dB in HSL (rotation around probe axis)  
 $\pm 0.5$ dB in tissue material (rotation normal to probe axis)

###### Dynamic Range:

10 $\mu$ W/g to > 100mW/g

###### Linearity:

$\pm 0.2$ dB

###### Dimensions:

Overall Length: 337mm (Tip: 20mm),  
Tip Diameter: 2.5mm (Body: 12mm),  
Distance from probe tip to dipole centers: 1mm

###### Application:


General dosimetry up to 6 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms



#### 4.6 Test phantom and positioner

The positioner and test phantoms are manufactured by SPEAG. The test phantoms are used for all tests i.e. for both validation testing and device testing. The positioner and test phantom conforms to the requirements of EN 62209 and IEEE 1528.


The SPEAG device holder was used to position the test device in all tests whilst a tripod was used to position the validation dipoles in the test arch.

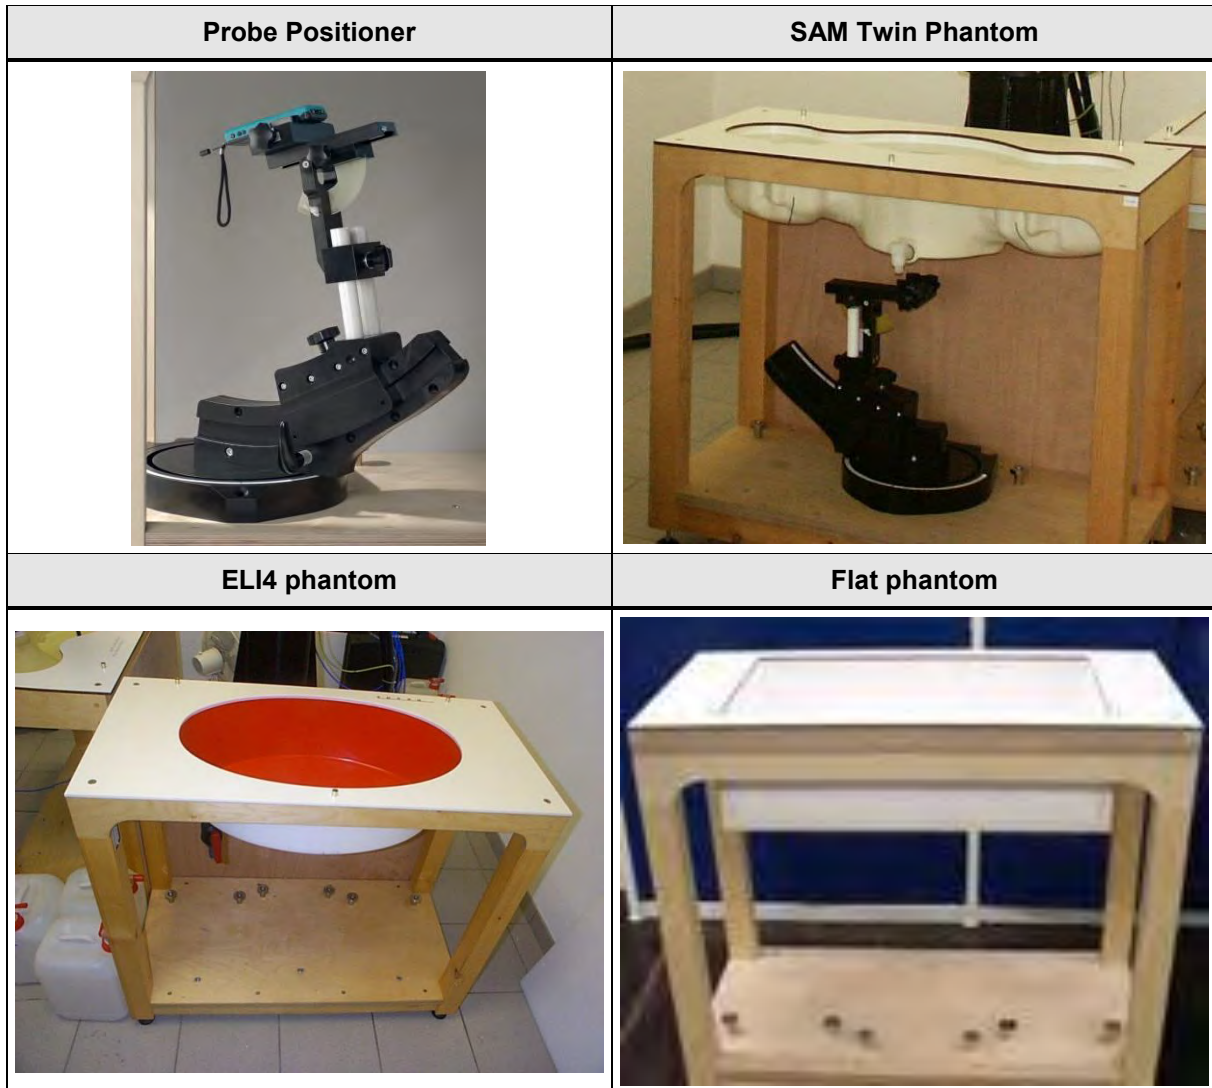



#### 4.7 System Validation Dipoles

A set of calibration dipoles (D900V2, D1900V2, D2450V2, D5GHzV2) is included as a part of the SAR measurement setup. These are used for the validation of the test setup after its installation and prior to the EUT measurements. The calibration dipole is placed in the position normally occupied by the EUT. All calibration dipoles have the same height which allows an exact fitting below the center point of the test phantom. The dipole center is 10mm below the surface of the test phantom.

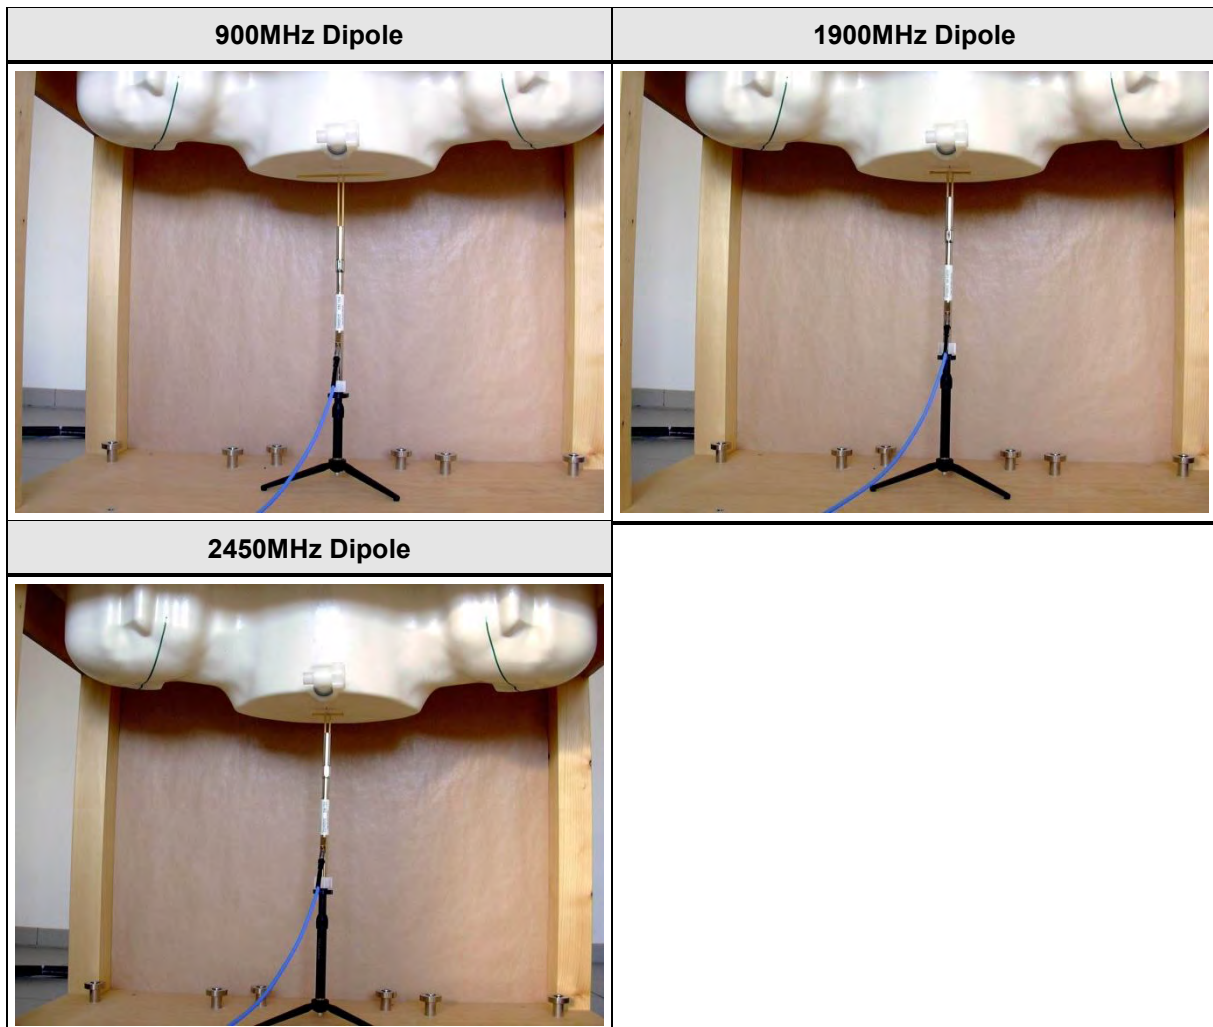

## 5 Single-band SAR Measurement

After successful completion of the tissue and system verification the SAR values of the EUT are measured according to the following description.

### 5.1 General measurement description

The measurement is performed for each frequency band of the device. If the width of the transmit frequency band exceeds 1% of its center frequency, then the channels at the lowest and highest frequencies should also be tested. Furthermore, if the width of the transmit band exceeds 10% of its center frequency the following formula is used to determine the number of channels:

$$N_C = 2 \cdot \text{roundup}[10 \cdot (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

First the device is tested on the center channel of each frequency band used by the device. An operation mode and configuration with maximum transmit power is established. If battery operated equipment is used, the batteries are fully charged.

SAR measurements are performed using the steps outlined in the next section for all relevant operational modes, EUT configurations and measurement positions.

For the condition (position, configuration, operational mode) that provides the highest spatial-average SAR value on the center channel, the other channels are also tested.

Additionally all other conditions where the spatial-average SAR value is within 3dB of the SAR limit are also tested on all determined test frequencies.

### 5.2 SAR measurement description

First the local SAR value at a test point within 10mm or less in normal direction from the inner surface of the phantom is measured. This SAR value is used to determine the measurement drift during SAR measurement.

Next an area scan is performed over an area larger than the projection of the EUT with antenna on the surface of the phantom with a spatial grid step of 10mm.

From the scanned SAR distribution the position of maximum SAR value is identified as well as any local SAR maxima within 2dB of the maximum value that are not within the zoom scan volume. (The additional peaks are only measured when the primary peak is within 2dB of the SAR limit.)



The zoom-scan volume constructed on the peak SAR position is scanned with a grid step of 5mm. The measured data are extracted and the local SAR value for each measurement point is calculated. The measured values are interpolated over a fine-mesh within the scan volume and the average SAR value over 10g mass is calculated.

At the end of the measurement the reference point measured at the beginning of the measurement is measured again and from the difference the drift is calculated.

### 5.3 Reference lines and points for Handsets

For all measurement positions of the EUT, the EUT has to be placed in a specific orientation with respect to the phantom. The orientation of the EUT relative to the phantom is defined by reference lines and points.


According to IEEE 1528, the reference lines and points shall be positioned at the EUT as shown in the following figure.

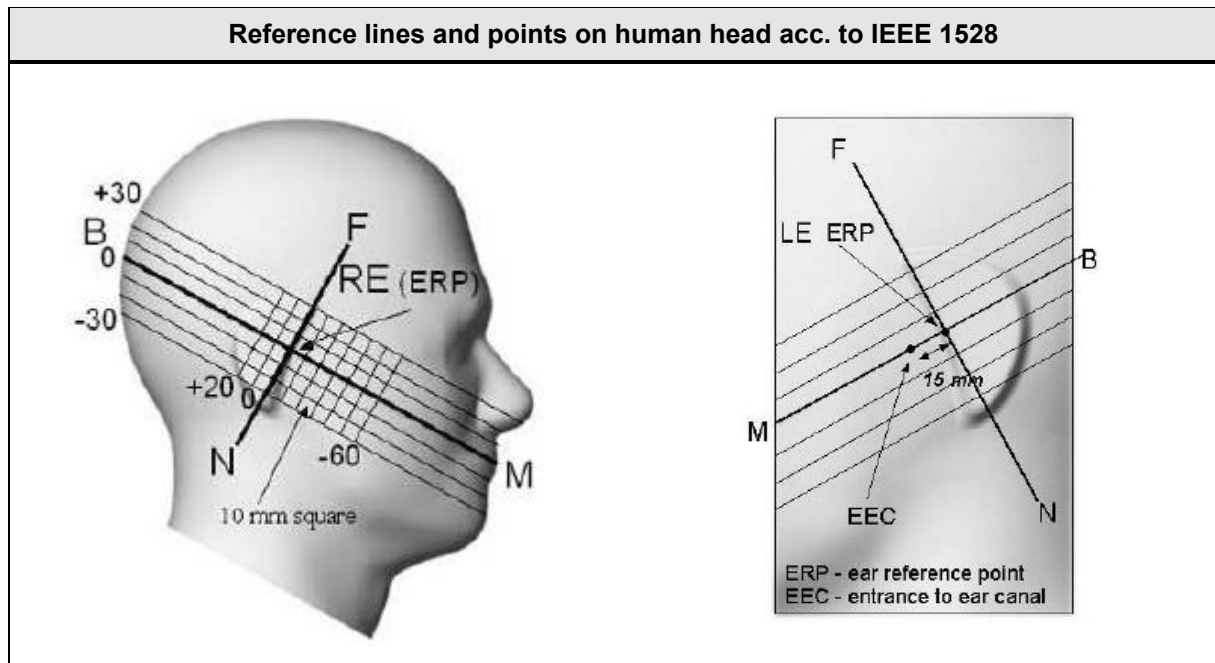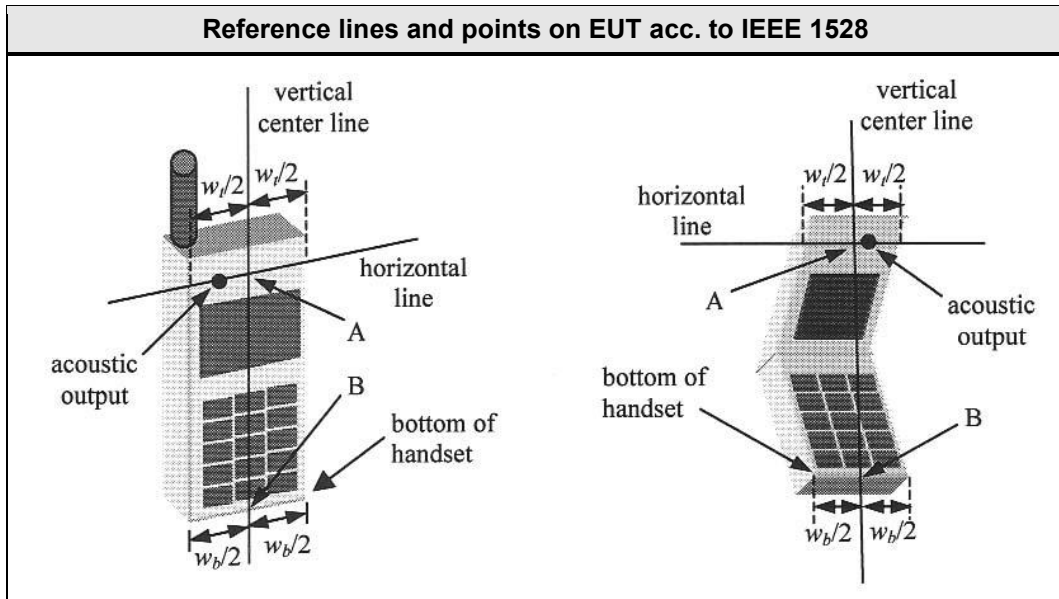



#### 5.4 Test positions relative to the Head


##### Cheek position

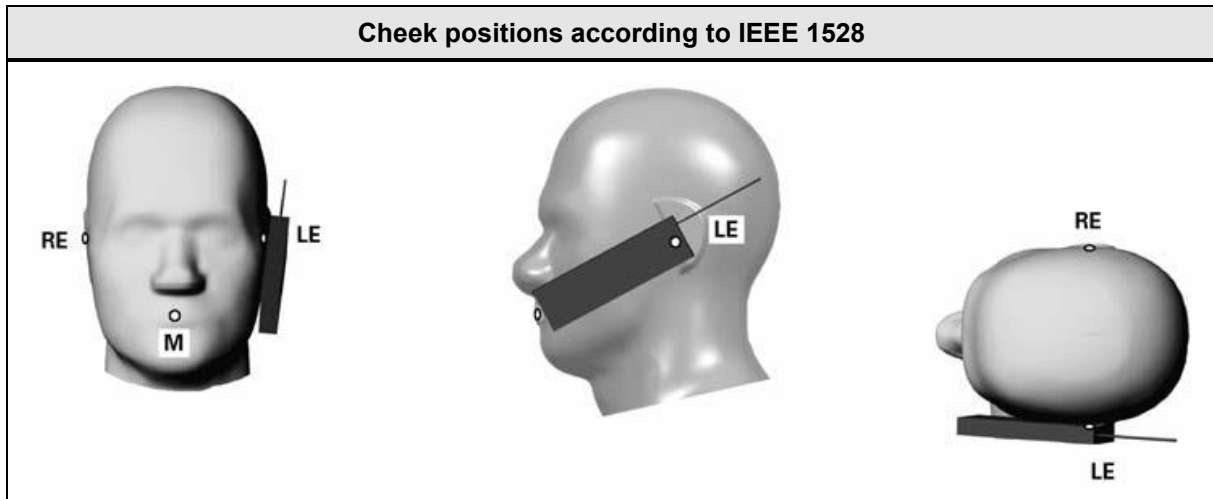

The handset is positioned close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom. Next the handset is translated towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.

While the handset is maintained in this plane, it is rotated around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane. Then it is rotated around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. While the vertical centerline is maintained in the Reference Plane, point A is kept on the line passing through RE and LE, and the handset is maintained in contact with the pinna, the handset is rotated about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek.


##### Tilt position

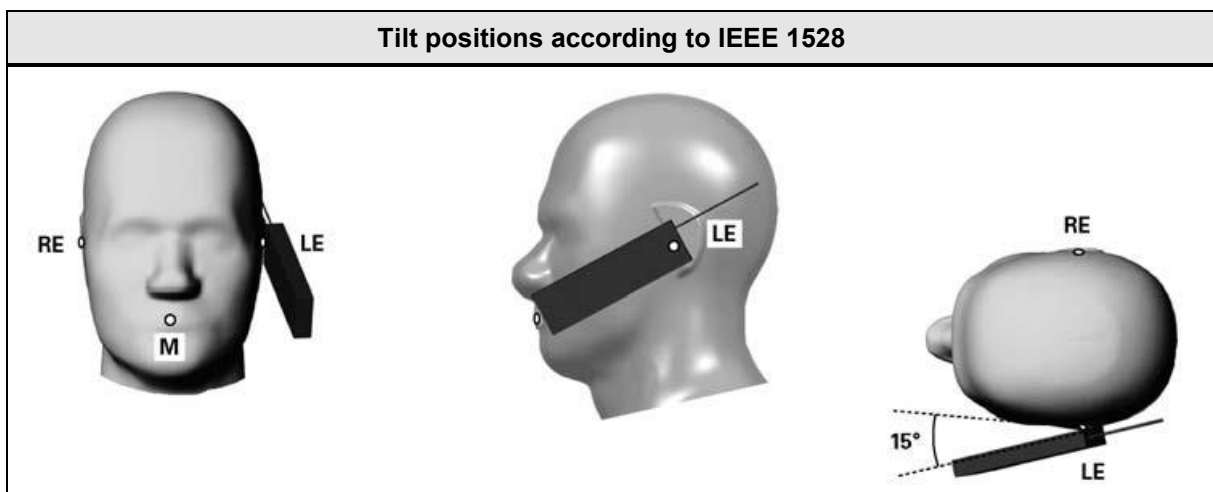

First the EUT is placed in the cheek position. Next the handset is moved away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°. Then the handset is rotated around the horizontal line by 15°.

The handset is moved towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head

### 5.5 Test positions relative to the human body

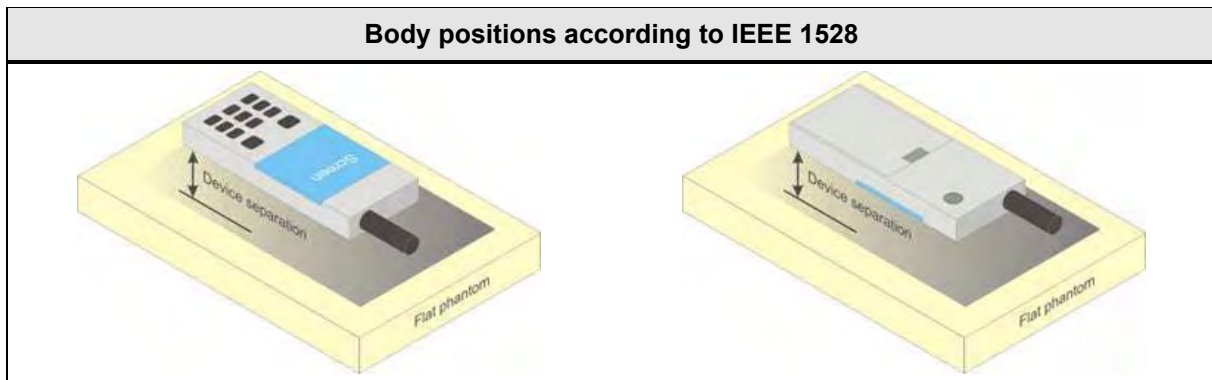

In body worn configuration the device is positioned parallel to the phantom surface with either top or bottom side of the EUT facing against the phantom.

The separation distance of the EUT is selected according to the use case of the EUT (e.g. with belt clip or holster).

## 5.6 Measurement Uncertainty

Measurement Uncertainty according to IEEE 1528							
Error Description	Uncertainty Value	Probability Distribution	Div.	c <sub>i</sub> (1g)	c <sub>i</sub> (10g)	Std. Unc. 1g	Std. Unc. 10g
<b>Measurement System</b>							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
<b>Test Sample Related</b>							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
<b>Phantom and Setup Related</b>							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±12.8%	±12.7%
<b>Expanded Standard Uncertainty</b>						<b>±25.6%</b>	<b>±25.4%</b>

## 6 Test Conditions and Results

### 6.1 Recipes for Tissue Simulating Liquids

Body Tissue Simulating Liquids					
Ingredient	M 450-B weight (%)	M 900-B weight (%)	M 1800-B weight (%)	M 1950-A weight (%)	M 2450-B weight (%)
Water	46.21	50.75	70.17	69.79	68.64
Sugar	51.17	48.21			
Cellulose	0.18				
Salt	2.34		0.39	0.2	
Preventol	0.08	0.1			
DGBE			29.44	30	31.37
Head Tissue Simulating Liquids					
Ingredient	HSL 450-A weight (%)	HSL 900-B weight (%)	HSL 1800-F weight (%)	HSL 1950-B weight (%)	HSL 2450-B weight (%)
Water	38.91	40.29	55.24	55.41	55
Sugar	56.93	57.9			
Cellulose	0.25	0.24			
Salt	3.79	1.38	0.31	0.08	
Preventol	0.12	0.18			
DGBE			44.45	44.51	45

Water: deionized water, resistivity  $\geq 16 \text{ M}\Omega$

Sugar: refinedwhitesugar

Salt: pure NaCl

Cellulose: Hydroxyethyl-cellulose


Preservative: Preventol D-7

DGBE: Diethylenglycol-monobuthylether

The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., IEEE 1528-2003, IEC 62209-1)

## 6.2 Test Conditions and Results – Tissue Validation

Tissue Validation acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102					Verdict: PASS
Test according to measurement reference		Reference Method			
		OET Bulletin 65 Supplement C			
Target Values					
Frequency [MHz]	Head		Body		Permitted tolerance [%]
	Relative dielectric constant $\epsilon_r$	Conductivity $\sigma$ [S/m]	Relative dielectric constant $\epsilon_r$	Conductivity $\sigma$ [S/m]	
150	52.3	0.76	61.9	0.80	$\leq \pm 5$
300	45.3	0.87	58.2	0.92	$\leq \pm 5$
450	43.5	0.87	56.7	0.94	$\leq \pm 5$
835	41.5	0.90	55.2	0.97	$\leq \pm 5$
900	41.5	0.97	55.0	1.05	$\leq \pm 5$
915	41.5	0.98	55.0	1.06	$\leq \pm 5$
1450	40.5	1.20	54.0	1.30	$\leq \pm 5$
1610	40.3	1.29	53.8	1.40	$\leq \pm 5$
1800 – 2000	40.0	1.40	53.3	1.52	$\leq \pm 5$
2450	39.2	1.80	52.7	1.95	$\leq \pm 5$
3000	38.5	2.40	52.0	2.73	$\leq \pm 5$
5200	36.0	4.66	49.0	5.30	$\leq \pm 5$
5500	35.6	4.96	48.6	5.65	$\leq \pm 5$
5800	35.3	5.27	48.2	6.00	$\leq \pm 5$

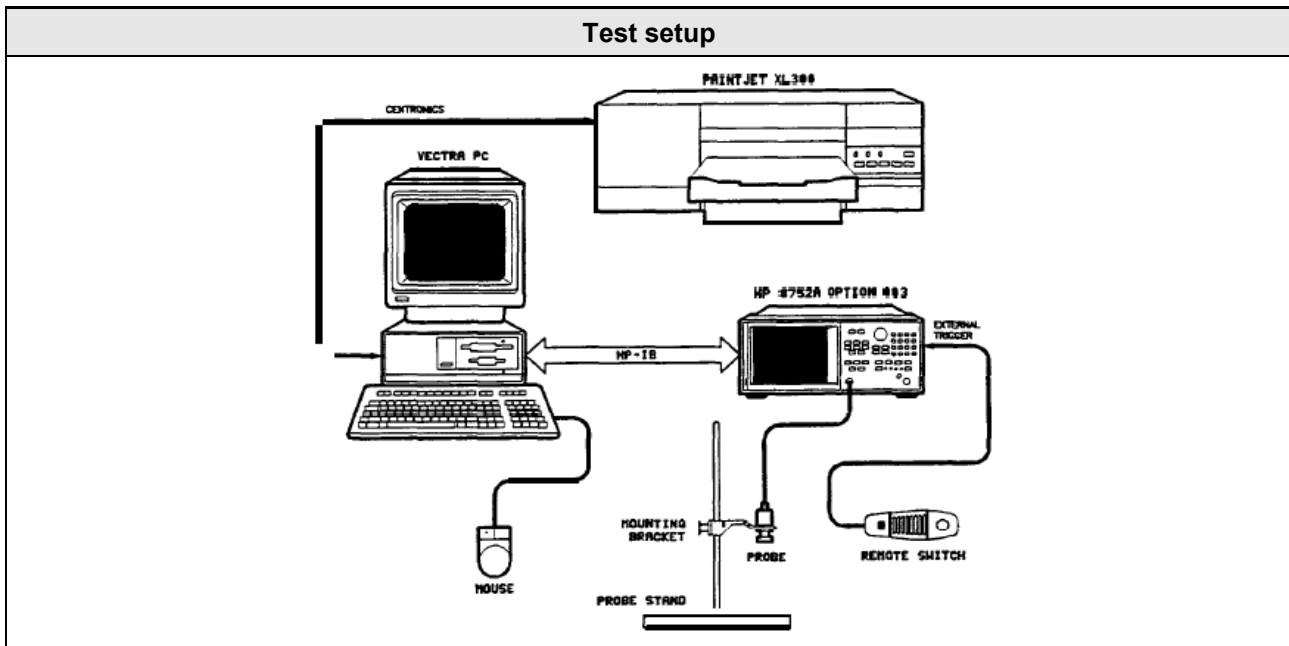

**Test procedure**

1. The dielectric probe kit is calibrated using the standards air, short circuit and deionized water
2. The tissue simulating liquid is measured using the dielectric probe
3. Target values are compared to the measurement values and deviations are determined

**Test results**

Frequency [MHz]	Tissue	Measured $\epsilon_r$	Target $\epsilon_r$	Delta $\epsilon_r$ [%]	Measured $\sigma$ [S/m]	Target $\sigma$ [S/m]	Delta $\sigma$ [%]
2450	Body	50.25	52.7	-04.65	2.0	1.95	02.56
1900	Body	50.52	53.3	-05.00	1.50	1.52	-01.32
900	Body	52.91	55.0	-03.80	1.10	1.05	04.76
*2402	Body	50.40	52.76	-04.47	1.93	1.90	01.58
*2412	Body	50.39	52.75	-04.47	1.94	1.91	01.57
*2437	Body	50.28	52.72	-04.63	1.99	1.94	02.58
*2441	Body	50.28	52.71	-04.61	1.99	1.94	02.58
*2462	Body	50.21	52.68	-04.69	2.02	1.97	02.54
*2480	Body	50.17	52.66	-04.73	2.05	1.99	03.02
*1850.2	Body	50.64	53.30	-04.99	1.45	1.52	-04.61
1851.25	Body	50.64	53.30	-04.99	1.45	1.52	-04.61
*1852.4	Body	50.64	53.30	-04.99	1.47	1.52	-03.29
*1880.0	Body	50.55	53.30	-05.00	1.48	1.52	-02.63
*1907.6	Body	50.50	53.30	-05.00	1.51	1.52	-00.66
1908.75	Body	50.50	53.30	-05.00	1.52	1.52	00.00
*1909.8	Body	50.49	53.30	-05.00	1.51	1.52	-00.66
*815.04	Body	53.92	55.28	-02.46	1.01	0.97	04.12


Test Report No.: G0M-1406-3915-TFC093SR-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

*817.9	Body	53.91	55.27	-02.46	1.02	0.97	05.00
*820.5	Body	53.90	55.26	-02.46	1.02	0.97	05.00
*823.1	Body	53.84	55.25	-02.55	1.02	0.97	05.00
*824.2	Body	53.84	55.24	-02.53	1.02	0.97	05.00
*824.7	Body	53.83	55.24	-02.55	1.02	0.97	05.00
*826.4	Body	53.81	55.23	-02.57	1.02	0.97	05.00
*836.6	Body	53.68	55.20	-02.75	1.02	0.97	05.00
*846.6	Body	53.55	55.16	-02.92	1.03	0.98	05.00
*848.0	Body	53.53	55.16	-02.96	1.04	0.99	05.00
*848.97	Body	53.52	55.16	-02.97	1.04	0.99	05.00

Comments: \* Dielectrical values of low, mid and high channel

6.3 Test Conditions and Results – System Validation

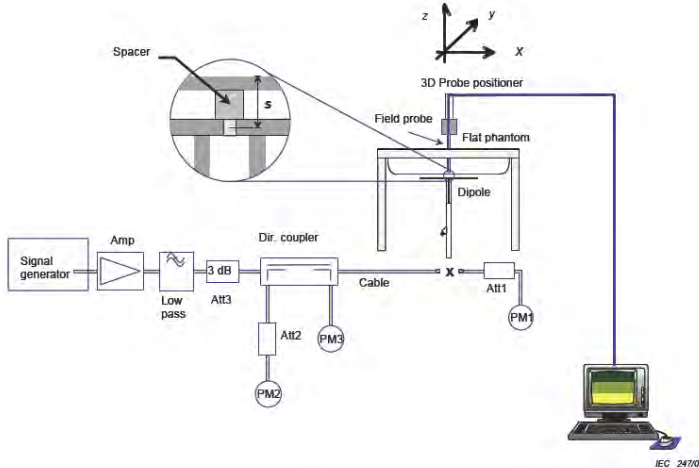System Validation acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102		Verdict: PASS		
Test according to measurement reference	Reference Method			
	OET Bulletin 65 Supplement C / IEEE 1528			
Test frequency range	Tested frequencies			
	2450 MHz , 5200 MHz			
Test mode	unmodulated CW			
Target Values				
Frequency [MHz]	Target SAR value [W/kg (1g)]		Permitted tolerance [%]	
2450	12.9 @ 250mW		≤±10	
1900	10.2 @ 250mW		≤±10	
900	2.76 @ 250mW		≤±10	
The target reference values are taken from the calibration sheets (see annex)				
Test setup				
				
Test procedure				
<ol style="list-style-type: none"> <li>1. The dipole antenna input power is set to 250mW</li> <li>2. The reference dipole is positioned under the phantom</li> <li>3. With the dipole antenna powered the SAR value is measured</li> <li>4. The measured SAR values are compared to the target SAR values</li> </ol>				
Test results				
Frequency [MHz]	Input power [mW]	Measured SAR value [W/kg (1g)]	Target SAR value [W/kg (1g)]	Delta [%]
2450	250	14.10	12.9	09.30
2450	250	14.09	12.9	09.22
2450	250	14.12	12.9	09.46



1900	250	9.66	10.2	-05.29
1900	250	9.45	10.2	-07.35
1900	250	9.44	10.2	-07.45
900	250	2.9	2.76	05.07
900	250	2.94	2.76	06.52
900	250	3.0	2.76	08.70
Comments:				

6.4 Test Conditions and Results – Standalone SAR Measurement

Standalone SAR acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102							Verdict: PASS	
Test according to measurement reference			Reference Method					
			FCC OET Bulletin 65 Supplement C / IC RSS-102 Issue 5					
Room temperature			22.0 – 22.6 °C					
Liquid depth			15.5 cm					
Environment			general public					
Limits								
Region			Occupational SAR values [W/kg]			General public SAR values [W/kg]		
Whole body average SAR			0.4			0.08		
Localized SAR (Head and trunk) SAR averaging mass = 10g			8			1.6		
Localized SAR (Limbs) SAR averaging mass = 10g			20			4		
Test results								
Mode	Position	Channel	Frequency [MHz]	Drift [dB]	Measure SAR [W/kg (1g)]	*Scaling Factor	Reported SAR [W/kg (1g)]	SAR Limit [W/kg (1g)]
GPRS 850	FLAT TOP 0mm	128	824.2	-0.09	1.090	1.122	1.223	1.6
GPRS 850	FLAT TOP 0mm	190	836.6	-0.08	1.100	1.122	1.234	1.6
GPRS 850	FLAT TOP 0mm	251	848.0	0.08	1.170	1.122	1.313	1.6
GPRS 850	FLAT BOTTOM	128	824.2	-0.05	1.160	1.122	1.302	1.6
GPRS 850	FLAT BOTTOM	190	836.6	-0.01	1.220	1.122	1.369	1.6
GPRS 850	FLAT BOTTOM	251	848.0	-0.00	1.140	1.122	1.279	1.6
GPRS 850	FLAT RIGHT 0mm	190	836.6	0.01	0.292	1.122	1.032	1.6
GPRS 850	FLAT LEFT 0mm	190	836.6	-0.02	0.070	1.122	0.079	1.6
GPRS 850	FLAT FRONT 0mm	128	824.2	-0.08	1.410	1.122	**1.582	1.6
GPRS 850	FLAT FRONT 0mm	190	836.6	-0.00	1.280	1.122	1.436	1.6
GPRS 850	FLAT FRONT 0mm	251	848.0	-0.08	1.200	1.122	1.346	1.6
GPRS1900	FLAT FRONT 0mm	810	1909.8	0.08	0.151	1.122	0.169	1.6
GPRS1900	FLAT TOP 0mm	810	1909.8	-0.07	0.491	1.122	**0.551	1.6
GPRS1900	FLAT BOTTOM 0mm	810	1909.8	-0.03	0.372	1.122	0.417	1.6
GPRS1900	FLAT RIGHT 0mm	810	1909.8	-0.08	0.443	1.122	0.497	1.6
UMTS FDDII	FLAT FRONT 0mm	9262	1852.4	-0.02	0.457	1.122	0.513	1.6
UMTS FDDII	FLAT TOP 0mm	9262	1852.4	-0.08	0.476	1.122	0.534	1.6
UMTS FDDII	FLAT BOTTOM 0mm	9262	1852.4	0.01	0.590	1.122	**0.662	1.6
UMTS FDDII	FLAT RIGHT 0mm	9262	1852.4	0.04	0.470	1.122	0.527	1.6

Test Report No.: G0M-1406-3915-TFC093SR-V01

UMTS FDDV	FLAT FRONT 0mm	4132	826.4	-0.06	0.583	1.122	0.654	1.6
UMTS FDDV	FLAT RIGHT 0mm	4132	826.4	0.03	0.110	1.122	0.123	1.6
UMTS FDDV	FLAT LEFT 0mm	4132	826.4	0.08	0.005	1.122	0.006	1.6
UMTS FDDV	FLAT BOTTOM 0mm	4132	826.4	0.19	0.600	1.122	**0.673	1.6
UMTS FDDV	FLAT TOP 0mm	4132	826.4	-0.08	0.462	1.122	0.518	1.6
CDMA BC0	FLAT FRONT 0mm	1024	815.02	0.04	0.739	1.122	0.829	1.6
CDMA BC0	FLAT FRONT 0mm	1013	824.70	-0.14	0.755	1.122	**0.847	1.6
CDMA BC0	FLAT FRONT 0mm	799	848.97	-0.05	0.527	1.122	0.591	1.6
CDMA BC0	FLAT TOP 0mm	1013	824.70	0.09	0.354	1.122	0.397	1.6
CDMA BC0	FLAT BOTTOM 0mm	1013	824.70	-0.08	0.358	1.122	0.402	1.6
CDMA BC0	FLAT RIGHT 0mm	1013	824.70	-0.11	0.124	1.122	0.139	1.6
CDMA BC0	FLAT LEFT 0mm	1013	824.70	0.08	0.007	1.122	0.008	1.6
CDMA BC10	FLAT FRONT 0mm	476	817.90	0.04	0.863	1.122	0.968	1.6
CDMA BC10	FLAT FRONT 0mm	580	820.50	-0.04	0.868	1.122	**0.974	1.6
CDMA BC10	FLAT FRONT 0mm	684	823.10	-0.10	0.784	1.122	0.880	1.6
CDMA BC10	FLAT TOP 0mm	580	820.50	0.10	0.342	1.122	0.384	1.6
CDMA BC10	FLAT BOTTOM 0mm	580	820.50	0.04	0.106	1.122	0.119	1.6
CDMA BC10	FLAT RIGHT 0mm	580	820.50	0.04	0.105	1.122	0.118	1.6
CDMA BC10	FLAT LEFT 0mm	580	820.50	0.00	0.004	1.122	0.005	1.6
CDMA BC1	FLAT FRONT 0mm	25	1851.25	-0.11	0.597	1.122	**0.670	1.6
CDMA BC1	FLAT TOP 0mm	25	1851.25	-0.03	0.176	1.122	0.197	1.6
CDMA BC1	FLAT BOTTOM 0mm	25	1851.25	0.04	0.285	1.122	0.320	1.6
CDMA BC1	FLAT RIGHT 0mm	25	1851.25	-0.08	0.228	1.122	0.256	1.6
WLAN 2.4 GHz	FLAT TOP 0mm	11	2462	-0.05	0.223	1.122	**0.250	1.6
Bluetooth LR	FLAT TOP 0mm	0	2402	0.03	0.014	1.122	0.016	1.6
Bluetooth LR	FLAT BOTTOM 0mm	0	2402	-0.03	0.048	1.122	**0.054	1.6
Bluetooth LR	FLAT BACK 0mm	0	2402	0.05	0.047	1.122	0.053	1.6
Bluetooth LR	FLAT LEFT 0mm	0	2402	0.02	0.011	1.122	0.012	1.6
Bluetooth LR	FLAT RIGHT 0mm	0	2402	0.00	0.009	1.122	0.010	1.6
<b>Overall maximum SAR value [W/kg (1g)]</b>						<b>1.582</b>	<b>1.6</b>	
Comments:*tune up tolerance / conducted power = scaling factor ** attached measurement plot: highest SAR value for the communication system								

SAR measurements were started with the highest power channel of the transmission band under investigation. Other measurement channels were omitted when the SAR value of the highest power channel was below 0.8 W/kg according to KDB 248227 v01r02.

According to KDB 865664 D02 v01r01 only the SAR plots for the highest SAR results for each EUT configuration and operating condition are given in the "SAR Results" part of the report.

**6.5 Test Conditions and Results – Multi-transmitter SAR Result**

Position	CDMA	Max. SAR: GSM	Max. SAR: W-CDMA	Max. SAR: IEEE 802.11 b	Max. SAR: Bluetooth	Max. SAR: Bluetooth Long-Range	sum of 1g SAR	Ri (mm)	SPLSR	Sketch
Back		*0.40		*0.40		0.059	0.859	N/A	N/A	
Top		1.313		0.25		0.018	1.581	N/A	N/A	
Left		0.079		*0.40		0.012	0.491	N/A	N/A	
Right		1.032		*0.24		0.010	1.282	N/A	N/A	
Front		1.582		*0.40		*0.00	**1.982	N/A	N/A	
Bottom		1.369		*0.28		0.06	1.709	66.3	0.032	1
Back			*0.40	*0.40		0.059	0.859	N/A	N/A	
Top			0.534	0.25		0.018	0.802	N/A	N/A	
Left			0.008	*0.40		0.012	0.420	N/A	N/A	
Right			0.527	*0.24		0.010	0.777	N/A	N/A	
Front			0.654	*0.40		*0.00	1.054	N/A	N/A	
Bottom			0.673	*0.28		0.06	1.013	N/A	N/A	
Back		*0.40			*0.40	0.059	0.859	N/A	N/A	
Top		1.313			*0.081	0.018	1.412	N/A	N/A	
Left		0.079			*0.40	0.012	0.491	N/A	N/A	
Right		1.032			*0.029	0.010	1.071	N/A	N/A	
Front		1.582			*0.40	*0.00	**1.982	N/A	N/A	
Bottom		1.369			*0.033	0.06	1.462	N/A	N/A	
Back			*0.40		*0.40	0.059	0.859	N/A	N/A	
Top			0.534		*0.081	0.018	0.633	N/A	N/A	
Left			*0.40		*0.40	0.012	0.812	N/A	N/A	
Right			0.527		*0.029	0.010	0.566	N/A	N/A	
Front			0.654		*0.40	*0.00	1.054	N/A	N/A	
Bottom			0.673		*0.033	0.06	0.766	N/A	N/A	
Back	*0.40			*0.40		0.059	0.859	N/A	N/A	
Top	0.397			0.25		0.018	0.665	N/A	N/A	
Left	*0.40			*0.40		0.012	0.812	N/A	N/A	
Right	0.139			*0.24		0.010	0.389	N/A	N/A	
Front	0.974			*0.40		*0.00	1.374	N/A	N/A	
Bottom	0.402			*0.28		0.06	0.742	N/A	N/A	
Back	*0.40				*0.4	0.059	0.859	N/A	N/A	
Top	0.397				*0.081	0.018	0.496	N/A	N/A	
Left	*0.40				*0.4	0.012	0.812	N/A	N/A	
Right	0.139				*0.029	0.010	0.178	N/A	N/A	
Front	0.974				*0.4	*0.00	1.374	N/A	N/A	
Bottom	0.402				*0.033	0.06	0.495	N/A	N/A	

\*According to KDB 447498 D01 v05r02 SAR estimation formula for test separation distance  $\leq 50\text{mm}$

$$\frac{\text{max Power includes tune up tolerance, mW}}{\text{test distance, mm}} \cdot \sqrt{\frac{f_{\text{GHz}}}{7.5}}$$


and 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the *test separation distances* is  $> 50\text{ mm}$

The Maximum Output Power of Bluetooth Low Energy is lower than Bluetooth. The estimated SAR values for Bluetooth Classic (BR+EDR) are the maximum SAR value from Bluetooth (Classic + LE).

The ratio is determined by  $(\text{SAR1} + \text{SAR2})1.5/\text{Ri}$ , rounded to two decimal digits, and must be  $\leq 0.04$  for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. When 10-g SAR applies, the ratio must be  $\leq 0.10$ . SAR1 and SAR2 are the highest *reported* or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

\*\*SAR test exclusion worst case different device edges for GSM and IEEE 802.11/Bluetooth.

Sketch 1

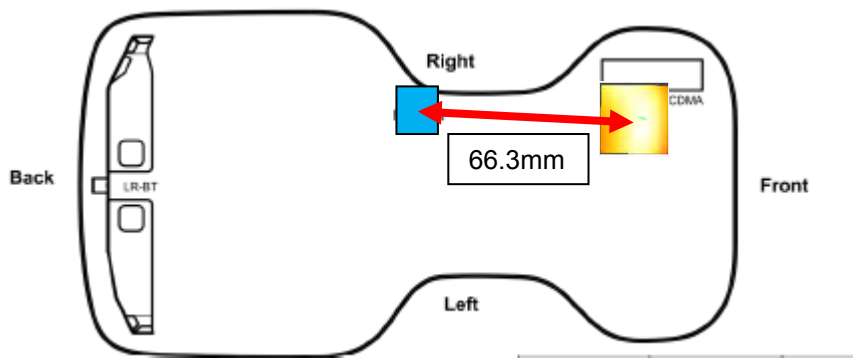

According to KDB 447498 D01 v05r02, there is no SPLSR method described for three antennas. The result is the worst case result between IEEE 802.11 b and GSM, WLAN SAR value is an estimate value, centre of the IEEE 802.11 b antenna is use for the Ri distance.

## Calibration Documents

ET00799

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



SCS Schweizerischer Kalibrierdienst  
Service suisse d'étalonnage  
Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Eurofins

Certificate No: ET3-1711\_Sep14

### CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1711

Calibration procedure(s) QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes

Calibration date: September 22, 2014

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:	Name Jeton Kasrati	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: September 23, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



# Probe ET3DV6

## SN:1711

Manufactured: August 7, 2002  
Calibrated: September 22, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.88	1.85	2.05	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	100.1	100.6	99.2	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	267.4	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		280.5	
		Z	0.0	0.0	1.0		275.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
450	43.5	0.87	7.37	7.37	7.37	0.25	2.86	± 13.3 %
750	41.9	0.89	6.76	6.76	6.76	0.56	1.96	± 12.0 %
900	41.5	0.97	6.31	6.31	6.31	0.30	3.00	± 12.0 %
1750	40.1	1.37	5.25	5.25	5.25	0.69	2.19	± 12.0 %
1810	40.0	1.40	5.21	5.21	5.21	0.80	2.02	± 12.0 %
1950	40.0	1.40	5.04	5.04	5.04	0.80	2.02	± 12.0 %
2150	39.7	1.53	4.83	4.83	4.83	0.80	1.92	± 12.0 %
2450	39.2	1.80	4.45	4.45	4.45	0.80	1.63	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
450	56.7	0.94	7.52	7.52	7.52	0.19	2.15	± 13.3 %
750	55.5	0.96	6.26	6.26	6.26	0.28	2.85	± 12.0 %
900	55.0	1.05	6.05	6.05	6.05	0.32	3.00	± 12.0 %
1750	53.4	1.49	4.74	4.74	4.74	0.80	2.46	± 12.0 %
1810	53.3	1.52	4.63	4.63	4.63	0.80	2.44	± 12.0 %
1950	53.3	1.52	4.67	4.67	4.67	0.80	2.35	± 12.0 %
2150	53.1	1.66	4.46	4.46	4.46	0.80	1.99	± 12.0 %
2450	52.7	1.95	4.08	4.08	4.08	0.68	1.24	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

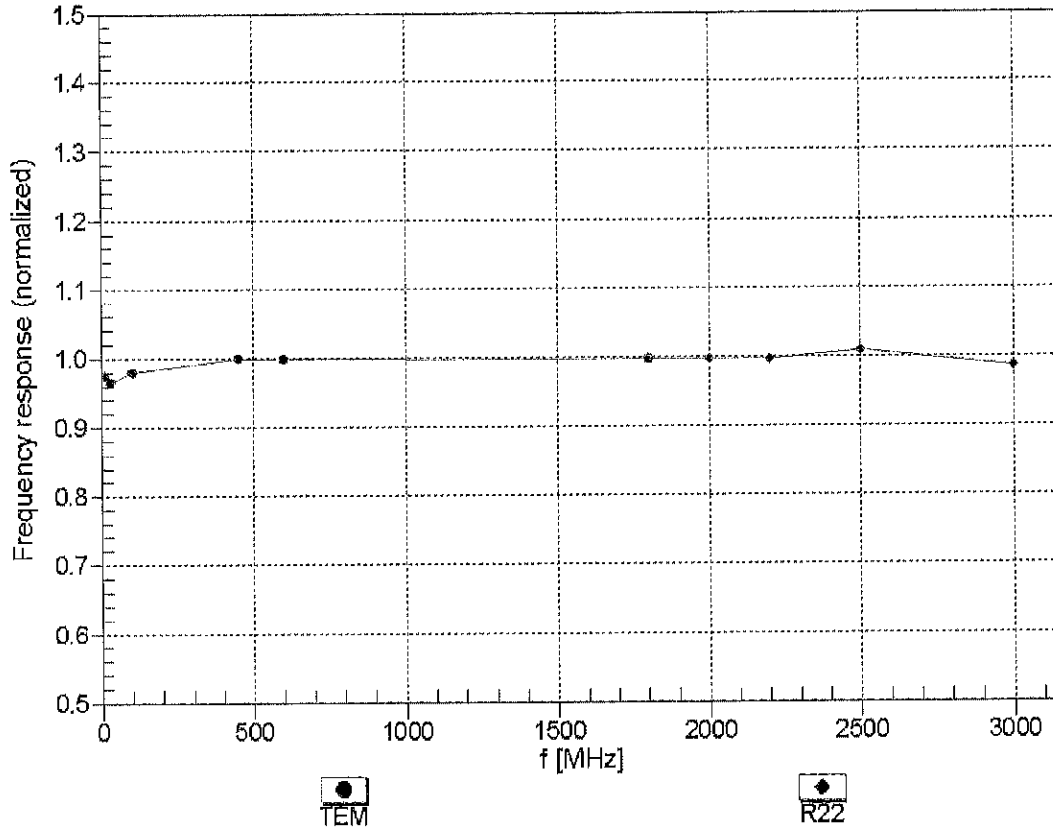



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM


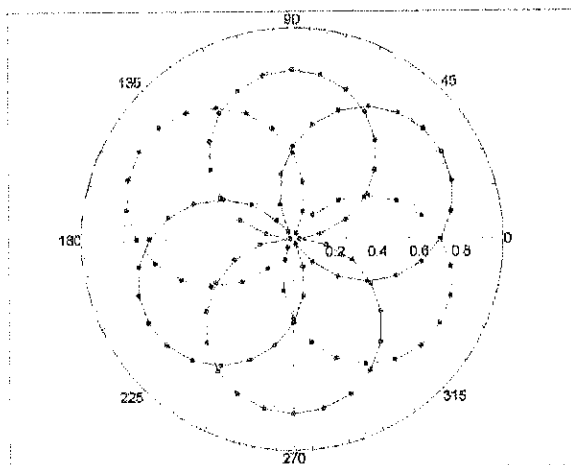


f=1800 MHz, R22

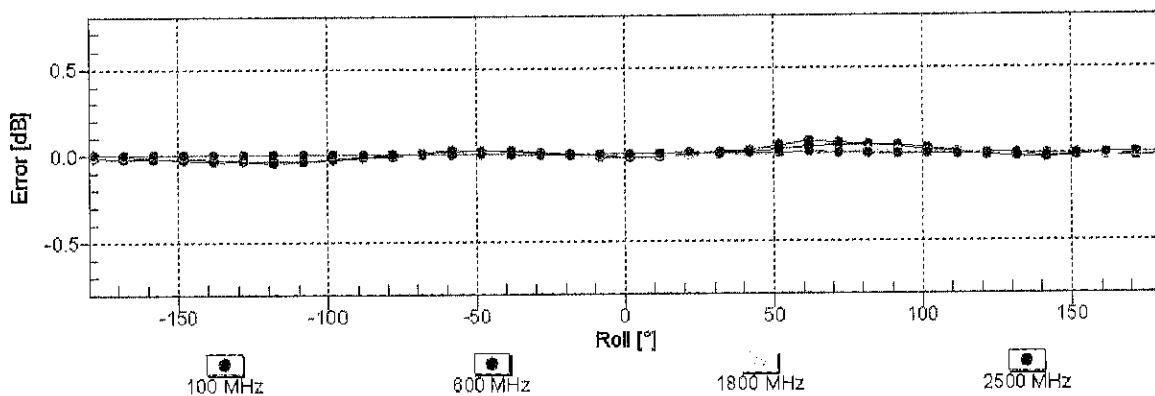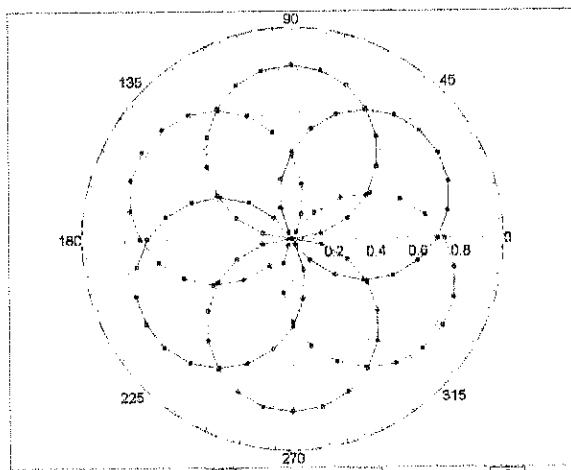


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{eval} = 1900$ MHz)

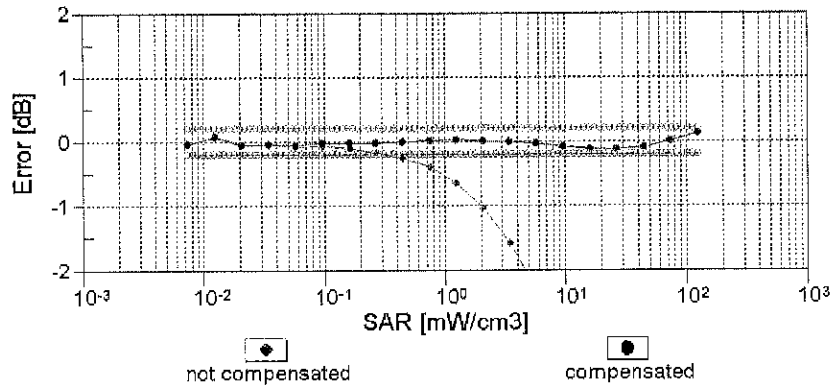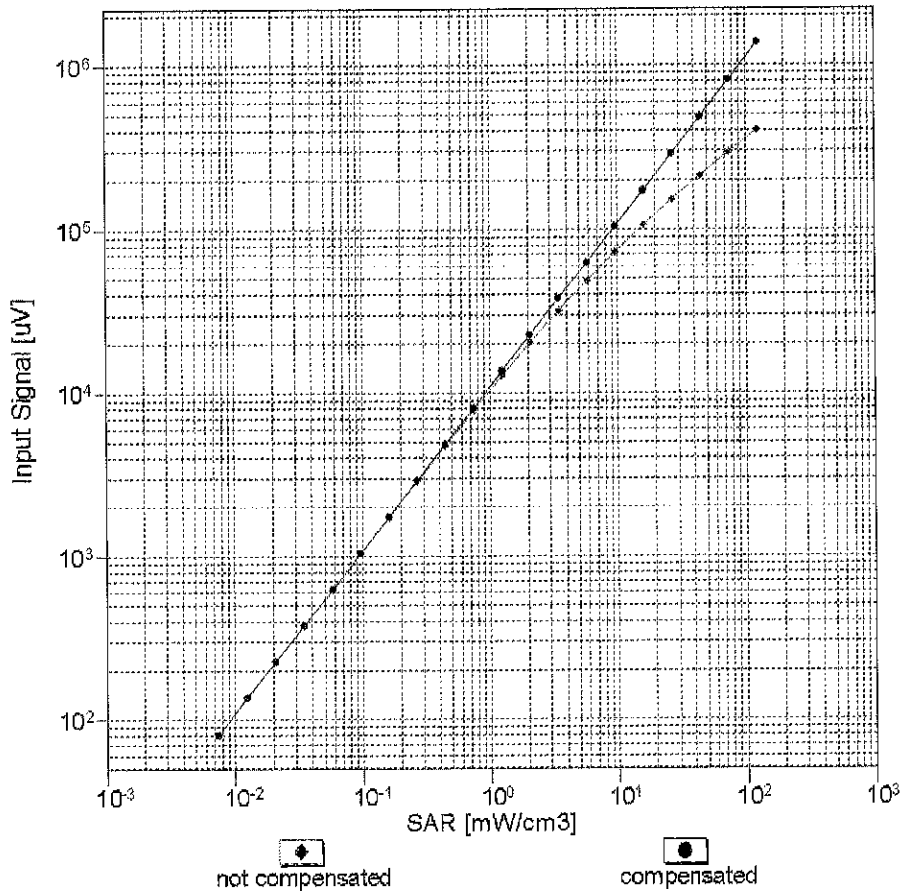


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

## Conversion Factor Assessment

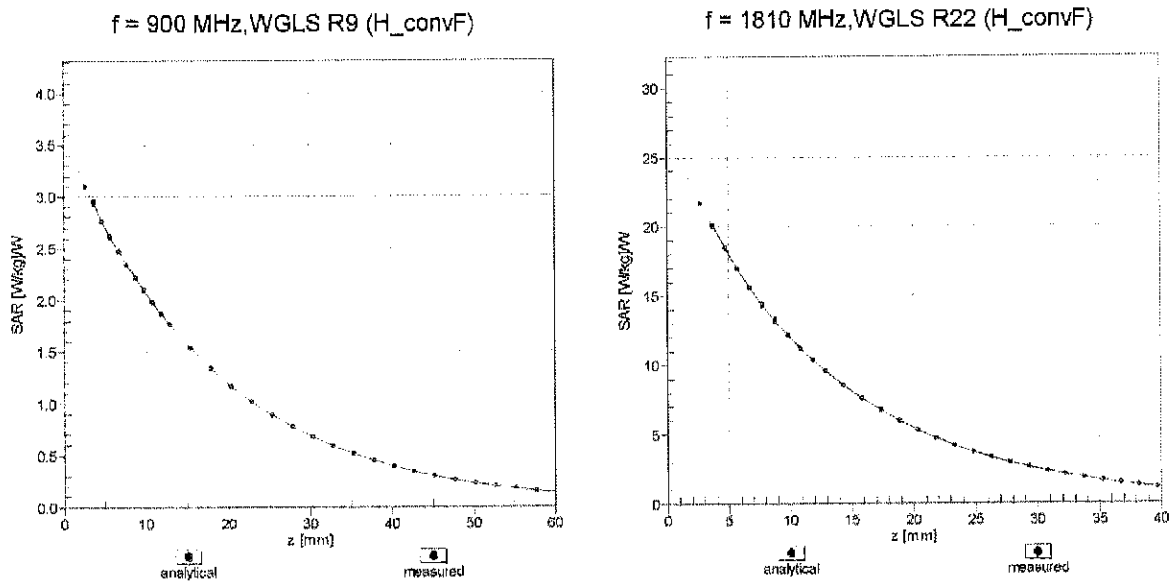

## Deviation from Isotropy in Liquid Error ( $\phi, \vartheta$ ), f = 900 MHz

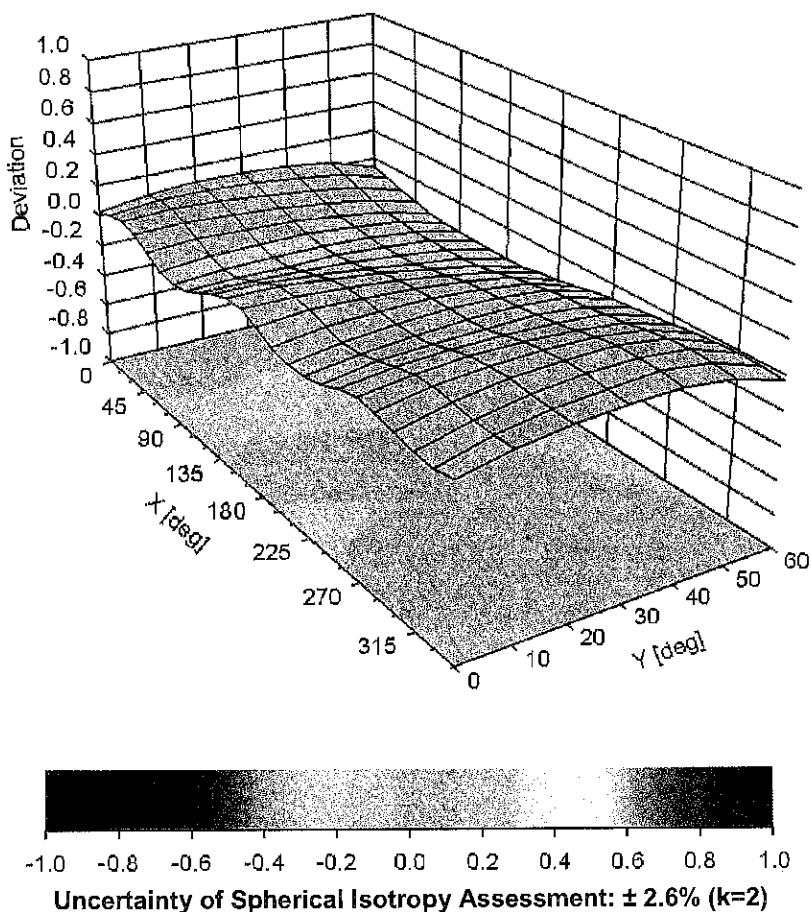



## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-108.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **DAE3-522\_Sep14**

## CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 522**

Calibration procedure(s) **QA CAL-06.v28  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **September 17, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	01-Oct-13 (No:13976)	Oct-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-14 (in house check)	In house check: Jan-15
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-14 (in house check)	In house check: Jan-15

Calibrated by:	Name Dominique Steffen	Function Technician	Signature 
Approved by:	Fin Bornholt	Deputy Technical Manager	

Issued: September 17, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.208 $\pm$ 0.02% (k=2)	403.882 $\pm$ 0.02% (k=2)	404.721 $\pm$ 0.02% (k=2)
Low Range	3.96428 $\pm$ 1.50% (k=2)	3.95728 $\pm$ 1.50% (k=2)	3.97367 $\pm$ 1.50% (k=2)

## Connector Angle

Connector Angle to be used in DASY system	56.5 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	------------------------------------

## Appendix (Additional assessments outside the scope of SCS108)

### 1. DC Voltage Linearity

High Range		Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X	+ Input	200036.59	-0.80	-0.00
Channel X	+ Input	20007.79	3.33	0.02
Channel X	- Input	-20000.37	5.45	-0.03
Channel Y	+ Input	200037.53	0.19	0.00
Channel Y	+ Input	20004.45	0.10	0.00
Channel Y	- Input	-20001.11	4.89	-0.02
Channel Z	+ Input	200039.93	2.29	0.00
Channel Z	+ Input	20002.07	-2.13	-0.01
Channel Z	- Input	-20005.14	0.85	-0.00

Low Range		Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X	+ Input	2000.68	-0.01	-0.00
Channel X	+ Input	200.76	0.21	0.11
Channel X	- Input	-198.84	0.67	-0.34
Channel Y	+ Input	2000.56	0.01	0.00
Channel Y	+ Input	200.46	-0.01	-0.00
Channel Y	- Input	-199.17	0.26	-0.13
Channel Z	+ Input	2000.50	0.01	0.00
Channel Z	+ Input	199.91	-0.66	-0.33
Channel Z	- Input	-201.19	-1.73	0.87

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	-3.99	-5.30
	- 200	7.38	5.55
Channel Y	200	0.38	-0.28
	- 200	-0.60	-0.29
Channel Z	200	15.86	15.99
	- 200	-17.84	-18.37

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	-1.68	-1.76
Channel Y	200	7.39	-	-1.38
Channel Z	200	6.24	5.61	-



#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15741	16854
Channel Y	15714	14825
Channel Z	16054	16288

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	1.56	0.18	2.94	0.60
Channel Y	0.07	-1.10	1.20	0.53
Channel Z	0.39	-0.91	1.96	0.57

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **D2450V2-722\_Sep12**

**CALIBRATION CERTIFICATE**

Object **D2450V2 - SN: 722**

Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **September 13, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.



Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Jeton Kastrati**      Name: **Jeton Kastrati**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Technical Manager

Signature

Issued: September 13, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	39.9 ± 6 %	1.84 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	13.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>52.5 mW / g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	6.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.5 mW / g ± 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	52.7	1.95 mho/m
<b>Measured Body TSL parameters</b>	(22.0 ± 0.2) °C	51.0 ± 6 %	2.01 mho/m ± 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	12.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>50.5 mW / g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	6.03 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>23.8 mW / g ± 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 $\Omega$ + 7.6 j $\Omega$
Return Loss	- 22.2 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.8 $\Omega$ + 8.4 j $\Omega$
Return Loss	- 21.3 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 16, 2002

## DASY5 Validation Report for Head TSL

Date: 13.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 722**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.84$  mho/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.454 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.064 mW/g

**SAR(1 g) = 13.2 mW/g; SAR(10 g) = 6.14 mW/g**

Maximum value of SAR (measured) = 16.6 W/kg

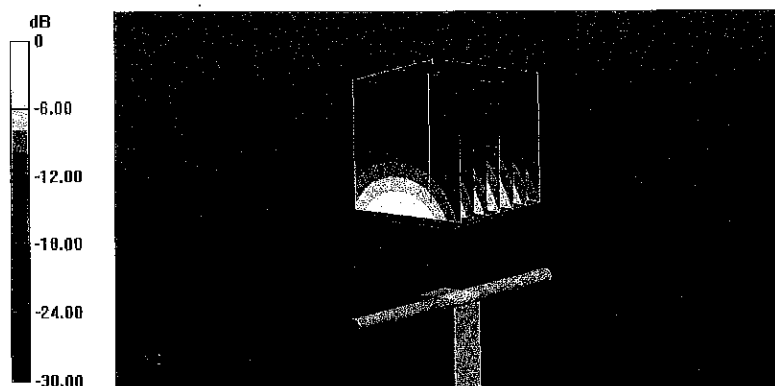

0 dB = 16.6 W/kg = 24.40 dB W/kg

# Impedance Measurement Plot for Head TSL


13 Sep 2012 10:23:45

CH1 S11 1 U FS

2: 52.344  $\Omega$  7.6426  $\Omega$  496.47  $\mu\text{H}$

2 450.000 000 MHz

\*  
De I  
Ca

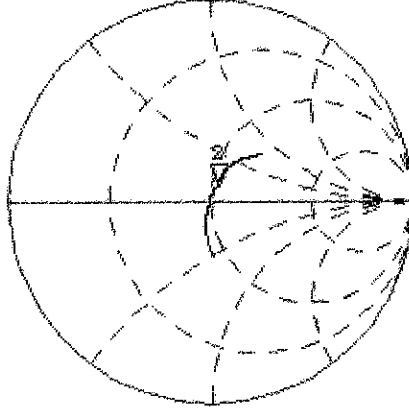

Avg  
16

H1 d

CH2 S11 LOG

5 dB/REF -20 dB


2: -22.162 dB

2 450.000 000 MHz

Ca

Avg  
16

H1 d

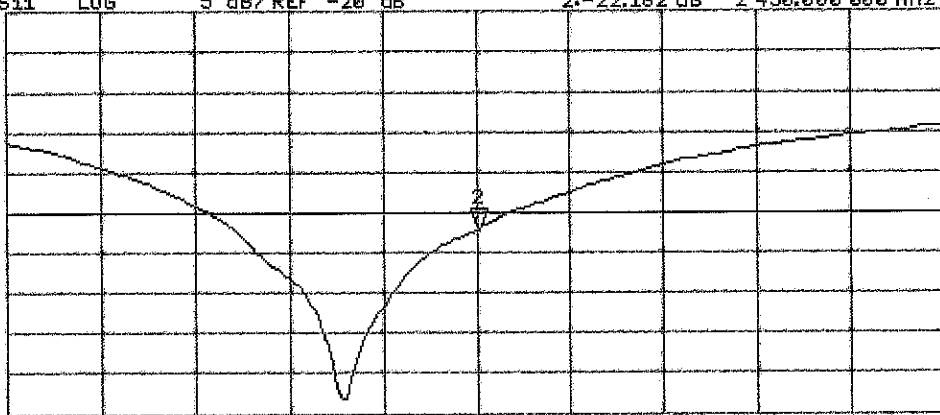

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

# DASY5 Validation Report for Body TSL

Date: 13.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 722**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 51$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.538 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.530 mW/g

**SAR(1 g) = 12.9 mW/g; SAR(10 g) = 6.03 mW/g**

Maximum value of SAR (measured) = 16.8 W/kg

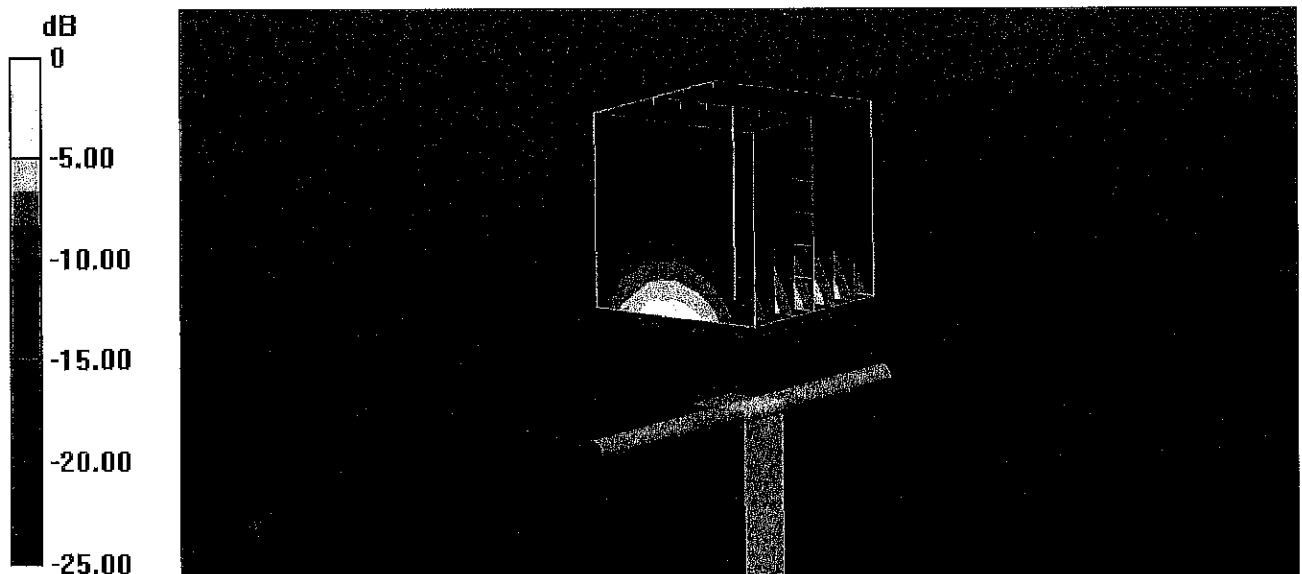

0 dB = 16.8 W/kg = 24.51 dB W/kg

# Impedance Measurement Plot for Body TSL

13 Sep 2012 10:23:18

CH1 S11 1 U FS

2: 48.768  $\Omega$  8.4238  $\Omega$  547.22 pF

2 450.000 000 MHz


\*

De1

CA

Avg  
16

H1 d

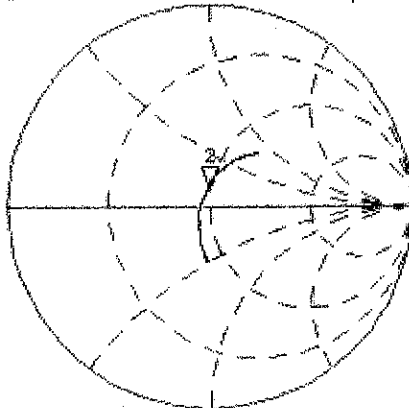

CH2 S11

LOG

5 dB/REF -20 dB


2: -21.323 dB

2 450.000 000 MHz

CA

Avg  
16

H1 d

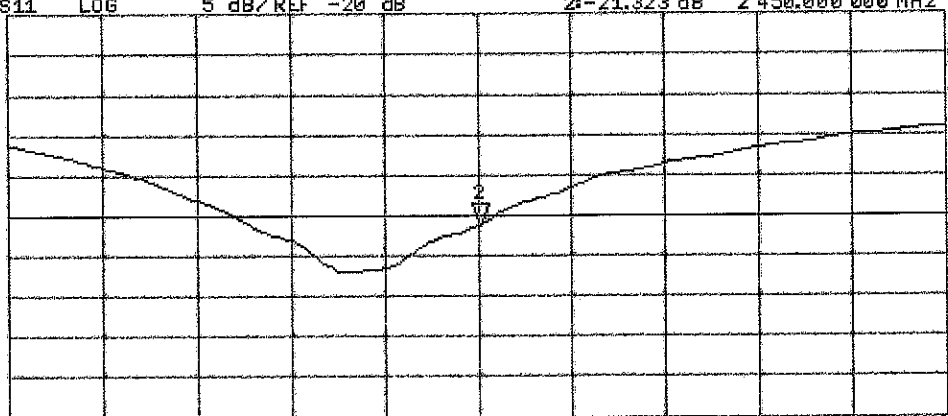

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **D900V2-164\_Sep12**

## CALIBRATION CERTIFICATE

Object **D900V2 - SN: 164**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **September 24, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Israe El-Naouq**      Name: **Israe El-Naouq**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature

*Israe El-Naouq*

*Katja Pokovic*

Issued: September 24, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.5	0.97 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.3 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.64 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>10.6 mW / g <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>6.81 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	55.0	1.05 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	52.7 $\pm$ 6 %	1.06 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	2.76 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>10.9 mW / g <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	1.77 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>7.00 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 $\Omega$ - 8.0 j $\Omega$
Return Loss	- 22.0 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.3 $\Omega$ - 8.5 j $\Omega$
Return Loss	- 20.3 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.407 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 16, 2002

# DASY5 Validation Report for Head TSL

Date: 24.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 164**

Communication System: CW; Frequency: 900 MHz

Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.96$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.279 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.960 mW/g

**SAR(1 g) = 2.64 mW/g; SAR(10 g) = 1.7 mW/g**

Maximum value of SAR (measured) = 3.07 W/kg

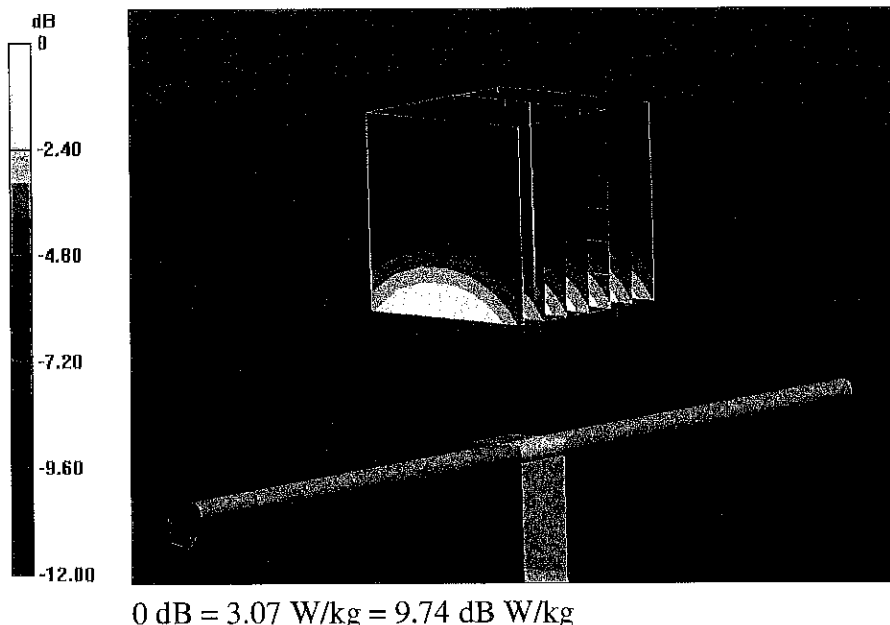

# Impedance Measurement Plot for Head TSL


24 Sep 2012 12:00:04

CH1 S11 1 U FS

1: 49.781  $\Omega$  -7.9766  $\Omega$  22.170 pF

900.000 000 MHz

\*  
De1  
Cor

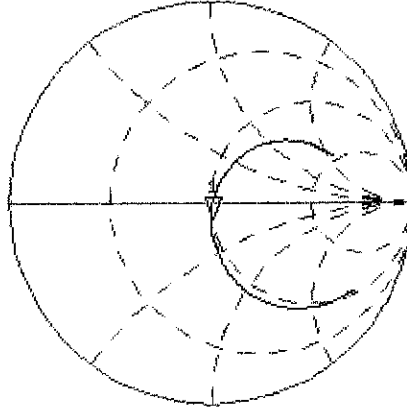

Avg  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-21.965 dB 900.000 000 MHz

Cor

Avg  
16

H1d

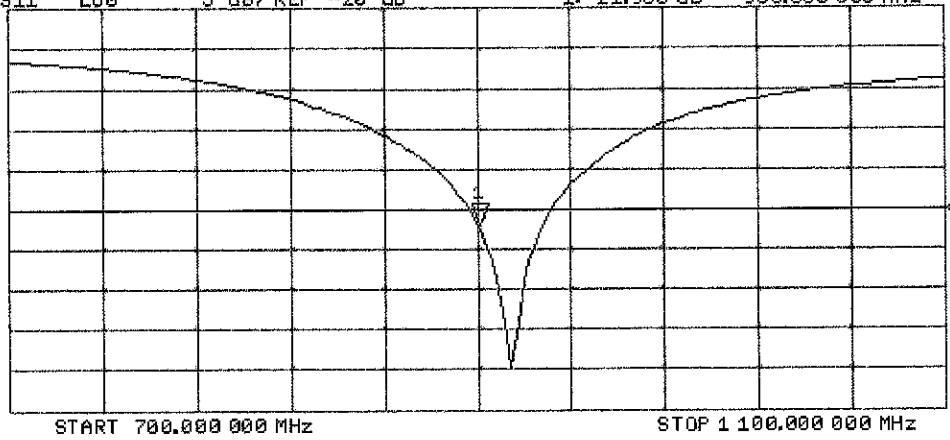

# DASY5 Validation Report for Body TSL

Date: 24.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 164**

Communication System: CW; Frequency: 900 MHz

Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.06$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.94, 5.94, 5.94); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.279 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.229 mW/g

**SAR(1 g) = 2.76 mW/g; SAR(10 g) = 1.77 mW/g**

Maximum value of SAR (measured) = 3.21 W/kg

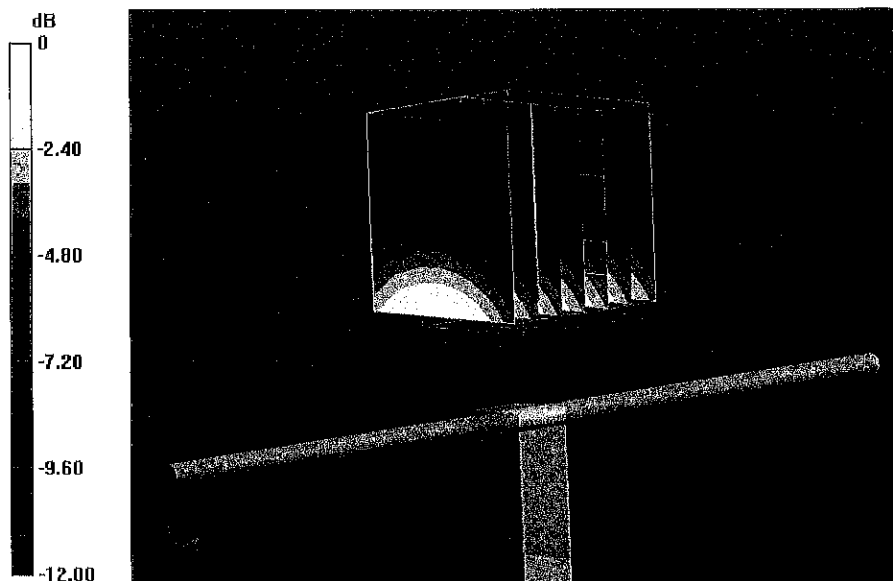

0 dB = 3.21 W/kg = 10.13 dB W/kg

# Impedance Measurement Plot for Body TSL


24 Sep 2012 09:44:42

CH1 S11 1 U F8

1: 46.316  $\Omega$  -8.5449  $\Omega$  20.695 pF

900.000 000 MHz

\*  
De1  
Cor

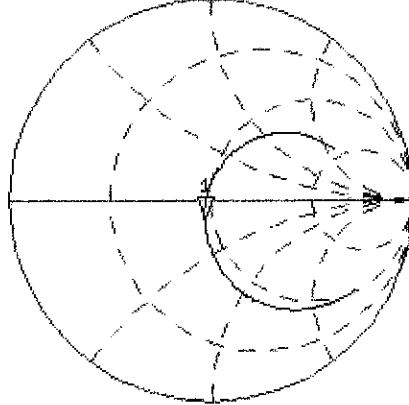

Avg  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.335 dB 900.000 000 MHz

Cor

Avg  
16

H1d

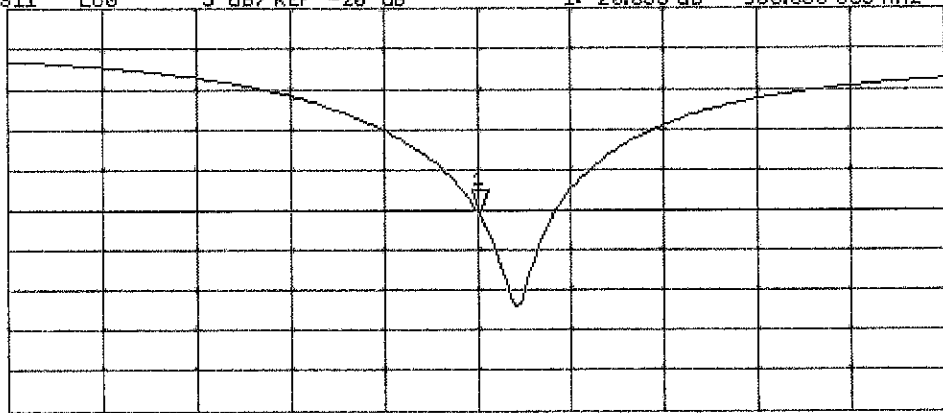

START 700.000 000 MHz

STOP 1.100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **D1900V2-5d025\_Sep12**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d025**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **September 21, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name <b>Israe El-Naouq</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function Technical Manager	

Issued: September 21, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.6 $\pm$ 6 %	1.37 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	9.78 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>39.8 mW / g <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.17 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>20.9 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	53.3	1.52 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	52.5 $\pm$ 6 %	1.54 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	10.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>40.3 mW / g <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	5.42 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>21.5 mW / g <math>\pm</math> 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 $\Omega$ + 4.7 j $\Omega$
Return Loss	- 26.5 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 $\Omega$ + 5.1 j $\Omega$
Return Loss	- 24.6 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 29, 2002

# DASY5 Validation Report for Head TSL

Date: 21.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d025**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.699 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.364 mW/g

**SAR(1 g) = 9.78 mW/g; SAR(10 g) = 5.17 mW/g**

Maximum value of SAR (measured) = 11.9 W/kg

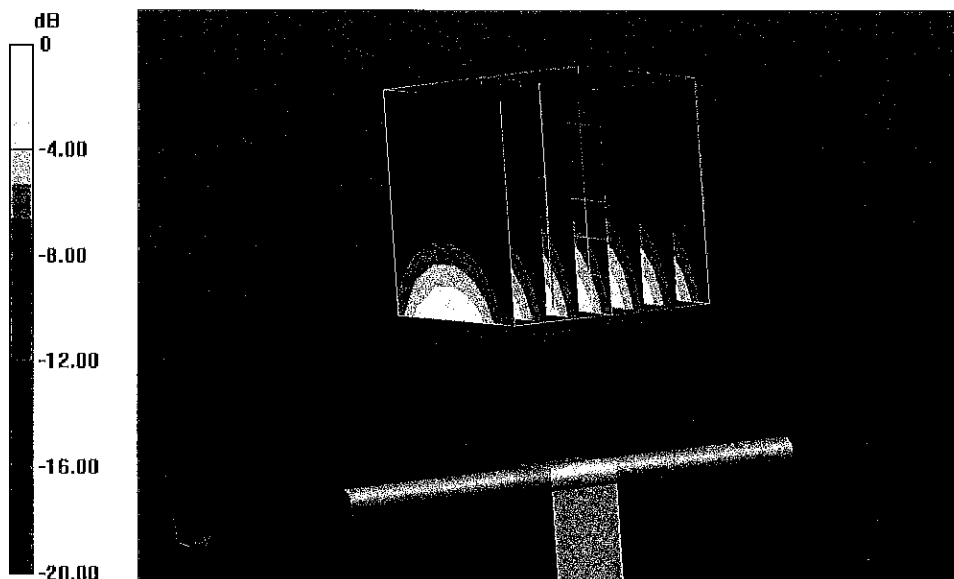


0 dB = 11.9 W/kg = 21.51 dB W/kg

# Impedance Measurement Plot for Head TSL

21 Sep 2012 11:55:45

CH1 S11 1 U FS 1: 50.971  $\Omega$  4.6563  $\Omega$  390.03  $\mu$ H 1 900.000 000 MHz

\*  
De1  
Cor

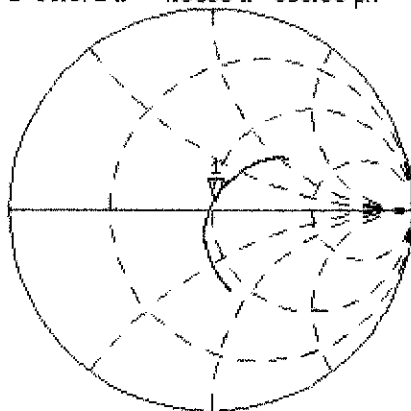

Avg  
15


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1:-26.543 dB 1 900.000 000 MHz

Cor

Avg  
15

H1 d

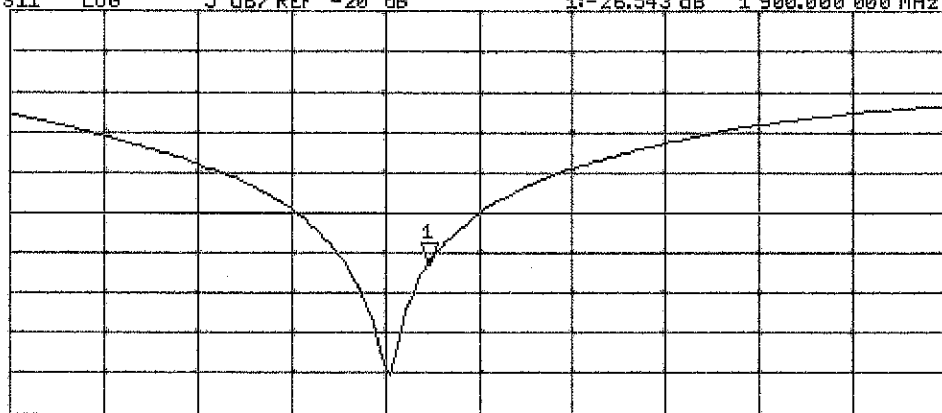

START 1 700.000 000 MHz

STOP 2 150.000 000 MHz

# DASY5 Validation Report for Body TSL

Date: 21.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d025**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.699 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.830 mW/g

**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.42 mW/g**

Maximum value of SAR (measured) = 12.8 W/kg

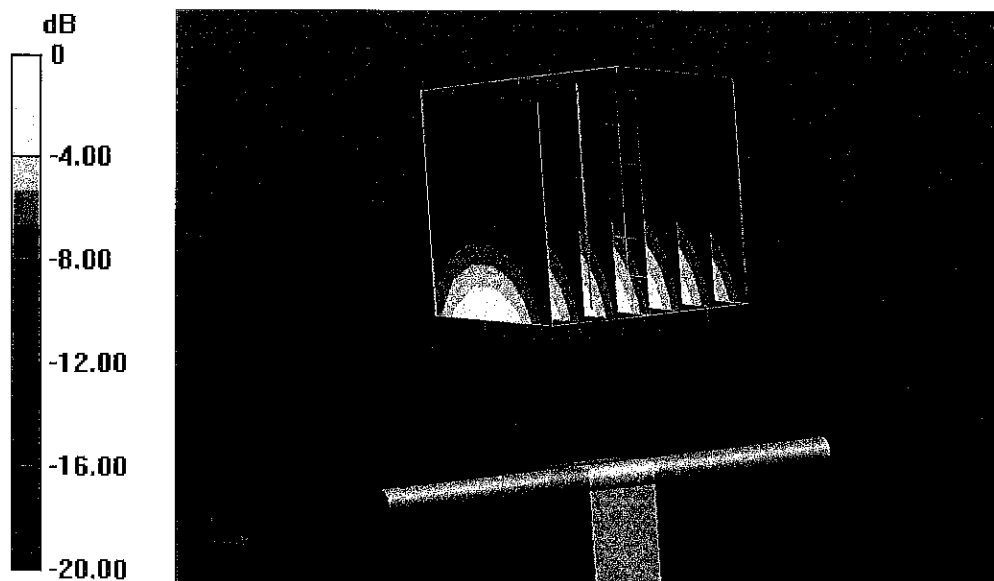


0 dB = 12.8 W/kg = 22.14 dB W/kg

# Impedance Measurement Plot for Body TSL

21 Sep 2012 11:55:20

CH1 S11 1 U FS 1: 47.297  $\Omega$  5.0664  $\Omega$  424.39  $\mu\text{H}$  1 900.000 000 MHz

\*  
De1  
Cor

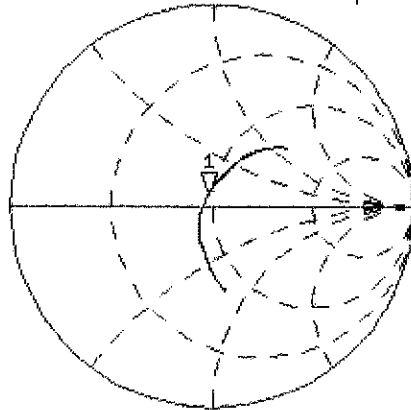

Avg  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-24.587 dB 1 900.000 000 MHz

Cor

Avg  
16

H1d

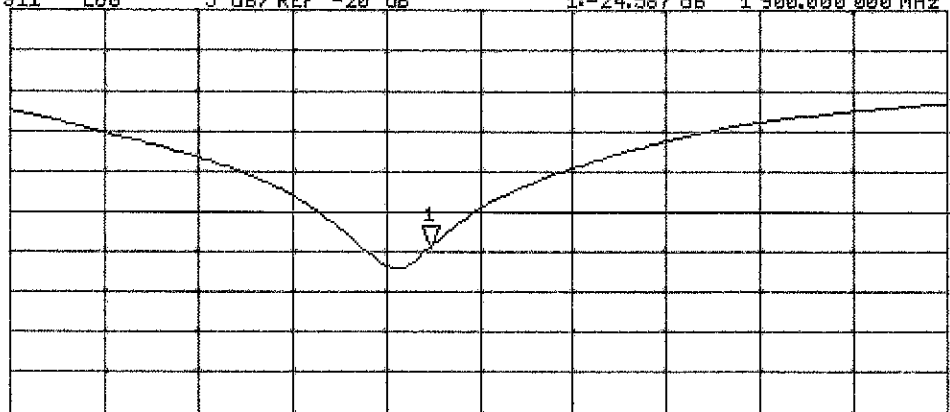

START 1 700.000 000 MHz

STOP 2 150.000 000 MHz

**ANNEX A System Validation Reports**

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - ELI Phantom - ET3DV6 - MSL - 900 MHz**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.104$  S/m;  $\epsilon_r = 52.914$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.09 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.201 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 4.17 W/kg  
**SAR(1 g) = 2.9 W/kg; SAR(10 g) = 1.89 W/kg**  
Maximum value of SAR (measured) = 3.17 W/kg

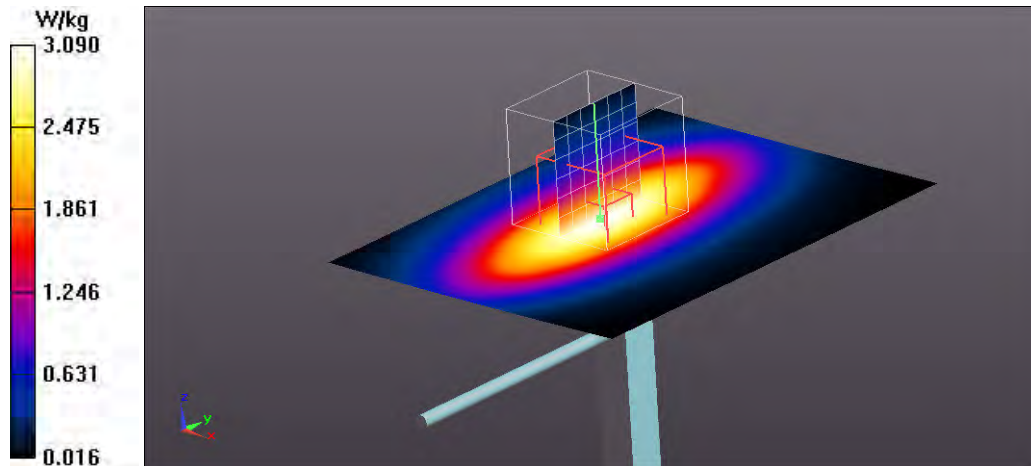



**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - ELI Phantom - ET3DV6 - MSL - 900 MHz\_21\_11\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.104$  S/m;  $\epsilon_r = 52.914$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.17 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 56.187 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 4.18 W/kg  
**SAR(1 g) = 2.94 W/kg; SAR(10 g) = 1.93 W/kg**  
Maximum value of SAR (measured) = 3.19 W/kg

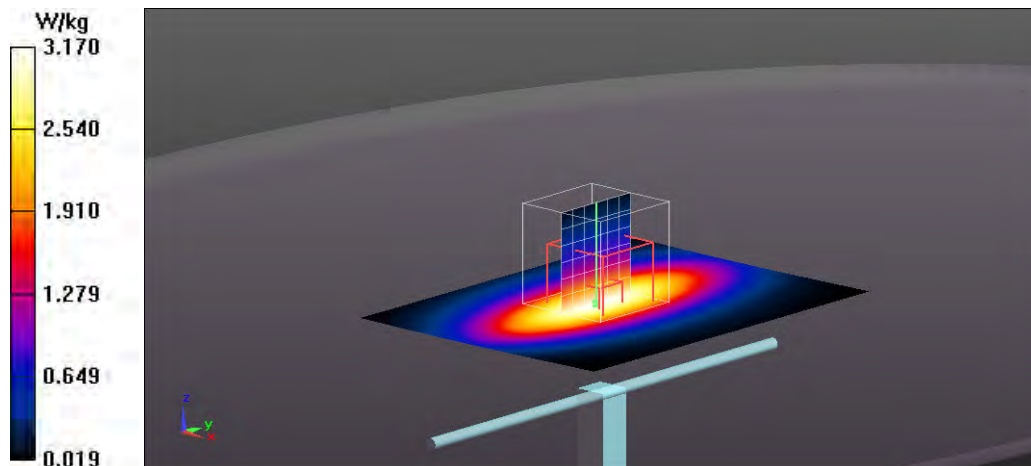

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - MSL - 1900 MHz\_17\_11\_2014**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: Muscle 1900 MHz Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.503$  S/m;  $\epsilon_r = 50.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.63, 4.63, 4.63); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 11.9 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 91.006 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 15.3 W/kg  
**SAR(1 g) = 9.45 W/kg; SAR(10 g) = 5.08 W/kg**  
Maximum value of SAR (measured) = 10.8 W/kg

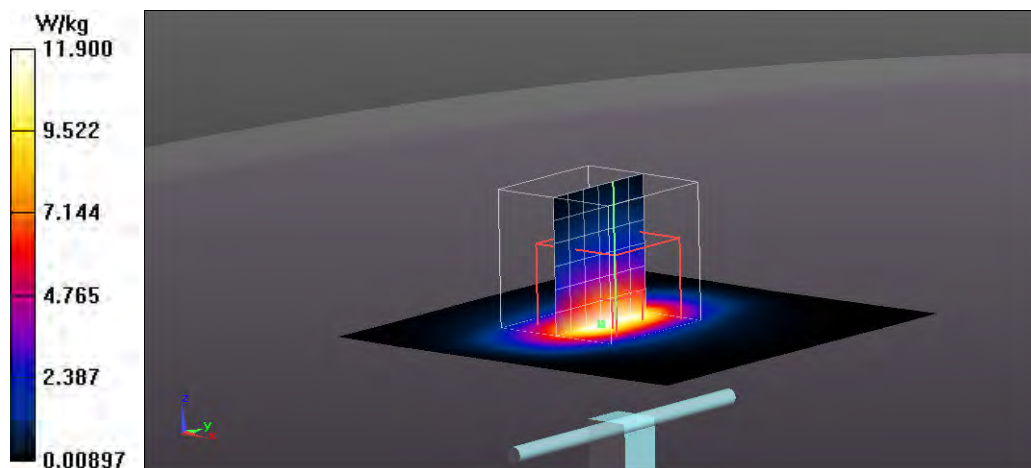

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - MSL - 2450 MHz\_11\_11\_2014**

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 2.004$  S/m;  $\epsilon_r = 50.246$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.08, 4.08, 4.08); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 17.9 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 90.963 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 39.9 W/kg  
**SAR(1 g) = 15.40 W/kg; SAR(10 g) = 6.55 W/kg**  
Maximum value of SAR (measured) = 17.5 W/kg

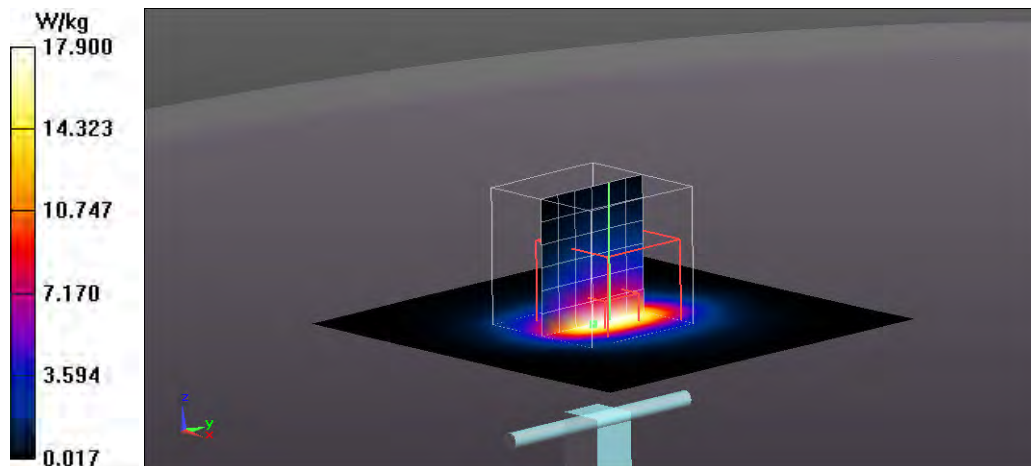

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - MSL - 2450 MHz\_12\_11\_2014**

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 2.004$  S/m;  $\epsilon_r = 50.246$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.08, 4.08, 4.08); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 17.9 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 92.725 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 41.2 W/kg  
**SAR(1 g) = 14.09 W/kg; SAR(10 g) = 6.32 W/kg**  
Maximum value of SAR (measured) = 17.5 W/kg

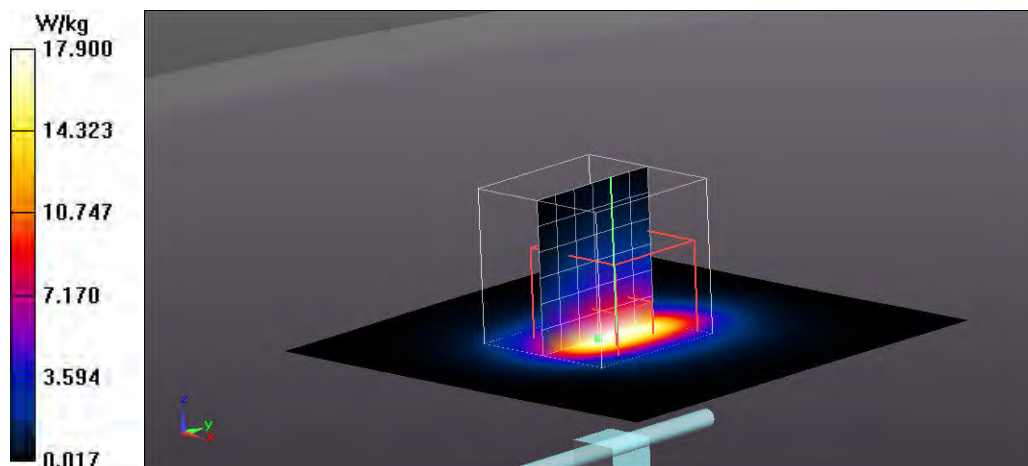

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - MSL - 1900 MHz\_14\_11\_2014**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: Muscle 1900 MHz Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.503$  S/m;  $\epsilon_r = 50.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.63, 4.63, 4.63); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 12.4 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 91.532 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 15.3 W/kg  
**SAR(1 g) = 9.66 W/kg; SAR(10 g) = 5.3 W/kg**  
Maximum value of SAR (measured) = 10.9 W/kg

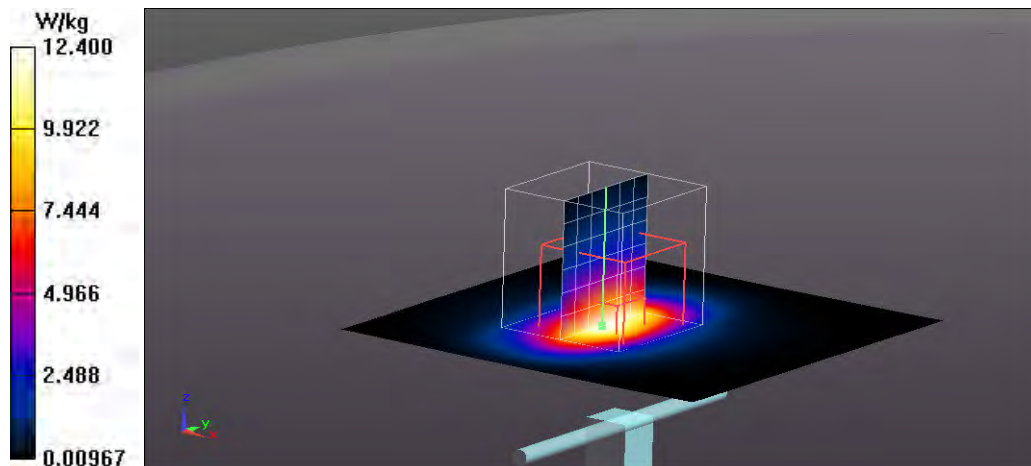

Test Laboratory: Eurofins Product Service GmbH

### System Performance Check - MSL - 1900 MHz\_24\_04\_2015

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 50.516$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.63, 4.63, 4.63); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- DASYS2 52.8.6(1115); SEMCAD X 14.6.9(7117)

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm

**(ET-Probe)/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 11.8 W/kg

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm


**(ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 91.05 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 15.3 W/kg

**SAR(1 g) = 9.44 W/kg; SAR(10 g) = 5.05 W/kg**

Maximum value of SAR (measured) = 10.9 W/kg

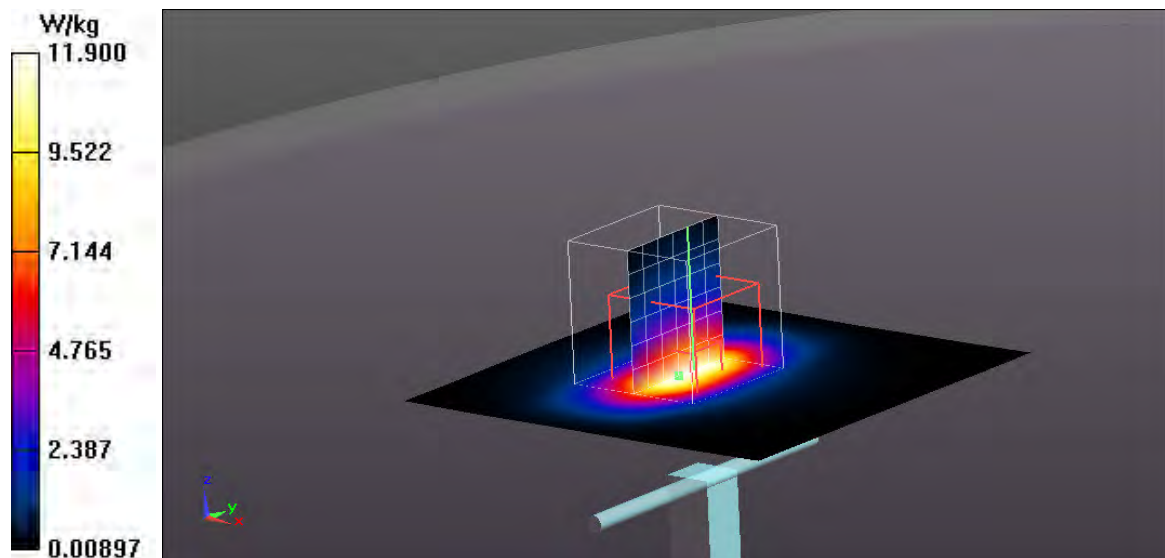



Test Laboratory: Eurofins Product Service GmbH

### System Performance Check - ELI Phantom - ET3DV6 - MSL - 900 MHz\_24\_04\_2015

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz

Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.103$  S/m;  $\epsilon_r = 52.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- DASYS 52.8.6(1115); SEMCAD X 14.6.9(7117)

#### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm

**(ET-Probe)/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 3.08 W/kg

#### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm


**(ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 54.20 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.16 W/kg

**SAR(1 g) = 3.0 W/kg; SAR(10 g) = 1.88 W/kg**

Maximum value of SAR (measured) = 3.15 W/kg

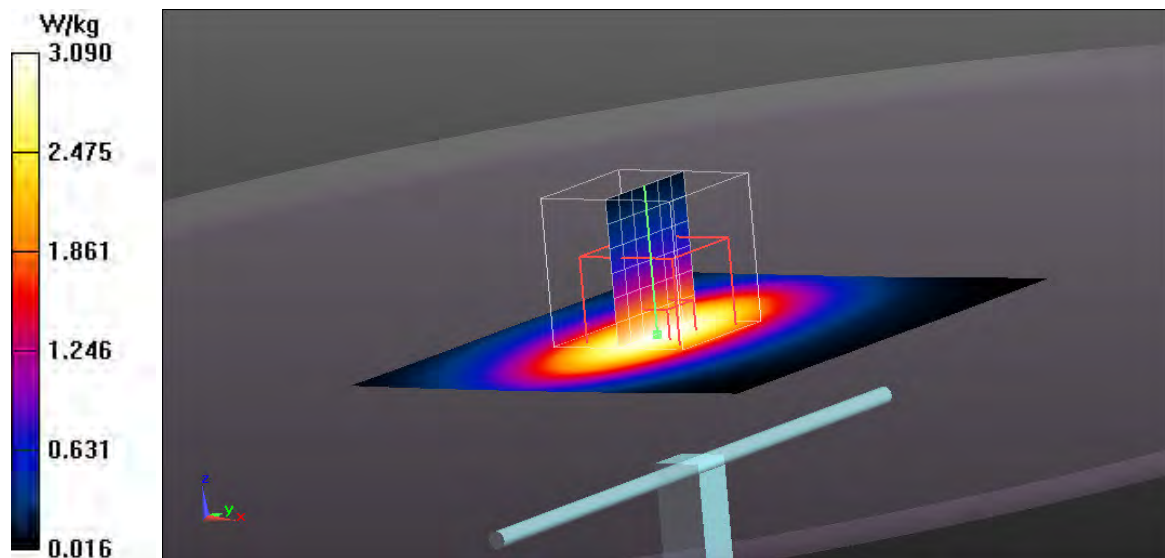

Test Laboratory: Eurofins Product Service GmbH

### System Performance Check - MSL - 2450 MHz\_24\_04\_2015

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.997$  S/m;  $\epsilon_r = 50.25$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.08, 4.08, 4.08); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- DASYS2 52.8.6(1115); SEMCAD X 14.6.9(7117)

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm

**(ET-Probe)/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 17.8 W/kg

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm


**(ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 92.735 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 41.0 W/kg

**SAR(1 g) = 14.12 W/kg; SAR(10 g) = 6.23 W/kg**

Maximum value of SAR (measured) = 17.6 W/kg

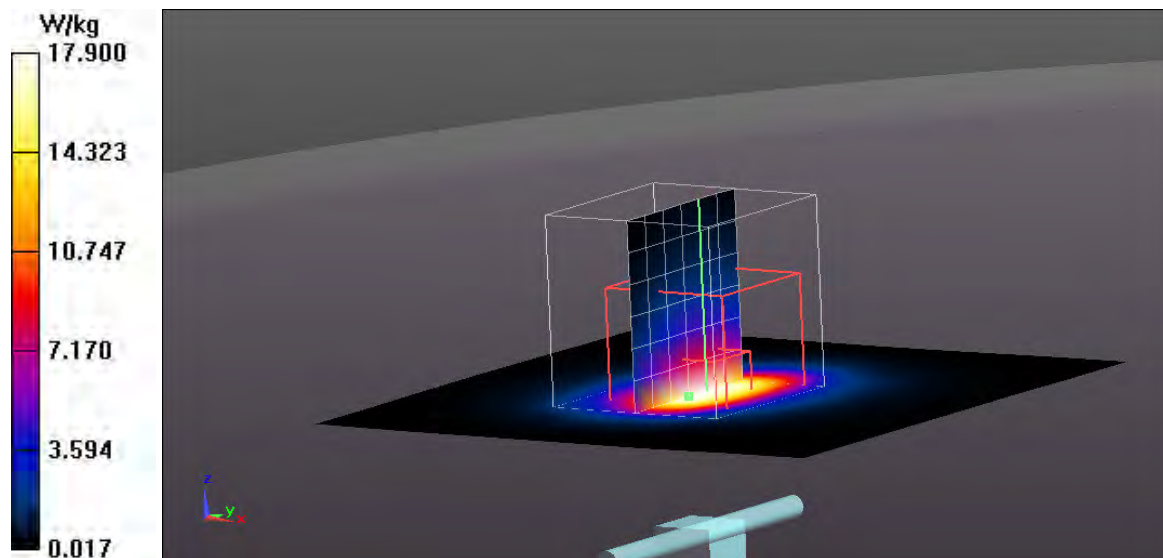



**ANNEX B SAR Measurement Reports**

**Test Laboratory: Eurofins Product Service GmbH**

**CDMA BC0 Ch1013 SO55 3\_3 flat front 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 824.7$  MHz;  $\sigma = 1.022$  S/m;  $\epsilon_r = 53.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Front 0mm/Area Scan (131x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.786 W/kg

**Configuration/Flat Front 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 27.573 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.998 W/kg  
**SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.532 W/kg**  
Maximum value of SAR (measured) = 0.807 W/kg

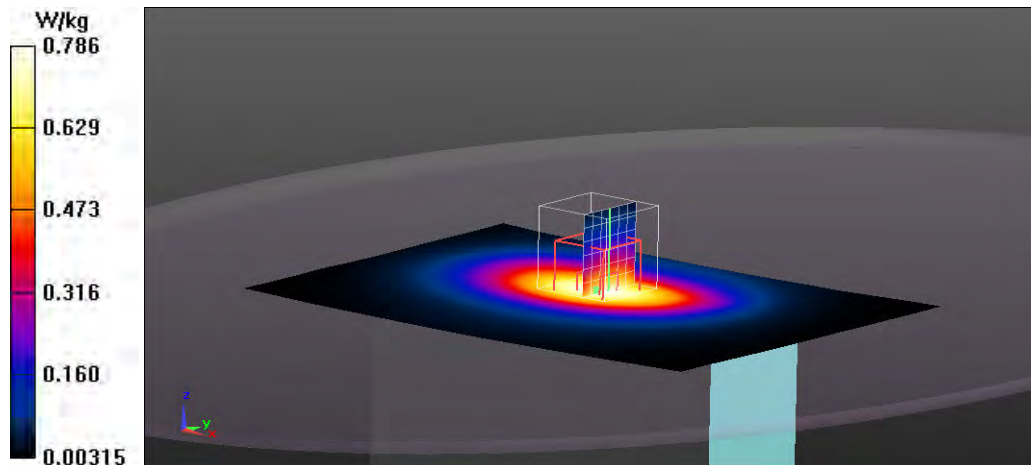

**Test Laboratory: Eurofins Product Service GmbH**

**CDMA BC10 Ch580 SO55 3\_3 flat front 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, CDMA2000; Frequency: 820.5 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 820.5$  MHz;  $\sigma = 1.018$  S/m;  $\epsilon_r = 53.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Front 0mm/Area Scan (131x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.933 W/kg

**Configuration/Flat Front 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 29.972 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 1.16 W/kg  
**SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.610 W/kg**  
Maximum value of SAR (measured) = 0.930 W/kg

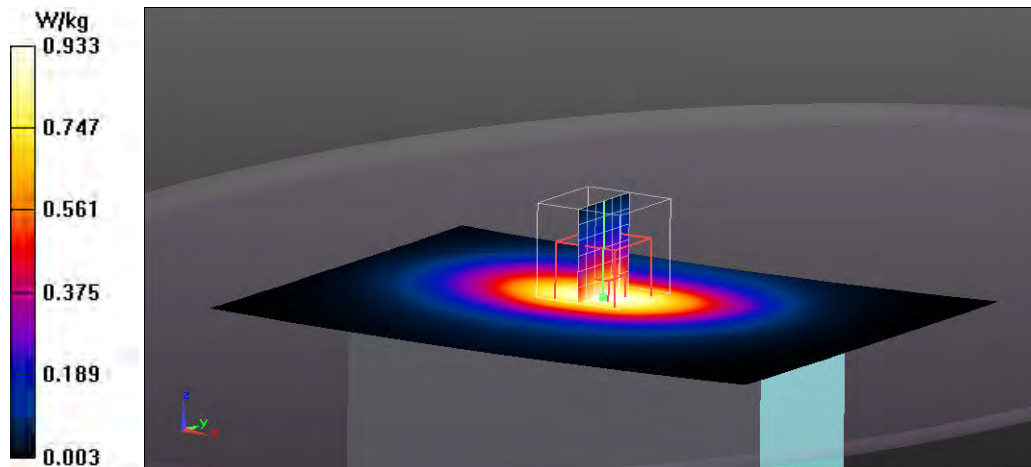

**Test Laboratory: Eurofins Product Service GmbH**

**CDMA BC1Ch 25 RC3\_3 SO55 flat front 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:2.88403

Medium: Muscle 1900 MHz Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.454$  S/m;  $\epsilon_r = 50.639$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.63, 4.63, 4.63); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat front 0mm/Area Scan (131x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.715 W/kg


**Configuration/Flat front 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.152 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.868 W/kg

**SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.362 W/kg**

Maximum value of SAR (measured) = 0.657 W/kg

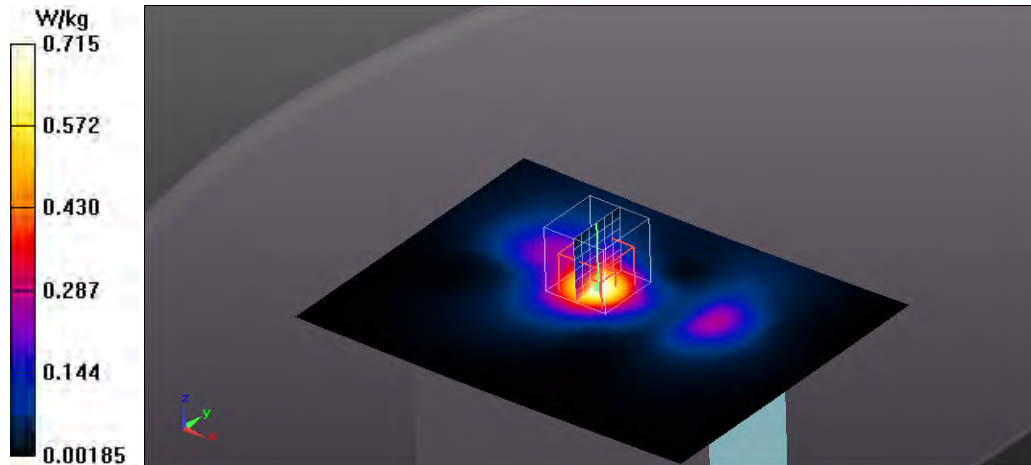

**Test Laboratory: Eurofins Product Service GmbH**

**GPRS 1900 Ch810 4xslot flat top 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, GPRS 1900 4xSlot; Frequency: 1909.8 MHz; Duty Cycle: 1:2.18776  
Medium: Muscle 1900 MHz Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 50.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.63, 4.63, 4.63); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Top 0mm/Area Scan (131x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.539 W/kg

**Configuration/Flat Top 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.099 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.665 W/kg  
**SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.308 W/kg**  
Maximum value of SAR (measured) = 0.544 W/kg

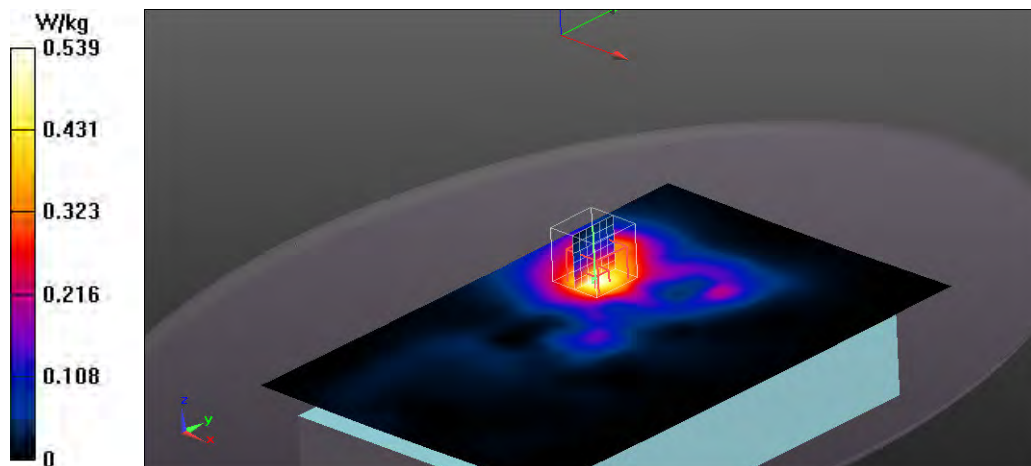

**Test Laboratory: Eurofins Product Service GmbH**

**GPRS 850 Ch128 3xslot flat front 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, GPRS 850 3xSlot; Frequency: 824.2 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 1.021$  S/m;  $\epsilon_r = 53.835$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Front 0mm/Area Scan (131x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.58 W/kg

**Configuration/Flat Front 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 27.620 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 2.38 W/kg  
**SAR(1 g) = 1.41 W/kg; SAR(10 g) = 1.06 W/kg**  
Maximum value of SAR (measured) = 1.57 W/kg

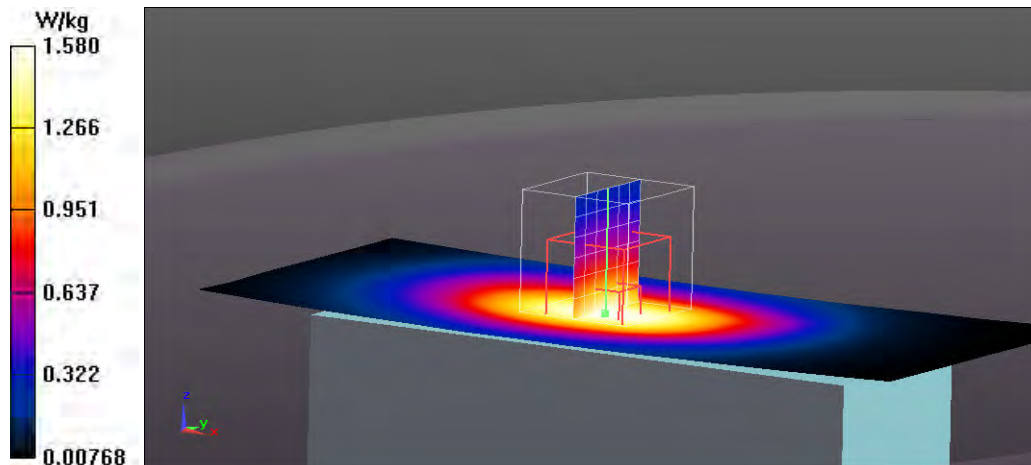

**Test Laboratory: Eurofins Product Service GmbH**

**UMTS FDD V Ch4132 RMC 12.2kbps flat bottom 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, UMTS FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:2.18776  
Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 1.024$  S/m;  $\epsilon_r = 53.812$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.05, 6.05, 6.05); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Bottom 0mm/Area Scan (131x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.629 W/kg

**Configuration/Flat Bottom 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.871 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 0.767 W/kg  
**SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.442 W/kg**  
Maximum value of SAR (measured) = 0.635 W/kg

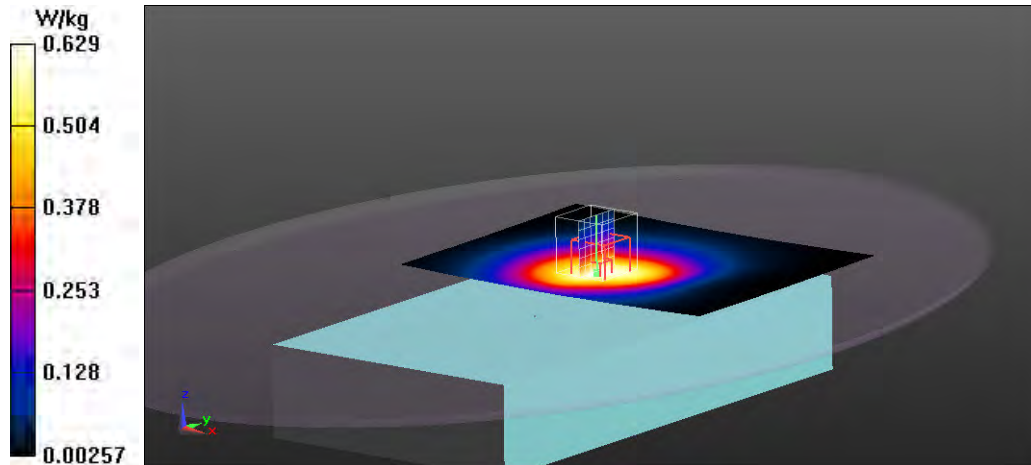

**Test Laboratory: Eurofins Product Service GmbH**

**UMTS FDDII Ch9262 RMC 144kbps flat bottom 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, UMTS FDD II; Frequency: 1852.4 MHz; Duty Cycle: 1:2.18776  
Medium: Muscle 1900 MHz Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 50.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.63, 4.63, 4.63); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Bottom 0mm/Area Scan (131x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.645 W/kg

**Configuration/Flat Bottom 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.706 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.875 W/kg  
**SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.380 W/kg**  
Maximum value of SAR (measured) = 0.642 W/kg

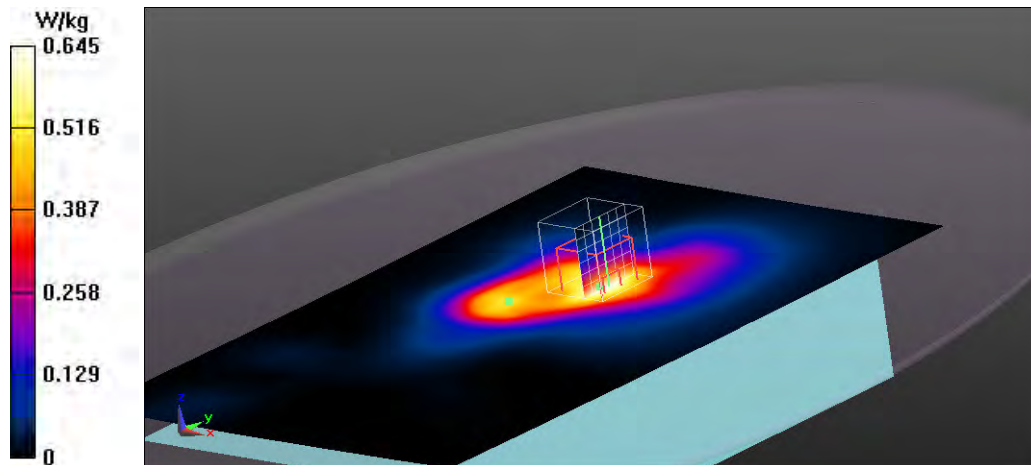



**Test Laboratory: Eurofins Product Service GmbH**

**WLAN 2\_4 GHz Ch. 11 1Mbps flat top 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1Mbps); Frequency: 2462 MHz; Duty Cycle: 1:1.53815

Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 2.023$  S/m;  $\epsilon_r = 50.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.08, 4.08, 4.08); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Top 0mm/Area Scan (131x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.239 W/kg

**Configuration/Flat Top 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.202 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.513 W/kg  
**SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.117 W/kg**  
Maximum value of SAR (measured) = 0.234 W/kg

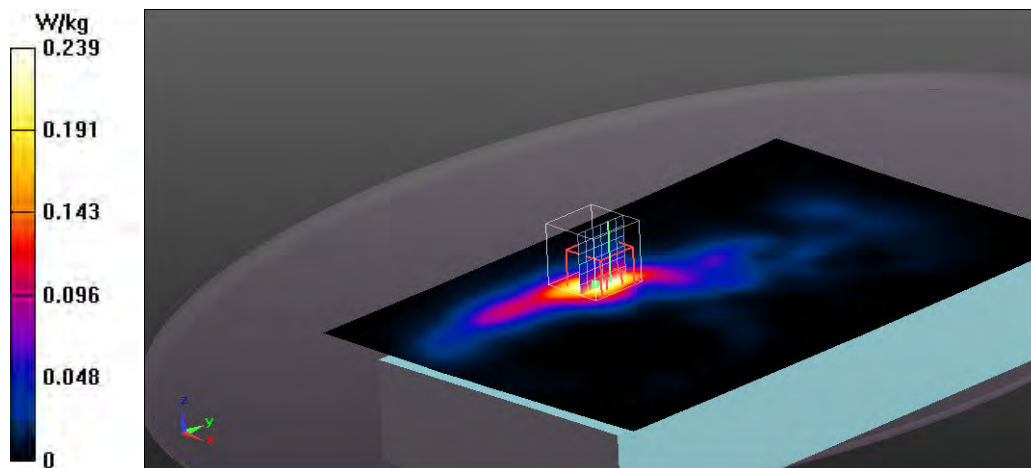

**Test Laboratory: Eurofins Product Service GmbH**

**Bluetooth LR Ch. 0 DH5 flat bottom 0mm**

**DUT: Feld-Controller; Type: Bellatrix-Full Disto + ME / Basic; Serial: -**

Communication System: UID 0 - n/a, BT 2.4GHz DH5; Frequency: 2402 MHz; Duty Cycle: 1:1.38388  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 50.396$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.08, 4.08, 4.08); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/Flat Bottom 0mm/Area Scan (131x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0494 W/kg

**Configuration/Flat Bottom 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 0.647 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.126 W/kg  
**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.021 W/kg**  
Maximum value of SAR (measured) = 0.0518 W/kg

