



<b>RADIO REPORT</b> <b>FCC 47 CFR Part 15C</b> <b>ISED Canada RSS-247</b> <b>Frequency hopping systems operating within the 2400 – 2483.5 MHz band</b>	
<b>Report Reference No</b>	G0M-1812-7888-TFC247BT1-V03
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
<b>Address</b>	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b>	 <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 ISED Testing Laboratory site: 3470A-2</p>
<b>Applicant</b>	Leica Geosystems AG
<b>Address</b>	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
<b>Test Specification</b>	According to FCC/ISED rules
<b>Standard</b>	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, 2018-04
<b>Non-Standard Test Method</b>	None
<b>Equipment under Test (EUT):</b>	
<b>Product Description</b>	Field Controller Win EC7
<b>Model(s)</b>	CS20 LTE Disto (US, CA)
<b>Additional Model(s)</b>	None
<b>Brand Name(s)</b>	Leica Geosystems
<b>Hardware Version(s)</b>	V1.0
<b>Software Version(s)</b>	V4.97
<b>FCC-ID</b>	RFD-CSNGG
<b>IC</b>	3177A-CSNGG
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2019-01-07	
<b>Report:</b>		
Compiled by	Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	 .....
Approved by (+ signature) (Head of Lab)	Christian Weber	 .....
Date of Issue	2019-07-16	
Total number of pages	77	
<b>General Remarks:</b>		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		
<p>The EUT can operate with different power requirements. (120V AC/DC adaptor and 11.1V DC Li- battery)</p> <p>Test mode selection is based on comparative tests. The 120V AC power port was selected for compliance tests.</p>		

**ADDITIONAL VARIANTS**

Additional Variants (not tested and not evaluated variants)		
Not-tested Variant	Description	
1	Product Type Description	Field Controller Win EC7
	Model name	CS20 LTE (US, CA)
	Brand name	Geosystems
	Hardware Version	V1.00
	Software Version	V4.97
Comment: Those named additional variants above have not been tested. Those additional variants of the series have been declared by the manufacturer. The test report explicitly states that those variants were neither tested nor assessed nor evaluated.		

## VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-03-15	Initial Release	
02	2019-05-10	Product description and model name corrected.	W. Treffke
03	2019-07-16	Applicant on the test plots corrected.	W. Treffke

## ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
BR	Bluetooth Basic Rate mode
EDR	Bluetooth Enhanced Data Rate mode
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
$V_{NOM}$	Nominal supply voltage


**REPORT INDEX**

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>7</b>
1.1	Photos – Equipment External.....	8
1.2	Photos – Equipment Internal.....	10
1.3	Photos – Test Setup.....	17
1.4	Support Equipment.....	18
1.5	Test Modes.....	19
1.6	Test Frequencies.....	20
1.7	Sample emission level calculation.....	21
<b>2</b>	<b>Result Summary.....</b>	<b>22</b>
<b>3</b>	<b>Test Conditions and Results.....</b>	<b>23</b>
3.1	Test Conditions and Results - Occupied bandwidth.....	23
3.2	Test Conditions and Results - AC powerline conducted emissions.....	26
3.3	Test Conditions and Results - Transmitter radiated emissions.....	29
3.4	Test Conditions and Results - Receiver radiated emissions.....	33
ANNEX A	Transmitter spurious emissions.....	36
ANNEX B	Receiver spurious emissions.....	68

## 1 Equipment (Test Item) Under Test

Description	Field Controller Win EC7	
Model	CS20 LTE Disto (US, CA)	
Additional Model(s)	None	
Brand Name(s)	Leica Geosystems	
Serial Number(s)	2475478	
Hardware Version(s)	V1.0	
Software Version(s)	V4.97	
PMN	CS20 LTE Disto, CS20 LTE	
HVIN	CS20 LTE Disto, CS20 LTE	
FVIN	-/-	
HMN	-/-	
FCC-ID	RFD-CSNGG	
IC	3177A-CSNGG	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth	
Modulation	GFSK, PI/4-DQPSK, 8-DPSK	
Number of antenna ports	1	
Radio Module	Type	TiWi-BLE™ Bluetooth® and Wi-Fi Modules
	Model	TIWI-BLE
	Manufacturer	Leica Geosystems AG
	HW Version	unspecified
	SW Version	unspecified
	FCC-ID:	RFD-BTWCO
	IC:	3177A-BTWCO
Antenna	Type	Integrated
	Model	W3008C
	Manufacturer	Pulse Electronics
	Gain	1 dBi (manufacturer declaration)
Supply Voltage	$V_{NOM}$	120 VAC (adaptor)
Supply Voltage	$V_{NOM}$	11.1 VAC (Lithium Battery)
Operating Temperature	$T_{NOM}$	25 °C
AC/DC-Adaptor	Model	GEV276
	Vendor	Leica Geosystems
	Input	100 – 240; 50 / 60 Hz
	Output	15 VDC
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	



1.1 Photos – Equipment External

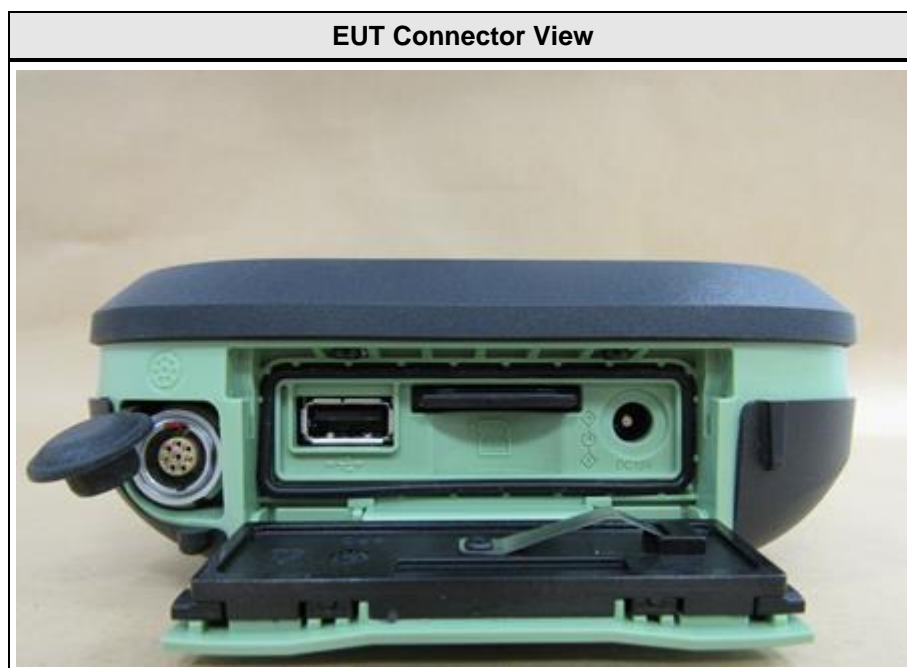






## 1.2 Photos – Equipment Internal

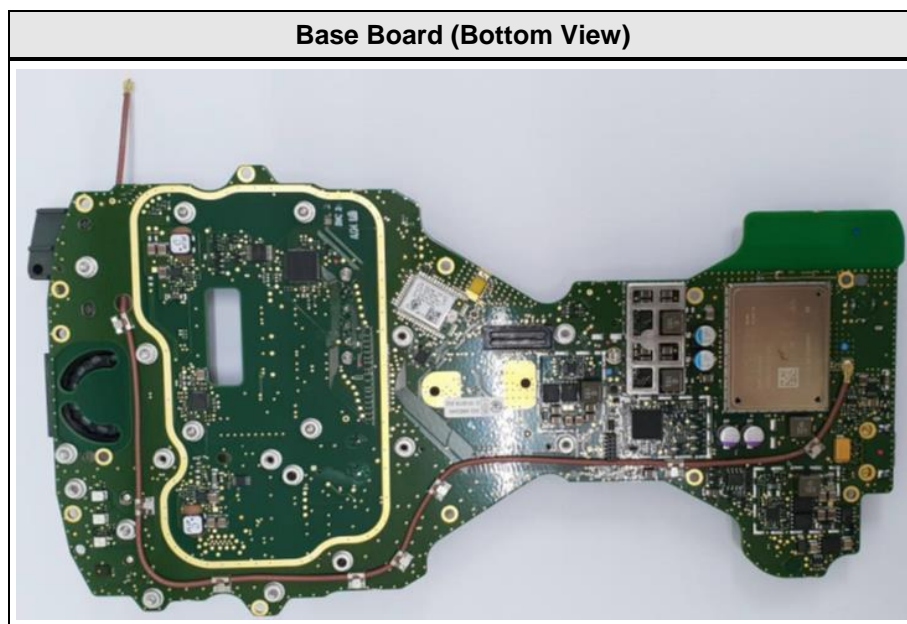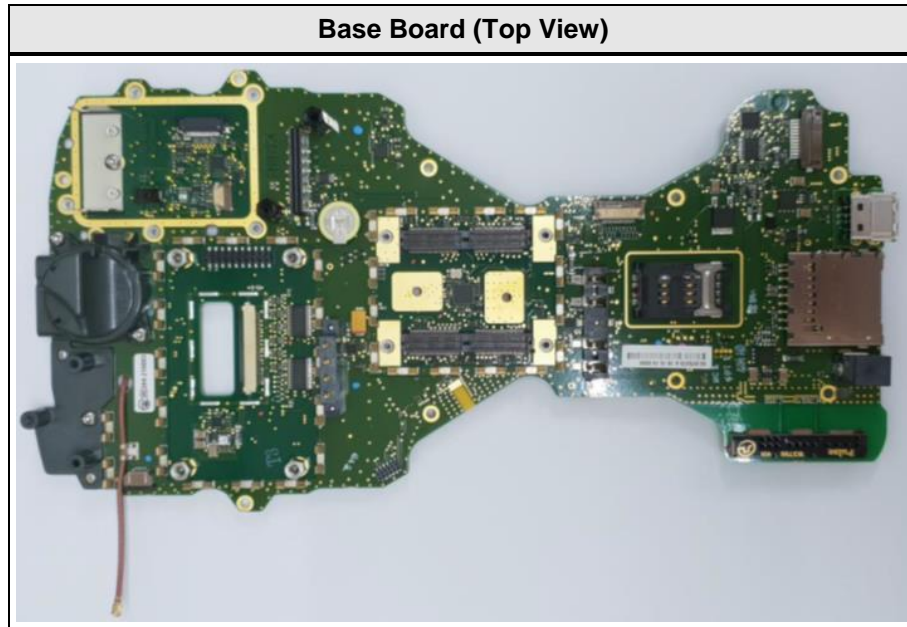


WLAN / Bluetooth Module




Core Module Board (Top View)

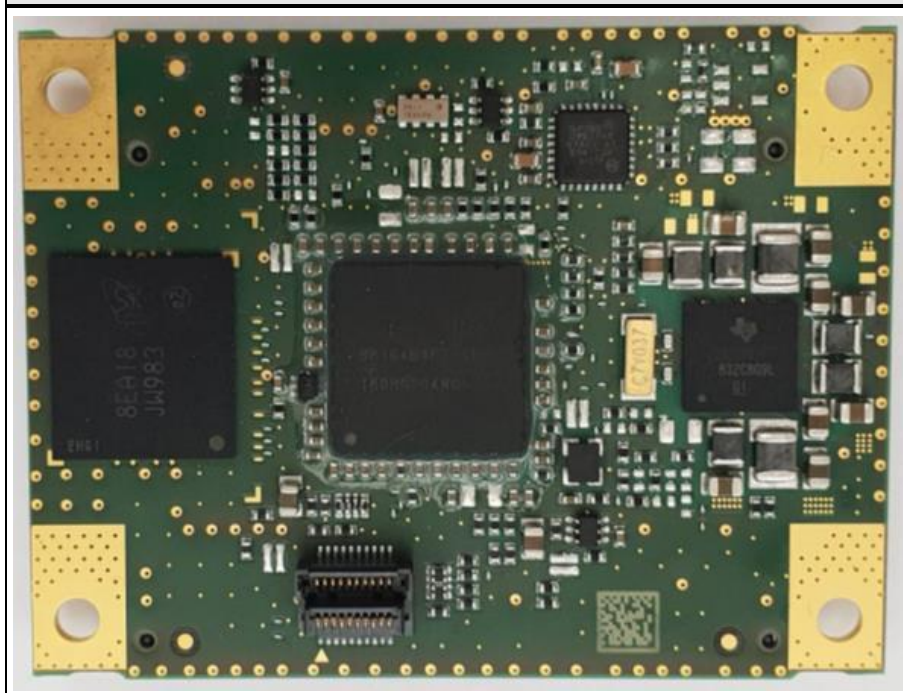

**Core Module Board (Bottom View)**

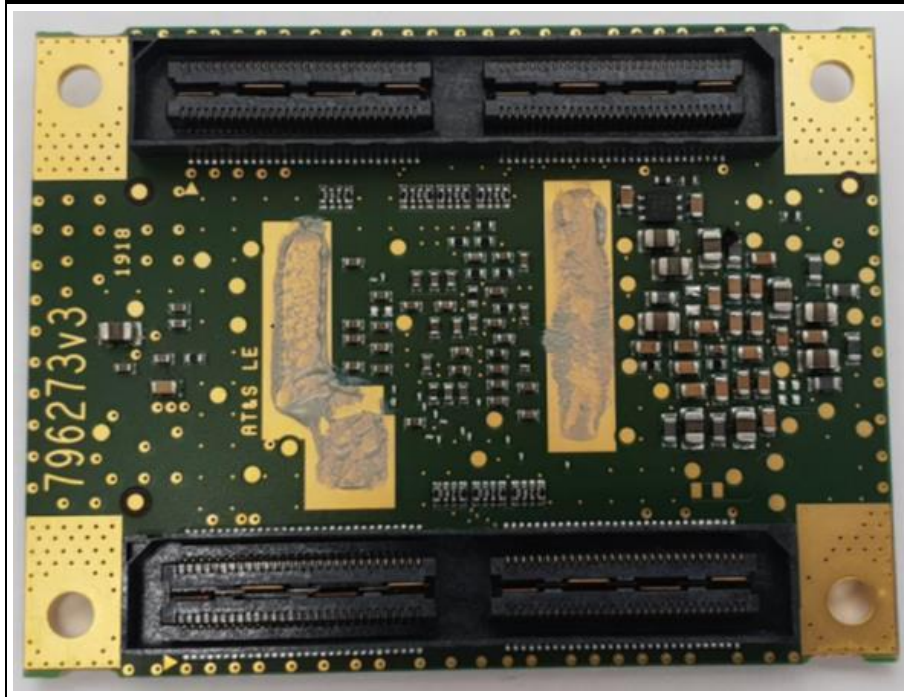


**Camera Board (Top View)**

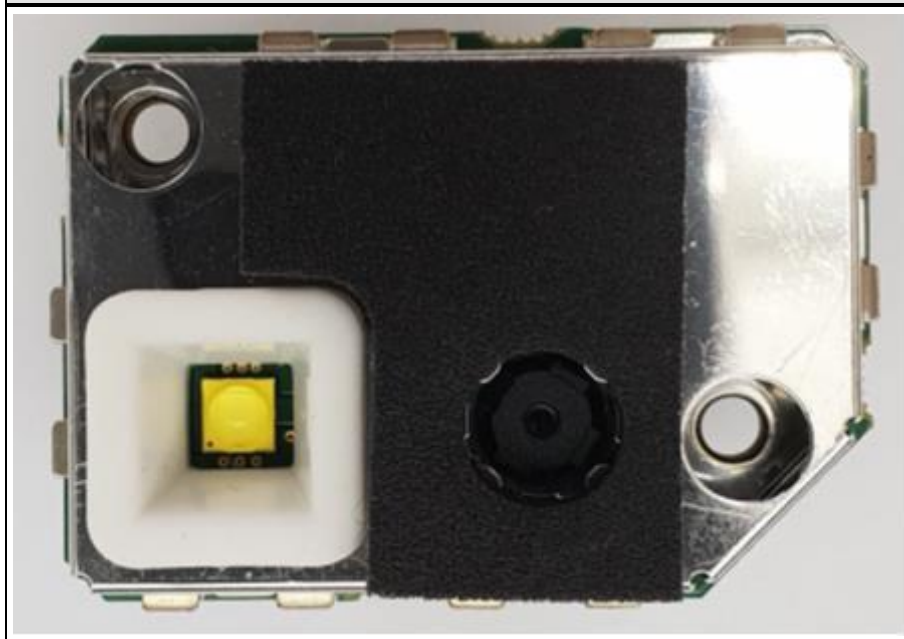

Disto Board (Top View)




Disto Board (Bottom View)

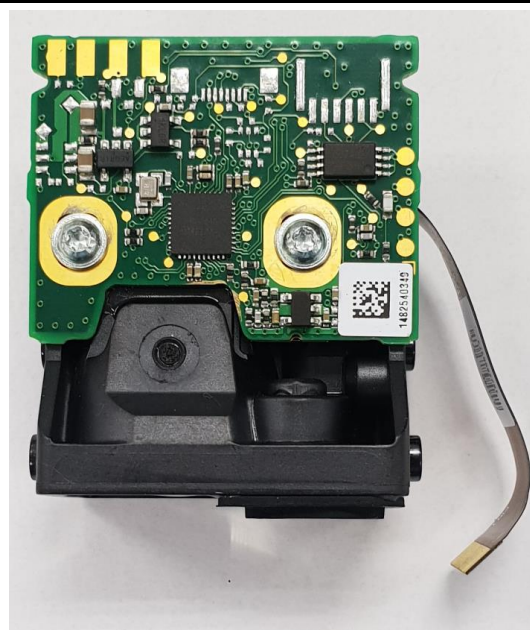


Long-Range Bluetooth Board (Top View)




Long-Range Bluetooth Board (Bottom View)

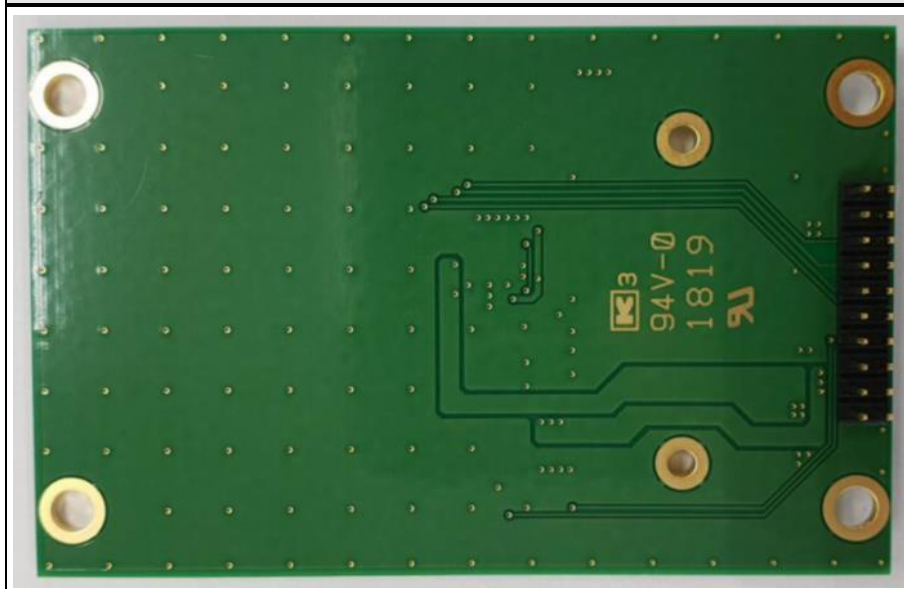


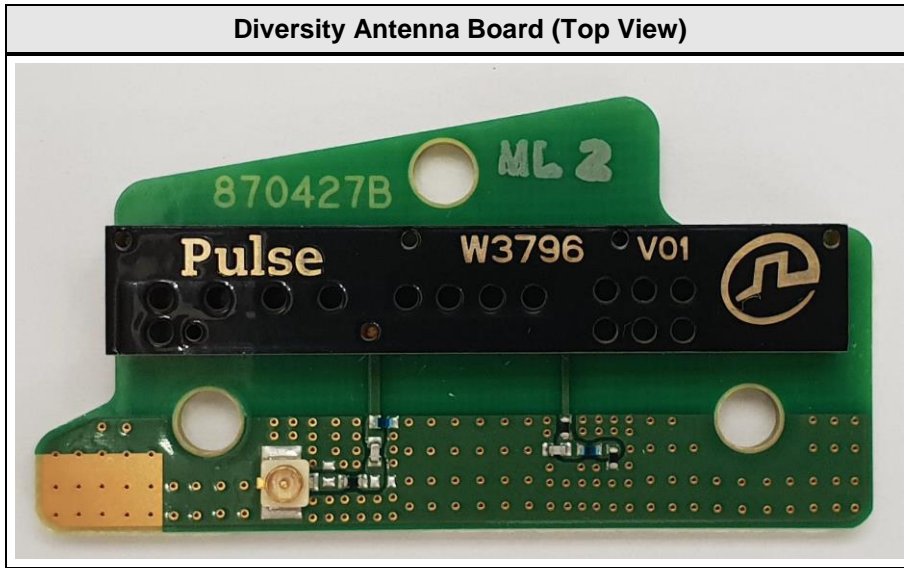

Long-Range Bluetooth Antenna Board (Top View)


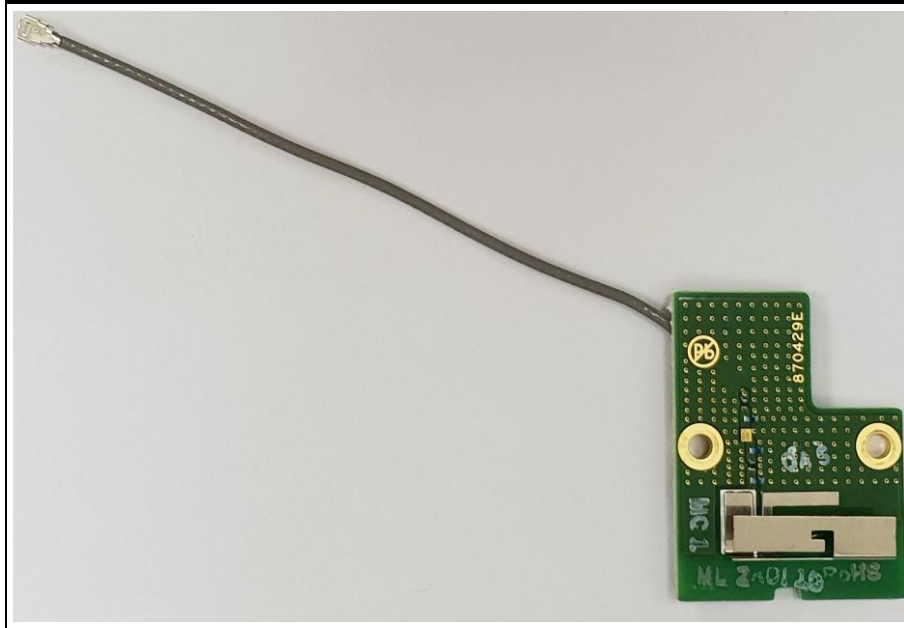


Long-Range Bluetooth Antenna Board (Bottom View)

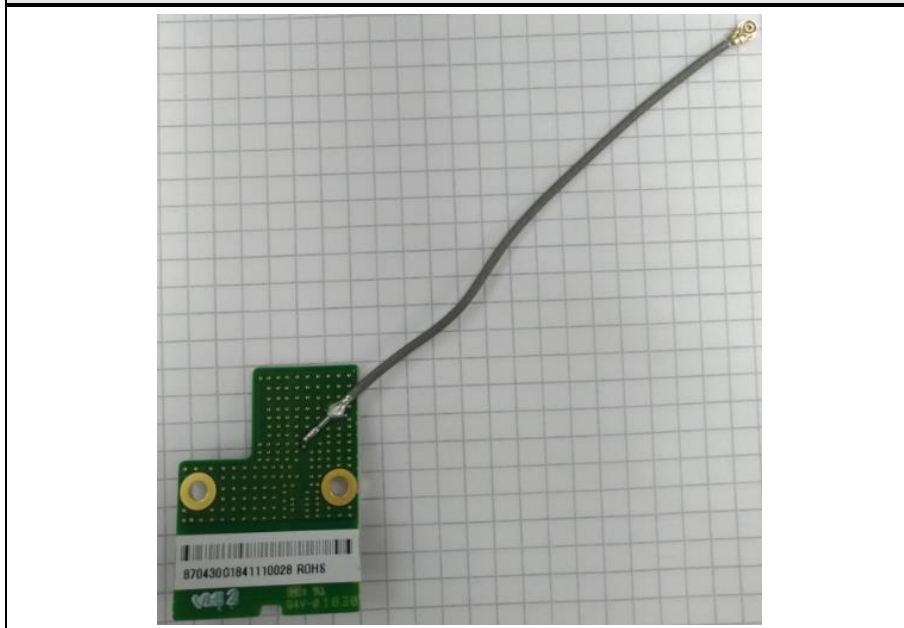



### 1.3 Photos – Test Setup

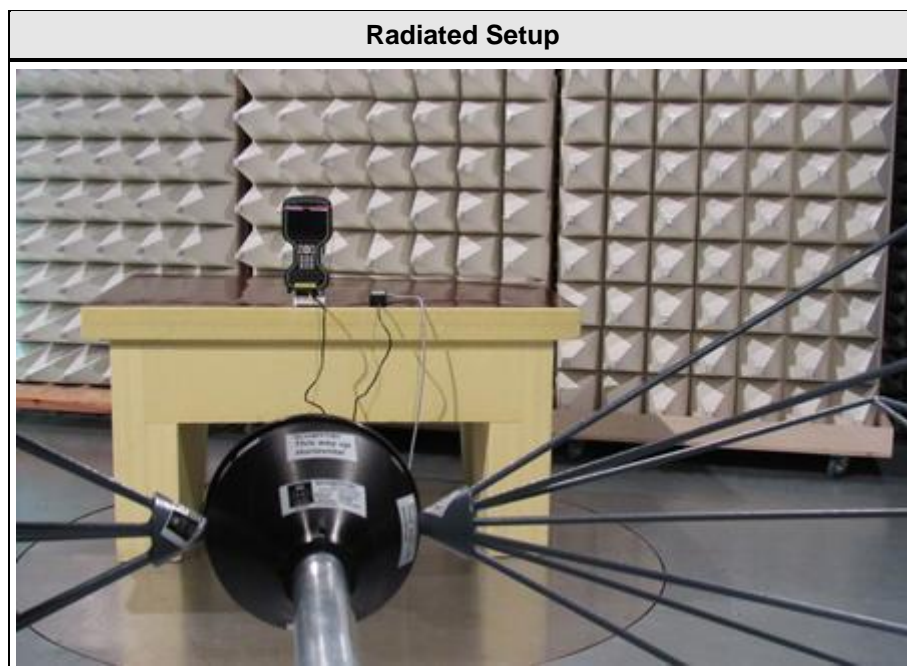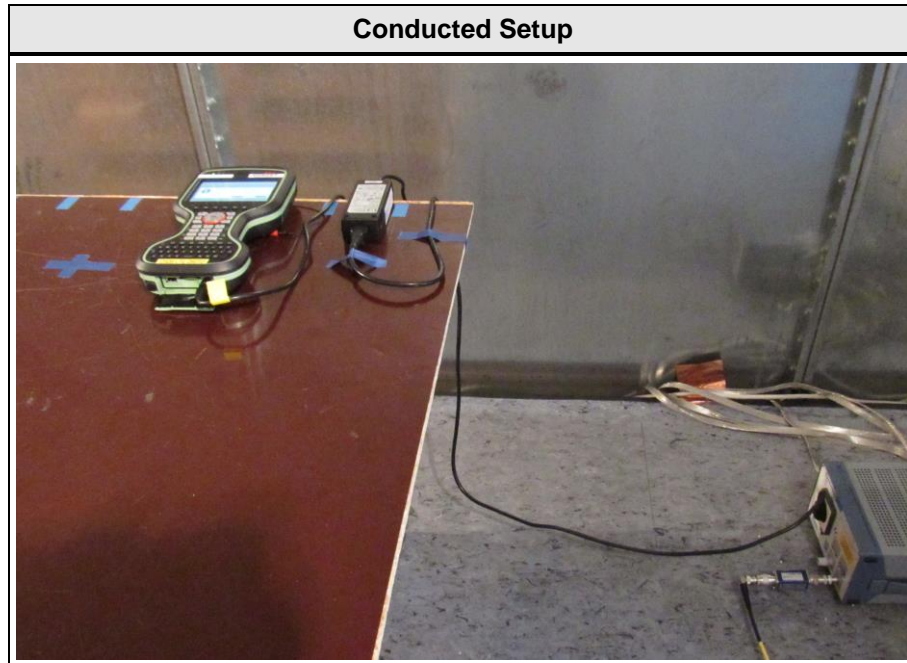

#### 1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Power Supply	Dell	FA65NE0-00	S/N RX929
AE	Laptop	Dell	Latitude E6420	S/N HPJ4R1
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

**1.5 Test Modes**

Mode	Description
DH5 Single	Mode = Transmit Modulation = GFSK Spreading = None Packet type = DH5 Duty cycle = 78%
2-DH5 Single	Mode = Transmit Modulation = PI/4-DQPSK Spreading = None Packet type = 2-DH5 Duty cycle = 78%
3-DH5 Single	Mode = Transmit Modulation = 8-DPSK Spreading = None Packet type = 3-DH5 Duty cycle = 78%
Receive	Mode = Receive
Comment:	

## 1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	39	2441
F4	Tx / Rx	78	2480

### 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBµV + 26 dB/m	= 47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

## 2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 (section 6.6)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(1) ISED RSS-247 § 5.1 Issue 2	20 dB Bandwidth	ANSI C63.10-2013	N/T	
FCC § 15.247(a)(1)(iii) ISED RSS-247, Issue 2 (section 5.1)	Number of hopping frequencies	ANSI C63.10-2013	N/T	
FCC § 15.247(a)(1) ISED RSS-247, Issue 2 (section 5.1)	Frequency hopping channel separation	ANSI C63.10-2013	N/T	
FCC § 15.247(a)(1)(iii) ISED RSS-247, Issue 2 (section 5.1)	Time of occupancy (Dwell time)	ANSI C63.10-2013	N/T	
FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	N/T	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	N/T	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	N/T	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results - Occupied bandwidth


##### 3.1.1 Information

Test Information	
Reference	ISED RSS-Gen, Issue 5 (section 6.6)
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2019-02-09

##### 3.1.2 Limits

Limits
None (Informational only)

##### 3.1.3 Setup

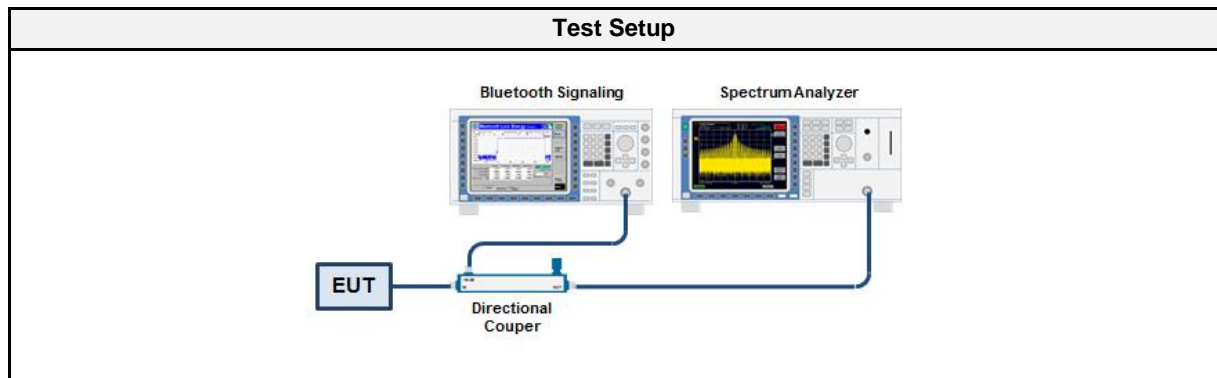

##### 3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01407	2018-12	2019-12

##### 3.1.5 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT transmitter is activated in test mode under normal conditions</li> <li>2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum</li> <li>3. The resolution bandwidth is set to the range of 1 % to 5 % of the occupied bandwidth</li> <li>4. The occupied bandwidth is measured with the build-in analyzer function</li> </ol>


## 3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
3-DH5	2441	1.210
Comment	worst case	



### Occupied Bandwidth

Project Number: G0M-1812-7888  
 Applicant: Leica Geosystems AG  
 Model Description: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Sample ID: 22136  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: 3-DH5, Channel: 39, 2441 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Wilfried Treffke  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2019-02-09  
 Occupied Bandwidth [MHz]: 1.210

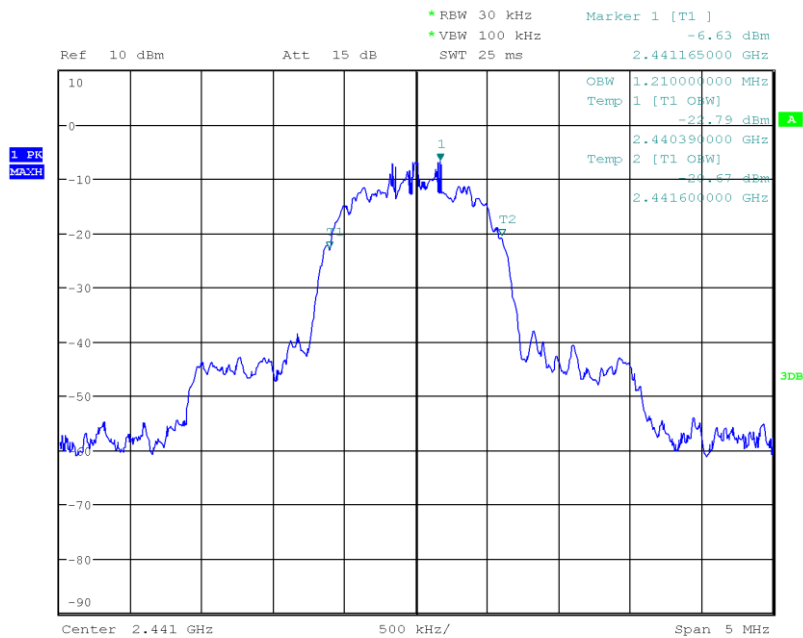

Date: 9.FEB.2019 10:37:54

### 3.2 Test Conditions and Results - AC powerline conducted emissions

#### 3.2.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Operator	Wilfried Treffke
Date	2019-02-09

#### 3.2.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBµV]	Average [dBµV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

\* Limit decreases linearly with the logarithm of the frequency

#### 3.2.3 Setup

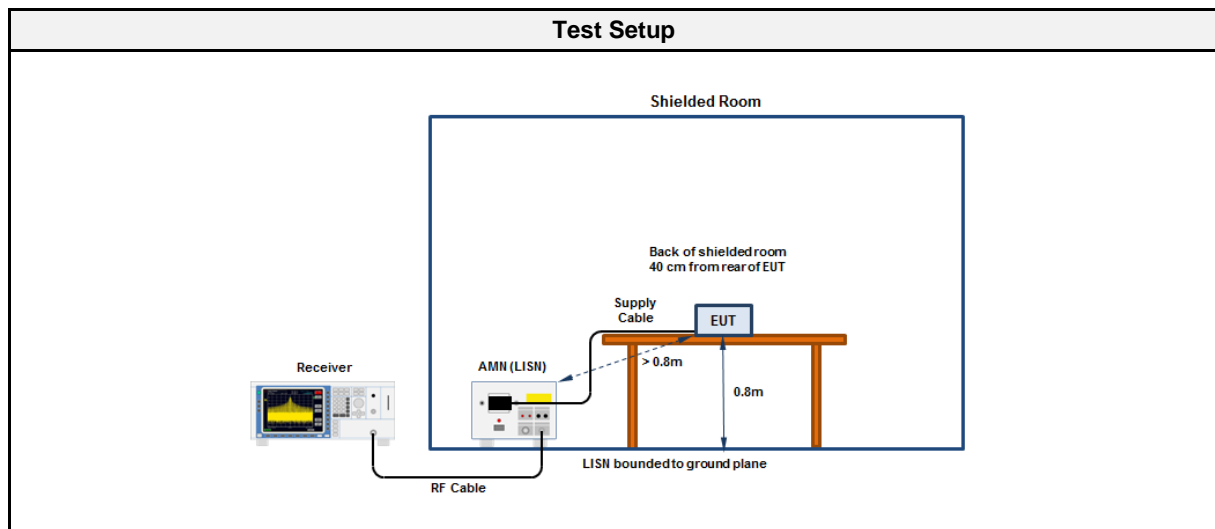

#### 3.2.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Receiver	R&S	ESU 26	EF00241	2017-07	2019-07
LISN	R&S	ESH3-Z5	EF00036	2017-02	2019-02

### EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 23°C, Unom: 120 VAC / 60Hz  
 LISN: ESH3-Z5 (L)  
 Mode: Tx Bluetooth 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 2

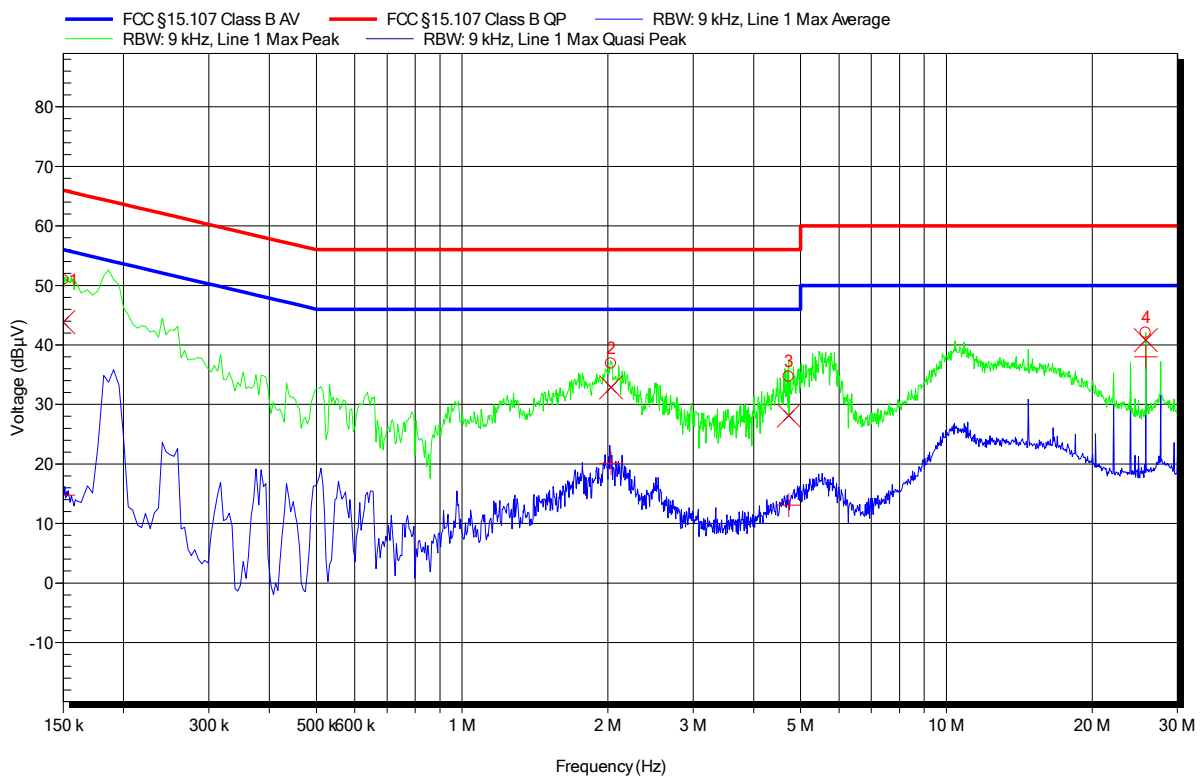

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	150 kHz	43.85 dBµV	66 dBµV	-22.15 dB	Pass
2	2.031 MHz	32.9 dBµV	56 dBµV	-23.1 dB	Pass
3	4.727 MHz	28.11 dBµV	56 dBµV	-27.89 dB	Pass
4	25.807 MHz	40.8 dBµV	60 dBµV	-19.2 dB	Pass


Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	150 kHz	14.76 dBµV	56 dBµV	-41.24 dB	Pass
2	2.031 MHz	20.09 dBµV	46 dBµV	-25.91 dB	Pass
3	4.727 MHz	13.06 dBµV	46 dBµV	-32.94 dB	Pass
4	25.807 MHz	37.98 dBµV	50 dBµV	-12.02 dB	Pass

### EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Unom: 120 VAC / 60Hz  
 LISN: ESH3-Z5 (N)  
 Mode: Tx Bluetooth 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 1

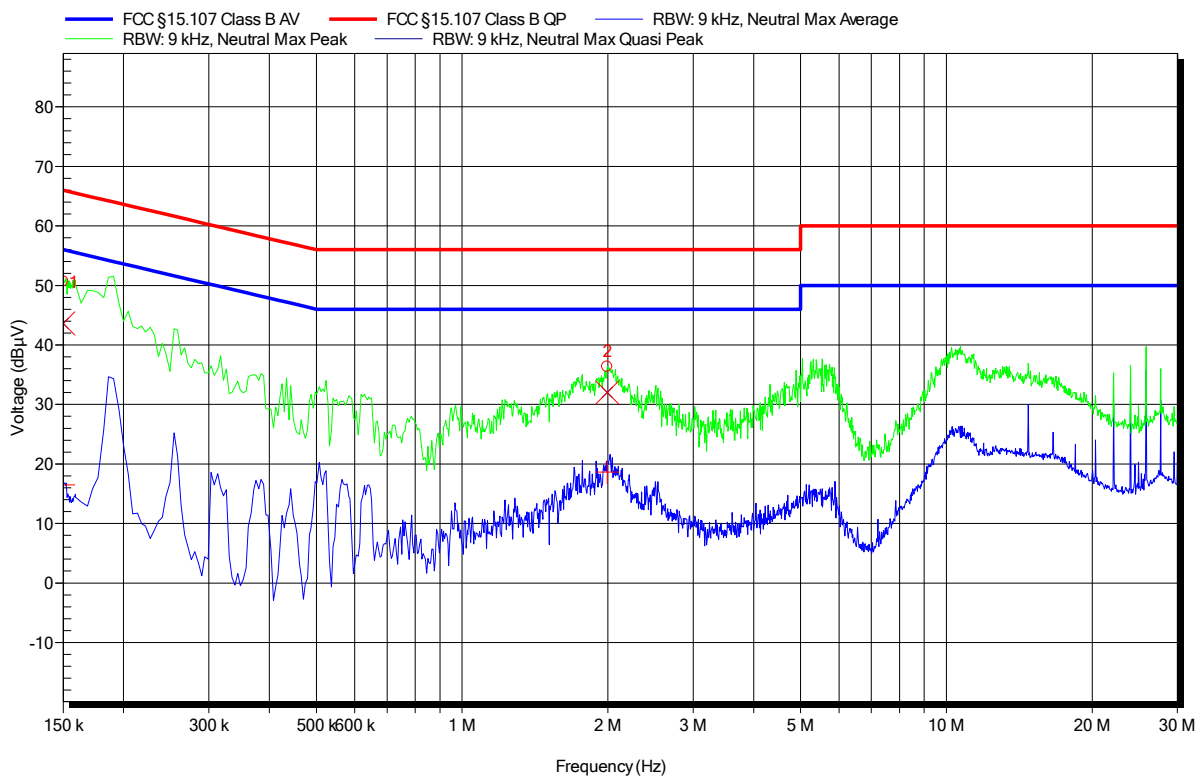

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	150 kHz	43.61 dBµV	66 dBµV	-22.39 dB	Pass
2	1.995 MHz	32.02 dBµV	56 dBµV	-23.98 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	150 kHz	16.48 dBµV	56 dBµV	-39.52 dB	Pass
2	1.995 MHz	18.62 dBµV	46 dBµV	-27.38 dB	Pass

### 3.3 Test Conditions and Results - Transmitter radiated emissions


#### 3.3.1 Information



Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISED RSS-Gen, Issue 5 (section 6.13)
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6
Operator	Wilfried Treffke
Date	2019-02-09

#### 3.3.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [ $\mu\text{V}/\text{m}$ ]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

#### 3.3.3 Setup

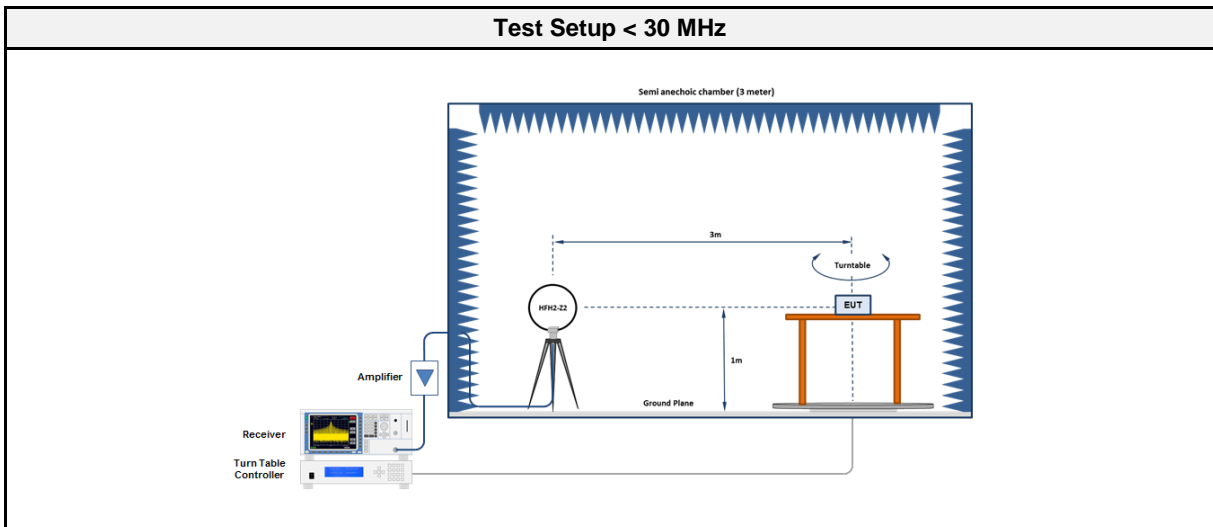

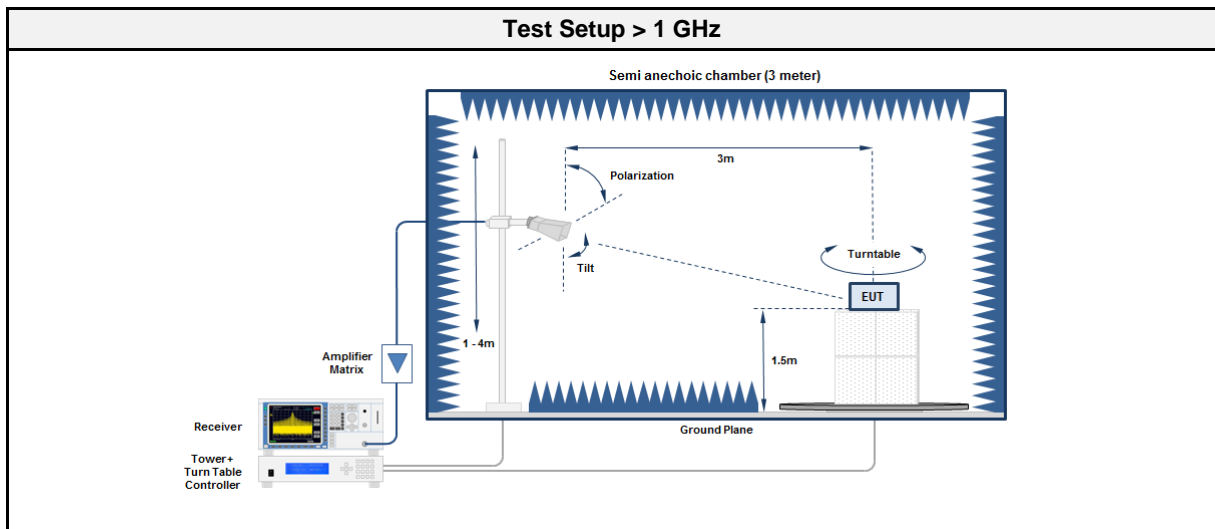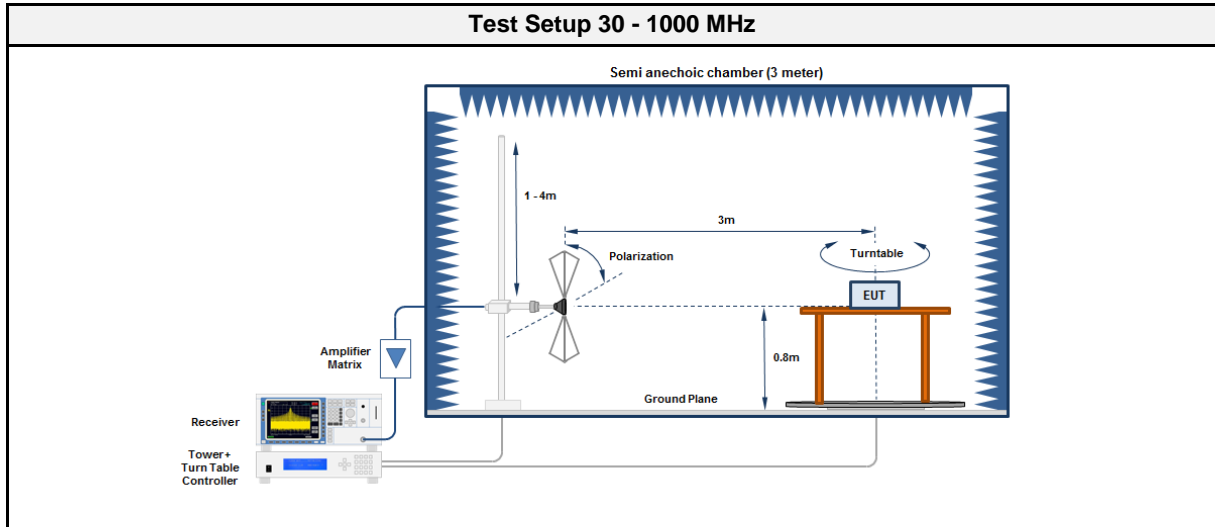

3.3.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF00302	2018-04	2019-04
Antenna	Amplifier Research	AT4560	EF01152	2018-10	2019-10

### 3.3.5 Procedure

Test Procedure < 30 MHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>EUT set to test mode</li> <li>The EUT is rotated through 360°</li> <li>The emissions are measured with peak detector and max hold</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>EUT set to test mode</li> <li>The receiver is set to peak detection with max hold</li> <li>The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

Test Procedure > 1 GHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground</li> <li>EUT set to test mode</li> <li>The receiver is set to peak detection with max hold</li> <li>The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

### 3.3.6 Results

Test Results - DH5						
Channel [MHz]	Emission [MHz]	Level [dBµV/m]	Det.	Pol.	Limit [dBµV/m]	Margin [dB]
2402	117.312	35.77	pk	hor	43.52	-07.75
2402	404.8	24.07	pk	hor	46.00	-21.93
2402	4800	38.96	pk	hor	74.00	-35.04
2402	4800	41.57	pk	ver	74.00	-32.43
2441	1474.9	35.21	pk	hor	74.00	-38.79
2480	2483.5	57.69	pk	hor	74.00	-16.31
2480	2483.5	39.24	RMS	hor	54.00	-14.76
2480	2483.6	53.92	pk	ver	74.00	-20.08
2480	2483.6	39.45	RMS	ver	54.00	-14.55
2480	4960	39.42	pk	ver	74.00	-34.58

Test Results - 2-DH5						
Channel [MHz]	Emission [MHz]	Level [dB $\mu$ V/m]	Det.	Pol.	Limit [dB $\mu$ V/m]	Margin [dB]
2402	Emission level corresponds to ambient noise floor					
2441						
2480						
Comment	Only plots containing spurious emission are shown in annex. All missing plots only contain noise.					

Test Results - 3-DH5						
Channel [MHz]	Emission [MHz]	Level [dB $\mu$ V/m]	Det.	Pol.	Limit [dB $\mu$ V/m]	Margin [dB]
2402	Emission level corresponds to ambient noise floor					
2441						
2480						
Comment	Only plots containing spurious emission are shown in annex. All missing plots only contain noise.					



### 3.4 Test Conditions and Results - Receiver radiated emissions


#### 3.4.1 Information


Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.5, 6.6
Operator	Wilfried Treffke
Date	2019-02-09

#### 3.4.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB $\mu$ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

#### 3.4.3 Setup

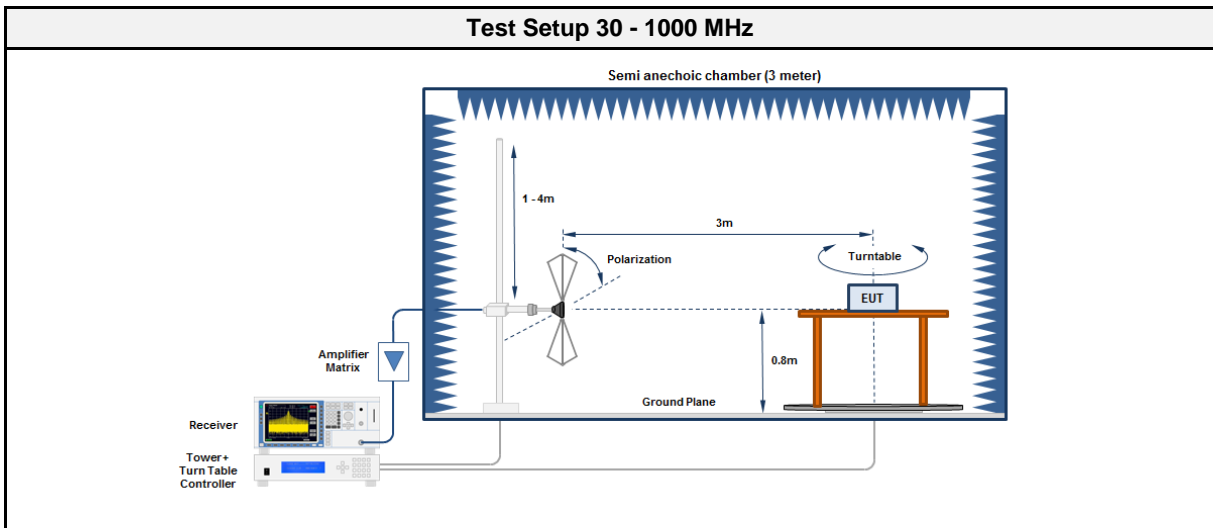

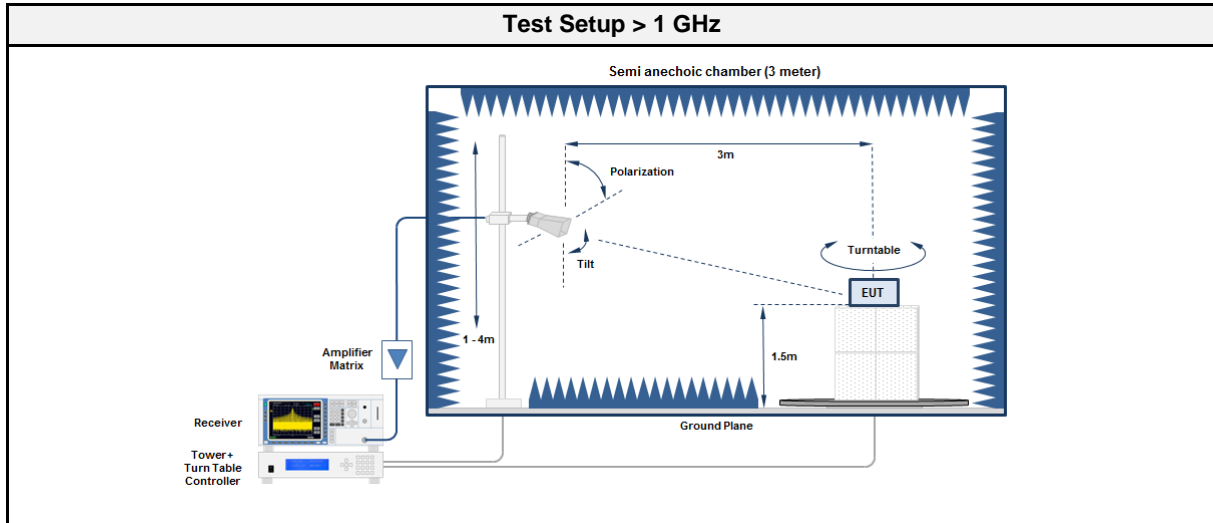

### 3.4.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2015.2.4

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11
Antenna	R&S	HK 116	EF00030	2016-04	2019-04
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2018-08	2019-08
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF00302	2018-04	2019-04
Antenna	Amplifier Research	AT4560	EF01152	2018-10	2019-10

### 3.4.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> <li>1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>2. EUT set to test mode</li> <li>3. The receiver is set to peak detection with max hold</li> <li>4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>5. All significant emissions are measured again using the corresponding final detector</li> </ol>

**Test Procedure > 1 GHz**

1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2. EUT set to test mode
3. The receiver is set to peak detection with max hold
4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5. All significant emissions are measured again using the corresponding final detector

## 3.4.6 Results

**Test Results**

Channel [MHz]	Emission [MHz]	Level [dB $\mu$ V/m]	Det.	Pol.	Limit [dB $\mu$ V/m]	Margin [dB]
2441	30.535	27.73	qpk	ver	40.00	-12.27
2441	31.385	27.67	qpk	hor	40.00	-12.33
2441	370.24	22.39	pk	ver	46.00	-23.61
2441	7962	40.47	pk	ver	53.98	-13.51
2441	11802	44.04	pk	ver	53.98	-09.94


## ANNEX A Transmitter spurious emissions

### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 31

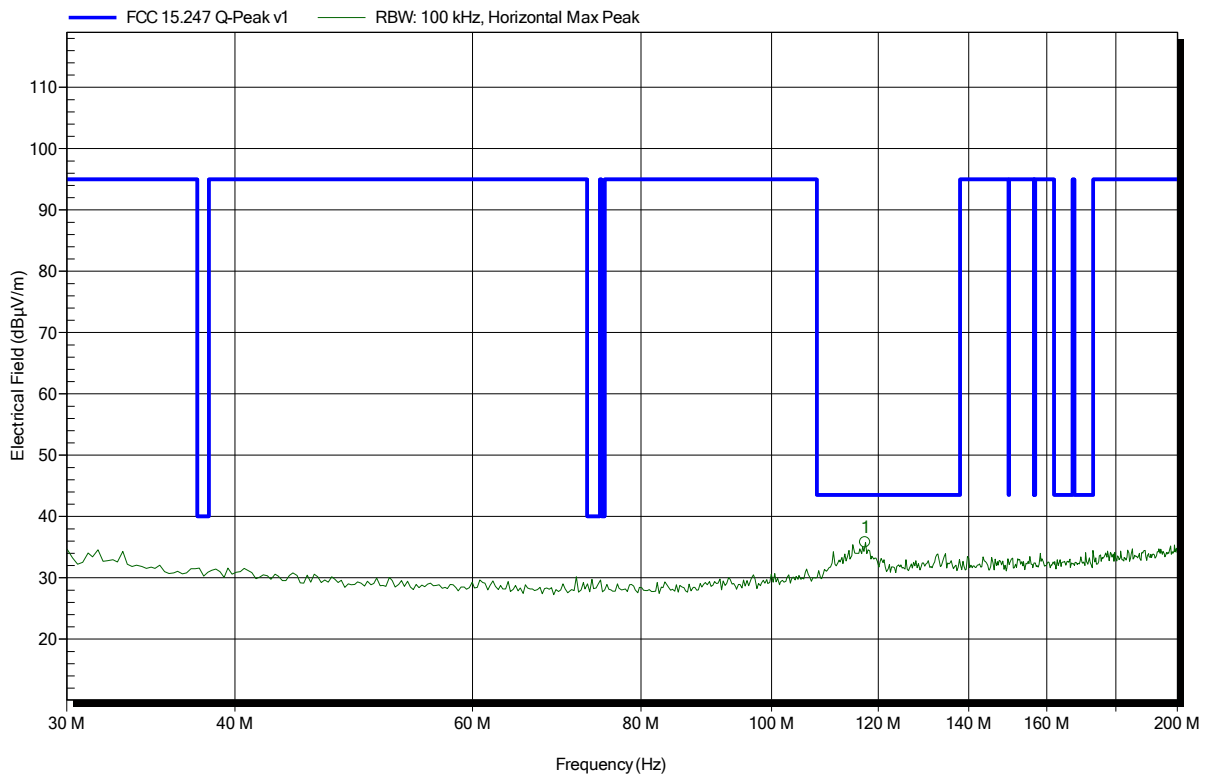


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
117.312 MHz	35.77 dBµV/m	43.52 dBµV/m	-7.75 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 32

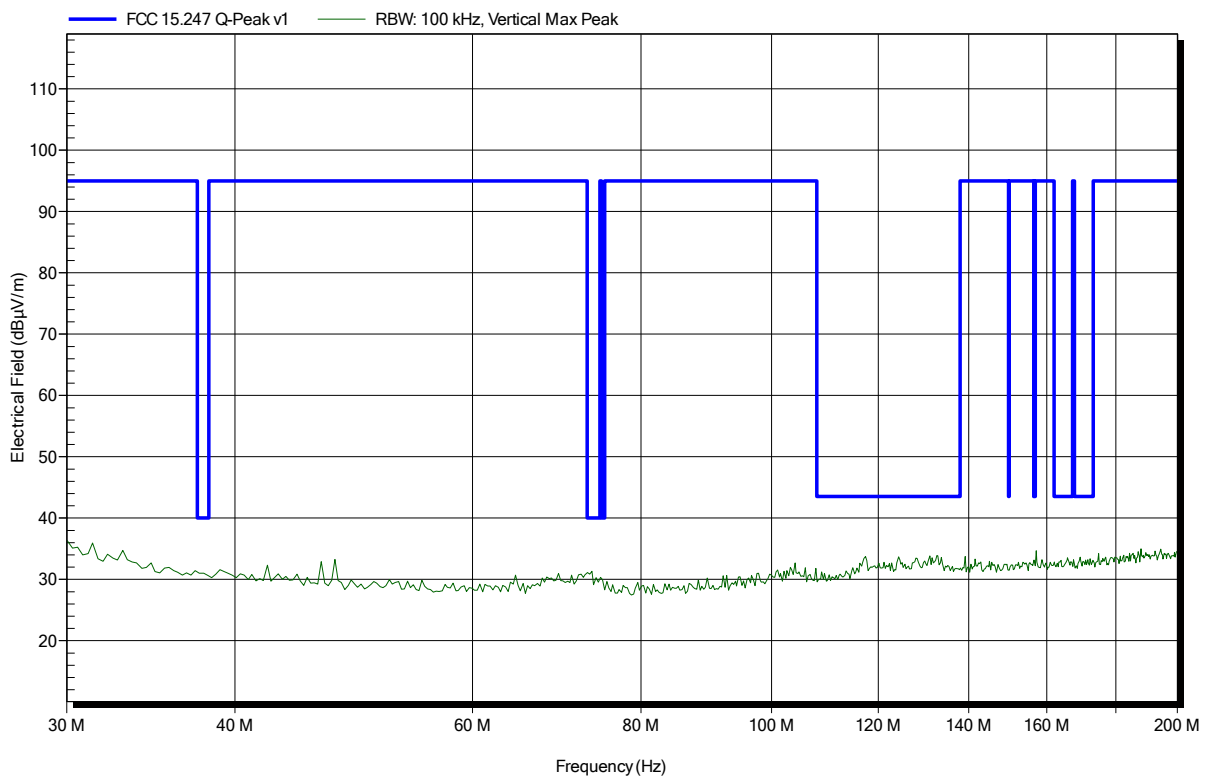


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 33

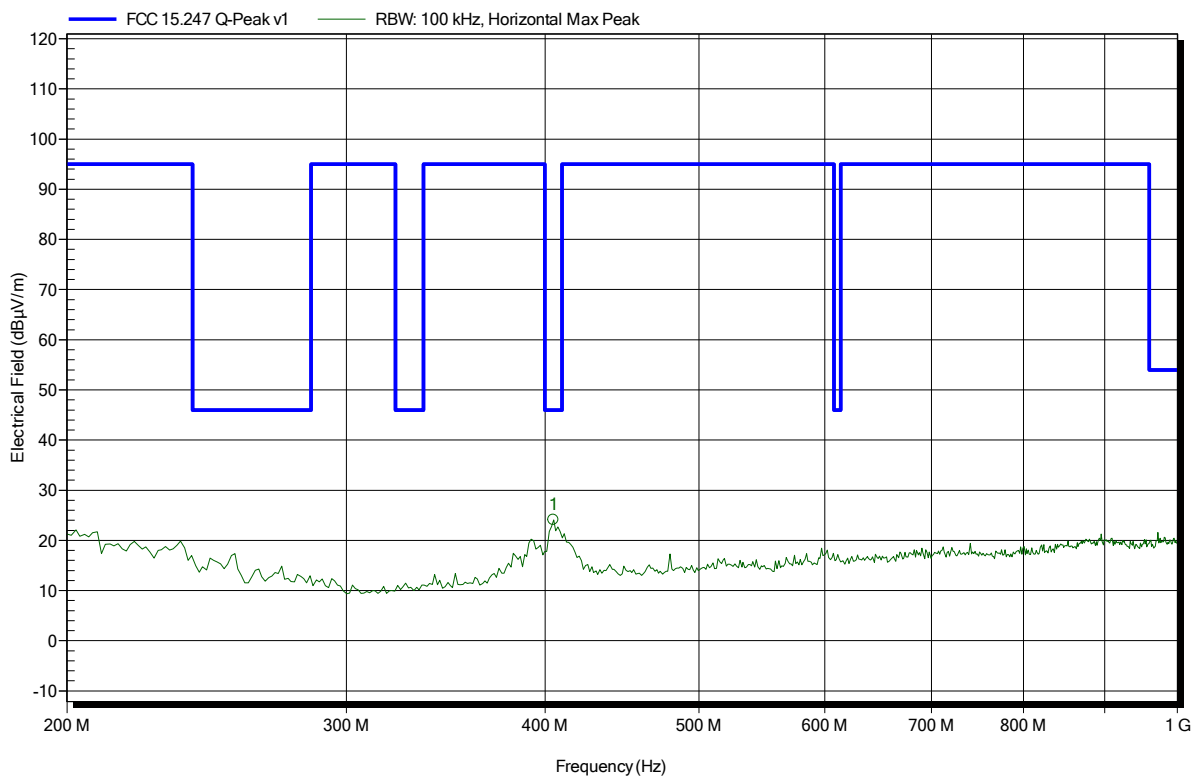


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
404.8 MHz	24.07 dBµV/m	46 dBµV/m	-21.93 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 34

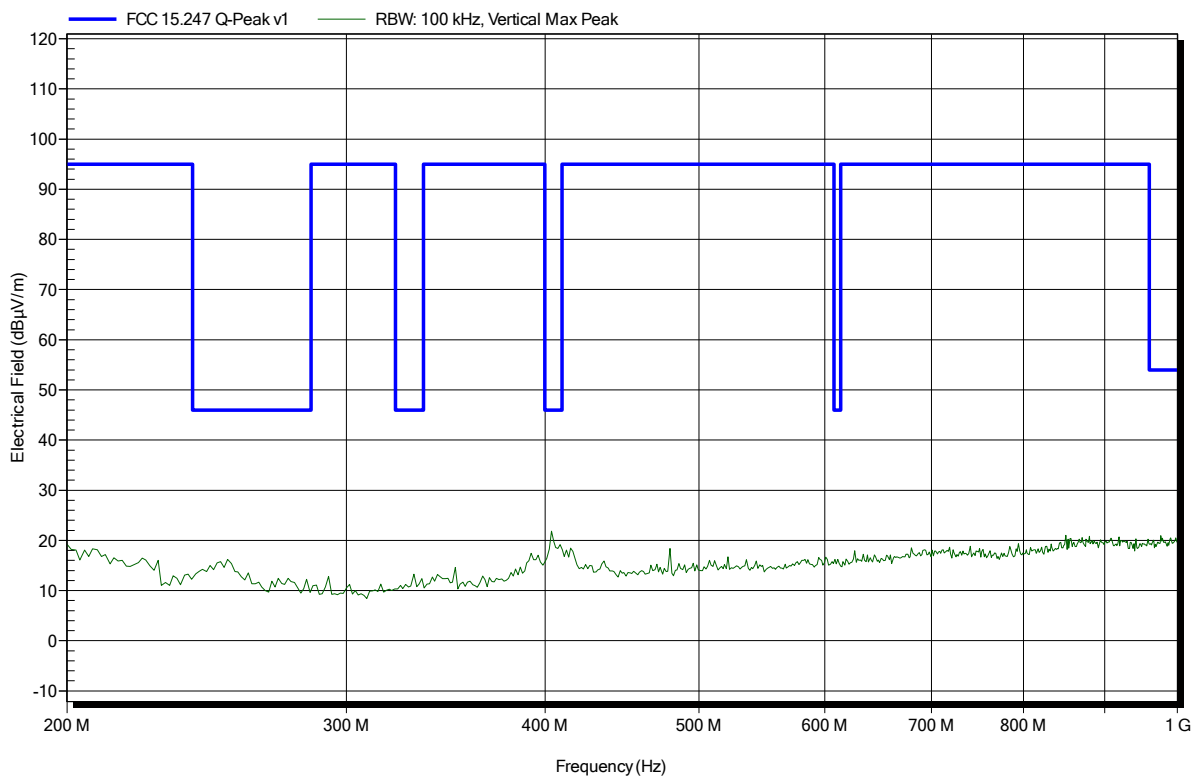


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 3

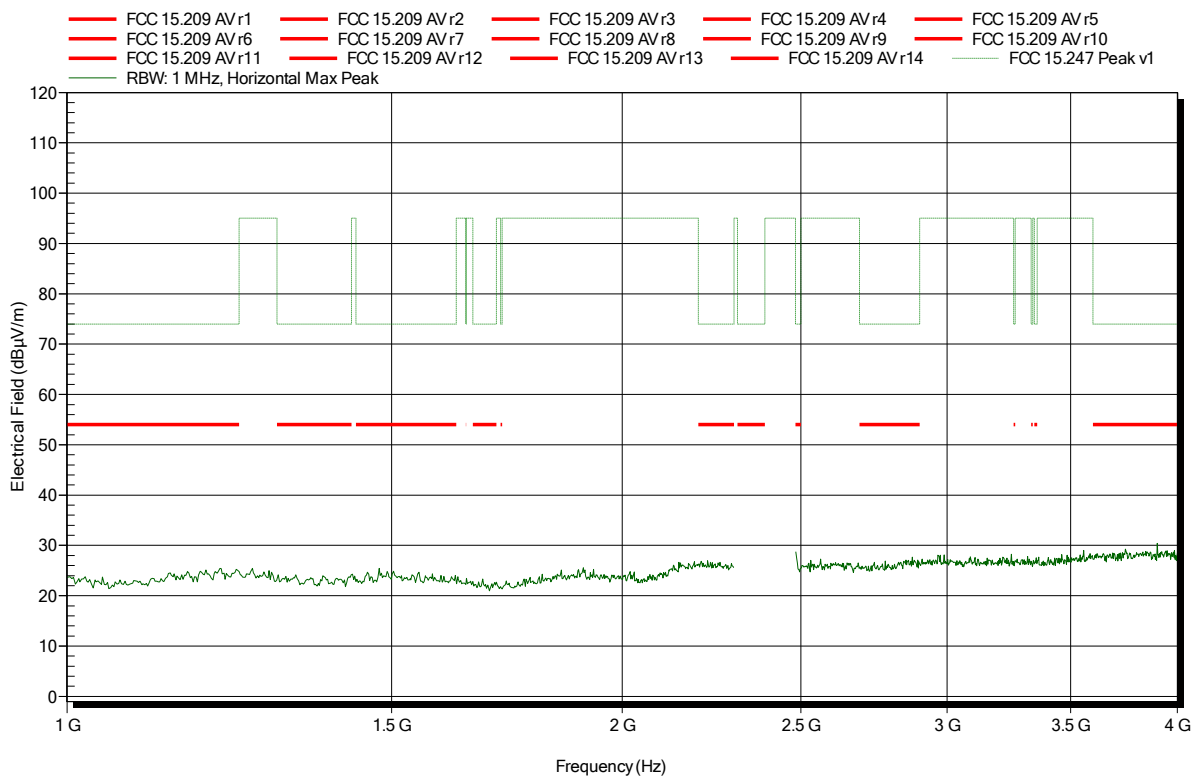




**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 8

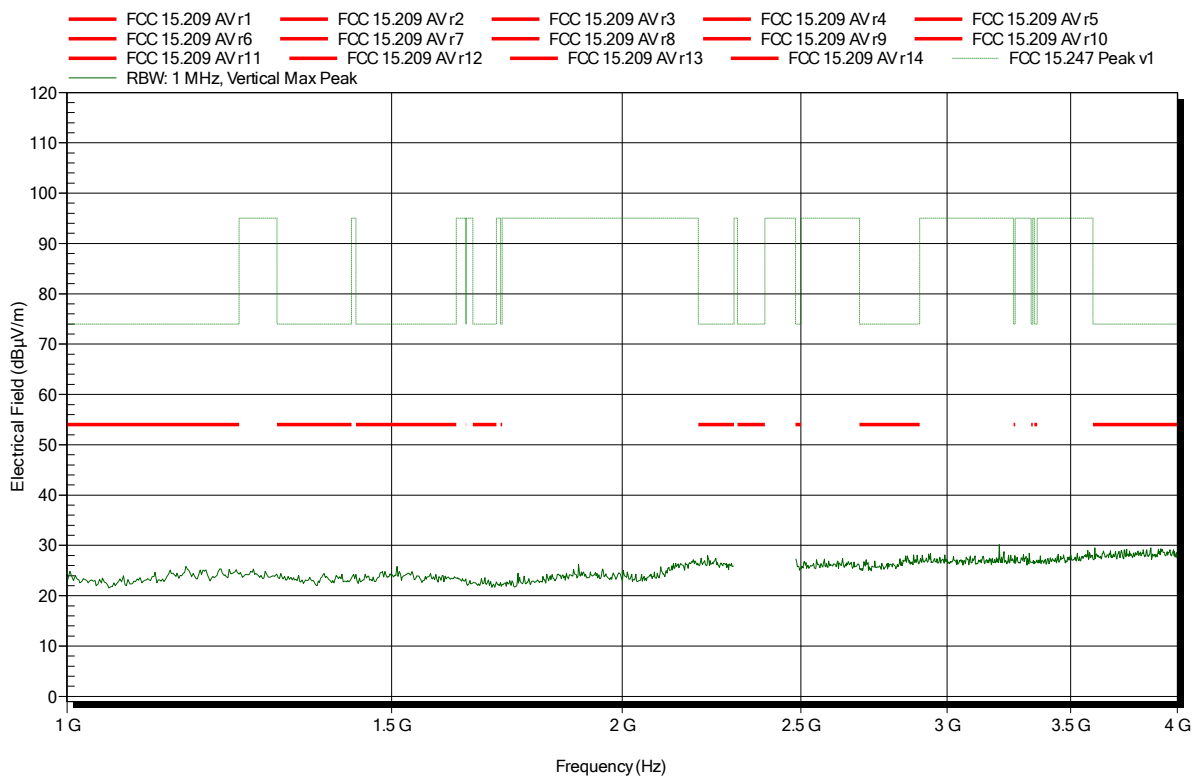


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note: lower bandedge

Index 4

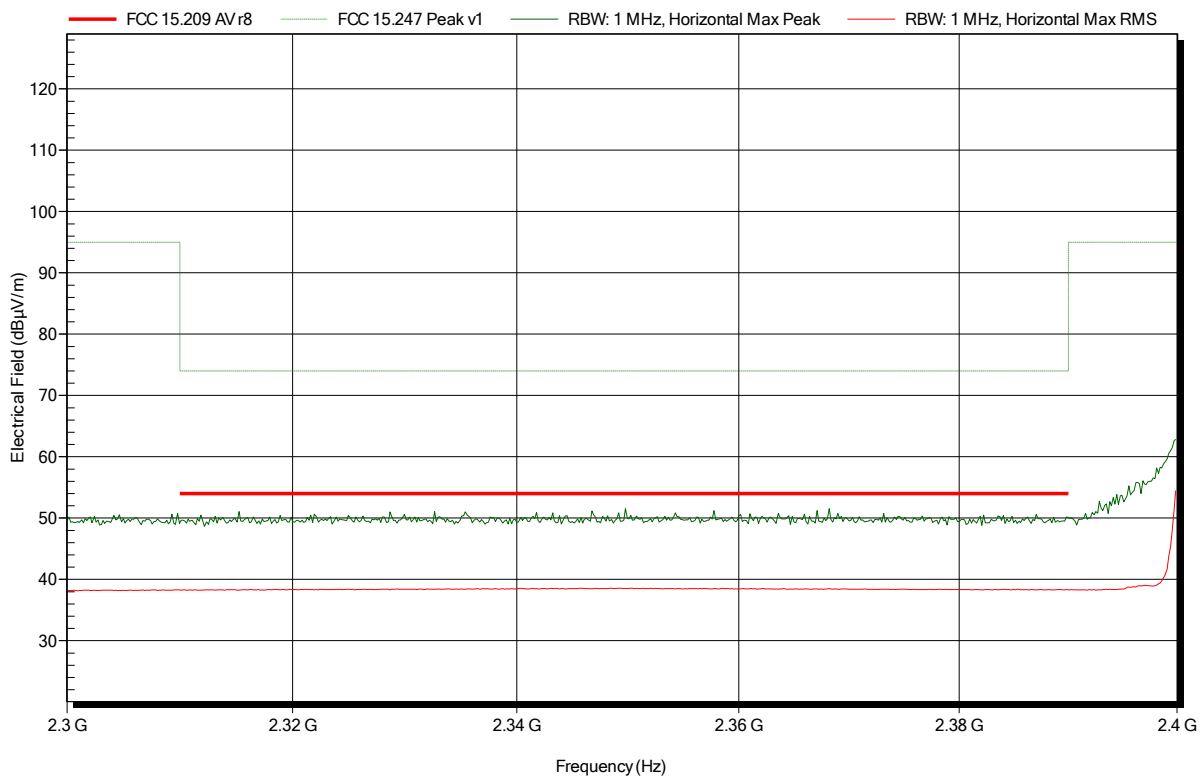


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note: lower bandedge

Index 9

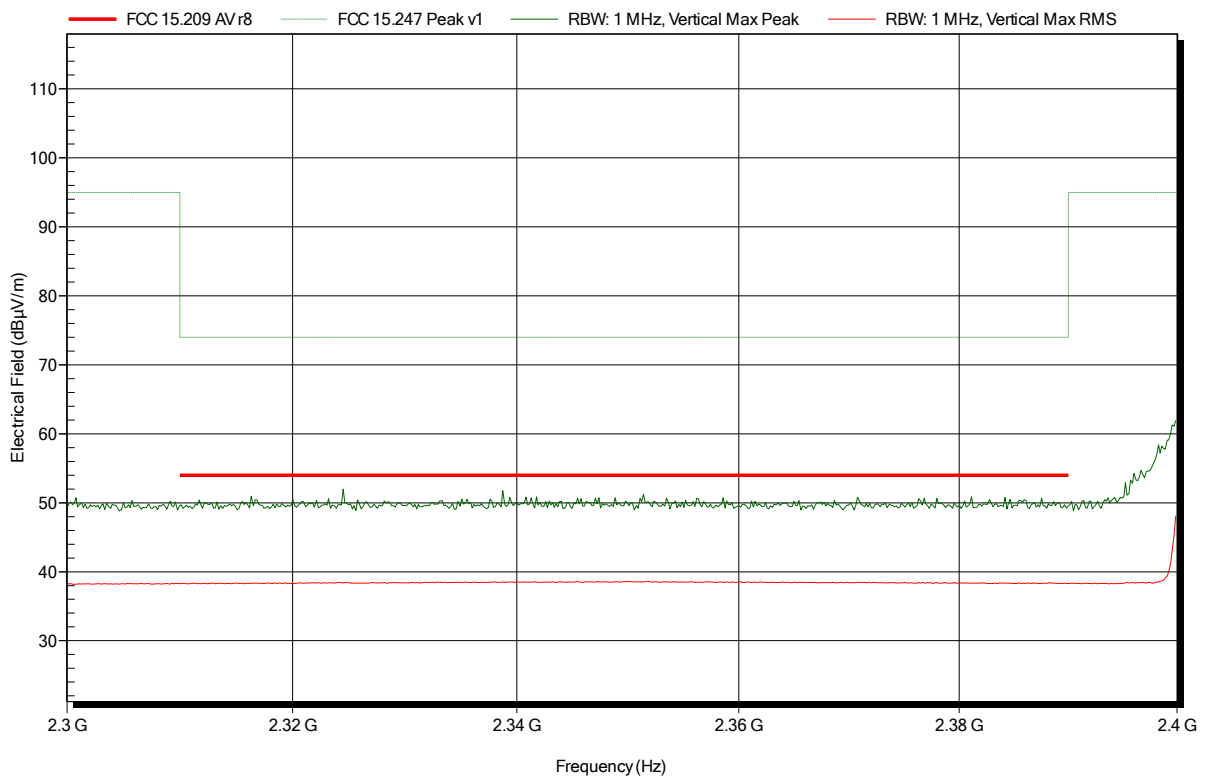


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 5

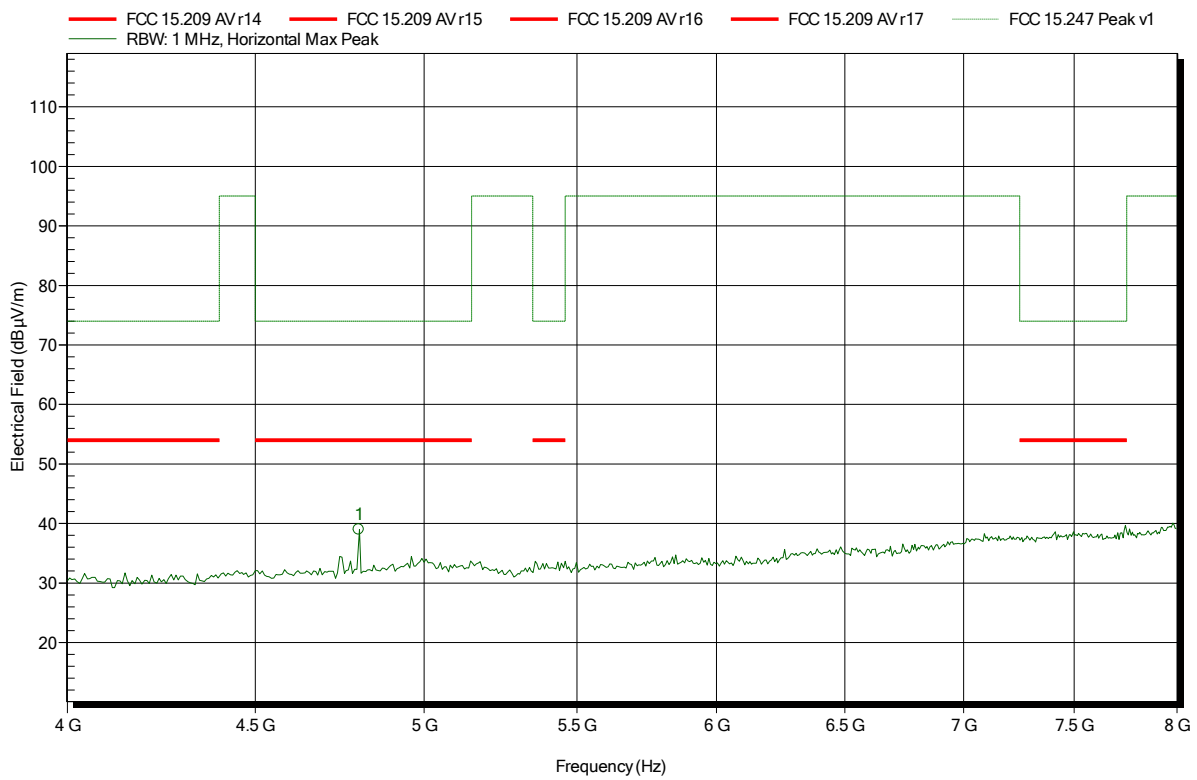


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.8 GHz	38.96 dBµV/m	74 dBµV/m	-35.04 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 10

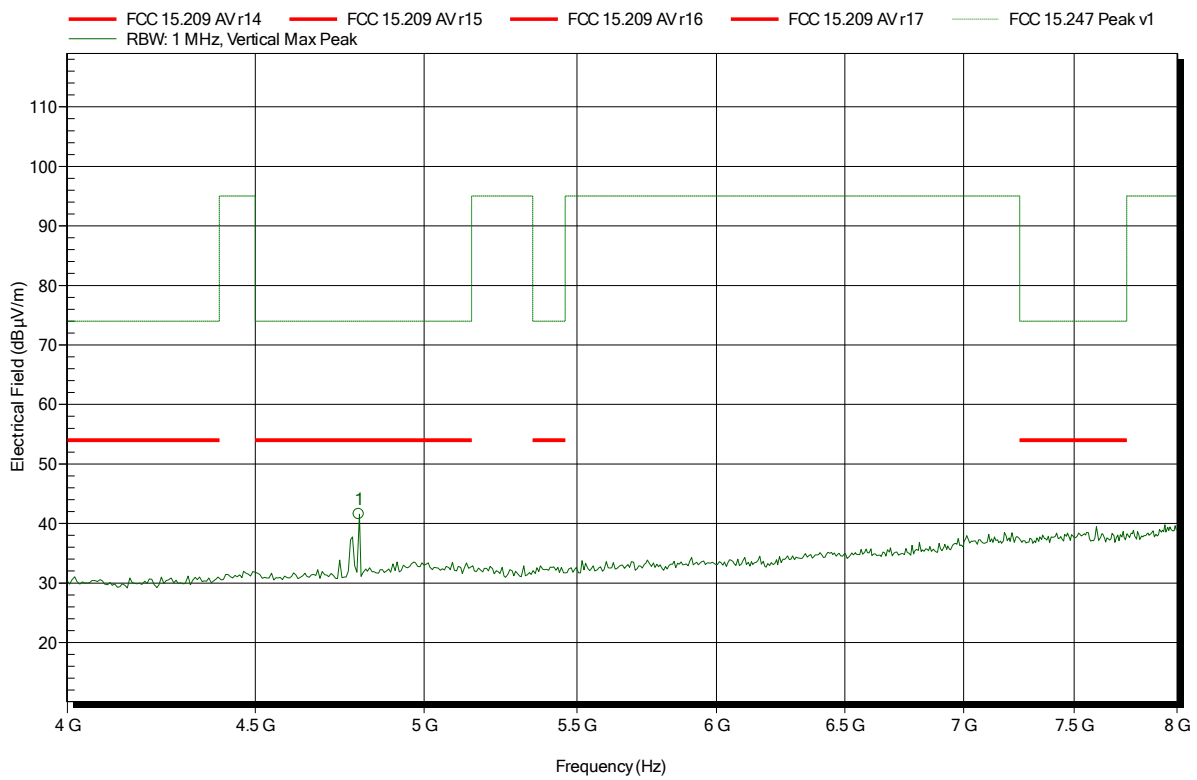


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.8 GHz	41.57 dBµV/m	74 dBµV/m	-32.43 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 6

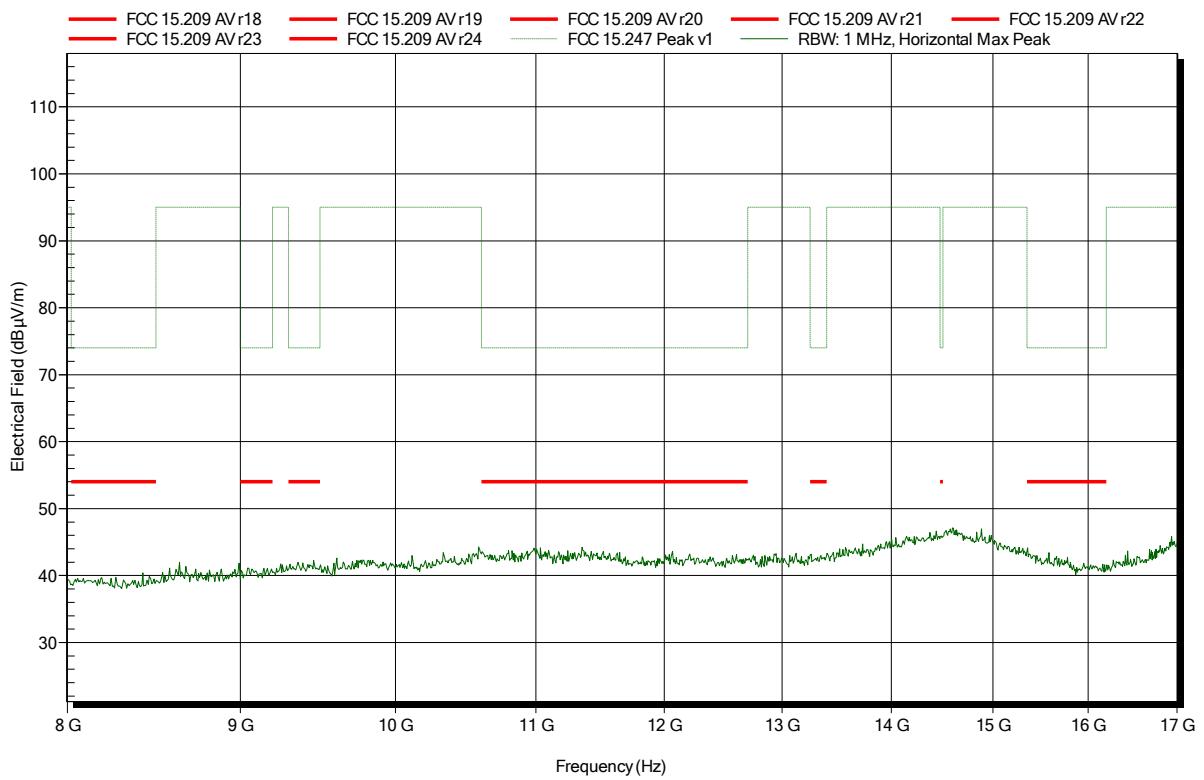


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 11

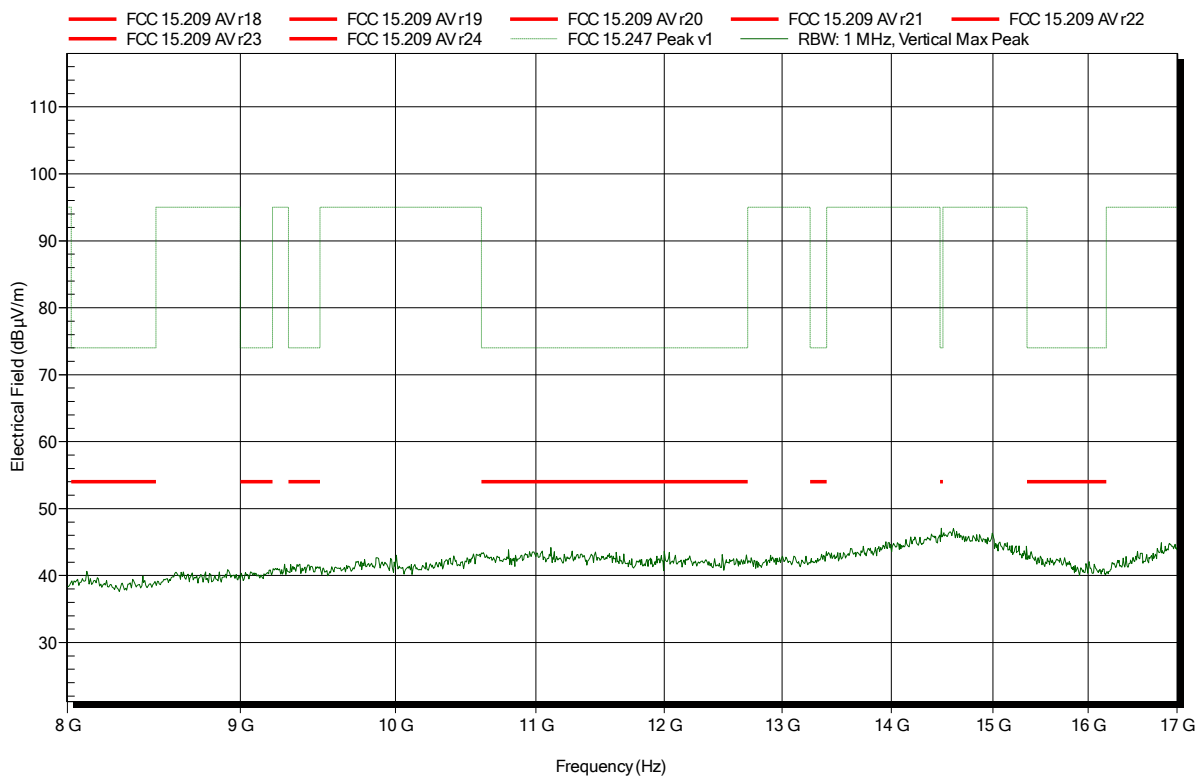


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Amplifier Research AT4560, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 7

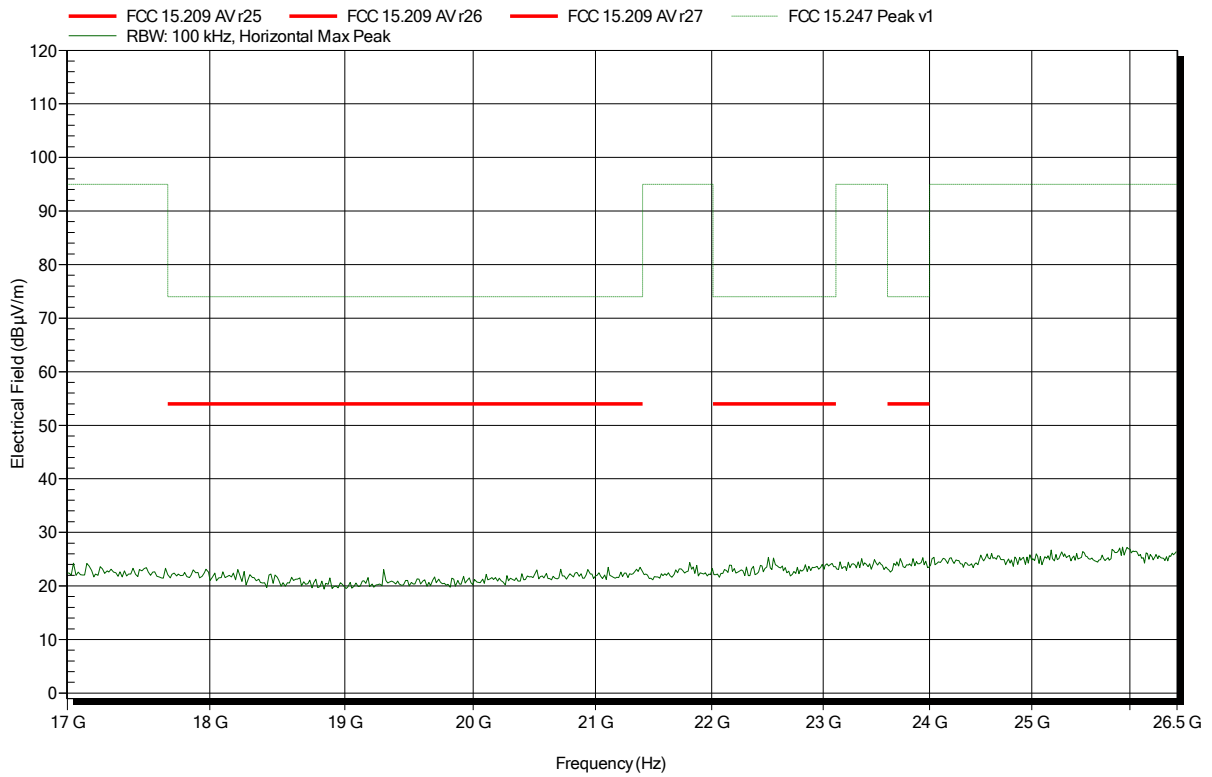




**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Amplifier Research AT4560, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2402 MHz  
 Test Date: 2019-02-09  
 Note:

Index 12

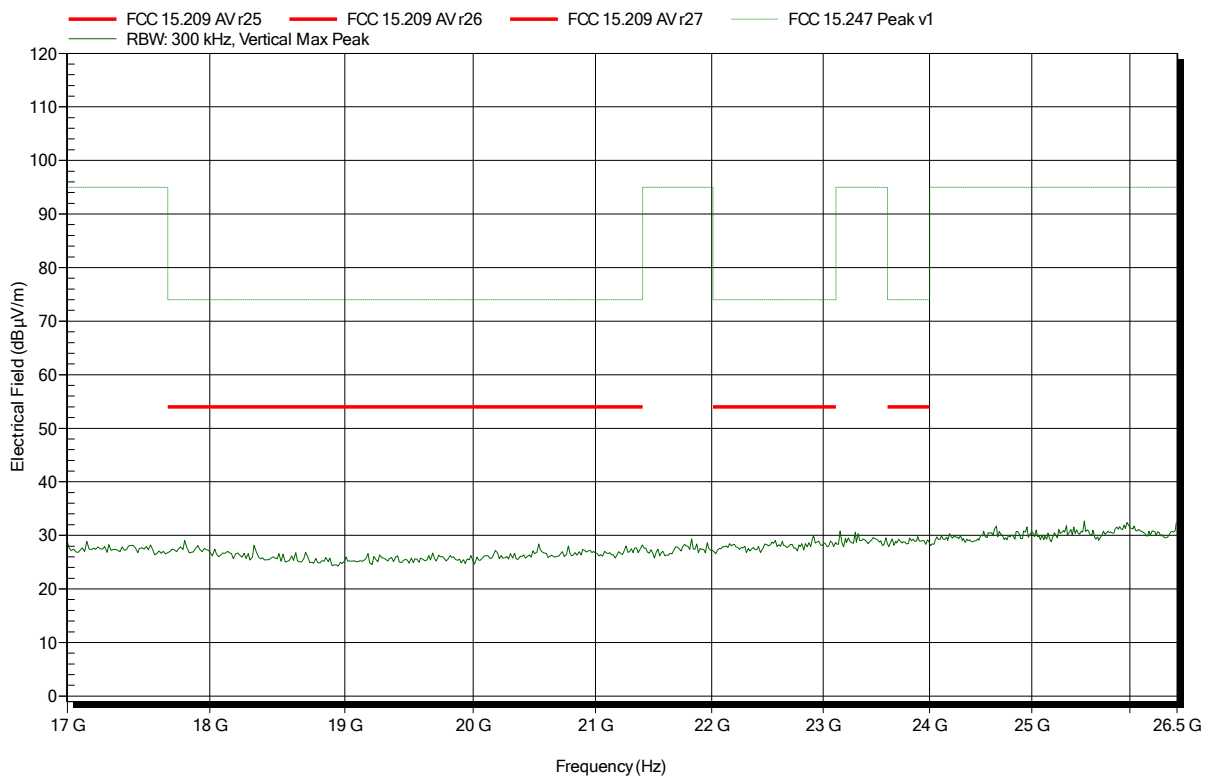


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 13

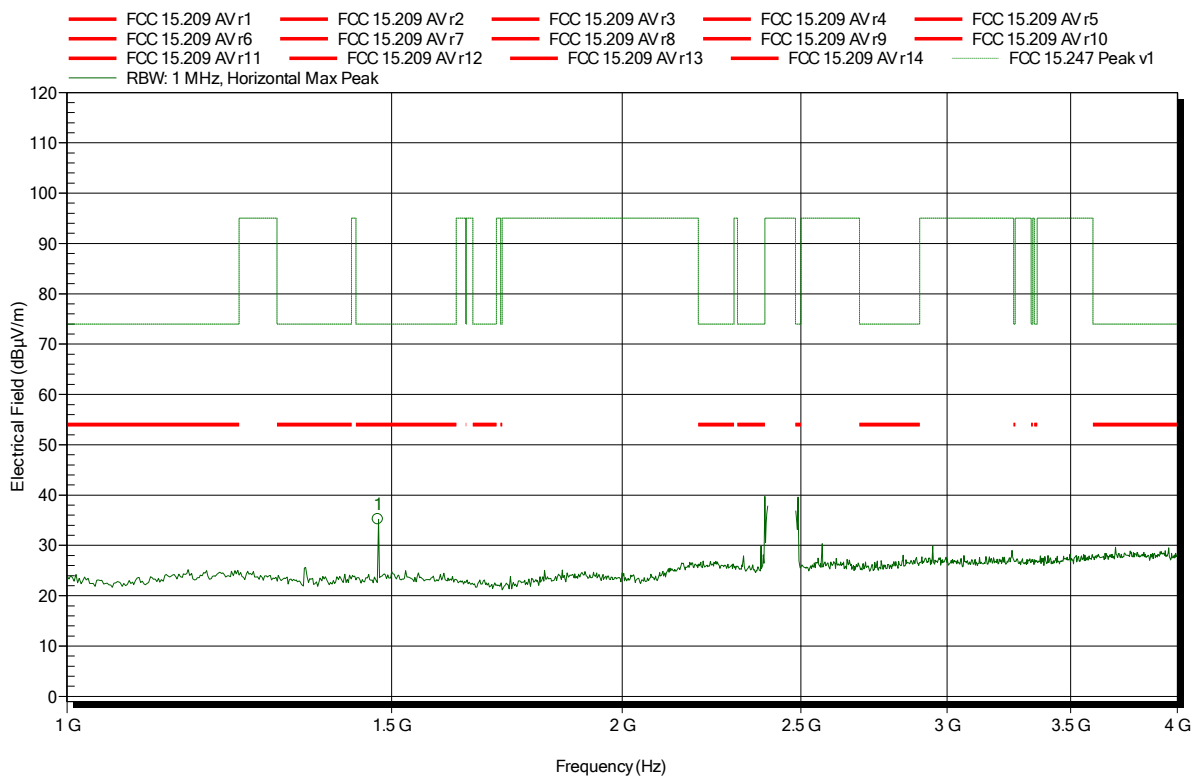


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.4749 GHz	35.21 dBµV/m	74 dBµV/m	-38.79 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 17

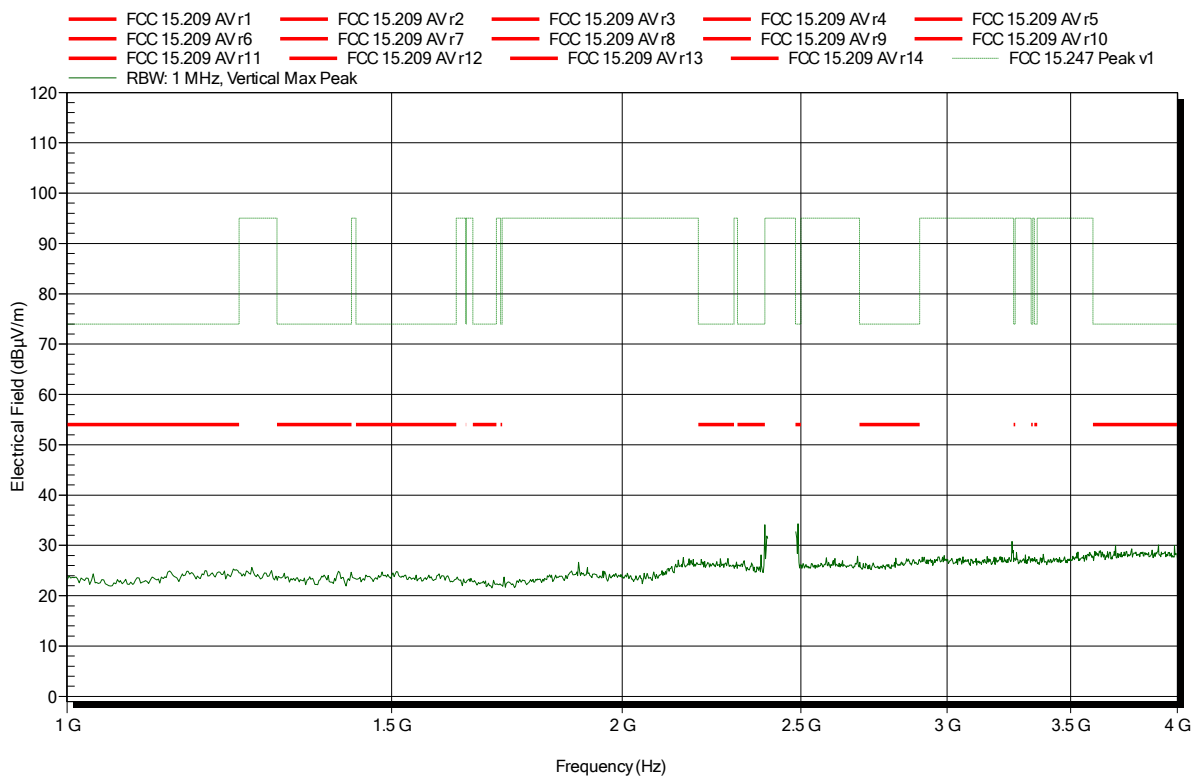


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 14

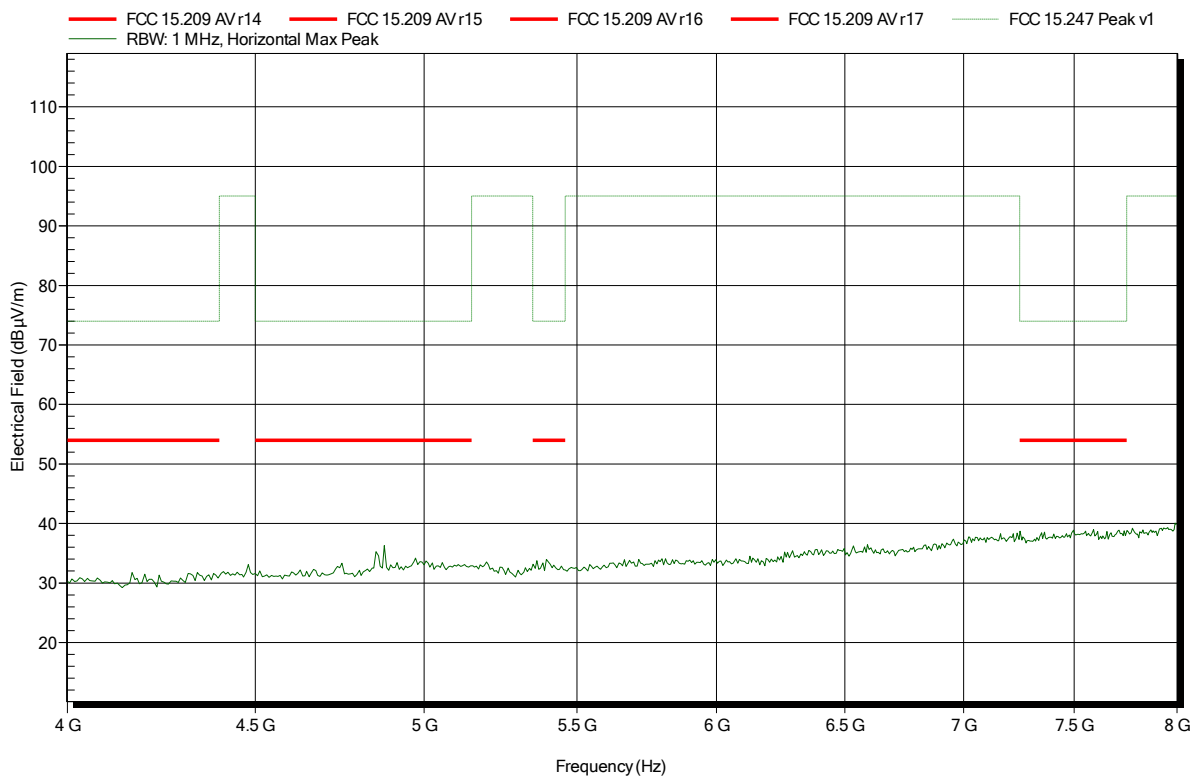


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 18

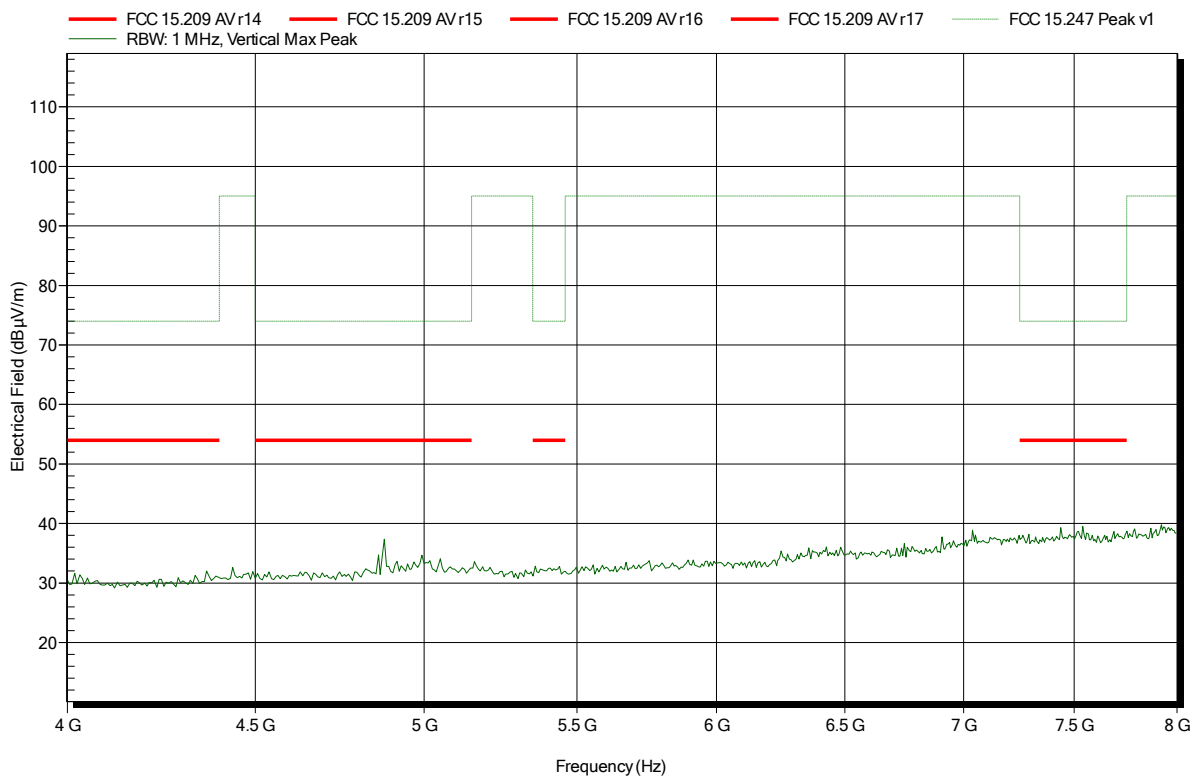


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 15

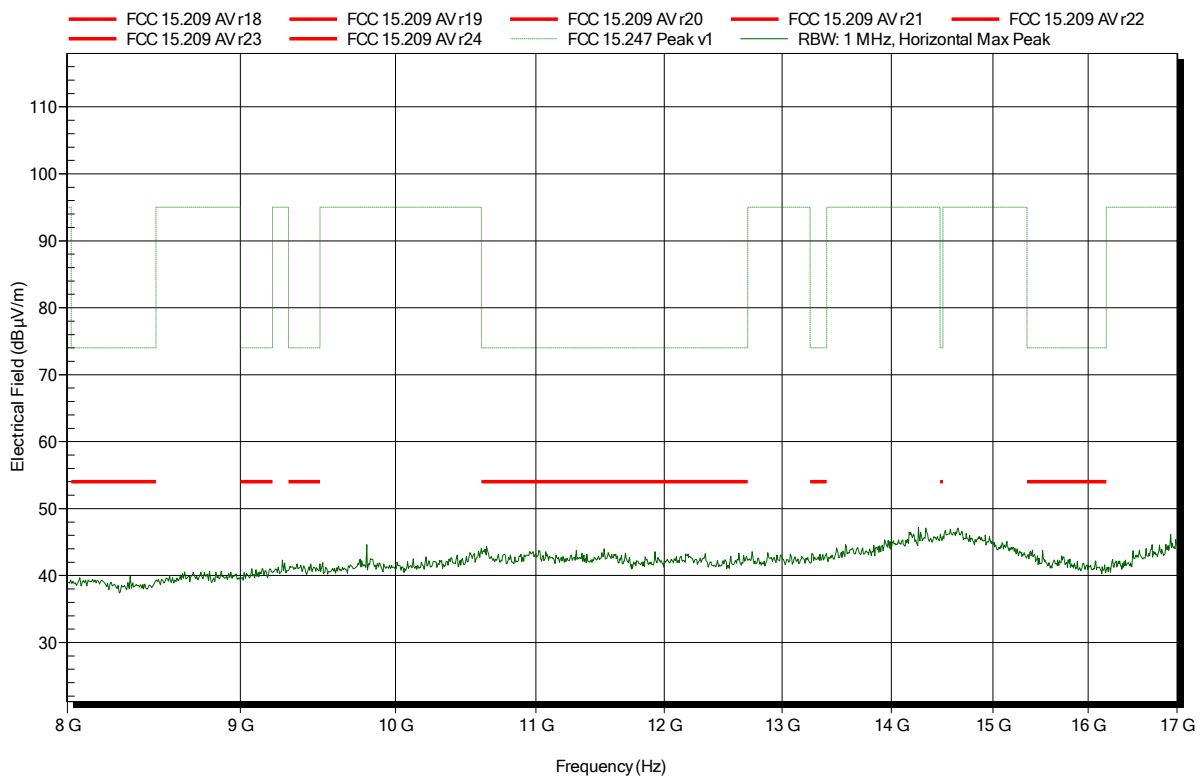


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 19

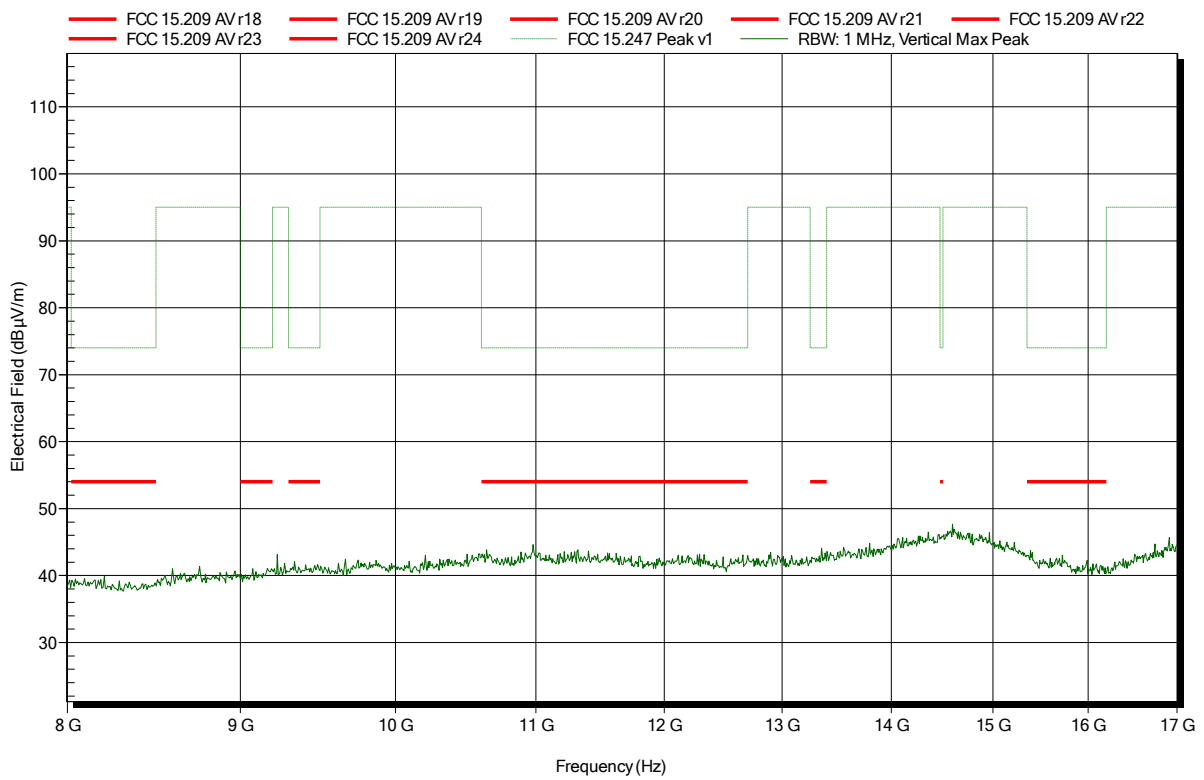


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Amplifier Research AT4560, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 16

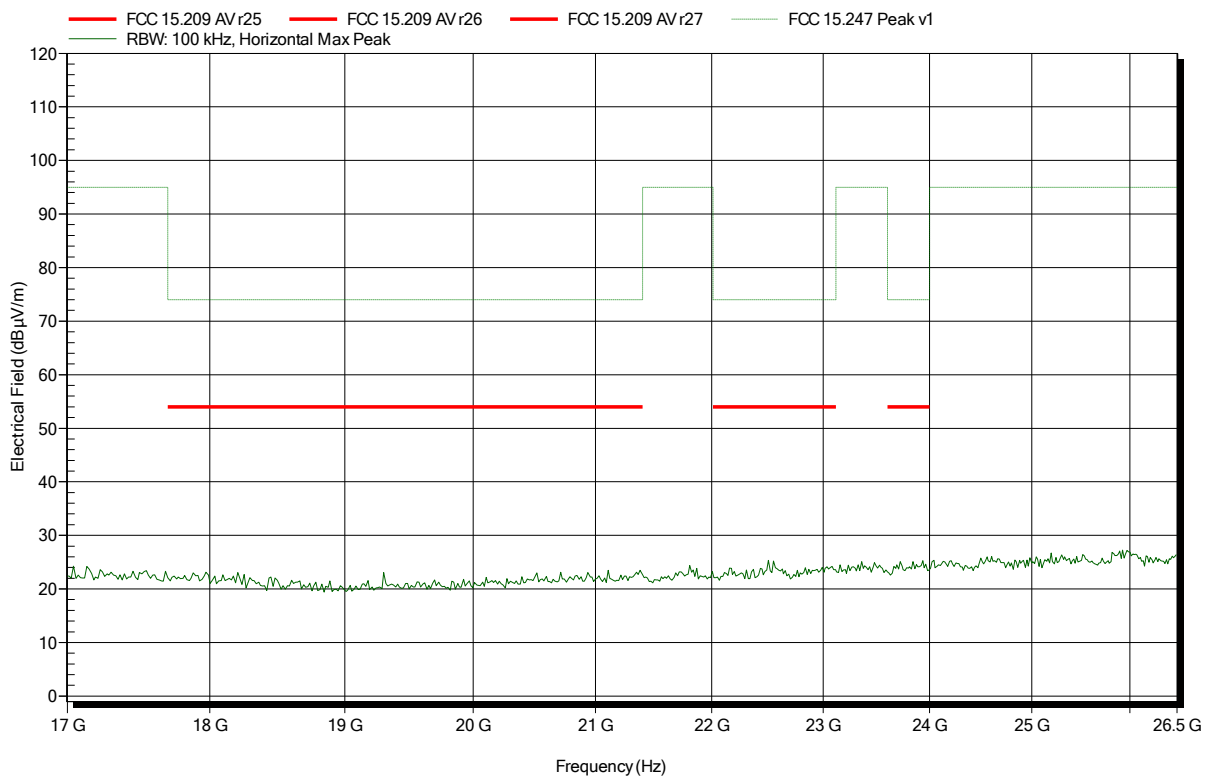




**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Amplifier Research AT4560, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2441 MHz  
 Test Date: 2019-02-09  
 Note:

Index 20

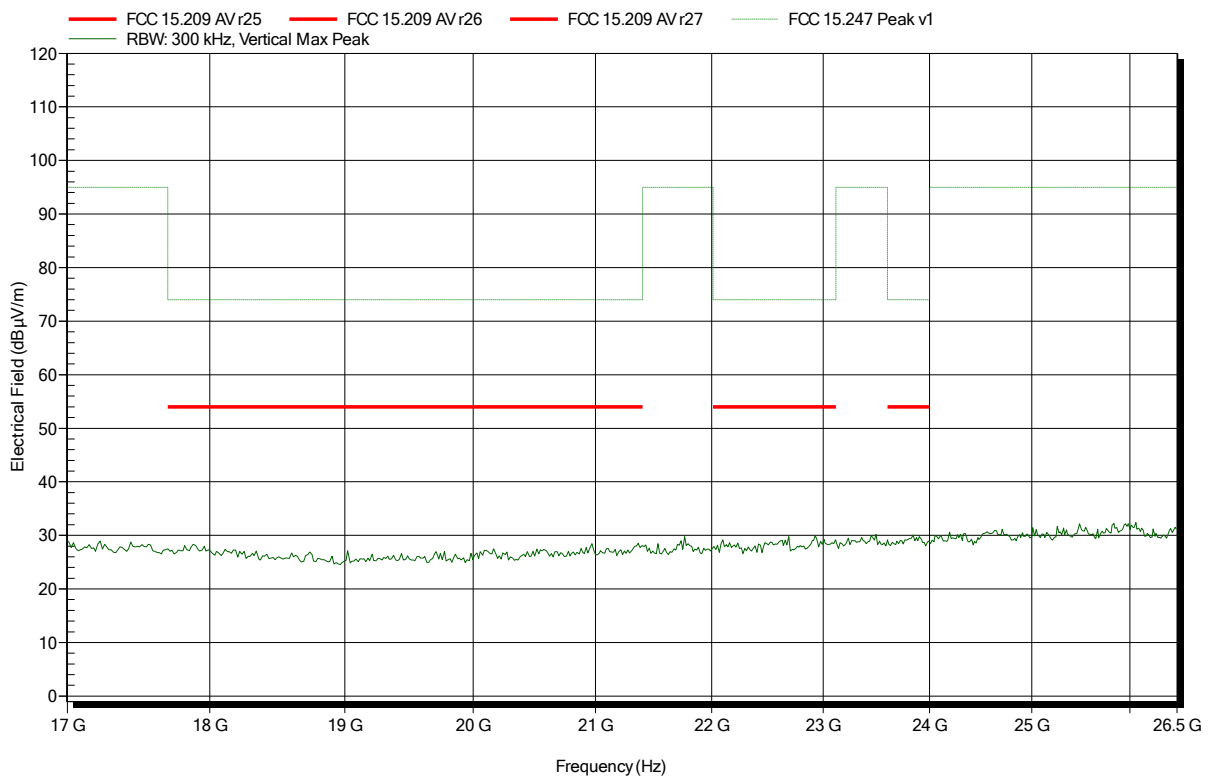


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 21

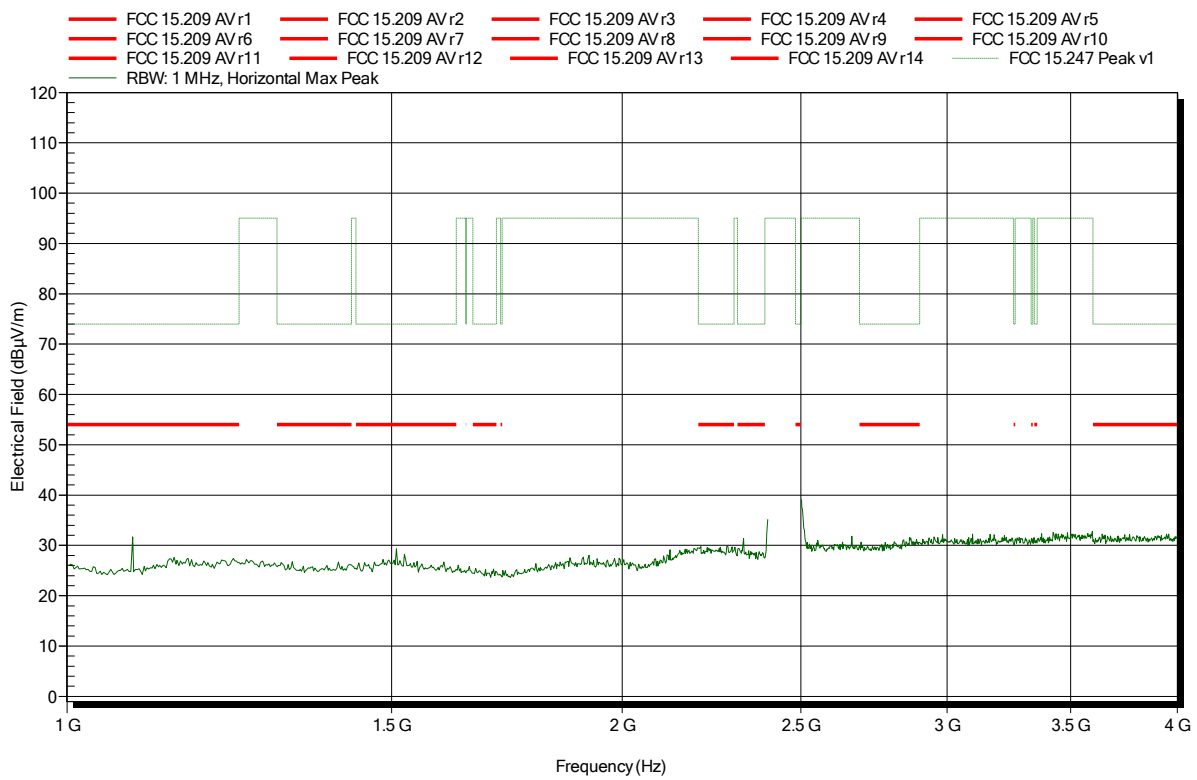


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 26

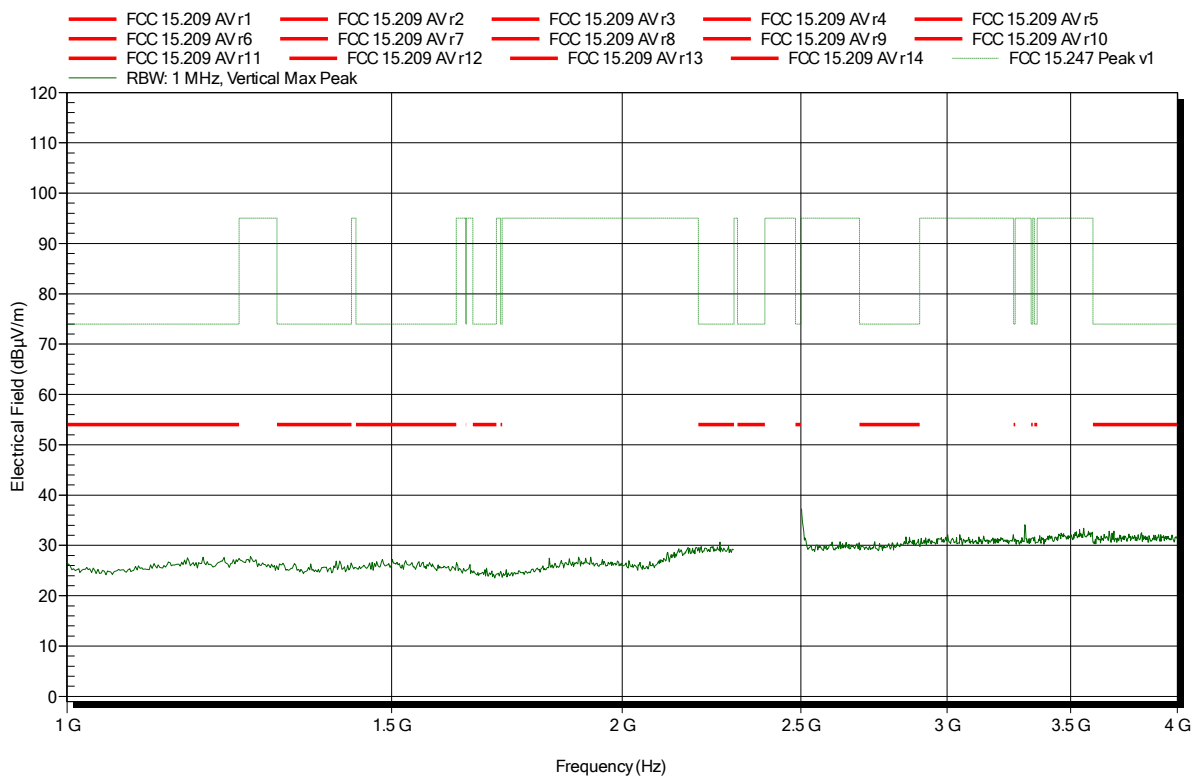


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note: upper bandedge

Index 22

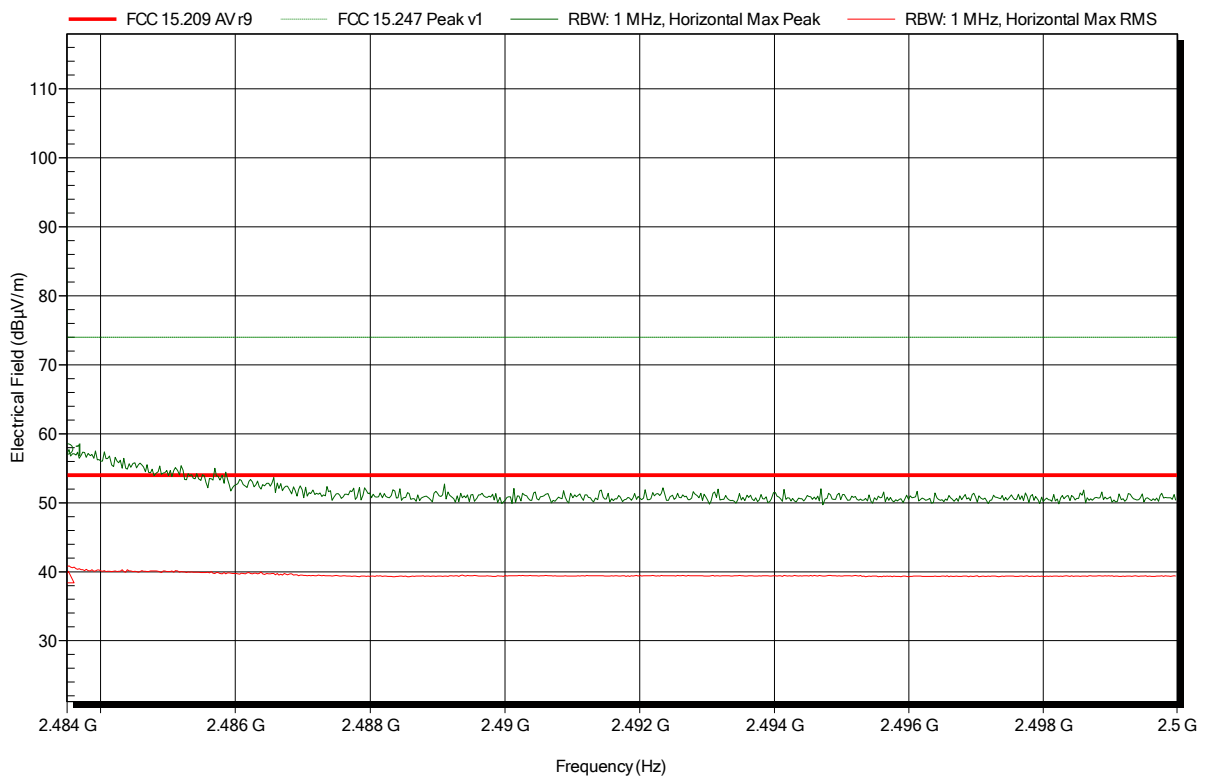


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	57.69 dBµV/m	74 dBµV/m	-16.31 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	39.24 dBµV/m	54 dBµV/m	-14.76 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note: upper bandedge

Index 27

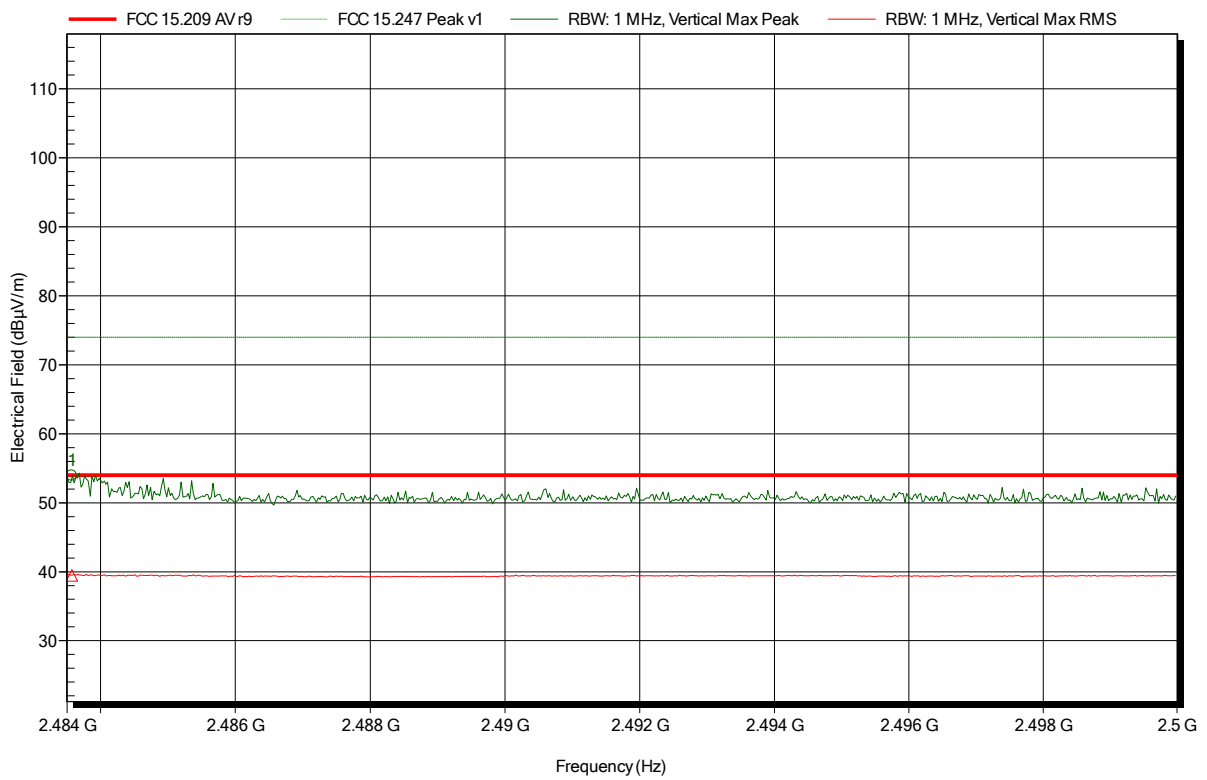


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4836 GHz	53.92 dBµV/m	74 dBµV/m	-20.08 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4836 GHz	39.45 dBµV/m	54 dBµV/m	-14.55 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 23

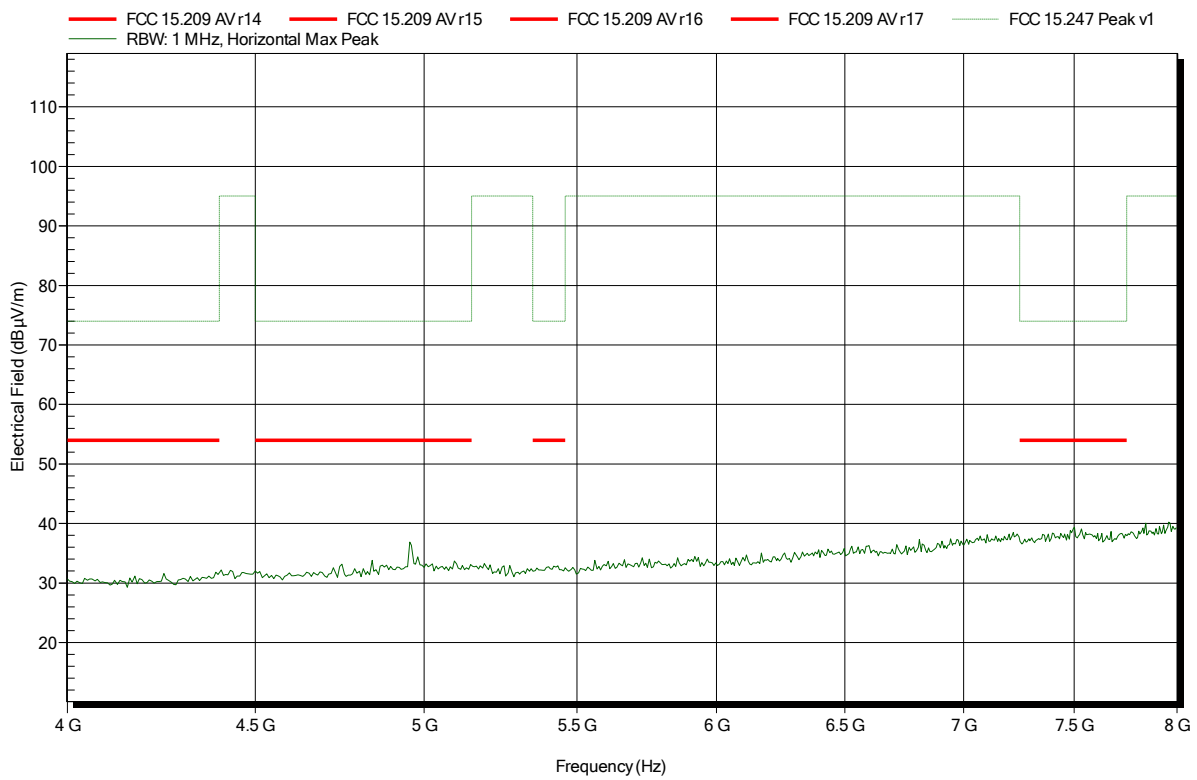


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 28

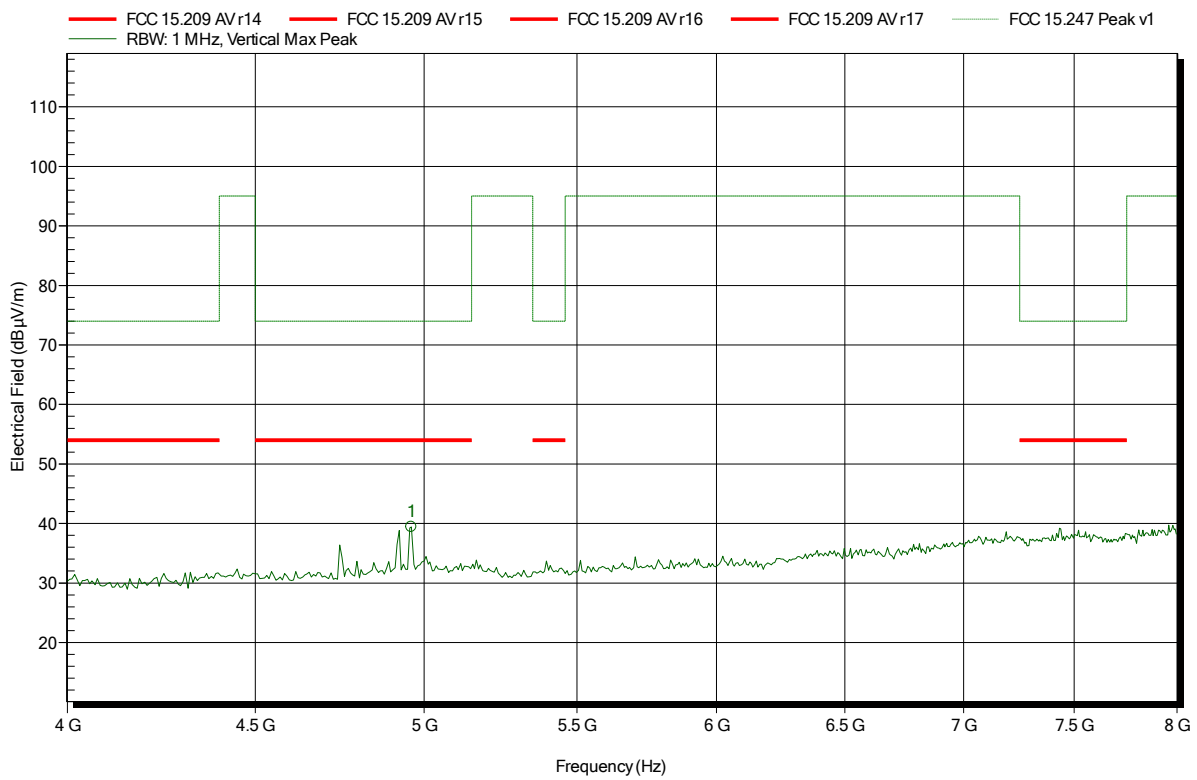


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	39.42 dBµV/m	74 dBµV/m	-34.58 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 24

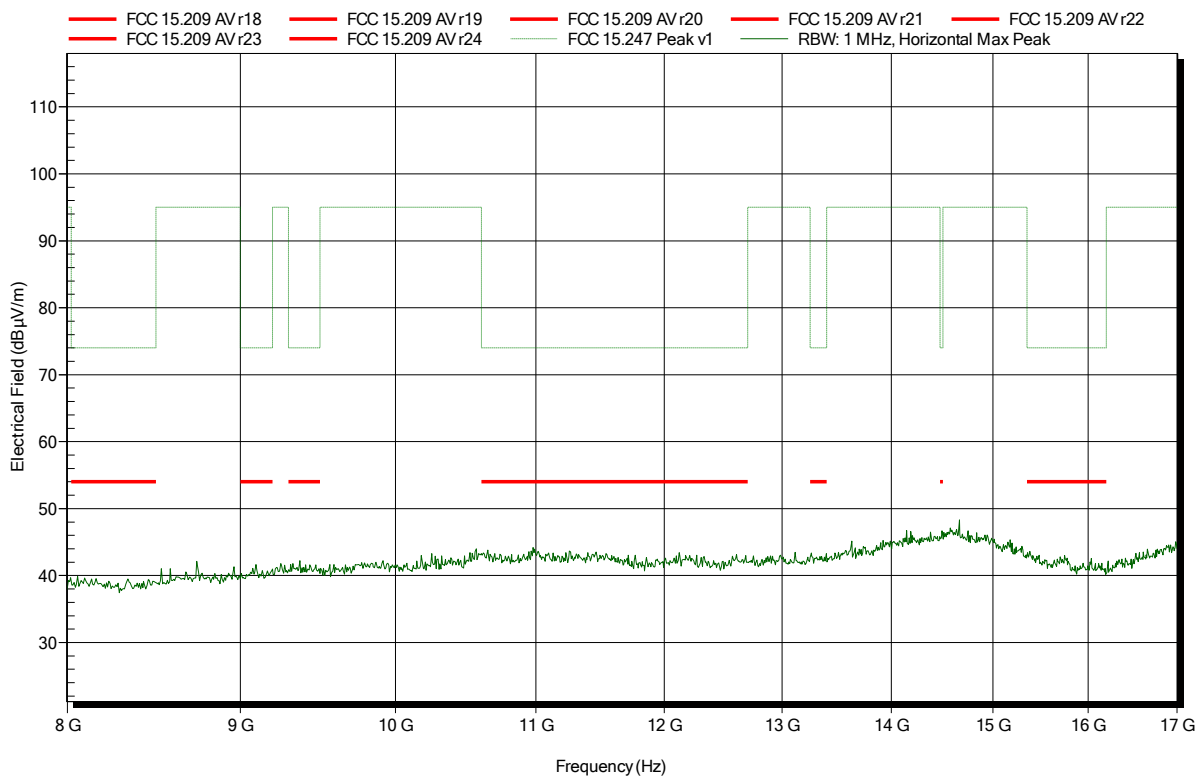




**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 29

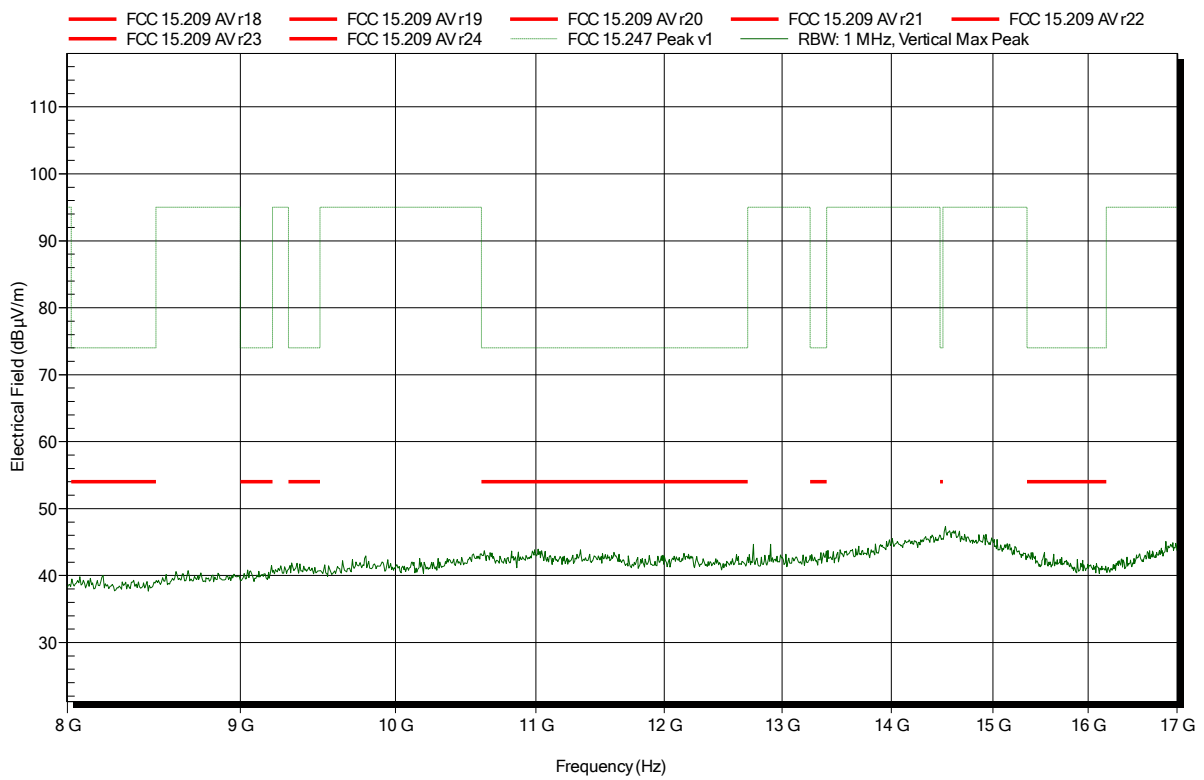


### Spurious emissions according to FCC 15.247

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Amplifier Research AT4560, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 25

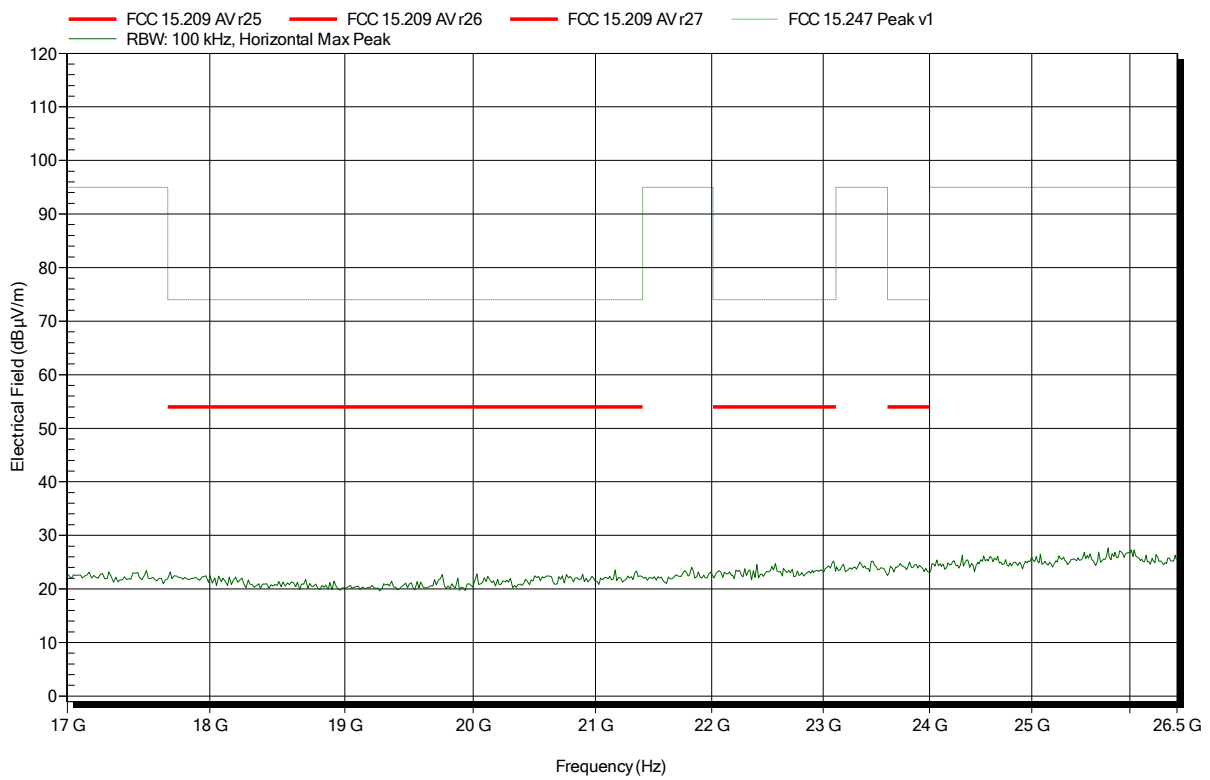


**Spurious emissions according to FCC 15.247**

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Amplifier Research AT4560, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTclassic; DH5; 2480 MHz  
 Test Date: 2019-02-09  
 Note:

Index 30

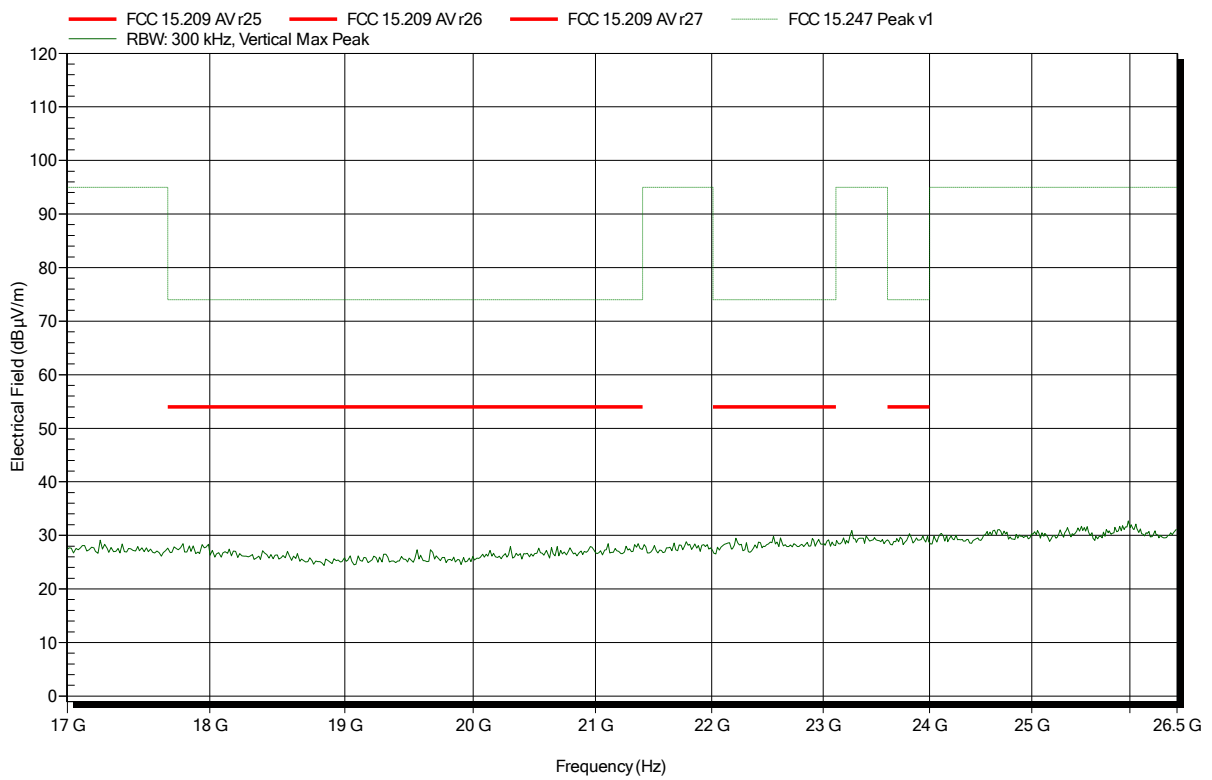


## ANNEX B Receiver spurious emissions

### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 37

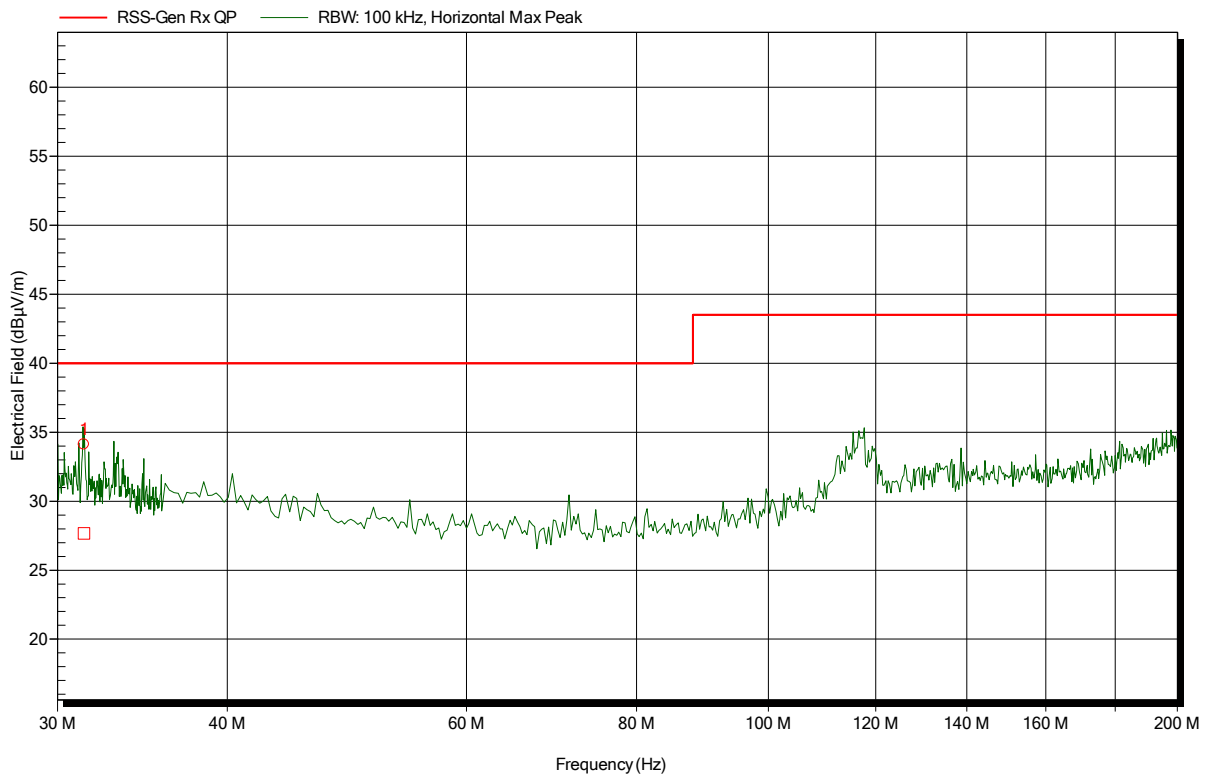


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
31.385 MHz	34.11 dBµV/m	40 dBµV/m	-5.89 dB	Pass	36 Degree	1.2 m
Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
31.385 MHz	27.67 dBµV/m	40 dBµV/m	-12.33 dB	Pass	36 Degree	1.2 m

### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 38

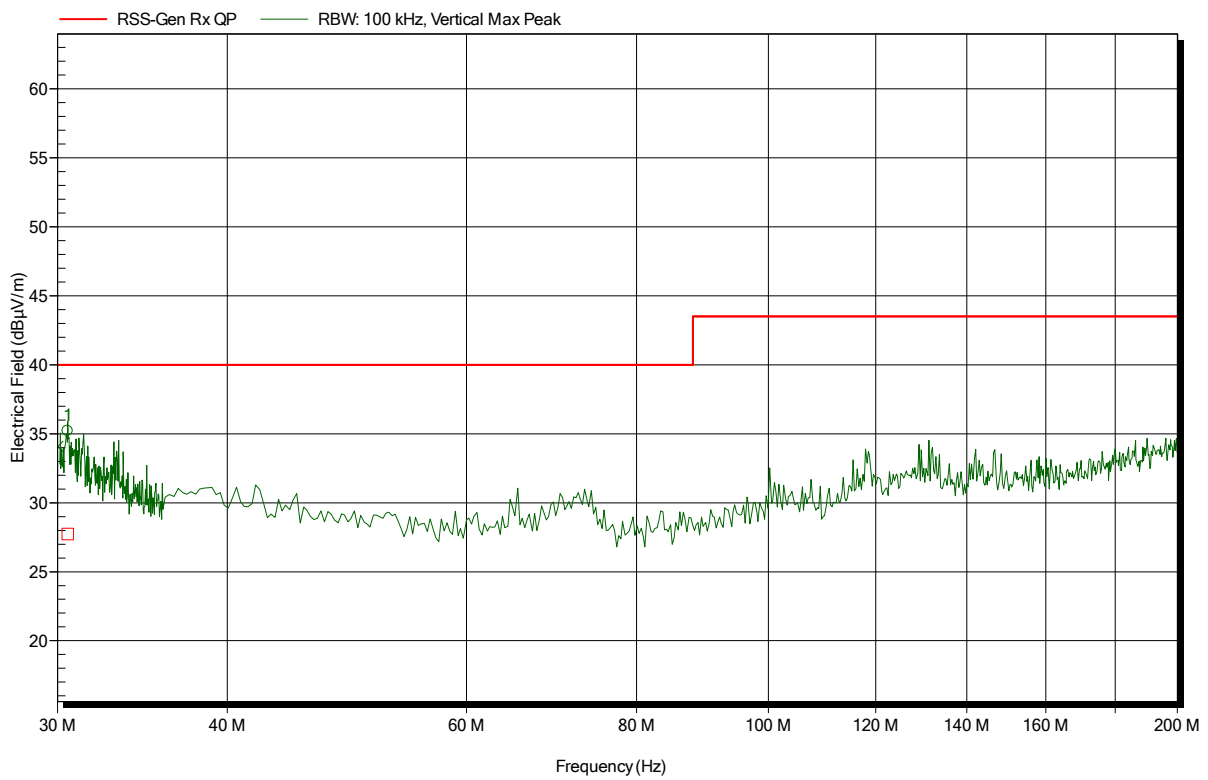


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
30.535 MHz	35.2 dBµV/m	40 dBµV/m	-4.8 dB	Pass	243 Degree	1.2 m
Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
30.535 MHz	27.73 dBµV/m	40 dBµV/m	-12.27 dB	Pass	243 Degree	1.2 m

## Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 36

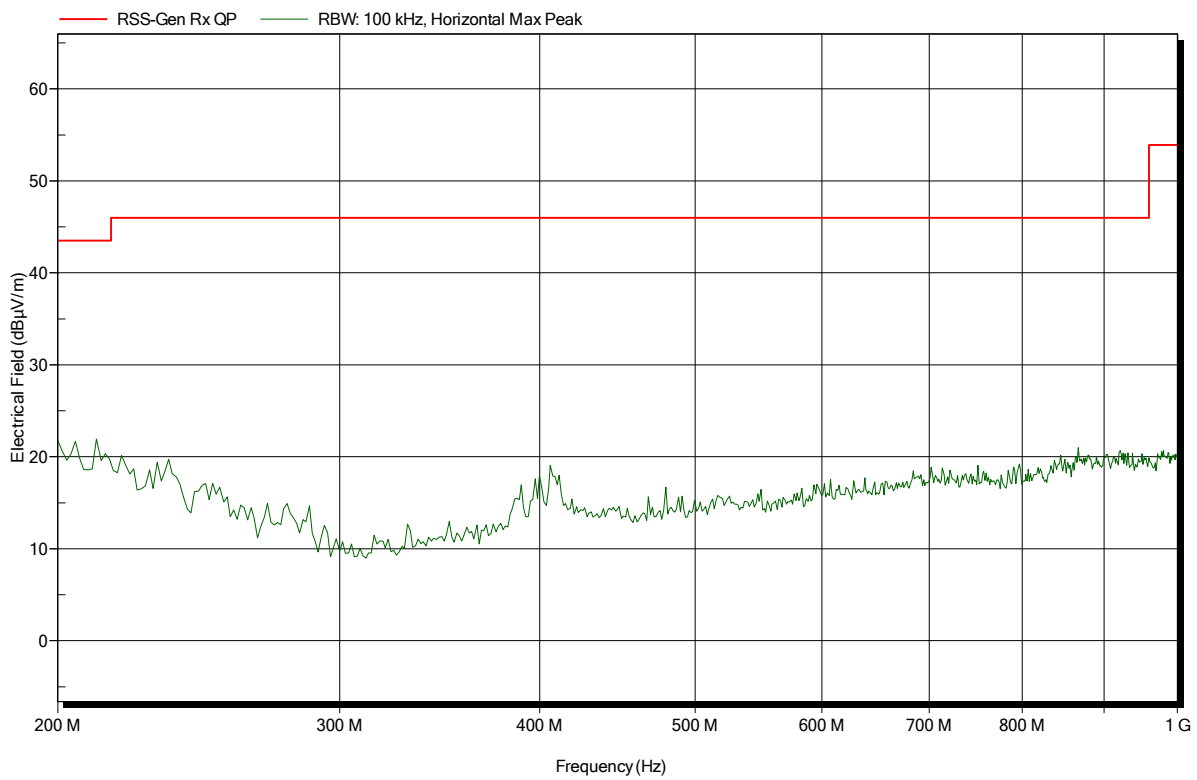


### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 35

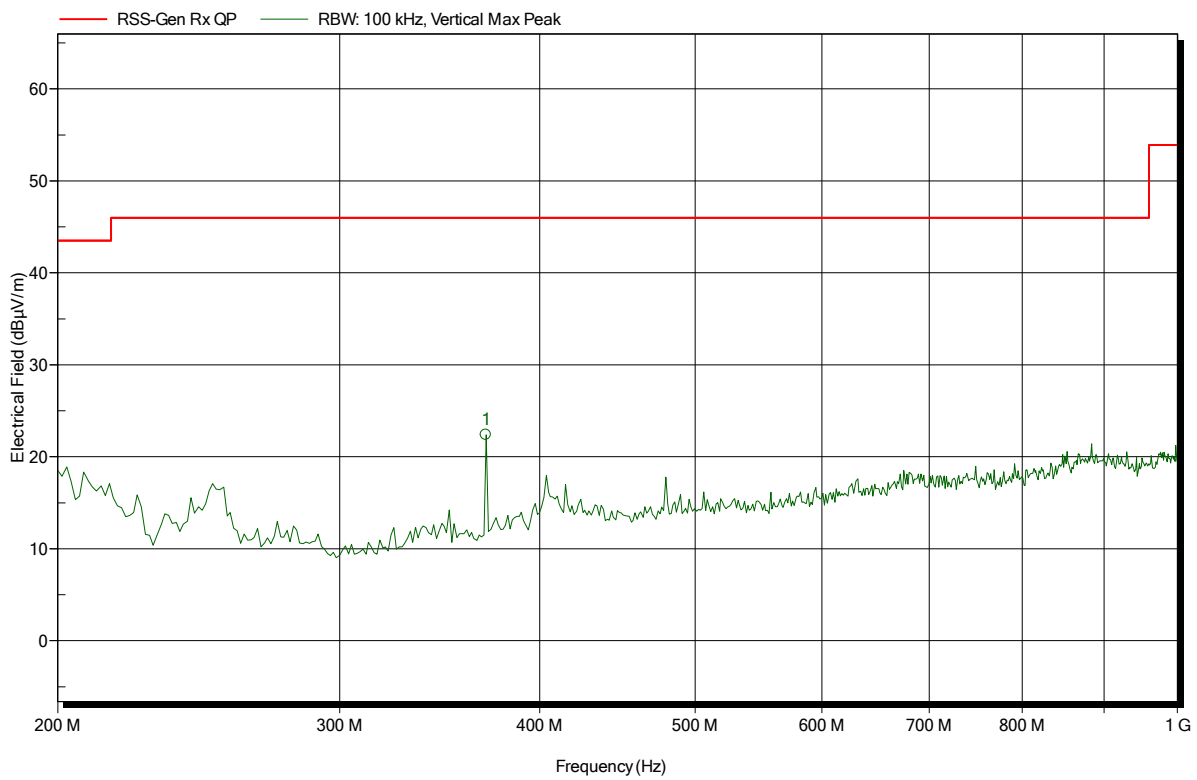


Frequency	Peak	Peak Limit	Peak Difference	Status	Angle	Height
370.24 MHz	22.39 dBµV/m	46 dBµV/m	-23.61 dB	Pass	247 Degree	1.2 m

### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 39

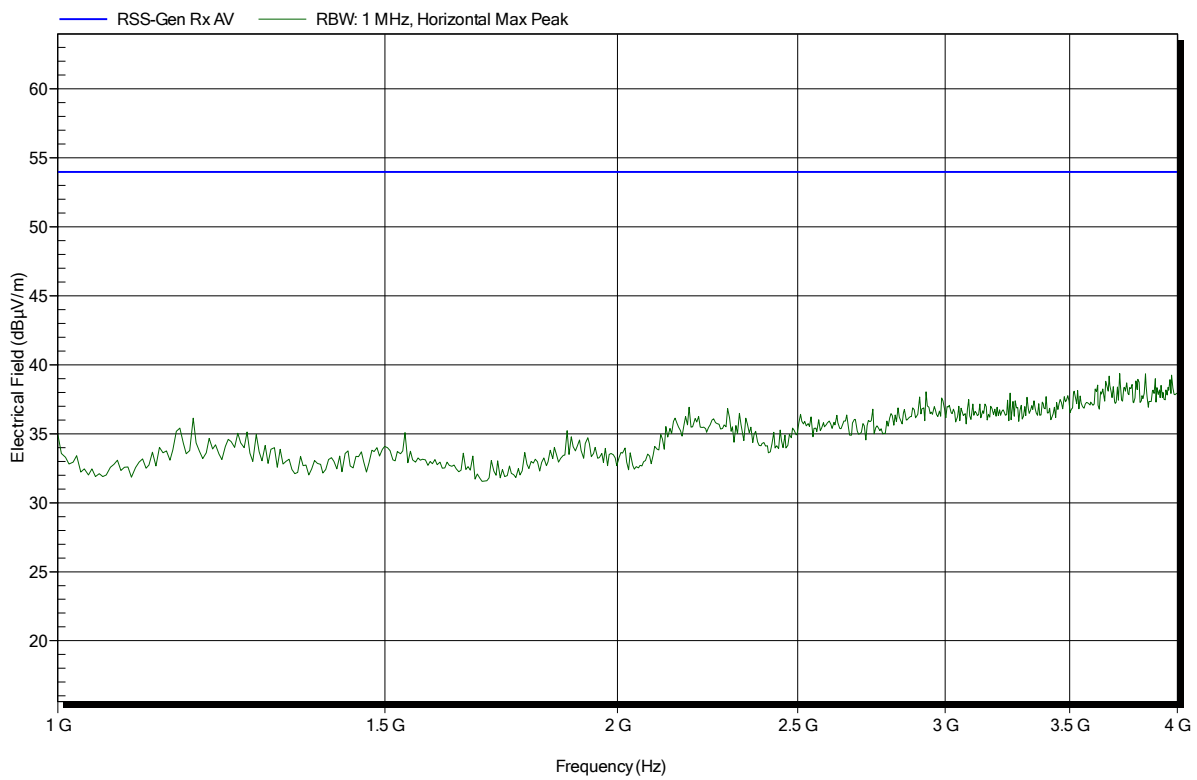




### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 42

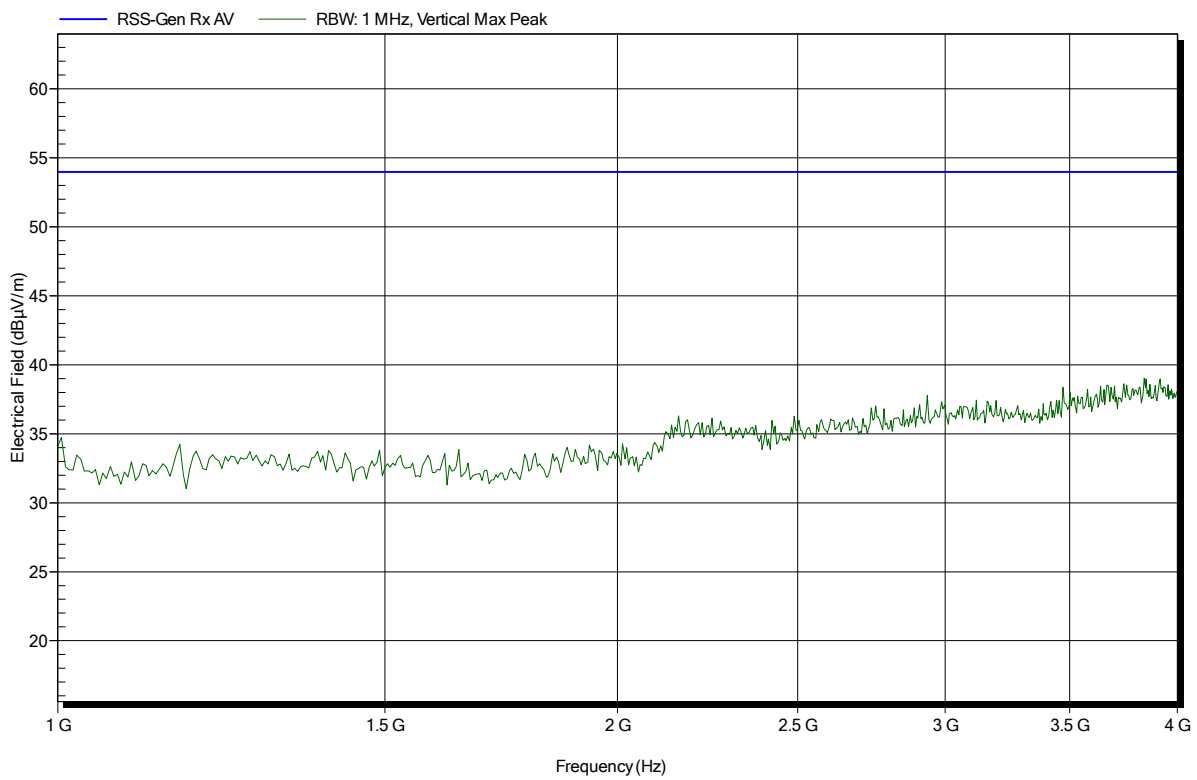


### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 40

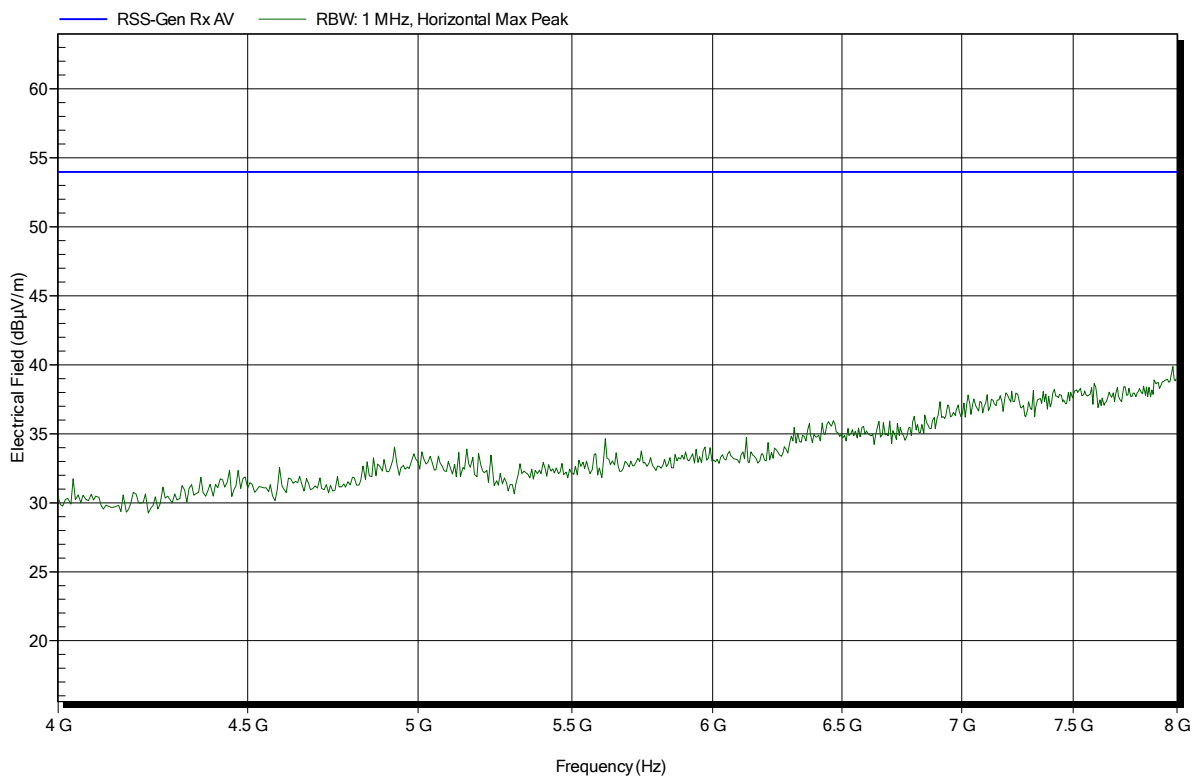


### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 43

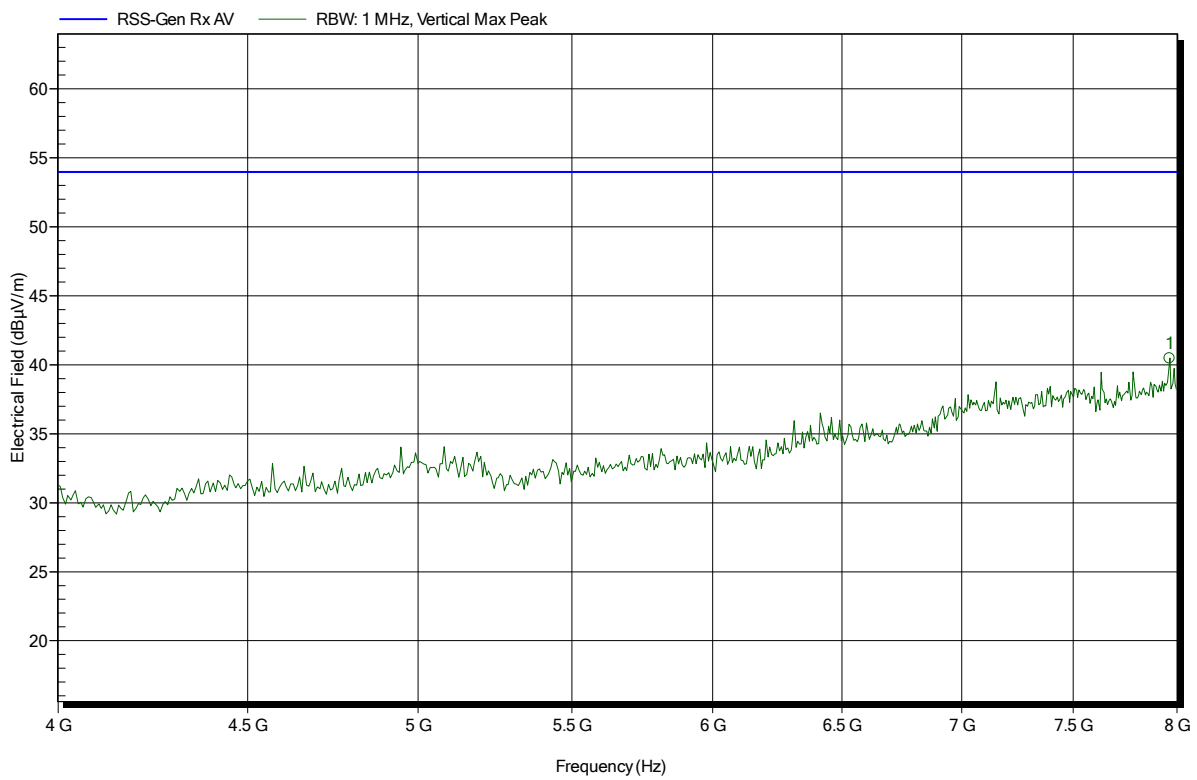


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.962 GHz	40.47 dBµV/m	53.98 dBµV/m	-13.51 dB	Pass

### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 41

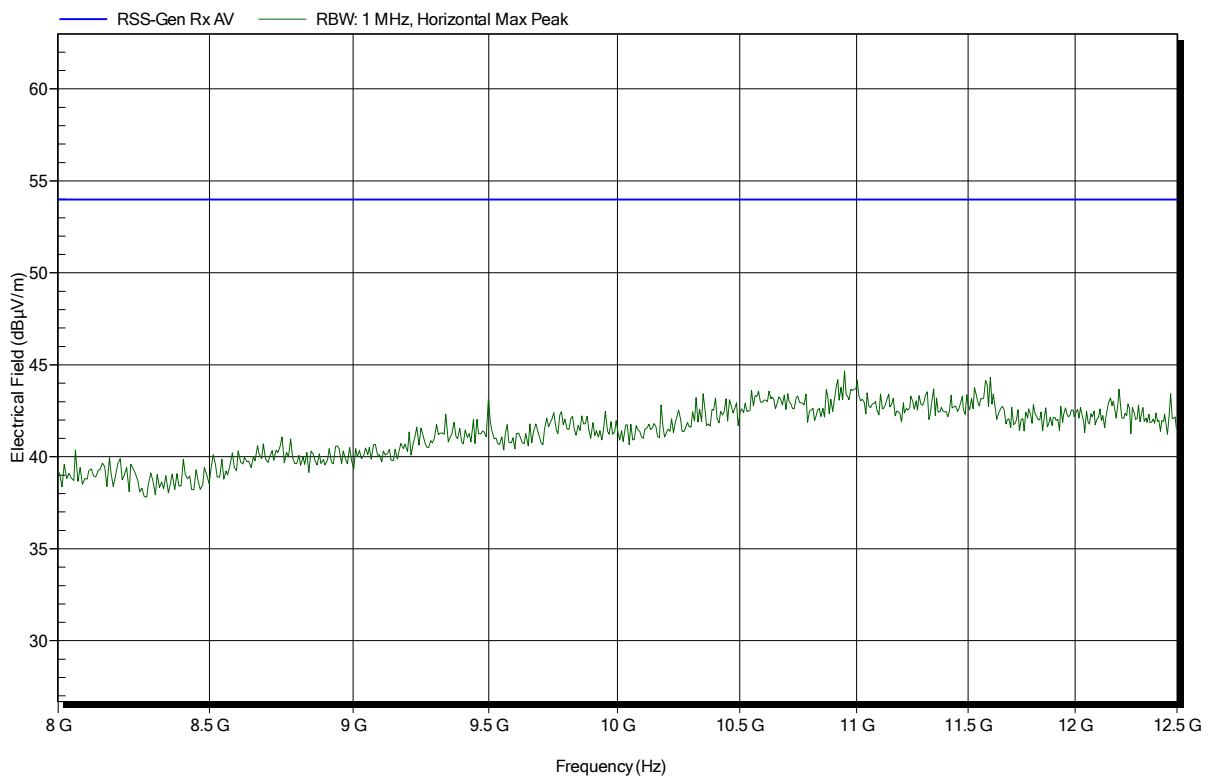


### Spurious emissions according to RSS-247 Issue 2

Project number: G0M-1812-7888

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 LTE Disto (US, CA)  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom: 22°C, Vnom: Vnom: 120V AC (intern 11.1 V DC)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: RX; BTclassic; scan mode  
 Test Date: 2019-02-09  
 Note:

Index 44

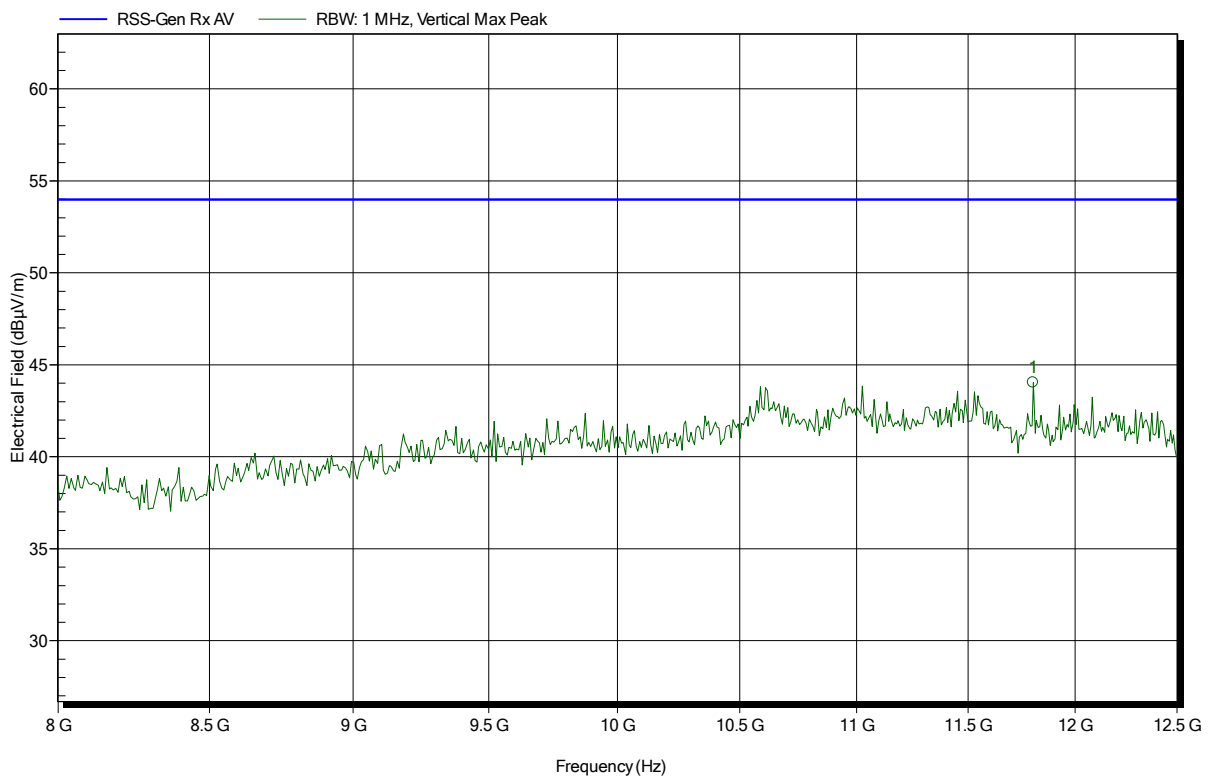

Frequency	Peak	Peak Limit	Peak Difference	Status
11.802 GHz	44.04 dBµV/m	53.98 dBµV/m	-9.94 dB	Pass