



# **FCC TEST REPORT**

**FCC ID: RFD-FLX100**

On Behalf of

**Leica Geosystems AG**

**Smart Antenna**

**Model No.: Zeno FLX100**

Prepared for : Leica Geosystems AG  
Address : Heinrich-Wild-Strasse, 9435 Heerbrugg, Switzerland

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2007144-C02-R11  
Date of Receipt : July 16, 2020  
Date of Test : July 16-August 6, 2020  
Date of Report : August 6, 2020  
Version Number : V0

## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards And Results .....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. General Information.....</b>	<b>7</b>
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators .....	8
2.5. Test Mode Description.....	8
2.6. Test Conditions .....	9
2.7. Test Facility .....	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List.....	10
<b>3. Maximum Peak Output power .....</b>	<b>12</b>
3.1. Limit .....	12
3.2. Test Procedure .....	12
3.3. Test Setup.....	12
3.4. Test Result .....	12
<b>4. Bandwidth.....</b>	<b>13</b>
4.1. Limit .....	13
4.2. Test Procedure .....	13
4.3. Test Result .....	13
<b>5. Carrier Frequency Separation.....</b>	<b>23</b>
5.1. Limit .....	23
5.2. Test Procedure .....	23
5.3. Test Result .....	23
<b>6. Number Of Hopping Channel.....</b>	<b>25</b>
6.1. Limit .....	25
6.2. Test Procedure .....	25
6.3. Test Result .....	25
<b>7. Dwell Time.....</b>	<b>27</b>
7.1. Test limit .....	27
7.2. Test Procedure .....	27
7.3. Test Result .....	27
<b>8. Radiated emissions.....</b>	<b>31</b>
8.1. Limit .....	31
8.2. Block Diagram of Test setup .....	32
8.3. Test Procedure .....	33
8.4. Test Result .....	33
<b>9. Band Edge Compliance .....</b>	<b>39</b>

---

9.1. Block Diagram of Test Setup.....	39
9.2. Limit .....	39
9.3. Test Procedure .....	39
9.4. Test Result .....	39
<b>10. Power Line Conducted Emissions .....</b>	<b>49</b>
10.1. Block Diagram of Test Setup.....	49
10.2. Limit .....	49
10.3. Test Procedure .....	49
10.4. Test Result .....	49
<b>11. Antenna Requirements .....</b>	<b>52</b>
11.1. Limit .....	52
11.2. Result .....	52
<b>12. Test setup photo .....</b>	<b>53</b>
12.1. Photos of Radiated emission.....	53
12.2. Photos of Conducted Emission test .....	54
<b>13. Photos of EUT .....</b>	<b>55</b>

### TEST REPORT DECLARATION

Applicant : Leica Geosystems AG  
 Address : Heinrich-Wild-Strasse, 9435 Heerbrugg, Switzerland  
 Manufacturer : Leica Geosystems AG  
 Address : Heinrich-Wild-Strasse, 9435 Heerbrugg, Switzerland  
 EUT Description : Smart Antenna  
 (A) Model No. : Zeno FLX100  
 (B) Trademark : Leica

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang  
 Project Engineer



Approved by (name + signature).....: Simple Guan  
 Project Manager



Date of issue..... : August 6, 2020

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	August 6, 2020	Initial released Issue	Lucas Pang

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

<b>Test Item</b>	<b>Standards Paragraph</b>	<b>Result</b>
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description	: Smart Antenna
Model Number	: Zeno FLX100
Diff	: N/A
Trademark	: Leica
Power supply	: DC 3.85V from battery, DC 5V for charging
Radio Technology	: Bluetooth V4.2 EDR
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Channel spacing	: 1MHz
Modulation type	: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type	: Internal antenna, Maximum Gain is 1dBi. (This value is supplied by applicant)
Software version	: V1.0
Hardware version	: V1.1
Connector cable loss	: 0.5dB(This value is supplied by applicant)
Intend use environment	: Residential, commercial and light industrial environment


## 2.2. Accessories of Device (EUT)

Accessories1	:	USB-PD Chager
Manufacturer	:	Kuantech (Cambodia) Corpration Limited
Model	:	KSA-45P-45W D5
Input	:	AC 100-240V, 50/60Hz, 1.5A
Output	:	DC 5V/3A, DC 9V/3A, DC 12V/3A, DC 15V/3A, DC 20V/2.25A, DC 3.3-16V/3A Max., 45W Max.

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Notebook PC	ACER	ZQT	--	--

## 2.4. Block Diagram of connection between EUT and simulators



## 2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi$ /4 DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
Charging		



## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

September 15, 2019 Certificated by IC

Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	1Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2019.09.06	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2019.09.06	1Year
Receiver	R&S	ESCI	101165	2019.09.05	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.06	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1Year
Cable	Resenberger	N/A	No.2	2019.09.05	1Year
Cable	Resenberger	N/A	No.3	2019.09.05	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2019.09.05	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.09.20	1 Year
Horn Antenna	A-INFOMW	LB-180100-KF	J211020657	2019.09.20	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2019.09.05	1 Year
Power Meter	Agilent	E9300A	MY41496625	2019.09.06	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	100631	2019.09.10	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2019.09.10	1 Year

<b>Software Information</b>			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

### 3. MAXIMUM PEAK OUTPUT POWER

#### 3.1.Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

#### 3.3.Test Setup



#### 3.4.Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Result
GFSK	2402	2.08	1.614	21	Pass
	2441	2.21	1.663	21	Pass
	2480	2.21	1.663	21	Pass
$\pi/4$ DQPSK	2402	2.44	1.754	21	Pass
	2441	2.63	1.832	21	Pass
	2480	<b>2.65</b>	<b>1.841</b>	21	Pass
8DPSK	2402	2.25	1.679	21	Pass
	2441	2.43	1.750	21	Pass
	2480	2.59	1.816	21	Pass

## 4. BANDWIDTH

### 4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


### 4.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.3.Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant 1	0.8679	0.9294	N/A	Pass
NVNT	1-DH1	2441	Ant 1	0.8733	0.890	N/A	Pass
NVNT	1-DH1	2480	Ant 1	0.8541	0.9028	N/A	Pass
NVNT	2-DH1	2402	Ant 1	1.1575	1.228	N/A	Pass
NVNT	2-DH1	2441	Ant 1	1.1705	1.2414	N/A	Pass
NVNT	2-DH1	2480	Ant 1	1.1665	1.2416	N/A	Pass
NVNT	3-DH1	2402	Ant 1	1.1429	1.2466	N/A	Pass
NVNT	3-DH1	2441	Ant 1	1.1531	1.228	N/A	Pass
NVNT	3-DH1	2480	Ant 1	1.1455	1.2338	N/A	Pass

OBW NVNT 1-DH1 2402MHz Ant1

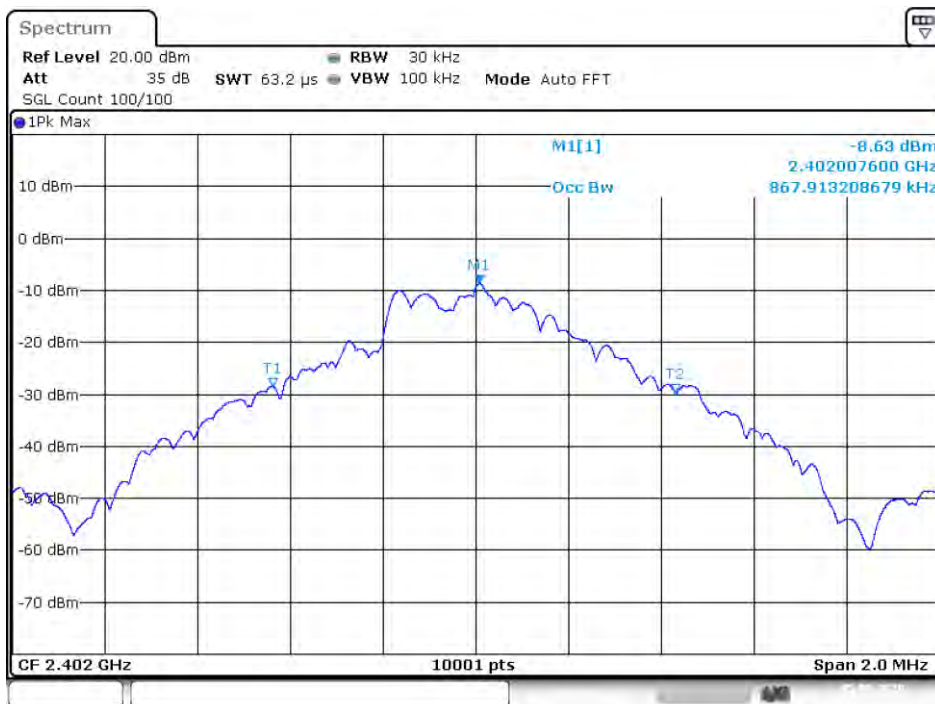


Date: 5.AUG.2020 03:57:19

-20 dB BW NVNT 1-DH1 2402MHz Ant1

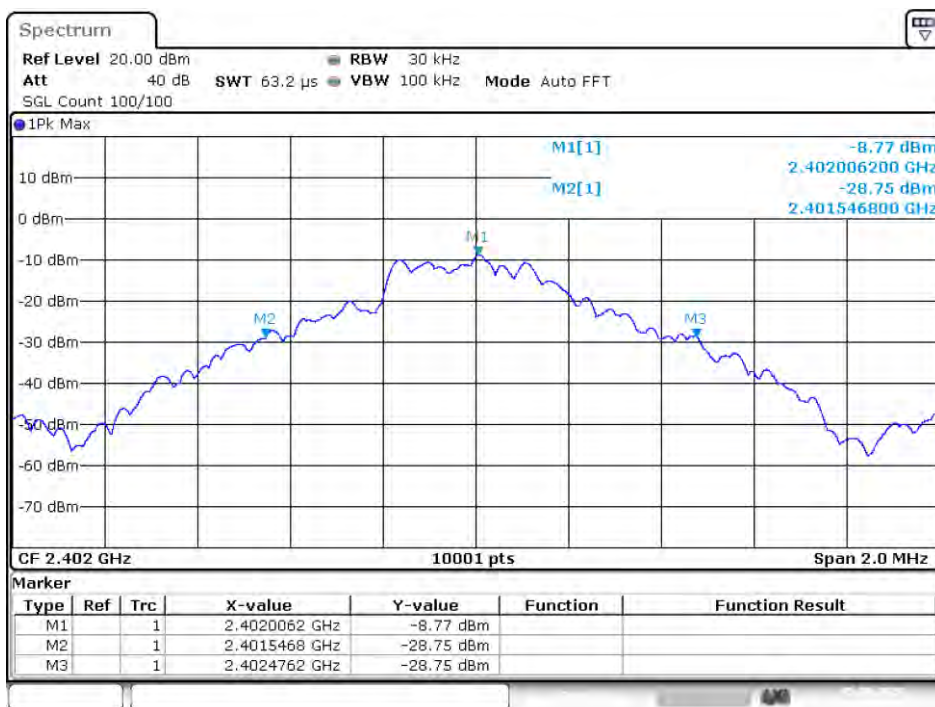


Date: 5.AUG.2020 03:57:24

OBW NVNT 1-DH1 2441MHz Ant1

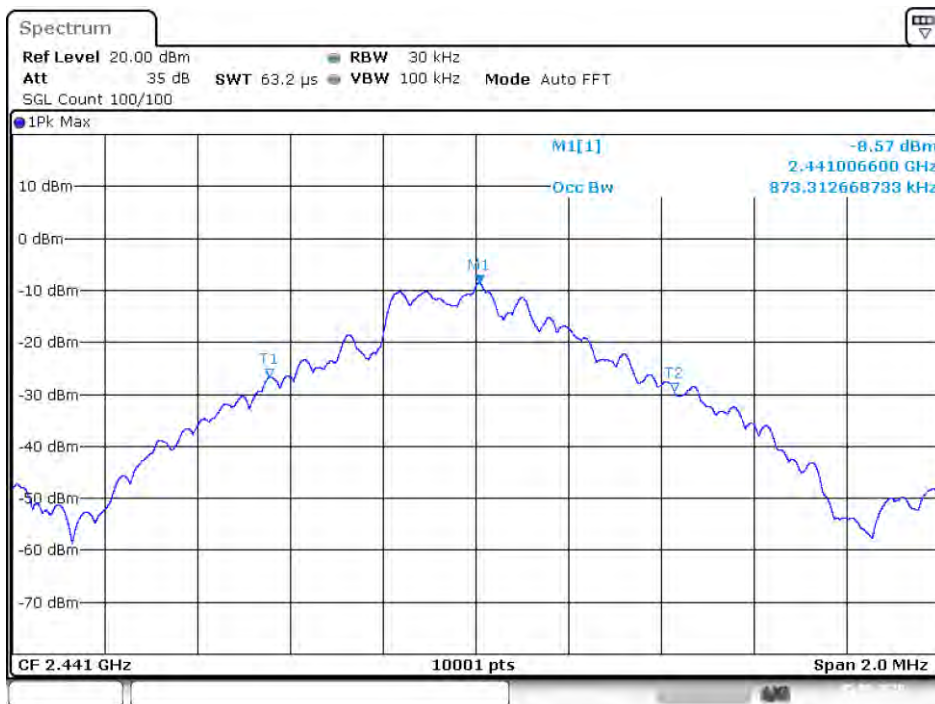


Date: 5.AUG.2020 04:03:33

-20 dB BW NVNT 1-DH1 2441MHz Ant1

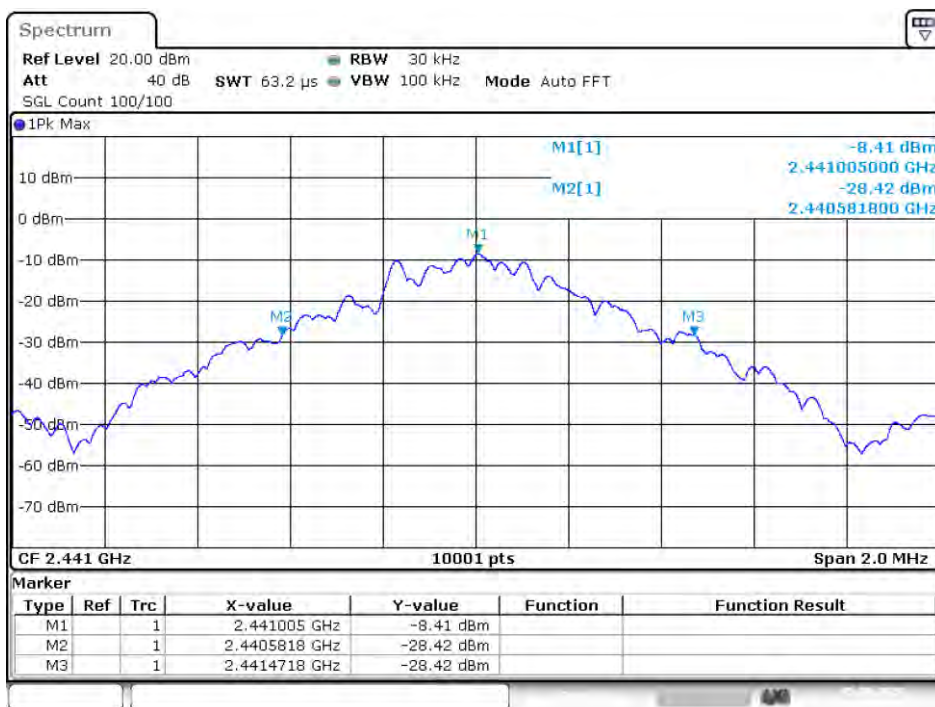

Date: 5.AUG.2020 04:03:36

OBW NVNT 1-DH1 2480MHz Ant1

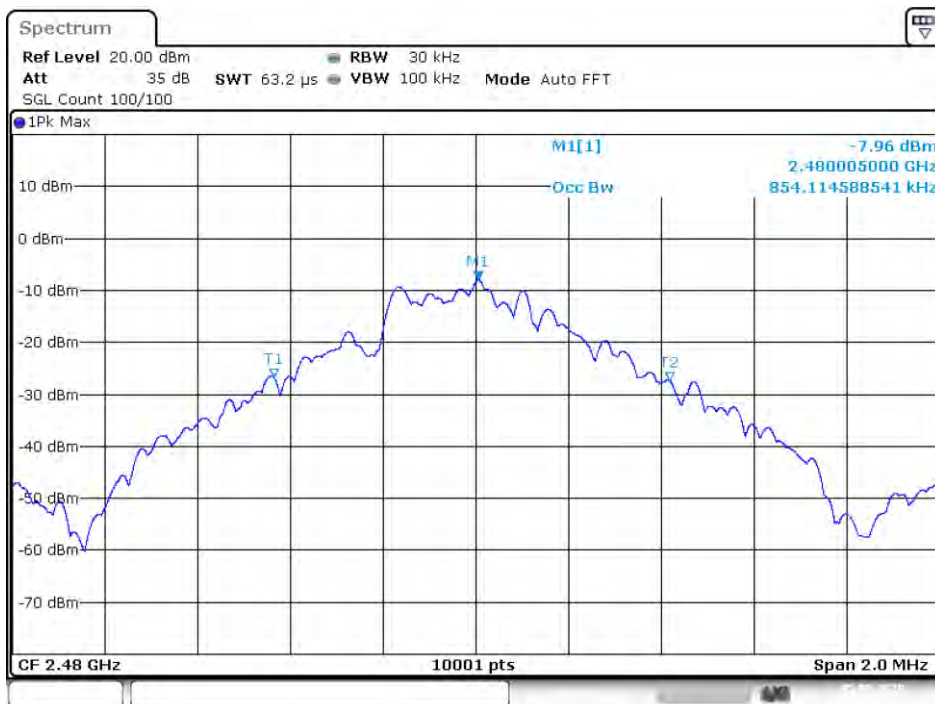

Date: 5.AUG.2020 04:04:42


-20 dB BW NVNT 1-DH1 2480MHz Ant1



Date: 5.AUG.2020 04:04:45




OBW NVNT 2-DH1 2402MHz Ant1

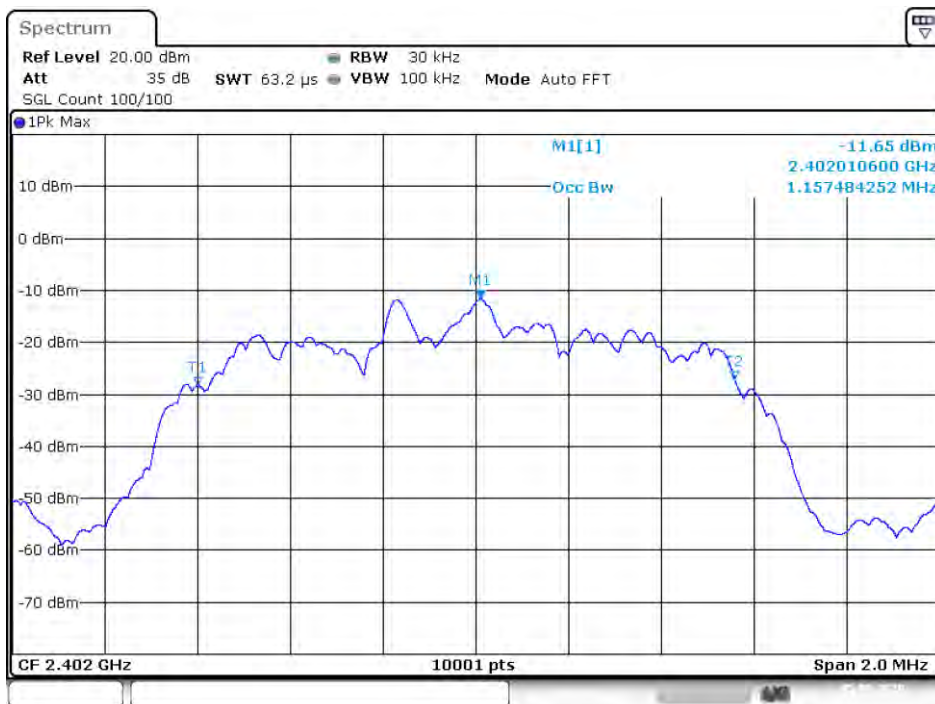


Date: 5.AUG.2020 04:34:49

-20 dB BW NVNT 2-DH1 2402MHz Ant1

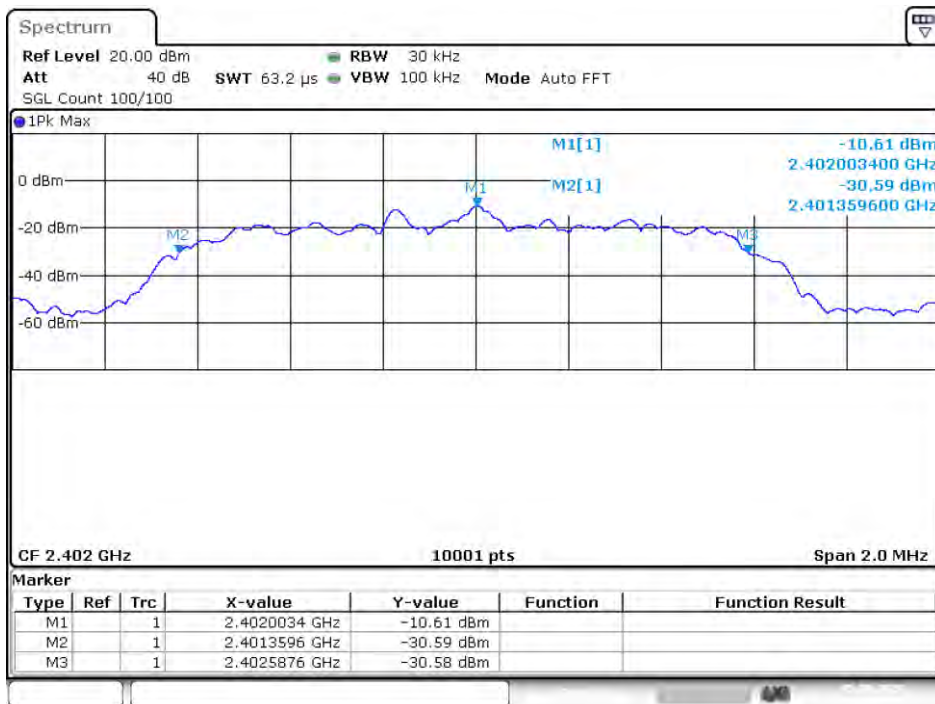


Date: 5.AUG.2020 04:34:52

OBW NVNT 2-DH1 2441MHz Ant1

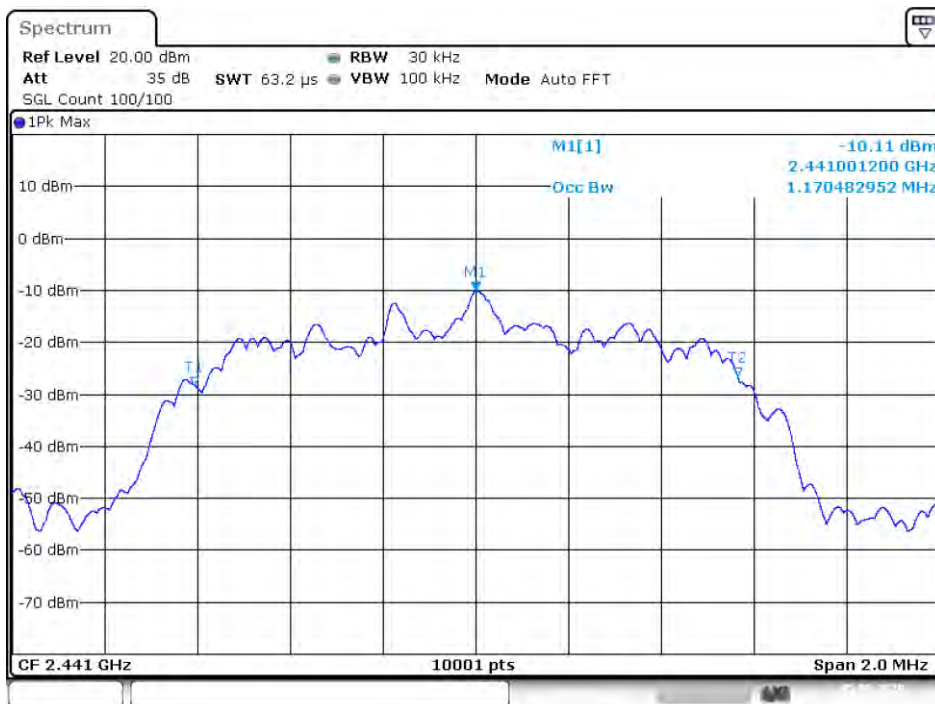


Date: 5.AUG.2020 04:36:03

-20 dB BW NVNT 2-DH1 2441MHz Ant1

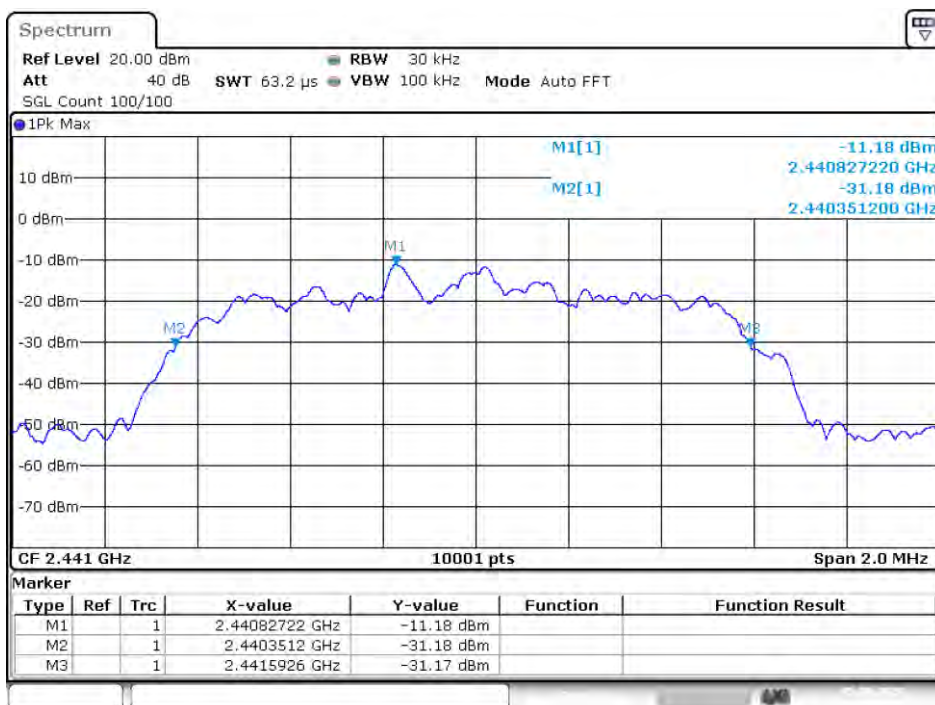


Date: 5.AUG.2020 04:36:06

OBW NVNT 2-DH1 2480MHz Ant1

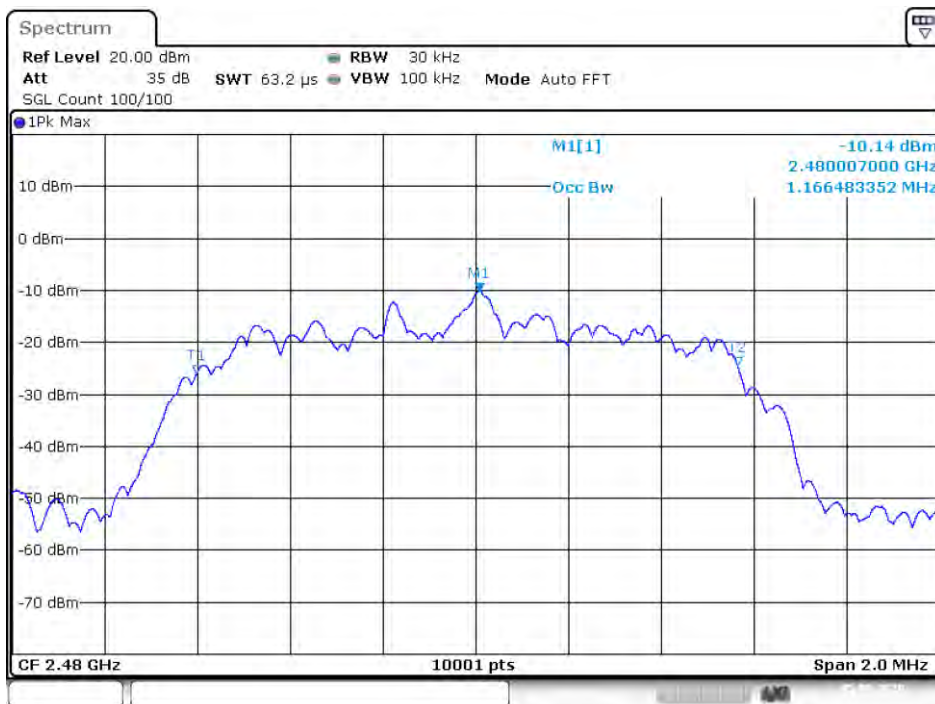


Date: 5.AUG.2020 04:37:22

-20 dB BW NVNT 2-DH1 2480MHz Ant1

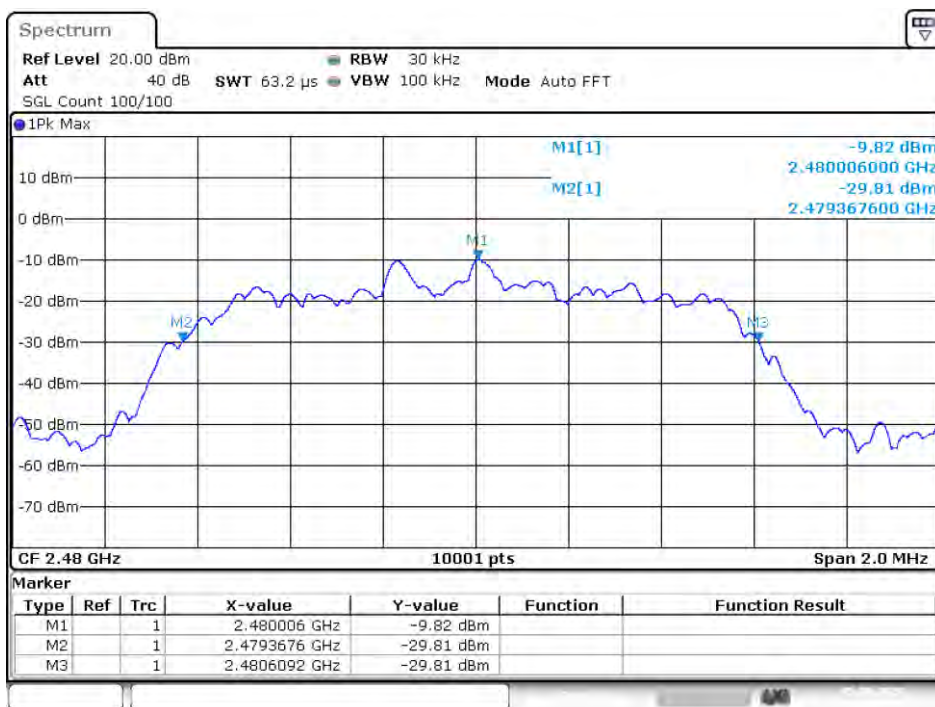


Date: 5.AUG.2020 04:37:25

OBW NVNT 3-DH1 2402MHz Ant1

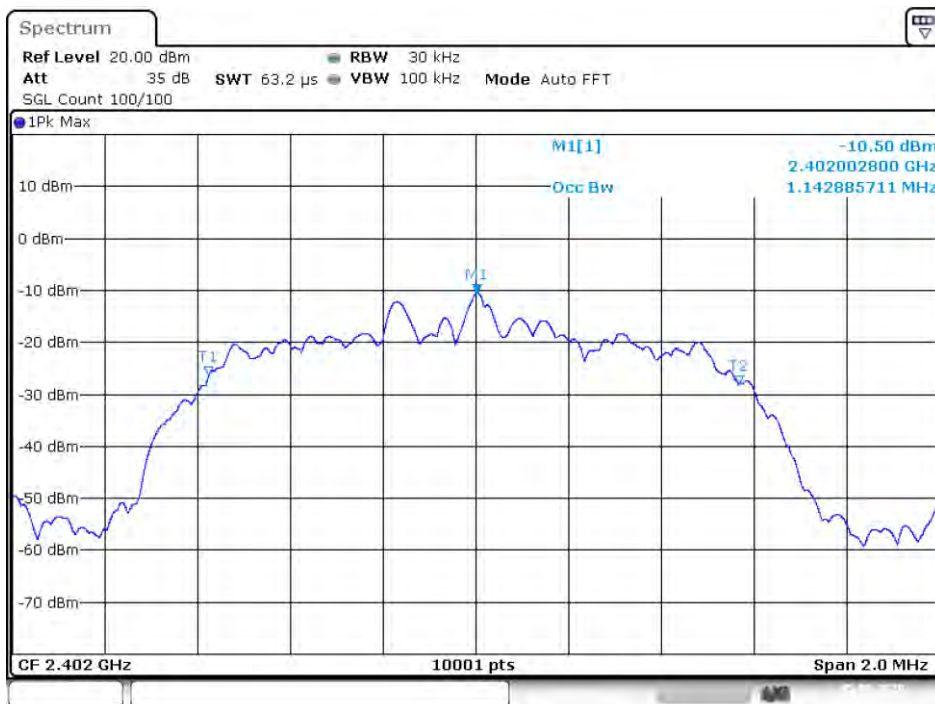

Date: 5.AUG.2020 04:42:02


-20 dB BW NVNT 3-DH1 2402MHz Ant1

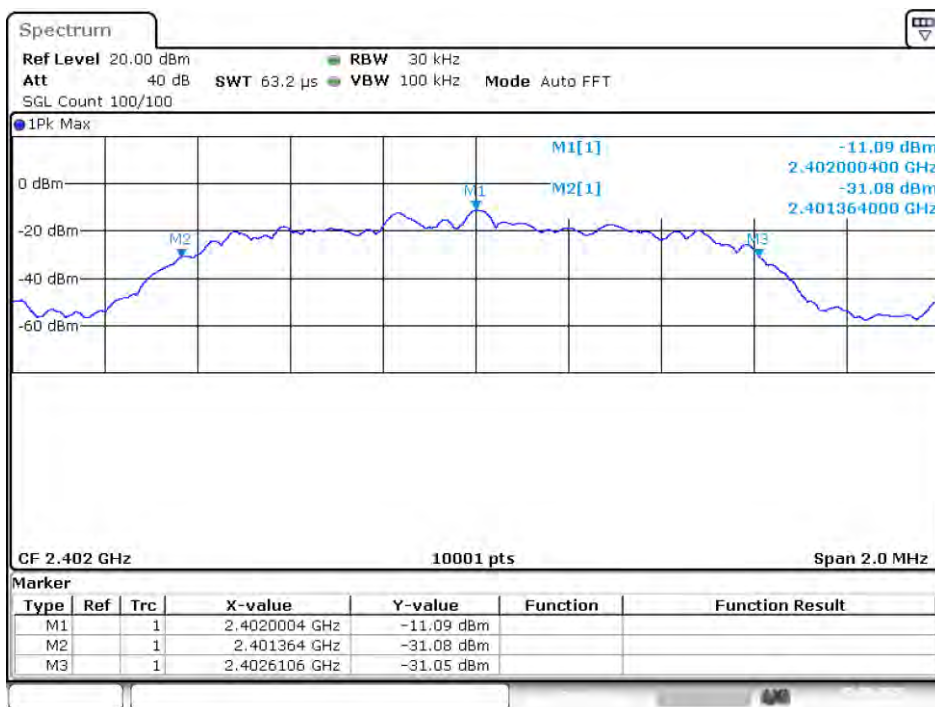

Date: 5.AUG.2020 04:42:05




OBW NVNT 3-DH1 2441MHz Ant1

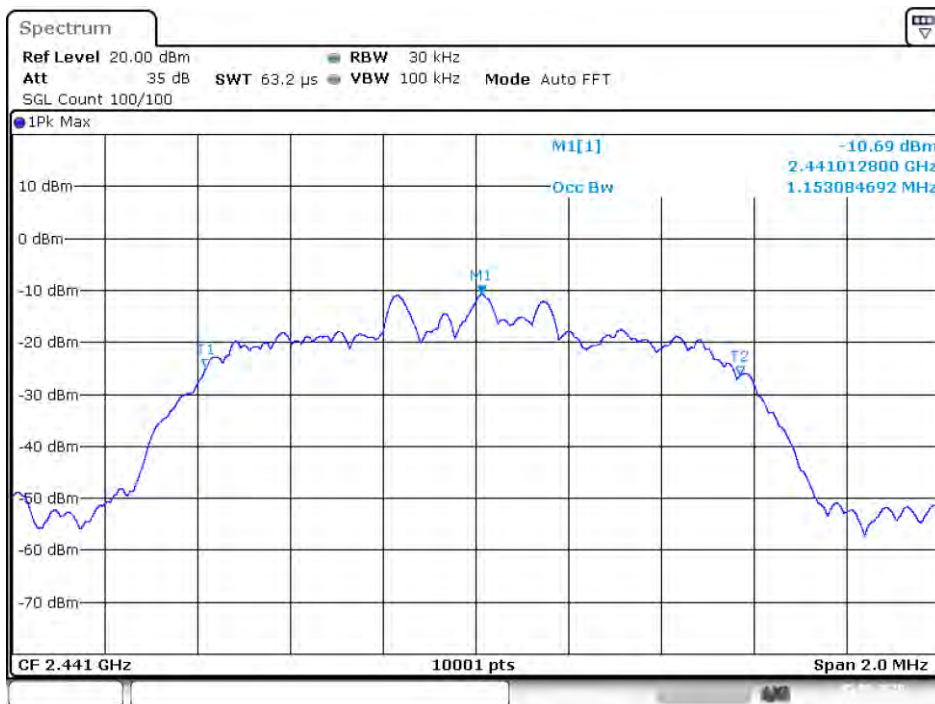


Date: 5.AUG.2020 04:43:27

-20 dB BW NVNT 3-DH1 2441MHz Ant1

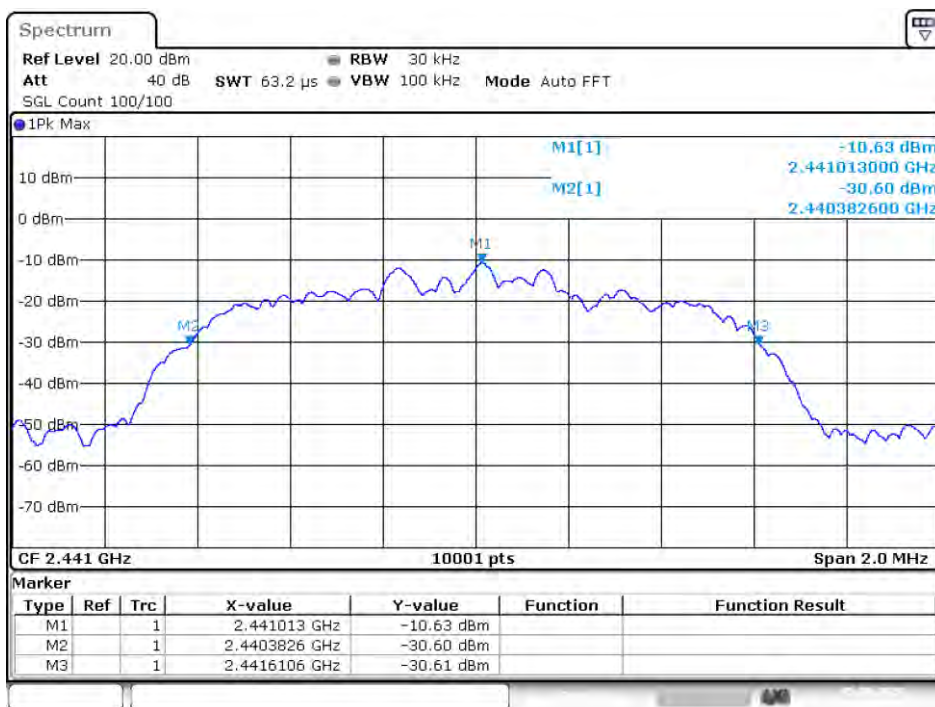


Date: 5.AUG.2020 04:43:30

OBW NVNT 3-DH1 2480MHz Ant1

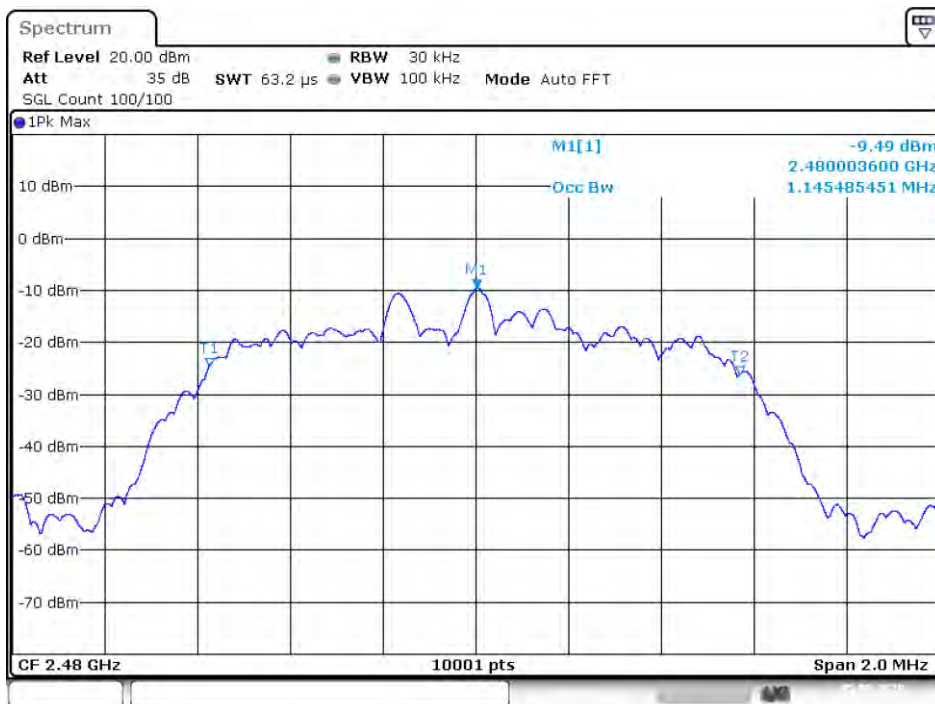

Date: 5.AUG.2020 04:44:49

-20 dB BW NVNT 3-DH1 2480MHz Ant1

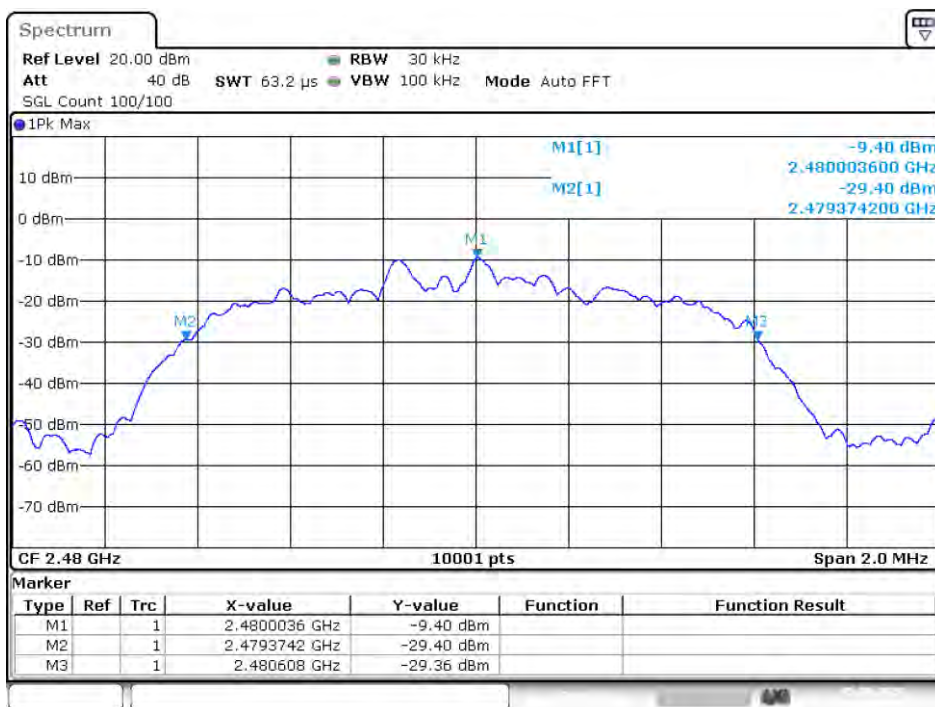

Date: 5.AUG.2020 04:44:52

## 5. CARRIER FREQUENCY SEPARATION

### 5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


### 5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 20kHz RBW and 62kHz VBW.


### 5.3.Test Result

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2440.836	2441.898	1.062	0.602	Pass
NVNT	2-DH1	2441.004	2442.008	1.004	0.602	Pass
NVNT	3-DH1	2440.986	2442.066	1.08	0.602	Pass

CFS NVNT 1-DH1 2441MHz

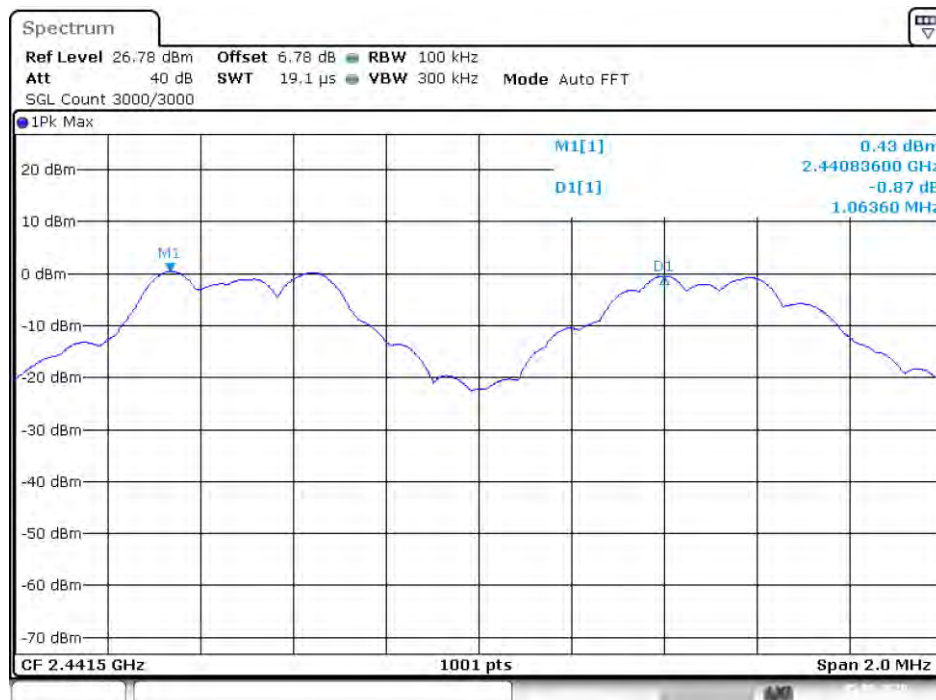


### CFS NVNT 2-DH1 2441MHz

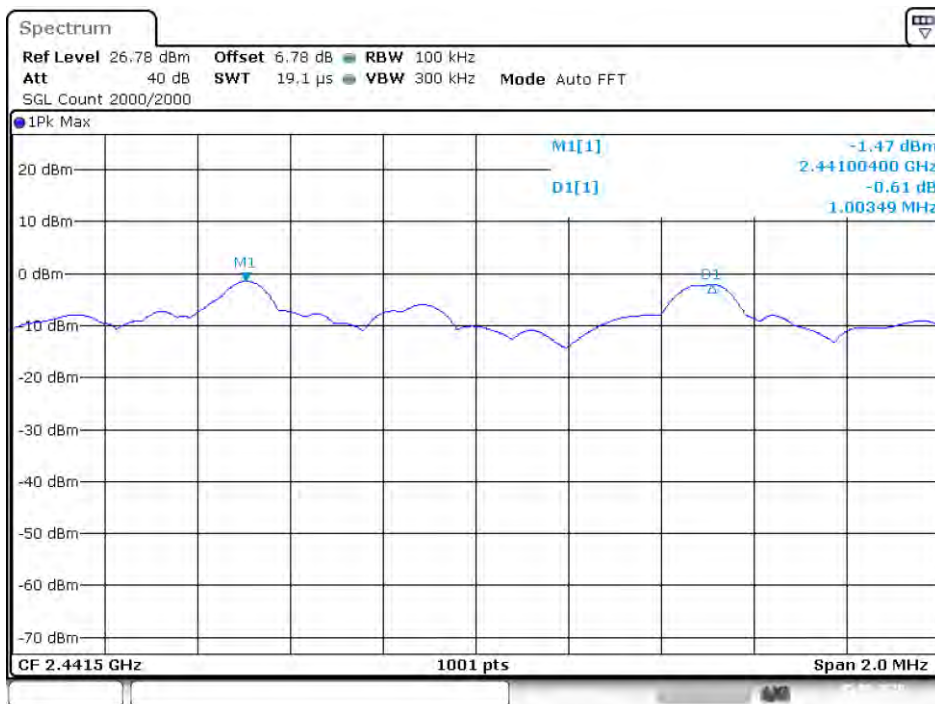

Date: 5.AUG.2020 04:20:35

### CFS NVNT 3-DH1 2441MHz

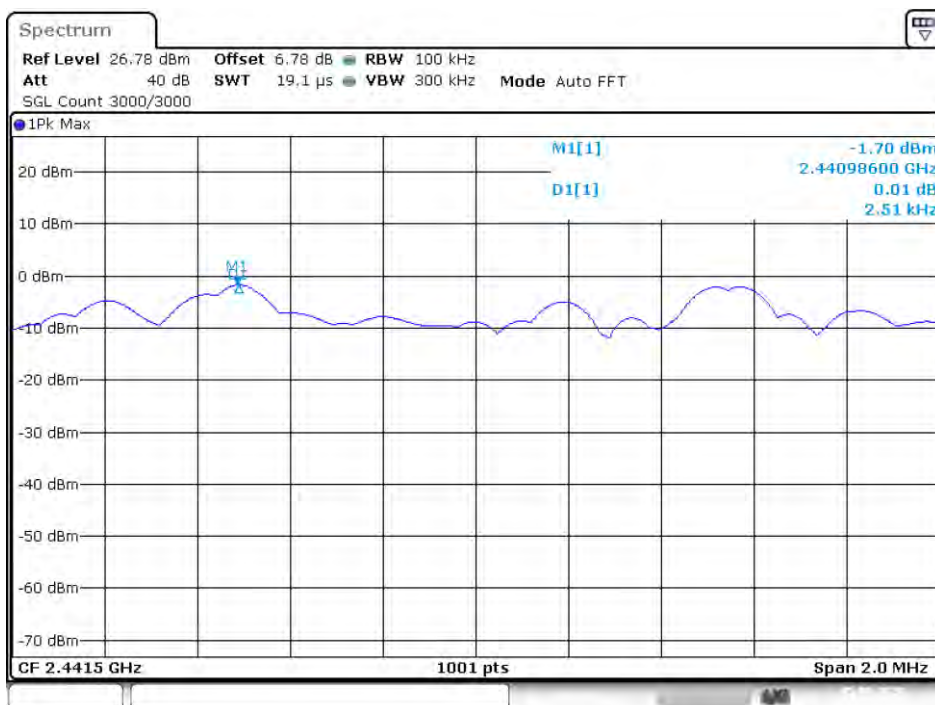

Date: 5.AUG.2020 04:29:30



## 6. NUMBER OF HOPPING CHANNEL

### 6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


### 6.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.


### 6.3.Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz

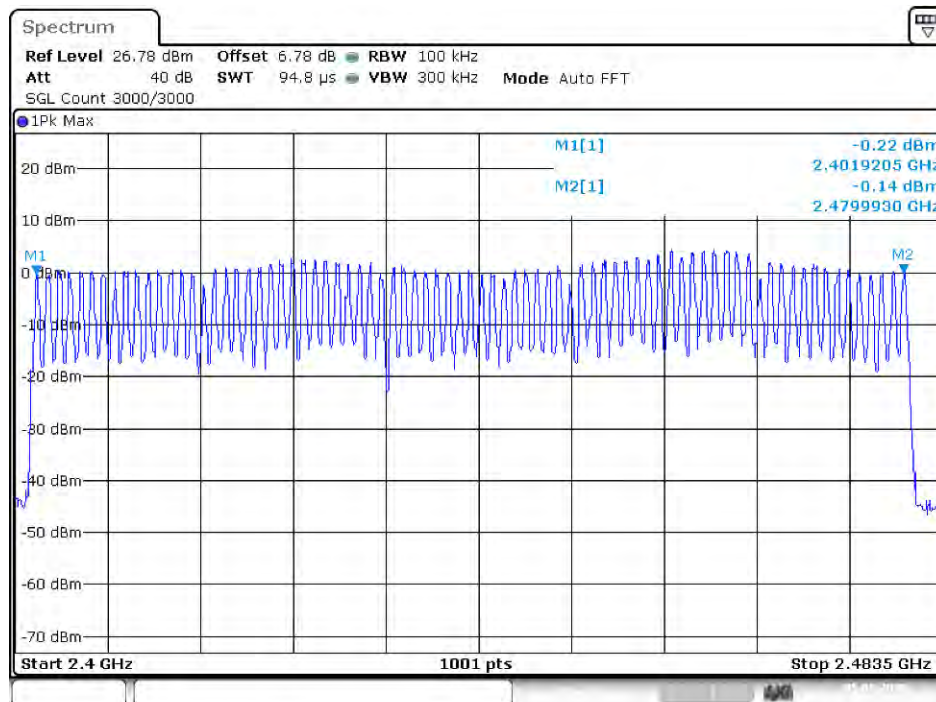


### Hopping No. NVNT 2-DH1 2441MHz

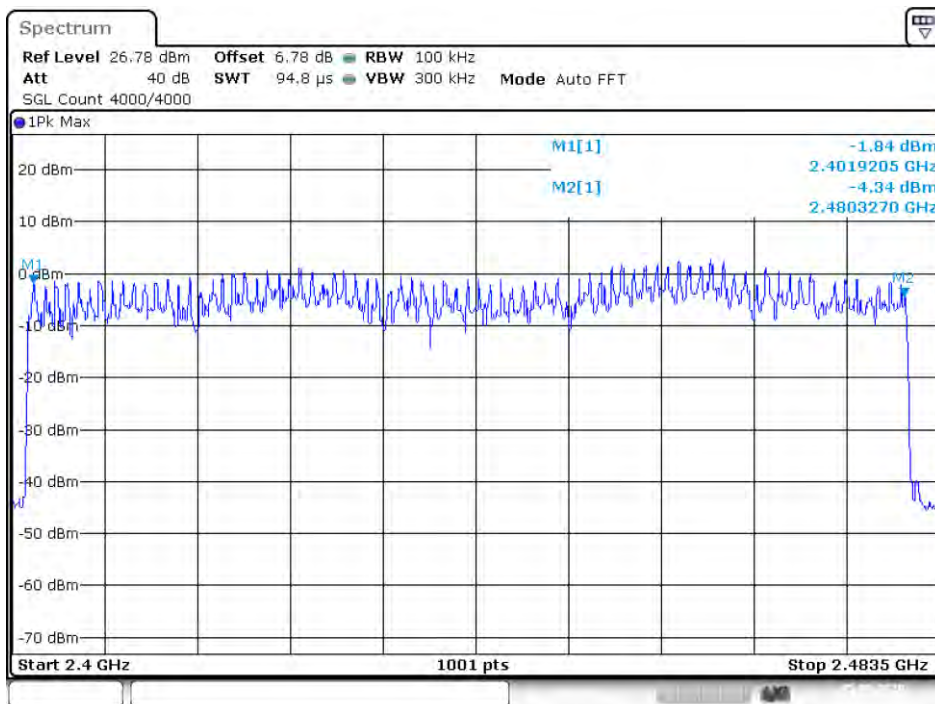

Date: 5.AUG.2020 04:22:54

### Hopping No. NVNT 3-DH1 2441MHz

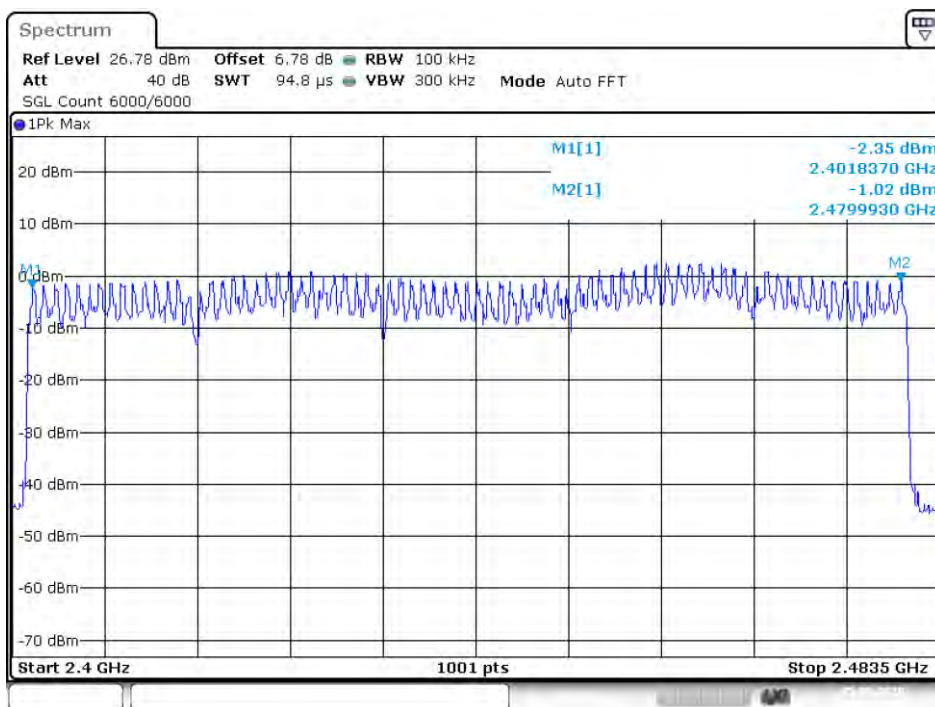

Date: 5.AUG.2020 04:32:34

## 7. DWELL TIME

### 7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

### 7.3. Test Result

PASS.

Detailed information please see the following page.

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
GFSK	DH1	2441	0.380	0.122	<0.4	PASS
	DH3	2441	1.641	0.263		PASS
	DH5	2441	2.884	0.308		PASS
$\pi$ /4 DQPSK	DH1	2441	0.374	0.120	<0.4	PASS
	DH3	2441	1.623	0.260		PASS
	DH5	2441	2.875	0.307		PASS
8DPSK	DH1	2441	0.386	0.124	<0.4	PASS
	DH3	2441	1.624	0.260		PASS
	DH5	2441	2.875	0.307		PASS

Note: 1 A period time = 0.4 (s) \* 79 = 31.6(s)

2 DH1 time slot = Pulse Duration \* (1600/(2\*79)) \* A period time/1000


DH3 time slot = Pulse Duration \* (1600/(4\*79)) \* A period time/1000

DH5 time slot = Pulse Duration \* (1600/(6\*79)) \* A period time/1000


Dwell time

GFSK


$\pi/4$ -DQPSK

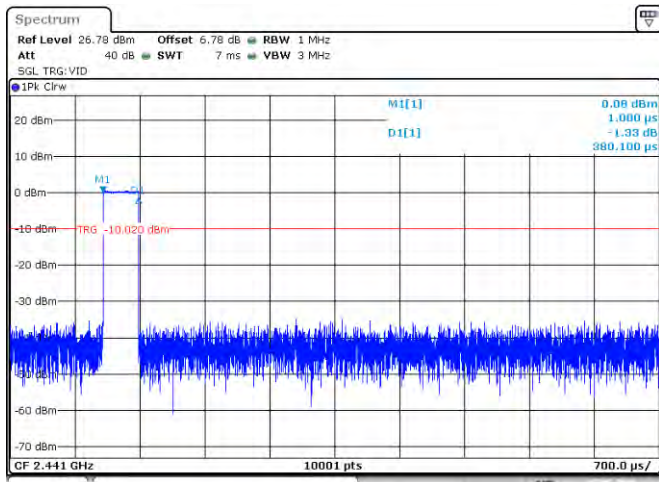


Channel 39 / 2441 MHz - DH1

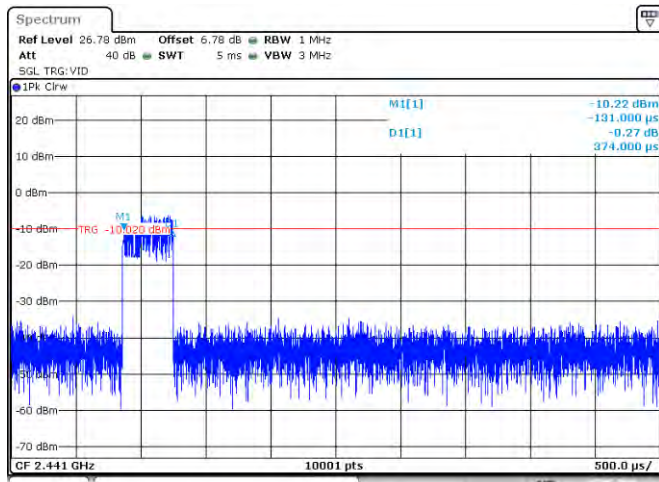


Channel 39 / 2441 MHz - 2DH1

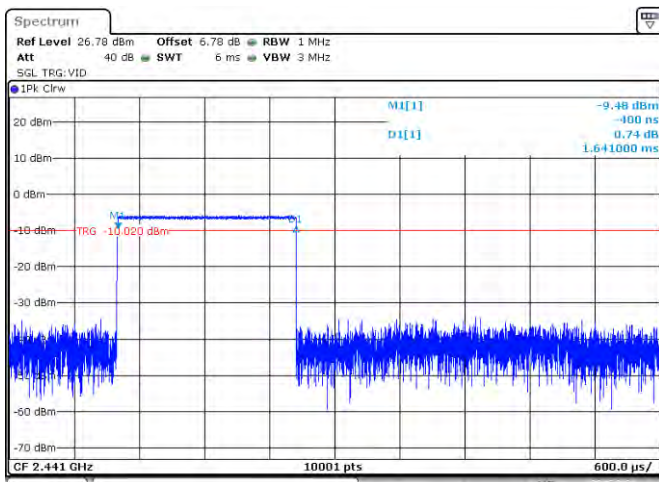


Channel 39 / 2441 MHz - DH3

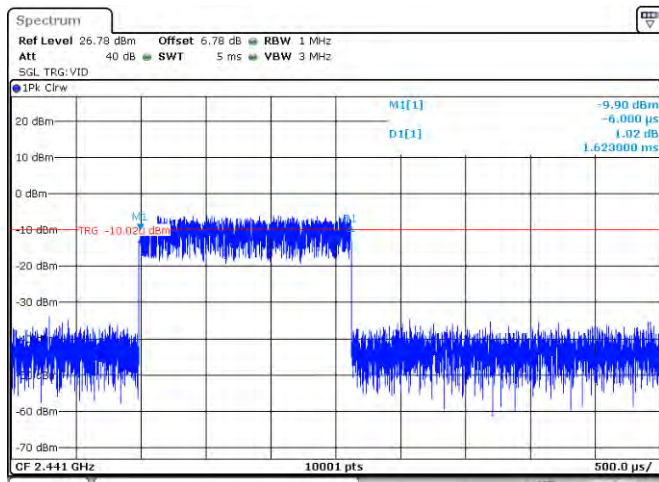

Channel 39 / 2441 MHz - 2DH3

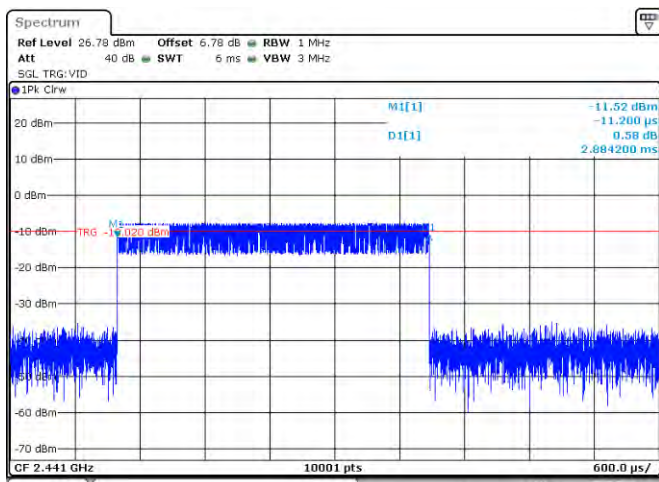

Channel 39 / 2441 MHz - DH5

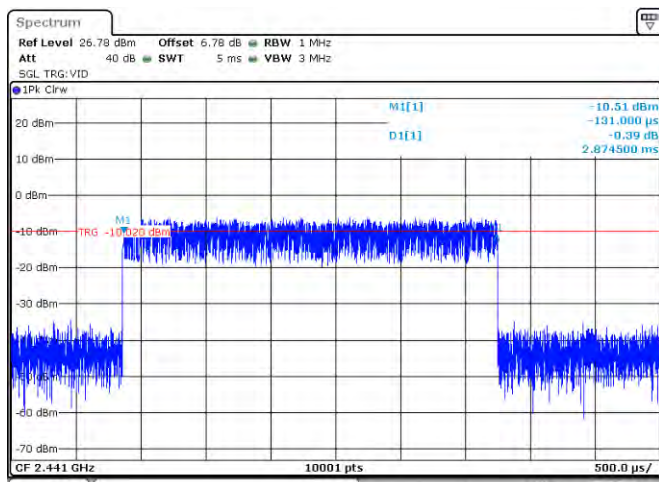


Channel 39 / 2441 MHz - 2DH5




Dwell time


8DPSK

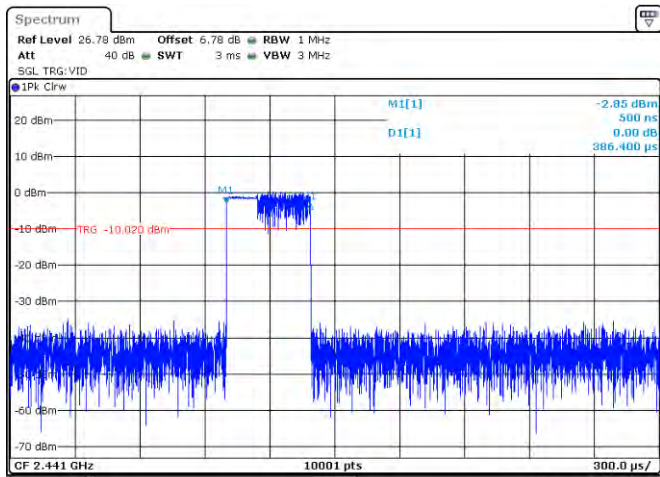

Channel 39 / 2441 MHz - DH1

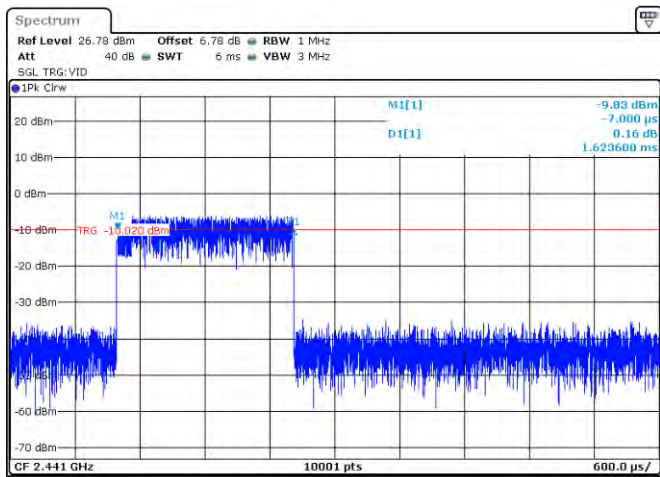

Channel 39 / 2441 MHz - DH3

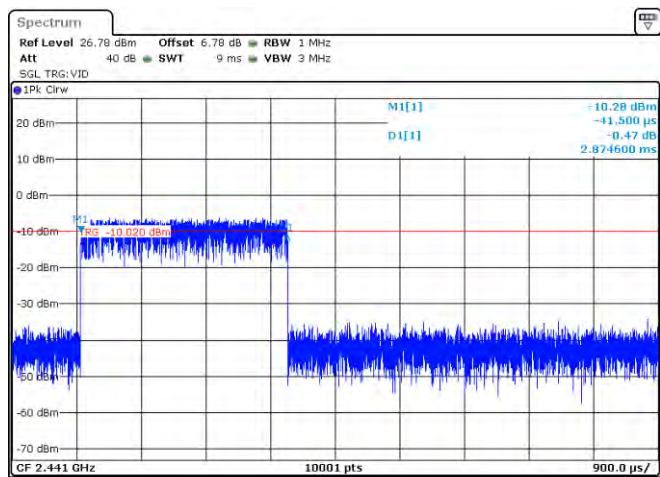

Channel 39 / 2441 MHz - DH5

## 8. RADIATED EMISSIONS

### 8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

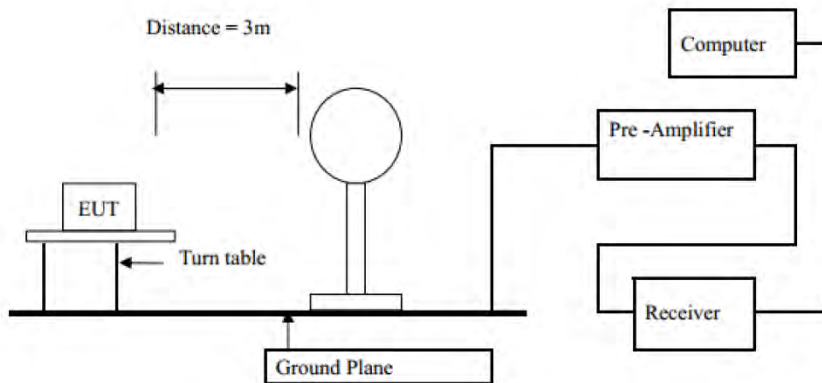

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

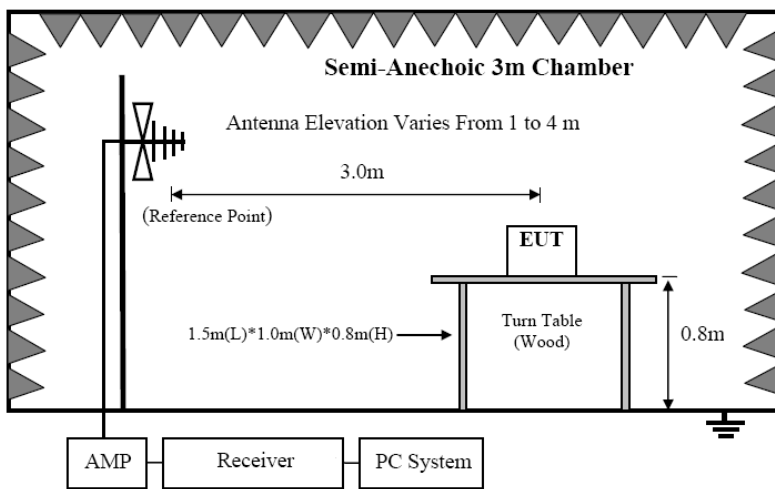

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

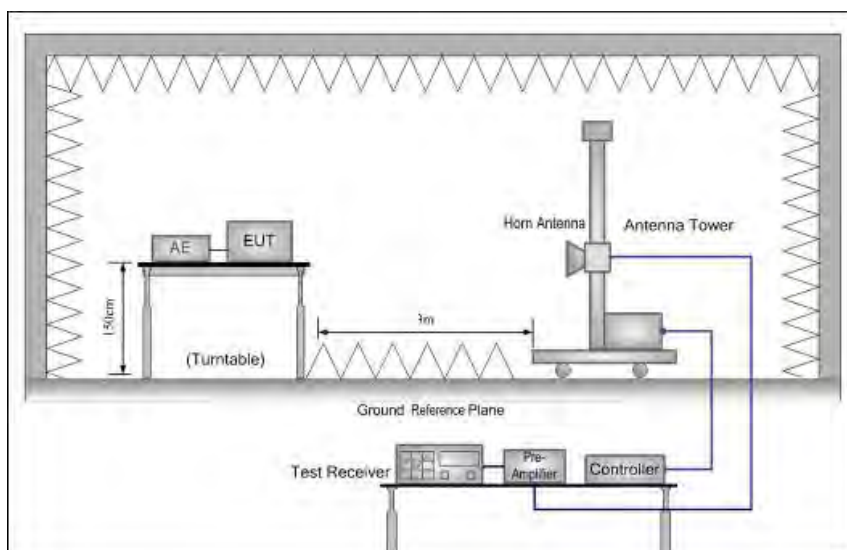

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.



### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

### 8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

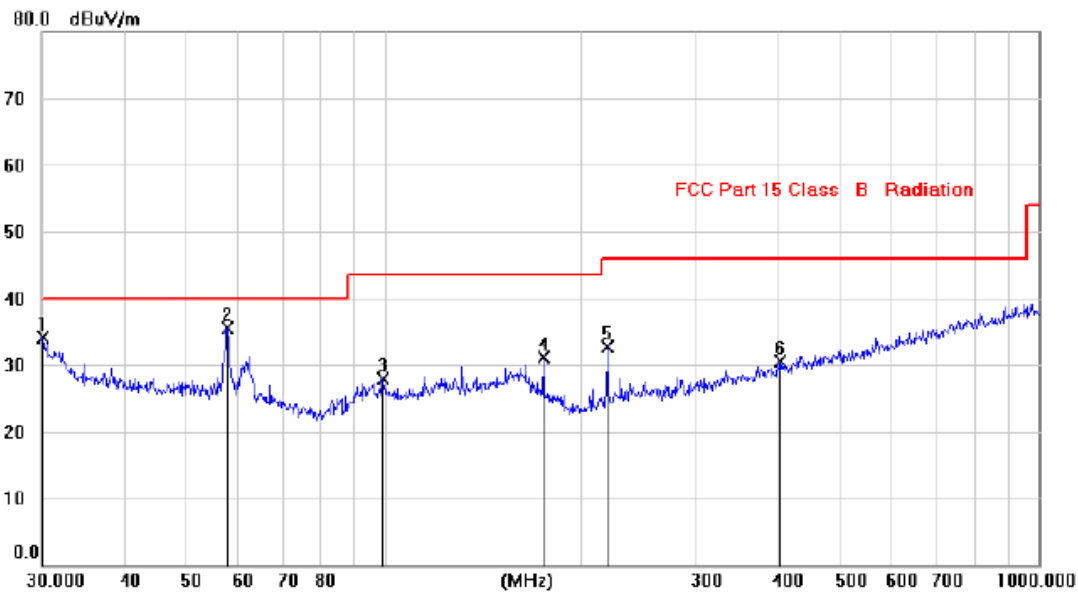

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		30.1318	20.58	13.58	34.16	40.00	-5.84			peak
2	*	57.7203	22.05	13.40	35.45	40.00	-4.55			peak
3		99.5281	17.07	10.82	27.89	43.50	-15.61			peak
4		175.3439	17.86	13.28	31.14	43.50	-12.36			peak
5		219.1714	21.00	11.62	32.62	46.00	-13.38			peak
6		403.4268	14.11	16.30	30.41	46.00	-15.59			peak

**Horizontal:**

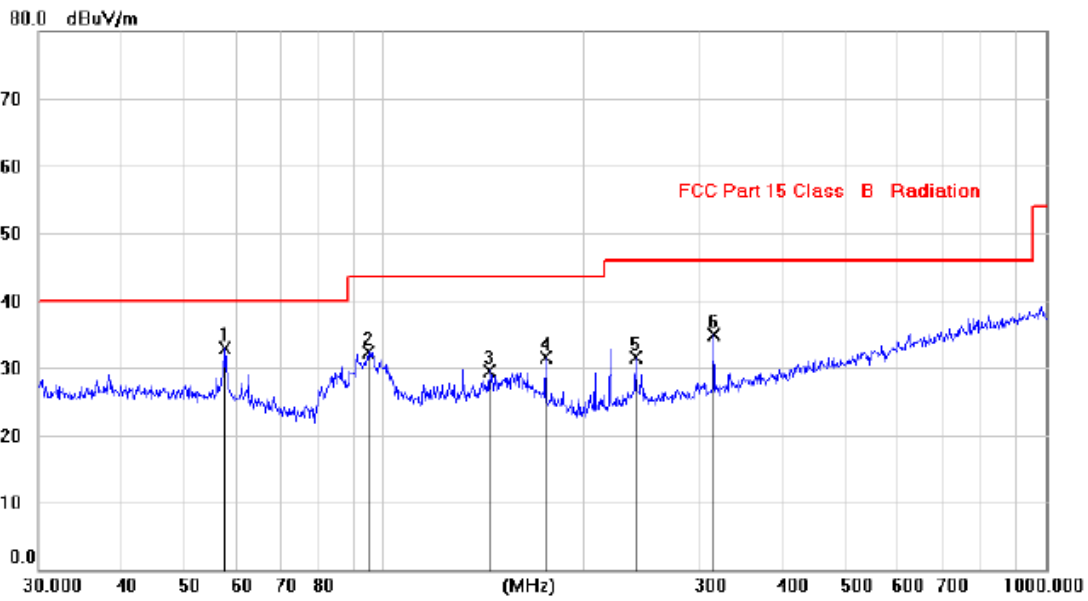

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	57.3923	19.48	13.40	32.88	40.00	-7.12	peak			
2		94.4698	21.96	10.44	32.40	43.50	-11.10	peak			
3		144.0188	15.02	14.58	29.60	43.50	-13.90	peak			
4		175.4207	18.24	13.27	31.51	43.50	-11.99	peak			
5		239.9873	18.97	12.54	31.51	46.00	-14.49	peak			
6		314.9281	20.45	14.46	34.91	46.00	-11.09	peak			

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	42.70	V	33.98	10.22	34.25	52.65	74	21.35	PK
4804	32.58	V	33.98	10.22	34.25	42.53	54	11.47	AV
7206	/	V	33.98	10.22	34.25	/	74	/	/
9608	/	V	33.98	10.22	34.25	/	74	/	/
4804	42.51	H	33.98	10.22	34.25	52.46	74	21.54	PK
4804	31.85	H	33.98	10.22	34.25	41.80	54	12.20	AV
7206	/	H	33.98	10.22	34.25	/	74	/	/
9608	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: GFSK TX Mid									
4882	42.63	V	33.98	10.22	34.25	52.58	74	21.42	PK
4882	33.03	V	33.98	10.22	34.25	42.98	54	11.02	AV
7323	/	V	33.98	10.22	34.25	/	74	/	/
9764	/	V	33.98	10.22	34.25	/	74	/	/
4882	42.87	H	33.98	10.22	34.25	52.82	74	21.18	PK
4882	32.26	H	33.98	10.22	34.25	42.21	54	11.79	AV
7323	/	H	33.98	10.22	34.25	/	74	/	/
9764	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: GFSK TX High									
4960	41.98	V	33.98	10.22	34.25	51.93	74	22.07	PK
4960	32.74	V	33.98	10.22	34.25	42.69	54	11.31	AV
7440	/	V	33.98	10.22	34.25	/	74	/	/
9920	/	V	33.98	10.22	34.25	/	74	/	/
4960	42.61	H	33.98	10.22	34.25	52.56	74	21.44	PK
4960	32.06	H	33.98	10.22	34.25	42.01	54	11.99	AV
7440	/	H	33.98	10.22	34.25	/	74	/	/
9920	/	H	33.98	10.22	34.25	/	74	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	41.77	V	33.98	10.22	34.25	51.72	74	22.28	PK
4804	32.30	V	33.98	10.22	34.25	42.25	54	11.75	AV
7206	/	V	33.98	10.22	34.25	/	74	/	/
9608	/	V	33.98	10.22	34.25	/	74	/	/
4804	41.94	H	33.98	10.22	34.25	51.89	74	22.11	PK
4804	31.74	H	33.98	10.22	34.25	41.69	54	12.31	AV
7206	/	H	33.98	10.22	34.25	/	74	/	/
9608	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	42.21	V	33.98	10.22	34.25	52.16	74	21.84	PK
4882	32.91	V	33.98	10.22	34.25	42.86	54	11.14	AV
7323	/	V	33.98	10.22	34.25	/	74	/	/
9764	/	V	33.98	10.22	34.25	/	74	/	/
4882	42.31	H	33.98	10.22	34.25	52.26	74	21.74	PK
4882	31.43	H	33.98	10.22	34.25	41.38	54	12.62	AV
7323	/	H	33.98	10.22	34.25	/	74	/	/
9764	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	42.16	V	33.98	10.22	34.25	52.11	74	21.89	PK
4960	32.93	V	33.98	10.22	34.25	42.88	54	11.12	AV
7440	/	V	33.98	10.22	34.25	/	74	/	/
9920	/	V	33.98	10.22	34.25	/	74	/	/
4960	42.68	H	33.98	10.22	34.25	52.63	74	21.37	PK
4960	31.53	H	33.98	10.22	34.25	41.48	54	12.52	AV
7440	/	H	33.98	10.22	34.25	/	74	/	/
9920	/	H	33.98	10.22	34.25	/	74	/	/


Note:

- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: 8DPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	42.58	V	33.98	10.22	34.25	52.53	74	21.47	PK
4804	32.99	V	33.98	10.22	34.25	42.94	54	11.06	AV
7206	/	V	33.98	10.22	34.25	/	74	/	/
9608	/	V	33.98	10.22	34.25	/	74	/	/
4804	42.12	H	33.98	10.22	34.25	52.07	74	21.93	PK
4804	32.28	H	33.98	10.22	34.25	42.23	54	11.77	AV
7206	/	H	33.98	10.22	34.25	/	74	/	/
9608	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: 8DPSK TX Mid									
4882	42.52	V	33.98	10.22	34.25	52.47	74	21.53	PK
4882	33.09	V	33.98	10.22	34.25	43.04	54	10.96	AV
7323	/	V	33.98	10.22	34.25	/	74	/	/
9764	/	V	33.98	10.22	34.25	/	74	/	/
4882	42.39	H	33.98	10.22	34.25	52.34	74	21.66	PK
4882	31.68	H	33.98	10.22	34.25	41.63	54	12.37	AV
7323	/	H	33.98	10.22	34.25	/	74	/	/
9764	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: 8DPSK TX High									
4960	42.59	V	33.98	10.22	34.25	52.54	74	21.46	PK
4960	32.23	V	33.98	10.22	34.25	42.18	54	11.82	AV
7440	/	V	33.98	10.22	34.25	/	74	/	/
9920	/	V	33.98	10.22	34.25	/	74	/	/
4960	42.07	H	33.98	10.22	34.25	52.02	74	21.98	PK
4960	32.30	H	33.98	10.22	34.25	42.25	54	11.75	AV
7440	/	H	33.98	10.22	34.25	/	74	/	/
9920	/	H	33.98	10.22	34.25	/	74	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

## 9. BAND EDGE COMPLIANCE

### 9.1. Block Diagram of Test Setup

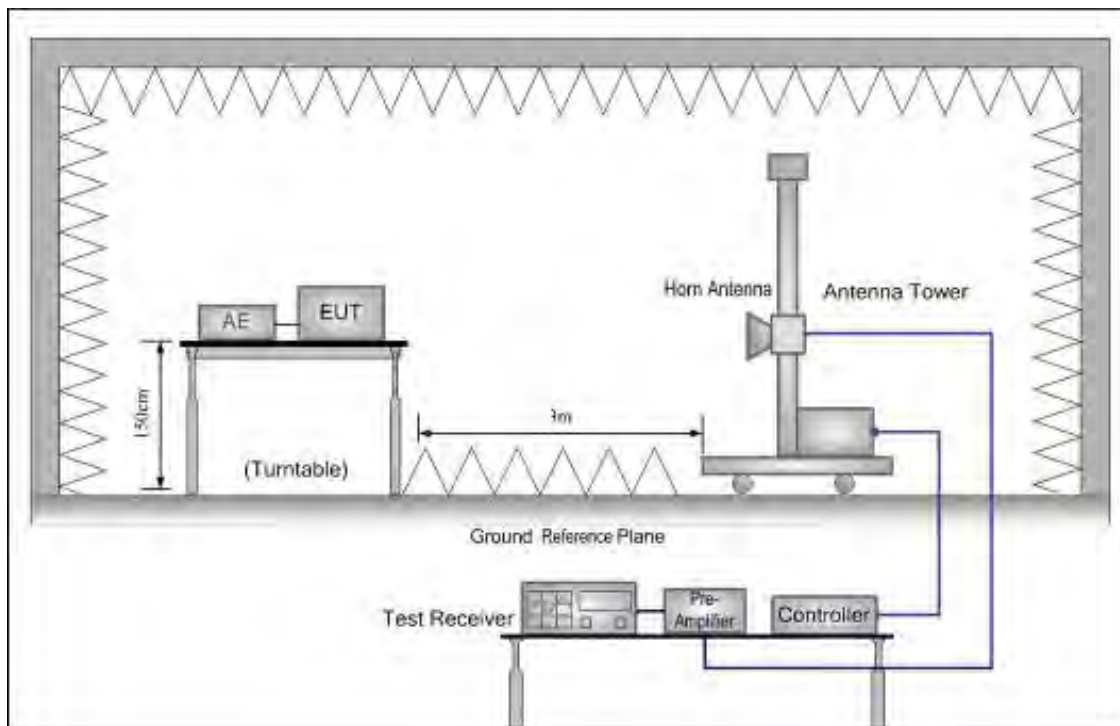

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 9.3. Test Procedure


All restriction band and non- restriction band have been tested , only worse case is reported.

### 9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

Polarization: Vertical

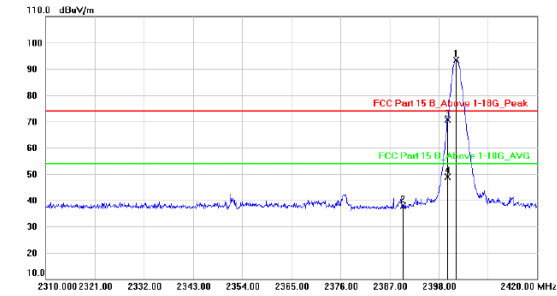

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2401.839	109.17	-15.78	93.39	74.00	19.39	peak		
2		2390.000	53.54	-15.77	37.77	74.00	-36.23	peak		
3		2400.000	86.34	-15.78	70.56	74.00	-3.44	peak		
4		2400.000	64.78	-15.78	49.00	54.00	-5.00	AVG		


Polarization: Horizontal

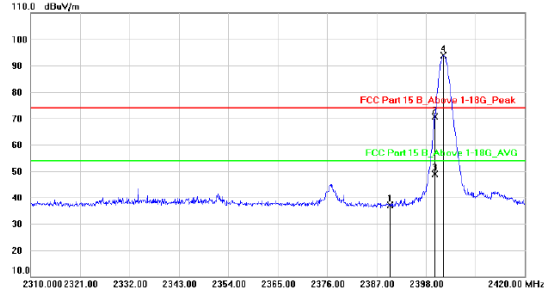

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	52.91	-15.77	37.14	74.00	-36.86	peak		
2		2400.000	86.52	-15.78	70.74	74.00	-3.26	peak		
3		2400.000	64.65	-15.78	48.87	54.00	-5.13	AVG		
4	*	2401.894	109.68	-15.78	93.90	74.00	19.90	peak		


Test Mode: GFSK-High Hopping-off

Polarization: Vertical

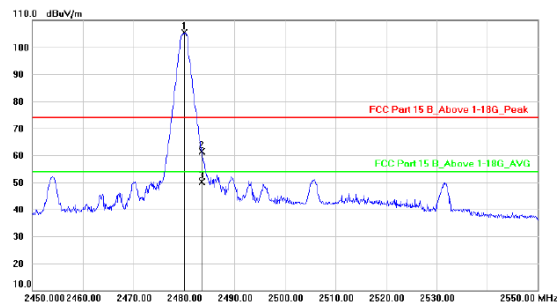

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.100	120.99	-15.69	105.30	74.00	31.30	peak		
2		2483.500	77.03	-15.68	61.35	74.00	-12.65	peak		
3		2483.500	65.92	-15.68	50.24	54.00	-3.76	AVG		

Polarization: Horizontal

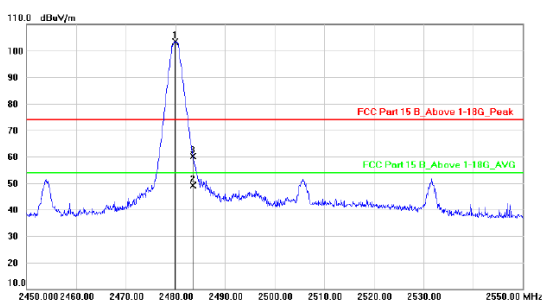

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2479.970	118.99	-15.69	103.30	74.00	29.30	peak		
2		2483.500	64.93	-15.68	49.25	54.00	-4.75	AVG		
3		2483.500	75.80	-15.68	60.12	74.00	-13.88	peak		


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.




Test Mode: GFSK-Low Hopping-on

Polarization: Vertical

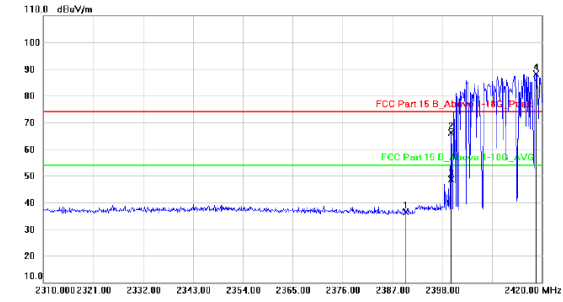

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	2390.000	52.18	-15.77	36.41	74.00	-37.59			peak
2	2400.000	81.98	-15.78	66.20	74.00	-7.80			peak
3	2400.000	64.30	-15.78	48.52	54.00	-5.48			AVG
4 *	2418.812	103.85	-15.76	88.09	74.00	14.09			peak


Polarization: Horizontal

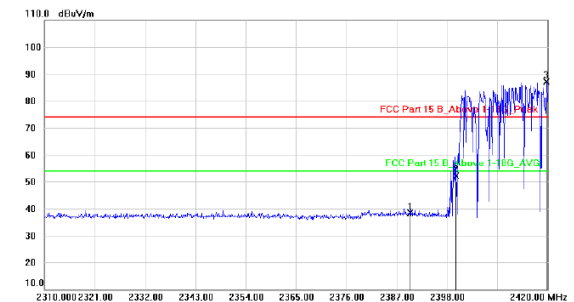

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	2390.000	54.11	-15.77	38.34	74.00	-35.66			peak
2	2400.000	67.96	-15.78	52.18	74.00	-21.82			peak
3 *	2419.802	102.79	-15.76	87.03	74.00	13.03			peak


Test Mode: GFSK-High Hopping-on

Polarization: Vertical

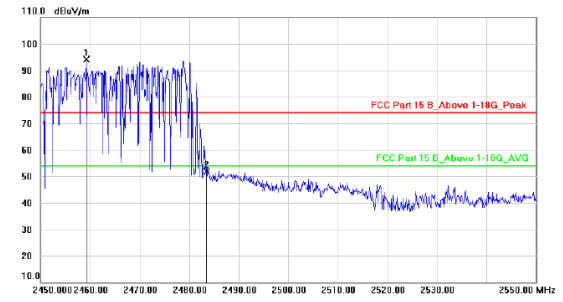

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	2459.230	109.74	-15.71	94.03	74.00	20.03			peak
2	2483.500	67.49	-15.68	51.81	74.00	-22.19			peak

Polarization: Horizontal

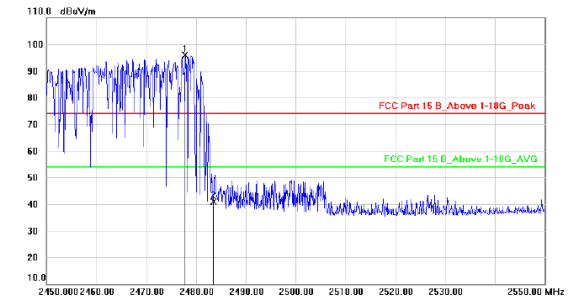


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	2477.800	111.58	-15.69	95.89	74.00	21.89			peak
2	2483.500	56.63	-15.68	40.95	74.00	-33.05			peak

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode:  $\pi/4$  DQPSK-Low Hopping-off

Polarization: Vertical

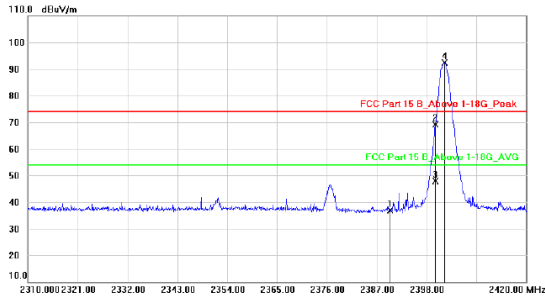

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	2390.000	52.56	-15.77	36.79	74.00	-37.21	peak		
2	2400.000	84.86	-15.78	69.08	74.00	-4.92	peak		
3	2400.000	63.76	-15.78	47.98	54.00	-6.02	AVG		
4 *	2402.070	108.16	-15.78	92.38	74.00	18.38	peak		


Polarization: Horizontal

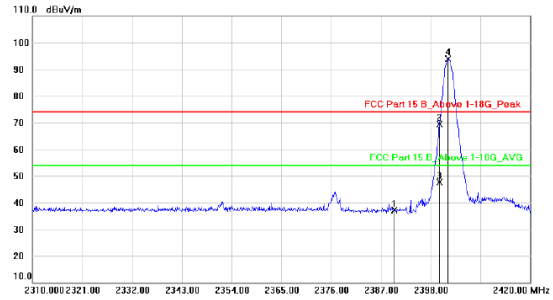

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	2390.000	52.82	-15.77	37.05	74.00	-36.95	peak		
2	2400.000	85.16	-15.78	69.38	74.00	-4.62	peak		
3	2400.000	63.37	-15.78	47.59	54.00	-6.41	AVG		
4 *	2401.905	109.73	-15.78	93.95	74.00	19.95	peak		


Test Mode:  $\pi/4$  DQPSK-High Hopping-off

Polarization: Vertical

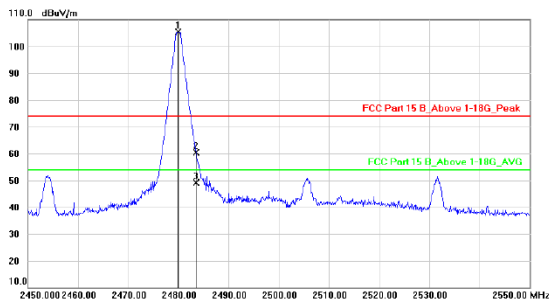

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	2479.970	120.99	-15.69	105.30	74.00	31.30	peak		
2	2483.500	76.03	-15.68	60.35	74.00	-13.65	peak		
3	2483.500	64.93	-15.68	49.25	54.00	-4.75	AVG		

Polarization: Horizontal

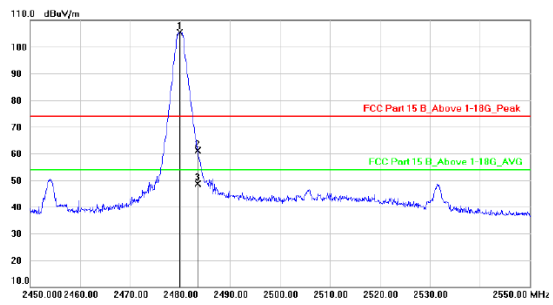


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	2479.990	120.99	-15.69	105.30	74.00	31.30	peak		
2	2483.500	76.73	-15.68	61.05	74.00	-12.95	peak		
3	2483.500	64.31	-15.68	48.63	54.00	-5.37	AVG		

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode:  $\pi/4$  DQPSK-Low Hopping-on

Polarization: Vertical

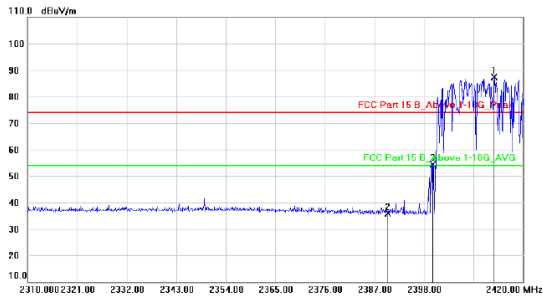

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2413.675	103.08	-15.77	87.31	74.00	13.31			peak
2	2390.000	51.74	-15.77	35.97	74.00	-38.03			peak
3	2400.000	70.13	-15.78	54.35	74.00	-19.65			peak


Polarization: Horizontal

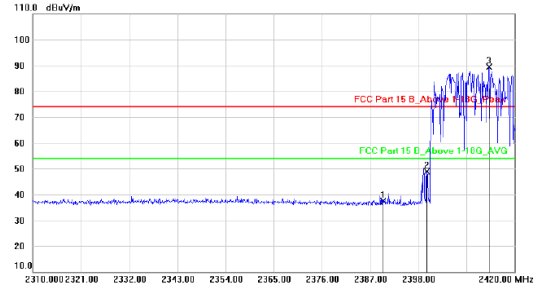

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	2390.000	53.17	-15.77	37.40	74.00	-36.60			peak
2	2400.000	64.56	-15.78	48.78	74.00	-25.22			peak
3 *	2414.225	105.10	-15.77	89.33	74.00	15.33			peak


Test Mode:  $\pi/4$  DQPSK-High Hopping-on

Polarization: Vertical

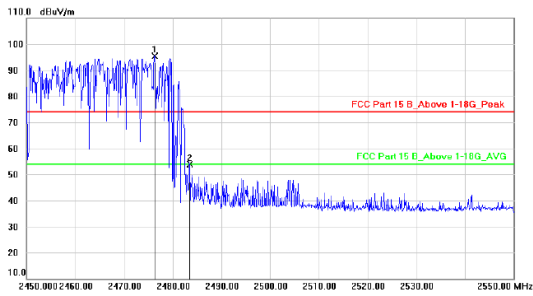

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2476.370	110.97	-15.70	95.27	74.00	21.27			peak
2	2483.500	69.45	-15.68	53.77	74.00	-20.23			peak

Polarization: Horizontal

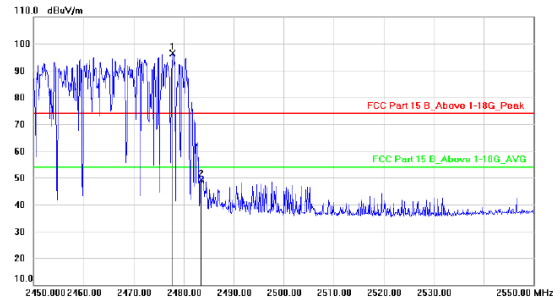


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2477.870	112.07	-15.69	96.38	74.00	22.38			peak
2	2483.500	64.87	-15.68	49.19	74.00	-24.81			peak

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-off

Polarization: Vertical

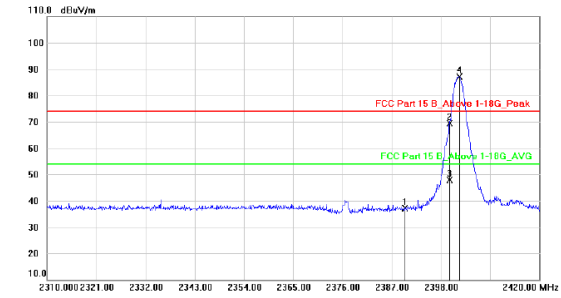

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	2390.000	52.80	-15.77	37.03	74.00	-36.97	peak		
2	2400.000	85.20	-15.78	69.42	74.00	-4.58	peak		
3	2400.000	63.60	-15.78	47.82	54.00	-6.18	AVG		
4 *	2402.246	102.99	-15.78	87.21	74.00	13.21	peak		


Polarization: Horizontal

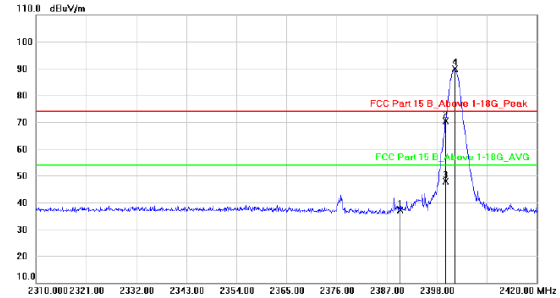

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	2390.000	52.91	-15.77	37.14	74.00	-36.86	peak		
2	2400.000	86.11	-15.78	70.33	74.00	-3.67	peak		
3	2400.000	63.61	-15.78	47.83	54.00	-6.17	AVG		
4 *	2402.037	105.77	-15.78	89.99	74.00	15.99	peak		


Test Mode: 8DPSK-High Hopping-off

Polarization: Vertical

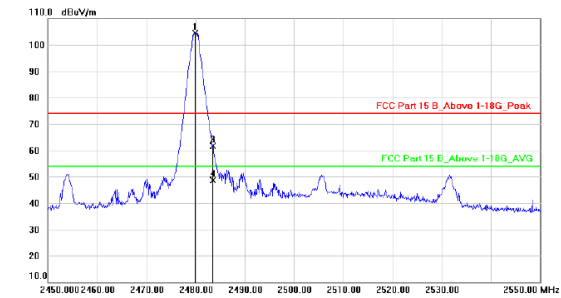

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2479.970	119.99	-15.69	104.30	74.00	30.30	peak		
2	2483.500	77.28	-15.68	61.60	74.00	-12.40	peak		
3	2483.500	77.28	-15.68	61.60	74.00	-12.40	peak		
4	2483.500	64.20	-15.68	48.52	54.00	-5.48	AVG		

Polarization: Horizontal

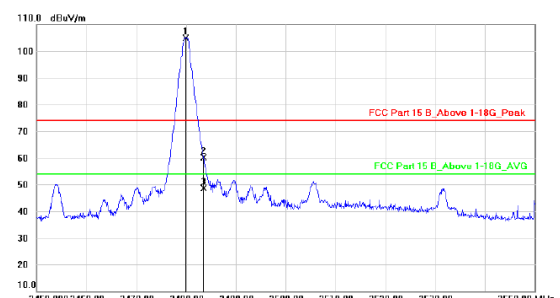


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2479.970	120.49	-15.69	104.80	74.00	30.80	peak		
2	2483.500	75.75	-15.68	60.07	74.00	-13.93	peak		
3	2483.500	64.20	-15.68	48.52	54.00	-5.48	AVG		

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-on

Polarization: Vertical

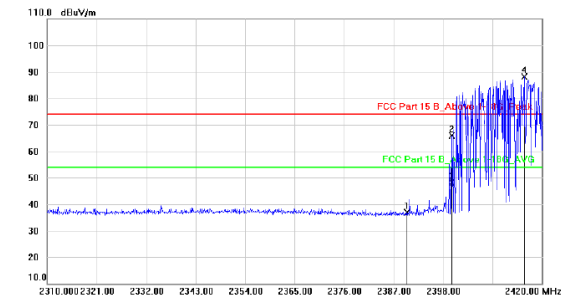

No.	Mk	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	52.56	-15.77	36.79	74.00	-37.21			peak
2		2400.000	81.76	-15.78	65.98	74.00	-8.02			peak
3		2400.000	64.03	-15.78	48.25	54.00	-5.75			AVG
4	*	2416.117	103.90	-15.77	88.13	74.00	14.13			peak


Polarization: Horizontal

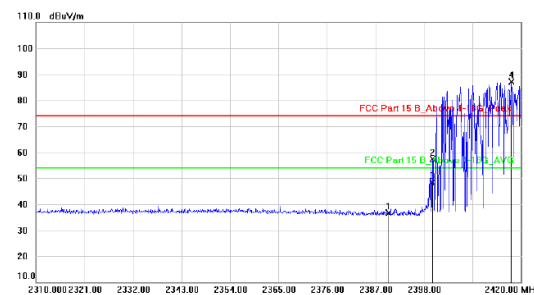

No.	Mk	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	52.48	-15.77	36.71	74.00	-37.29			peak
2		2400.000	73.20	-15.78	57.42	74.00	-16.58			peak
3		2400.000	64.11	-15.78	48.33	54.00	-5.67			AVG
4	*	2417.987	102.78	-15.76	87.02	74.00	13.02			peak


Test Mode: 8DPSK-High Hopping-on

Polarization: Vertical

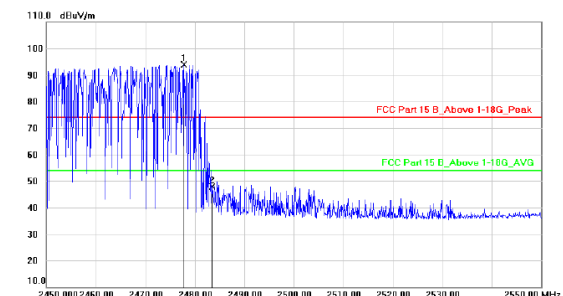

No.	Mk	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2477.860	109.56	-15.69	93.87	74.00	19.87			peak
2		2483.500	63.68	-15.68	48.00	74.00	-26.00			peak

Polarization: Horizontal

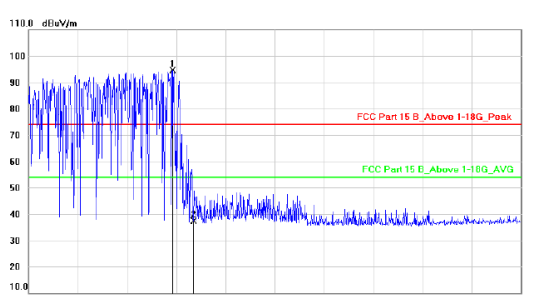

No.	Mk	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2479.250	110.30	-15.69	94.61	74.00	20.61			peak
2		2483.500	53.16	-15.68	37.48	74.00	-36.52			peak


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


### Conducted Method

#### GFSK Mode:

Test channel: Lowest channel

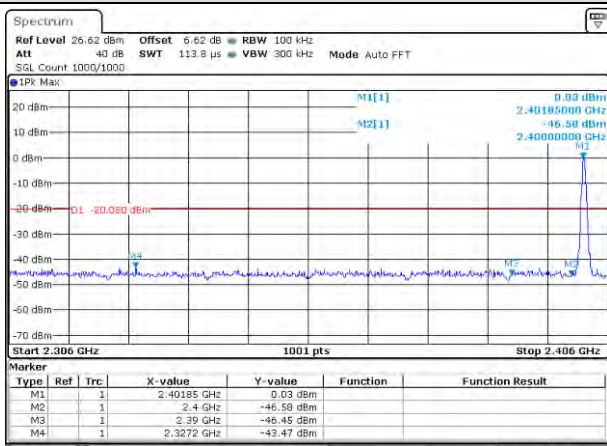


No-hopping mode

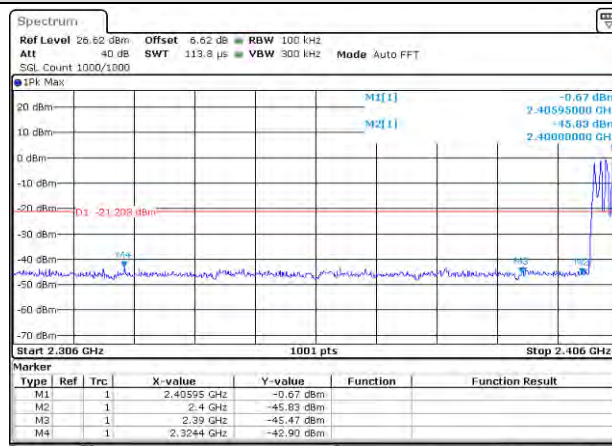


Hopping mode

Test channel: Highest channel

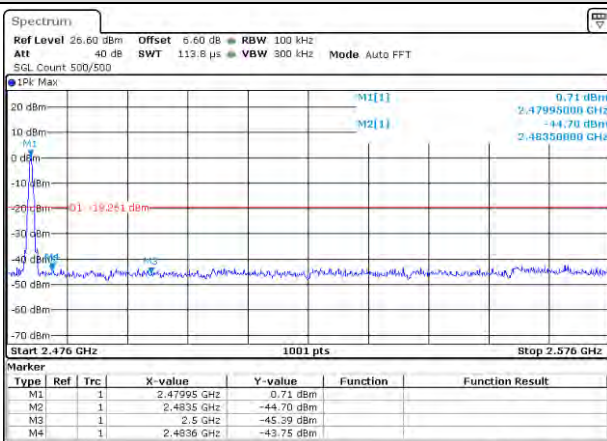


No-hopping mode

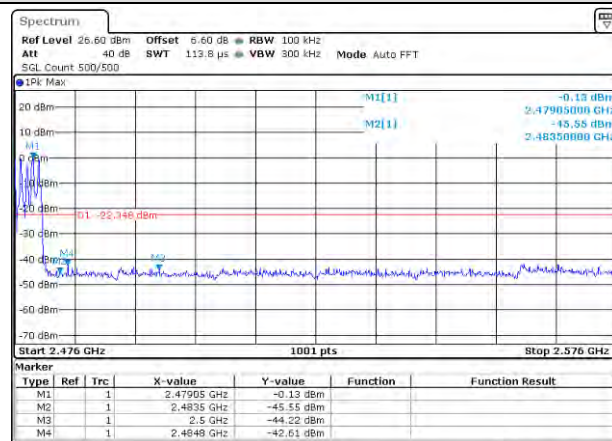


Hopping mode

$\pi$  /4DQPSK Mode:

Test channel: Lowest channel

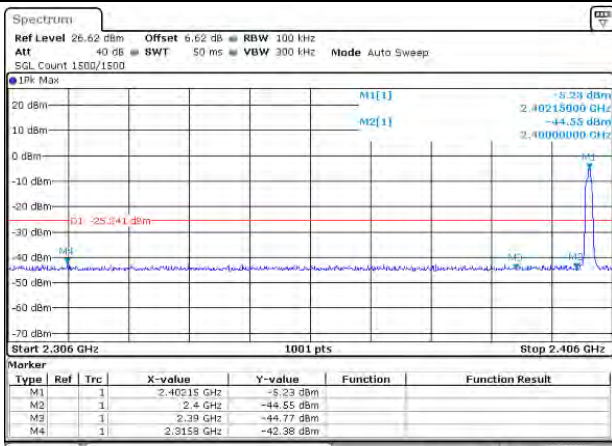


No-hopping mode

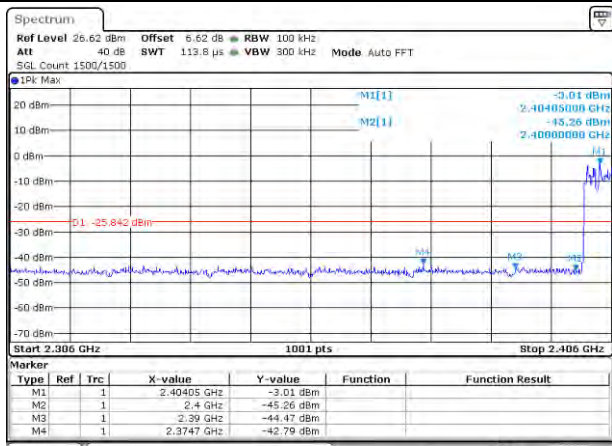


Hopping mode

Test channel: Highest channel

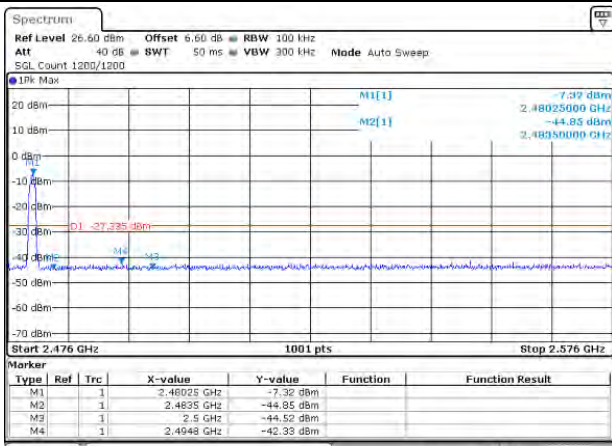

No-hopping mode

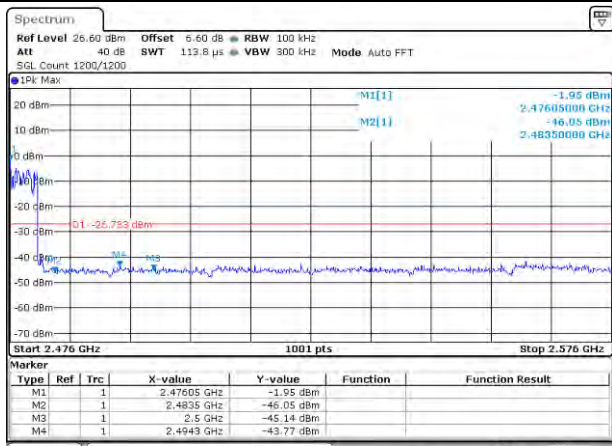


Hopping mode




8DPSK Mode:

Test channel:

Lowest channel

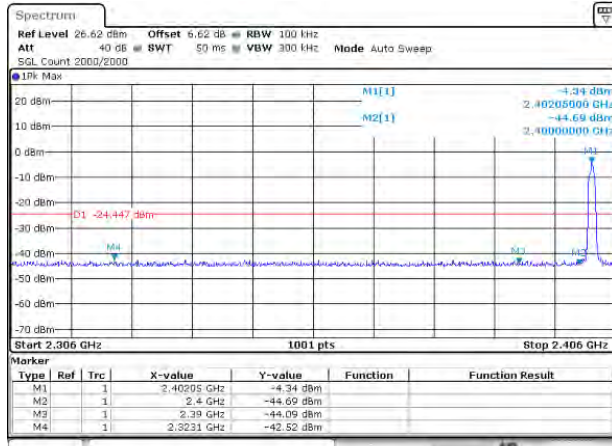


No-hopping mode

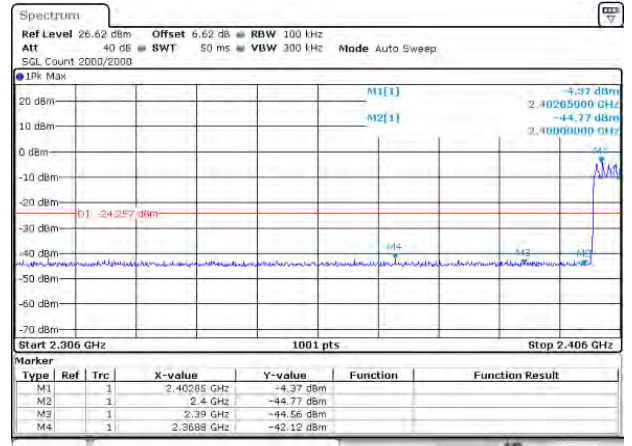


Hopping mode

Test channel:

Highest channel

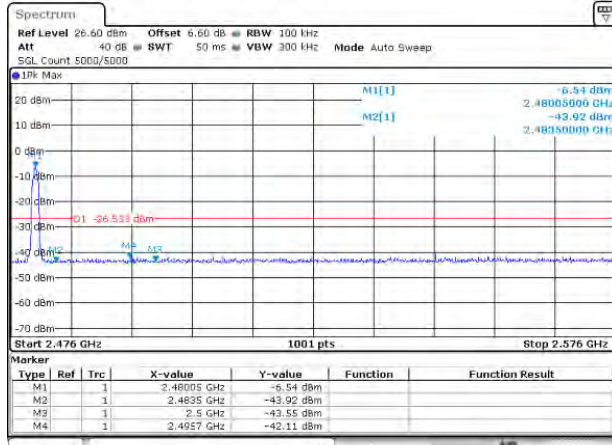

No-hopping mode

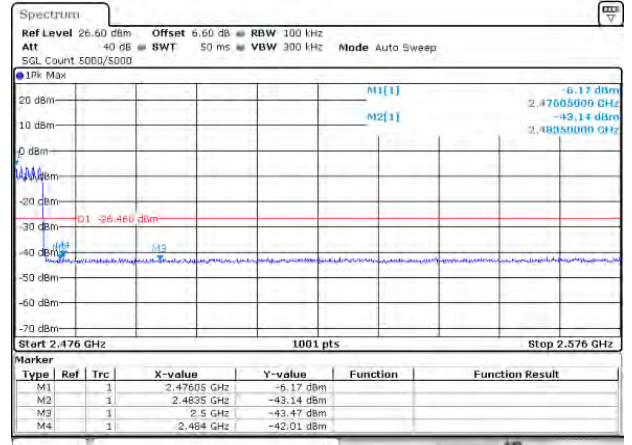


Hopping mode



## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

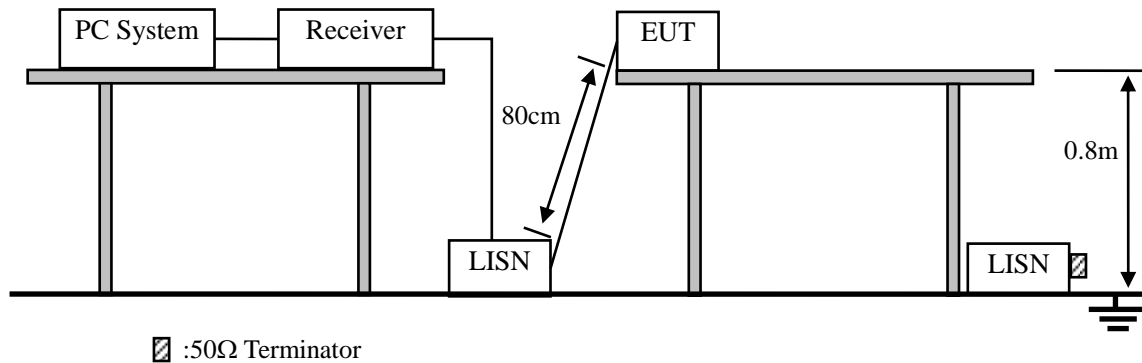

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

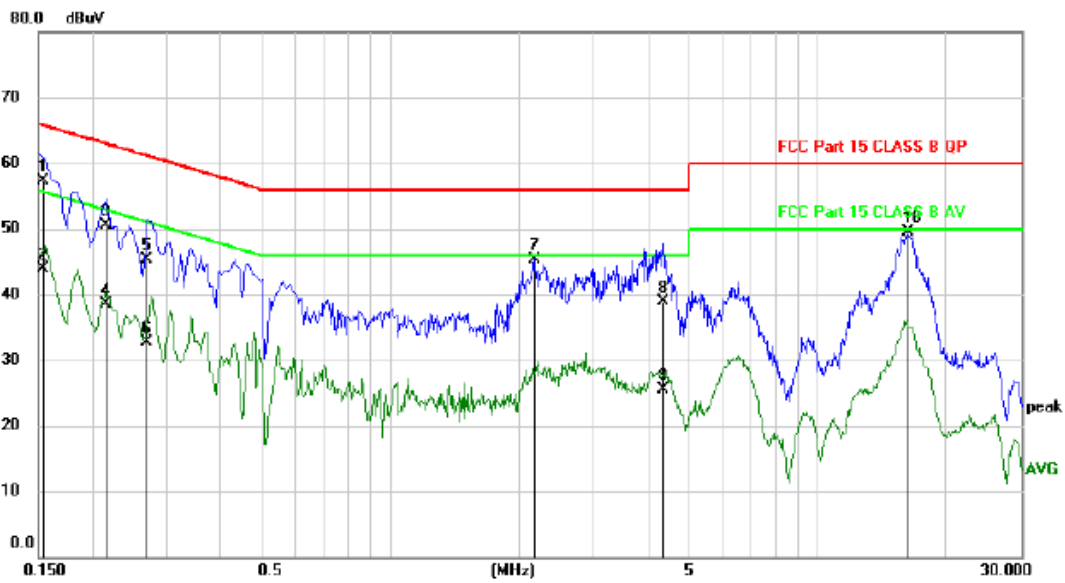

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1539	47.29	9.94	57.23	65.79	-8.56	QP	
2		0.1539	33.98	9.94	43.92	55.79	-11.87	AVG	
3		0.2160	40.51	9.94	50.45	62.97	-12.52	QP	
4		0.2160	28.66	9.94	38.60	52.97	-14.37	AVG	
5		0.2700	35.32	9.95	45.27	61.12	-15.85	QP	
6		0.2700	22.78	9.95	32.73	51.12	-18.39	AVG	
7		2.1719	35.49	9.89	45.38	56.00	-10.62	peak	
8		4.3380	28.97	9.99	38.96	56.00	-17.04	QP	
9		4.3380	15.45	9.99	25.44	46.00	-20.56	AVG	
10		16.2900	39.10	10.37	49.47	60.00	-10.53	peak	

Neutral:

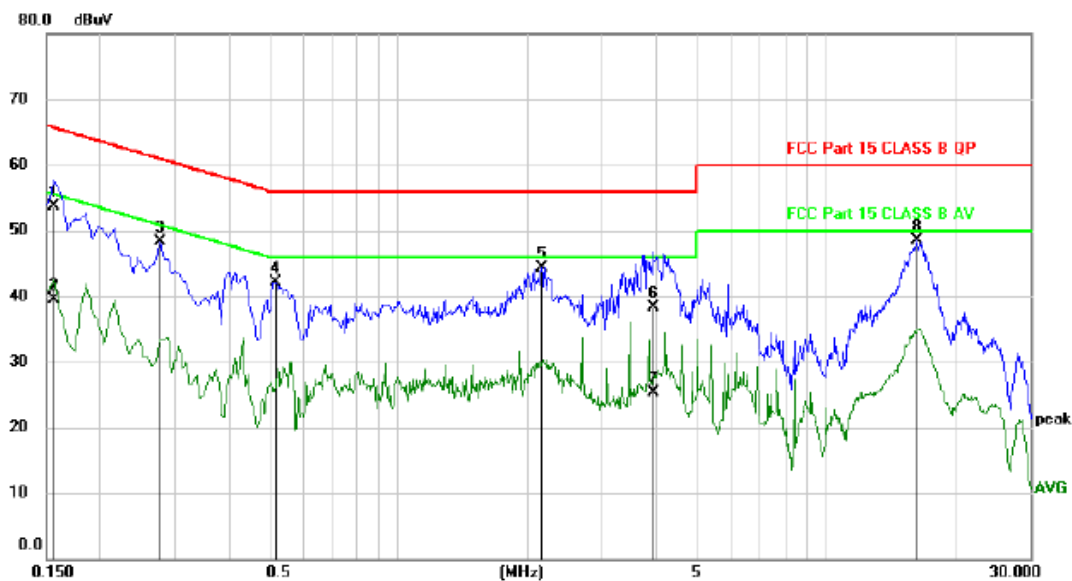

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1560	43.81	9.94	53.75	65.67	-11.92	QP	
2		0.1560	29.60	9.94	39.54	55.67	-16.13	AVG	
3		0.2760	38.41	9.94	48.35	60.94	-12.59	peak	
4		0.5160	32.19	9.95	42.14	56.00	-13.86	peak	
5		2.1660	34.39	9.89	44.28	56.00	-11.72	peak	
6		3.9360	28.44	9.96	38.40	56.00	-17.60	QP	
7		3.9360	15.39	9.96	25.35	46.00	-20.65	AVG	
8	*	16.2660	38.15	10.37	48.52	60.00	-11.48	peak	

Note: All modes and channels have been tested and only the Charging mode with the worst data is listed.

## **11.ANTENNA REQUIREMENTS**

### **11.1.Limit**


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2.Result**


The EUT antenna is Internal Antenna. It complies with the standard requirement.

## 12. TEST SETUP PHOTO

### 12.1. Photos of Radiated emission

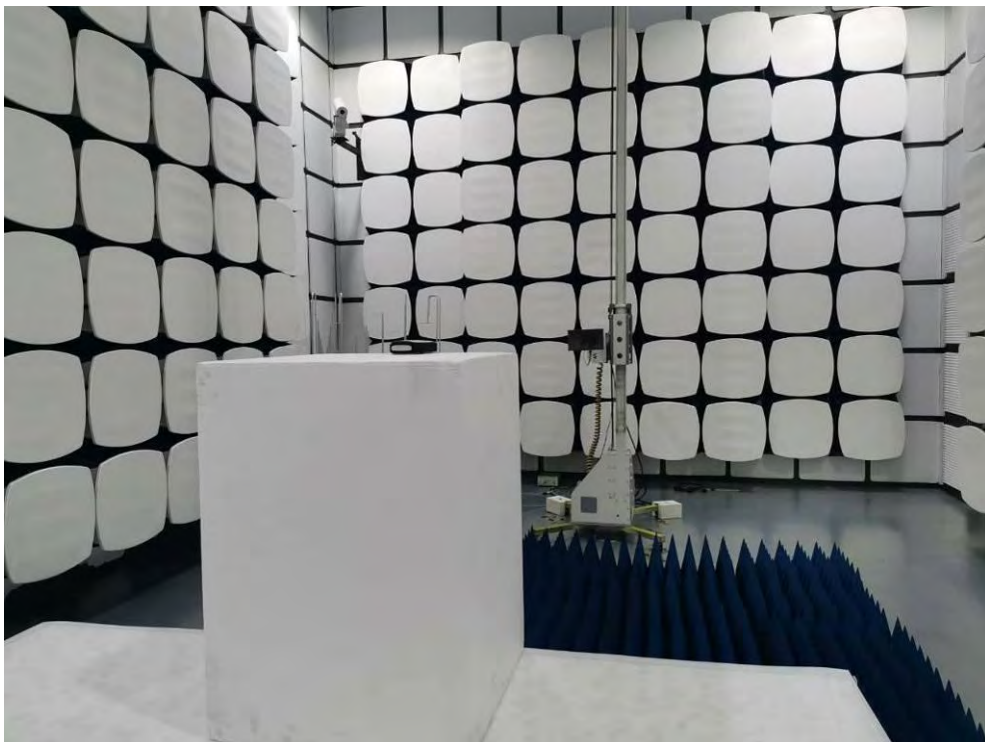

## 12.2.Photos of Conducted Emission test

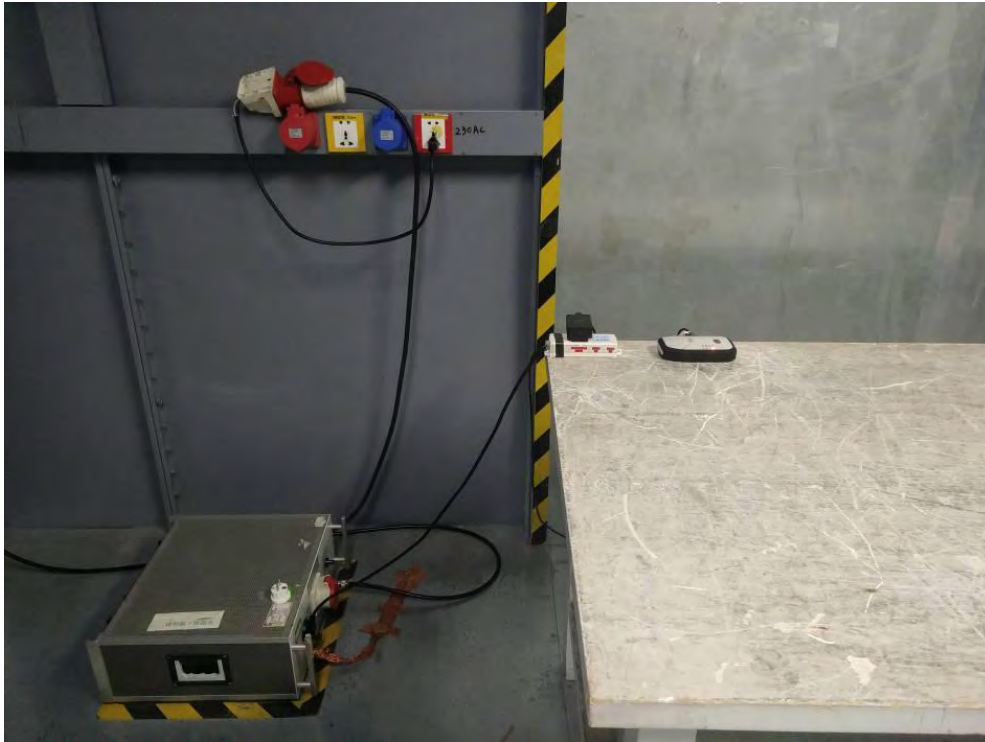



### 13.PHOTOS OF EUT



EUT View



EUT View



**EUT View**



**EUT View**





**EUT View**



**EUT View**



EUT View



EUT View






EUT View



EUT View



**EUT View**

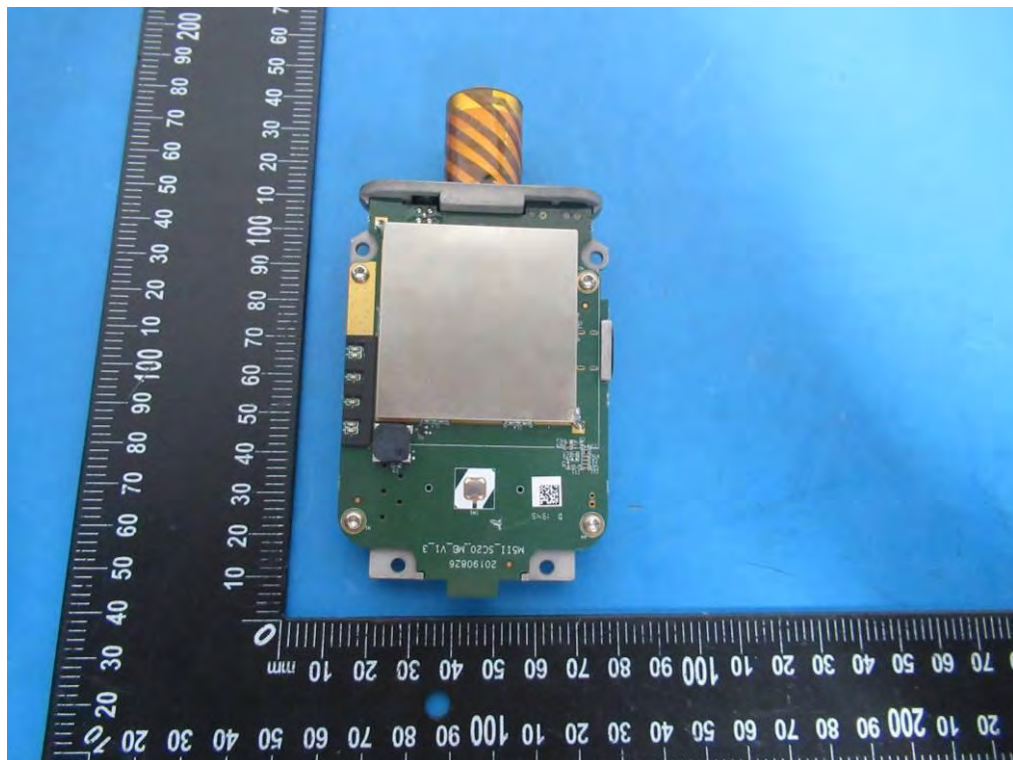


**EUT View**







**EUT View**

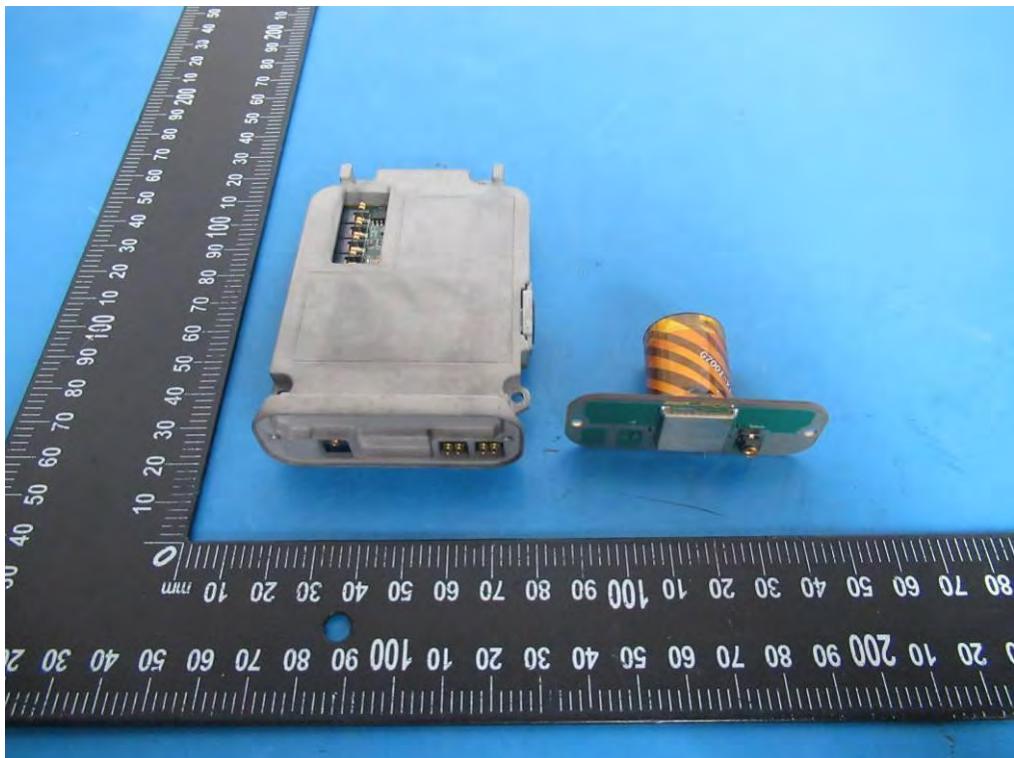

**EUT View**

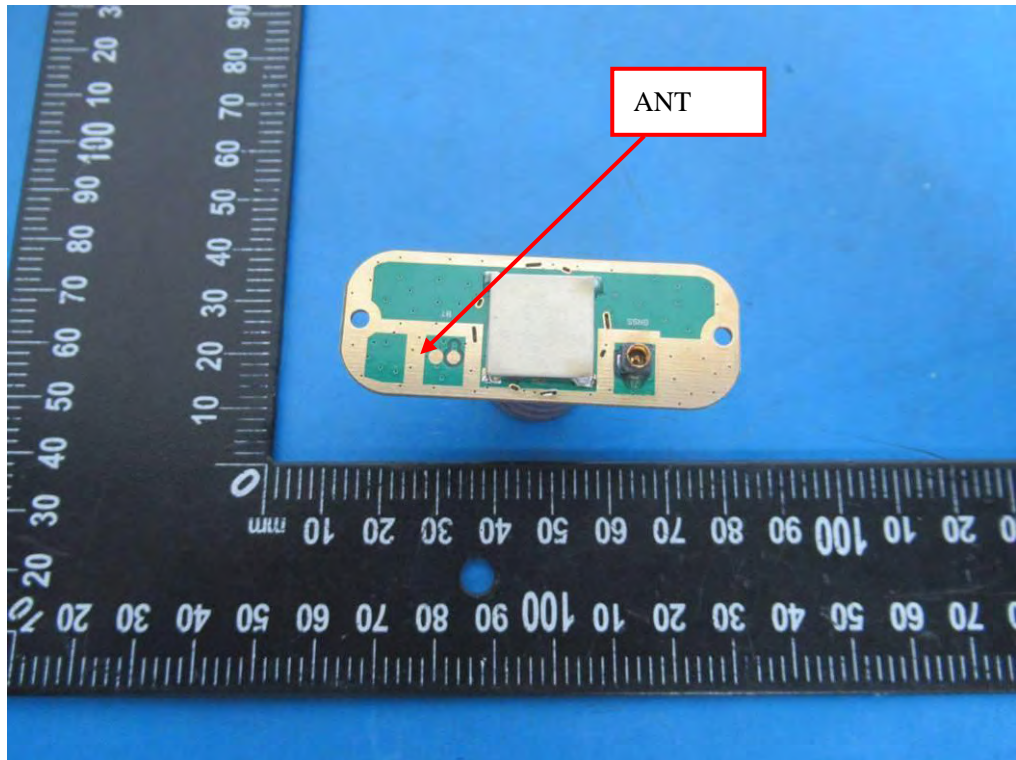


**EUT View**

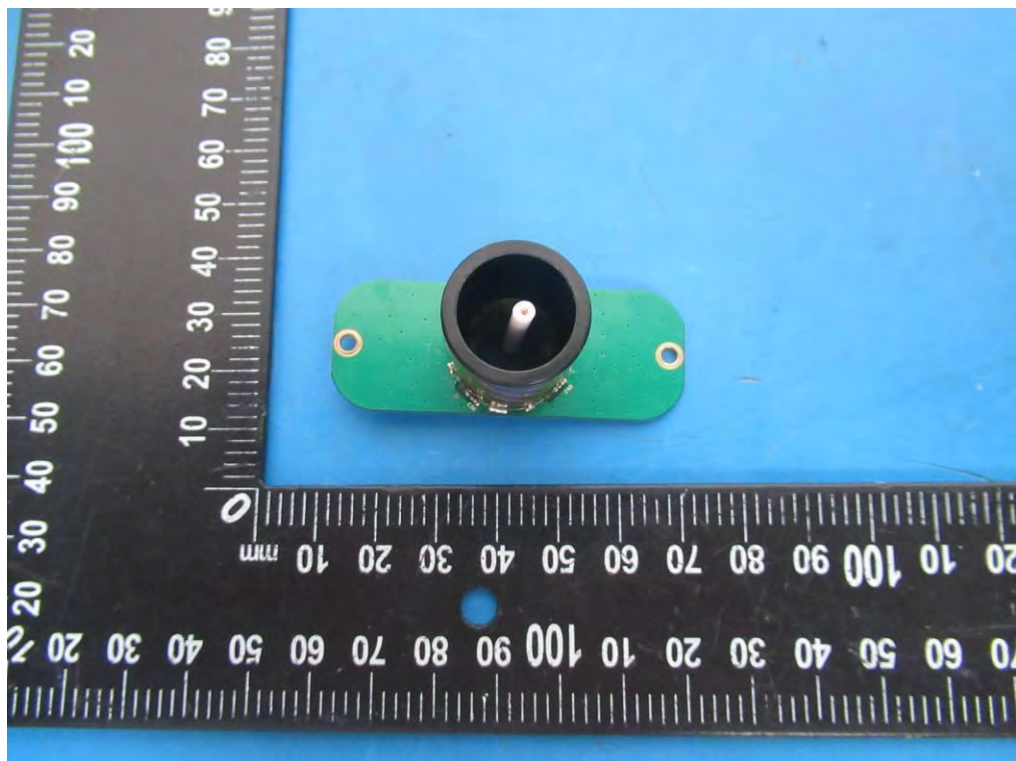


**EUT View**




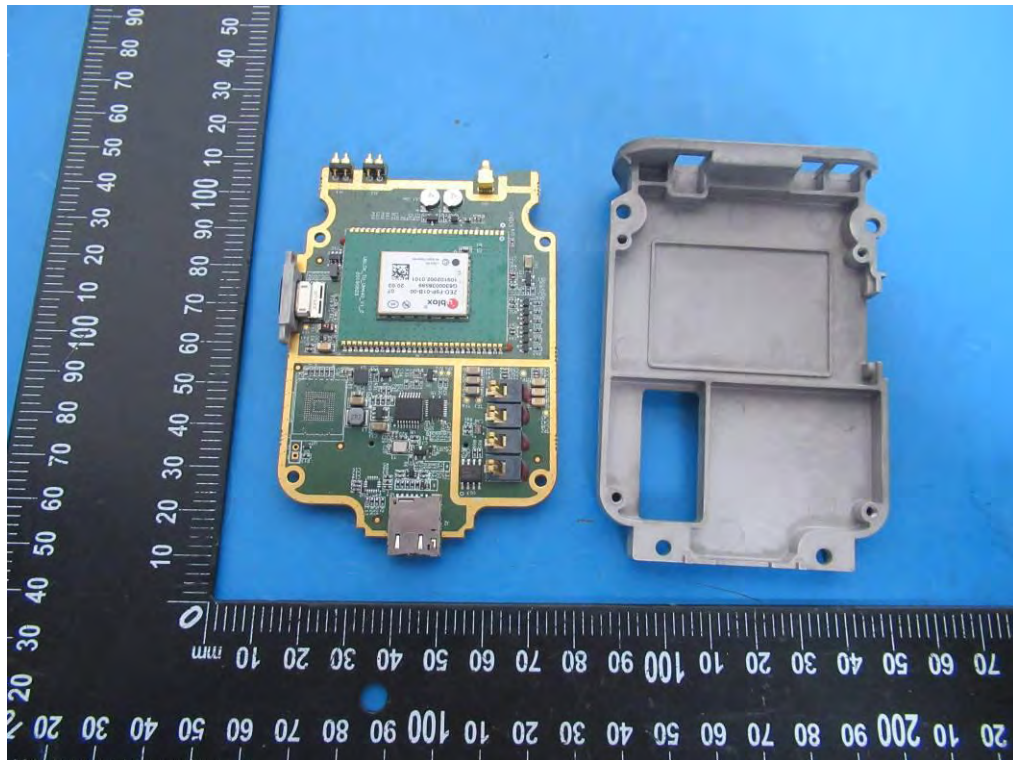


EUT View

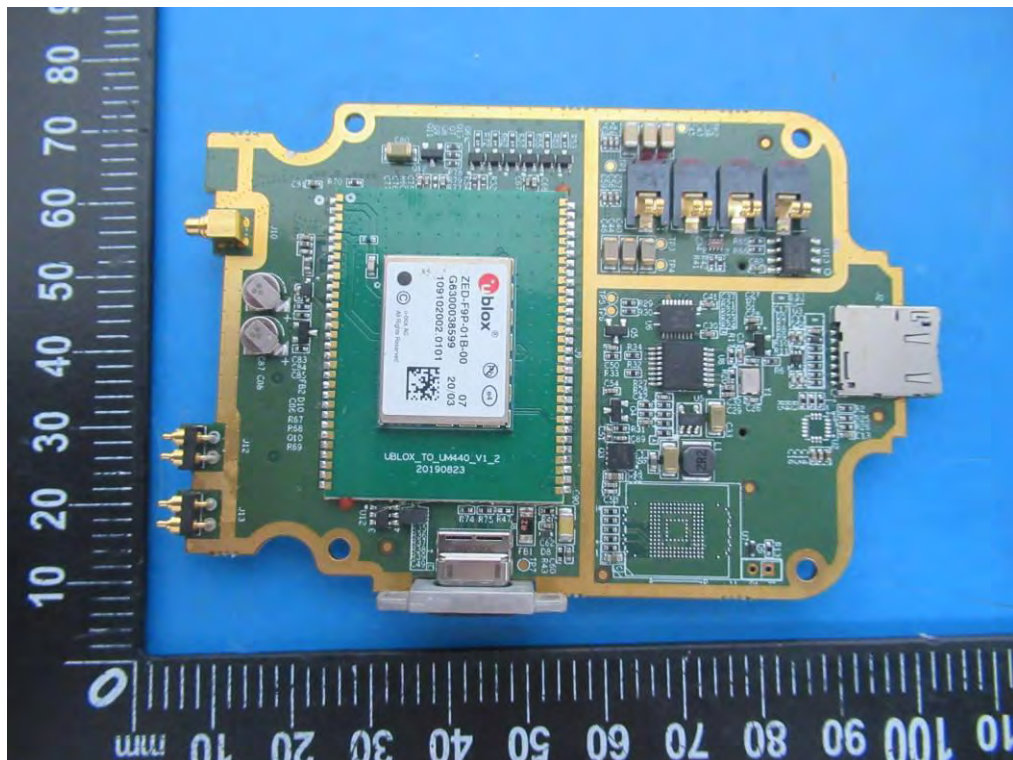

EUT View

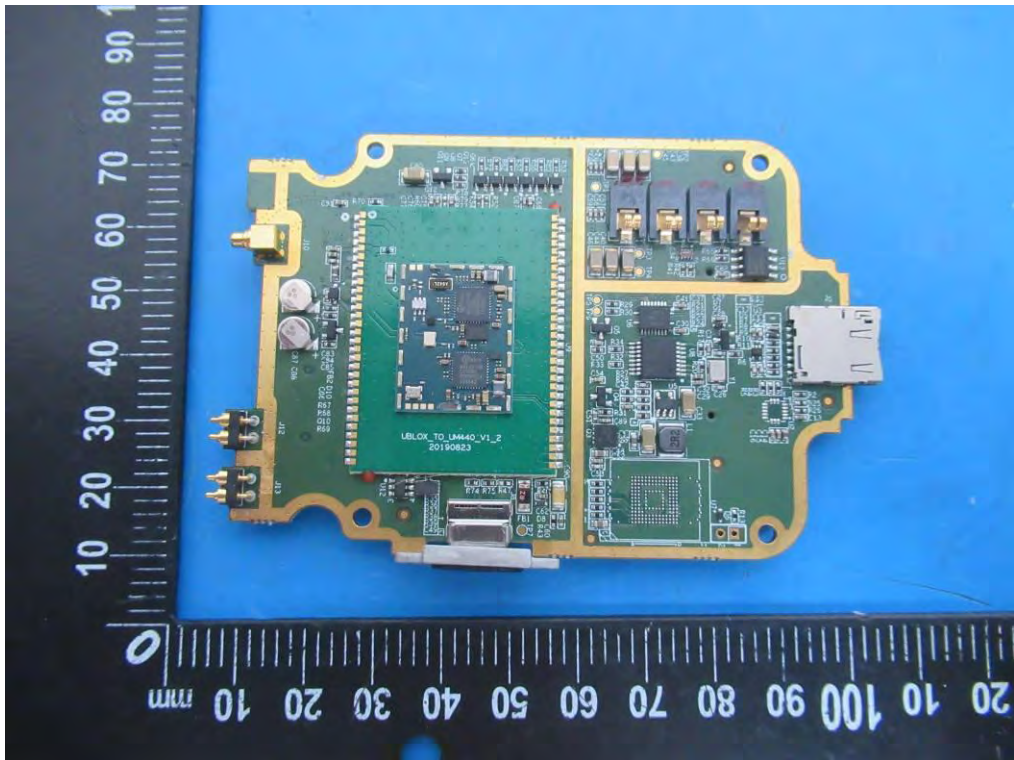


EUT View

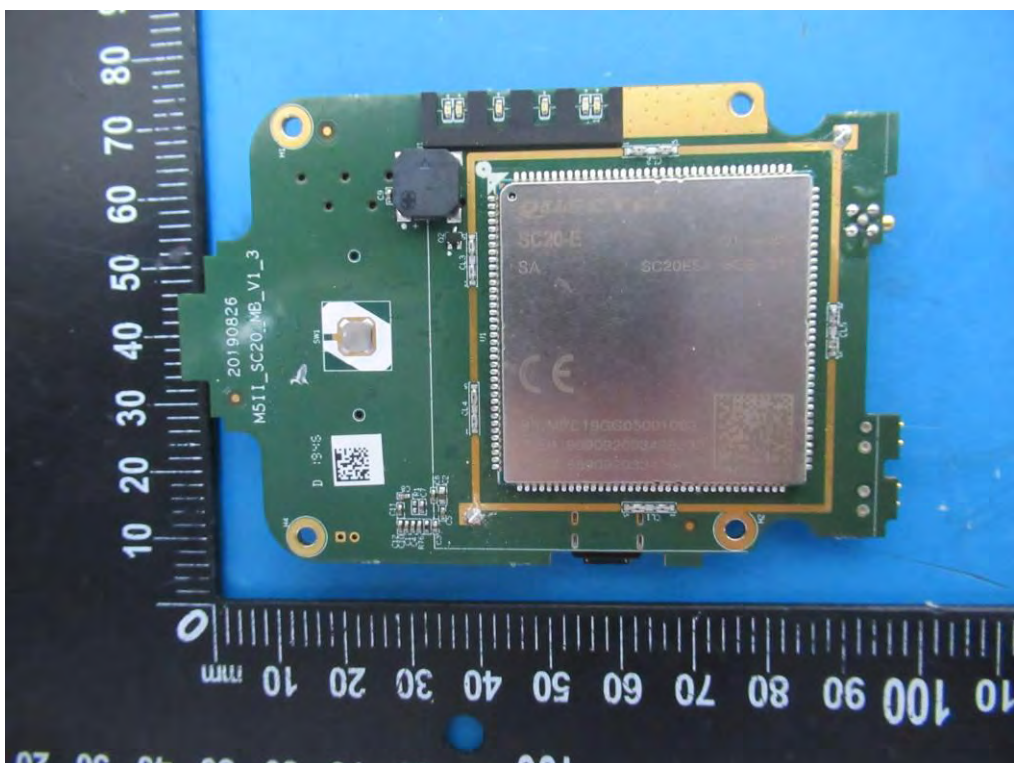


EUT View



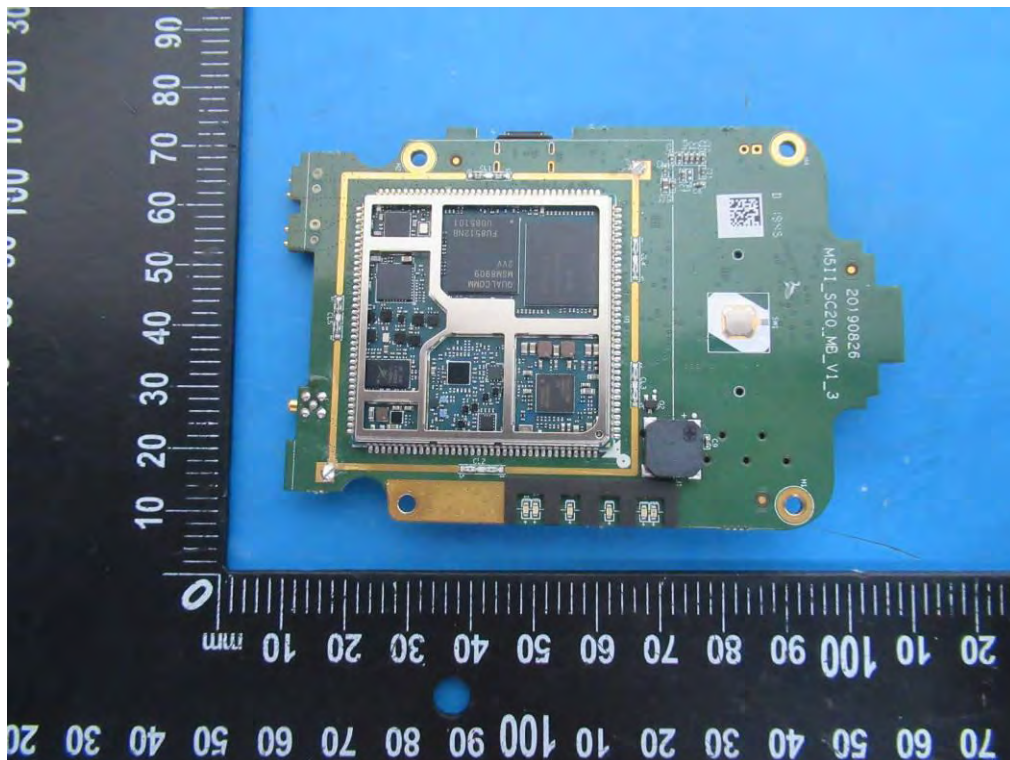

**EUT View**

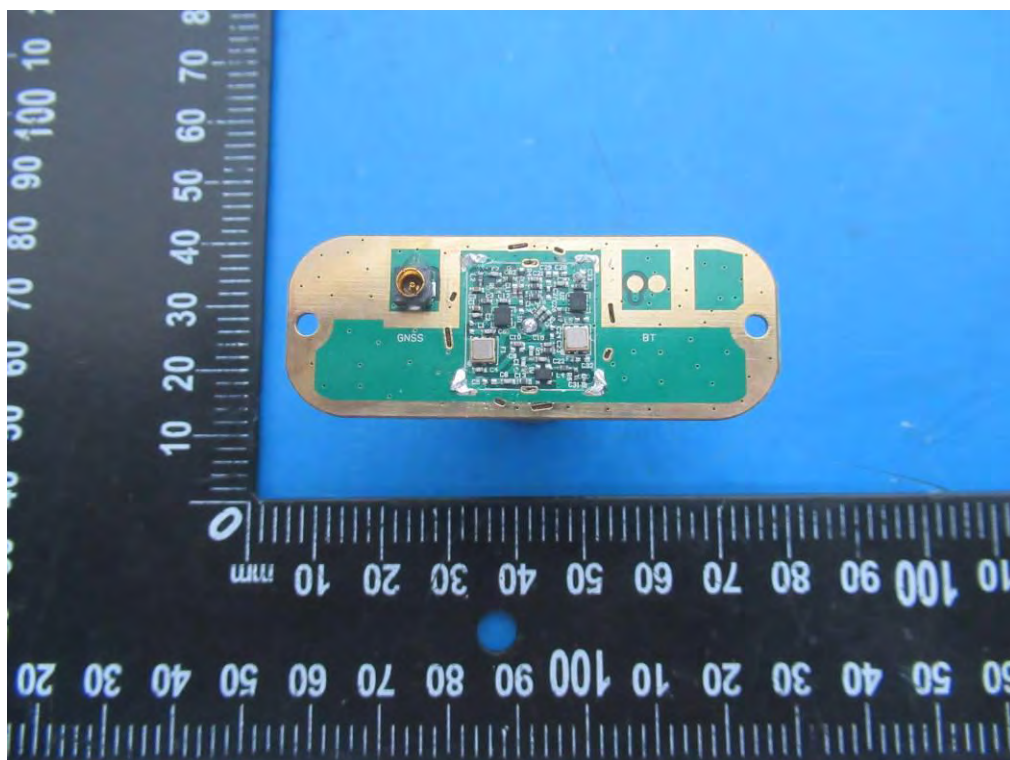

**EUT View**

-----THE END OF REPORT-----